

INDUSTRIAL SOLVENTS HANDBOOK

Fifth Edition

Edited by

Ernest W. Flick

NOYES DATA CORPORATION
Westwood, New Jersey, U.S.A.

Copyright © 1998 by Ernest W. Flick

No part of this book may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, recording or by any information storage and retrieval system, without permission in writing from the Publisher.

Library of Congress Catalog Card Number: 98-5137

ISBN: 0-8155-1413-1

Printed in the United States

Published in the United States of America by

Noyes Data Corporation

Fairview Avenue, Westwood, New Jersey 07675

10 9 8 7 6 5 4 3 2 1

Industrial solvents handbook / edited by Ernest W. Flick. -- 5th ed.

p. cm.

Includes bibliographical references and index.

ISBN 0-8155-1413-1

1. Solvents--Handbook, manuals, etc. I. Flick, Ernest W.

TP247.5.I53 1998

661'.807--dc21

98-5137

CIP

NOTICE

To the best of our knowledge the information in this publication is accurate; however, the Publisher does not assume any responsibility or liability for the accuracy or completeness of, or consequences arising from, such information. This book does not purport to contain detailed user instructions, and by its range and scope could not possibly do so. Mention of trade names or commercial products does not constitute endorsement or recommendation for use by the Author or Publisher.

Industrial solvents could be toxic, and therefore due caution should always be exercised in the use of these potentially hazardous materials. Final determination of the suitability of any information or product for use contemplated by any user, and the manner of that use, is the sole responsibility of the user. We strongly recommend that users seek and adhere to a manufacturer's or supplier's current instructions for handling each material they use. The reader is cautioned to consult the supplier in case of questions regarding current availability.

Foreword

Completely revised, and vastly expanded, this well-established and successful reference volume is designed principally for the chemical and other process industries, but will be found useful by anyone needing the latest pertinent data on industrial solvents.

This Fifth Edition is uniquely helpful when it becomes necessary to select a new solvent on a competitive or comparative basis; when the customary solvent, employed hitherto, might no longer be available, or can no longer be used because of environmental reasons; or when prices have risen to such an extent that an existing process must be redesigned to make it economically feasible again.

The over 1,200 tables in this book contain basic data on the physical properties of most solvents and on the solubilities of a variety of materials in these solvents. Even phase diagrams for multicomponent systems are included. Particularly valuable are the HPLC and UV data for various solvents provided in the last chapter.

The contents of the tables were selected by the editor mainly from manufacturers' literature at no cost to, nor influence from, the manufacturers or distributors of these solvents. The source of each table is indicated by a reference number following the title. A complete set of references is found at the end of the book, as well as a trade name index.

The vast amount of information contained in the book is evidenced at once in the large table of contents, which is organized by chemical groups and also serves as the index. An abbreviated summary of the contents is given below, indicating the number of tables in each category.

| | |
|------------------------------------|-----|
| Hydrocarbon Solvents | 143 |
| Halogenated Hydrocarbons | 64 |
| Nitroparaffins | 10 |
| Organic Sulfur Compounds | 34 |
| Monohydric Alcohols | 182 |
| Polyhydric Alcohols | 227 |
| Phenols | 1 |
| Aldehydes | 13 |
| Ethers | 49 |
| Glycol Ethers | 80 |
| Ketones | 50 |
| Acids | 21 |
| Amines | 193 |
| Esters | 84 |
| HPLC and UV Data | 84 |

Advanced composition and production methods developed by Noyes Data Corporation are employed to bring this durably bound book to you in a minimum of time. Special techniques are used to close the gap between "manuscript" and "completed book." In order to keep the price of the book to a reasonable level, it has been partially reproduced by photo-offset directly from the original material and the cost saving passed on to the reader. Due to this method of publishing, certain portions of the book may be less legible than desired.

Contents and Subject Index

| | |
|----------------------------------------------|-----------|
| INTRODUCTION | 1 |
| HYDROCARBON SOLVENTS | 3 |
| Paraffins | 3 |
| 2.1 Methane | 3 |
| 2.2 Ethane | 3 |
| 2.3 Propane | 4 |
| 2.4 Isobutane | 4 |
| 2.5 n-Butane | 5 |
| 2.6 2,2-Dimethylpropane | 5 |
| 2.7 Isopentane | 6 |
| 2.8 n-Pentane | 7 |
| 2.9 2,2-Dimethylbutane | 7 |
| 2.10 2,3-Dimethylbutane | 8 |
| 2.11 2-Methylpentane | 8 |
| 2.12 3-Methylpentane | 9 |
| 2.13 n-Hexane | 10 |
| 2.14 2,4-Dimethylpentane | 11 |
| 2.15 2,3-Dimethylpentane | 11 |
| 2.16 3-Methylhexane | 12 |
| 2.17 n-Heptane | 12 |
| 2.18 2,2,4-Trimethylpentane | 12 |
| 2.19 2,3,4-Trimethylpentane | 13 |
| 2.20 Mixed Trimethylpentanes | 13 |
| 2.21 Mixed Dimethylhexanes | 13 |
| 2.22 n-Octane | 14 |
| 2.23 2,2,5-Trimethylhexane | 14 |
| 2.24 n-Nonane | 15 |
| 2.25 n-Decane | 15 |
| 2.26 n-Undecane | 16 |
| 2.27 n-Dodecane | 16 |
| 2.28 n-Tridecane | 17 |
| 2.29 n-Tetradecane | 17 |
| 2.30 n-Pentadecane | 17 |
| 2.31 n-Hexadecane | 18 |
| 2.32 n-Heptadecane | 18 |
| 2.33 n-Octadecane | 18 |
| 2.34 n-Nonadecane | 18 |
| 2.35 n-Elcosane | 19 |
| Cycloparaffins | 19 |
| 2.36 Cyclopentane | 19 |
| 2.37 Methylcyclopentane | 20 |
| 2.38 Cyclohexane | 20 |
| 2.39 1,1-Dimethylcyclopentane | 21 |
| 2.40 1,2- and 1,3-Dimethylcyclopentane | 22 |
| 2.41 Methylcyclohexane | 22 |
| 2.42 trans-1,4-Dimethylcyclohexane | 23 |
| 2.43 cis-1,4-Dimethylcyclohexane | 23 |
| 2.44 Mixed 1,4-Dimethylcyclohexanes | 23 |
| 2.45 trans-1,2-Dimethylcyclohexane | 24 |
| 2.46 cis-1,2-Dimethylcyclohexane | 24 |
| 2.47 Mixed 1,2-Dimethylcyclohexane | 25 |
| 2.48 Ethylcyclohexane | 25 |
| 2.49 Isopropylcyclohexane | 26 |
| Olefins | 27 |
| 2.50 Ethylene | 27 |

| | | |
|---------------------|---------------------------|-----------|
| 2.51 | Propylene | 27 |
| 2.52 | Isobutylene | 27 |
| 2.53 | Butene-1 | 28 |
| 2.54 | trans-Butene-2 | 28 |
| 2.55 | cis-Butene-2 | 28 |
| 2.56 | Mixed 2-Butenes | 29 |
| 2.57 | 3-Methylbutene-1 | 29 |
| 2.58 | 2-Methylbutene-1 | 30 |
| 2.59 | Methylbutene-2 | 31 |
| 2.60 | Pentene-1 | 31 |
| 2.61 | cis-Pentene-2 | 32 |
| 2.62 | trans-Pentene-2 | 32 |
| 2.63 | Mixed 2-Pentenes | 32 |
| 2.64 | 3,3-Dimethylbutene-1 | 33 |
| 2.65 | Mixed 2,3-Dimethylbutenes | 33 |
| 2.66 | 4-Methylpentene-1 | 33 |
| 2.67 | cis-4-Methylpentene-2 | 34 |
| 2.68 | trans-4-Methylpentene-2 | 35 |
| 2.69 | Mixed 4-Methyl-2-Pentenes | 35 |
| 2.70 | 2-Methylpentene-1 | 36 |
| 2.71 | 2-Methylpentene-2 | 36 |
| 2.72 | Hexene-1 | 37 |
| 2.73 | cis-Hexene-2 | 37 |
| 2.74 | Mixed 2-Hexenes | 37 |
| 2.75 | Mixed 2- and 3-Hexenes | 38 |
| 2.76 | Heptene-1 | 38 |
| 2.77 | cis-Heptene-2 | 38 |
| 2.78 | Mixed 2-Heptenes | 39 |
| 2.79 | Mixed 3-Heptenes | 39 |
| 2.80 | 2,4,4-Trimethylpentene-1 | 39 |
| 2.81 | 2,4,4-Trimethylpentene-2 | 40 |
| 2.82 | Mixed Diisobutylenes | 40 |
| 2.83 | Octene-1 | 41 |
| 2.84 | cis-Octene-2 | 41 |
| 2.85 | Mixed 2-Octenes | 41 |
| 2.86 | Mixed Octenes | 42 |
| 2.87 | Nonene-1 | 42 |
| 2.88 | Decene-1 | 42 |
| 2.89 | Undecene-1 | 42 |
| 2.90 | Dodecene-1 | 42 |
| 2.91 | Tridecene-1 | 43 |
| 2.92 | Tetradecene-1 | 43 |
| 2.93 | Butadiene-1,3 | 43 |
| 2.94 | Isoprene | 44 |
| 2.95 | Piperylene | 44 |
| Cycloolefins | | 44 |
| 2.96 | Cyclopentene | 44 |
| 2.97 | Cyclohexene | 45 |
| 2.98 | 4-Vinylcyclohexene-1 | 46 |
| 2.99 | Mixed Methylcyclohexenes | 46 |
| 2.100 | Cyclooctadiene-1,5 | 47 |
| Aromatics | | 47 |
| 2.101 | Benzene | 47 |
| 2.102 | Toluene | 48 |
| 2.103 | Ethylbenzene | 48 |
| 2.104 | p-Xylene | 49 |
| 2.105 | m-Xylene | 49 |
| 2.106 | o-Xylene | 50 |
| 2.107 | Cumene | 50 |
| 2.108 | n-Propylbenzene | 51 |
| 2.109 | Pseudocumene | 51 |
| 2.110 | n-Butylbenzene | 51 |
| 2.111 | Isobutylbenzene | 52 |
| 2.112 | sec-Butylbenzene | 53 |
| 2.113 | tert-Butylbenzene | 53 |

| | | |
|---------------------------------|-----------------------------------------------------------------|------------|
| 2.114 | 1-Phenylbutene-2 | 54 |
| 2.115 | sec-Amylbenzene | 54 |
| 2.116 | Mixed Amylbenzenes | 54 |
| Terpenes | | 55 |
| 2.117 | DIPENTENE No. 122 Terpene Solvent | 55 |
| 2.118 | SOLVENOL 2 Terpene Solvent | 55 |
| 2.119 | SOLVENOL 226 Terpene Solvent | 56 |
| 2.120 | HERCULES Steam-Distilled Wood Turpentine | 56 |
| 2.121 | HERCULES alpha-Pinene | 57 |
| 2.122 | Selected Properties of Some Common Terpene Solvents | 57 |
| 2.123 | Arizona Terpene Products | 58 |
| Comparative Data | | 61 |
| 2.124 | Amoco PANASOL Solvents | 61 |
| 2.125 | Ashland Aliphatic and Aromatic Solvents | 62 |
| 2.126 | Chemcentral Solvents (Aliphatic and Aromatic) | 63 |
| 2.127 | Crowley Solvents | 64 |
| 2.128 | Dynaloy Solvents | 65 |
| 2.129 | Eastman Solvents and Diluents | 68 |
| 2.130 | Exxon Hydrocarbon Solvents | 73 |
| 2.131 | Fina Aromatic Solvents | 74 |
| 2.132 | Hoechst Celanese Methyl Isobutyl Ketone | 74 |
| 2.133 | Kendall/Amalie, Witco Special Solvents | 75 |
| 2.134 | Mobil Oil Aliphatic and Aromatic Solvents | 78 |
| 2.135 | Penreco Hydrocarbon Solvents | 81 |
| 2.136 | Phillips 66 Hihb Purity Hydrocarbon | 81 |
| 2.137 | Shell Chemical Solvents | 82 |
| 2.138 | Sunoco Chemicals Solvents | 90 |
| 2.139 | 3M SCOTCH-GRIP Solvents No. 2 and No. 3 | 93 |
| 2.140 | Total Petroleum Special Solvent | 93 |
| 2.141 | UCAR Solvents | 96 |
| 2.142 | Unocal Aliphatic and Aromatic Hydrocarbons | 99 |
| 2.143 | Vista LPA Solvents | 101 |
| HALOGENATED HYDROCARBONS | | 103 |
| Chlorinated Hydrocarbons | | 103 |
| 3.1 | Allyl Chloride | 103 |
| 3.2 | n-Amyl Chloride | 103 |
| 3.3 | Mixed Amyl Chlorides | 103 |
| 3.4 | Benzyl Chloride | 104 |
| 3.5 | n-Butyl Chloride | 104 |
| 3.6 | sec-Butyl Chloride | 104 |
| 3.7 | Butyryl Chloride | 105 |
| 3.8 | Caprylyl Chloride | 105 |
| 3.9 | Carbon Tetrachloride | 106 |
| 3.10 | Chlorinated Butane Derivatives | 107 |
| 3.11 | Chlorinated Hydrocarbons | 107 |
| 3.12 | Chlorinated Organic Solvents | 107 |
| 3.13 | CHLOROWAX Liquid Chlorinated Paraffins, Waxes and Alpha Olefins | 108 |
| 3.14 | Chlorobenzenes—Vapor Pressures | 111 |
| 3.16 | Chloromethylene Compounds | 113 |
| 3.17 | o- and p-Chlorotoluenes | 114 |
| 3.18 | p-Chlorotoluene | 114 |
| 3.19 | HALSO 99 | 115 |
| 3.20 | HALSO AG 125 | 115 |
| 3.21 | o-Dichlorobenzene | 116 |
| 3.22 | p-Dichlorobenzene | 116 |
| 3.23 | Dichlorodiisopropyl Ether | 117 |
| 3.24 | Dichloroethylene | 117 |
| 3.25 | Dichloroethyl Ether | 118 |
| 3.26 | Dichlorohydrin | 118 |
| 3.27 | Dichloromethane | 119 |
| 3.28 | Dichloropentanes | 120 |
| 3.29 | 2,4-Dichlorotoluene | 120 |
| 3.30 | Epichlorohydrin | 121 |
| 3.31 | Ethyl Chloride | 121 |

| | | |
|---------------------------------|-----------------------------------------------------------------------------|------------|
| 3.32 | Ethylene Chlorohydrin | 123 |
| 3.33 | Ethylene Dichloride | 123 |
| 3.34 | 2-Ethylhexyl Chloride | 124 |
| 3.35 | Glycerol α -Monochlorohydrin | 124 |
| 3.36 | Hexachloroethane | 125 |
| 3.37 | n-Hexyl Chloride | 126 |
| 3.38 | Methylene Chloride | 126 |
| 3.39 | Isopropyl Chloride | 127 |
| 3.40 | Methyl Chloride | 127 |
| 3.41 | Monochlorohydrin | 130 |
| 3.42 | Pentachloroethane | 130 |
| 3.43 | Perchloroethylene | 130 |
| 3.44 | Propylene Chlorohydrin | 132 |
| 3.45 | Propylene Dichloride | 132 |
| 3.46 | 1,1,2,2-Tetrachloroethane | 133 |
| 3.47 | Tetrachloroethylene | 134 |
| 3.48 | Trichlorobenzenes | 136 |
| 3.49 | 1,1,1-Trichloroethane | 136 |
| 3.50 | 1,1,2-Trichloroethane | 142 |
| 3.51 | Trichloroethylene | 142 |
| 3.52 | Density of Chlorinated Solvents | 145 |
| 3.53 | Vapor Pressure of Chlorinated Solvents | 145 |
| 3.54 | Trichloropropane | 146 |
| 3.55 | Triglycol Dichloride | 146 |
| 3.56 | Vinyl Chloride | 147 |
| 3.57 | Vinylidene Chloride | 147 |
| Comparative Data | | 149 |
| 3.58 | Alpha Cleaning Solvents | 149 |
| 3.59 | Ashland Chlorinated Solvents | 150 |
| 3.60 | Chemcentral Chlorinated Solvents | 150 |
| 3.61 | Dow Chemical Chlorinated Solvents | 151 |
| 3.62 | Vertrel Cleaning Agents | 160 |
| 3.63 | Occidental Chemical (OXSO Solvents) | 169 |
| 3.64 | 3M Hydrofluoroether | 195 |
| NITROPARAFFINS | | 211 |
| 4.1 | Angus Nitroparaffins | 211 |
| 4.2 | Angus Nitro Alcohols | 212 |
| 4.3 | Angus Primary Amino Alcohols | 213 |
| 4.4 | Angus DMAP-80 | 214 |
| 4.5 | Industrial Amines Ranked in Order of Decreasing Base Strength | 215 |
| 4.6 | Comparing Amines for Safety | 215 |
| 4.7 | NIPAR 640 | 216 |
| 4.8 | COMSOL 101-X | 218 |
| 4.9 | COMSOL 280 | 220 |
| 4.10 | COMSOL 820 | 221 |
| ORGANIC SULFUR COMPOUNDS | | 222 |
| 5.1 | Carbon Disulfide | 222 |
| 5.2 | Typical DMSO Properties | 223 |
| 5.3 | Vapor Pressure vs Temperature for DMSO | 224 |
| 5.4 | Specific Gravity of DMSO as a Function of Temperature | 224 |
| 5.5 | DMSO Viscosity as a Function of Temperature | 224 |
| 5.6 | Comparative Hygroscopicities of DMSO at Various Relative Humidities at 22°C | 225 |
| 5.7 | Initial Sorption Rates of DMSO at Various Relative Humidities at 22°C | 225 |
| 5.8 | Freezing Temperatures for DMSO—Solvent Binary System | 225 |
| 5.9 | Freezing Point for DMSO—Water Solutions | 226 |
| 5.10 | Freezing Point Curves for DMSO—Water Solutions | 226 |
| 5.11 | Heat of Mixing of DMSO—H ₂ O System at 22°C | 226 |
| 5.12 | Specific Gravity of DMSO—Water Solutions | 227 |
| 5.13 | Viscosity of DMSO—Water Solutions | 227 |
| 5.14 | Results of Reflux of DMSO for 24 Hours with Various Compounds | 227 |
| 5.15 | Thermal Stability of DMSO | 228 |
| 5.16 | Refluxing of DMSO and Mixtures for Shorter Periods | 228 |
| 5.17 | Effect of Heating DMSO with Concentrated Acids | 228 |

| | | |
|----------------------------|-----------------------------------------------------------------------------------------------------|-----|
| 5.18 | Solubility of Organic Materials in DMSO | 229 |
| 5.19 | Solubility of Resins and Polymers in DMSO | 230 |
| 5.20 | Solubility of Inorganic Materials in DMSO | 232 |
| 5.21 | Solubility of Gases in DMSO at Atmospheric Pressure and 20°C | 233 |
| 5.22 | Solubility Parameters of Strong Solvents | 233 |
| 5.23 | DMSO as a Solvent Replacement | 233 |
| 5.24 | Hansen Solubility Parameters of Polymer Envelopes | 234 |
| 5.25 | Polymer Solvency of DMSO/Tetralin Mixtures | 234 |
| 5.26 | Polymer Solvency of DMSO/MIKE Mixtures | 235 |
| 5.27 | Solvent Viscosities | 235 |
| 5.28 | Solvent Evaporation Times | 235 |
| Sulfolane | | 236 |
| 5.29 | Properties of Sulfolane | 236 |
| 5.30 | Solubility of Sulfolane in Various Chemical Compounds | 236 |
| 5.31 | Solubility of Various Chemical Compounds in Sulfolane | 236 |
| 5.32 | Thermal Stability of Sulfolane | 236 |
| 5.33 | Comparative Freezing Point Depression | 237 |
| 5.34 | Specific Gravity | 237 |
| MONOHYDRIC ALCOHOLS | | 238 |
| Methanol | | 238 |
| 6.1 | Physical Properties of Methanol | 238 |
| 6.2 | Properties of Aqueous Solutions of Methanol | 239 |
| 6.3 | Freezing Points of Methanol–Water Solutions | 239 |
| 6.4 | Density and Specific Gravity of Methanol–Water Solutions at 15°C | 240 |
| 6.5 | Density and Specific Gravity of ethanol–Water Solutions at 30°C | 241 |
| 6.6 | Resultant Volume When Methanol and Water are Mixed | 242 |
| 6.7 | Solubility of Methanol in Gasoline from 15° to 30°C | 242 |
| 6.8 | Liquid Density of Methanol | 243 |
| 6.9 | Liquid Heat Capacity of Methanol | 243 |
| 6.10 | Vapor Heat Capacity of Methanol | 244 |
| 6.11 | Heat of Vaporization of Methanol | 244 |
| 6.12 | Surface Tension of Methanol | 245 |
| 6.13 | Liquid Thermal Conductivity of Methanol | 245 |
| 6.14 | Vapor Thermal Conductivity of Methanol | 246 |
| 6.15 | Vapor Pressure of Methanol | 246 |
| 6.16 | Vapor Viscosity of Methanol | 247 |
| 6.17 | Liquid Viscosity of Methanol | 247 |
| 6.18 | Azeotropes of Methanol | 248 |
| Ethyl Alcohol | | 249 |
| 6.19 | Physical Properties of Anhydrous Ethyl Alcohol | 249 |
| 6.20 | Physical Properties of 95% Ethanol | 249 |
| 6.21 | Properties and Specifications of Ethyl Alcohol | 249 |
| 6.22 | Conversion Table—Weight and Volume Percent of Ethyl Alcohol in Ethyl Alcohol–Water Mixtures | 250 |
| 6.23 | Index of Refraction of Ethyl Alcohol–Water Mixtures at 60°F | 250 |
| 6.24 | Heat of Solution of Ethyl Alcohol in Water | 251 |
| 6.25 | Resultant Volume When Ethyl Alcohol and Water are Mixed | 251 |
| 6.26 | Boiling Points of Ethyl Alcohol–Water Solutions | 251 |
| 6.27 | Permanganate Time Test | 252 |
| 6.28 | Freezing Points of Ethyl Alcohol–Water Mixture | 252 |
| 6.29 | Viscosity of Ethyl Alcohol–Water Mixtures | 253 |
| 6.30 | Flash Point of Aqueous Ethyl Alcohol Solutions °C and °F vs Vol % Ethanol | 254 |
| 6.31 | Specific Heat of Aqueous Solutions of Ethanol | 254 |
| 6.32 | Surface Tension of Pure Ethanol at Various Temperatures | 254 |
| 6.33 | Latent Heat of Vaporization of Ethyl Alcohol | 255 |
| 6.34 | Heat Capacity of Ethyl Alcohol at Various Temperatures | 255 |
| 6.35 | Volumetric Equivalents | 256 |
| 6.36 | Ethyl Alcohol–Water Mixtures | 256 |
| 6.37 | Specially Denatures Alcohols | 262 |
| 6.38 | Authorized Denaturants for SDA 38B | 277 |
| 6.39 | Denaturants Authorized for Completely Denatured Alcohol (CDA) and Specially Denatured Alcohol (SDA) | 278 |
| 6.40 | Uses of Specially Denatured Alcohol | 279 |
| 6.41 | Filmex Special Industrial Solvent Formulations | 281 |

| | | |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------|------------|
| 6.42 | Completely Denatured Alcohol (CDA) Formulations | 281 |
| 6.43 | Proprietary Solvent Formulations | 281 |
| 6.44 | Punctilious Specially Denatured Alcohol (SDA) Formulations | 282 |
| 6.45 | Composition and Typical End Uses of Specially Denatured Alcohols | 283 |
| 6.46 | Composition of Completely Denatured Alcohol (CDA) | 284 |
| 6.47 | Composition of Synasol Proprietary Solvents, Anhydrol Special Industrial Solvents, and Inksolv Ink Solvents | 284 |
| 6.48 | Typical Physical Properties | 285 |
| 6.49 | Densities of Pure Ethanol–Water Mixtures at Various Temperatures | 286 |
| 6.50 | Vapor Pressure of Pure Ethanol at Various Temperatures | 287 |
| 6.51 | Constant Boiling Mixtures | 287 |
| 6.52 | Proof Definitions and Conversion Factors | 289 |
| 6.53 | Proof Conversion Tables | 289 |
| 6.54 | Azeotropes of Ethanol | 291 |
| n-PROPYL ALCOHOL | | 292 |
| 6.55 | Physical Properties of n-Propyl Alcohol | 292 |
| 6.56 | Azeotropes of n-Propyl Alcohol | 293 |
| 6.57 | n-Propanol–Water–Benzene | 294 |
| 6.58 | n-Propanol–Water–n-Butanol | 294 |
| 6.59 | n-Propanol–Water–Heptane | 294 |
| 6.60 | n-Propanol–Water–Hexane | 294 |
| ISOPROPYL ALCOHOL | | 295 |
| 6.61 | Physical Properties of Anhydrous Isopropyl Alcohol | 295 |
| 6.62 | Physical Properties of 91% Isopropyl Alcohol | 295 |
| 6.63 | Specific Gravity of Isopropyl Alcohol–Water Mixtures | 296 |
| 6.64 | Vapor–Liquid Compositions of Isopropyl Alcohol–Water Mixtures and Their Boiling Points | 297 |
| 6.65 | Refractive Index vs Composition of Isopropyl Alcohol–Water Mixtures at 25°C | 297 |
| 6.66 | Isopropyl Alcohol–Water: Kinematic Viscosity vs Composition at 25°C | 297 |
| 6.67 | Azeotropes of Isopropyl Alcohol | 298 |
| 6.68 | The Effect of Isopropyl Alcohol on the Dilution Ratio of Solvents | 299 |
| 6.69 | Viscosity of RS ½ Sec. Nitrocellulose in Mixtures of Toluene, Isopropyl Alcohol and Methyl Isobutyl Ketone | 299 |
| 6.70 | Methanol–Isopropyl Alcohol: Boiling Point vs Composition at 760 mm Hg | 299 |
| 6.71 | Methanol–Isopropyl Alcohol: Liquid–Vapor Equilibria at Atmospheric Pressure | 299 |
| 6.72 | Vapor Pressure of Isopropyl Alcohol (Anhydrous) and sec-Butyl Alcohol at Various Temperatures | 300 |
| 6.73 | Specific Gravities of Alcohols vs Temperature | 300 |
| n-Butyl Alcohol | | 301 |
| 6.74 | Physical Properties of n-Butyl Alcohol | 301 |
| 6.75 | Vapor Pressure of Butyl Alcohol at Various Temperatures | 302 |
| 6.76 | Solubility of Water in Butyl Alcohol at Various Temperatures | 302 |
| 6.77 | Solubility of Butyl Alcohol in Water at Various Temperatures | 303 |
| 6.78 | Azeotropes of n-Butyl Alcohol | 303 |
| Isobutyl Alcohol | | 304 |
| 6.79 | Physical Properties of Isobutyl Alcohol | 304 |
| 6.80 | Azeotropes of Isobutyl Alcohol | 304 |
| 6.81 | Relative Evaporation Rates of Various Butyl Alcohols and Acetates | 305 |
| sec-Butyl Alcohol | | 305 |
| 6.82 | Physical Properties of sec-Butyl Alcohol | 305 |
| 6.83 | Azeotropes of sec-Butyl Alcohol | 305 |
| tert-Butyl Alcohol | | 306 |
| 6.84 | Physical Properties of tert-Butyl Alcohol | 306 |
| 6.85 | Azeotropes of tert-Butyl Alcohol | 306 |
| Primary Amyl Alcohol | | 307 |
| 6.86 | Physical Properties of Primary Amyl Alcohol | 307 |
| Primary n-Amyl Alcohol | | 307 |
| 6.87 | Physical Properties of Primary n-Amyl Alcohol | 307 |
| sec-Amyl Alcohol | | 308 |
| 6.88 | Physical Properties of sec-Amyl Alcohol | 308 |
| 6.89 | Azeotropes of sec-Amyl Alcohol | 308 |
| sec-n-Amyl Alcohol | | 309 |
| 6.90 | Physical Properties of sec-n-Amyl Alcohol | 309 |
| 6.91 | Azeotropes of sec-n-Amyl Alcohol | 309 |
| tert-Amyl Alcohol, Refined | | 310 |

| | | |
|------------------------------------------|-------------------------------------------------------------------|-----|
| 6.92 | Physical Properties of Refined tert-Amyl Alcoho | 310 |
| 6.93 | Azeotropes of tert-Amyl Alcohol | 310 |
| Isoamyl Alcohol | | 311 |
| 6.94 | Physical Properties of Isoamyl Alcohol | 311 |
| 6.95 | Azeotropes of Isoamyl Alcohol | 311 |
| Active Amyl Alcohol | | 312 |
| 6.96 | Physical Properties of Active Amyl Alcohol | 312 |
| Fusel Oil, Refined | | 312 |
| 6.97 | Physical Properties of Refined Fusel Oil | 312 |
| Methylamyl Alcohol | | 313 |
| 6.98 | Physical Properties of Methylamyl Alcohols | 313 |
| 2-Ethylbutyl Alcohol | | 313 |
| 6.99 | Physical Properties of 2-Ethylbutyl Alcohol | 313 |
| n-Hexyl Alcohol | | 314 |
| 6.100 | Physical Properties of n-Hexyl Alcohol | 314 |
| 6.101 | Solubility of Water in n-Hexyl Alcohol | 314 |
| 6.102 | Azeotropes of exyl Alcohol | 314 |
| Cyclohexyl Alcohol | | 315 |
| 6.103 | Physical Properties of Cyclohexyl Alcohol | 315 |
| 6.104 | Azeotropes of Cyclohexyl Alcohol | 315 |
| Heptyl Alcohol | | 316 |
| 6.105 | Physical Properties of Heptyl Alcohol | 316 |
| 6.106 | Azeotropes of Heptyl Alcohol | 316 |
| 2-Heptyl Alcohol | | 316 |
| 6.107 | Physical Properties of 2-Heptyl Alcohol | 316 |
| 3-Heptyl Alcohol | | 317 |
| 6.108 | Physical Properties of 3-Heptyl Alcohol | 317 |
| 2-Ethylhexyl Alcohol | | 317 |
| 6.109 | Physical Properties of 2-Ethylhexyl Alcohol | 317 |
| n-Octyl Alcohol | | 317 |
| 6.110 | Physical Properties of n-Octyl Alcohol | 317 |
| 6.111 | Azeotropes of n-Octyl Alcohol | 318 |
| sec-Octyl Alcohol | | 318 |
| 6.112 | Physical Properties of sec-Octyl Alcohol | 318 |
| 6.113 | Azeotropes of sec-Octyl Alcohol | 318 |
| Isooctyl Alcohol | | 319 |
| 6.114 | Physical Properties of Isooctyl Alcohol | 319 |
| Nonyl Alcohol | | 319 |
| 6.115 | Physical Properties of Nonyl Alcohol 319 | |
| 3,5,5-Trimethylhexyl Alcohol | | 320 |
| 6.116 | Physical Properties of 3,5,5-Trimethylhexyl Alcohol | 320 |
| Decyl Alcohol | | 320 |
| 6.117 | Physical Properties of Decyl Alcohol | 320 |
| Isodecyl Alcohol | | 321 |
| 6.118 | Physical Properties of Isodecyl Alcohol | 321 |
| Tridecyl Alcohol | | 321 |
| 6.119 | Physical Properties of Tridecyl Alcohol | 321 |
| Other Alcohols and Alcohol Blends | | 322 |
| 6.120 | ALFOL Alcohol Low Range Blends C ₆ -C ₁₀ | 322 |
| 6.121 | ALFOL Alcohol Pure Homologs C ₆ -C ₁₈ | 322 |
| 6.122 | ALFOL Alcohol High Range Blends C ₁₀ -C ₂₀₊ | 323 |
| 6.123 | ALFOL Typical Properties | 324 |
| Comparative Data | | 325 |
| 6.124 | Ashland Alcohols | 325 |
| 6.125 | Chemcentral Alcohols | 325 |
| 6.126 | CPS Chemical Alcohol 99% | 326 |
| 6.127 | Eastman Latent Solvents | 327 |
| 6.128 | Hoechst Celanese Alcohols | 329 |
| 6.129 | Procter and Gamble Fatty Alcohols | 330 |
| 6.130 | Shell Chemical Alcohols | 331 |
| 6.131 | Union Carbide Alcohols | 332 |
| Allyl Alcohol | | 333 |
| 6.132 | Physical Properties of Allyl Alcohol | 333 |
| 6.133 | Azeotropes of Alkyl Alcohol | 333 |

| | |
|---------------------------------------------------------------------------------------------------------------------------------|-----|
| Crotyl Alcohol | 334 |
| 6.134 Physical Properties of Crotyl Alcohol | 334 |
| Methylbutynyl Alcohol | 334 |
| 6.135 Physical Properties of Methylbutynyl Alcohol | 334 |
| Methylpentynyl Alcohol | 335 |
| 6.136 Physical Properties of Methylpentynyl Alcohol | 335 |
| Higher Unsaturated Alcohols | 335 |
| 6.137 Unsaturated Aliphatic Alcohols | 335 |
| Diacetone Alcohol | 335 |
| 6.138 Physical Properties of Diacetone Alcohol | 335 |
| 2-Mercaptoethyl Alcohol | 336 |
| 6.139 Physical Properties of 2-Mercaptoethyl Alcohol | 336 |
| 2-Ethylsulfonylethyl Alcohol | 336 |
| 6.140 Physical Properties of 2-Ethylsulfonylethyl Alcohol | 336 |
| 1,1,1-Trifluoroethyl Alcohol | 336 |
| 6.141 Trifluoroethanol Physical Properties | 336 |
| 6.142 Polymer Solubilities in Trifluoroethanol | 337 |
| 6.143 Salt Solubility (wt %) in Trifluoroethanol at 25°C | 337 |
| 6.144 Solubility of Gases in Trifluoroethanol at 27°C | 337 |
| 6.145 Vapor Pressure vs Temperature | 337 |
| 6.146 Freezing Point: Trifluoroethanol-Water .. 338 | |
| 6.147 Infrared Spectrum | 338 |
| 1H,1H,3H-Tetrafluoro-1-Propyl Alcohol | 338 |
| 6.148 Physical Properties of 1H,1H,3H-Tetrafluoro-1-Propyl Alcohol | 338 |
| 1H,1H,5H-Octafluoro-1-Pentyl Alcohol | 339 |
| 6.149 Physical Properties of 1H,1H,5H-Octafluoro-1-Pentyl Alcohol | 339 |
| Benzyl Alcohol | 339 |
| 6.150 Physical Properties of Benzyl Alcohol | 339 |
| 6.151 VELSICOL Benzyl Alcohol | 339 |
| Furfuryl Alcohol | 340 |
| 6.152 Physical Properties of Furfuryl Alcohol | 340 |
| 6.153 Vapor Pressure of Furfuryl Alcohol | 341 |
| 6.154 Pounds per Gallon of Furfuryl Alcohol at Various Temperatures | 341 |
| 6.155 Density of Furfuryl Alcohol-Water Solutions as a Function of Composition (at 25°C, 77°F) | 342 |
| 6.156 Vapor Pressure of Furfuryl Alcohol as a Function of Temperature | 342 |
| 6.157 Solubility of Liquid Organic Compounds in Furfuryl Alcohol (at 25°C, 77°F) | 343 |
| 6.158 Solubility of Solid Organic Compounds in Furfuryl Alcohol (at 25 °C, 77°F) | 343 |
| 6.159 Solubility of Thermoplastic Resins in Furfuryl Alcohol (at Room Temperature) | 344 |
| 6.160 Effect of Time at Elevated Temperature on Certain Characteristics of Furfuryl Alcohol (Under Neutral Conditions) | 344 |
| 6.161 Stabilization of Furfuryl Alcohol With an Amine (at 150°C in Glass) | 345 |
| 6.162 Antioxidation of Furfuryl Alcohol | 345 |
| Tetrahydrofurfuryl Alcohol | 346 |
| 6.163 Physical Properties of Tetrahydrofurfuryl Alcohol | 346 |
| 6.164 Solubility of Various Substances in Tetrahydrofurfuryl Alcohol | 346 |
| 6.165 Vapor-Liquid Equilibria in the Tetrahydrofurfuryl Alcohol-Water System | 347 |
| 6.166 Specific Gravity and Pounds per Gallon of Tetrahydrofurfuryl Alcohol at Various Temperatures | 347 |
| 6.167 Vapor Pressure of Tetrahydrofurfuryl Alcohol | 347 |
| 6.168 Vapor-Liquid Equilibria Curve of the THFA-Water System at the Boiling Point | 348 |
| 6.169 The System THFA-Water Composition Curve | 348 |
| 6.170 Specific Gravity and Pounds per Gallon | 349 |
| 6.171 Vapor Pressure (Boiling Point Method) | 349 |
| 6.172 HERCO and YARMOR Pine Oil | 349 |
| 6.173 Hercules TERPINEOL | 352 |
| Other Data | 354 |
| 6.174 Solubility Data for Alcohols | 354 |
| 6.175 Melting Points of Saturated Monohydric Alcohols | 355 |
| 6.176 Rate of Evaporation of Various Solvents at Room Temperature | 355 |
| 6.177 Comparative Evaporation Rates of Alcohols | 355 |
| 6.178 Vapor Pressure of Alcohols at Various Temperatures | 356 |
| 6.179 Freezing Points (Initial Crystallization) of Aqueous Solution of Alcohols | 356 |
| 6.180 Specific Gravity of Aqueous Solution of Alcohols at 20°C | 357 |
| 6.181 Viscosity of Ethyl Cellulose in Alcohol-Hydrocarbon Mixtures | 357 |
| 6.182 Evaporation Data for Various Solvents | 358 |

| | |
|-------------------------------------------------------------------------------------------------------|-----|
| POLYHYDRIC ALCOHOLS | 359 |
| Ethylene Glycol | 359 |
| 7.1 Physical Properties and Specifications of Ethylene Glycol | 359 |
| 7.2 Boiling Points of Aqueous Ethylene Glycol Solutions | 363 |
| 7.3 Density of Aqueous Ethylene Glycol Solutions | 363 |
| 7.4 Specific Gravity at 60°F of Aqueous Ethylene Glycol Solution vs Composition | 361 |
| 7.5 Freezing Points of Aqueous Ethylene Glycol Solutions | 361 |
| 7.6 Specific Heat of Aqueous Ethylene Glycol Solutions | 362 |
| 7.7 Vapor-Liquid Composition Curves for Aqueous Ethylene Glycol Solutions | 362 |
| 7.8 Vapor Pressure of Aqueous Ethylene Glycol Solutions | 363 |
| 7.9 Viscosity of Aqueous Ethylene Glycol Solutions | 363 |
| 7.10 Relative Humectant Values of Aqueous Solutions of Ethylene Glycol | 364 |
| 7.11 Water Vapor Dew Points Over Aqueous Ethylene Glycol Solutions | 364 |
| 7.12 Key Hygroscopicity Curve for Ethylene Glycol | 365 |
| 7.13 Moisture Absorption of Ethylene Glycol at Various Relative Humidities | 365 |
| 7.14 Moisture Absorption of Ethylene Glycol at Various Absolute Humidities | 365 |
| 7.15 Kinematic Viscosity of Anhydrous Ethylene Glycol and Trimethylene Glycol Solutions | 366 |
| 7.16 Freezing Points of Anhydrous Ethylene Glycol and Trimethylene Glycol Solutions | 366 |
| 7.17 Azeotropes of Ethylene Glycol | 366 |
| Propylene Glycol | 367 |
| 7.18 Physical Properties of Propylene Glycol | 367 |
| 7.19 Propylene Glycol Specifications | 368 |
| 7.20 Boiling Points of Aqueous Propylene Glycol Solutions | 368 |
| 7.21 Conversion Chart for Aqueous Propylene Glycol Solutions | 369 |
| 7.22 Density of Aqueous Propylene Glycol Solutions (Percent by Weight) | 369 |
| 7.23 Effect of Aqueous Propylene Glycol Solutions on Dew Points at Various Contact Temperatures | 370 |
| 7.24 Freezing Points of Aqueous Propylene Glycol Solutions | 370 |
| 7.25 Heat of Vaporization of Propylene Glycol at Various Temperatures | 371 |
| 7.26 Refractive Indices of Aqueous Propanediol Solutions at 20°, 30°, and 40°C | 371 |
| 7.27 Relative Humectant Values of Propylene Glycol, N.F. | 372 |
| 7.28 Specific Gravity of Aqueous Propylene Glycol Solutions at Various Temperatures | 372 |
| 7.29 Specific Heat of Aqueous Propylene Glycol Solutions | 373 |
| 7.30 Thermal Conductivity of Aqueous Propylene Glycol Solutions at Various Temperatures | 373 |
| 7.31 Total Pressure over Aqueous Propylene Glycol Solutions Versus Temperatures | 373 |
| 7.32 Vapor-Liquid Composition Curves for Aqueous Propylene Glycol Solutions | 373 |
| 7.33 Vapor Pressures of Aqueous Propylene Glycol Solutions | 374 |
| 7.34 Viscosities of Aqueous Propylene Glycol Solutions | 374 |
| 7.35 Azeotropes of Propylene Glycol | 374 |
| 1,3-Propanediol | 375 |
| 7.36 Physical Properties of 1,3-Propanediol | 375 |
| 7.37 Freezing Points of Aqueous Solutions of 1,3-Propanediol | 375 |
| 7.38 Specific Gravity of Aqueous Solutions of 1,3-Propanediol at 20° and 40°C | 376 |
| 1,2-Butanediol | 376 |
| 7.39 Physical Properties of 1,2-Butanediol | 376 |
| 7.40 Specific Gravity of Aqueous 1,2-Butanediol Solutions at 20° and 40°C | 377 |
| 7.41 Absolute Viscosity of Aqueous 1,2-Butanediol Solutions at 20° and 40°C | 377 |
| 1,3-Butanediol | 377 |
| 7.42 Physical Properties of 1,3-Butanediol | 377 |
| 7.43 Freezing Point of Aqueous Solutions of 1,3-Butanediol | 378 |
| 7.44 Refractive Index and Freezing Point of Aqueous Solutions of 1,3-Butanediol | 378 |
| 7.45 Specific Gravity of Aqueous 1,3-Butanediol Solutions at 20° and 40°C | 378 |
| 7.46 Viscosity of Aqueous Solutions of 1,3-Butanediol | 378 |
| 7.47 Absolute Viscosity of Aqueous 1,3-Butanediol Solutions at 20° and 40°C | 378 |
| 1,4-Butanediol | 379 |
| 7.48 Physical Properties of 1,4-Butanediol | 379 |
| 7.49 Absolute Viscosity of Aqueous 1,4-Butanediol Solutions at 20° and 40°C | 379 |
| 7.50 Specific Gravity of Aqueous 1,4-Butanediol Solutions at 20° and 40°C | 379 |
| 2,3-Butanediol | 380 |
| 7.51 Physical Properties of 2,3-Butanediol | 380 |
| 7.52 Boiling Points of Aqueous levo-2,3-Butanediol Solutions at Atmospheric Pressure | 380 |
| 7.53 Boiling Points of Aqueous levo-2,3-Butanediol-Ethanol Solutions | 381 |
| 7.54 Boiling Points of Aqueous levo-2,3-Butanediol-Methanol Solutions | 381 |
| 7.55 Freezing Points of Aqueous levo-2,3-Butanediol Solutions | 381 |
| 7.56 Freezing Points of Aqueous meso-dextro-2,3-Butanediol Solutions | 382 |

| | | |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 7.57 | Effect of meso-2,3-Butanediol on the Freezing Point of Aqueous levo-2,3-Butanediol Solutions | 382 |
| 7.58 | Freezing Points of Aqueous levo-2,3-Butanediol-Ethanol Solutions | 383 |
| 7.59 | Freezing Points of Aqueous levo-2,3-Butanediol-Ethylene Glycol Solutions | 383 |
| 7.60 | Freezing Points of Aqueous levo-2,3-Butanediol-Methanol Solutions | 383 |
| 7.61 | Freezing Points of Aqueous levo-2,3-Butanediol-Tetrahydrofurfuryl Alcohol Solutions | 383 |
| 7.62 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol Solutions, Expressed Logarithmically, as a Function of Concentration and Temperature | 384 |
| 7.63 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol Solutions in Relation to Concentration and Temperature | 384 |
| 7.64 | Kinematic Viscosity of 60% levo-2,3-Butanediol, Glycerol and Ethylene Glycol Solutions at Low Temperatures | 384 |
| 7.65 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Ethanol Solutions at 20°C, Expressed in Centistokes | 384 |
| 7.66 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Methanol Solutions at 20°C, Expressed in Centistokes | 385 |
| 7.67 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Ethylene Glycol Solutions in 20°C Expressed in Centistokes | 385 |
| 7.68 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Tetrahydrofurfuryl Alcohol Solutions at 20°C, Expressed in Centistokes | 385 |
| 7.69 | Absolute Viscosity of Aqueous Solutions of Ethylene Glycol, levo-2,3-Butanediol, meso-dextro-2,3-Butanediol and Glycerol at 20°C | 385 |
| 7.70 | Optical Rotatory Power of Aqueous levo-2,3-Butanediol Solutions at 20°C | 386 |
| 7.71 | Effects of Concentration and Temperature on the Specific Rotatory Power of Aqueous levo-2,3-Butanediol Solutions | 386 |
| 7.72 | Refractive Indices of Aqueous levo-2,3-Butanediol Solutions at Different Temperatures | 386 |
| 7.73 | Refractive Indices of Aqueous Solutions of meso- and levo-2,3-Butanediol at 25°C | 386 |
| 7.74 | Specific Gravity of Aqueous levo-2,3-Butanediol Solutions at 20°, 30°, and 40°C | 387 |
| 7.75 | Specific Gravity of Aqueous meso-2,3-Butanediol Solutions at 20°, 30°, and 40°C | 387 |
| 7.76 | Surface Tension of Aqueous Solutions of levo-2,3-Butanediol and Ethylene Glycol | 387 |
| Butanediols | | 388 |
| 7.77 | Refractive Indices of Aqueous Butanediol Solutions at 20°, 30°, and 40°C | 388 |
| 7.78 | Kinematic Viscosity of Aqueous Butanediol Solutions at 20° and 40°C, in Centistokes | 388 |
| 2-Butene-1,4-diol | | 388 |
| 7.79 | Physical Properties of 2-Butene-1,4-diol | 388 |
| 2-Butyne-1,4-diol | | 389 |
| 7.80 | Physical Properties of 2-Butyne-1,4-diol | 389 |
| 1,5-Pentanediol | | 389 |
| 7.81 | Physical Properties of 1,5-Pentanediol | 389 |
| 7.82 | Absolute Viscosity of Aqueous 1,5-Pentanediol Solutions at 20° and 40°C | 390 |
| 7.83 | Specific Gravity of Aqueous 1,5-Pentanediol Solutions at 20° and 40°C | 390 |
| 2,4-Pentanediol | | 390 |
| 7.84 | Physical Properties of 2,4-Pentanediol | 390 |
| Neopentyl Glycol | | 390 |
| 7.85 | Physical Properties of Neopentyl Glycol | 390 |
| Pentanediols | | 391 |
| 7.86 | Kinematic Viscosity of Aqueous Pentanediol Solutions at 20° and 40°C, in Centistokes | 391 |
| 7.87 | Refractive Indices of Aqueous Pentanediol Solutions at 20° and 40°C | 391 |
| 1,6-Hexanediol | | 392 |
| 7.88 | Physical Properties of 1,6-Hexanediol | 392 |
| 2,5-Hexanediol | | 392 |
| 7.89 | Physical Properties of 1,5-Hexanediol | 392 |
| Hexylene Glycol | | 392 |
| 7.90 | Physical Properties and Specifications of Hexylene Glycol | 392 |
| 7.91 | Freezing Points of Hexylene Glycol-Water Mixtures | 393 |
| 7.92 | Specific Gravity and Freezing Point of Hexylene Glycol-Water Mixtures | 393 |
| Pinacol | | 394 |
| 7.93 | Physical Properties of Pinacol | 394 |
| 2,2-Diethyl-1,3-Propanediol | | 394 |
| 7.94 | Physical Properties of 2,2-Diethyl-1,3-Propanediol | 394 |
| 2-Ethyl-1,3-Hexanediol | | 394 |
| 7.95 | Physical Properties of 2-Ethyl-1,3-Hexanediol | 394 |
| 2,5-Dimethyl-3-Hexyne-2,5-diol | | 395 |
| 7.96 | Physical Properties of 2,5-Dimethyl-3-Hexyne-2,5-diol | 395 |
| 1,4-Cyclohexanedimethanol | | 395 |

| | | |
|----------------------------------------|----------------------------------------------------------------------------------------------------------|-----|
| 7.97 | Properties of 1,4-Cyclohexanedimethanol | 395 |
| p-Xylylene Glycol | | 397 |
| 7.98 | Physical Properties of p-Xylylene Glycol | 397 |
| 2-Ethyl-2-Butyl-1,3-Propanediol | | 397 |
| 7.99 | Physical Properties of 2-Ethyl-2-Butyl-1,3-Propanediol | 397 |
| 3,6-Dimethyl-4-Octyne-3,6-diol | | 397 |
| 7.100 | Physical Properties of 3,6-Dimethyl-4-Octyne-3,6-diol | 397 |
| Thiodiglycol | | 398 |
| 7.101 | Physical Properties of Thiodiglycol | 398 |
| 7.102 | Vapor Pressure of Thiodiglycol at Various Temperatures | 398 |
| Miscellaneous Glycols | | 399 |
| 7.103 | Hydrates of Aliphatic Glycols | 399 |
| 7.104 | Hydrates of Cyclic Glycols | 400 |
| 7.105 | Freezing Points of Aqueous Ethylene Glycol and Propylene Glycol Solutions | 401 |
| 7.106 | Freezing Points of Various Aqueous Glycol Solutions, °C | 402 |
| 7.107 | Freezing Points of Various Aqueous Alcohols, Glycols and Glycerol | 402 |
| 7.108 | Compatibility of Coupling Solvents with Carbon Tetrachloride and Water | 402 |
| 7.109 | Key Hygroscopicity Curve | 403 |
| 7.110 | Surface Tension of Glycol-Water Systems | 403 |
| 7.111 | Vapor Pressure of Glycols | 403 |
| 7.112 | Viscosity of Glycols | 404 |
| 7.113 | Water Absorption by Glycols as a Function of Time | 404 |
| 7.114 | Water Absorption by Glycols as a Function of Relative Humidity | 404 |
| 7.115 | Refractive Index, Specific Gravity, and Boiling Point Measurements of Various Glycols | 404 |
| 7.116 | Relative Solvent Properties of Glycols | 405 |
| 7.117 | Effect of Various Glycols on Synthetic Rubber Samples—Results Reported as % Volume and % Weight Increase | 405 |
| 7.118 | Solubility of Cellulose Derivatives in Glycols | 406 |
| 7.119 | Compatibility of Film Cast from 80/20 Toluene/Alcohol | 406 |
| 7.120 | Relative Humectant Values | 406 |
| 7.121 | Water Vapor Dew Points Over Aqueous Ethylene Glycol Solutions | 407 |
| 7.122 | Water Vapor Dew Points Over Aqueous Diethylene Glycol Solutions | 407 |
| 7.123 | Water Vapor Dew Points Over Aqueous Triethylene Glycol Solutions | 407 |
| 7.124 | Water Vapor Dew Points Over Aqueous Propylene Glycol Solutions | 407 |
| 7.125 | Water Vapor Dew Points Over Aqueous Dipropylene Glycol Solutions | 408 |
| 7.126 | Boiling Points of Glycols at 50 mm Hg | 408 |
| 7.127 | Total Pressure Over Aqueous Ethylene Glycol Solutions vs Temperature | 408 |
| 7.128 | Total Pressure Over Aqueous Diethylene Glycol Solutions vs Temperature | 408 |
| 7.129 | Total Pressure Over Aqueous Triethylene Glycol Solutions vs Temperature | 409 |
| 7.130 | Total Pressure Over Aqueous Propylene Glycol Solutions vs Temperature | 409 |
| 7.131 | Total Pressure Over Aqueous Dipropylene Glycol Solutions vs Temperature | 409 |
| 7.132 | Vapor-Liquid Composition Curves for Aqueous Ethylene Glycol Solutions | 410 |
| 7.133 | Vapor-Liquid Composition Curves for Aqueous Diethylene Glycol Solutions | 410 |
| 7.134 | Vapor-Liquid Composition Curves for Aqueous Triethylene Glycol Solutions | 411 |
| 7.135 | Vapor-Liquid Composition Curves for Aqueous Propylene Glycol Solutions | 411 |
| 7.136 | Vapor-Liquid Composition Curves for Aqueous Dipropylene Glycol Solutions | 412 |
| 7.137 | Pour Points of Glycols | 412 |
| 7.138 | Viscosities of Anhydrous Glycols | 412 |
| 7.139 | Viscosities of Aqueous Ethylene Glycol Solutions | 413 |
| 7.140 | Viscosities of Aqueous Diethylene Glycol Solutions | 413 |
| 7.141 | Viscosities of Aqueous Triethylene Glycol Solutions | 414 |
| 7.142 | Viscosities of Aqueous Tetraethylene Glycol Solutions | 414 |
| 7.143 | Viscosities of Aqueous Propylene Glycol Solutions | 414 |
| 7.144 | Viscosities of Aqueous Dipropylene Glycol Solutions | 414 |
| 7.145 | Viscosities of Aqueous Tripropylene Glycol Solutions | 415 |
| 7.146 | Freezing Points of Aqueous Glycol Solutions | 415 |
| 7.147 | Specific Heat of Anhydrous Glycols | 415 |
| 7.148 | Specific Heats of Aqueous Glycol Solutions (Btu/lb/°F) | 416 |
| 7.149 | Densities of Aqueous Ethylene Glycol Solutions (% by wt) | 416 |
| 7.150 | Densities of Aqueous Diethylene Glycol Solutions (% by wt) | 417 |
| 7.151 | Densities of Aqueous Triethylene Glycol Solutions (% by wt) | 417 |
| 7.152 | Densities of Aqueous Tetraethylene Glycol Solutions (% by wt) | 418 |
| 7.153 | Densities of Aqueous Propylene Glycol Solutions (% by wt) | 418 |
| 7.154 | Densities of Aqueous Dipropylene Glycol Solutions (% by wt) | 419 |
| 7.155 | Densities of Aqueous Tripropylene Glycol Solutions (% by wt) | 419 |

| | | |
|-----------------------------|---------------------------------------------------------------------------------|------------|
| 7.156 | Surface Tensions of Aqueous Solutions of Glycols at 77°F | 419 |
| 7.157 | Flammability of Glycols | 420 |
| 7.158 | Refractive Indices of Aqueous Glycol Solutions at 77°F (25°C) | 420 |
| 7.159 | Conversion Chart for Aqueous Ethylene Glycol Solutions | 420 |
| 7.160 | Conversion Chart for Aqueous Diethylene Glycol Solutions | 420 |
| 7.161 | Conversion Chart for Aqueous Triethylene Glycol Solutions | 421 |
| 7.162 | Conversion Chart for Aqueous Tetraethylene Glycol Solutions | 421 |
| 7.163 | Conversion Chart for Aqueous Propylene Glycol Solutions | 421 |
| 7.164 | Conversion Chart for Aqueous Dipropylene Glycol Solutions | 421 |
| 7.165 | Conversion Chart for Aqueous Tripropylene Glycol Solutions | 422 |
| 7.166 | Freeze Points and Burst Points of Aqueous Solutions | 422 |
| 7.167 | Solubility of Various Compounds in Glycols | 423 |
| 7.168 | Viscosity of Anhydrous Glycols | 424 |
| 7.169 | Specific Heat of Anhydrous Glycols | 424 |
| 7.170 | Technical Data: Ethylene Glycol Products | 425 |
| 7.171 | Ethylene Glycol Compatibility | 425 |
| 7.172 | Weight per Gallon at Various Temperatures | 426 |
| 7.173 | Weight Percent vs Volume Percent Aq. Monoethylene Glycol Solutions, 20°C | 426 |
| 7.174 | Specific Gravity vs Composition @ Various Temperatures of Aqueous MEG Solutions | 426 |
| 7.175 | Specific Gravity vs Composition @ Various Temperatures of Aqueous DEG Solutions | 427 |
| 7.176 | Specific Gravity vs Composition @ Various Temperatures of Aqueous TEG Solutions | 427 |
| 7.177 | Boiling Point @ 760 mm Hg vs Composition of Aqueous Glycol Solutions | 428 |
| 7.178 | Freezing Point vs Composition of Aqueous Glycol Solutions | 428 |
| 7.179 | Vapor Pressure vs Temperature of the Glycols | 429 |
| 7.180 | Viscosity vs Temperature of the Glycols | 429 |
| 7.181 | Fire Hazard Information | 430 |
| 7.182 | Acute Oral Toxicity | 430 |
| 7.183 | Environmental Considerations, Biodegradation | 430 |
| 7.184 | Ethylene Glycols: Products, Grades and Specifications | 431 |
| 7.185 | Ashland Glycols | 431 |
| 7.186 | Chemcentral Polyols | 432 |
| 7.187 | Hoechst Celanese 1,3-Butylene Glycol | 433 |
| 7.188 | Occidental Ethylene Glycol | 433 |
| Glycerol (Glycerine) | | 434 |
| 7.189 | Physical Properties and Specifications of Glycerol | 434 |
| 7.190 | Boiling Points and Specific Gravities of Aqueous Glycerol Solutions | 434 |
| 7.191 | Conversion Chart for Aqueous Glycerol Solutions (25°C) | 434 |
| 7.192 | Density of Glycerol-Water | 435 |
| 7.193 | Freezing Points of Glycerol-Water Solutions | 436 |
| 7.194 | Freezing Points of Glycerol-Water Solutions | 437 |
| 7.195 | Viscosity of Aqueous Glycerol Solutions, Centipoises | 437 |
| 7.196 | Hygroscopicity Curves for Glycerol and 1,3-Butylene Glycol | 438 |
| 7.197 | Hygroscopicity Curves for Glycerol and 2,3-Butylene Glycol | 438 |
| 7.198 | Relative Humidities Over Aqueous Glycerol Solutions, 20° to 100°C | 438 |
| 7.199 | Solubility of Sucrose and Dextrose in Aqueous Glycerol at 15°, 24°, and 35°C | 439 |
| 7.200 | Solubility of Various Compounds in Glycerol | 439 |
| 7.201 | Specific Gravity and Percent Glycerol | 440 |
| 7.202 | Specific Gravities of Glycerol and Glycol Mixtures | 441 |
| 7.203 | Specific Heat of Glycerol | 441 |
| 7.204 | Vapor Pressure of Glycerol | 441 |
| 7.205 | Vapor Pressure of Glycerol-Water Solutions | 441 |
| 7.206 | Viscosity of Glycerol Solutions in Centipoises | 442 |
| Comparative Data | | 443 |
| 7.207 | Emery CP/USP Glycerines | 443 |
| 7.208 | Procter & Gamble Glycerine | 443 |
| 7.209 | Witco Refined Glycerine | 444 |
| 1,2,4-Butanetriol | | 444 |
| 7.210 | Physical Properties of 1,2,4-Butanetriol | 444 |
| 1,2,6-Hexanetriol | | 445 |
| 7.211 | Physical Properties of 1,2,6-Hexanetriol | 445 |
| 7.212 | Freezing Points of 1,2,6-Hexanetriol-Water Mixtures | 445 |
| 7.213 | Vapor Pressure of 1,2,6-Hexanetriol | 445 |
| 7.214 | Solubility of 1,2,6-Hexanetriol in Organic Solvents | 446 |
| 7.215 | Compatibility of 1,2,6-Hexanetriol | 446 |
| 7.216 | Viscosities and Freezing Points of 1,2,6-Hexanetriol | 446 |

| | |
|------------------------------------------------------------------------------------------------------------|-----|
| Trimethylolpropane | 447 |
| 7.217 Physical Properties of Trimethylolpropane | 447 |
| Pentaerythritol | 447 |
| 7.218 Physical Properties of Pentaerythritol | 447 |
| Sorbitol | 448 |
| 7.219 Physical Properties of Sorbitol | 448 |
| 7.220 Boiling Point of Sorbitol Solutions | 448 |
| 7.221 Hydrogenolysis of Sorbitol and Glycerol at a Hydrogen Pressure of 2,000 psi | 449 |
| 7.222 Hydrogenolysis of Sorbitol at 215°C and a Hydrogen Pressure of 2,000 psi | 449 |
| 7.223 Phase Diagram of Sorbitol Solubility in Hydroalcoholic Liquids at 35°C | 450 |
| 7.224 Solubility of Sorbitol in Hydroalcoholic Liquids at 25°C | 450 |
| 7.225 Viscosity Curve for Pure d-Sorbitol Solutions of Various Concentrations | 450 |
| Sugar Alcohols | 451 |
| 7.226 Physical Properties of the Sugar Alcohols | 451 |
| Miscellaneous Polyhydric Alcohols | 452 |
| 7.227 Hydrates of Polyhydric Alcohols | 452 |
| PHENOLS | 454 |
| 8.1 Phenol | 454 |
| ALDEHYDES | 455 |
| Furfural | 455 |
| 9.1 Properties of Pure Furfural | 455 |
| 9.2 Typical Properties and Specifications of Furfural | 456 |
| 9.3 Solubility of Various Substances in Furfural | 457 |
| 9.4 Solubility of Selected Thermoplastic Resins in Furfural | 457 |
| 9.5 Specific Gravity and Pounds per Gallon of Furfural | 458 |
| 9.6 Composition/Density of Furfural-Water Solutions | 458 |
| 9.7 Vapor Pressure of Furfural | 459 |
| 9.8 Solution Temperature of Furfural-Water System | 459 |
| 9.9 Temperature-Composition Diagram of Furfural-Water System | 460 |
| 9.10 Vapor-Liquid Equilibrium in the Furfural-Water System | 460 |
| 9.11 Vapor-Liquid Composition of Furfural-Water System | 461 |
| Other Aldehydes | 461 |
| 9.12 Vapor Pressures of Various Aldehydes | 461 |
| 9.13 Physical Properties of Various Aldehydes | 462 |
| ETHERS | 463 |
| 10.1 Dimethyl Ether | 463 |
| 10.2 Chlorodimethyl Ether | 464 |
| 10.3 Chloromethyl Ethyl Ether | 465 |
| 10.4 Ethyl Ether | 465 |
| 10.5 Flammability of Ethyl Ether-Oxygen-Helium Mixture | 466 |
| 10.6 Dichloroethyl Ether | 466 |
| Isopropyl Ether | 467 |
| 10.7 Properties of Pure Isopropyl Ether | 467 |
| 10.8 Vapor Pressure of Isopropyl Ether | 467 |
| 10.9 Isopropyl Ether-Water Solubility | 467 |
| 10.10 Mutual Solubility for the System: Isopropyl Ether-Isopropyl Alcohol-Water at 25°C, % wt | 468 |
| 10.11 Conjugate Solutions in the System: Isopropyl Ether-Isopropyl Alcohol-Water at 25°C, % wt | 469 |
| 10.12 Miscibility of Isopropyl Ether-Isopropyl Alcohol-Water at 25°C | 469 |
| 10.13 Azeotropic Information-Isopropyl Ether | 470 |
| 10.14 Vapor Pressure of Isopropyl Ether at Various Temperatures | 471 |
| 10.15 Specific Gravity of Isopropyl Ether vs Temperature | 471 |
| 10.16 Mutual Solubility and Specific Gravity of Isopropyl Ether, Water and Isopropyl Alcohol at 25°C | 471 |
| 10.17 n-Butyl Ether | 472 |
| 10.18 Diamyl Ether | 473 |
| 10.19 n-Hexyl Ether | 473 |
| 10.20 Solubility Data for Various Ethers | 474 |
| 10.21 Comparative Evaporation Rates of Various Ethers | 474 |
| 10.22 Specific Gravities of Various Ethers | 475 |
| 10.23 Vapor Pressure of Various Ethers | 476 |
| 10.24 Ethylene Oxide | 478 |
| 10.25 Enthalpy and Entropy of Ethylene Oxide | 478 |

| | | |
|-------------------------|--------------------------------------------------------------------|------------|
| 10.26 | Propylene Oxide | 479 |
| 10.27 | Freezing Points of Solutions of Ethylene Oxide and Propylene Oxide | 479 |
| 10.28 | 1,2-Butylene Oxide | 480 |
| 10.29 | CARDOLITE NC-513 | 480 |
| 10.30 | 1,4-Dioxane | 481 |
| 10.31 | Trioxane | 481 |
| 10.32 | Vinyl Methyl Ether | 482 |
| 10.33 | Vinyl Ethyl Ether | 482 |
| 10.34 | Vinyl 2-Chloroethyl Ether | 482 |
| 10.35 | Vinyl Butyl Ether | 482 |
| 10.36 | Vinyl Isobutyl Ether | 483 |
| 10.37 | Vinyl 2-Ethylhexyl Ether | 483 |
| 10.38 | Typical Properties of the Vinyl Ethers | 483 |
| 10.39 | Phenyl Methyl Ether | 484 |
| 10.40 | Dibenzyl Ether | 485 |
| 10.41 | Diphenyl Oxide | 485 |
| 10.42 | Miscellaneous Alkyl Aryl Ethers | 486 |
| 10.43 | Furan | 486 |
| 10.44 | 2-Methylfuran | 486 |
| 10.45 | Tetrahydrofuran | 487 |
| 10.46 | 2,3-Dihydropyran | 493 |
| 10.47 | Tetrahydropyran | 493 |
| 10.48 | Tetrahydropyran-2-Methanol | 494 |
| 10.49 | Terpinyl Methyl Ether | 494 |
| GLYCOL ETHERS | | 496 |
| 11.1 | ARCOSOLV Ethylene and Propylene Glycol Ethers | 496 |
| 11.2 | Ashland Glycol Ethers | 498 |
| 11.3 | Chemcentral Glycol Ethers | 499 |
| 11.4 | DOWANOL Glycol Ethers and Acetates | 500 |
| 11.5 | Eastman Chemicals Glycol Ethers | 503 |
| 11.6 | Grant Chemical Glycol Diethers (GLYMES) | 504 |
| 11.7 | Occidental Ethylene Glycol Ethers and Glycol Ether Acetates | 506 |
| 11.8 | Olin Chemicals Poly-Solv Propylene Glycol Ethers | 512 |
| 11.9 | Union Carbide Glycol Ethers | 513 |
| Methylal | | 514 |
| 11.10 | Physical Properties of Methylal | 514 |
| Ethylene Glycols | | 514 |
| 11.11 | Ethylene Glycol Monomethyl Ether | 514 |
| 11.12 | Ethylene Glycol Monoethyl Ether | 515 |
| 11.13 | Ethylene Glycol Dimethyl Ether | 515 |
| 11.14 | Ethylene Glycol Diethyl Ether | 516 |
| 11.15 | Ethylene Glycol Monopropyl Ether | 516 |
| 11.16 | Ethylene Glycol Monobutyl Ether | 516 |
| 11.17 | Water Solubility of Ethylene Glycol n-Butyl Ether | 517 |
| 11.18 | Ethylene Glycol Monoisobutyl Ether | 517 |
| 11.19 | Ethylene Glycol Dibutyl Ether | 518 |
| 11.20 | Ethylene Glycol Monophenyl Ether | 519 |
| 11.21 | Ethylene Glycol Monobenzyl Ether | 520 |
| 11.22 | Terpinyl Ethylene Glycol Ether | 520 |
| 11.23 | Ethylene Glycol Butylphenyl Ethers | 521 |
| 11.24 | Ethylene Glycol Monohexyl Ether | 521 |
| 11.25 | Ethylene Glycol Ethyl Hexyl Ether | 521 |
| 11.26 | Diethylene Glycol | 522 |
| 11.27 | Diethylene Glycol Monomethyl Ether | 523 |
| 11.28 | Diethylene Glycol Monoethyl Ether | 523 |
| 11.29 | Diethylene Glycol Monoethyl Ether/Ethylene Glycol | 523 |
| 11.30 | Diethylene Glycol Monobutyl Ether | 524 |
| 11.31 | Diethylene Glycol Monopropyl Ether | 524 |
| 11.32 | Diethylene Glycol Dimethyl Ether | 524 |
| 11.33 | Diethylene Glycol Monoethyl Ether (Special Grade) | 525 |
| 11.34 | Diethylene Glycol Monohexyl Ether | 525 |
| 11.35 | Diethylene Glycol Divinyl Ether | 525 |
| 11.36 | Diethylene Glycol Monoisobutyl Ether | 526 |
| 11.37 | Triethylene Glycol | 526 |

| | | |
|----------------------------------|-------------------------------------------------------------------------------------------------------------|-----|
| 11.38 | Triethylene Glycol Monomethyl Ether | 527 |
| 11.39 | Triethylene Glycol Monoethyl Ether | 527 |
| 11.40 | Triethylene Glycol Dimethyl Ether | 528 |
| 11.41 | Triethylene Glycol Monomethyl Ether/Highers | 528 |
| 11.42 | Triethylene Glycol Monobutyl Ether/Highers | 528 |
| 11.43 | Tetraethylene Glycol | 529 |
| 11.44 | Triethylene Glycol Dimethyl Ether | 529 |
| Propylene Glycols | | 530 |
| 11.45 | Propylene Glycol Monomethyl Ether | 530 |
| 11.46 | Propylene Glycol Monophenyl Ether | 530 |
| 11.47 | Propylene Glycol Monopropyl Ether | 531 |
| 11.48 | Propylene Glycol Monobutyl Ether | 531 |
| 11.49 | Propylene Glycol tert-Butyl Ether | 532 |
| 11.50 | Propylene Glycol Monobutoxyethyl Ether | 532 |
| 11.51 | Propylene Glycol Isobutyl Ether and Higher Homologs | 532 |
| 11.52 | Propylene Based Glycol Ether Blends | 533 |
| 11.53 | Propylene Based Glycol Ether Blend | 533 |
| 11.54 | Dipropylene Glycol Monomethyl Ether | 533 |
| 11.55 | Dipropylene Glycol Monopropyl Ether | 534 |
| 11.56 | Dipropylene Glycol Monobutyl Ether | 534 |
| 11.57 | Dipropylene Glycol Tertiary Butyl Ether | 534 |
| 11.58 | Tripropylene Glycol | 535 |
| 11.59 | Tripropylene Glycol Monomethyl Ether | 536 |
| 11.60 | Aromatic Based Glycol Ether | 536 |
| Triglycols | | 536 |
| 11.61 | Methoxytriglycol | 536 |
| 11.62 | Ethoxytriglycol | 537 |
| 11.63 | Butoxytriglycol | 537 |
| Miscellaneous Glycol Data | | 537 |
| 11.64 | ARCOSOLV Evaporation Characteristics, Resin Compatibility and Other Data | 537 |
| 11.65 | DOWANOL Miscibility, Solubility, Evaporation Rates, Vapor Pressure, Density, Surface Tension and Other Data | 548 |
| 11.66 | GLYME Azeotropic Vapor Pressure and Solubility Data | 574 |
| 11.67 | Union Carbide Glycol Ethers | 576 |
| Polyethylene Glycols | | 581 |
| 11.68 | Ashland Polyethylene Glycols | 581 |
| 11.69 | BASF Pluracol E Polyethylene Glycols | 581 |
| 11.70 | CARBOWAX Polyethylene Glycols | 582 |
| 11.71 | Dow Polyglycols | 599 |
| Polypropylene Glycols | | 611 |
| 11.72 | Ashland Polypropylene Glycols | 611 |
| 11.73 | Dow Polypropylene Glycols and Polyglycol Copolymers | 612 |
| Polyols | | 622 |
| 11.74 | Properties of PLURONIC and TETRONIC Block Copolymer Surfactants | 622 |
| Glycerine Ethers | | 623 |
| 11.75 | Glyceryl α -Monomethyl Ether | 623 |
| 11.76 | Glyceryl α,γ -Dimethyl Ether | 623 |
| 11.77 | Glyceryl α -Mono-n-Butyl Ether | 623 |
| 11.78 | Glyceryl α -Monoisoamyl Ether | 623 |
| 11.79 | Glyceryl α,γ -Diisoamyl Ether | 624 |
| 11.80 | Miscellaneous Glycerine Ethers | 624 |
| KETONES | | 625 |
| Acetone | | 625 |
| 12.1 | Physical Properties of Acetone | 625 |
| 12.2 | Low Temperature Characteristics of Aqueous Solutions of Acetone | 625 |
| 12.3 | Solubility of Various Materials in Acetone | 626 |
| 12.4 | Specific Gravity of Aqueous Solutions of Acetone at Different Temperatures | 626 |
| 12.5 | Surface Tension of Aqueous Solutions of Acetone at 25°C | 627 |
| 12.6 | Viscosity of Aqueous Acetone Solutions at 25°C | 627 |
| 12.7 | Refractive Index of Aqueous Solutions of Acetone at 25°C | 628 |
| 12.8 | Liquid-Vapor Equilibria for Aqueous Solutions of Acetone at Different Pressures | 628 |
| 12.9 | Freezing Point of Aqueous Solutions of Acetone | 629 |
| Methyl Ethyl Ketone | | 629 |

| | | |
|-------------------------------|----------------------------------------------------------------------------------------------------------|-----|
| 12.10 | Physical Properties of Methyl Ethyl Ketone | 629 |
| 12.11 | Methyl Ethyl Ketone and Water | 630 |
| Methyl n-Propyl Ketone | | 630 |
| 12.12 | Properties of Methyl n-Propyl Ketone | 630 |
| Methyl n-Butyl Ketone | | 631 |
| 12.13 | Properties of Methyl n-Butyl Ketone | 631 |
| 12.14 | Solubility of Dry Half-Second R.S. Nitrocellulose in a System of Methyl Butyl Ketone-sec-Butanol-Toluene | 632 |
| Methyl Isobutyl Ketone | | 632 |
| 12.15 | Properties of Methyl Isobutyl Ketone | 632 |
| 12.16 | Solubility of Miscellaneous Materials in Methyl Isobutyl Ketone at 20° to 25°C | 633 |
| Methyl n-Amyl Ketone | | 634 |
| 12.17 | Properties of Methyl n-Amyl Ketone | 634 |
| Methyl Isoamyl Ketone | | 634 |
| 12.18 | Properties of Methyl Isoamyl Ketone | 634 |
| 12.19 | Properties of Methyl Isoamyl Ketone vs Other Solvents | 635 |
| 12.20 | Butyrate-Acrylic Wood Lacquer—Substituting Isoamyl Ketone for 2-Ethoxyethyl Acetate | 635 |
| Methyl Hexyl Ketone | | 636 |
| 12.21 | Properties of Methyl Hexyl Ketone | 636 |
| Methyl Heptyl Ketone | | 636 |
| 12.22 | Properties of Methyl Heptyl Ketone | 636 |
| Ethylbutyl Ketone | | 637 |
| 12.23 | Properties of Ethylbutyl Ketone | 637 |
| Ethyl Amyl Ketone | | 637 |
| 12.24 | Properties of Ethyl Amyl Ketone | 637 |
| Di-n-Propyl Ketone | | 638 |
| 12.25 | Properties of Di-n-Propyl Ketone | 638 |
| Diisobutyl Ketone | | 638 |
| 12.26 | Properties of Diisobutyl Ketone | 638 |
| Cyclohexanone | | 639 |
| 12.27 | Properties of Cyclohexanone | 639 |
| 12.28 | Resin Solubility in Cyclohexanone | 640 |
| Methyl Cyclohexanone | | 641 |
| 12.29 | Properties of Methyl Cyclohexanone | 641 |
| Methyl Acetone | | 641 |
| Diacetone Alcohol | | 642 |
| 12.30 | Physical Properties of Acetone-Free Diacetone Alcohol | 642 |
| Acetonyl Acetone | | 642 |
| 12.31 | Properties of Acetonyl Acetone | 643 |
| Mesityl Oxide | | 643 |
| 12.32 | Properties of Mesityl Oxide | 643 |
| Isophorone | | 644 |
| 12.33 | Properties of Isophorone | 644 |
| Fenchone | | 644 |
| 12.34 | Properties of Fenchone | 644 |
| Beta-Propiolactone | | 645 |
| 12.35 | Physical Properties of Beta-Propiolactone | 645 |
| Gamma-Butyrolactone | | 645 |
| 12.36 | Properties of Gamma-Butyrolactone | 645 |
| Comparative Data | | 648 |
| 12.37 | Ashland Ketones | 648 |
| 12.38 | Chemcentral Ketones and Miscellaneous Active Solvents | 649 |
| 12.39 | Eastman Chemical Ketones | 650 |
| 12.40 | Exxon Ketones | 650 |
| 12.41 | Hoechst-Celanese Ketones | 651 |
| 12.42 | Shell Chemical Ketones | 651 |
| 12.43 | Union Carbide Ketones | 652 |
| 12.44 | Vapor Pressure of Various Ketones at Different Temperatures | 657 |
| 12.45 | Specific Gravities of etones | 658 |
| 12.46 | Solubility of Ketones in Water | 659 |
| 12.47 | Solubility of Water in Ketones | 659 |
| 12.48 | Relative Evaporation of Ketones—Fast to Intermediate Evaporating Liquids | 660 |
| 12.49 | Relative Evaporation of Ketones—Intermediate to Slow Evaporating Liquids | 660 |
| 12.50 | Viscosity vs Concentration of Chlorinated Rubber (Hercules PARLON S-20) in MEK | 661 |

| | | |
|---------------------------|--------------------------------------------------------------------------------------------------------------------|-----|
| ACIDS | | 662 |
| 13.1 | Acetic Acid | 662 |
| 13.2 | Viscosity of Acetic Acid and Acetic Anhydride Mixtures at 15° and 76.5°C | 662 |
| 13.3 | Butyric Acid | 663 |
| 13.4 | Viscosity of Aqueous Butyric Acid Solution at 25°C | 663 |
| 13.5 | Butyric Anhydride | 663 |
| 13.6 | Solubility of Water in Caproic Acid at Various Temperatures | 664 |
| 13.7 | 2-Ethylbutyric Acid | 664 |
| 13.8 | 2-Ethylhexoic Acid | 664 |
| 13.9 | Solubility of Water in Ethylhexoic Acid, Ethylbutyraldehyde and Ethylpropylacrolein | 664 |
| 13.10 | Lactic Acid | 665 |
| 13.11 | Trifluoroacetic Acid | 666 |
| 13.12 | Vapor Pressure of Organic Acids and Anhydrides at Various Temperatures | 668 |
| 13.13 | Fatty Acid Composition of Various Fats and Oils | 669 |
| 13.14 | Arizona Chemical ACTINOL Tall Oil Fatty Acids | 670 |
| 13.15 | Eastman Chemicals Acids and Anhydrides | 671 |
| 13.16 | Halocarbon Products BIOGRADE Trifluoroacetic Acid | 671 |
| 13.17 | EMERY Fatty and Dibasic Acids | 672 |
| 13.18 | INDUSTRENE and HYSTRENE Fatty and Dibasic Acids | 676 |
| 13.19 | NEO-FAT Fatty Acids | 681 |
| 13.20 | Procter & Gamble Fatty Acids | 683 |
| 13.21 | Union Carbide Acids | 684 |
| AMINES | | 686 |
| Alkyl Amines | | 686 |
| 14.1 | Monomethylamine | 686 |
| 14.2 | Dimethylamine | 686 |
| 14.3 | Trimethylamine | 687 |
| 14.4 | Freezing Points of Aqueous Methylamine Solutions | 688 |
| 14.5 | Binary Azeotropes of Methylamines | 688 |
| 14.6 | Solubility Data for Methylamines | 689 |
| 14.7 | Monoethylamine | 690 |
| 14.8 | Diethylamine | 690 |
| 14.9 | Triethylamine | 691 |
| 14.10 | n-Propylamine | 691 |
| 14.11 | Di-n-Propylamine | 691 |
| 14.12 | Mutual Solubility of Di-n-Propylamine and Water at Various Temperatures | 692 |
| 14.13 | Solubility Curve at 25° for the System Di-n-Propylamine-Water-Ethanol | 692 |
| 14.14 | Isopropylamine | 692 |
| 14.15 | Di-Isopropylamine | 693 |
| 14.16 | n-Butylamine | 693 |
| 14.17 | n-Dibutylamine | 693 |
| 14.18 | n-Tributylamine | 694 |
| 14.19 | Isobutylamine | 694 |
| 14.20 | Diisobutylamine | 694 |
| 14.21 | sec-Butylamine | 695 |
| 14.22 | Mono-n-Butyl Diamylamine | 695 |
| 14.23 | n-Amylamine | 695 |
| 14.24 | sec-Amylamine | 696 |
| 14.25 | Diamylamine (Mixed Isomers) | 696 |
| 14.26 | Triamylamine (Mixed Isomers) | 696 |
| 14.27 | sec-Hexylamine | 697 |
| 14.28 | 2-Ethylbutylamine | 697 |
| 14.29 | n-Heptylamine | 697 |
| 14.30 | 2-Ethylhexylamine | 697 |
| 14.31 | Di-2-Ethylhexylamine | 697 |
| 14.32 | Cyclohexylamine | 698 |
| 14.33 | Dicyclohexylamine | 698 |
| 14.34 | ALQUAT Fatty Quaternary Ammonium Chloride | 699 |
| 14.35 | KEMAMINE Fatty Quaternary Ammonium Chlorides | 699 |
| 14.36 | High Molecular Weight Aliphatic Amines | 700 |
| 14.37 | Solubilities of Pure Dodecyl- and Octadecyl-Trimethylammonium Chlorides in Grams per 100 grams of Solvent | 700 |
| 14.38 | Solubilities of Organic Compounds in Aliphatic Amines at 25° ± 5°C | 701 |
| 14.39 | Vapor Pressure of Various Amines | 705 |

| | | |
|----------------------------|-------------------------------------------------------------------------------------|-----|
| 14.40 | Vapor Pressure of Sharples Amines | 705 |
| Alkylene Diamines | | 706 |
| 14.41 | Ethylene Diamine | 706 |
| 14.42 | Boiling Point Composition Curves for Aqueous Ethylenediamine Solutions | 706 |
| 14.43 | Diethylenetriamine | 706 |
| 14.44 | Boiling Point Composition Curves for Aqueous Diethylenetriamine Solutions | 707 |
| 14.45 | Tetraethylenepentamine | 707 |
| 14.46 | Propylenediamine | 707 |
| 14.47 | Solvent Properties of Alkylene Diamines | 708 |
| 14.48 | Vapor Pressures of Alkylene Diamines and Other Amines | 708 |
| 14.49 | Density of Ethylenediamine Solutions | 709 |
| 14.50 | Density of Higher Ethylene Amines | 709 |
| 14.51 | Viscosity of Ethylenediamine Solutions | 710 |
| 14.52 | Viscosity of Higher Ethylene Amines | 710 |
| Comparative Data | | 711 |
| 14.53 | Akzo ARMEEN, DUOMEEN, TRIAMEEN, ETHOMEEN, Ethoxylated Diamines, Propoxylated Amines | 711 |
| 14.54 | ANGUS Amines | 718 |
| 14.55 | Ashland Amines | 718 |
| 14.56 | Chemcentral Amines | 719 |
| 14.57 | Dow Commercial Alkanolamines | 719 |
| 14.58 | Humko Amines | 735 |
| 14.59 | Procter & Gamble Tertiary Amines | 736 |
| 14.60 | Occidental Ethanolamines | 737 |
| 14.61 | Union Carbide Ethyleneamines | 747 |
| 14.62 | Union Carbide Ethanolamines | 753 |
| Alkanol Amines | | 760 |
| 14.63 | Monoethanolamine | 760 |
| 14.64 | Boiling Point Composition Curves for Aqueous Monoethanolamine Solutions | 760 |
| 14.65 | Viscosity of Monoethanolamine at Various Temperatures | 760 |
| 14.66 | Diethanolamine | 761 |
| 14.67 | Viscosity of Diethanolamine at Various Temperatures | 761 |
| 14.68 | Triethanolamine | 761 |
| 14.69 | Viscosity of Triethanolamine at Various Temperatures | 762 |
| 14.70 | Specific Heats of Aqueous Triethanolamine Solutions at 21°C | 762 |
| 14.71 | Surface Tension of Aqueous Ethanolamine Solutions at 20°C | 762 |
| 14.72 | Viscosity of Aqueous Ethanolamine Solutions at 20°C | 762 |
| 14.73 | Isopropanolamines Mixed | 763 |
| 14.74 | Triisopropanolamine | 763 |
| 14.75 | 2-Amino-2-Methyl-1-Propanol | 763 |
| 14.76 | 2-Amino-2-Methyl-1,2-Propanediol | 764 |
| 14.77 | 2-Amino-2-Ethyl-1,3-Propanediol | 764 |
| 14.78 | 2-Amino-1-Butanol | 764 |
| 14.79 | Tris(Hydroxymethyl)Aminomethane | 764 |
| 14.80 | 2-Aminoethylethanolamine | 764 |
| 14.81 | 1-Diethylamino-2,3-Propanediol | 764 |
| 14.82 | Aminohydroxy Compounds | 765 |
| 14.83 | 2-Diethylamino-2-Methyl-1-Propanol | 765 |
| Alkylalkanol Amines | | 766 |
| 14.84 | Properties of Various Alkylalkanol Amines | 766 |
| Glycol Ether Amines | | 768 |
| 14.85 | Properties of Various Glycol Ether Amines | 768 |
| Aryl Amines | | 769 |
| 14.86 | Aniline | 769 |
| 14.87 | Dimethylaniline | 769 |
| 14.88 | Diethylaniline | 769 |
| 14.89 | N-Mono-n-Butyl Aniline | 770 |
| 14.90 | N,N-Di-n-Butyl Aniline | 770 |
| 14.91 | n-Monoamyl Aniline (Mixed Isomers) | 770 |
| 14.92 | p-tert-Amyl Aniline | 770 |
| 14.93 | Di-tert-Amyl Aniline | 771 |
| 14.94 | N,N-Diamyl Aniline (Mixed Isomers) | 771 |
| 14.95 | Diethylbenzylamine | 771 |
| 14.96 | N-(n-Butyl)- α -Naphthylamine | 771 |
| Imines | | 772 |

| | | |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 14.97 | Ethylene Imine | 772 |
| 14.98 | Propylene Imine | 772 |
| Amides | | 773 |
| 14.99 | Formamide | 773 |
| 14.100 | Dimethylformamide | 773 |
| 14.101 | Surface Tension and Density of DMF-Water Mixtures | 774 |
| 14.102 | Semi-Quantitative Solubilities of Inorganic Materials in DMF at 25°C | 775 |
| 14.103 | Dimethylacetamide | 776 |
| 14.104 | Viscosities of Resins in DMAC | 777 |
| 14.105 | 1-Formylpiperidine | 778 |
| Nitriles | | 780 |
| 14.106 | n-Butyronitrile | 780 |
| Heterocyclic Compounds | | 780 |
| 14.107 | Pyrrrole | 780 |
| 14.108 | 2-Pyrrolidone | 781 |
| 14.109 | Phase Diagram for 2-Pyrrolidone-Water | 781 |
| 14.110 | N-Methyl-2-Pyrrolidone | 782 |
| 14.111 | Acute Oral Toxicity | 783 |
| 14.112 | Acute Dermal Toxicity | 783 |
| 14.113 | Injection Toxicity | 783 |
| 14.114 | Toxicity to Aqueous Organisms | 783 |
| 14.115 | Infrared Absorption Spectrum | 784 |
| 14.116 | Specific Heat | 784 |
| 14.117 | Thermal Conductivity | 784 |
| 14.118 | Vapor Pressure | 785 |
| 14.119 | Comparison of Vapor Pressures of M-Pyrol and Other Aprotic Solvents | 785 |
| 14.120 | Surface Tension | 785 |
| 14.121 | Freezing Point Curve | 786 |
| 14.122 | Viscosity of Anhydrous M-Pyrol | 786 |
| 14.123 | Viscosity of Aqueous M-Pyrol | 787 |
| 14.124 | Vapor/Liquid Equilibrium Data for M-Pyrol-Water System at Atmospheric and 400 mg Pressures | 787 |
| 14.125 | Vapor/Liquid Equilibrium of M-Pyrol-Water Systems | 787 |
| 14.126 | Hydrolytic Stability of M-Pyrol | 788 |
| 14.127 | Comparison of Hydrolysis of M-Pyrol and DMF | 789 |
| 14.128 | Hydrolysis of M-Pyrol in Alkaline Salt Solutions | 789 |
| 14.129 | Hygroscopicity Data | 789 |
| 14.130 | Hygroscopicity Data | 789 |
| 14.131 | Hygroscopicity Data | 790 |
| 14.132 | Effect of Temperature on Hygroscopicity | 790 |
| 14.133 | Correlation of M-Pyrol and Water Vapor Data | 790 |
| 14.134 | Vapor/Liquid Equilibrium of M-Pyrol Containing 1% Water | 791 |
| 14.135 | Solubility of Acetylene in Various Solvents | 791 |
| 14.136 | Solubility of Sulfur Compounds and Carbon Dioxide in M-Pyrol Solvent | 792 |
| 14.137 | Solubility of Paraffin Hydrocarbons in M-Pyrol Solvent | 792 |
| 14.138 | Vapor-Liquid Equilibrium Distribution Coefficients for Sulfur Compounds and Carbon Dioxide in M-Pyrol Solvent | 793 |
| 14.139 | Vapor-Liquid Equilibrium Distribution Coefficients for Paraffin Hydrocarbons in M-Pyrol Solvent | 793 |
| 14.140 | Correlation of Equilibrium Distribution Coefficients for Ethane and Heavier Paraffin Hydrocarbons in M-Pyrol Solvent | 794 |
| 14.141 | Classification of Equilibria in M-Pyrol Showing Relationship Between Equilibrium Distribution Coefficients (K) and Solute Vapor Pressures | 794 |
| 14.142 | Solubilities of Carbon Monoxide and Olefins in Anhydrous M-Pyrol Solvent | 795 |
| 14.143 | Solubilities of Diolefins in Anhydrous M-Pyrol Solvent | 795 |
| 14.144 | Solubilities of Acetylenes in Anhydrous M-Pyrol Solvent | 796 |
| 14.145 | Vapor-Liquid Equilibrium Distribution Coefficients for Olefins and Carbon Monoxide in M-Pyrol Solvent | 796 |
| 14.146 | Vapor-Liquid Equilibrium Distribution Coefficients for Diolefins in Anhydrous M-Pyrol Solvent | 797 |
| 14.147 | Vapor-Liquid Equilibrium Distribution Coefficients for Acetylenes in Anhydrous M-Pyrol Solvent | 797 |
| 14.148 | Effect of Water (5 wt %) in M-Pyrol Solvent on Equilibrium Distribution Coefficients for Olefins | 798 |
| 14.149 | Effect of Water (5 wt %) in M-Pyrol Solvent on Equilibrium Distribution Coefficients for Olefins | 798 |
| 14.150 | Effect of Water (5 wt %) in M-Pyrol Solvent on Equilibrium Distribution Coefficient for Methylacetylene | 799 |
| 14.151 | Effect of Water (5 wt %) in M-Pyrol Solvent on Equilibrium Distribution Coefficient for Acetylene | 799 |
| 14.152 | Classification and Correlation of Equilibria of Unsaturated Hydrocarbons in Anhydrous M-Pyrol Solvent 92-10 atm, 25°-150°C range) | 800 |
| 14.153 | Effect of Water and Elevated Pressure on Solubility of Hydrogen Sulfide in M-Pyrol Solvent | 800 |

| | | |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 7.57 | Effect of meso-2,3-Butanediol on the Freezing Point of Aqueous levo-2,3-Butanediol Solutions | 382 |
| 7.58 | Freezing Points of Aqueous levo-2,3-Butanediol-Ethanol Solutions | 383 |
| 7.59 | Freezing Points of Aqueous levo-2,3-Butanediol-Ethylene Glycol Solutions | 383 |
| 7.60 | Freezing Points of Aqueous levo-2,3-Butanediol-Methanol Solutions | 383 |
| 7.61 | Freezing Points of Aqueous levo-2,3-Butanediol-Tetrahydrofurfuryl Alcohol Solutions | 383 |
| 7.62 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol Solutions, Expressed Logarithmically, as a Function of Concentration and Temperature | 384 |
| 7.63 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol Solutions in Relation to Concentration and Temperature | 384 |
| 7.64 | Kinematic Viscosity of 60% levo-2,3-Butanediol, Glycerol and Ethylene Glycol Solutions at Low Temperatures | 384 |
| 7.65 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Ethanol Solutions at 20°C, Expressed in Centistokes | 384 |
| 7.66 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Methanol Solutions at 20°C, Expressed in Centistokes | 385 |
| 7.67 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Ethylene Glycol Solutions in 20°C Expressed in Centistokes | 385 |
| 7.68 | Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Tetrahydrofurfuryl Alcohol Solutions at 20°C, Expressed in Centistokes | 385 |
| 7.69 | Absolute Viscosity of Aqueous Solutions of Ethylene Glycol, levo-2,3-Butanediol, meso-dextro-2,3-Butanediol and Glycerol at 20°C | 385 |
| 7.70 | Optical Rotatory Power of Aqueous levo-2,3-Butanediol Solutions at 20°C | 386 |
| 7.71 | Effects of Concentration and Temperature on the Specific Rotatory Power of Aqueous levo-2,3-Butanediol Solutions | 386 |
| 7.72 | Refractive Indices of Aqueous levo-2,3-Butanediol Solutions at Different Temperatures | 386 |
| 7.73 | Refractive Indices of Aqueous Solutions of meso- and levo-2,3-Butanediol at 25°C | 386 |
| 7.74 | Specific Gravity of Aqueous levo-2,3-Butanediol Solutions at 20°, 30°, and 40°C | 387 |
| 7.75 | Specific Gravity of Aqueous meso-2,3-Butanediol Solutions at 20°, 30°, and 40°C | 387 |
| 7.76 | Surface Tension of Aqueous Solutions of levo-2,3-Butanediol and Ethylene Glycol | 387 |
| Butanediols | | 388 |
| 7.77 | Refractive Indices of Aqueous Butanediol Solutions at 20°, 30°, and 40°C | 388 |
| 7.78 | Kinematic Viscosity of Aqueous Butanediol Solutions at 20° and 40°C, in Centistokes | 388 |
| 2-Butene-1,4-diol | | 388 |
| 7.79 | Physical Properties of 2-Butene-1,4-diol | 388 |
| 2-Butyne-1,4-diol | | 389 |
| 7.80 | Physical Properties of 2-Butyne-1,4-diol | 389 |
| 1,5-Pentanediol | | 389 |
| 7.81 | Physical Properties of 1,5-Pentanediol | 389 |
| 7.82 | Absolute Viscosity of Aqueous 1,5-Pentanediol Solutions at 20° and 40°C | 390 |
| 7.83 | Specific Gravity of Aqueous 1,5-Pentanediol Solutions at 20° and 40°C | 390 |
| 2,4-Pentanediol | | 390 |
| 7.84 | Physical Properties of 2,4-Pentanediol | 390 |
| Neopentyl Glycol | | 390 |
| 7.85 | Physical Properties of Neopentyl Glycol | 390 |
| Pentanediols | | 391 |
| 7.86 | Kinematic Viscosity of Aqueous Pentanediol Solutions at 20° and 40°C, in Centistokes | 391 |
| 7.87 | Refractive Indices of Aqueous Pentanediol Solutions at 20° and 40°C | 391 |
| 1,6-Hexanediol | | 392 |
| 7.88 | Physical Properties of 1,6-Hexanediol | 392 |
| 2,5-Hexanediol | | 392 |
| 7.89 | Physical Properties of 1,5-Hexanediol | 392 |
| Hexylene Glycol | | 392 |
| 7.90 | Physical Properties and Specifications of Hexylene Glycol | 392 |
| 7.91 | Freezing Points of Hexylene Glycol-Water Mixtures | 393 |
| 7.92 | Specific Gravity and Freezing Point of Hexylene Glycol-Water Mixtures | 393 |
| Pinacol | | 394 |
| 7.93 | Physical Properties of Pinacol | 394 |
| 2,2-Diethyl-1,3-Propanediol | | 394 |
| 7.94 | Physical Properties of 2,2-Diethyl-1,3-Propanediol | 394 |
| 2-Ethyl-1,3-Hexanediol | | 394 |
| 7.95 | Physical Properties of 2-Ethyl-1,3-Hexanediol | 394 |
| 2,5-Dimethyl-3-Hexyne-2,5-diol | | 395 |
| 7.96 | Physical Properties of 2,5-Dimethyl-3-Hexyne-2,5-diol | 395 |
| 1,4-Cyclohexanedimethanol | | 395 |

| | | |
|---------------------------------|------------------------------------------------------------------------|-----|
| 15.20 | Ethylene Glycol Monoacetate | 826 |
| 15.21 | Ethylene Glycol Diacetate | 826 |
| 15.22 | Ethylene Glycol Monomethyl Ether Acetate | 827 |
| 15.23 | Ethylene Glycol Monoethyl Ether Acetate | 827 |
| 15.24 | Ethylene Glycol Monobutyl Ether Acetate | 828 |
| 15.25 | Diethylene Glycol Monoethyl Ether Acetate | 829 |
| 15.26 | Diethylene Glycol Monobutyl Ether Acetate | 829 |
| 15.27 | Propylene Glycol Monomethyl Ether Acetate | 830 |
| 15.28 | Propylene Glycol Monoethyl Ether Acetate | 830 |
| 15.29 | Dipropylene Glycol Monomethyl Ether Acetate (DPMA) | 831 |
| 15.30 | Propylene-Based Glycol Ether Acetate | 831 |
| Propionates | | 832 |
| 15.31 | Methyl Propionate | 832 |
| 15.32 | Ethyl Propionate | 832 |
| 15.33 | N-Butyl Propionate | 832 |
| 15.34 | Amyl Propionate | 833 |
| 15.35 | Ethyl 3-Ethoxypropionate | 833 |
| Butyrates | | 834 |
| 15.36 | Methyl Butyrate | 834 |
| 15.37 | Ethyl Butyrate | 834 |
| 15.38 | n-Butyl Butyrate | 834 |
| 15.39 | Ethyl Hydroxy-Isobutyrate | 835 |
| 15.40 | Isobutyl Isobutyrate | 835 |
| 15.41 | 2,2,4-Trimethylpentanediol-1,3-Monoisobutyrate | 835 |
| Comparative Data | | 836 |
| 15.42 | ARCOSOLV PM Acetate and ARCOSOLV PE Acetate | 836 |
| 15.43 | Ashland Ester Solvents | 838 |
| 15.44 | Chemcentral Esters | 838 |
| 15.45 | CPS Chemical Esters | 839 |
| 15.46 | Eastman Glycol Ether Esters | 839 |
| 15.47 | Hoechst Celanese Esters | 840 |
| 15.48 | Mobil Oil Esters | 842 |
| 15.49 | Union Carbide Esaters | 843 |
| Higher Fatty Acid Esters | | 850 |
| 15.50 | Emery Methyl Esters | 850 |
| 15.51 | Procter & Gamble Methyl Esters | 851 |
| 15.52 | Stepan Esters | 852 |
| Adipates | | 854 |
| 15.53 | Mixture of Dimethyl Adipate and Dimethyl Glutarate | 854 |
| 15.54 | Mixture of Dimethyl Adipate, Dimethyl Glutarate and Dimethyl Succinate | 854 |
| 15.55 | Dialkyl Adipate | 855 |
| 15.56 | Diethyl Adipate | 856 |
| Oxalates | | 857 |
| 15.57 | Diethyl Oxalate | 857 |
| 15.58 | Dibutyl Oxalate | 857 |
| 15.59 | Diamyl Oxalate | 858 |
| Lactates | | 858 |
| 15.60 | Methyl Lactate | 858 |
| 15.61 | Ethyl Lactate | 858 |
| 15.62 | Butyl Lactate | 859 |
| 15.63 | Amyl Lactate | 860 |
| 15.64 | Physical Properties of ctates | 860 |
| Carbonates | | 860 |
| 15.65 | Diethyl Carbonate | 860 |
| 15.66 | JEFFSOL Carbonates | 861 |
| Phthalates | | 867 |
| 15.67 | Alkyl Benzyl Phthalates | 867 |
| 15.68 | Butyl Benzyl Phthalate | 871 |
| 15.69 | Dibutyl Phthalate | 873 |
| 15.70 | Di-2-Ethylhexyl Phthalate (Diethyl Phthalate) | 874 |
| Phosphates | | 875 |
| 15.71 | t-Butylphenyl Diphenyl Phosphate | 875 |
| 15.72 | 2-Ethylhexyl Diphenyl Phosphate | 876 |
| 15.73 | Isodecyl Diphenyl Phosphate | 879 |

| | | |
|------------------------------------|--------------------------------------------------------------------------|-----|
| 15.74 | Emulsifiable Triaryl Phosphate | 881 |
| 15.75 | Proprietary Triaryl Phosphate Ester | 881 |
| 15.76 | Tributoxyethyl Phosphate | 882 |
| 15.77 | Tributyl Phosphate | 883 |
| 15.78 | Triphenyl Phosphate | 883 |
| Phosphites | | 885 |
| 15.79 | Dialkyl Hydrogen Phosphites | 885 |
| 15.80 | Trialkyl Phosphites | 886 |
| 15.81 | Tertiary Phosphites | 887 |
| 15.82 | Organophosphites | 888 |
| Silicates | | 888 |
| 15.83 | Ethyl Silicate | 888 |
| Plasticizers | | 889 |
| 15.84 | Summary of Typical Properties of Plasticizers | 890 |
| HPLC AND UV DATA | | 891 |
| GC-FID Chromatograms | | 891 |
| 16.1 | Methylene Chloride | 891 |
| HPLC Gradient Chromatograms | | 892 |
| 16.2 | Water vs Methanol | 892 |
| 16.3 | Water vs Acetonitrile | 893 |
| 16.4 | Water vs 2-Propanol | 894 |
| 16.5 | Water vs Tetrahydrofuran | 894 |
| 16.6 | Water-01% Trifluoroacetic Acid vs Acetonitrile-0.1% Trifluoroacetic Acid | 895 |
| 16.7 | 0.1 M Potassium Phosphate vs Acetonitrile | 896 |
| 16.8 | 0.1 M Potassium Phosphate vs Methanol | 897 |
| 16.9 | 0.05 M Potassium Phosphate vs Acetonitrile | 897 |
| 16.10 | 0.05 M Potassium Phosphate vs Methanol | 898 |
| 16.11 | 0.01 M Potassium Phosphate vs 0.5 M Potassium Phosphate pH 6.8/6.4 | 899 |
| 16.12 | Hexane vs Chloroform | 900 |
| 16.13 | Hexane vs Chloroform | 900 |
| 16.14 | Hexane vs Ethyl Acetate | 901 |
| 16.15 | Hexane vs 2-Propanol | 901 |
| 16.16 | Hexane vs Ether (Anhydrous) | 902 |
| 16.17 | 2,2,4-Trimethylpentane vs Chloroform | 903 |
| 16.18 | 2,2,4-Trimethylpentane vs Methylene Chloride | 903 |
| 16.19 | 2,2,4-Trimethylpentane vs Ethyl Acetate | 904 |
| 16.20 | 2,2,4-Trimethylpentane vs 2-Propanol | 904 |
| 16.21 | Methylene Chloride vs Methanol | 905 |
| 16.22 | Methylene Chloride vs 2-Propanol | 905 |
| 16.23 | Methylene Chloride vs Ethyl Acetate | 906 |
| 16.24 | Methylene Chloride vs Ether (Anhydrous) | 906 |
| Ultraviolet Spectra | | 907 |
| 16.25 | Acetic Acid, Glacial | 907 |
| 16.26 | Acetone | 907 |
| 16.27 | Acetonitrile | 908 |
| 16.28 | Benzene | 909 |
| 16.29 | 2-Butanol | 910 |
| 16.30 | n-Butyl Acetate | 910 |
| 16.31 | n-Butyl Alcohol | 910 |
| 16.32 | n-Butyl Chloride | 911 |
| 16.33 | tert-Butyl Methyl Ether | 911 |
| 16.34 | Carbon Tetrachloride | 911 |
| 16.35 | Chlorobenzene | 912 |
| 16.36 | Chloroform | 912 |
| 16.37 | Cyclohexane | 914 |
| 16.38 | Cyclopentane | 914 |
| 16.39 | Decahydronaphthalene (Decalin) | 915 |
| 16.40 | o-Dichlorobenzene | 915 |
| 16.41 | Diethyl Carbonate | 916 |
| 16.42 | Dimethyl Acetamide | 916 |
| 16.43 | Dimethyl Formamide | 916 |
| 16.44 | Dimethyl Sulfoxide | 917 |
| 16.45 | 1,4-Dioxane | 917 |

| | | |
|-------|-------------------------------------------|-----|
| 16.46 | Ether, Anhydrous | 917 |
| 16.47 | 2-Ethoxyethanol | 918 |
| 16.48 | Ethyl Acetate | 918 |
| 16.49 | Ethylene Dichloride | 919 |
| 16.50 | Ethyl Ether | 919 |
| 16.51 | GLYME | 920 |
| 16.52 | n-Heptane | 920 |
| 16.53 | Hexadecane | 921 |
| 16.54 | Hexane | 921 |
| 16.55 | Isobutyl Alcohol | 923 |
| 16.56 | iso-Octane (2,2,4-Trimethylpentane) | 924 |
| 16.57 | Isopropyl Alcohol | 924 |
| 16.58 | Isopropyl Myristate | 925 |
| 16.59 | Methanol | 925 |
| 16.60 | 2-Methoxyethanol | 926 |
| 16.61 | 2-Methoxyethyl Acetate | 926 |
| 16.62 | Methyl t-Butyl Ether | 926 |
| 16.63 | Methylene Chloride | 927 |
| 16.64 | Methyl Ethyl Ketone | 927 |
| 16.65 | Methyl Isoamyl Ketone | 928 |
| 16.66 | Methyl Isobutyl Ketone | 928 |
| 16.67 | Methyl n-Propyl Ketone | 929 |
| 16.68 | N-Methylpyrrolidone | 929 |
| 16.69 | Pentane | 929 |
| 16.70 | Petroleum Ether | 930 |
| 16.71 | beta-Phenethylamine | 930 |
| 16.72 | 2-Propanol | 931 |
| 16.73 | n-Propyl Alcohol | 931 |
| 16.74 | Propylene Carbonate | 931 |
| 16.75 | Pyridine | 932 |
| 16.76 | Tetrahydrofuran | 932 |
| 16.77 | Toluene | 933 |
| 16.78 | 1,2,4-Trichlorobenzene | 934 |
| 16.79 | Trichloroethylene | 935 |
| 16.80 | 1,1,2-Trichlorotrifluoroethane | 935 |
| 16.81 | Trifluoroacetic Acid | 936 |
| 16.82 | Trimethylpentane | 936 |
| 16.83 | Water | 937 |
| 16.84 | ortho-Xylene | 937 |

| | |
|-------------------------------------------------------------|------------|
| APPENDIX—COMPARATIVE DATA FOR VARIOUS SOLVENTS | 938 |
|-------------------------------------------------------------|------------|

| | |
|-------------------------|------------|
| REFERENCES | 960 |
|-------------------------|------------|

| | |
|-------------------------------|------------|
| TRADE NAME INDEX | 962 |
|-------------------------------|------------|

Introduction

A solution may be defined as a mixture of two or more substances which has uniform chemical and physical properties throughout. It may also be defined as a system whose component parts are two or more molecular species, there being no boundary surfaces between these parts larger than molecules. There are two components to every solution—the solvent and the solute. As a matter of convenience, the part of a solution which is in excess is designated as the solvent; the solute is the component which is in smaller proportion. Solvents, once used, may be recycled, reused, or discarded in an environmentally safe manner.

The purpose of solvents is to convert substances into a form suitable for a particular use. The importance of the role of solvents is brought out most clearly by the fact that many substances exhibit their greatest usefulness when in solution. Lacquer solvents, for example, are selected to produce homogeneous combinations and so selected as to impart the most desirable mechanical properties. The physical properties of a fabricated solution can be regulated at will by the proper choice of solvents, thus adapting them to the most varied uses and methods of applications. Some of the more important uses for solvents are in the adhesives, coatings, electronics, ink, pesticide, pharmaceutical, photographic reproduction, and textile industries. Large quantities of solvents are also involved in dry cleaning, metal degreasing, oil refining and recovery, and as fuel additives.

Solvents vary in their dissolving power, so that the line of demarcation between solvents, latent solvents and nonsolvents is difficult to define. Some of the factors which influence solvency are atmospheric conditions, purity and molecular association. Molecular aggregation is the explanation for increased, attenuated, or decreased solvent power or, more concisely, eccentric solvency. Any substance that will dissolve another is called a solvent. Thus, we have a gaseous solution when a liquid or a solid is dissolved in a gas; a liquid solution when any one of these is dissolved in a liquid, and a solid solution when any one of them is dissolved in a solid.

Mixing of solvents, diluents and thinners often results in change of solvent properties. Some chlorinated compounds become good solvents for cellulose esters when mixed with an alcohol. On the other hand, some active solvents for esters of cellulose lose some of their solvent power when mixed with hydrocarbons. Alcohols are added to lacquers to improve flow and to prevent blushing, although they vary considerably in these respects. Alcohols are not true or active solvents for nitrocellulose as are the active dissolvents like ethyl lactate or n-butyl acetate. The alcohol group, however, cannot be classed as nonsolvents like toluene or naphtha. When an alcohol is added to a true solvent, the solvent power of the latter is not reduced but, on the contrary, this active solvent activates the alcohol to such an extent that it too becomes a solvent. Therefore, alcohols are referred to as latent solvents, whose hidden solvent qualities are brought out by the addition of an active solvent. The presence of a latent solvent increases the tolerance of an active solvent for a nonsolvent. This group of latent solvents is also called extenders, because they increase the volume of a mixture without decreasing the solvent power.

In general, simple esters and ketones activate alcohols so that they too become solvents and are capable of tolerating various proportions of diluents. This is due to the molecular aggregates formed. Two-type solvents containing both an alcohol and an active solvent group, such as an ester, ether or ketone, activate alcohol to a lesser degree. Unit volumes of a solvent will activate only a limited amount of alcohol, indicating that definite molecular aggregates are formed. A mixture of 50% n-butyl acetate and 50% n-butyl alcohol will not lose its solvent power until 85 to 95% of the volume is evaporated, contributing further evidence of the validity of the theory of molecular aggregates. Plasticizers, which are the high-boiling solvents, also activate alcohols.

Liquids vary in their rate of evaporation. Naturally, in a mixture of liquids, some evaporate more rapidly than others. For example, if the solvent constituent of a lacquer evaporates more rapidly than the diluent, the limit of tolerance of the residual mixture is exceeded and gelling or precipitation occurs. As evaporation goes on, gigantic molecular reactions take place. Vast numbers of molecules change places as the new aggregates are formed. Some are

replaced and some are repelled, causing immiscibility, precipitation, blushing, or one or more of the many lacquer faults. It follows that dilution ratios do not indicate tolerance during the change of solvent-nonsolvent balance which occurs during drying.

In the theory of molecular aggregation, higher concentrations of cellulose derivatives contain fewer secondary-valence bonds. Consequently, smaller amounts of diluent can be tolerated. This condition occurs during film drying. Hydroxyl-containing solvents show greater tolerance for toluene than do the simpler esters. In the case of naphtha the condition is reversed. There are, however, exceptions to this statement, among which are butyl lactate and Butyl CELLOSOLVE, which have very high naphtha tolerance. Simple esters will tolerate 50 to 100% more naphtha than will such materials as ethyl lactate, ethyl ether, ethylene glycol, diacetone alcohol, and so forth. Ethers of glycols generally have higher dilution ratios than do the butyl esters with respect to benzene, toluene, and xylene.

Solutions of nitrocellulose tolerate larger quantities of nonsolvents than solutions of cellulose acetate. The "solvent-power number" is influenced by both the nature of the diluent and the mixing of two or more solvents. Frequently, when two or more nonsolvents are mixed, they may exhibit the qualities of a good solvent. This is especially true when one of the ingredients is an alcohol. The ether-alcohol solvent mixture for collodion is a familiar example. Another example of acquired solubility is the mixing of butyl acetate with amyl or ethyl alcohol for the less highly polymerized forms of glyceryl phthalate resins. Some of the chlorinated hydrocarbons will dissolve nitrocellulose when mixed with an alcohol. A mixture of benzene and alcohol will dissolve nitrocellulose containing up to 11% nitrogen. A toluene-ethyl alcohol solution of alkyd resin will dissolve nitrocellulose. In many cases the solvent property of esters for resins and nitrocellulose is increased by the addition of an alcohol. On the other hand, when active solvents for cellulose esters are mixed with aliphatic or aromatic hydrocarbons, the solvent power of these active solvents is decreased.

These facts bring to light reasons why many of the old-type solvents have been valued for their impurities. For example, methyl acetone, made from the distillation of wood, had particularly valuable solvent properties. Actually, it is a mixed solvent which consists of methanol, acetone, esters and higher ketones. This mixture has certain desirable properties not obtained by any of its component ingredients when used separately. For this reason the "synthetic methyl acetone" is made to simulate it. For this same reason commercial grades of butyl and amyl acetate contain 85% ester and the remaining portion is the corresponding alcohol. Amyl acetate, containing its characteristic impurities when manufactured from fusel oil, is also valued for its solvent properties. The synthetic product is different because it lacks these impurities. It is made from the pentane fraction of gasoline by chlorination; the chloropentane is hydrolyzed to form amyl alcohol, and is finally esterified to the acetate.

Because of today's concern with environmental pollution, chemical composition limitations of solvent formulations have been adopted by many state and local governmental agencies in the more highly industrialized areas of the country. These rules and regulations seriously affect the use of many solvents, and solvent blends must be reformulated to conform to the maximum allowable concentrations of the restricted solvents. It is necessary for the solvent user to acquaint himself with the governmental regulations of solvent use in his particular locale.

Hydrocarbon Solvents

PARAFFINS

Table 2.1: Methane (4)

| FORMULA | CH ₄ | |
|-----------------------------------------------------------------------------|-----------------|------------|
| | RESEARCH GRADE | PURE GRADE |
| Composition, mol per cent | | |
| Nitrogen | 0.01 | 0.61 |
| Carbon Dioxide | | 0.24 |
| Methane | 99.98 | 99.08 |
| Ethylene | | |
| Ethane | 0.01 | 0.06 |
| Propylene | | |
| Propane | | 0.01 |
| Freezing point, triple point, F | -296.46* | |
| Boiling point, F | -258.68* | |
| Specific gravity of liquid at 60/60 F at 20/4 C | | |
| Density of liquid at 60 F, lb/gal | | |
| Vapor pressure at 70 F, psia | | |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 0.55491* | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 23.6113* | |
| Density of real gas at 60 F and 14.7 psia, lbs/cu ft | 0.04235 | |
| Liquid volume, cu ft/lb at -260 F and 13.8 psia | 0.03766* | |
| Critical temperature, F | -115.78* | |
| Critical pressure, psia | 673.1* | |
| Flash point, approximate, F | -306* | |
| Flammability limits, volume % in air | | |
| Lower | 5.0* | |
| Higher | 15.0* | |
| Heating value for real gas at 60 F and 30 in Hg, saturated basis BTU/ cu ft | | 994 |
| Heating value for ideal gas at 60 F and 14.7 psia, BTU/cu ft, | | |
| Dry basis | 1010* | |
| Saturated basis | | 985 |

*Literature values.

Table 2.2: Ethane (4)

| FORMULA | CH ₃ -CH ₃ | |
|-----------------------------------------------------------------------------|----------------------------------|------------|
| | RESEARCH GRADE | PURE GRADE |
| Composition, mol per cent | | |
| Nitrogen | | |
| Carbon Dioxide | | |
| Methane | | trace |
| Ethylene | trace | 0.06 |
| Ethane | 99.97 | 99.35 |
| Propylene | 0.01 | 0.25 |
| Propane | 0.02 | 0.35 |
| Freezing point, triple point, F | -297.89* | |
| Boiling point, F | -127.53* | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.3771* | |
| Density of liquid at 60 F, lb/gal | 3.144* | |
| Vapor pressure at 70 F, psia | 560* | |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 1.0469* | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 12.515* | |
| Density of real gas at 60 F and 14.7 psia, lbs/cu ft | | |
| Liquid volume, cu ft/lb at -260 F and 13.8 psia | 0.04252 (60 F) | |
| Critical temperature, F | 90.32* | |
| Critical pressure, psia | 707.8* | |
| Flash point, approximate, F | -211* | |
| Flammability limits, volume % in air | | |
| Lower | 2.9* | |
| Higher | 13.0* | |
| Heating value for real gas at 60 F and 30 in Hg, saturated basis BTU/ cu ft | | |
| Heating value for ideal gas at 60 F and 14.7 psia, BTU/cu ft, | | |
| Dry basis | 1769* | |
| Saturated basis | | |

*Literature values.

Table 2.3: Propane (4)

| FORMULA | CH ₃ -CH ₂ -CH ₃ | | |
|------------------------------------------------------------------------|---------------------------------------------------|------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Ethane | | 0.07 | 0.01 |
| Propylene | | 0.01 | 0.01 |
| Propane | 99.98 | 99.35 | 97.50 |
| Isobutane | 0.02 | 0.52 | 2.38 |
| Normal Butane | | 0.05 | 0.10 |
| Butene-2 | | | |
| Neopentane | | | |
| Isopentane | | | |
| Normal Pentane | | | |
| Purity by freezing point, mol percent | | | |
| Freezing point, F | -305.84° (triple point) | | |
| Boiling point, F | -43.73° | | |
| Specific gravity of liquid at 60/60 F | 0.5077* | 0.508 | 0.510 |
| 20/4 C | 0.5005* | 0.501 | |
| API gravity at 60 F | | 147.0 | 145.9 |
| Density of liquid at 60 F, lb/gal | | 4.22 | 4.24 |
| Vapor pressure at 70 F, psia | | 123 | 123 |
| 100 F, psia | | 189 | 189 |
| 130 F, psia | | 271 | 271 |
| Sulfur content, weight per cent | | < 0.0005 | < 0.0005 |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 1.5503* | | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 8.4515* | | |
| Flash point, approximate, F | -156° | | |
| Flammability limits, volume % in air | | | |
| Lower | 2.1* | | |
| Higher | 9.5* | | |
| Heating value for ideal gas at 60 F and 14.7 psia, dry basis BTU/cu ft | 2517° | | |

*Literature

Table 2.4: Isobutane (4)

| FORMULA | CH ₃ CH ₂ -CH-CH ₃ | | |
|------------------------------------------------------------------------|--------------------------------------------------------|------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Ethane | | | |
| Propylene | | | |
| Propane | | 0.1 | 0.4 |
| Isobutane | 99.98 | 99.5 | 96.8 |
| Normal Butane | 0.02 | 0.4 | 2.8 |
| Butene-2 | | | |
| Neopentane | | | |
| Isopentane | | | |
| Normal Pentane | | | |
| Purity by freezing point, mol percent | 99.96 | 99.5 | |
| Freezing point, F | -255.28° | | |
| Boiling point, F | 10.89° | | |
| Specific gravity of liquid at 60/60 F | 0.5631* | 0.563 | 0.563 |
| 20/4 C | 0.5572* | 0.557 | 0.557 |
| API gravity at 60 F | | 119.8 | 119.8 |
| Density of liquid at 60 F, lb/gal | | 4.68 | 4.68 |
| Vapor pressure at 70 F, psia | | 45.8 | 45.4 |
| 100 F, psia | | 72.2 | 72.2 |
| 130 F, psia | | 111.5 | 111.5 |
| Sulfur content, weight per cent | | < 0.0005 | < 0.0005 |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 2.06805* | | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 6.3355* | | |
| Flash point, approximate, F | | -117 | -117 |
| Flammability limits, volume % in air | | | |
| Lower | 1.8* | | |
| Higher | 8.4* | | |
| Heating value for ideal gas at 60 F and 14.7 psia, dry basis BTU/cu ft | 3253° | | |

*Literature values.

Table 2.5: n-Butane (4)

| FORMULA | $\text{CH}_3\text{-CH}_2\text{-CH}_2\text{-CH}_3$ | | |
|------------------------------------------------------------------------|---------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Ethane | | | |
| Propylene | | | |
| Propane | | | 0.6 |
| Isobutane | 0.05 | 0.3 | 1.0 |
| Normal Butane | 99.95 | 99.4 | 97.6 95.0 min |
| Butene-2 | | | 0.1 |
| Neopentane | | | 0.2 |
| Isopentane | | 0.2 | 0.3 |
| Normal Pentane | | 0.1 | 0.2 |
| Purity by freezing point, mol percent | 99.95 | 99.4 | 99.0 min |
| Freezing point, F | -217.03* | | |
| Boiling point, F | 31.10* | | |
| Specific gravity of liquid at 60/60 F | 0.5844* | 0.584 | 0.584 |
| 20/4 C | 0.5788* | 0.579 | 0.579 |
| API gravity at 60 F | | 110.8 | 110.8 |
| Density of liquid at 60 F, lb/gal | | 4.86 | 4.86 |
| Vapor pressure at 70 F, psia | | 31.6 | 32.0 |
| 100 F, psia | | 51.6 | 52.0 |
| 130 F, psia | | 82.2 | 83.0 |
| Sulfur content, weight per cent | | < 0.0005 | < 0.0005 |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 2.0757* | | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft /lb | 6.3120* | | |
| Flash point, approximate, F | | -100 | -100 |
| Flammability limits, volume % in air | | | |
| Lower | 1.8* | | |
| Higher | 8.4* | | |
| Heating value for ideal gas at 60 F and 14.7 psia, dry basis BTU/cu ft | 3262* | | |

*Literature values.

Table 2.6: 2,2-Dimethylpropane (4)

Neopentane

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \text{CH}_3\text{-C-CH}_3 \\ \text{CH}_3 \end{array}$ | | |
|---------------------------------------|----------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Normal Butane | trace | 0.1 | 1.7 |
| cis-Butene-2 | | trace | 0.1 |
| 2,2-Dimethylpropane | 99.99+ | 99.6 | 97.8 |
| Isopentane | | | |
| Normal Pentane | | | 0.4 |
| Pentene-2 | | | |
| Cyclopentane | | | |
| Purity by freezing point, mol percent | 99.99 | 99.3 | |
| Freezing point, F | 2.21* | | |
| Boiling point, F | 49.10* | | |
| Distillation range, F | | | |
| Initial boiling point | | | |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | |
| Specific gravity of liquid at 60/60 F | 0.5967* | 0.597 | 0.597 |
| at 20/4 C | 0.5910* | 0.591 | 0.591 |

(continued)

Table 2.6: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|--------------------------------------------------------------|----------------|------------|-----------------|
| API gravity at 60 F | | 105.5 | 105.5 |
| Density of liquid at 60 F, lb/gal | | 4.96 | 4.96 |
| Vapor pressure at 70 F, psia | 21.9* | 21.9 | 22.0 |
| 100 F, psia | | 35.9 | 36.7 |
| 130 F, psia | | 57.4 | 57.7 |
| Refractive index, 20/D | | | |
| Color, Saybolt (unless indicated) | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Kinematic viscosity, cs at 32 F | 0.532* | | |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 2.622* | | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 4.997* | | |
| Flash point, approximate, F | | -85 | -85 |
| Flammability limits, volume % in air | | | |
| Lower | 1.4* | | |
| Higher | 8.3* | | |

*Literature values.

Table 2.7: Isopentane (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_2-\text{CH}-\text{CH}_2-\text{CH}_3 \end{array}$ | | |
|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Normal Butane | | 0.1 | 0.2 |
| cis-Butene-2 | | | |
| 2,2-Dimethylpropane | | 0.1 | 0.1 |
| Isopentane | 99.99 | 99.4 | 97.1 |
| Normal Pentane | 0.01 | 0.4 | 2.6 |
| Pentene-2 | | | |
| Cyclopentane | | | |
| Purity by freezing point, mol per cent | 99.99 | 99.4 | |
| Freezing point, F | -255.82* | | |
| Boiling point, F | 82.13* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 82 |
| 10% Condensed | | | 83 |
| 50% Condensed | | | 83 |
| 90% Condensed | | | 84 |
| Dry point | | | 86 |
| Specific gravity of liquid at 60/60 F | 0.6248* | 0.625 | 0.625 |
| at 20/4 C | 0.61967* | 0.620 | 0.620 |
| API gravity at 60 F | | 94.9 | 94.9 |
| Density of liquid at 60 F, lb/gal | | 5.20 | 5.20 |
| Vapor pressure at 70 F, psia | 11.57* | 11.5 | 11.4 |
| 100 F, psia | 20.44* | 20.4 | 20.2 |
| 130 F, psia | | | 33.5 |
| Refractive index, 20/D | 1.35373* | | |
| Color, Saybolt (unless indicated) | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Kinematic viscosity, cs at 32 F | 0.433* | | |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 2.6269* | | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 4.9876* | | |
| Flash point, approximate, F | | -70 | -70 |
| Flammability limits, volume % in air | | | |
| Lower | 1.4* | | |
| Higher | 8.3* | | |

*Literature values.

Table 2.8: n-Pentane (4)

| FORMULA | CH ₃ -CH ₂ -CH ₂ -CH ₂ -CH ₃ | | |
|--------------------------------------------------------------|-------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Normal Butane | | | |
| cis-Butene-2 | | | |
| 2,2-Dimethylpropane | | | |
| Isopentane | 0.01 | 0.2 | 0.5 |
| Normal Pentane | 99.99 | 99.4 | 98.8 |
| Pentene-2 | | 0.1 | 0.2 |
| Cyclopentane | | 0.3 | 0.5 |
| Purity by freezing point, mol per cent | 99.98 | 99.2 | |
| Freezing point, F | -201.50* | | |
| Boiling point, F | 96.93* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 96 |
| 10% Condensed | | | 97 |
| 50% Condensed | | | 97 |
| 90% Condensed | | | 97 |
| Dry point | | | 99 |
| Specific gravity of liquid at 60/60 F | 0.6312* | 0.631 | 0.633 |
| at 20/4 C | 0.62624* | 0.626 | |
| API gravity at 60 F | | 92.7 | 92.0 |
| Density of liquid at 60 F, lb/gal | | 5.25 | 5.27 |
| Vapor pressure at 70 F, psia | 8.56* | 8.6 | |
| 100 F, psia | 15.57* | 15.6 | |
| 130 F, psia | 26.4* | 26.3 | |
| Refractive index, 20/ D | 1.35748* | | |
| Color, Saybolt (unless indicated) | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Kinematic viscosity, cs at 32 F | 0.431* | | |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 2.6400* | | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 4.9629* | | |
| Flash point, approximate, F | | -57 | -50 |
| Flammability limits, volume % in air | | | |
| Lower | 1.4* | | |
| Higher | 8.3* | | |

*Literature values.

Table 2.9: 2,2-Dimethylbutane (4)

Neohexane

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_3-\text{C}-\text{CH}_2-\text{CH}_3 \\ \\ \text{CH}_3 \end{array}$ | | |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------|----------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Isopentane | | | |
| Cyclopentane | | 0.2 | 0.1 |
| 2,2-Dimethylbutane | 99.98 | 99.5 | 96.4 95.0 min. |
| 2,3-Dimethylbutane | 0.01 | 0.2 | 2.2 |
| 2-Methylpentane | 0.01 | 0.1 | 0.3 |
| 3-Methylpentane | | | |
| Purity by freezing point, mol per cent | 99.97 | 99.4 99.0 min. | |
| Freezing point, F | -147.77* | | |
| Boiling point, F | 121.53* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 120.5 |
| Dry point | | | 122.2 |

(continued)

Table 2.9: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|---------------------------------------|----------------|------------|-----------------|
| Specific gravity of liquid at 60/60 F | 0.6540* | 0.655 | 0.659 |
| at 20/4 C | 0.64916* | 0.650 | 0.654 |
| API gravity at 60 F | | 84.5 | 83.2 |
| Density of liquid at 60 F, lbs/gal | | 5.45 | 5.49 |
| Vapor pressure at 70 F, psia | 5.30* | 5.3 | 5.3 |
| 100 F, psia | 9.86* | 9.9 | 9.9 |
| 130 F, psia | 17.04* | 16.8 | 16.8 |
| Refractive index, 20/D | 1.36676* | 1.369 | 1.369 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | -25 | -25 |
| Flammability limits, volume % in air | | | |
| Lower | 1.2* | | |
| Higher | 7.7* | | |

*Literature values.

Table 2.10: 2,3-Dimethylbutane (4)

Diisopropyl

| FORMULA | $\begin{array}{c} \text{CH}_3 \text{ CH}_3 \\ \quad \\ \text{CH} - \text{CH} \\ \quad \\ \text{CH}_3 \text{ CH}_3 \end{array}$ | | |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Isopentane | | | 0.6 |
| Cyclopentane | | | |
| 2,2-Dimethylbutane | 0.07 | 0.2 | 1.1 |
| 2,3-Dimethylbutane | 99.88 | 99.7 | 98.0 95.0 min. |
| 2-Methylpentane | 0.04 | 0.1 | 0.2 |
| 3-Methylpentane | 0.01 | | 0.1 |
| Purity by freezing point, mol per cent | 99.88 | 99.3 | 99.0 min. |
| Freezing point, F | -199.37* | | |
| Boiling point, F | 136.37* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 135 |
| Dry point | | | 136 |
| Specific gravity of liquid at 60/60 F | 0.6664* | 0.666 | 0.666 |
| at 20/4 C | 0.66164* | 0.662 | 0.661 |
| API gravity at 60 F | | 81.0 | 81.0 |
| Density of liquid at 60 F, lbs/gal | | 5.54 | 5.54 |
| Vapor pressure at 70 F, psia | 3.87* | 3.8 | 3.8 |
| 100 F, psia | 7.40* | 7.3 | 7.3 |
| 130 F, psia | 13.12* | 12.9 | 12.9 |
| Refractive index, 20/D | 1.37495* | 1.375 | 1.375 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | -20 | -20 |
| Flammability limits, volume % in air | | | |
| Lower | 1.2* | | |
| Higher | 7.7* | | |

*Literature values.

Table 2.11: 2-Methylpentane (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_3-\text{CH}-\text{CH}_2-\text{CH}_2-\text{CH}_3 \end{array}$ | | |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Isopentane | | | |
| Cyclopentane | | | 0.2 |
| 2,2-Dimethylbutane | | | |
| 2,3-Dimethylbutane | 0.01 | 0.5 | 3.8 |
| 2-Methylpentane | 99.98 | 99.3 | 95.4 95.0 min. |
| 3-Methylpentane | 0.01 | 0.2 | 0.6 |
| Purity by freezing point, mol per cent | 99.98 | 99.2 | 99.0 min. |
| Freezing point, F | -244.61* | | |
| Boiling point, F | 140.49* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 140 |
| Dry point | | | 141 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.6579* | 0.658 | 0.658 |
| | 0.65315* | 0.653 | 0.653 |
| API gravity at 60 F | | 85.2 | 85.2 |
| Density of liquid at 60 F, lbs/gal | | 5.44 | 5.44 |
| Vapor pressure at 70 F, psia | 3.48* | 3.5 | 3.5 |
| 100 F, psia | 6.77* | 6.8 | 6.8 |
| 130 F, psia | 13.32* | 13.0 | 13.0 |
| Refractive index, 20/D | 1.37145* | 1.371 | 1.371 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | -10 | -10 |
| Flammability limits, volume % in air | | | |
| Lower | 1.2* | | |
| Higher | 7.7* | | |

*Literature values.

Table 2.12: 3-Methylpentane (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_3-\text{CH}_2-\text{CH}-\text{CH}_2-\text{CH}_3 \end{array}$ | | |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------|------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| 2,3-Dimethylbutane | | | 0.1 |
| 2-Methylpentane | 0.01 | 0.6 | 3.8 |
| 3-Methylpentane | 99.99 | 99.4 | 99.0 min |
| Normal Hexane | | | |
| Methylcyclopentane | | | |
| 2,2-Dimethylpentane | | | |
| 2,4-Dimethylpentane | | | |
| Cyclohexane | | | |
| 2,3-Dimethylpentane | | | |
| 2-Methylhexane | | | |
| 3-Methylhexane | | | |
| Purity by freezing point, mol per cent | ** | | |
| Freezing point, F | ** | | |
| Boiling point, F | 145.91* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 145 |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | 146 |

(continued)

Table 2.12: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|--------------------------------------|----------------|------------|-----------------|
| Specific gravity of liquid at 60/60F | 0.6690* | 0.669 | 0.669 |
| at 20/4 C | 0.66431* | 0.664 | 0.664 |
| API gravity at 60 F | | 80.0 | 80.0 |
| Density of liquid at 60 F, lbs/gal | | 5.57 | 5.57 |
| Vapor pressure at 70 F, psia | 3.11* | 3.1 | 3.1 |
| 100 F, psia | 6.10* | 6.1 | 6.0 |
| 130 F, psia | 11.03* | 11.0 | 10.9 |
| Refractive index, 20/D | 1.37652* | 1.376 | 1.376 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | -25 | 25 |
| Flammability limits, volume % in air | | | |
| Lower | 1.2* | | |
| Higher | 7.7* | | |

*Literature values. **Forms a glass.

Table 2.13: n-Hexane (4)

| FORMULA | CH ₃ -CH ₂ -CH ₂ -CH ₂ -CH ₂ -CH ₃ | | |
|----------------------------------------|------------------------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| 2,3-Dimethylbutane | | | |
| 2-Methylpentane | trace | trace | trace |
| 3-Methylpentane | 0.02 | 0.1 | 0.2 |
| Normal Hexane | 99.98 | 99.5 | 97.7 95.0 min |
| Methylcyclopentane | trace | 0.4 | 2.1 |
| 2,2-Dimethylpentane | | | |
| 2,4-Dimethylpentane | | | |
| Cyclohexane | | | |
| 2,3-Dimethylpentane | | | |
| 2-Methylhexane | | | |
| 3-Methylhexane | | | |
| Purity by freezing point, mol per cent | 99.98 | 99.4 | |
| Freezing point, F | -139.63* | | |
| Boiling point, F | 155.73* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 155.1 |
| 10% Condensed | | | 155.3 |
| 50% Condensed | | | 155.3 |
| 90% Condensed | | | 155.7 |
| Dry point | | | 156.4 |
| Specific gravity of liquid at 60/60F | 0.6640* | 0.664 | 0.666 |
| at 20/4 C | 0.65937* | 0.660 | 0.661 |
| API gravity at 60 F | | 81.6 | 81.0 |
| Density of liquid at 60 F, lbs/gal | | 5.53 | 5.54 |
| Vapor pressure at 70 F, psia | 2.46* | 2.5 | 2.5 |
| 100 F, psia | 4.96* | 5.0 | 4.9 |
| 130 F, psia | 9.17* | 9.2 | 9.1 |
| Refractive index, 20/D | 1.37486* | 1.375 | 1.375 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | -10 | -10 |
| Flammability limits, volume % in air | | | |
| Lower | 1.2* | | |
| Higher | 7.7* | | |

*Literature values. **Forms a glass.

Table 2.14: 2,4-Dimethylpentane (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \quad \text{CH}_3 \\ \quad \\ \text{CH}_3-\text{CH}-\text{CH}_2-\text{CH}-\text{CH}_3 \end{array}$ | | |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| 2,3-Dimethylbutane | | | |
| 2-Methylpentane | | | |
| 3-Methylpentane | | | |
| Normal Hexane | | trace | 0.1 |
| Methylcyclopentane | | | |
| 2,2-Dimethylpentane | 0.01 | 0.1 | 2.9 |
| 2,4-Dimethylpentane | 99.99 | 99.7 | 96.0 95.0 min |
| Cyclohexane | | 0.1 | 0.5 |
| 2,3-Dimethylpentane | | 0.1 | 0.5 |
| 2-Methylhexane | | | |
| 3-Methylhexane | | | |
| Purity by freezing point, mol per cent | 99.77 | 99.2 | 99.0 min |
| Freezing point, F | -182.64* | | |
| Boiling point, F | 176.90* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 175 |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | 176 |
| Specific gravity of liquid at 60/60F | 0.6772* | 0.677 | 0.678 |
| at 20/4 C | 0.67270* | 0.673 | 0.673 |
| API gravity at 60 F | | 77.4 | 77.2 |
| Density of liquid at 60 F, lbs/gal | | 5.64 | 5.64 |
| Vapor pressure at 70 F, psia | 1.59* | 1.6 | 1.6 |
| 100 F, psia | 3.29* | 3.3 | 3.3 |
| 130 F, psia | 6.24* | 6.2 | 6.2 |
| Refractive index, 20/D | 1.38145* | 1.381 | 1.381 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight per cent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | 10 | 10 |
| Flammability limits, volume % in air | | | |
| Lower | 1.0* | | |
| Higher | 7.0* | | |

* Literature values.

Table 2.15: 2,3-Dimethylpentane (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \text{CH}_3 \\ \quad \\ \text{CH}_3-\text{CH}-\text{CH}-\text{CH}_2-\text{CH}_3 \end{array}$ |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| PROPERTIES | 90% GRADE |
| Composition, weight per cent | |
| 2,3-Dimethylbutane | |
| 2-Methylpentane | |
| 3-Methylpentane | |
| Normal Hexane | |
| Methylcyclopentane | |
| 2,2-Dimethylpentane | |
| 2,4-Dimethylpentane | |
| Cyclohexane | |
| 2,3-Dimethylpentane | 90.4 90.0 min |
| 2-Methylhexane | 3.4 |
| 3-Methylhexane | 6.2 |
| Purity by freezing point, mol per cent | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 193 |
| 10% Condensed | |

| PROPERTIES | 90% GRADE |
|--------------------------------------|-----------|
| 50% Condensed | |
| 90% Condensed | |
| Dry point | 194 |
| Specific gravity of liquid at 60/60F | 0.6990 |
| at 20/4 C | 0.6943 |
| API gravity at 60 F | 70.9 |
| Density of liquid at 60 F, lbs/gal | 5.82 |
| Vapor pressure at 70 F, psia | 1.2 |
| 100 F, psia | 3.6 |
| 130 F, psia | |
| Refractive index, 20/D | 1.3922 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Sulfur content, weight per cent | |
| Copper corrosion | |
| Doctor test | negative |
| Flash point, approximate, F | < 10 |
| Flammability limits, volume % in air | |
| Lower | |
| Higher | |

Table 2.16: 3-Methylhexane (4)

| FORMULA | $\text{CH}_3-\text{CH}_2-\overset{\text{CH}_3}{\text{CH}}-(\text{CH}_2)_2-\text{CH}_3$ | |
|-----------------------------|----------------------------------------------------------------------------------------|--|
| PROPERTIES | TECHNICAL GRADE | |
| Composition, weight percent | | |
| 2,3-Dimethylpentane | 0.1 | |
| 2-Methylhexane | 1.4 | |
| 3-Methylhexane | 97.2 95.0 min | |
| 3-Ethylpentane | 0.8 | |
| Normal Heptane | | |
| Dimethylcyclopentane | 0.5 | |
| Methylcyclohexane | | |
| 2,2-Dimethylhexane | | |
| 2,4-Dimethylhexane | | |
| 2,5-Dimethylhexane | | |
| Other Dimethylhexanes | | |
| 2,2,4-Trimethylpentane | | |
| 2,2,3-Trimethylpentane | | |
| 2,3,4-Trimethylpentane | | |
| 2,3,3-Trimethylpentane | | |

| PROPERTIES | TECHNICAL GRADE |
|---------------------------------------|-----------------|
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 195 |
| Dry point | 196 |
| Specific gravity of liquid at 60/60 F | 0.692 |
| 20/4 C | 0.688 |
| API gravity at 60 F | 73.0 |
| Density of liquid at 60 F, lbs/gal | 5.76 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | 2.1 |
| 130 F, psia | |
| Refractive index, 20/D | 1.388 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Sulfur content, weight percent | 0.005 |
| Copper corrosion | 1 |
| Doctor test | negative |
| Flash point, approximate, F | 25 Estimated |
| Flammability limits, volume % in air | |
| Lower | 1 |
| Higher | 7 |

Table 2.17: n-Heptane (4)

| FORMULA | $\text{CH}_3-(\text{CH}_2)_6-\text{CH}_3$ | |
|---------------------------------------|-------------------------------------------|---------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE |
| Composition, weight percent | | |
| 2,3-Dimethylpentane | | |
| 2-Methylhexane | | |
| 3-Methylhexane | | |
| 3-Ethylpentane | trace | |
| Normal Heptane | 99.99 | 99.8 |
| Dimethylcyclopentane | 0.01 | 0.2 |
| Methylcyclohexane | trace | |
| 2,2-Dimethylhexane | | |
| 2,4-Dimethylhexane | | |
| 2,5-Dimethylhexane | | |
| Other Dimethylhexanes | | |
| 2,2,4-Trimethylpentane | | |
| 2,2,3-Trimethylpentane | | |
| 2,3,4-Trimethylpentane | | |
| 2,3,3-Trimethylpentane | | |
| Purity by freezing point, mol % | 99.92 | 99.7 99.0 min |
| Freezing point, F | -131.10* | |
| Boiling point, F | 209.17* | |
| Distillation range, F | | |
| Initial boiling point | | |
| Dry point | | |
| Specific gravity of liquid at 60/60 F | 0.6882* | 0.688 |
| 20/4 C | 0.68376* | 0.684 |
| API gravity at 60 F | 74.1 | |
| Density of liquid at 60 F, lbs/gal | 5.73 | |
| Vapor pressure at 70 F, psia | | |
| 100 F, psia | 1.62* | 1.6 |
| 130 F, psia | | |
| Refractive index, 20/D | 1.38764* | 1.388 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | |
| Nonvolatile matter, grams/100 ml | 0.0005 | |
| Sulfur content, weight percent | 0.005 | |
| Copper corrosion | 1 | |
| Doctor test | negative | |
| Flash point, approximate, F | 25 | |
| Flammability limits, volume % in air | | |
| Lower | 1.0* | |
| Higher | 7.0* | |

*Literature values.

Table 2.18: 2,2,4-Trimethylpentane (4)

Isooctane

| FORMULA | $\text{CH}_3-\overset{\text{CH}_3}{\underset{\text{CH}_3}{\text{C}}}-\text{CH}_2-\overset{\text{CH}_3}{\text{CH}}-\text{CH}_3$ | |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE |
| Composition, weight percent | | |
| 2,3-Dimethylpentane | | |
| 2-Methylhexane | | |
| 3-Methylhexane | | |
| 3-Ethylpentane | | |
| Normal Heptane | trace | |
| Dimethylcyclopentane | | |
| Methylcyclohexane | | |
| 2,2-Dimethylhexane | 0.01 | 0.2 |
| 2,4-Dimethylhexane | | |
| 2,5-Dimethylhexane | | |
| Other Dimethylhexanes | | |
| 2,2,4-Trimethylpentane | 99.99 | 99.8 |
| 2,2,3-Trimethylpentane | | |
| 2,3,4-Trimethylpentane | | |
| 2,3,3-Trimethylpentane | | |
| Purity by freezing point, mol % | 99.98 | 99.7 99.0 min |
| Freezing point, F | -161.28* | |
| Boiling point, F | 210.63* | |
| Distillation range, F | | |
| Initial boiling point | | |
| Dry point | | |
| Specific gravity of liquid at 60/60 F | 0.6963* | 0.696 |
| 20/4 C | 0.69193* | 0.692 |
| API gravity at 60 F | 71.7 | |
| Density of liquid at 60 F, lbs/gal | 5.80 | |
| Vapor pressure at 70 F, psia | 0.79* | 0.8 |
| 100 F, psia | 1.71* | 1.7 |
| 130 F, psia | 3.37* | 3.3 |
| Refractive index, 20/D | 1.39145* | 1.391 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | |
| Nonvolatile matter, grams/100 ml | 0.0005 | |
| Sulfur content, weight percent | 0.005 | |
| Copper corrosion | 1 | |
| Doctor test | negative | |
| Flash point, approximate, F | 18 | |
| Flammability limits, volume % in air | | |
| Lower | 1.0* | |
| Higher | 7.0* | |

*Literature values.

Table 2.19: 2,3,4-Trimethylpentane (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \text{ CH}_3 \text{ CH}_3 \\ \quad \quad \\ \text{CH}_3 - \text{CH} - \text{CH} - \text{CH}_3 \end{array}$ | | |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 2,3-Dimethylpentane | | | |
| 2-Methylhexane | | | |
| 3-Methylhexane | | | |
| 3-Ethylpentane | | | |
| Normal Heptane | | | |
| Dimethylcyclopentane | | | |
| Methylcyclohexane | | | |
| 2,2-Dimethylhexane | | | |
| 2,4-Dimethylhexane | | | |
| 2,5-Dimethylhexane | | | |
| Other Dimethylhexanes | trace | trace | 0.6 |
| 2,2,4-Trimethylpentane | | | |
| 2,2,3-Trimethylpentane | | | |
| 2,3,4-Trimethylpentane | 99.99+ | 99.8 | 98.0 95.0 min |
| 2,3,3-Trimethylpentane | trace | 0.2 | 1.4 |
| Purity by freezing point, mol % | | 99.1 99.0 min | |
| Freezing point, F | -154.58* | | |
| Boiling point, F | 236.24* | | |
| Distillation range, F | | | |
| Initial boiling point | | | |
| Dry point | | | |
| Specific gravity of liquid at 60/60 F 20/4 C | 0.7233* 0.71906* | 0.723 0.719 | 0.723 0.719 |
| API gravity at 60 F | | 64.1 | 64.1 |
| Density of liquid at 60 F, lbs/gal | | 6.02 | 6.02 |
| Vapor pressure at 70 F, psia | | | |
| 100 F, psia | 0.98* | 1.0 | 1.0 |
| 130 F, psia | | | |
| Refractive index, 20/D | 1.40422* | 1.404 | 1.404 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight percent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | 41 (D 56) | 41 (D 56) | 41 (D 56) |
| Flammability limits, volume % in air | | | |
| Lower | | | |
| Higher | | | |

*Literature values.

Table 2.20: Mixed Trimethylpentanes (4)

| FORMULA | C ₈ H ₁₈ |
|-------------------------------------------------|--------------------------------|
| | |
| Composition, weight percent | |
| 2,3-Dimethylpentane | |
| 2-Methylhexane | |
| 3-Methylhexane | |
| 3-Ethylpentane | |
| Normal Heptane | |
| Dimethylcyclopentane | |
| Methylcyclohexane | |
| 2,2-Dimethylhexane | 0.3 |
| 2,4-Dimethylhexane | 0.1 |
| 2,5-Dimethylhexane | 0.1 |
| Other Dimethylhexanes | 3.5 |
| 2,2,4-Trimethylpentane | |
| 2,2,3-Trimethylpentane | 0.1 |
| 2,3,4-Trimethylpentane | 80.9 95.0 min |
| 2,3,3-Trimethylpentane | 15.0 |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 235 |
| Dry point | 236 |
| Specific gravity of liquid at 60/60 F 20/4 C | 0.723 0.719 |
| API gravity at 60 F | 64.2 |
| Density of liquid at 60 F, lbs/gal | 6.02 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | 1.0 |
| 130 F, psia | |
| Refractive index, 20/D | 1.404 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Sulfur content, weight percent | 0.005 |
| Copper corrosion | 1 |
| Doctor test | negative |
| Flash point, approximate, F | 50 |
| Flammability limits, volume % in air | |
| Lower | |
| Higher | |

Table 2.21: Mixed Dimethylhexanes (4)

| FORMULA | C ₈ H ₁₈ |
|---------------------------------|--------------------------------|
| | |
| Composition, weight percent | |
| 2,3-Dimethylpentane | |
| 2-Methylhexane | |
| 3-Methylhexane | |
| 3-Ethylpentane | |
| Normal Heptane | |
| Dimethylcyclopentane | |
| Methylcyclohexane | |
| 2,2-Dimethylhexane | 4.3 |
| 2,4-Dimethylhexane | 36.7 |
| 2,5-Dimethylhexane | 53.9 |
| Other Dimethylhexanes | |
| 2,2,4-Trimethylpentane | 1.6 |
| 2,2,3-Trimethylpentane | 3.5 |
| 2,3,4-Trimethylpentane | |
| 2,3,3-Trimethylpentane | |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |

| PROPERTIES | TECHNICAL GRADE |
|-------------------------------------------------|-----------------|
| Distillation range, F | |
| Initial boiling point | 228.6 |
| Dry point | 228.8 |
| Specific gravity of liquid at 60/60 F 20/4 C | 0.704 0.700 |
| API gravity at 60 F | 69.4 |
| Density of liquid at 60 F, lbs/gal | 5.86 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | 1.0 |
| 130 F, psia | |
| Refractive index, 20/D | 1.394 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Sulfur content, weight percent | 0.005 |
| Copper corrosion | 1 |
| Doctor test | negative |
| Flash point, approximate, F | 50 |
| Flammability limits, volume % in air | |
| Lower | |
| Higher | |

*Literature values.

Table 2.24: n-Nonane (4)

| FORMULA | $\text{CH}_3-(\text{CH}_2)_7-\text{CH}_3$ | | |
|---------------------------------------|-------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Isooctanes | | | |
| Normal Octane | | | |
| 2,2,5-Trimethylhexane | | | |
| 2,2,4-Trimethylhexane | | | |
| Isononanes | | | |
| Isoparaffins | 0.1 | 0.4 | 0.5 |
| Normal Nonane | 99.9 | 99.6 | 99.5 |
| Purity by freezing point, mol % | 99.67 | 99.2 99.0 min | 95.9 95.0 min |
| Freezing point, F | -64.33* | | |
| Boiling point, F | 303.44 | | |
| Distillation range, F | | | |
| Initial boiling point | | | 303.4 |
| Dry point | | | 304.0 |
| Specific gravity of liquid at 60/60 F | 0.7217* | 0.722 | 0.722 |
| at 20/4 C | 0.71763* | 0.718 | 0.718 |
| API gravity at 60 F | | 64.4 | 64.4 |
| Density of liquid at 60 F, lbs/gal | | 6.01 | 6.01 |
| Vapor pressure at 70 F, psia | | | |
| 100 F, psia | 0.18* | 0.2 | 0.2 |
| 130 F, psia | | | |
| Refractive index, 20/D | 1.40542* | 1.405 | 1.397 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight percent | | | |
| Copper corrosion | | | |
| Doctor test | | | |
| Flash point, approximate, F | | 86 | 86 |

*Literature values.

Table 2.25: n-Decane (4)

| FORMULA | $\text{CH}_3-(\text{CH}_2)_8-\text{CH}_3$ | | |
|---------------------------------------|-------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Normal Nonane | 0.05 | | |
| Normal Decane | 99.94 | 99.5 | 99.0 |
| Normal Undecane | | | |
| Normal Dodecane | | | |
| Normal Tridecane | | | |
| Isoparaffins | 0.01 | 0.5 | 1 |
| Purity by freezing point, mol % | 99.55 | 99.1 99.0 min | 96.5 95.0 min |
| Freezing point, F | -21.39* | | |
| Boiling point, F | 345.42* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 344.9 |
| Dry Point | | | 345.4 |
| Specific gravity of liquid at 60/60 F | 0.7341* | 0.734 | 0.734 |
| at 20/4 C | 0.73005* | 0.730 | 0.730 |
| API gravity at 60 F | | 61.3 | 61.3 |
| Density of liquid at 60 F, lbs/gal | | 6.11 | 6.11 |
| Vapor pressure at 100 F, psia | | 0.1 | 0.1 |
| Refractive index, 20/D | 1.41189* | 1.412 | 1.412 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | 111 | 111 |

*Literature values.

Table 2.26: n-Undecane (4)

| FORMULA | CH ₃ -(CH ₂) ₉ -CH ₃ | | |
|---------------------------------------|-------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Normal Nonane | | | |
| Normal Decane | | | |
| Normal Undecane | 99.8 | 99.6 | 99.1 |
| Normal Dodecane | | | |
| Normal Tridecane | | | |
| Isoparaffins | 0.2 | 0.4 | 0.9 |
| Purity by freezing point, mol % | 99.64 | 99.1 99.0 min | 96.7 95.0 min |
| Freezing point, F | -14.07* | | |
| Boiling point, F | 384.60* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 384 |
| Dry Point | | | 385 |
| Specific gravity of liquid at 60/60 F | 0.7443* | 0.744 | 0.744 |
| at 20/4 C | 0.74024* | 0.740 | 0.739 |
| API gravity at 60 F | | 58.7 | 58.7 |
| Density of liquid at 60 F, lbs/gal | | 6.19 | 6.19 |
| Vapor pressure at 100 F, psia | | | |
| Refractive index, 20/D | 1.41725* | 1.417 | 1.419 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | 149 | 149 |

* Literature values.

Table 2.27: n-Dodecane (4)

| FORMULA | CH ₃ -(CH ₂) ₁₀ -CH ₃ | | |
|---------------------------------------|--------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight per cent | | | |
| Normal Nonane | | | |
| Normal Decane | | | |
| Normal Undecane | 0.05 | 0.1 | 0.3 |
| Normal Dodecane | 99.95 | 99.9 | 99.7 |
| Normal Tridecane | | | trace |
| Isoparaffins | | | |
| Purity by freezing point, mol % | 99.70 | 99.3 99.0 min | 95.5 95.0 min |
| Freezing point, F | 14.74* | | |
| Boiling point, F | 421.30* | | |
| Distillation range, F | | | |
| Initial boiling point | | 419 | 418 |
| Dry Point | | 424 | 424 |
| Specific gravity of liquid at 60/60 F | 0.7528* | 0.753 | 0.753 |
| at 20/4 C | 0.74869* | 0.749 | |
| API gravity at 60 F | | 56.4 | 56.4 |
| Density of liquid at 60 F, lbs/gal | | 6.27 | 6.26 |
| Vapor pressure at 100 F, psia | | | |
| Refractive index, 20/D | 1.42160* | 1.422 | 1.422 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | 160 | 160 |

* Literature values.

Table 2.28: n-Tridecane (4)

| FORMULA | CH ₃ -(CH ₂) ₁₁ -CH ₃ | | |
|----------------------------------------------------|--------------------------------------------------------------------|------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Normal Tridecane | 99.9 | 99.8 | 99.2 |
| Normal Tetradecane | | | |
| Normal Pentadecane | | | |
| Normal Hexadecane | | | |
| Normal Heptadecane | | | |
| Isoparaffins | 0.1 | 0.2 | 0.8 |
| Purity by freezing point, mol % | 99.80 | 99.49 | 99.0 min |
| Freezing point, F | 22.29* | | |
| Boiling point, F | 455.78* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 452 |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | 458 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.7601* | 0.760 | 0.762 |
| | 0.75622* | 0.756 | 0.758 |
| API gravity at 80 F | | | |
| API gravity at 60 F | | 54.7 | 54.2 |
| Density of liquid at 60 F, lbs/gal | | 6.33 | 6.34 |
| Refractive index, 20/D | 1.42560* | 1.426 | 1.427 |
| Color, Gardner | | | |
| Acidity, distillation residue | | neutral | neutral |
| Sulfur content, weight percent | | 0.005 | 0.005 |
| Bromine number | | | |
| Kinematic viscosity, cs at 77 F | | | 2.25 |
| Flash point, approximate, F | | 175 (D-56) | 175 (D-56) |

*Literature values

Table 2.29: n-Tetradecane (4)

| FORMULA | CH ₃ -(CH ₂) ₁₂ -CH ₃ | |
|----------------------------------------------------|--------------------------------------------------------------------|-----------------|
| | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| Normal Tridecane | | |
| Normal Tetradecane | 99.6 | 99 |
| Normal Pentadecane | | |
| Normal Hexadecane | | |
| Normal Heptadecane | | |
| Isoparaffins | 0.4 | 1 |
| Purity by freezing point, mol % | 99.14 | 95.8 |
| Freezing point, F | 42.55* | 95.0 min |
| Boiling point, F | 488.33* | |
| Distillation range, F | | |
| Initial boiling point | | 485 |
| 10% Condensed | | |
| 50% Condensed | | |
| 90% Condensed | | |
| Dry point | | 492 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.7667* | 0.769 |
| | 0.76276* | 0.765 |
| API gravity at 80 F | | |
| API gravity at 60 F | | 52.5 |
| Density of liquid at 60 F, lbs/gal | | 6.40 |
| Refractive index, 20/D | 1.42892* | 1.430 |
| Color, Gardner | 1 | 1 |
| Acidity, distillation residue | | |
| Sulfur content, weight percent | | |
| Bromine number | | |
| Kinematic viscosity, cs at 77 F | | |
| Flash point, approximate, F | 250** | 250** |

*Literature values

Table 2.30: n-Pentadecane (4)

| FORMULA | CH ₃ -(CH ₂) ₁₃ -CH ₃ | |
|----------------------------------------------------|--------------------------------------------------------------------|-----------------|
| | RESEARCH GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| Normal Tridecane | | |
| Normal Tetradecane | | |
| Normal Pentadecane | | 99.7 |
| Normal Hexadecane | | |
| Normal Heptadecane | | |
| Isoparaffins | | 0.3 |
| Purity by freezing point, mol % | | 96.80 |
| Freezing point, F | | 95.0 min |
| Boiling point, F | | 48.74 |
| Distillation range, F | | |
| Initial boiling point | | 502 |
| 10% Condensed | | 512 |
| 50% Condensed | | 514 |
| 90% Condensed | | 516 |
| Dry point | | |
| Specific gravity of liquid at 60/60 F at 20/4 C | | 0.7721* |
| | | 0.76830* |
| API gravity at 80 F | | |
| API gravity at 60 F | | 51.77* |
| Density of liquid at 60 F, lbs/gal | | 6.43* |
| Refractive index, 20/D | | 1.4332 |
| Color, Gardner | | < 1 |
| Acidity, distillation residue | | |
| Sulfur content, weight percent | | |
| Bromine number | | 0.10 |
| Kinematic viscosity, cs at 77 F | | |
| Flash point, approximate, F | | 270 |

*Literature values

Table 2.31: n-Hexadecane (4)

| FORMULA | $\text{CH}_3-(\text{CH}_2)_{14}-\text{CH}_3$ |
|----------------------------------------------------|----------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Normal Tridecane | |
| Normal Tetradecane | |
| Normal Pentadecane | 0.2 |
| Normal Hexadecane | 99.6 |
| Normal Heptadecane | |
| Isoparaffins | 0.2 |
| Purity by freezing point, mol % | 96.35 95.0 min |
| Freezing point, F | 63.79 |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 521 |
| 10% Condensed | 531 |
| 50% Condensed | 531 |
| 90% Condensed | 533 |
| Dry point | 540 |
| Specific gravity of liquid at 60/60 F at 20/4 C | |
| API gravity at 80 F | 51.8 |
| API gravity at 60 F | 49.9† |
| Density of liquid at 60 F, lbs/gal | 6.49 |
| Refractive index, 20/D | 1.4352 |
| Color, Gardner | < 1 |
| Acidity, distillation residue | |
| Sulfur content, weight percent | |
| Bromine number | 0.21 |
| Kinematic viscosity, cs at 77 F | |
| Flash point, approximate, F | 275 |

*Literature values

Table 2.32: n-Heptadecane (4)

| FORMULA | $\text{CH}_3-(\text{CH}_2)_{16}-\text{CH}_3$ |
|----------------------------------------------------|----------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Normal Tridecane | |
| Normal Tetradecane | |
| Normal Pentadecane | |
| Normal Hexadecane | 0.3 |
| Normal Heptadecane | 99.4 |
| Isoparaffins | 0.3 |
| Purity by freezing point, mol % | 96.60 95.0 min |
| Freezing point, F | 70.47 |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 5 mm Hg |
| 10% Condensed | 289 |
| 50% Condensed | 291 |
| 90% Condensed | 292 |
| Dry point | 292 |
| Specific gravity of liquid at 60/60 F at 20/4 C | |
| API gravity at 80 F | 50.8 |
| API gravity at 60 F | 48.9† |
| Density of liquid at 60 F, lbs/gal | 6.53 |
| Refractive index, 20/D | |
| Color, Gardner | < 1 |
| Acidity, distillation residue | |
| Sulfur content, weight percent | |
| Bromine number | 0.43 |
| Kinematic viscosity, cs at 77 F | |
| Flash point, approximate, F | 300 |

*Literature values

Table 2.33: n-Octadecane (4)

| FORMULA | $\text{CH}_3-(\text{CH}_2)_{16}-\text{CH}_3$ |
|------------------------------------|----------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Normal Hexadecane | 0.1 |
| Normal Heptadecane | 0.3 |
| Normal Octadecane | 99.2 |
| Normal Nonadecane | |
| Normal Eicosane | |
| Isoparaffins | 0.4 |
| Purity by freezing point, mol % | 95.95 95.0 min |
| Freezing point, F | 81.82 |
| Distillation range, F | 5 mm Hg |
| Initial boiling point | 302 |
| 10% Condensed | 310 |
| 50% Condensed | 312 |
| 90% Condensed | 312 |
| 95% Condensed | 313 |
| API gravity at 100 F | 51.8 |
| API gravity at 60 F | 48.0† |
| Density of liquid at 60 F, lbs/gal | 6.56 |
| Color, Gardner | 1 |
| Bromine number | 0.48 |
| Flash point, approximate, F | 330 |

†API gravity at 60 F is corrected from 100F.

Table 2.34: n-Nonadecane (4)

| FORMULA | $\text{CH}_3-(\text{CH}_2)_{17}-\text{CH}_3$ |
|------------------------------------|----------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Normal Hexadecane | |
| Normal Heptadecane | |
| Normal Octadecane | 0.5 |
| Normal Nonadecane | 99.3 |
| Normal Eicosane | |
| Isoparaffins | 0.2 |
| Purity by freezing point, mol % | 95.37 95.0 min |
| Freezing point, F | 87.98 |
| Distillation range, F | 5 mm Hg |
| Initial boiling point | 320 |
| 10% Condensed | 333 |
| 50% Condensed | 336 |
| 90% Condensed | 336 |
| 95% Condensed | 336 |
| API gravity at 100 F | 51.0 |
| API gravity at 60 F | 47.3† |
| Density of liquid at 60 F, lbs/gal | 6.59 |
| Color, Gardner | 1 |
| Bromine number | 0.53 |
| Flash point, approximate, F | 335 |

†API gravity at 60 F is corrected from 100F.

Table 2.35: n-Eicosane (4)

| FORMULA | $\text{CH}_3-(\text{CH}_2)_{18}-\text{CH}_3$ | | |
|---------------------------------|----------------------------------------------|----------|--|
| PROPERTIES | 90% GRADE | | |
| Composition, weight percent | | | |
| Normal Hexadecane | | | |
| Normal Heptadecane | | | |
| Normal Octadecane | | | |
| Normal Nonadecane | 1.25 | | |
| Normal Eicosane | 98.75 | | |
| Isoparaffins | | | |
| Purity by freezing point, mol % | 91.83 | 90.0 min | |
| Freezing point, F | 95.83 | | |

| PROPERTIES | 90% GRADE | |
|------------------------------------|-----------|--|
| Distillation range, F | 5 mm Hg | |
| Initial boiling point | 340 | |
| 10% Condensed | 352 | |
| 50% Condensed | 354 | |
| 90% Condensed | 355 | |
| 95% Condensed | 356 | |
| API gravity at 100 F | 49.7 | |
| API gravity at 60 F | 46.1† | |
| Density of liquid at 60 F, lbs/gal | 6.63 | |
| Color, Gradner | 1 | |
| Bromine number | 0.74 | |
| Flash point, approximate, F | 360 | |

†API gravity at 60 F is corrected from 100F.

CYCLOPARAFFINS


Table 2.36: Cyclopentane (4)

| FORMULA | $\begin{array}{c} \text{CH}_2-\text{CH}_2 \\ \quad \quad \quad \backslash \\ \text{CH}_2-\text{CH}_2 \quad \quad \text{CH}_2 \end{array}$ | | | |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------|-----------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE | 90% GRADE |
| Composition, weight percent | | | | |
| Normal Pentane | | 0.2 | 2.0 | |
| Cyclopentane | 99.97 | 99.5 | 97.4 | 93 90 min |
| 2,2-Dimethylbutane | 0.03 | 0.1 | 0.1 | ** |
| Normal Hexane | | | 0.2 | |
| Methylcyclopentane | | 0.2 | 0.3 | |
| Purity by freezing point, mol % | 99.97 | 99.5 | 99.0 min | |
| Freezing point, F | -136.96* | | | |
| Boiling point, F | 120.67* | | | |
| Distillation range, F | | | | |
| Initial boiling point | | | 120.6 | 120.4 |
| 10% Condensed | | | | 120.9 |
| 50% Condensed | | | | 120.9 |
| 90% Condensed | | | | 121.1 |
| Dry point | | | 120.8 | 121.5 |
| Specific gravity of liquid at 60/60 F | 0.7505* | 0.750 | 0.749 | 0.744 |
| at 20/4 C | 0.74538* | 0.745 | 0.745 | |
| API gravity at 60 F | | 57.2 | 57.2 | 58.8 |
| Density of liquid at 60 F, lbs/gal | | 6.24 | 6.24 | 6.19 |
| Vapor pressure at 70 F, psia | 5.25* | 5.3 | 5.3 | |
| 100 F, psia | 9.91* | 9.9 | 9.9 | 10.0 |
| 130 F, psia | 17.37* | 17.4 | 17.4 | |
| Refractive index, 20/D | 1.40645* | 1.406 | 1.405 | 1.404 |
| Color, Saybolt | +30 | +30 | +30 | |
| Acidity, distillation residue | | neutral | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 | 0.0005 |
| Sulfur content, weight percent | | | | 0.006 |
| Kauri Butanol value | | | | 53.4 |
| Aniline point, F | | | | 70.5 |
| Copper corrosion | | | | 1 |
| Doctor test | | negative | negative | negative |
| Flash point, approximate, F | | -35 | -35 | -35 |

* Literature values.


** Major impurities are 2,2-Dimethylbutane and 2,3-Dimethylbutane.

Table 2.37: Methylcyclopentane (4)

| FORMULA |  | | |
|---------------------------------------|-----------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Normal Hexane | 0.06 | 0.4 | 2.0 |
| Methylcyclopentane | 99.94 | 99.5 | 96.5 95.0 min |
| 2,4-Dimethylpentane | | 0.1 | |
| Cyclohexane | | | 1.5 |
| Isoheptanes | | | |
| 3,3-Dimethylpentane | | | |
| Benzene & Toluene, ppm | | | |
| 1,1-Dimethylcyclopentane | | | |
| 1,2 & 1,3-Dimethylcyclopentane | | | |
| Purity by freezing point, mol % | 99.94 | 99.3 99.0 min | |
| Freezing point, F | -224.42* | | |
| Boiling point, F | 161.26* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 161 |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | 162 |
| Specific gravity of liquid at 60/60 F | 0.7535* | 0.754 | 0.754 |
| at 20/4 C | 0.74864* | 0.749 | 0.749 |
| API gravity at 60 F | | 56.2 | 56.2 |
| Density of liquid at 60 F, lbs/gal | | 6.28 | 6.28 |
| Vapor pressure at 70 F, psia | 2.24* | 2.2 | 2.3 |
| 100 F, psia | 4.50* | 4.5 | 4.5 |
| 130 F, psia | 8.33* | 8.3 | 8.3 |
| Refractive index, 20/D | 1.40970* | 1.410 | 1.410 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight percent | | 0.005 | 0.005 |
| Aniline point, F | | | |
| Kauri Butanol value | | | |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Kinematic viscosity, cs at 32 F | | - | |
| Flash point, approximate, F | | -17 | -17 |

*Literature values.

Table 2.38: Cyclohexane (4)

| FORMULA |  | | |
|---------------------------------|-------------------------------------------------------------------------------------|---------------|---------------|
| PROPERTIES | RESEARCH GRADE | 99.5% GRADE | 98.0% GRADE |
| Composition, weight percent | | | |
| Normal Hexane | | | |
| Methylcyclopentane | | | 0.5 |
| 2,4-Dimethylpentane | 0.01 | 0.1 | 0.1 |
| Cyclohexane | 99.98 | 99.8 99.5 min | 98.8 98.0 min |
| Isoheptanes | | 0.1 | 0.4 |
| 3,3-Dimethylpentane | 0.01 | | 0.2 |
| Benzene & Toluene, ppm | | 193 500 max | 200 500 max |
| 1,1-Dimethylcyclopentane | | | |
| 1,2 & 1,3-Dimethylcyclopentane | | | |
| Purity by freezing point, mol % | 99.98 | | 98.8 |
| Freezing point, F | 43.80* | | |

(continued)

Table 2.38: (continued)

| PROPERTIES | RESEARCH GRADE | 99.5% GRADE | 98.0% GRADE |
|---------------------------------------|----------------|-------------------|-------------------|
| Boiling point, F | 177.33* | | |
| Distillation range, F | | | |
| Initial boiling point | | 177.3 175.1 min | 177.3 175.1 min |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | 177.8 179.6 max | 177.8 179.6 max |
| Specific gravity of liquid at 60/60 F | 0.7834* | 0.783 | 0.781 |
| at 20/4 C | 0.77855* | 0.779 | 0.778 |
| API gravity at 60 F | 49.1* | 49.3 | 49.6 |
| Density of liquid at 60 F, lbs/gal | 6.53* | 6.52 | 6.51 |
| Vapor pressure at 70 F, psia | | | |
| 100 F, psia | 3.26* | 3.3 3.5 max | 3.3 3.5 max |
| 130 F, psia | | | |
| Refractive index, 20/D | 1.42623* | 1.426 | 1.424 |
| Color, Saybolt | +30 | +30 +30 min | +30 +30 min |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0007 0.0010 max | 0.0007 0.0010 max |
| Sulfur content, weight percent | | 1 ppm 5 ppm max | 1 ppm 5 ppm max |
| Aniline point, F | | | |
| Kauri Butanol value | | 56 | 55.1 |
| Copper corrosion | | 1 1 max | 1 1 max |
| Doctor test | | neg. neg. | neg. neg. |
| Kinematic viscosity, cs at 32 F | | | 0.94 |
| Flash point, approximate, F | | 10 | -1 |

*Literature values.


Table 2.39: 1,1-Dimethylcyclopentane (4)

| FORMULA | $ \begin{array}{c} \text{CH}_2-\text{CH}_2 \\ \quad \quad \quad \diagdown \\ \text{CH}_2-\text{CH}_2 \quad \quad \text{C}-(\text{CH}_3)_2 \end{array} $ |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROPERTIES | 90% GRADE |
| Composition, weight percent | |
| Normal Hexane | |
| Methylcyclopentane | |
| 2,4-Dimethylpentane | |
| Cyclohexane | |
| Isoheptanes | |
| 3,3-Dimethylpentane | |
| Benzene & Toluene, ppm | |
| 1,1-Dimethylcyclopentane | 92* |
| 1,2 & 1,3-Dimethylcyclopentane | |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 189 |
| 10% Condensed | 190 |
| 50% Condensed | 190 |
| 90% Condensed | 190 |
| Dry point | 190 |

| PROPERTIES | 90% GRADE |
|---------------------------------------|-----------|
| Specific gravity of liquid at 60/60 F | 0.754 |
| at 20/4 C | 0.749 |
| API gravity at 60 F | |
| Density of liquid at 60 F, lbs/gal | |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | |
| 130 F, psia | |
| Refractive index, 20/D | |
| Color, Saybolt | |
| Acidity, distillation residue | |
| Nonvolatile matter, grams/100 ml | |
| Sulfur content, weight percent | |
| Aniline point, F | 117 |
| Kauri Butanol value | 42.9 |
| Copper corrosion | |
| Doctor test | |
| Kinematic viscosity, cs at 32 F | |
| Flash point, approximate, F | < 70 |

*Major impurities are: Cyclohexane, 3,3-Dimethylpentane and 2-Methylhexane.


Table 2.40: 1,2- and 1,3-Dimethylcyclopentane (4)

| FORMULA |  |
|---------------------------------|-----------------------------------------------------------------------------------|
| PROPERTIES | 90% GRADE |
| Composition, weight percent | |
| Normal Hexane | |
| Methylcyclopentane | |
| 2,4-Dimethylpentane | |
| Cyclohexane | |
| Isoheptanes | |
| 3,3-Dimethylpentane | |
| Benzene & Toluene, ppm | |
| 1,1-Dimethylcyclopentane | |
| 1,2 & 1,3-Dimethylcyclopentane | 92† |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 196 |
| 10% Condensed | 197 |
| 50% Condensed | 197 |
| 90% Condensed | 197 |
| Dry point | 197 |

| PROPERTIES | 90% GRADE |
|---------------------------------------|-----------|
| Specific gravity of liquid at 60/60 F | 0.748 |
| at 20/4 C | 0.744 |
| API gravity at 60 F | |
| Density of liquid at 60 F, lbs/gal | |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | |
| 130 F, psia | |
| Refractive index, 20/D | |
| Color, Saybolt | |
| Acidity, distillation residue | |
| Nonvolatile matter, grams/100 ml | |
| Sulfur content, weight percent | |
| Aniline point, F | 120 |
| Kauri Butanol value | 40.5 |
| Copper corrosion | |
| Doctor test | |
| Kinematic viscosity, cs at 32 F | |
| Flash point, approximate, F | < 70 |

†Major impurity is 3-Methylhexane.

Table 2.41: Methylcyclohexane (4)

| FORMULA |  | | |
|---------------------------------------|------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 1,2-Dimethylcyclohexane | 0.08 | 0.4 | 1.1 |
| Normal Heptane | | trace | 0.4 |
| Methylcyclohexane | 99.90 | 99.4 | 97.9 95.0 min |
| Ethylcyclohexane | | trace | 0.1 |
| Toluene | 0.02 | 0.2 | 0.5 |
| trans-1,4-Dimethylcyclohexane | | | |
| cis-1,4-Dimethylcyclohexane | | | |
| Other Dimethylcyclohexanes | | | |
| trans-1,2-Dimethylcyclohexane | | | |
| cis-1,2-Dimethylcyclohexane | | | |
| ortho-Xylene | | | |
| Unidentified Impurities | | | |
| Purity by freezing point, mol % | 99.86 | 99.3 | 99.0 min |
| Freezing point, F | -195.87* | -196.20 | |
| Boiling point, F | 213.68* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 211 |
| 50% Condensed | | | |
| Dry point | | | 213 |
| Specific gravity of liquid at 60/60 F | 0.7740* | 0.774 | 0.774 |
| at 20/4 C | 0.76939* | 0.769 | 0.769 |
| API gravity at 60 F | | 51.3 | 51.3 |
| Density of liquid at 60 F, lbs/gal | | 6.44 | 6.44 |
| Vapor pressure at 70 F, psia | | | |
| 100 F, psia | 1.61* | 1.6 | 1.6 |
| Refractive index, 20/D | 1.42312* | 1.423 | 1.423 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight percent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | 22 | 22 |

*Literature values.

Table 2.42: *trans*-1,4-Dimethylcyclohexane (4)



| FORMULA |  |
|---------------------------------------|-----------------------------------------------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| 1,2-Dimethylcyclopentane | |
| Normal Heptane | |
| Methylcyclohexane | |
| Ethylcyclopentane | |
| Toluene | |
| <i>trans</i> -1,4-Dimethylcyclohexane | 99.6 |
| <i>cis</i> -1,4-Dimethylcyclohexane | |
| Other Dimethylcyclohexanes | |
| <i>trans</i> -1,2-Dimethylcyclohexane | |
| <i>cis</i> -1,2-Dimethylcyclohexane | |
| ortho-Xylene | |
| Unidentified Impurities | 0.4 |
| Purity by freezing point, mol % | 95.03 95.0 min |
| Freezing point, F | -37.97 |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 245 |
| 50% Condensed | |
| Dry point | 248 |
| Specific gravity of liquid at 60/60 F | 0.7704 |
| at 20/4 C | 0.7661 |
| API gravity at 60 F | 52.2 |
| Density of liquid at 60 F, lbs/gal | 6.41 |
| Vapor pressure at 70 F, psia | 0.4 |
| 100 F, psia | 2.0 |
| Refractive index, 20/D | 1.4229 |
| Color, Saybolt | +28 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Sulfur content, weight percent | |
| Copper corrosion | |
| Doctor test | negative |
| Flash point, approximate, F | 40 (D 56) |

Table 2.43: *cis*-1,4-Dimethylcyclohexane (4)

| FORMULA |  |
|---------------------------------------|-------------------------------------------------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| 1,2-Dimethylcyclopentane | |
| Normal Heptane | |
| Methylcyclohexane | |
| Ethylcyclopentane | |
| Toluene | |
| <i>trans</i> -1,4-Dimethylcyclohexane | 0.11 |
| <i>cis</i> -1,4-Dimethylcyclohexane | 99.89 |
| Other Dimethylcyclohexanes | |
| <i>trans</i> -1,2-Dimethylcyclohexane | |
| <i>cis</i> -1,2-Dimethylcyclohexane | |
| ortho-Xylene | |
| Unidentified Impurities | |
| Purity by freezing point, mol % | 97.4 95.0 min |
| Freezing point, F | -125.38* |
| Boiling point, F | 255.78* |
| Distillation range, F | |
| Initial boiling point | 255 |
| 50% Condensed | |
| Dry point | 256 |
| Specific gravity of liquid at 60/60 F | 0.7872 |
| at 20/4 C | 0.7825 |
| API gravity at 60 F | 48.2 |
| Density of liquid at 60 F, lbs/gal | 6.56 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | 0.7 |
| Refractive index, 20/D | 1.4297 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Sulfur content, weight percent | |
| Copper corrosion | |
| Doctor test | |
| Flash point, approximate, F | 60 |


*Literature values.

Table 2.44: Mixed 1,4-Dimethylcyclohexanes (4)

| FORMULA | C_8H_{16} |
|---------------------------------------|-----------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| 1,2-Dimethylcyclopentane | |
| Normal Heptane | |
| Methylcyclohexane | |
| Ethylcyclopentane | |
| Toluene | |
| <i>trans</i> -1,4-Dimethylcyclohexane | 44.0 |
| <i>cis</i> -1,4-Dimethylcyclohexane | 54.9 |
| Other Dimethylcyclohexanes | 1.1 |
| <i>trans</i> -1,2-Dimethylcyclohexane | |
| <i>cis</i> -1,2-Dimethylcyclohexane | |
| ortho-Xylene | |
| Unidentified Impurities | |
| | 95.0 min |


| PROPERTIES | TECHNICAL GRADE |
|---------------------------------------|-----------------|
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 250 |
| 50% Condensed | 252 |
| Dry point | 253 |
| Specific gravity of liquid at 60/60 F | 0.7784 |
| at 20/4 C | 0.7739 |
| API gravity at 60 F | 50.3 |
| Density of liquid at 60 F, lbs/gal | 6.48 |
| Vapor pressure at 70 F, psia | 0.4 |
| 100 F, psia | 2.0 |
| Refractive index, 20/D | 1.4257 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Sulfur content, weight percent | |
| Copper corrosion | |
| Doctor test | negative |
| Flash point, approximate, F | 45 (D 56) |

Table 2.45: trans-1,2-Dimethylcyclohexane (4)

| FORMULA |  | | |
|----------------------------------------------------|-----------------------------------------------------------------------------------|----------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 1,2-Dimethylcyclopentane | | | |
| Normal Heptane | | | |
| Methylcyclohexane | | | 0.7 |
| Ethylcyclopentane | | | |
| Toluene | | | |
| trans-1,4-Dimethylcyclohexane | | | |
| cis-1,4-Dimethylcyclohexane | | | |
| Other Dimethylcyclohexanes | 0.02 | 0.2 | 0.2 |
| trans-1,2-Dimethylcyclohexane | 99.90 | 99.6 | 96.9 95.0 min |
| cis-1,2-Dimethylcyclohexane | 0.08 | 0.2 | 2.0 |
| ortho-Xylene | | | 0.2 |
| Unidentified Impurities | | | |
| Purity by freezing point, mol % | 99.73 | 99.3 | 99.0 min |
| Freezing point, F | -126.75* | | |
| Boiling point, F | 254.15* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 252 |
| 50% Condensed | | | |
| Dry point | | | 253 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.7803* 0.77601* | 0.780 0.776 | 0.780 0.776 |
| API gravity at 60 F | | 49.9 | 49.9 |
| Density of liquid at 60 F, lbs/gal | | 6.49 | 6.49 |
| Vapor pressure at 70 F, psia 100 F, psia | 0.71* 0.71* | 0.7 0.7 | 0.7 0.7 |
| Refractive index, 20/D | 1.42695* | 1.427 | 1.427 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight percent | | 0.005 | 0.005 |
| Copper corrosion | | 1 | 1 |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | 51 (D 56) | 51 (D 56) |

* Literature values.

Table 2.46: cis-1,2-Dimethylcyclohexane (4)

| FORMULA |  | |
|---------------------------------|-------------------------------------------------------------------------------------|---------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE |
| Composition, weight percent | | |
| Methylcyclohexane | | |
| trans-1,2-Dimethylcyclohexane | 0.03 | 0.1 |
| cis-1,2-Dimethylcyclohexane | 99.96 | 99.7 |
| Ethylcyclohexane | | |
| Ethylbenzene | | |
| Xylenes | 0.01 | 0.2 |
| Isopropylbenzene | | |
| Isopropylcyclohexane | | |
| Unidentified | | |
| Purity by freezing point, mol % | 99.91 | 99.5 99.0 min |
| Freezing point, F | -58.04* | |
| Boiling point, F | 265.51* | |
| Distillation range, F | | |
| Initial boiling point | | |

(continued)

Table 2.46: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE |
|---------------------------------------|----------------|------------|
| Dry point | | |
| Specific gravity of liquid at 60/60 F | 0.8006* | 0.801 |
| at 20/4 C | 0.79627* | 0.796 |
| API gravity at 60 F | | 45.2 |
| Density of liquid at 60 F, lbs/gal | | 6.67 |
| Vapor pressure at 70 F, psia | 0.23* | 0.2 |
| 100 F, psia | 0.54* | 0.5 |
| Refractive index, 20/D | 1.43596* | 1.436 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 |
| Sulfur content, weight percent | | 0.005 |
| Copper corrosion | | 1 |
| Doctor test | | negative |
| Flash point, approximate, F | | 60 (D 56) |

*Literature values.


Table 2.47: Mixed 1,2-Dimethylcyclohexane (4)

| FORMULA | C_8H_{16} |
|---------------------------------|---------------|
| PROPERTIES | PURE GRADE |
| Composition, weight percent | |
| Methylcyclohexane | trace |
| trans-1,2-Dimethylcyclohexane | 34 |
| cis-1,2-Dimethylcyclohexane | 66 } 99.0 min |
| Ethylcyclohexane | |
| Ethylbenzene | |
| Xylenes | trace |
| Isopropylbenzene | |
| Isopropylcyclohexane | |
| Unidentified | |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | 260 |

| PROPERTIES | PURE GRADE |
|---------------------------------------|------------|
| Distillation range, F | |
| Initial boiling point | |
| Dry point | |
| Specific gravity of liquid at 60/60 F | 0.792 |
| at 20/4 C | 0.789 |
| API gravity at 60 F | 47.2 |
| Density of liquid at 60 F, lbs/gal | 6.59 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | 0.6 |
| Refractive index, 20/D | 1.432 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Sulfur content, weight percent | 0.005 |
| Copper corrosion | 1 |
| Doctor test | negative |
| Flash point, approximate, F | 55 (D 56) |

*Literature values.

Table 2.48: Ethylcyclohexane (4)

| FORMULA |  | | |
|-------------------------------|-------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Methylcyclohexane | | | |
| trans-1,2-Dimethylcyclohexane | | | 2.0 |
| cis-1,2-Dimethylcyclohexane | | | |
| Ethylcyclohexane | 99.98 | 99.5 | 96.9 |
| Ethylbenzene | 0.02 | 0.4 | 0.8 |
| Xylenes | | | |
| Isopropylbenzene | | | |
| Isopropylcyclohexane | | | |
| Unidentified | trace | 0.1 | 0.3 |


(continued)

Table 2.48: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|---------------------------------------|----------------|----------------|-----------------|
| Purity by freezing point, mol % | 99.66 | 99.19 99.0 min | 96.06 95.0 min |
| Freezing point, F | -188.38* | | |
| Boiling point, F | 269.21* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 266 |
| Dry point | | | 269 |
| Specific gravity of liquid at 60/60 F | 0.7922* | 0.793 | 0.793 |
| at 20/4 C | 0.78792* | 0.788 | 0.788 |
| API gravity at 60 F | | 46.9 | 46.9 |
| Density of liquid at 60 F, lbs/gal | | 6.60 | 6.60 |
| Vapor pressure at 70 F, psia | | | |
| 100 F, psia | 0.48* | 0.5 | 0.5 |
| Refractive index, 20/D | 1.43304* | 1.433 | 1.433 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight percent | | | |
| Copper corrosion | | | |
| Doctor test | | | |
| Flash point, approximate, F | 66 | 66 | 66 |

*Literature values.

Table 2.49: Isopropylcyclohexane (4)

| FORMULA |  | | |
|---------------------------------------|------------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Methylcyclohexane | | | |
| trans-1,2-Dimethylcyclohexane | | | |
| cis-1,2-Dimethylcyclohexane | | | |
| Ethylcyclohexane | | | |
| Ethylbenzene | | | |
| Xylenes | | 0.02 | |
| Isopropylbenzene | 0.03 | 0.02 | 0.79 |
| Isopropylcyclohexane | 99.97 | 99.90 | 99.05 |
| Unidentified | | 0.06 | 0.16 |
| Purity by freezing point, mol % | 99.67 | 99.4 99.0 min | 95.2 95.0 min |
| Freezing point, F | -128.9* | | |
| Boiling point, F | 310.57* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 307 |
| Dry point | | | 310 |
| Specific gravity of liquid at 60/60 F | 0.8064* | 0.807 | 0.807 |
| at 20/4 C | 0.8024* | 0.803 | 0.803 |
| API gravity at 60 F | | 43.8 | 43.8 |
| Density of liquid at 60 F, lbs/gal | | 6.72 | 6.72 |
| Vapor pressure at 70 F, psia | | | |
| 100 F, psia | | | |
| Refractive index, 20/D | 1.44087* | 1.441 | 1.441 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Sulfur content, weight percent | | | |
| Copper corrosion | | | |
| Doctor test | | | |
| Flash point, approximate, F | 96 | 96 | 96 |

*Literature values.

OLEFINS

Table 2.50: Ethylene (4)

| FORMULA | CH ₂ = CH ₂ | |
|-------------------------------------------------------------------------|-----------------------------------|----------------|
| | RESEARCH GRADE | 99.9% GRADE |
| Composition, weight percent | | |
| Propane | | |
| Propylene | | |
| Ethylene | 99.97 | 99.88 99.8 min |
| Ethene | 0.01 | 0.04 |
| Methane | 0.02 | 0.08 |
| Carbon Dioxide, ppm | | 1 15 max |
| Acetylene, ppm (liquid) | | 1 5 max |
| Carbonyl, ppm (liquid) | | |
| Carbon Monoxide, ppm | | 1 5 max |
| Oxygen, ppm | | 20 |
| Hydrogen, ppm | | 1 5 max |
| Freezing point, triple point, F | -272.47* | |
| Boiling point, F | -154.68* | |
| Specific gravity of liquid at 60/60 F at 20/4 C | | |
| API gravity at 60 F | | |
| Density of liquid at 60 F, lbs/gal | | |
| Vapor pressure at 70 F, psia | | |
| 100 F, psia | | |
| 130 F, psia | | |
| Sulfur content, ppm | | 3 10 max |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 0.9740* | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 13.4524* | |
| Critical temperature, F | 49.82* | |
| Critical pressure, psia | 742.1* | |
| Density of real gas at 60 F and 14.7 psia, lbs/cu ft | | 0.0743 |
| Flash point, approximate, F | | -213 |
| Flammability limits, volume % in air | | |
| Lower | 2.7* | |
| Higher | 34* | |
| Heating value for ideal gas at 60 F and 14.7 psia, BTU/cu ft, dry basis | 1599* | |

*Literature values.

Table 2.51: Propylene (4)

| FORMULA | CH ₂ = CH-CH ₃ | |
|-------------------------------------------------------------------------|--------------------------------------|----------------------|
| | RESEARCH GRADE | POLYMERIZATION GRADE |
| Composition, weight percent | | |
| Propane | 0.01 | 0.5 |
| Propylene | 99.99 | 99.5 99.0 min |
| Ethylene | | |
| Ethane | | trace |
| Methane | | |
| Carbon Dioxide, ppm | | |
| Acetylene, ppm (liquid) | | 10 |
| Carbonyl, ppm (liquid) | | 20 |
| Carbon Monoxide, ppm | | |
| Oxygen, ppm | | |
| Hydrogen, ppm | | |
| Freezing point, triple point, F | -301.45* | |
| Boiling point, F | -53.86* | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.5220* | 0.522 |
| | 0.5139* | 0.514 |
| API gravity at 60 F | | 139.6 |
| Density of liquid at 60 F, lbs/gal | | 4.35 |
| Vapor pressure at 70 F, psia | | 151 |
| 100 F, psia | | 242 |
| 130 F, psia | | 328 |
| Sulfur content, ppm | | 4 |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 1.4765* | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 8.8736* | |
| Critical temperature, F | 197.4* | |
| Critical pressure, psia | 667* | |
| Density of real gas at 60 F and 14.7 psia, lbs/cu ft | | 0.1127 |
| Flash point, approximate, F | | -162 |
| Flammability limits, volume % in air | | |
| Lower | 2.0* | |
| Higher | 10* | |
| Heating value for ideal gas at 60 F and 14.7 psia, BTU/cu ft, dry basis | 2334* | |

*Literature values.

Table 2.52: Isobutylene (4)

| FORMULA | CH ₃ CH ₃ -C-CH ₂ | |
|-----------------------------------------|-------------------------------------------------------|---------------|
| | RESEARCH GRADE | PURE GRADE |
| Composition, weight percent | | |
| Isobutane | 0.06 | 0.1 |
| Isobutylene | 99.81 | 99.3 99.0 min |
| Butene-1 | 0.09 | 0.4 |
| Butadiene-1,3 | | |
| Normal Butane | 0.04 | 0.2 |
| Butene-2 | trace | trace |
| Acetylene (as Methylacetylene) ppm, wt. | | |
| Water, ppm, weight | | 177 |
| Carbonyl (as Acetaldehyde) ppm, weight | | nil |
| Propadiene, ppm, weight | | |

| PROPERTIES | RESEARCH GRADE | PURE GRADE |
|--------------------------------------------------------------|----------------|------------|
| Freezing point, F | -220.63* | |
| Boiling point, F | 19.58* | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.6004* | 0.600 |
| | 0.5942* | |
| API gravity at 60 F | | 104.3 |
| Density of liquid at 60 F, lbs/gal | | 4.99 |
| Vapor pressure at 70 F, psia | | 63.4 |
| 100 F, psia | | |
| 130 F, psia | | |
| Sulfur content, ppm | | 8 |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | | 1.997 |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | | 6.561 |
| Flash point, approximate, F | | -105 |
| Flammability limits, volume % in air | | |
| Lower | | |
| Higher | | |

*Literature values.

Table 2.53: Butene-1 (4)

| FORMULA | $\text{CH}_3-\text{CH}_2-\text{CH}=\text{CH}_2$ | |
|-----------------------------------------|-------------------------------------------------|----------------------|
| PROPERTIES | RESEARCH GRADE | POLYMERIZATION GRADE |
| Composition, weight percent | | |
| Isobutane | | 0.1 |
| Isobutylene | 0.2 | 0.3 |
| Butene-1 | 99.8 | 99.4 99.0 min |
| Butadiene-1,3 | | trace |
| Normal Butane | | 0.2 |
| Butene-2 | | trace |
| Acetylene (as Methylacetylene) ppm, wt. | | 15 25 max |
| Water, ppm, weight | | |
| Carbonyl (as Acetaldehyde) ppm, weight | | 10 20 max |
| Propadiene, ppm, weight | | 4 |

| PROPERTIES | RESEARCH GRADE | POLYMERIZATION GRADE |
|-----------------------------------------------------------------|--------------------|----------------------|
| Freezing point, F | -301.63* | |
| Boiling point, F | 20.73* | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.6013* 0.5951* | 0.601 |
| API gravity at 60 F | | 103.9 |
| Density of liquid at 60 F, lbs/gal | | 5.00 |
| Vapor pressure at 70 F, psia | | 37.5 |
| 100 F, psia | | 67.5 (105F) |
| 130 F, psia | | 99.7 |
| Sulfur content, ppm | | 1 10 max |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | | |
| Flash point, approximate, F | | -112 |
| Flammability limits, volume % in air | | |
| Lower | 1.6* | |
| Higher | 9.3* | |

* Literature values.

Table 2.54: trans-Butene-2 (4)

| FORMULA | $\begin{array}{c} \text{H} \\ \\ \text{CH}_3-\text{C}=\text{C}-\text{CH}_3 \\ \\ \text{H} \end{array}$ | | |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Butene-1 | 0.03 | | trace |
| Normal Butane | 0.07 | 0.2 | 1.3 |
| trans-Butene-2 | 99.80 | 99.6 | 97.7 95.0 min |
| cis-Butene-2 | 0.10 | 0.2 | 1.0 |
| Purity by freezing point, mol % | 99.76 | 99.2 99.0 min | |
| Freezing point, F | -157.99* | | |
| Boiling point, F | 33.58* | | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.6100* 0.6042* | 0.610 | 0.609 |
| API gravity at 60 F | | 100.5 | 100.8 |
| Density of liquid at 60 F, lbs/gal | | 5.07 | 5.07 |
| Vapor pressure at 70 F, psia | 29.94* | 29.9 | 30 |
| 105 F, psia | | 52.2 | 52 |
| 130 F, psia | | 76.4 | 76 |
| Flash point, approximate, F | | -100 | -100 |

* Literature values.

Table 2.55: cis-Butene-2 (4)

| FORMULA | $\begin{array}{c} \text{H} \quad \text{H} \\ \quad \\ \text{CH}_3-\text{C}=\text{C}-\text{CH}_3 \end{array}$ | | |
|-----------------------------|------------------------------------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Butene-1 | | | |
| Normal Butane | | | |
| trans-Butene-2 | 0.03 | 0.5 | 4.3 |
| cis-Butene-2 | 99.97 | 99.5 | 95.7 95.0 min |

(continued)

Table 2.55: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|----------------------------------------------------|--------------------|---------------|-----------------|
| Purity by freezing point, mol % | 99.92 | 99.4 99.0 min | |
| Freezing point, F | -218.04* | | |
| Boiling point, F | 38.70* | | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.6271* 0.6213* | 0.627 | 0.632 |
| API gravity at 60 F | | 94.2 | 92.4 |
| Density of liquid at 60 F, lbs/gal | | 5.22 | 5.26 |
| Vapor pressure at 70 F, psia | 27.29* | 27.3 | 27.8 |
| 105 F, psia | | 49.8 | 50.8 |
| 130 F, psia | | 73.2 | 74.8 |
| Flash point, approximate, F | | -100 | -100 |

*Literature values.

Table 2.56: Mixed 2-Butenes (4)

| FORMULA | $\text{CH}_3\text{-CH}=\text{CH-CH}_3$ | |
|----------------------------------------------------|----------------------------------------|-----------------|
| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| Butene-1 | | 0.3 |
| Normal Butane | | 2.7 |
| trans-Butene-2 | 45.0 } 99.0 min | 52.0 } 95.0 min |
| cis-Butene-2 | 55.0 | 45.0 |
| Purity by freezing point, mol % | | |
| Freezing point, F | | |
| Boiling point, F | | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.619 0.615 | 0.618 0.614 |
| API gravity at 60 F | 97.1 | 97.5 |
| Density of liquid at 60 F, lbs/gal | 5.15 | 5.14 |
| Vapor pressure at 70 F, psia | 28.0 | 28.1 |
| 105 F, psia | 51.0 | 51.2 |
| 130 F, psia | 76.5 | 76.7 |
| Flash point, approximate, F | -95 | -100 |

*Literature values.

Table 2.57: 3-Methylbutene-1 (4)

| FORMULA | $\text{CH}_2=\overset{\text{CH}_3}{\text{CH}}\text{-CH-CH}_3$ | | |
|-----------------------------|---------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 3-Methylbutene-1 | 99.97 | 99.8 | 96.3 95.0 min |
| 2-Methylbutene-1 | | 0.1 | 2.0 |
| 2-Methylbutene-2 | | | |
| Pentene-1 | | | 0.2 |
| Pentenes-2 | 0.02 | 0.1 | 1.0 |
| Isopentane | 0.01 | trace | 0.5 |
| Normal Pentane | | | |

(continued)

Table 2.57: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|---------------------------------------|----------------|------------|-----------------|
| Purity by freezing point, mol % | 99.93 | 99.4 | 99.0 min |
| Freezing point, F | -271.29* | | |
| Boiling point, F | 68.11* | | |
| Distillation range, F | | | |
| Initial boiling point | | | |
| Dry point | | | |
| Specific gravity of liquid at 60/60 F | 0.6325* | 0.633 | 0.633 |
| at 20/4 C | 0.6272* | 0.628 | 0.628 |
| API gravity at 60 F | | 91.9 | 91.9 |
| Density of liquid at 60 F, lbs/gal | | 5.27 | 5.27 |
| Vapor pressure at 70 F, psia | 15.25* | 15.2 | 15.0 |
| 100 F, psia | 26.41* | 26.4 | 26.0 |
| 130 F, psia | | | |
| Refractive index, 20/D | 1.3643* | 1.364 | 1.364 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | | |
| Nonvolatile matter, grams/100 ml | | | |
| Flash point, approximate, F | | -70 | -70 |

*Literature values.

Table 2.58: 2-Methylbutene-1 (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_2=\text{C}-\text{CH}_2-\text{CH}_3 \end{array}$ | | |
|---------------------------------------|-------------------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 3-Methylbutene-1 | | trace | 0.3 |
| 2-Methylbutene-1 | 99.99 | 99.8 | 97.3 |
| 2-Methylbutene-2 | | trace | 0.1 |
| Pentene-1 | 0.01 | 0.1 | 1.9 |
| Pentenes-2 | | trace | 0.2 |
| Isopentane | | | |
| Normal Pentane | | 0.1 | 0.2 |
| Purity by freezing point, mol % | 99.85 | 99.5 | 99.0 min |
| Freezing point, F | -215.61* | | |
| Boiling point, F | 88.09* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 87 |
| Dry point | | | 88 |
| Specific gravity of liquid at 60/60 F | 0.6557* | 0.656 | 0.656 |
| at 20/4 C | 0.6504* | 0.650 | 0.650 |
| API gravity at 60 F | | 84.2 | 84.2 |
| Density of liquid at 60 F, lbs/gal | | 5.46 | 5.46 |
| Vapor pressure at 70 F, psia | 10.21* | 10.3 | 10.3 |
| 100 F, psia | 18.40* | 18.8 | 18.8 |
| 130 F, psia | | 32.0 | 32.0 |
| Refractive index, 20/D | 1.3778* | 1.378 | 1.378 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | -55 | -55 |

*Literature values.

Table 2.59: Methylbutene-2 (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_3 - \text{C} = \text{CH} - \text{CH}_3 \end{array}$ | | | |
|---------------------------------------|-----------------------------------------------------------------------------------------------------|---------------|-----------------|------------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE | COMMERCIAL GRADE |
| Composition, weight percent | | | | |
| 3-Methylbutene-1 | | | | |
| 2-Methylbutene-1 | trace | 0.2 | 0.2 | 10.3 |
| 2-Methylbutene-2 | 99.99 | 99.5 | 97.4 95.0 min | 87.8 |
| Pentene-1 | trace | | 0.1 | |
| Pentenes-2 | 0.01 | 0.3 | 2.3 | 0.8 |
| Isopentane | | | | 1.1 |
| Normal Pentane | | | | |
| Purity by freezing point, mol % | 99.78 | 99.3 99.0 min | | |
| Freezing point, F | -208.78* | | | |
| Boiling point, F | 101.42* | | | |
| Distillation range, F | | | | |
| Initial boiling point | | | 101 | 100.7 |
| Dry point | | | 102 | 101.3 |
| Specific gravity of liquid at 60/60 F | 0.6676* | 0.668 | 0.667 | 0.668 |
| at 20/4 C | 0.6623* | 0.662 | 0.662 | 0.663 |
| API gravity at 60 F | | 80.3 | 80.6 | |
| Density of liquid at 60 F, lbs/gal | | 5.56 | 5.55 | 5.56 |
| Vapor pressure at 70 F, psia | 7.76* | 7.8 | 7.8 | |
| 100 F, psia | 14.30* | 14.3 | 14.3 | |
| 130 F, psia | 24.56* | 24.6 | 24.6 | |
| Refractive index, 20/D | 1.3874* | 1.387 | 1.387 | 1.387 |
| Color, Saybolt | +30 | +30 | +30 | |
| Acidity, distillation residue | | neutral | neutral | |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 | |
| Flash point, approximate, F | | -50 | -50 | -60 |

* Literature values.

Table 2.60: Pentene-1 (4)

| FORMULA | $\text{CH}_2 = \text{CH} - \text{CH}_2 - \text{CH}_2 - \text{CH}_3$ | | |
|---------------------------------------|---------------------------------------------------------------------|---------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Isopentane | | trace | 0.1 |
| Pentene-1 | 99.9 | 99.4 99.0 min | 97.0 95.0 min |
| 2-Methylbutene-1 | | 0.3 | 1.4 |
| Normal Pentane | | 0.1 | 0.5 |
| trans-Pentene-2 | 0.1 | 0.2 | 0.5 |
| cis-Pentene-2 | | | |
| 2-Methylbutene-2 | | trace | 0.5 |
| Purity by freezing point, mol % | | | |
| Freezing point, F | -265.40* | | |
| Boiling point, F | 85.94* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 85 |
| Dry Point | | | 87 |
| Specific gravity of liquid at 60/60 F | 0.6457* | 0.646 | 0.646 |
| at 20/4 C | 0.64050* | 0.641 | 0.641 |
| API gravity at 60 F | | 87.5 | 87.5 |
| Density of liquid at 60 F, lbs/gal | | 5.38 | 5.38 |
| Vapor pressure at 70 F, psia | 10.70* | 10.7 | 10.6 |
| 100 F, psia | 19.12* | 19.1 | 19.0 |
| 130 F, psia | | 33.0 | 32.8 |
| Refractive index, 20/D | 1.37148* | 1.372 | 1.372 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | -60 | -60 |
| Flammability limits, volume % in air | | | |
| Lower | 1.4* | | |
| Higher | 8.7* | | |

* Literature values.

Table 2.61: cis-Pentene-2 (4)

| FORMULA | $\text{CH}_3 - \overset{\text{H}}{\underset{ }{\text{C}}} = \overset{\text{H}}{\underset{ }{\text{C}}} - \text{CH}_2 - \text{CH}_3$ | |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| PROPERTIES | RESEARCH GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| Isopentane | | |
| Pentene-1 | | |
| 2-Methylbutene-1 | | |
| Normal Pentane | | |
| trans-Pentene-2 | 0.1 | 3.2 |
| cis-Pentene-2 | 99.9 | 96.8 95.0 min |
| 2-Methylbutene-2 | | |
| Purity by freezing point, mol % | 99.8 | |
| Freezing point, F | -240.50* | |
| Boiling point, F | 98.50* | |
| Distillation range, F | | |
| Initial boiling point | | |
| Dry Point | | |
| Specific gravity of liquid at 60/60 F | 0.6608* | 0.660 |
| at 20/4 C | 0.6556* | 0.655 |
| API gravity at 60 F | | 82.9 |
| Density of liquid at 60 F, lbs/gal | | 5.49 |
| Vapor pressure at 70 F, psia | 8.24* | 8.3 |
| 100 F, psia | 15.12 | 15.1 |
| 130 F, psia | 25.84* | 26.6 |
| Refractive index, 20/D | 1.3830* | 1.383 |
| Color, Saybolt | | +30 |
| Acidity, distillation residue | | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 |
| Flash point, approximate, F | | -50 |
| Flammability limits, volume % in air | | |
| Lower | | |
| Higher | | |

* Literature values.

Table 2.62: trans-Pentene-2 (4)

| FORMULA | $\text{CH}_3 - \overset{\text{H}}{\underset{ }{\text{C}}} = \overset{\text{H}}{\underset{ }{\text{C}}} - \text{CH}_2 - \text{CH}_3$ | |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|----------|
| PROPERTIES | RESEARCH GRADE | |
| Composition, weight percent | | |
| Isopentane | | |
| Pentene-1 | | |
| 2-Methylbutene-1 | | |
| Normal Pentane | | 0.02 |
| trans-Pentene-2 | | 99.63 |
| cis-Pentene-2 | | 0.35 |
| 2-Methylbutene-2 | | |
| Purity by freezing point, mol % | | 99.53 |
| Freezing point, F | | -220.44* |
| Boiling point, F | | 97.44* |
| Distillation range, F | | |
| Initial boiling point | | |
| Dry Point | | |
| Specific gravity of liquid at 60/60 F | | 0.6533* |
| at 20/4 C | | 0.6482* |
| API gravity at 60 F | | |
| Density of liquid at 60 F, lbs/gal | | 5.447* |
| Vapor pressure at 70 F, psia | | 10.2* |
| 100 F, psia | | 15.4* |
| 130 F, psia | | 26.3* |
| Refractive index, 20/D | | 1.3793* |
| Color, Saybolt | | +30 |
| Acidity, distillation residue | | |
| Nonvolatile matter, grams/100 ml | | |
| Flash point, approximate, F | | |
| Flammability limits, volume % in air | | |
| Lower | | |
| Higher | | |

* Literature values.

Table 2.63: Mixed 2-Pentenes (4)

| FORMULA | $\text{CH}_3 - \text{CH} = \text{CH} - \text{CH}_2 - \text{CH}_3$ | |
|---------------------------------|-------------------------------------------------------------------|-------------------|
| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| Isopentane | | |
| Pentene-1 | 0.1 | 0.1 |
| 2-Methylbutene-1 | 0.1 | 0.3 |
| Normal Pentane | 0.1 | 1.6 |
| trans-Pentene-2 | 46.6 | 48.8 |
| cis-Pentene-2 | 53.0 | 48.2 |
| 2-Methylbutene-2 | 0.1 | 1.0 |
| | | 99.0 min 95.0 min |
| Purity by freezing point, mol % | | |
| Freezing point, F | | |
| Boiling point, F | | |
| Distillation range, F | | |
| Initial boiling point | | 97 |
| Dry Point | | 99 |

| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
|---------------------------------------|------------|-----------------|
| Specific gravity of liquid at 60/60 F | 0.656 | 0.658 |
| at 20/4 C | 0.652 | 0.654 |
| API gravity at 60 F | 84.2 | 83.5 |
| Density of liquid at 60 F, lbs/gal | 5.46 | 5.46 |
| Vapor pressure at 70 F, psia | 8.4 | 8.3 |
| 100 F, psia | 15.4 | 15.2 |
| 130 F, psia | 27.0 | 26.7 |
| Refractive index, 20/D | 1.380 | 1.381 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 | 0.0005 |
| Flash point, approximate, F | -50 | -50 |
| Flammability limits, volume % in air | | |
| Lower | | |
| Higher | | |

Table 2.64: 3,3-Dimethylbutene-1 (4)

Neohexene

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_2 = \text{C} - \text{CH}_3 \\ \\ \text{CH}_3 \end{array}$ |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| 3,3-Dimethylbutene-1 | 98.9 |
| 2,3-Dimethylbutane | |
| 4-Methylpentene-1 | |
| 3-Methylpentene-1 | |
| 2,3-Dimethylbutene-1 | |
| 2,3-Dimethylbutene-2 | |
| cis-4-Methylpentene-2 | |
| trans-4-Methylpentene-2 | |
| 2-Methylpentene-2 | |
| Other Olefins | 1.1 |
| Purity by freezing point, mol % | |
| Freezing point, F | -184.43 |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 106 |
| 10% Condensed | 106 |
| 50% Condensed | 107 |
| 90% Condensed | 111 |
| Dry point | 114 |
| Specific gravity of liquid at 60/60 F | 0.6582 |
| at 20/4 C | 0.6533 |
| API gravity at 60 F | 83.5 |
| Density of liquid at 60 F, lbs/gal | 5.48 |
| Vapor pressure at 70 F, psia | 7.2 |
| 100 F, psia | 14.6 |
| 130 F, psia | |
| Refractive index, 20/D | 1.3766 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Doctor test | negative |
| Flash point, approximate, F | 45 |

*Literature values.

Table 2.65: Mixed 2,3-Dimethylbutenes (4)

| FORMULA | C_6H_{12} |
|---------------------------------------|---------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| 3,3-Dimethylbutene-1 | |
| 2,3-Dimethylbutane | 2.0 |
| 4-Methylpentene-1 | |
| 3-Methylpentene-1 | |
| 2,3-Dimethylbutene-1 | 32.0 |
| 2,3-Dimethylbutene-2 | 63.9 |
| cis-4-Methylpentene-2 | 95.0 min |
| trans-4-Methylpentene-2 | |
| 2-Methylpentene-2 | 2.1 |
| Other Olefins | |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 140 |
| 10% Condensed | |
| 50% Condensed | |
| 90% Condensed | |
| Dry point | 169 |
| Specific gravity of liquid at 60/60 F | 0.703 |
| at 20/4 C | |
| API gravity at 60 F | 69.8 |
| Density of liquid at 60 F, lbs/gal | 5.85 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | 5.7 |
| 130 F, psia | |
| Refractive index, 20/D | |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Doctor test | |
| Flash point, approximate, F | -35 |

*Literature values.

Table 2.66: 4-Methylpentene-1 (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_2 = \text{CH} - \text{CH}_2 - \text{CH} - \text{CH}_3 \end{array}$ | | |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 3,3-Dimethylbutene-1 | | | |
| 2,3-Dimethylbutane | | | |
| 4-Methylpentene-1 | 99.94 | 99.6 | 99.1 |
| 3-Methylpentene-1 | 0.02 | 0.1 | 0.2 |
| 2,3-Dimethylbutene-1 | | | |
| 2,3-Dimethylbutene-2 | | | |
| cis-4-Methylpentene-2 | 0.02 | 0.3 | 0.6 |
| trans-4-Methylpentene-2 | 0.02 | | 0.1 |
| 2-Methylpentene-2 | | | |
| Other Olefins | | | |
| Purity by freezing point, mol % | 99.81 | 99.3 99.0 min | 97.5 95.0 min |
| Freezing point, F | | -244.53* | |
| Boiling point, F | | 128.96* | |
| Distillation range, F | | | |
| Initial boiling point | | | 129 |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | 130 |
| Specific gravity of liquid at 60/60 F | 0.6686* | 0.669 | 0.669 |
| at 20/4 C | 0.66370* | 0.664 | 0.664 |

(continued)

Table 2.66: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|------------------------------------|----------------|------------|-----------------|
| API gravity at 60 F | | 80.0 | 80.0 |
| Density of liquid at 60 F, lbs/gal | | 5.57 | 5.57 |
| Vapor pressure at 70 F, psia | 4.48* | 4.5 | 4.5 |
| 100 F, psia | 8.50* | 8.5 | 8.5 |
| 130 F, psia | 14.97* | 15.0 | 15.0 |
| Refractive index, 20/D | 1.38267* | 1.383 | 1.383 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Doctor test | | | |
| Flash point, approximate, F | | -25 | -25 |

*Literature values.

Table 2.67: cis-4-Methylpentene-2 (4)

| FORMULA | $\begin{array}{c} \text{H} \quad \text{H} \quad \text{CH}_3 \\ \quad \quad \\ \text{CH}_3 - \text{C} = \text{C} - \text{CH} - \text{CH}_3 \end{array}$ | | |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 3,3-Dimethylbutene-1 | | | |
| 2,3-Dimethylbutane | | | |
| 4-Methylpentene-1 | 0.06 | 0.1 | 0.2 |
| 3-Methylpentene-1 | | | |
| 2,3-Dimethylbutene-1 | | | |
| 2,3-Dimethylbutene-2 | | | |
| cis-4-Methylpentene-2 | 99.87 | 99.8 | 97.1 |
| trans-4-Methylpentene-2 | 0.07 | 0.1 | 2.4 |
| 2-Methylpentene-2 | | | |
| Other Olefins | | | 0.3 |
| Purity by freezing point, mol % | 99.71 | 99.52 99.0 min | 96.2 95.0 min |
| Freezing point, F | -209.97* | | |
| Boiling point, F | 133.50* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 130 |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | 133 |
| Specific gravity of liquid at 60/60 F | 0.6741* | 0.674 | 0.674 |
| at 20/4 C | 0.66918* | 0.669 | 0.669 |
| API gravity at 60 F | | 78.4 | 78.4 |
| Density of liquid at 60 F, lbs/gal | | 5.61 | 5.61 |
| Vapor pressure at 70 F, psia | 4.01* | 4.0 | 4.0 |
| 100 F, psia | 7.73* | 7.7 | 7.7 |
| 130 F, psia | 13.80* | 13.8 | 13.8 |
| Refractive index, 20/D | 1.38793* | 1.388 | 1.388 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Doctor test | | | |
| Flash point, approximate, F | | -25 | -25 |

*Literature values.

Table 2.68: *trans*-4-Methylpentene-2 (4)

| FORMULA | $\begin{array}{c} \text{H} \quad \text{CH}_3 \\ \quad \\ \text{CH}_3-\text{C}=\text{C}-\text{CH}-\text{CH}_3 \\ \\ \text{H} \end{array}$ | | |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 4-Methylpentene-1 | | | |
| cis-4-Methylpentene-2 | trace | 0.1 | 0.6 |
| <i>trans</i> -4-Methylpentene-2 | 99.98 | 99.9 | 96.5 |
| 2-Methylpentene-1 | | | |
| 2-Methylpentene-2 | | | |
| Isoolefins | 0.02 | trace | 2.9 |
| Purity by freezing point, mol % | 99.94 | 99.2 99.0 min | 95.6 95.0 min |
| Freezing point, F | -221.46* | | |
| Boiling point, F | 137.50* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 137.1 |
| Dry point | | | 137.8 |
| Specific gravity of liquid at 60/60F | 0.6736* | 0.673 | 0.674 |
| at 20/4 C | 0.66862* | 0.669 | 0.670 |
| API gravity at 60 F | | 78.7 | 78.4 |
| Density of liquid at 60 F, lbs/gal | | 5.60 | 5.61 |
| Vapor pressure at 70 F, psia | 3.66* | 3.7 | 3.7 |
| 100 F, psia | 7.12* | 7.1 | 7.1 |
| 130 F, psia | 12.82* | 12.8 | 12.8 |
| Refractive index, 20/D | 1.38878* | 1.389 | 1.389 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | -20 | -20 |

* Literature values.

Table 2.69: Mixed 4-Methyl-2-Pentenes (4)

| FORMULA | $\text{CH}_3-\text{CH}=\text{CH}-\overset{\text{CH}_3}{\underset{ }{\text{CH}}}-\text{CH}_3$ | |
|--------------------------------------|----------------------------------------------------------------------------------------------|-----------------|
| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| 4-Methylpentene-1 | 0.1 | 2.8 |
| cis-4-Methylpentene-2 | 76.5 | 76.2 |
| <i>trans</i> -4-Methylpentene-2 | 23.4 | 20.8 |
| 2-Methylpentene-1 | | |
| 2-Methylpentene-2 | | |
| Isoolefins | | 0.2 |
| Purity by freezing point, mol % | | |
| Freezing point, F | | |
| Boiling point, F | 135.0 | |
| Distillation range, F | | |
| Initial boiling point | | 136.0 |
| Dry point | | 137.2 |
| Specific gravity of liquid at 60/60F | 0.673 | 0.673 |
| at 20/4 C | 0.669 | 0.669 |
| API gravity at 60 F | 78.8 | 78.8 |
| Density of liquid at 60 F, lbs/gal | 5.60 | 5.60 |
| Vapor pressure at 70 F, psia | 3.8 | 3.8 |
| 100 F, psia | 7.5 | 7.5 |
| 130 F, psia | 13.0 | 13.0 |
| Refractive index, 20/D | 1.388 | 1.388 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 | 0.0005 |
| Flash point, approximate, F | -20 | -20 |

Table 2.70: 2-Methylpentene-1 (4)

| FORMULA | $\text{CH}_2 = \overset{\text{CH}_3}{\underset{ }{\text{C}}}-\text{CH}_2-\text{CH}_2-\text{CH}_3$ | | |
|--------------------------------------|---------------------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 4-Methylpentene-1 | | | 0.6 |
| cis-4-Methylpentene-2 | | | 0.5 |
| trans-4-Methylpentene-2 | | 0.1 | 0.2 |
| 2-Methylpentene-1 | 99.90 | 99.8 | 95.8 95.0 min |
| 2-Methylpentene-2 | | | |
| Isoolefins | 0.10 | 0.1 | 2.9 |
| Purity by freezing point, mol % | 99.84 | 99.65 | 99.0 min |
| Freezing point, F | -212.30* | | |
| Boiling point, F | 143.80* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 142.8 |
| Dry point | | | 143.6 |
| Specific gravity of liquid at 60/60F | 0.6848* | 0.685 | 0.685 |
| at 20/4 C | 0.67987* | 0.680 | 0.680 |
| API gravity at 60 F | | 75.4 | 75.4 |
| Density of liquid at 60 F, lbs/gal | | 5.69 | 5.69 |
| Vapor pressure at 70 F, psia | 3.20* | 3.2 | 3.2 |
| 100 F, psia | 6.30* | 6.3 | 6.3 |
| 130 F, psia | 11.43* | 11.4 | 11.4 |
| Refractive index, 20/D | 1.39200* | 1.392 | 1.392 |
| Color, Saybolt | | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | -15 | -15 |

*Literature values.

Table 2.71: 2-Methylpentene-2 (4)

| FORMULA | $\text{CH}_3-\overset{\text{CH}_3}{\underset{ }{\text{C}}}-\text{CH}=\text{CH}_2-\text{CH}_3$ | |
|--------------------------------------|-----------------------------------------------------------------------------------------------|-----------------|
| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| 4-Methylpentene-1 | | |
| cis-4-Methylpentene-2 | | |
| trans-4-Methylpentene-2 | | |
| 2-Methylpentene-1 | 0.1 | 1.6 |
| 2-Methylpentene-2 | 99.8 | 96.0 95.0 min |
| Isoolefins | 0.1 | 2.4 |
| Purity by freezing point, mol % | | |
| Freezing point, F | -211.13* | |
| Boiling point, F | 153.15* | |
| Distillation range, F | | |
| Initial boiling point | | 152 |
| Dry point | | 158 |
| Specific gravity of liquid at 60/60F | 0.6913* | 0.692 |
| at 20/4 C | 0.68650* | 0.687 |
| API gravity at 60 F | | 73.1 |
| Density of liquid at 60 F, lbs/gal | | 5.76 |
| Vapor pressure at 70 F, psia | 2.57* | 2.6 |
| 100 F, psia | 5.17* | 5.1 |
| 130 F, psia | 9.58* | 9.6 |
| Refractive index, 20/D | 1.40030* | 1.400 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 | 0.0005 |
| Flash point, approximate, F | -10 | -10 |

*Literature values.

Table 2.72: Hexene-1 (4)

| FORMULA | CH ₂ =CH-CH ₂ -CH ₂ -CH ₂ -CH ₃ | | |
|---------------------------------------|----------------------------------------------------------------------------------------|------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Hexene-1 | 99.98 | 99.7 | 96.8 |
| trans-Hexene-2 | } 0.02 | } 0.2 | } 0.1 |
| cis-Hexene-2 | | | |
| Hexenes-3 | | | 0.3 |
| Normal Hexane | | 0.1 | 1.2 |
| Isoolefins | | | 1.6 |
| Heptene-1 | | | |
| trans-Heptene-3 | | | |
| cis-Heptene-3 | | | |
| trans-Heptene-2 | | | |
| cis-Heptene-2 | | | |
| Purity by freezing point, mol % | 99.97 | 99.14 | 99.0 min |
| Freezing point, F | -219.67* | | |
| Boiling point, F | 146.27* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 146.2 |
| Dry point | | | 146.3 |
| Specific gravity of liquid at 60/60 F | 0.6780* | 0.678 | 0.677 |
| at 20/4 C | 0.67317* | 0.673 | 0.674 |
| API gravity at 60 F | | 77.2 | 77.5 |
| Density of liquid at 60 F, lbs/gal | | 5.64 | 5.64 |
| Vapor pressure at 70 F, psia | 3.04* | 3.0 | 3.0 |
| 100 F, psia | 6.01* | 6.0 | 6.0 |
| 130 F, psia | 10.93* | 10.9 | 10.9 |
| Refractive index, 20/D | 1.38788* | 1.388 | 1.388 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | -15 | -15 |

* Literature values.

Table 2.73: cis-Hexene-2 (4)

| FORMULA | CH ₃ -C ^H =C ^H -CH ₂ -CH ₂ -CH ₃ | |
|---------------------------------------|----------------------------------------------------------------------------------------------------|--|
| | RESEARCH GRADE | |
| Composition, weight percent | | |
| Hexene-1 | 0.1 | |
| trans-Hexene-2 | 0.2 | |
| cis-Hexene-2 | 99.6 | |
| Hexenes-3 | | |
| Normal Hexane | | |
| Isoolefins | 0.1 | |
| Heptene-1 | | |
| trans-Heptene-3 | | |
| cis-Heptene-3 | | |
| trans-Heptene-2 | | |
| cis-Heptene-2 | | |
| Purity by freezing point, mol % | 99.28 | |
| Freezing point, F | -222.04* | |
| Boiling point, F | 156.00* | |
| Distillation range, F | | |
| Initial boiling point | | |
| Dry point | | |
| Specific gravity of liquid at 60/60 F | 0.6920* | |
| at 20/4 C | 0.68720* | |
| API gravity at 60 F | | |
| Density of liquid at 60 F, lbs/gal | 5.760* | |
| Vapor pressure at 70 F, psia | 2.4* | |
| 100 F, psia | 4.9* | |
| 130 F, psia | 9.1* | |
| Refractive index, 20/D | 1.39761* | |
| Color, Saybolt | +30 | |
| Acidity, distillation residue | | |
| Nonvolatile matter, grams/100 ml | | |
| Flash point, approximate, F | | |

* Literature values.

Table 2.74: Mixed 2-Hexenes (4)

| FORMULA | CH ₃ -CH=CH-CH ₂ -CH ₂ -CH ₃ | |
|---------------------------------------|--------------------------------------------------------------------------|-----------------|
| | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| Hexene-1 | trace | 0.3 |
| trans-Hexene-2 | 35.6 | } 34.1 |
| cis-Hexene-2 | 63.6 | |
| Hexenes-3 | 0.8 | 95.0 min |
| Normal Hexane | | |
| Isoolefins | | |
| Heptene-1 | | |
| trans-Heptene-3 | | |
| cis-Heptene-3 | | |
| trans-Heptene-2 | | |
| cis-Heptene-2 | | |
| Purity by freezing point, mol % | | |
| Freezing point, F | | |
| Boiling point, F | | |
| Distillation range, F | | |
| Initial boiling point | 155.0 | 155.0 |
| Dry point | 155.1 | 155.1 |
| Specific gravity of liquid at 60/60 F | 0.684 | 0.686 |
| at 20/4 C | | |
| API gravity at 60 F | 75.4 | 74.8 |
| Density of liquid at 60 F, lbs/gal | 5.69 | 5.71 |
| Vapor pressure at 70 F, psia | 2.4 | 2.4 |
| 100 F, psia | 5.0 | 5.0 |
| 130 F, psia | 9.2 | 9.2 |
| Refractive index, 20/D | 1.396 | 1.396 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 | 0.0005 |
| Flash point, approximate, F | -5 | -5 |

Table 2.75: Mixed 2- and 3-Hexenes (4)

| FORMULA | C_6H_{12} |
|----------------------------------------------------|-----------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Hexene-1 | 2.3 |
| trans-Hexene-2 | 71.1 |
| cis-Hexene-2 | 15.8 |
| Hexenes-3 | 10.8 |
| Normal Hexane | |
| Isoolefins | |
| Heptene-1 | |
| trans-Heptene-3 | |
| cis-Heptene-3 | |
| trans-Heptene-2 | |
| cis-Heptene-2 | |
| | 95.0 min |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 152.2 |
| Dry point | 155.4 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.685 |
| API gravity at 60 F | 75.1 |
| Density of liquid at 60 F, lbs/gal | 5.70 |
| Vapor pressure at 70 F, psia | 2.5 |
| 100 F, psia | 5.2 |
| 130 F, psia | 9.6 |
| Refractive index, 20/D | 1.396 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Flash point, approximate, F | -10 |

Table 2.76: Heptene-1 (4)

| FORMULA | $CH_2 = CH-(CH_2)_4-CH_3$ |
|----------------------------------------------------|---------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Hexene-1 | |
| trans-Hexene-2 | |
| cis-Hexene-2 | |
| Hexenes-3 | |
| Normal Hexane | |
| Isoolefins | 1.3 |
| Heptene-1 | 97.6 |
| trans-Heptene-3 | 0.5 |
| cis-Heptene-3 | 0.5 |
| trans-Heptene-2 | 0.1 |
| cis-Heptene-2 | |
| Purity by freezing point, mol % | 95.4 95.0 min |
| Freezing point, F | -183.0 |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 199 |
| Dry point | 202 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.7032 0.6982 |
| API gravity at 60 F | 70.0 |
| Density of liquid at 60 F, lbs/gal | 5.85 |
| Vapor pressure at 70 F, psia | 0.9 |
| 100 F, psia | 2.0 |
| 130 F, psia | 3.9 |
| Refractive index, 20/D | 1.4003 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | |
| Flash point, approximate, F | 25 (D 56) |

Table 2.77: cis-Heptene-2 (4)

| FORMULA | $\begin{matrix} H & H \\ & \\ CH_3-C & -C-(CH_2)_3-CH_3 \end{matrix}$ |
|-----------------------------|---------------------------------------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Hexene-1 | |
| trans-Hexene-2 | |
| cis-Hexene-2 | |
| Hexenes-3 | |
| Normal Hexane | |
| Isoolefins | |
| Heptene-1 | |
| trans-Heptene-3 | |
| cis-Heptene-3 | |
| trans-Heptene-2 | 4.0 |
| cis-Heptene-2 | 96.0 95.0 min |

| PROPERTIES | TECHNICAL GRADE |
|----------------------------------------------------|-----------------|
| Freezing point, F | |
| Boiling point, F | 209.3 |
| Distillation range, F | |
| Initial boiling point | |
| Dry point | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.717 |
| API gravity at 60 F | 67.3 |
| Density of liquid at 60 F, lbs/gal | 5.94 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | |
| 130 F, psia | |
| Refractive index, 20/D | 1.406 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Flash point, approximate, F | 0 |

Table 2.78: Mixed 2-Heptenes (4)

| FORMULA | $CH_3-CH=CH-(CH_2)_3-CH_3$ | |
|-------------------------------------------------|----------------------------|-----------------|
| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| Heptene-1 | trace | 1.2 |
| trans-Heptene-3 | } 0.5 | } 1.4 |
| cis-Heptene-3 | | |
| trans-Heptene-2 | 35.0 | 52.1 |
| cis-Heptene-2 | 64.5 } 99.0 min | 45.0 } 95.0 min |
| 2,4,4-Trimethylpentene-1 | | |
| 2,4,4-Trimethylpentene-2 | | |
| 2,3,3-Trimethylpentene-1 | | |
| Isoolefins | trace | 0.3 |
| Purity by freezing point, mol % | | |
| Freezing point, F | | |
| Boiling point, F | | |
| Distillation range, F | | |
| Initial boiling point | 208.4 | 208.6 |
| 10% Condensed | | |
| 50% Condensed | | |
| 90% Condensed | | |
| Dry point | 212.0 | 217.1 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.711 | 0.709 |
| API gravity at 60 F | 67.5 | 68.0 |
| Density of liquid at 60 F, lbs/gal | 5.92 | 5.91 |
| Vapor pressure at 100 F, psia | | |
| Refractive index, 20/D | 1.406 | 1.405 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 | 0.0005 |
| Bromine number | | |
| Kauri Butanol value | | |
| Copper corrosion | | |
| Doctor test | | |
| Flash point, approximate, F | 28 | 28 |

Table 2.79: Mixed 3-Heptenes (4)

| FORMULA | $CH_3-CH_2-CH=CH-(CH_2)_2-CH_3$ |
|-------------------------------------------------|---------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Heptene-1 | 2.0 |
| trans-Heptene-3 | 66.5 |
| cis-Heptene-3 | 29.3 } 95.0 min |
| trans-Heptene-2 | 0.5 |
| cis-Heptene-2 | 1.7 |
| 2,4,4-Trimethylpentene-1 | |
| 2,4,4-Trimethylpentene-2 | |
| 2,3,3-Trimethylpentene-1 | |
| Isoolefins | |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 204.0 |
| 10% Condensed | |
| 50% Condensed | |
| 90% Condensed | |
| Dry point | 204.4 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.705 |
| API gravity at 60 F | 69.2 |
| Density of liquid at 60 F, lbs/gal | 5.87 |
| Vapor pressure at 100 F, psia | |
| Refractive index, 20/D | 1.405 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Bromine number | |
| Kauri Butanol value | |
| Copper corrosion | |
| Doctor test | |
| Flash point, approximate, F | 21 |

Table 2.80: 2,4,4-Trimethylpentene-1 (4)

α-Diisobutylene

| FORMULA | $CH_2=C(CH_3)-C(CH_3)_2-CH_3$ | | |
|---------------------------------|-------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Heptene-1 | | | |
| trans-Heptene-3 | | | |
| cis-Heptene-3 | | | |
| trans-Heptene-2 | | | |
| cis-Heptene-2 | | | |
| 2,4,4-Trimethylpentene-1 | 99.86 | 99.39 | 98.7 |
| 2,4,4-Trimethylpentene-2 | 0.05 | 0.08 | 0.1 |
| 2,3,3-Trimethylpentene-1 | | | |
| Isoolefins | 0.09 | 0.53 | 1.2 |
| Purity by freezing point, mol % | 99.58 | 99.0 | 97.6 |
| Freezing point, F | -136.26* | 99.0 min | 95.0 min |
| Boiling point, F | 214.59* | | |

(continued)

Table 2.80: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|---------------------------------------|----------------|-------------|-----------------|
| Distillation range, F | | | |
| Initial boiling point | | | 214.3 |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | 214.6 |
| Specific gravity of liquid at 60/60 F | 0.7194* | 0.719 | 0.720 |
| at 20/4 C | 0.7150* | 0.715 | 0.716 |
| API gravity at 60 F | | 65.3 | 65.0 |
| Density of liquid at 60 F, lbs/gal | | 5.98 | 5.99 |
| Vapor pressure at 100 F, psia | | 1.6 | 1.6 |
| Refractive index, 20/D | 1.4086* | 1.409 | 1.409 |
| Color, Saybolt | | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Bromine number | | | |
| Kauri Butanol value | | | |
| Copper corrosion | | | |
| Doctor test | | | |
| Flash point, approximate, F | | < 20 (Est.) | < 20 (Est.) |

*Literature values.

Table 2.81: 2,4,4-Trimethylpentene-2 (4)

 β -Diisobutylene

| FORMULA | TECHNICAL GRADE |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| $\begin{array}{c} \text{CH}_3 \quad \text{CH}_3 \\ \quad \\ \text{CH}_3-\text{C}=\text{CH}-\text{C}-\text{CH}_3 \\ \\ \text{CH}_3 \end{array}$ | |
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Heptene-1 | |
| trans-Heptene-3 | |
| cis-Heptene-3 | |
| trans-Heptene-2 | |
| cis-Heptene-2 | |
| 2,4,4-Trimethylpentene-1 | 1.9 |
| 2,4,4-Trimethylpentene-2 | 97.1 |
| 2,3,3-Trimethylpentene-1 | |
| Isoolefins | 1.0 |
| Purity by freezing point, mol % | 95.1 95.0 min |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 219 |
| 10% Condensed | |
| 50% Condensed | |
| 90% Condensed | |
| Dry point | 230 |
| Specific gravity of liquid at 60/60 F | 0.724 |
| at 20/4 C | |
| API gravity at 60 F | 64.0 |
| Density of liquid at 60 F, lbs/gal | 6.03 |
| Vapor pressure at 100 F, psia | 1.5 |
| Refractive index, 20/D | 1.416 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Bromine number | |
| Kauri Butanol value | |
| Copper corrosion | |
| Doctor test | |
| Flash point, approximate, F | 35 (D 1310) |

Table 2.82: Mixed Diisobutylenes (4)

| FORMULA | 90% GRADE |
|---------------------------------------|---------------|
| C_8H_{16} | |
| PROPERTIES | 90% GRADE |
| Composition, weight percent | |
| Heptene-1 | |
| trans-Heptene-3 | |
| cis-Heptene-3 | |
| trans-Heptene-2 | |
| cis-Heptene-2 | |
| 2,4,4-Trimethylpentene-1 | 73.2 |
| 2,4,4-Trimethylpentene-2 | 17.0 |
| 2,3,3-Trimethylpentene-1 | 2.9 |
| Isoolefins | 6.9 |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 216 200 min |
| 10% Condensed | 217 |
| 50% Condensed | 218 |
| 90% Condensed | 220 |
| Dry point | 224 260 max |
| Specific gravity of liquid at 60/60 F | 0.723 |
| at 20/4 C | |
| API gravity at 60 F | 64.2 |
| Density of liquid at 60 F, lbs/gal | 6.02 |
| Vapor pressure at 100 F, psia | 2.0 |
| Refractive index, 20/D | |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Bromine number | 140.3 130 min |
| Kauri Butanol value | 38.3 |
| Copper corrosion | 1 1 max |
| Doctor test | neg. neg. |
| Flash point, approximate, F | 35 (Est.) |

Table 2.83: Octene-1 (4)

| FORMULA | $\text{CH}_2 = \text{CH}-(\text{CH}_2)_6-\text{CH}_3$ | | |
|---------------------------------------|-------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Octene-1 | 99.95 | 99.8 | 98.0 |
| trans-Octene-2 | | | |
| cis-Octene-2 | | | |
| mixed-Octenes-3 | 0.01 | 0.1 | 0.5 |
| trans-Octene-4 | | | |
| Nonene-1 | | | |
| Decene-1 | | | |
| Isoolefins | 0.04 | 0.1 | 1.5 |
| Purity by freezing point, mol % | 99.73 | 99.3 99.0 min | 95.6 95.0 min |
| Freezing point, F | -151.12* | | |
| Boiling point, F | 250.30* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 250.0 |
| Dry point | | | 250.3 |
| Specific gravity of liquid at 60/60 F | 0.7194* | 0.719 | 0.718 |
| at 20/4 C | 0.71492* | 0.715 | 0.714 |
| API gravity at 60 F | | 65.3 | 65.6 |
| Density of liquid at 60 F, lbs/gal | | 5.98 | 5.98 |
| Vapor pressure at 70 F, psia | 0.23* | 0.2 | 0.2 |
| 100 F, psia | 0.66* | 0.7 | 0.7 |
| 130 F, psia | 1.42* | 1.4 | 1.4 |
| Refractive index, 20/D | 1.40870* | 1.409 | 1.409 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | 70 | 70 |

*Literature values.

Table 2.84: cis-Octene-2 (4)

| FORMULA | $\text{CH}_3-\overset{\text{H}}{\underset{ }{\text{C}}}=\overset{\text{H}}{\underset{ }{\text{C}}}-\text{CH}_2-\text{CH}_2-\text{CH}_2-\text{CH}_2-\text{CH}_3$ |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Octene-1 | trace |
| trans-Octene-2 | 3.6 |
| cis-Octene-2 | 95.6 |
| mixed-Octenes-3 | 0.1 |
| trans-Octene-4 | 0.1 |
| Nonene-1 | |
| Decene-1 | |
| Isoolefins | 0.6 |
| Purity by freezing point, mol % | 95.0 95.0 min |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 257 |
| Dry point | 259 |
| Specific gravity of liquid at 60/60 F | 0.728 |
| at 20/4 C | |
| API gravity at 60 F | 62.4 |
| Density of liquid at 60 F, lbs/gal | 6.07 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | |
| 130 F, psia | |
| Refractive index, 20/D | 1.414 |
| Color, Saybolt | |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Flash point, approximate, F | |

Table 2.85: Mixed 2-Octenes (4)

| FORMULA | $\text{CH}_3-\text{CH}=\text{CH}-(\text{CH}_2)_4-\text{CH}_3$ | |
|---------------------------------------|---------------------------------------------------------------|-----------------|
| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| Octene-1 | | |
| trans-Octene-2 | 50.3 | 99.0 min |
| cis-Octene-2 | 49.2 | |
| mixed-Octenes-3 | 0.4 | 95.0 min |
| trans-Octene-4 | | 1.8 |
| Nonene-1 | | |
| Decene-1 | | |
| Isoolefins | 0.1 | 0.3 |
| Purity by freezing point, mol % | | |
| Freezing point, F | | |
| Boiling point, F | | |
| Distillation range, F | | |
| Initial boiling point | 257.0 | 256.9 |
| Dry point | 258.0 | 257.5 |
| Specific gravity of liquid at 60/60 F | 0.731 | 0.730 |
| at 20/4 C | | |
| API gravity at 60 F | 62.1 | 62.3 |
| Density of liquid at 60 F, lbs/gal | 6.08 | 6.08 |
| Vapor pressure at 70 F, psia | | |
| 100 F, psia | | |
| 130 F, psia | | |
| Refractive index, 20/D | 1.414 | 1.414 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 | 0.0005 |
| Flash point, approximate, F | 70 | 70 |

Table 2.86: Mixed Octenes (4)

| FORMULA | C_8H_{16} |
|---------------------------------------|-----------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Octene-1 | 34.6 |
| trans-Octene-2 | 20.7 |
| cis-Octene-2 | 42.3 |
| mixed-Octenes-3 | 2.3 |
| trans-Octene-4 | |
| Nonene-1 | |
| Decene-1 | |
| Isoolefins | |
| Purity by freezing point, mol % | 95.0 min |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 250.0 |
| Dry point | 255.0 |
| Specific gravity of liquid at 60/60 F | 0.724 |
| at 20/4 C | 0.720 |
| API gravity at 60 F | 63.8 |
| Density of liquid at 60 F, lbs/gal | 6.08 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | 0.5 |
| 130 F, psia | |
| Refractive index, 20/D | 1.412 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Flash point, approximate, F | 70 |

Table 2.87: Nonene-1 (4)

| FORMULA | $CH_2 = CH - (CH_2)_6 - CH_3$ |
|---------------------------------------|-------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Octene-1 | 0.7 |
| trans-Octene-2 | |
| cis-Octene-2 | |
| mixed-Octenes-3 | |
| trans-Octene-4 | |
| Nonene-1 | 98.7 |
| Decene-1 | |
| Isoolefins | 0.6 |
| Purity by freezing point, mol % | 97.1 95.0 min |
| Freezing point, F | -115.04 |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 293 |
| Dry point | 297 |
| Specific gravity of liquid at 60/60 F | 0.7352 |
| at 20/4 C | 0.7306 |
| API gravity at 60 F | 61.2 |
| Density of liquid at 60 F, lbs/gal | 6.12 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | |
| 130 F, psia | |
| Refractive index, 20/D | 1.4161 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Flash point, approximate, F | 115 (Est.) |

Table 2.88: Decene-1 (4)

| FORMULA | $CH_2 = CH - (CH_2)_7 - CH_3$ |
|---------------------------------------|-------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Octene-1 | |
| trans-Octene-2 | |
| cis-Octene-2 | |
| mixed-Octenes-3 | |
| trans-Octene-4 | |
| Nonene-1 | |
| Decene-1 | 98.9 |
| Isoolefins | 1.1 |
| Purity by freezing point, mol % | 96.0 95.0 min |
| Freezing point, F | -89.25 |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 336 |
| Dry point | 342 |
| Specific gravity of liquid at 60/60 F | 0.7452 |
| at 20/4 C | 0.7408 |
| API gravity at 60 F | 59.70 |
| Density of liquid at 60 F, lbs/gal | 6.16 |
| Vapor pressure at 70 F, psia | |
| 100 F, psia | |
| 130 F, psia | |
| Refractive index, 20/D | 1.4216 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | |
| Flash point, approximate, F | 120 (Est.) |

Table 2.89: Undecene-1 (4)

| FORMULA | $CH_2 = CH - (CH_2)_8 - CH_3$ |
|---------------------------------------|-------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Undecene-1 | 99.0 |
| Dodecene-1 | |
| Tridecene-1 | |
| Tetradecene-1 | |
| Pentadecene-1 | |
| Hexadecene-1 | |
| Isoolefins | 1.0 |
| Purity by freezing point, mol % | 95.7 95.0 min |
| Freezing point, F | -58.27 |
| Distillation range, F | |
| Initial boiling point | 372 |
| Dry point | 377 |
| Specific gravity of liquid at 60/60 F | 0.7563 |
| at 20/4 C | 0.7519 |
| API gravity at 60 F | 56.0 |
| Density of liquid at 60 F, lbs/gal | 6.31 |
| Refractive index, 20/D | 1.4268 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Flash point, approximate, F | 160 |

Table 2.90: Dodecene-1 (4)

| FORMULA | $CH_2 = CH - (CH_2)_9 - CH_3$ |
|---------------------------------------|-------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| Undecene-1 | |
| Dodecene-1 | 99.2 |
| Tridecene-1 | |
| Tetradecene-1 | 0.1 |
| Pentadecene-1 | |
| Hexadecene-1 | 0.2 |
| Isoolefins | 0.5 |
| Purity by freezing point, mol % | 95.4 95.0 min |
| Freezing point, F | -33.39 |
| Distillation range, F | |
| Initial boiling point | 410 |
| Dry point | 416 |
| Specific gravity of liquid at 60/60 F | 0.7624 |
| at 20/4 C | 0.7584 |
| API gravity at 60 F | 54.10 |
| Density of liquid at 60 F, lbs/gal | 6.347 |
| Refractive index, 20/D | 1.4300 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Flash point, approximate, F | 174 |

Table 2.91: Tridecene-1 (4)

| FORMULA | $\text{CH}_2 = \text{CH} - (\text{CH}_2)_{10} - \text{CH}_3$ | |
|---------------------------------------|--------------------------------------------------------------|--|
| PROPERTIES | TECHNICAL GRADE | |
| Composition, weight percent | | |
| Undecene-1 | | |
| Dodecene-1 | 0.1 | |
| Tridecene-1 | 99.7 | |
| Tetradecene-1 | | |
| Pentadecene-1 | | |
| Hexadecene-1 | | |
| Isoprenes | 0.2 | |
| Purity by freezing point, mol % | 96.6 95.0 min | |
| Freezing point, F | -10.95 | |
| Distillation range, F | | |
| Initial boiling point | 442.6 | |
| Dry point | 450.7 | |
| Specific gravity of liquid at 60/60 F | 0.7704 | |
| at 20/4 C | 0.7662 | |
| API gravity at 60 F | 52.7 | |
| Density of liquid at 60 F, lbs/gal | 6.41 | |
| Refractive index, 20/D | 1.4336 | |
| Color, Saybolt | +30 | |
| Acidity, distillation residue | neutral | |
| Flash point, approximate, F | 175 | |

Table 2.92: Tetradecene-1 (4)

| FORMULA | $\text{CH}_2 = \text{CH} - (\text{CH}_2)_{11} - \text{CH}_3$ | |
|---------------------------------------|--------------------------------------------------------------|--|
| PROPERTIES | TECHNICAL GRADE | |
| Composition, weight percent | | |
| Undecene-1 | | |
| Dodecene-1 | 0.1 | |
| Tridecene-1 | 0.3 | |
| Tetradecene-1 | 99.6 | |
| Pentadecene-1 | trace | |
| Hexadecene-1 | | |
| Isoprenes | | |
| Purity by freezing point, mol % | 95.5 95.0 min | |
| Freezing point, F | 7.05 | |
| Distillation range, F | | |
| Initial boiling point | 474 | |
| Dry point | 485 | |
| Specific gravity of liquid at 60/60 F | 0.7779 | |
| at 20/4 C | 0.7737 | |
| API gravity at 60 F | 50.4 | |
| Density of liquid at 60 F, lbs/gal | 6.48 | |
| Refractive index, 20/D | 1.4373 | |
| Color, Saybolt | +30 | |
| Acidity, distillation residue | neutral | |
| Flash point, approximate, F | 240 | |

Table 2.93: Butadiene-1,3 (4)

| FORMULA | $\text{CH}_2 = \text{CH} - \text{CH} = \text{CH}_2$ | | |
|--------------------------------------------------------------|-----------------------------------------------------|----------------|--------------|
| PROPERTIES | RESEARCH GRADE | SPECIAL PURITY | RUBBER GRADE |
| Composition, weight percent | | | |
| Isobutylene | 0.02 | 0.05 | 0.1 |
| Butene-1 | 0.02 | 0.10 | 0.2 |
| Butadiene-1,3 | 99.95 | 99.70 | 99.5 |
| trans-Butene-2 | 0.01 | 0.10 | 0.1 |
| Butadiene Dimer | | 0.05 | 0.1 |
| Purity by freezing point, mol % | 99.89 | 99.6 | 99.4 |
| Freezing point, F | -164.05* | 99.5 min | 99.0 min |
| Boiling point, F | 24.06* | | |
| Specific gravity of liquid at 60/60 F | 0.6272* | 0.627 | 0.627 |
| at 20/4 C | 0.6211* | 0.621 | 0.621 |
| API gravity at 60 F | | 94.2 | 94.2 |
| Density of liquid at 60 F, lbs/gal | | 5.22 | 5.22 |
| Vapor pressure at 70 F, psia | | 35.6 | 35.6 |
| 100 F, psia | | 64.0 | 64.0 |
| 130 F, psia | | 92.2 | 92.2 |
| Specific gravity of real gas at 60 F and 14.7 psia (Air = 1) | 1.9153* | | |
| Specific volume of real gas at 60 F and 14.7 psia, cu ft/lb | 6.841* | | |
| Flash point, approximate, F | | -105 | -105 |
| Flammability limits, volume % in air | | | |
| Lower | 2.0* | | |
| Higher | 11.5* | | |

*Literature values.

Table 2.94: Isoprene (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_2 - \text{C} - \text{CH} = \text{CH}_2 \end{array}$ | |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------|
| PROPERTIES | RESEARCH GRADE | POLYMERIZATION GRADE |
| Composition, weight percent | | |
| 2-Methylbutene-1 | trace | 0.1 |
| 2-Methylbutadiene-1,3 | 99.99 | 99.8 |
| Pentenes-2 | 0.01 | 0.1 |
| 2-Methylbutene-2 | trace | trace |
| trans-Pentadiene-1,3 | | |
| cis-Pentadiene-1,3 | | |
| Cyclopentene | | |
| Cyclooctadiene-1,5 | | |
| 4-Vinylcyclohexene-1 | | |
| 1-Methylcyclohexene-1 | | |
| 3-Methylcyclohexene-1 | | |
| 4-Methylcyclohexane-1 | | |
| Unidentified | | |
| Purity by freezing point, mol % | 99.98 | 99.6 99.0 min |
| Freezing point, F | -230.71* | |
| Boiling point, F | 93.32* | |
| Distillation range, F | | |
| Initial boiling point | | |
| 10% Condensed | | |
| 50% Condensed | | |
| 90% Condensed | | |
| Dry point | | |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.6861* 0.68095* | 0.686 0.681 |
| API gravity at 60 F | | 74.8 |
| Density of Liquid at 60 F, lbs/gal | 5.71* | 5.71 |
| Vapor pressure at 70 F, psia | 9.19* | 9.2 |
| 100 F, psia | 16.67* | 16.7 |
| 130 F, psia | 28.23* | 28.2 |
| Refractive index, 20/D | 1.42194* | 1.422 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | | |
| Nonvolatile matter, grams/100 ml | | |
| Doctor test | | |
| Flash point, approximate, F | | -55 (Est.) |

* Literature values.

Table 2.95: Piperylene (4)

| FORMULA | $\text{CH}_2 - \text{CH} = \text{CH} = \text{CH}_2$ | |
|-------------------------------------------------|-----------------------------------------------------|------------|
| PROPERTIES | 90% GRADE | |
| Composition, weight percent | | |
| 2-Methylbutene-1 | | |
| 2-Methylbutadiene-1,3 | | |
| Pentenes-2 | | 0.1 |
| 2-Methylbutene-2 | | 0.7 |
| trans-Pentadiene-1,3 | | 57) |
| cis-Pentadiene-1,3 | | 34) |
| Cyclopentene | | 8.2 |
| Cyclooctadiene-1,5 | | |
| 4-Vinylcyclohexene-1 | | |
| 1-Methylcyclohexene-1 | | |
| 3-Methylcyclohexene-1 | | |
| 4-Methylcyclohexane-1 | | |
| Unidentified | | |
| Purity by freezing point, mol % | | |
| Freezing point, F | | |
| Boiling point, F | | |
| Distillation range, F | | |
| Initial boiling point | | 107 |
| 10% Condensed | | 108 |
| 50% Condensed | | 108 |
| 90% Condensed | | 109 |
| Dry point | | 113 |
| Specific gravity of liquid at 60/60 F at 20/4 C | | 0.690 |
| API gravity at 60 F | | 73.5 |
| Density of Liquid at 60 F, lbs/gal | | 5.75 |
| Vapor pressure at 70 F, psia | | |
| 100 F, psia | | 12.7 |
| 130 F, psia | | |
| Refractive index, 20/D | | |
| Color, Saybolt | | |
| Acidity, distillation residue | | |
| Nonvolatile matter, grams/100 ml | | |
| Doctor test | | |
| Flash point, approximate, F | | -20 (Est.) |

* Literature values.

** Distribution of isomer content varies.

CYCLOOLEFINS

Table 2.96: Cyclopentene (4)

| FORMULA | $\begin{array}{c} \text{CH}_2 - \text{CH}_2 \\ \quad \quad \\ \text{CH} = \text{CH} \quad \text{CH}_2 \end{array}$ | | |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Pentenes-2 | 0.02 | 0.2 | 3.6 |
| 2-Methylbutene-2 | 0.03 | 0.2 | 0.2 |
| Cyclopentene | 99.95 | 99.6 | 95.7 95.0 min |
| 2-Methylbutene-1 | | | 0.1 |
| Pentene-1 | | | 0.1 |
| Cyclopentane | | | 0.4 |
| Cyclohexane | | | |
| Cyclohexane | | | |

(continued)

Table 2.96: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|---------------------------------------|----------------|------------|-----------------|
| Unidentified | | | |
| Benzene | | | |
| Toluene | | | |
| Ethylbenzene | | | |
| Xylenes | | | |
| Purity by freezing point, mol % | 99.93 | 99.5 | 99.0 min |
| Freezing point, F | -211.14* | | |
| Boiling point, F | 111.64* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 111 |
| Dry point | | | 112 |
| Specific gravity of liquid at 60/60 F | 0.7775* | 0.778 | 0.778 |
| at 20/4 C | 0.77199* | 0.772 | 0.772 |
| API gravity at 60 F | | 50.4 | 50.4 |
| Density of liquid at 60 F, lbs/gal | | 6.48 | 6.48 |
| Vapor pressure at 70 F, psia | | | |
| 100 F, psia | | | |
| 130 F, psia | | | |
| Refractive index, 20/D | 1.42246* | 1.422 | 1.422 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Copper corrosion | | | |
| Doctor test | | | |
| Flash point, approximate, F | | -35 | |
| Flammability limits, volume % in air | | | |
| Lower | | | |
| Higher | | | |

*Literature values.

Cyclopentene and Cyclohexene are sometimes inhibited with 2,6-ditertiarybutyl-4-methylphenol which can be removed by distillation.

Table 2.97: Cyclohexene (4)


| FORMULA | $\begin{matrix} \text{CH}_2 & - & \text{CH}_2 \\ & \diagdown & / \\ & \text{C} & - & \text{C} \\ & / & \diagdown \\ \text{CH}_2 & - & \text{CH} & - & \text{CH}_2 \end{matrix}$ | | |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | |
| Composition, weight percent | | | |
| Pentanes-2 | | | |
| 2-Methylbutene-2 | | | |
| Cyclopentene | | | |
| 2-Methylbutene-1 | | | |
| Pentene-1 | | | |
| Cyclopentane | | | |
| Cyclohexene | 99.99 | 99.5 | |
| Cyclohexane | 0.01 | 0.2 | |
| Unidentified | | 0.3 | |
| Benzene | | | |
| Toluene | | | |
| Ethylbenzene | | | |
| Xylenes | | | |
| Purity by freezing point, mol % | 99.92 | 99.4 | 99.0 min |
| Freezing point, F | -154.32* | | |
| Boiling point, F | 181.36* | | |

| PROPERTIES | RESEARCH GRADE | PURE GRADE |
|---------------------------------------|----------------|------------|
| Distillation range, F | | |
| Initial boiling point | | 181 |
| Dry point | | 182 |
| Specific gravity of liquid at 60/60 F | 0.8159* | 0.816 |
| at 20/4 C | 0.81096* | 0.811 |
| API gravity at 60 F | | 41.9 |
| Density of liquid at 60 F, lbs/gal | | 6.79 |
| Vapor pressure at 70 F, psia | | |
| 100 F, psia | | 3.1 |
| 130 F, psia | | |
| Refractive index, 20/D | 1.44654* | 1.446 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 |
| Copper corrosion | | |
| Doctor test | | |
| Flash point, approximate, F | | 10 |
| Flammability limits, volume % in air | | |
| Lower | | |
| Higher | | |

*Literature values.

Cyclopentene and Cyclohexene are sometimes inhibited with 2,6-ditertiarybutyl-4-methylphenol which can be removed by distillation.

Table 2.98: 4-Vinylcyclohexene-1 (4)

| FORMULA |  | | |
|---------------------------------------|-----------------------------------------------------------------------------------|---------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| 2-Methylbutene-1 | | | |
| 2-Methylbutadiene-1,3 | | | |
| Pentenes-2 | | | |
| 2-Methylbutene-2 | | | |
| trans-Pentadiene-1,3 | | | |
| cis-Pentadiene-1,3 | | | |
| Cyclopentene | | | |
| Cyclooctadiene-1,5 | 0.01 | 0.1 | 1.5 |
| 4-Vinylcyclohexene-1 | 99.99 | 99.9 | 98.5 |
| 1-Methylcyclohexene-1 | | | |
| 3-Methylcyclohexene-1 | | | |
| 4-Methylcyclohexane-1 | | | |
| Unidentified | | | |
| Purity by freezing point, mol % | 99.88 | 99.3 99.0 min | 97.0 95.0 min |
| Freezing point, F | -164.07* | | |
| Boiling point, F | 262.4* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 262 |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | 265 |
| Specific gravity of liquid at 60/60 F | 0.834* | 0.836 | 0.836 |
| at 20/4 C | 0.8303* | 0.830 | 0.833 |
| API gravity at 60 F | | 37.8 | 37.8 |
| Density of Liquid at 60 F, lbs/gal | | 6.96 | 6.96 |
| Vapor pressure at 70 F, psia | | | |
| 100 F, psia | 0.5* | 0.5 | 0.5 |
| 130 F, psia | | | |
| Refractive index, 20/0 | | 1.464 | 1.464 |
| Color, Saybolt | | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Doctor test | | | |
| Flash point, approximate, F | | 70 | 70 |


*Literature values.

Table 2.99: Mixed Methylcyclohexenes (4)

| FORMULA | C ₇ H ₁₂ |
|---------------------------------|--------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| 2-Methylbutene-1 | |
| 2-Methylbutadiene-1,3 | |
| Pentenes-2 | |
| 2-Methylbutene-2 | |
| trans-Pentadiene-1,3 | |
| cis-Pentadiene-1,3 | |
| Cyclopentene | |
| Cyclooctadiene-1,5 | |
| 4-Vinylcyclohexene-1 | |
| 1-Methylcyclohexene-1 | 0.4 |
| 3-Methylcyclohexene-1 | 45.5 / 95.0 min |
| 4-Methylcyclohexane-1 | 52.5 |
| Unidentified | 1.6 |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 215 |

| PROPERTIES | TECHNICAL GRADE |
|---------------------------------------|-----------------|
| 10% Condensed | |
| 50% Condensed | 218 |
| 90% Condensed | |
| Dry point | 222 |
| Specific gravity of liquid at 60/60 F | 0.8086 |
| at 20/4 C | 0.8041 |
| API gravity at 60 F | 43.5 |
| Density of Liquid at 60 F, lbs/gal | 6.73 |
| Vapor pressure at 70 F, psia | 0.6 |
| 100 F, psia | 2.6 |
| 130 F, psia | |
| Refractive index, 20/0 | 1.4431 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | |
| Doctor test | negative |
| Flash point, approximate, F | 30 |

Table 2.100: Cyclooctadiene-1,5 (4)


| FORMULA |  | |
|---------------------------------|-----------------------------------------------------------------------------------|-----------------|
| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| 2-Methylbutene-1 | | |
| 2-Methylbutadiene-1,3 | | |
| Pentenes-2 | | |
| 2-Methylbutene-2 | | |
| trans-Pentadiene-1,3 | | |
| cis-Pentadiene-1,3 | | |
| Cyclopentene | | |
| Cyclooctadiene-1,5 | 99.8 | 96.4 95.0 min |
| 4-Vinylcyclohexene-1 | 0.2 | 3.6 |
| 1-Methylcyclohexene-1 | | |
| 3-Methylcyclohexene-1 | | |
| 4-Methylcyclohexane-1 | | |
| Unidentified | | |
| Purity by freezing point, mol % | 99.5 99.0 min | |
| Freezing point, F | -69.53* | |
| Boiling point, F | | |

| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
|----------------------------------------------------|--------------------|-----------------|
| Distillation range, F | | |
| Initial boiling point | | 298 |
| 10% Condensed | | |
| 50% Condensed | | |
| 90% Condensed | | |
| Dry point | | 304 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.8865* 0.8833* | 0.886 0.883 |
| API gravity at 60 F | | 28.2 |
| Density of Liquid at 60 F, lbs/gal | | 7.38 |
| Vapor pressure at 70 F, psia | | |
| 100 F, psia | 0.5* | 0.5 |
| 130 F, psia | | |
| Refractive index, 20/D | 1.4933* | 1.493 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | | |
| Nonvolatile matter, grams/100 ml | | |
| Doctor test | | |
| Flash point, approximate, F | 100 | 96 |

* Literature values.

AROMATICS


Table 2.101: Benzene (4)

| FORMULA |  | |
|----------------------------------------------------|-------------------------------------------------------------------------------------|----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE |
| Composition, weight percent | | |
| Pentenes-2 | | |
| 2-Methylbutene-2 | | |
| Cyclopentane | | |
| 2-Methylbutene-1 | | |
| Pentene-1 | | |
| Cyclopentane | | |
| Cyclohexane | | |
| Cyclohexane | | |
| Unidentified | | |
| Benzene | 99.99 | 99.8 |
| Toluene | 0.01 | 0.1 |
| Ethylbenzene | | 0.1 |
| Xylenes | | |
| Purity by freezing point, mol % | 99.90 | 99.7 99.0 min |
| Freezing point, F | 41.96* | |
| Boiling point, F | 176.18* | |
| Distillation range, F | | |
| Initial boiling point | | 175 |
| Dry point | | 177 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.8845* 0.87901* | 0.884 0.879 |
| API gravity at 60 F | | 28.6 |
| Density of liquid at 60 F, lbs/gal | | 7.36 |
| Vapor pressure at 70 F, psia | 1.53* | 1.5 |
| 100 F, psia | 3.22* | 3.2 |
| 130 F, psia | 6.20* | 6.2 |
| Refractive index, 20/D | 1.50112* | 1.501 |
| Color, Saybolt | +30 | +30 |

| PROPERTIES | RESEARCH GRADE | PURE GRADE |
|--------------------------------------|----------------|------------|
| Acidity, distillation residue | | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 |
| Copper corrosion | | |
| Doctor test | | negative |
| Flash point, approximate, F | | 10 |
| Flammability limits, volume % in air | | |
| Lower | 1.3* | |
| Higher | 7.9* | |

* Literature values.


Table 2.102: Toluene (4)

| FORMULA |  | |
|---------------------------------|-----------------------------------------------------------------------------------|---------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE |
| Composition, weight percent | | |
| Pentades-2 | | |
| 2-Methylbutene-2 | | |
| Cyclopentene | | |
| 2-Methylbutene-1 | | |
| Pentene-1 | | |
| Cyclopentane | | |
| Cyclohexene | | |
| Cyclohexane | | |
| Unidentified | | |
| Benzene | 0.01 | 0.1 |
| Toluene | 99.99 | 99.8 |
| Ethylbenzene | | |
| Xylenes | | 0.1 |
| Purity by freezing point, mol % | 99.90 | 99.7 99.0 min |
| Freezing point, F | -138.98* | |
| Boiling point, F | 231.12* | |
| Distillation range, F | | |
| Initial boiling point | | 230 |
| Dry point | | 231 |

| PROPERTIES | RESEARCH GRADE | PURE GRADE |
|-------------------------------------------------|----------------|------------|
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.8719* | 0.872 |
| | 0.86696* | 0.867 |
| API gravity at 60 F | | 30.8 |
| Density of liquid at 60 F, lbs/gal | | 7.26 |
| Vapor pressure at 70 F, psia | 0.45* | 0.4 |
| 100 F, psia | 1.03* | 1.0 |
| 130 F, psia | 2.15* | 2.2 |
| Refractive index, 20/D | 1.49693* | 1.497 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 |
| Copper corrosion | | 1 |
| Doctor test | | |
| Flash point, approximate, F | | 40 (D 56) |
| Flammability limits, volume % in air | | |
| Lower | 1.2* 212F | |
| Higher | 7.1* 212F | |

*Literature values.


Table 2.103: Ethylbenzene (4)

| FORMULA |  | | |
|-------------------------------------------------|------------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Benzene | 0.01 | 0.3 | 0.6 |
| Toluene | 0.01 | 0.2 | 0.4 |
| Ethylbenzene | 99.98 | 99.5 | 99.0 |
| para-Xylene | | | |
| meta-Xylene | | | |
| ortho-Xylene | | | |
| Purity by freezing point, mol % | 99.92 | 99.2 99.0 min | 98.5 95.0 min |
| Freezing point, F | -138.96* | | |
| Boiling point, F | 277.13* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 277 |
| Dry point | | | 278 |
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.8717* | 0.872 | 0.872 |
| | 0.86702* | 0.867 | 0.867 |
| API gravity at 60 F | | 30.8 | 30.8 |
| Density of liquid at 60 F, lbs/gal | | 7.26 | 7.26 |
| Vapor pressure at 100 F, psia | 0.37* | 0.4 | 0.4 |
| 130 F, psia | 0.84* | 0.8 | 0.8 |
| Refractive index, 20/D | 1.49588* | 1.496 | 1.496 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Acid wash color | | | |
| Color | | | |
| Doctor test | | | |
| Flash point, approximate, F | | 59 (D1310) | 59 (D 1319) |
| Flammability limits, volume % in air | | | |
| Lower | 1.0* | | |
| Higher | 6.7* | | |

*Literature values.


Ethylbenzene is sometimes stabilized with 2,6-ditertiarybutyl-4-methylphenol which can be removed by distillation.

Table 2.104: p-Xylene (4)

| FORMULA |  | | |
|---------------------------------------|-----------------------------------------------------------------------------------|---------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Benzene | | | |
| Toluene | | | |
| Ethylbenzene | | | |
| para-Xylene | 99.99 | 99.8 | 99.0 |
| meta-Xylene | 0.01 | 0.2 | 0.6 |
| ortho-Xylene | | trace | 0.4 |
| Purity by freezing point, mol % | 99.94 | 99.5 99.0 min | 98.0 95.0 min |
| Freezing point, F | 55.87* | | |
| Boiling point, F | 281.03* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 280 |
| Dry point | | | 281 |
| Specific gravity of liquid at 60/60 F | 0.8657* | 0.866 | 0.866 |
| at 20/4 C | 0.86105* | 0.861 | 0.861 |
| API gravity at 60 F | | 31.9 | 31.9 |
| Density of liquid at 60 F, lbs/gal | | 7.21 | 7.21 |
| Vapor pressure at 100 F, psia | 0.34* | 0.3 | 0.3 |
| 130 F, psia | 0.77* | 0.8 | 0.8 |
| Refractive index, 20/D | 1.49582* | 1.496 | 1.496 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Acid wash color | | 1 | 1 |
| Color | | Pass | Pass |
| Doctor test | | | |
| Flash point, approximate, F | | 81 | 81 |
| Flammability limits, volume % in air | | | |
| Lower | 1.1* | | |
| Higher | 6.6* | | |

*Literature values.

Table 2.105: m-Xylene (4)

| FORMULA |  | | |
|---------------------------------------|-------------------------------------------------------------------------------------|---------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Benzene | | | |
| Toluene | | | |
| Ethylbenzene | | | 0.1 |
| para-Xylene | 0.01 | 0.1 | 0.4 |
| meta-Xylene | 99.99 | 99.9 | 99.2 |
| ortho-Xylene | | | 0.3 |
| Purity by freezing point, mol % | 99.94 | 99.2 99.0 min | 98.2 95.0 min |
| Freezing point, F | -54.17* | | |
| Boiling point, F | 282.39* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 280 |
| Dry point | | | 281 |
| Specific gravity of liquid at 60/60 F | 0.8687* | 0.869 | 0.869 |
| at 20/4 C | 0.86417* | 0.864 | 0.864 |
| API gravity at 60 F | | 31.3 | 31.3 |


(continued)

Table 2.105: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|--------------------------------------|----------------|------------|-----------------|
| Density of liquid at 60 F, lbs/gal | | 7.24 | 7.24 |
| Vapor pressure at 100 F, psia | 0.33* | 0.3 | 0.3 |
| 130 F, psia | 0.74* | 0.7 | 0.7 |
| Refractive index, 20/D | 1.49722* | 1.497 | 1.497 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Acid wash color | | | |
| Color | | | |
| Doctor test | | negative | negative |
| Flash point, approximate, F | | 84 | 84 |
| Flammability limits, volume % in air | | | |
| Lower | 1.1* | | |
| Higher | 6.4* | | |


*Literature values.

Table 2.106: o-Xylene (4)

| FORMULA |  | |
|---------------------------------------|-----------------------------------------------------------------------------------|---------------|
| | RESEARCH GRADE | PURE GRADE |
| Composition, weight percent | | |
| meta-Xylene | 0.01 | 0.3 |
| ortho-Xylene | 99.99 | 99.7 |
| Ethylbenzene | | |
| isopropylbenzene | | |
| Normal Propylbenzene | | |
| Methylethylbenzenes | | |
| 1,2,4-Trimethylbenzene | | |
| 1,3,5-Trimethylbenzene | | |
| 1,2,3-Trimethylbenzene | | |
| Purity by freezing point, mol % | 99.96 | 99.4 99.0 min |
| Freezing point, F | -13.33* | |
| Boiling point, F | 291.94* | |
| Distillation range, F | | |
| Initial boiling point | | 289 |
| Dry point | | 291 |
| Specific gravity of liquid at 60/60 F | 0.8848* | 0.885 |
| at 20/4 C | 0.88020* | 0.880 |
| API gravity at 60 F | | 28.4 |
| Density of liquid at 60 F, lbs/gal | | 7.37 |
| Vapor pressure at 100 F, psia | 0.26* | 0.3 |
| 130 F, psia | 0.61* | 0.6 |
| Refractive index, 20/D | 1.50545* | 1.505 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 |
| Flash point, approximate, F | | 88 (D 56) |
| Flammability limits, volume % in air | | |
| Lower | 1.1* | |
| Higher | 6.4* | |

*Literature values.

Table 2.107: Cumene (4)

| FORMULA |  | | |
|---------------------------------------|-------------------------------------------------------------------------------------|---------------|-----------------|
| | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| meta-Xylene | | | |
| ortho-Xylene | 0.01 | 0.1 | 0.2 |
| Ethylbenzene | 0.03 | 0.3 | 0.6 |
| isopropylbenzene | 99.96 | 99.6 | 99.2 |
| Normal Propylbenzene | | | |
| Methylethylbenzenes | | | |
| 1,2,4-Trimethylbenzene | | | |
| 1,3,5-Trimethylbenzene | | | |
| 1,2,3-Trimethylbenzene | | | |
| Purity by freezing point, mol % | 99.92 | 99.3 99.0 min | 98.5 95.0 min |
| Freezing point, F | -140.86* | | |
| Boiling point, F | 306.31* | | |
| Distillation range, F | | | |
| Initial boiling point | | 306 | |
| Dry point | | 307 | |
| Specific gravity of liquid at 60/60 F | 0.8663* | 0.866 | 0.866 |
| at 20/4 C | 0.86179* | 0.862 | 0.862 |
| API gravity at 60 F | | 31.9 | 31.9 |
| Density of liquid at 60 F, lbs/gal | | 7.21 | 7.21 |
| Vapor pressure at 100 F, psia | 0.19* | 0.2 | 0.2 |
| 130 F, psia | 0.45* | 0.4 | 0.4 |
| Refractive index, 20/D | 1.49145* | 1.491 | 1.491 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Flash point, approximate, F | | 111 | 111 |
| Flammability limits, volume % in air | | | |
| Lower | 0.9* | | |
| Higher | 6.5* | | |

*Literature values.

Isopropylbenzene and 1,2,4-Trimethylbenzene are sometimes stabilized with 2,6-ditertiary butyl-4-methylphenol which can be removed by distillation.

Table 2.108: n-Propylbenzene (4)



| FORMULA |  | | |
|---------------------------------------|-----------------------------------------------------------------------------------|----------|--|
| PROPERTIES | TECHNICAL GRADE | | |
| Composition, weight percent | | | |
| meta-Xylene | | | |
| ortho-Xylene | | | |
| Ethylbenzene | | | |
| Isopropylbenzene | 1.5 | | |
| Normal Propylbenzene | 96.6 | 95.0 min | |
| Methylethylbenzenes | 1.9 | | |
| 1,2,4-Trimethylbenzene | | | |
| 1,3,5-Trimethylbenzene | | | |
| 1,2,3-Trimethylbenzene | | | |
| Purity by freezing point, mol % | | | |
| Freezing point, F | | | |
| Boiling point, F | | | |
| Distillation range, F | | | |
| Initial boiling point | 315 | | |
| Dry point | 319 | | |
| Specific gravity of liquid at 60/60 F | 0.8669 | | |
| at 20/4 C | 0.8621 | | |
| API gravity at 60 F | 31.7 | | |
| Density of liquid at 60 F, lbs/gal | 7.22 | | |
| Vapor pressure at 100 F, psia | | | |
| 130 F, psia | | | |
| Refractive index, 20/D | 1.4915 | | |
| Color, Saybolt | +30 | | |
| Acidity, distillation residue | | | |
| Nonvolatile matter, grams/100 ml | 0.0005 | | |
| Flash point, approximate, F | 114 | | |
| Flammability limits, volume % in air | | | |
| Lower | | | |
| Higher | | | |


Table 2.109: Pseudocumene (4)

| FORMULA |  | | |
|---------------------------------------|-------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| meta-Xylene | | | |
| ortho-Xylene | | | |
| Ethylbenzene | | | |
| Isopropylbenzene | | | |
| Normal Propylbenzene | | | |
| Methylethylbenzenes | | | |
| 1,2,4-Trimethylbenzene | 99.99 | 99.7 | 1.6 |
| 1,3,5-Trimethylbenzene | 0.01 | 0.1 | 1.4 |
| 1,2,3-Trimethylbenzene | | | |
| Purity by freezing point, mol % | 99.90 | 99.5 | 99.0 min |
| Freezing point, F | -46.84* | | |
| Boiling point, F | 336.83* | | |
| Distillation range, F | | | |
| Initial boiling point | | | |
| Dry point | | | |
| Specific gravity of liquid at 60/60 F | 0.8802* | 0.880 | 0.880 |
| at 20/4 C | 0.87582* | 0.876 | 0.876 |
| API gravity at 60 F | 29.3 | 29.3 | 29.3 |
| Density of liquid at 60 F, lbs/gal | 7.33 | 7.33 | 7.33 |
| Vapor pressure at 100 F, psia | | | |
| 130 F, psia | 0.22* | 0.2 | 0.2 |
| Refractive index, 20/D | 1.50484* | 1.505 | 1.505 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | neutral | | |
| Nonvolatile matter, grams/100 ml | 0.0005 | | |
| Flash point, approximate, F | 130 | | |
| Flammability limits, volume % in air | | | |
| Lower | | | |
| Higher | | | |

*Literature values.

Isopropylbenzene and 1,2,4-Trimethylbenzene are sometimes stabilized with 2,6-ditertiary butyl-4-methylphenol which can be removed by distillation.

Table 2.110: n-Butylbenzene (4)

| FORMULA |  | | |
|---------------------------------|-------------------------------------------------------------------------------------|------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| secondary-Butylbenzene | 0.2 | | |
| normal-Butylbenzene | 99.8 | 99.4 | 95.6 95.0 min |
| 1-Phenylbutene-2 | 0.6 | | |
| other Alkylbenzenes | 0.2 | 0.4 | |
| other Phenylbutenes | | | |
| secondary-Amylbenzene | | | |
| 3-Phenylpentane | | | |
| 2-Phenyl-2-methylbutane | | | |
| Light Amylbenzenes | | | |
| Alkylbenzenes | | | |
| secondary-Butyl Chloride | | | |
| Butanes | | | |
| Purity by freezing point, mol % | 99.50 | 99.2 | 99.0 min |
| Freezing point, F | -126.35* | | |
| Boiling point, F | 361.89* | | |
| Distillation range, F | | | |
| Initial boiling point | | | |
| 10% Condensed | | | |
| 50% Condensed | | | |
| 90% Condensed | | | |
| Dry point | | | |

(continued)


Table 2.110: (continued)

| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
|---------------------------------------|----------------|------------|-----------------|
| Specific gravity of liquid at 60/60 F | 0.8646* | 0.865 | 0.865 |
| at 20/4 C | 0.86013* | 0.860 | 0.860 |
| API gravity at 60 F | | 32.1 | 32.1 |
| Density of liquid at 60 F, lbs/gal | | 7.20 | 7.20 |
| Refractive index, 20/D | 1.48979* | 1.490 | 1.490 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Color Alpha | | | |
| Flash point, approximate, F | | 160 | 160 |
| Flammability limits, volume % in air | | | |
| Lower | 0.8 | | |
| Higher | 5.8 | | |

*Literature values.

Normal Butylbenzene is sometimes stabilized with tertiary-butylcatechol (TBC) which can be removed by distillation.

Table 2.111: Isobutylbenzene (4)

| FORMULA |  | | |
|---------------------------------------|-----------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Toluene | 0.01 | 0.2 | 0.5 |
| Isopropylbenzene | | | |
| tertiary-Butylbenzene | | | |
| Isobutylbenzene | 99.97 | 99.6 | 99.1 |
| secondary-Butylbenzene | | | |
| normal-Butylbenzene | 0.02 | 0.2 | 0.4 |
| Water, ppm, weight | | < 100 | < 100 |
| Purity by freezing point, mol % | 99.80 | 99.3 99.0 min | 98.5 95.0 min |
| Freezing point, F | -60.66* | | |
| Boiling point, F | 342.97* | | |
| Distillation range, F | | | |
| Initial boiling point | | 340 | 337 |
| Dry point | | 343 | 344 |
| Specific gravity of liquid at 60/60 F | 0.8576* | 0.858 | 0.858 |
| at 20/4 C | 0.85321* | 0.853 | 0.853 |
| API gravity at 60 F | | 33.4 | 33.4 |
| Density of liquid at 60 F, lbs/gal | | 7.14 | 7.14 |
| Vapor pressure at 130 F, psia | 0.21 | 0.2 | 0.2 |
| Refractive index, 20/D | 1.48646* | 1.486 | 1.486 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | | |
| Aniline point, F | | | |
| Bromine number | | | |
| Flash point, approximate, F | | 140 | 140 |

*Literature values.

Table 2.112: sec-Butylbenzene (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 - \text{CH} - \text{CH}_2 - \text{CH}_3 \\ \quad \\ \text{CH} \quad \text{C} \quad \text{CH} \\ \quad \\ \text{CH} \quad \text{CH} \end{array}$ | | |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Toluene | | | |
| Isopropylbenzene | | | |
| tertiary-Butylbenzene | 0.02 | 0.6 | 0.9 |
| Isobutylbenzene | | | 0.1 |
| secondary-Butylbenzene | 99.98 | 99.4 | 98.9 |
| normal-Butylbenzene | | | 0.1 |
| Water, ppm, weight | | | |
| Purity by freezing point, mol % | 99.93 | 99.2 99.0 min | 96.7 95.0 min |
| Freezing point, F | -103.85* | | |
| Boiling point, F | 343.95* | | |
| Distillation range, F | | | |
| Initial boiling point | | | 338 |
| Dry point | | | 343 |
| Specific gravity of liquid at 60/60 F | 0.8684* | 0.866 | 0.866 |
| at 20/4 C | 0.86207* | 0.862 | 0.862 |
| API gravity at 60 F | | 31.9 | 31.9 |
| Density of liquid at 60 F, lbs/gal | | 7.21 | 7.21 |
| Vapor pressure at 130 F, psia | 0.20 | 0.2 | 0.2 |
| Refractive index, 20/D | 1.49020* | 1.490 | 1.490 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Aniline point, F | | -20 | |
| Bromine number | | 0.5 | |
| Flash point, approximate, F | | 126 | 126 |

*Literature values.


Secondary-Butylbenzene is sometimes stabilized with tertiary-butylcatechol (TBC) which can be removed by distillation.

Table 2.113: tert-Butylbenzene (4)

| FORMULA | $\begin{array}{c} \text{CH}_3 \\ \\ \text{CH}_3 - \text{C} - \text{CH}_3 \\ \quad \\ \text{CH} \quad \text{C} \quad \text{CH} \\ \quad \\ \text{CH} \quad \text{CH} \end{array}$ | | |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------|
| PROPERTIES | RESEARCH GRADE | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | | |
| Toluene | | | |
| Isopropylbenzene | | 0.1 | 0.5 |
| tertiary-Butylbenzene | 99.99 | 99.8 | 98.2 |
| Isobutylbenzene | | | |
| secondary-Butylbenzene | 0.01 | 0.1 | 1.1 |
| normal-Butylbenzene | | | 0.2 |
| Water, ppm, weight | | | |
| Purity by freezing point, mol % | 99.82 | 99.4 99.0 min | 97.0 95.0 min |
| Freezing point, F | -72.13* | | |
| Boiling point, F | 336.41* | | |
| Distillation range, F | | | |
| Initial boiling point | | 336 | 331 |
| Dry point | | 337 | 336 |
| Specific gravity of liquid at 60/60 F | 0.8710* | 0.871 | 0.871 |
| at 20/4 C | 0.86650* | 0.866 | 0.866 |
| API gravity at 60 F | | 31.0 | 31.0 |
| Density of liquid at 60 F, lbs/gal | | 7.25 | 7.25 |
| Vapor pressure at 130 F, psia | 0.23 | 0.2 | 0.2 |
| Refractive index, 20/D | 1.49266* | 1.493 | 1.493 |
| Color, Saybolt | +30 | +30 | +30 |
| Acidity, distillation residue | | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | 0.0005 | 0.0005 |
| Aniline point, F | | | |
| Bromine number | | | |
| Flash point, approximate, F | | 140 | 140 |

*Literature values.


Table 2.114: 1-Phenylbutene-2 (4)

| FORMULA |  |
|---------------------------------------|-----------------------------------------------------------------------------------|
| PROPERTIES | TECHNICAL GRADE |
| Composition, weight percent | |
| secondary-Butylbenzene | |
| normal-Butylbenzene | |
| 1-Phenylbutene-2 | 96.4 95.0 min |
| other Alkylbenzenes | |
| other Phenylbutenes | 3.6 |
| secondary-Amylbenzene | |
| 3-Phenylpentane | |
| 2-Phenyl-2-methylbutane | |
| Light Amylbenzenes | |
| Alkylbenzenes | |
| secondary-Butyl Chloride | |
| Butenes | |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 360 |
| 10% Condensed | |
| 50% Condensed | |
| 90% Condensed | |
| Dry point | 367 |
| Specific gravity of liquid at 60/60 F | 0.888 |
| at 20/4 C | |
| API gravity at 60 F | 27.8 |
| Density of liquid at 60 F, lbs/gal | 7.40 |
| Refractive index, 20/D | 1.511 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | 0.0005 |
| Color Alpha | |
| Flash point, approximate, F | 160 |
| Flammability limits, volume % in air | |
| Lower | |
| Higher | |

*Literature values.


1-Phenylbutene-2 is sometimes stabilized with tertiary-butylcatechol (TBC) which can be removed by distillation.

Table 2.115: sec-Amylbenzene (4)

| FORMULA |  | |
|---------------------------------------|-------------------------------------------------------------------------------------|-----------------|
| PROPERTIES | PURE GRADE | TECHNICAL GRADE |
| Composition, weight percent | | |
| secondary-Butylbenzene | | |
| normal-Butylbenzene | | |
| 1-Phenylbutene-2 | | |
| other Alkylbenzenes | | |
| other Phenylbutenes | | |
| secondary-Amylbenzene | 99.5 99.0 min | 97.3 95.0 min |
| 3-Phenylpentane | 0.1 | 0.8 |
| 2-Phenyl-2-methylbutane | 0.4 | 1.9 |
| Light Amylbenzenes | | |
| Alkylbenzenes | | |
| secondary-Butyl Chloride | | |
| Butenes | | |
| Purity by freezing point, mol % | | |
| Freezing point, F | | |
| Boiling point, F | 379.4* | |
| Distillation range, F | | |
| Initial boiling point | 374 | 370 |
| 10% Condensed | | |
| 50% Condensed | | |
| 90% Condensed | | |
| Dry point | 380 | 380 |
| Specific gravity of liquid at 60/60 F | 0.8628* | 0.863 |
| at 20/4 C | 0.8585 | 0.858 |
| API gravity at 60 F | | 32.5 |
| Density of liquid at 60 F, lbs/gal | | 7.18 |
| Refractive index, 20/D | 1.4876* | 1.488 |
| Color, Saybolt | +30 | +30 |
| Acidity, distillation residue | neutral | neutral |
| Nonvolatile matter, grams/100 ml | | |
| Color Alpha | | |
| Flash point, approximate, F | 155 | 155 |
| Flammability limits, volume % in air | | |
| Lower | | |
| Higher | | |

*Literature values.

Table 2.116: Mixed Amylbenzenes (4)

| FORMULA |  |
|-----------------------------|-------------------------------------------------------------------------------------|
| PROPERTIES | PURE GRADE |
| Composition, weight percent | |
| secondary-Butylbenzene | |
| normal-Butylbenzene | |
| 1-Phenylbutene-2 | |
| other Alkylbenzenes | |
| other Phenylbutenes | |
| secondary-Amylbenzene | 38.8 |
| 3-Phenylpentane | 39.2 |
| 2-Phenyl-2-methylbutane | 21.7 |
| Light Amylbenzenes | 0.2 |
| Alkylbenzenes | 0.1 |
| secondary-Butyl Chloride | |
| Butenes | |

| PROPERTIES | PURE GRADE |
|---------------------------------------|------------|
| Distillation range, F | |
| Initial boiling point | 369.6 |
| 10% Condensed | 370.4 |
| 50% Condensed | 371.6 |
| 90% Condensed | 372.0 |
| Dry point | 372.4 |
| Specific gravity of liquid at 60/60 F | |
| at 20/4 C | 0.864 |
| API gravity at 60 F | |
| Density of liquid at 60 F, lbs/gal | 7.25 |
| Refractive index, 20/D | 1.490 |
| Color, Saybolt | +30 |
| Acidity, distillation residue | neutral |
| Nonvolatile matter, grams/100 ml | |
| Color Alpha | |
| Flash point, approximate, F | 155 |
| Flammability limits, volume % in air | |
| Lower | |
| Higher | |

*Literature values.

Table 2.117: DIPENTENE No. 122 Terpene Solvent (28)

DIPENTENE NO. 122[®] a terpene solvent with a pleasant terpene odor obtained by fractionation of oils extracted from pinewood, meets the Federal specification for commercial dipentene. It can be used as a component in solvent systems for oleoresin-based coatings, and as an antiskinning agent. Other uses include the production of dipping finishes and various chemical specialties.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|-------------------------------------------------------|-------------------|
| Color, Hazen (APHA) ¹ , max | 0.5 |
| Specific gravity at 15.6/15.6°C | 0.845-0.865 |
| Refractive index at 20°C | 1.472-1.477 |
| ASTM Distillation, °C 1st cc - 95% | 168 min - 188 max |
| <small>(a) American Public Health Association</small> | |

Typical Properties

| | |
|---------------------------------|----------|
| Specific gravity at 15.6/15.6°C | 0.853 |
| Refractive index at 20°C | 1.475 |
| Distillation range, °C, 5% | 175 |
| 95% | 183 |
| Freezing point, °C | < -40 |
| Flashpoint, TCC, °C (°F) | 49 (120) |
| Aniline point, °C | < 0 |
| Unpolymerized residue, % | 1.5 |
| Monocyclic terpenes, % | 91 |
| Dipentene, % | 37 |
| Kauri-butanol value | 62 |

Outstanding Characteristics

High clarity; near colorlessness; pleasant odor; high solvency; good antiskinning properties; good wetting and dispersing properties for pigments.

Solvent for synthetic and natural resins, rubber, waxes, raw and polymerized oils, and metallic driers.

Table 2.118: SOLVENOL 2 Terpene Solvent (28)

A High-Solvency Terpene Hydrocarbon

SOLVENOL[®] 2 terpene solvent is a pale yellow to near colorless liquid that has high solvency for resins, waxes, and greases. It is exceptionally effective as a softening and swelling agent for rubber. Of pine-wood origin, it is a mixture of monocyclic terpenes with a stronger solvency than turpentine for waxes and resins.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|-----------------------------------------------------|-------------|
| Specific gravity at 15.6/15.6°C | 0.845-0.870 |
| Distillation range, °C, first cm ³ , min | 165 |
| 95%, max | 195 |

Typical Properties

| | |
|------------------------------------------|-------------|
| Specific gravity at 15.6/15.6°C | 0.860 |
| Distillation range, °C, 5% | 166 |
| 95% | 183 |
| Color, Hazen | 45 |
| Hercules terpene | 0.3 |
| Freezing point, °C | < -40 |
| Flashpoint, TCC, °F (°C) | 115 (46) |
| Kauri-butanol value | 80 |
| Aniline point, °F (°C) | < 23 (< -5) |
| Density at 60°F (15.6°C), lbs/gal (kg/l) | 7.17 (.86) |

Outstanding Characteristics

Clear, near colorless liquid; high solvent power; highly effective softening and swelling agent for natural and synthetic rubbers.

Table 2.119: SOLVENOL 226 Terpene Solvent (28)

SOLVENOL® 226 terpene solvent is a pale yellow to near colorless liquid that has high solvency for resins, waxes, and greases. Of pinewood origin, it is a mixture of monocyclic terpenes rich in *para*-menthane. It is used as a solvent in the manufacture of cleaning compounds; textile dyes; waxes and polishes for floor, furniture, leather, and shoes; and in other chemical specialties.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|---------------------------------|-------------|
| Specific gravity at 15.6/15.6°C | 0.829-0.840 |
| Distillations range, °C | |
| 5%, min | 158 |
| 95%, max | 180 |

Typical Properties

| | |
|------------------------------------------|----------|
| Specific gravity at 15.6/15.6°C | 0.838 |
| Refractive index at 20°C | 1.460 |
| Distillation range, °C | |
| 5%, min | 165 |
| 95%, max | 172 |
| Color, Hazen | 45 |
| Freezing point, °F(°C) | -40 |
| Flashpoint (SETA), °F(°C) | 108 (42) |
| Kauri-butanol (KB) value | 62 |
| Aniline point, °F (°C) | 73 (23) |
| Density at 60°F (15.6°C), lbs/gal (kg/l) | 7 (0.84) |
| Unpolymerized residue, % | 30 |

Outstanding Characteristics

Clear, near colorless liquid; high solvent power; excellent wetting and penetrating properties.

Table 2.120: HERCULES Steam-Distilled Wood Turpentine (28)

HERCULES® SDW TURPENTINE is a clear, water-white liquid that complies with all requirements of Federal and ASTM specifications for pure spirits of turpentine.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|---------------------------------|-------------|
| Specific gravity at 15.6/15.6°C | 0.860-0.866 |
| Refractive index at 20°C | 1.465-1.469 |
| ASTM distillation range, °C, 5% | 154.0 |
| 95% | 170.0 |

Typical Properties

| | |
|------------------------------------------|------------|
| Specific gravity at 15.6/15.6°C | 0.861 |
| Refractive index at 20°C | 1.468 |
| Unpolymerized residue, % | 1.3 |
| Initial boiling point, °C | 150 |
| ASTM distillation below 170°C, % | 98 |
| Freezing point, °C | < -40 |
| Aniline point, °C | 21 |
| Kauri-butanol value | 56 |
| Moisture | trace |
| Flashpoint, TCC, °C(°F) | 36 (97) |
| Color (Hercules terpene) | 0.1 |
| Density at 60°F (15.6°C), lbs/gal (kg/l) | 7.18 (.86) |

Outstanding Characteristics

Clarity; water-white color; typical turpentine odor; high solvency power; excellent wetting and penetrating properties; uniform purity.

Solvent for raw and bodied drying oils, and for natural and synthetic resins and waxes.

Table 2.121: HERCULES alpha-Pinene (28)

HERCULES® alpha-pinene is a clear, water-white product obtained by fractional distillation of steam-distilled wood turpentine. It consists predominantly of the bicyclic terpene hydrocarbon, alpha-pinene. Hercules alpha-pinene can be used wherever a high-purity-grade alpha-pinene is required.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|----------------------------------------|---------------|
| Specific gravity at 15.6°C/15.6°C | 0.8620-0.8645 |
| Refractive index at 20°C | 1.4655-1.4670 |
| Distillation range, °C, 5% min-95% max | 155-159 |

Typical Properties

| | |
|-------------------------------------------|------------|
| Specific gravity at 15.6°C/15.6°C | 0.863 |
| Refractive index at 20°C | 1.466 |
| Components, % | |
| alpha-pinene | 84.7 |
| Camphene | 13.9 |
| beta-pinene | 0.5 |
| Distillation range, °C, 5%-95% | 156-158 |
| Color, Hercules terpene | 0.1 |
| Freezing point, °C | < -40 |
| Flashpoint, Tag closed up, °F (°C) | 91 (33) |
| Kauri-butanol value | 52 |
| Density at 60°F (15.6°C), lbs./gal (kg/l) | 7.2 (0.86) |

Outstanding Characteristics

Clear, water-white, high purity, chemically reactive, excellent solvent, narrow distillation range.

Table 2.122: Selected Properties of Some Common Terpene Solvents (43)

| <u>SOLVENT</u> | <u>KAURI BUTANOL</u> | <u>BOIL. RANGE, °C</u> <u>INITIAL DRY PT.</u> | <u>SPEED OF EVAPOR., MINUTES</u> | <u>FLASH PT. TCC °F</u> | <u>Solubility Parameter (Cal/cc)^{1/2}</u> |
|----------------|----------------------|--------------------------------------------------|----------------------------------|-------------------------|----------------------------------------------------|
| Dipentenes | 62 | 175 188 | 33.0 | 125 ^a | |
| Gum Turpentine | 65 | 155 183 | 16.0 | 93 ^a | 8.2 |
| Limonene 125 | 58 | 162 179 | | 112 | |
| Pine Oil | >500 | 204 227 | 500.0 | 188 ^a | 8.61 |
| Terpene SW | >500 | 209 234 | 500.0 | 180 | |

^a "Organic Solvents," Central Solvents & Chemical Co.

Table 2.123: Arizona Terpene Products (5)

ACINTENE® A ALPHA-PINENE

ACINTENE® A is a clear, colorless liquid with a mild turpentine-like odor which is very high in alpha-pinene content. ACINTENE® A is miscible in alcohols and insoluble in water.


PRODUCT PROPERTIES

| | Specifications | Typical Analysis |
|----------------------------------------------|----------------|------------------|
| Color, APHA ¹ | 20 max. | 5 |
| Distillation Range, °C ² | | |
| First Drop | | 156.3 |
| 97% | | 157.4 |
| Moisture, % ³ | <0.1 | <0.1 |
| Kauri-butanol Value ⁴ | | 68 |
| Composition: ⁵ | | |
| Alpha-pinene, % | 91 min. | 93.0 |
| Camphene, % | | 2.5 |
| Beta-pinene, % | | 2.5 |
| Other Terpenes, % | | 2.0 |
| Specific Gravity, 15.5°/15.5°C ² | | 0.8636 |
| Weight Per Gallon, 15°C, lb | | 7.19 |
| Refractive Index, 20°C ² | | 1.4661 |
| Flash Point, Closed Cup, °C(°F) ⁶ | | 33(91) |

Methods of Analysis:

1. ASTM D 1209-79
2. ASTM D 802-82
3. Arizona Method
4. ASTM D 1133-86
5. By Gas Chromatography. Arizona Chemical Company method furnished upon request
6. ASTM D 93-85 by tag-closed tester

ACINTENE® B Beta Pinene



ACINTENE B Beta Pinene is obtained by fractional distillation of sulfate turpentine. It is used as an intermediate in the manufacture of synthetic resins.

| Product Characteristics | Specification | Typical Analysis | Method of Analysis |
|---------------------------------|---------------|------------------|--------------------|
| Color, APHA | 20 max. | 5 | ASTM D1209-62 |
| Distillation Range, °C: | | | ASTM D233-65 |
| First Drop | 165-167 | 166 | |
| 90% | 167-169 | 169 | |
| 97% | 169-173 | 172 | |
| Specific Gravity, 15.5°C/15.5°C | 0.8685 min. | 0.8708 | ASTM D233-65 |
| | 0.8715 max. | | |
| | | 0.8654 | |
| Refractive Index, 20°C | 1.4760 min. | 1.4774 | ASTM D233-65 |
| | 1.4780 max. | | |
| Flash Point, Closed Cup, °F | | 100 | ASTM D56-64 |
| Moisture, % | 0.0 | 0.0 | Arizona Method |
| Composition by GLC: | | | |
| α-Pinene, % | | 7.5 | |
| β-Pinene, % | | 76.3 | |
| Dipentene, % | | 11.0 | |
| Camphene, % | | 1.7 | |
| p-Cymene, % | | 0.5 | |
| Others, % | | 3.0 | |
| Pounds Per Gallon, 15°C | | 7.25 | |
| 25°C | | 7.19 | |

(continued)

Table 2.123: (continued)

ACINTENE® DP DIPENTENE

ACINTENE® DP is a clear, yellowish liquid with a lemon-pine-like odor. It is obtained by several fractional distillations of crude sulfate turpentine. ACINTENE DP is not a co-product of any process and is sometimes referred to as a "natural" dipentene. ACINTENE DP is miscible in alcohols and insoluble in water.

PRODUCT PROPERTIES

| | Specifications | Typical Analysis |
|----------------------------------------------|----------------|------------------|
| Color, Gardner ¹ | 2 max. | <1 |
| Distillation Range, °C ² | | |
| First Drop | | 177 |
| 95% | | 187 |
| Kauri-Butanol Value ³ | | 90 |
| Composition: ⁴ | | |
| Alpha-Pinene, % | | <1 |
| Beta-Pinene, % | | 5 |
| Camphene, % | | <1 |
| Myrcene/Carene, % | | 1 |
| Dipentene, % | | 73 |
| Para-Cymene/Terpinolene, % | | 10 |
| Terpene Alcohols, % | | <1 |
| Other Terpenes, % | | 10 |
| Specific Gravity, 15.5°/15.5°C ² | | 0.8558 |
| Weight Per Gallon, 15°C, lb | | 7.13 |
| Refractive Index, 20°C ² | | 1.4779 |
| Flash Point, Closed Cup, °C(°F) ⁵ | | 54 (130) |
| * Includes some beta-phellandrene. | | |

Methods of Analysis:

1. ASTM D 1544-86; Using Gardner color disks - 1963 standard, 50% in heptane.
2. ASTM D 802-82
3. ASTM D 1133-86
4. By Gas-Liquid Chromatography. Arizona Chemical Company method furnished on request.
5. ASTM D 93-85 by tag-closed tester

ACINTENE® CRDB TERPENE**PRODUCT PROPERTIES**

| | Specification | Typical Analysis |
|----------------------------------------------|---------------|------------------|
| Color, Gardner ¹ | | 15 |
| AN | | <0.5 |
| Moisture, % ² | | 0 |
| Composition: ³ | | |
| Total Terpene Alcohols, % | | 36 |
| Alpha-Terpineol, % | | 21 |
| Cis-Anethole, % | | 4 |
| Trans-Anethole, % | 15 min. | 19 |
| Methyl Chavicol, % | 10 min. | 15 |
| Other Terpene Alcohols, % | | 15 |
| Other, % | | 26 |
| Specific Gravity, 15.5°/15.5°C ² | | 0.959 |
| Weight Per Gallon, 15°C, lb | | 7.8 |
| EPA 24 Volitals | | 99.8 |
| Flash Point, Closed Cup, °C(°F) ⁴ | | 91(195) |

METHODS OF ANALYSIS:

1. ASTM D 1544-86
2. ASTM D 803-93
3. By Gas-Liquid Chromatography. Arizona Chemical Company method furnished on request.
4. ASTM D 93-85 by Tag-Closed Tester

(continued)

Table 2.123: (continued)

ACINTENE[®] N LIQUID TERPENE POLYMER

ACINTENE[®] N is a dark brown, very viscous liquid obtained from the fractional distillation of sulfate turpentine. It is composed of terpene dimers and polymers. ACINTENE N is soluble in turpentine, aromatic solvents, and mineral spirits.

PRODUCT PROPERTIES

| | Specifications | Typical Analysis |
|----------------------------------------------|---------------------|------------------|
| Color, Gardner ¹ | 18 max. | 17 |
| Moisture, % ² | 0.2 max. | 0.05 |
| Specific Gravity, 15.5°/15.5°C ² | | 0.963 |
| Weight Per Gallon, 15°C, lb | | 8.02 |
| Viscosity, Gardner-Holdt, 25°C ² | Z ₈ min. | Z ₈ + |
| Viscosity, cps, 25°C | | 3400 |
| Flash Point, Closed Cup, °C(°F) ³ | 150 (300) min. | 163 (325) |

- Methods of Analysis:**
1. ASTM D 1544-86; Using Gardner color disks - 1963 standard, 50% in heptane
 2. ASTM D 802-82
 3. ASTM D 93-85 by tag-closed tester

ACINTENE[®] L TURPENTINE BOTTOMS FRACTION

ACINTENE[®] L is a dark brown, viscous liquid obtained from the fractional distillation of sulfate turpentine. It is composed of diterpenes, triterpenes, and higher molecular-weight terpene polymers. ACINTENE L is soluble in turpentine, aromatic solvents, and mineral spirits.

PRODUCT PROPERTIES

| | Typical Analysis |
|----------------------------------------------|------------------|
| Color, Gardner ¹ | 13+ |
| Specific Gravity, 15.5°/15.5°C ² | 0.96 |
| Weight Per Gallon, 15°C, lb | 8.00 |
| Viscosity, Gardner-Holdt, 25°C ² | Z ₂ |
| Viscosity, cps, 25°C | 3400 |
| Flash Point, Closed Cup, °C(°F) ³ | 163 (325) |

- Methods of Analysis**
1. ASTM D 1544-86; Using Gardner color disks - 1963 standard, 50% in heptane
 2. ASTM D 802-82
 3. ASTM D 93-85 by tag-closed tester

COMPARATIVE DATA

Table 2.124: Amoco PANASOL Solvents (20)

| Panasol solvents sales specifications* | | | | |
|------------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| | Panasol AB-130 | Panasol AN-2K | Panasol AN-3N | Panasol AN-3S |
| Specific gravity | | | | |
| at 16°C(61°F), ASTM D4052 | 0.860 - 0.890 | 0.934 - 0.947 | 0.979 - 1.007 | 0.979 - 1.007 |
| at 25°C/25°C, ASTM D4052 | — | — | — | — |
| Distillation point, ASTM D86 | | | | |
| Initial boiling point, °C (°F), min. | 149(300) | 177 (350) | 210 (410) | 232 (450) |
| 95% boiling point, °C (°F) | 202(395) | — | — | — |
| End point, °C (°F), max. | — | 288 (550) | 288 (550) | 288 (550) |
| Flash point, ASTM D56, TCC, | | | | |
| °C (°F), min. | 38(100) | 63(145) | — | — |
| °C (°F), max. | 57(135) | — | — | — |
| Flash point, ASTM D93, PMCC | | | | |
| °C (°F), min. | — | — | 95(203) | 95(203) |
| Color, ASTM D1500, max. | 1.0 | 2.0 | 2.0 | 2.0 |
| Appearance at 16°C(61°F), visual test | clear, no free suspended matter | clear, no free suspended matter | clear, no free suspended matter | clear, no free suspended matter |
| Aromatics, ASTM D1319, vol %, min. | 98 | 78 | 95 | 95 |
| Copper corrosion, ASTM D849 | — | Pass | Pass | Pass |

Panasol Solvents non-specification properties

| Inspection Tests | AN-2K | AN-3N | AN-3S | HAB-500 | AB-130 |
|---------------------------|-------|-------|-------|---------|--------|
| API Gravity @ 60°F | 20.3 | 11.8 | 10.9 | 13.2 | 30.4 |
| Specific Gravity @ 60°F | 0.932 | 0.987 | 0.994 | 0.978 | 0.874 |
| Lbs./Gal. @ 60°F | 7.762 | 8.224 | 8.276 | 8.110 | 7.278 |
| ASTM Color | 0.5 | 0.5 | <1.0 | 3.5 | <0.5 |
| TCC Flash Point, °F | 151 | 208 | >212 | 207 | 127 |
| Mixed Aniline Point, °F | 76.5 | 53.8 | 52.7 | 57.4 | 60.4 |
| Kauri-Butanol Value | — | 98.0 | 89.0 | 65.0 | 85.0 |
| Aromatics, Weight % | 86.0 | 99.5 | 99.2 | 99.8 | 98.6 |
| Mono-aromatics | 31.6 | 13.9 | 5.1 | 8.5 | 96.6 |
| Di-aromatics | 54.4 | 85.6 | 94.1 | 91.3 | 2.0 |
| Molecular Weight by VPO | 175 | 164 | 157 | 196 | 215 |
| Crystallization Point, °F | -48 | -8 | +5 | -45 | -48 |
| Pour Point, °F | -54 | -17 | -11 | <-76 | -71 |
| Distillation, °F | | | | | |
| Initial Boiling Point | 354 | 436 | 470 | 412 | 328 |
| 5 | 376 | 450 | 482 | 466 | 340 |
| 10 | 386 | 456 | 488 | 516 | 344 |
| 20 | 404 | 464 | 492 | 532 | 347 |
| 30 | 418 | 470 | 496 | 546 | 350 |
| 40 | 430 | 474 | 498 | 556 | 351 |
| 50 | 444 | 478 | 501 | 565 | 352 |
| 60 | 456 | 484 | 504 | 572 | 354 |
| 70 | 468 | 490 | 506 | 578 | 356 |
| 80 | 480 | 498 | 510 | 584 | 360 |
| 90 | 494 | 510 | 518 | 594 | 364 |
| 95 | 508 | 522 | 526 | 610 | 369 |
| End Point | 532 | 540 | 543 | 649 | 422 |
| XRF Sulfur Content, ppm | *ND | *ND | *ND | *ND | *ND |
| XRF Chloride Content, ppm | 68 | *ND | 9 | *ND | *ND |

*ND= None detected

Table 2.125: Ashland Aliphatic and Aromatic Solvents (69)

Aliphatic Solvents

| PRODUCT | LB./GAL. | SP. GR. | BOILING RANGE | | FL. PT. | | ANILINE % | | EVAP. RATE ¹ |
|--------------------------|----------|-----------|---------------|---------|------------------|----|-----------------|------|-------------------------|
| | 60° F | 60°/60° F | °C | °F | °F TCC | KB | PT. °F | ARO | |
| Pentane | 5.26 | 0.631 | 34-40 | 94-104 | <0 | 26 | — | 0 | 8.1 |
| Hexane | 5.61 | 0.675 | 65-70 | 149-158 | <0 | 29 | 151 | <0.1 | 6.3 |
| Cyclohexane | 6.53 | 0.784 | 80-82 | 176-180 | 0 | 55 | 65 ² | 0 | 5.5 |
| LACOLENE™ | 6.04 | 0.725 | 91-109 | 195-229 | 18 | 33 | 150 | <1 | 2.4 |
| Super LACOLENE™ | 6.31 | 0.758 | 91-110 | 195-230 | 18 | 47 | 105 | 20 | 2.2 |
| Heptane | 5.79 | 0.695 | 92-100 | 198-212 | 15 | 30 | 146 | 0.1 | 4.5 |
| VM & P Naphtha | 6.20 | 0.744 | 119-141 | 246-285 | 50 | 32 | 153 | <1 | 1.6 |
| 90 Solvent | 6.35 | 0.762 | 140-163 | 285-325 | 86 | 34 | 150 | <1 | 0.33 |
| KWIK DRI™ | 6.44 | 0.772 | 154-182 | 310-360 | 105 | 32 | 154 | <1 | 0.20 |
| Rule 66 Mineral Spirits | 6.44 | 0.773 | 154-196 | 310-385 | 105 | 32 | 155 | <1 | 0.12 |
| Mineral Spirits, NE | 6.50 | 0.780 | 154-205 | 310-400 | 105 | 36 | 139 | 14 | 0.12 |
| Odorless Mineral Spirits | 6.32 | 0.759 | 174-213 | 345-415 | 125 | 28 | 185 | <1 | 0.11 |
| Low Odor Base Solvent | 6.61 | 0.793 | 182-201 | 370-550 | 150 | 30 | 166 | 4 | <0.01 |
| 140 Solvent | 6.54 | 0.785 | 188-288 | 360-394 | 142 | 31 | 160 | 1 | 0.08 |
| Mineral Seal Oil | 6.79 | 0.816 | 254-318 | 490-605 | 265 ³ | 22 | 187 | 8 | <0.01 |

¹n-Butyl Acetate = 1 ²Mixed Aniline Point ³COC

Aromatic Solvents

| PRODUCT | LB./GAL. | SP. GR. | BOILING RANGE | | FL. PT. | | EVAP. | |
|---------------|----------|-----------|---------------|---------|---------|-----|-------|-------------------|
| | 60° F | 60°/60° F | °C | °F | °F TCC | KB | MAP | RATE ¹ |
| Toluene | 7.27 | 0.873 | 110-111 | 230-233 | 45 | 105 | 50 | 1.8 |
| Ethyl Benzene | 7.26 | 0.871 | 135-137 | 275-278 | 59 | 96 | 50 | 0.90 |
| Xylene | 7.23 | 0.866 | 138-143 | 280-289 | 81 | 98 | 52 | 0.86 |
| HI-SOL® 10 | 7.29 | 0.876 | 152-177 | 306-350 | 105 | 90 | 55 | 0.15 |
| HI-SOL 70 | 7.14 | 0.857 | 163-202 | 325-395 | 105 | 70 | 95 | 0.10 |
| HI-SOL 15 | 7.43 | 0.893 | 177-216 | 350-420 | 142 | 89 | 61 | 0.06 |

¹n-Butyl Acetate = 1

Table 2.126: Chemcentral Solvents (Aliphatic and Aromatic) (67)

| ALIPHATIC PETROLEUM NAPHTHAS* | A.P.I. Gravity 60/60°F | H ₂ O = 1 Specific Gravity 60/60°F | Pounds Per Gal. @ 60°F | Coeff. of Expan. Per °C | Δ Spec. Gravity Per °C | Refractive Index @ 20°C | Distillation Range @ 760 mm Hg | | Vapor Press. @ 88°F (mm Hg) |
|-------------------------------|------------------------|-----------------------------------------------|------------------------|-------------------------|------------------------|-------------------------|--------------------------------|-----------|-----------------------------|
| | | | | | | | °C | °F | |
| HEPTANE | 71 | 0.69 | 5.81 | 0.0011 | 0.0066 | 1.3912 | 93.6-98.4 | 200.5-209 | 45.0 |
| HEXANE | 78.4 | 0.675 | 5.61 | 0.0015 | 0.0077 | 1.3812 | 66.7-70.5 | 151-159 | 140.0 |
| KEROSENE | 41.4 | 0.8184 | 6.814 | 0.0009 | 0.0080 | 1.4485 | 177-272 | 350-522 | 0.4 |
| LACQUER DILUENT | 52.1 | 0.7495 | 6.239 | 0.0011 | 0.0066 | 1.4154 | 97-107 | 206-225 | 60.0 |
| #360 SOLVENT | 51.7 | 0.772 | 6.423 | 0.0008 | 0.0048 | 1.4258 | 157-179 | 315-353 | 2.9 |
| MINERAL SEAL OIL | 37.4 | 0.8383 | 6.98 | 0.0009 | 0.0059 | 1.4665 | 278-316 | 532-600 | 0.01 |
| MINERAL SPIRITS | 49.4 | 0.787 | 6.55 | 0.0009 | 0.0057 | 1.4347 | 153-198 | 307-389 | 3.4 |
| ODORLESS MINERAL SPIRITS | 54.2 | 0.7620 | 6.344 | 0.0011 | 0.0070 | 1.4240 | 179-198 | 354-388 | 0.5 |
| RUBBER SOLVENT | 71.6 | 0.700 | 5.83 | 0.0013 | 0.0077 | 1.3908 | 42-135 | 107-275 | 180.0 |
| STODDARD SOLVENT | 51.8 | 0.7720 | 6.427 | 0.0009 | 0.0055 | 1.4278 | 166-198 | 312-387 | 2.0 |
| HEXSOLV | 76.0 | 0.682 | 5.68 | 0.0013 | 0.0075 | 1.3829 | 64.80 | 146-176 | 155.0 |
| VM & P NAPHTHA | 59.9 | 0.739 | 6.15 | 0.0011 | 0.0068 | 1.4273 | 118-142 | 244-287 | 2.0 |
| #460 SOLVENT | 47.7 | 0.79 | 6.85 | 0.0009 | 0.0059 | 1.4404 | 179-254 | 355-490 | 0.23 |
| VM & P NAPHTHA 66 | 56.0 | 0.7547 | 6.283 | 0.0011 | 0.0069 | | 126-142 | 260-288 | 5.2 |
| MINERAL SPIRITS 66 | 52.0 | 0.7724 | 6.430 | 0.0008 | 0.0055 | 1.4277 | 159-194 | 318-360 | 2.6 |
| #140 SOLVENT 66 | 48.8 | 0.785 | 6.541 | 0.0009 | 0.0055 | 1.4340 | 191-203 | 376-397 | 0.5 |

| ALIPHATIC PETROLEUM NAPHTHAS* | Evaporation Rate But. Ace = 1 | Kauri Butanol Value cc. | Aniline Point °F Straight | Flash Point Tag C.C. °F | Explosive Limits % by Vol. in Air | | Composition % By Volume | | | C ₁₃ + Aromatic | Solubility Parameter |
|-------------------------------|-------------------------------|-------------------------|---------------------------|-------------------------|-----------------------------------|-------|-------------------------|----------|----------------------------|----------------------------|----------------------|
| | | | | | Lower | Upper | FIA Saturates | Ole-fins | Aromatics (Tot. Eth. Benz) | | |
| HEPTANE | 4.5 | 30 | 153 | 70 | 1.2 | 6.7 | 99.4 | 0 | 0.1 | 0 | 7.4 |
| HEXANE | 8.1 | 30.5 | 147 | 0 | 1.2 | 7.5 | 100 | 0 | 0 | 0 | 7.3 |
| KEROSENE | | 34 | 144 | 148 | 1.0 | 8.0 | 80 | 1 | 0 | 19 | 7.2 |
| LACQUER DILUENT | 3.9 | 43 | 109 | 70 | 1.2 | 6.8 | 85 | 1 | 15 | 0 | 7.7 |
| #360 SOLVENT | 0.21 | 33 | 152 | 105 | 1.0 | 6.0 | 99.8+ | <1 | 0 | <1 | 7.5 |
| MINERAL SEAL OIL | 0.1 | 27.4 | 189 | 265 | | | 97 | 0 | 0 | 3 | 7.2 |
| MINERAL SPIRITS | 0.12 | 37 | 132 | 104 | 0.7 | 6.0 | 93.1 | 0 | 0 | 6.9 | 7.5 |
| ODORLESS MINERAL SPIRITS | 0.2 | 27 | 185 | 129 | 1.0 | 6.0 | 98+ | 1 | 0 | 1 | 7.1 |
| RUBBER SOLVENT | 6.10 | 34 | 142 | 0 | 1.3 | 7.4 | 96 | 0 | 4 | 0 | 7.4 |
| STODDARD SOLVENT | 0.21 | 33 | 156 | 108 | 0.7 | 6.0 | 99.7 | 0 | 0 | 0.3 | 7.6 |
| HEXSOLV | 8.8 | 31 | 146 | 0 | 1.2 | 6.2 | 99+ | 0 | 1 | 0 | 7.2 |
| VM & P NAPHTHA | 0.45 | 34 | 140 | 52 | 1.1 | 5.0 | 90.5 | 0 | 1.8 | 7.7 | 7.8 |
| #460 SOLVENT | 0.01 | 32 | 155 | 140 | 1.4 | 6.8 | 92 | 1 | 0 | 8 | |
| VM & P NAPHTHA 66 | 1.0 | 35 | 143 | 40 | 0.9 | 6.0 | 99+ | 0 | 1 | 0 | 7.6 |
| MINERAL SPIRITS 66 | 0.13 | 32 | 155 | 108 | 0.7 | 6.0 | 99.8+ | <1 | 0 | <1 | 7.6 |
| #140 SOLVENT 66 | 0.08 | 30 | 162 | 144 | 1.0 | 7.0 | 99.7 | 1 | 0 | 1 | 7.6 |

*The properties listed above for aliphatic petroleum naphthas and aromatic hydrocarbon solvents are typical only. Because these properties may vary by geographic area, it may be necessary to contact your CHEMCENTRAL representative for exact specifications of the specific product you purchase

**Open Cup

| AROMATIC HYDROCARBON SOLVENTS | A.P.I. Gravity 60/60°F | Specific Gravity 60/60°F | Pounds Per Gal. @ 60°F | Coeff. of Expan. Per °C | Δ Spec. Gravity Per °C | Refractive Index @ 20°C | Distillation Range @ 760 mm Hg | | Vapor Press. @ 20°C mm Hg | Evaporation Rate | |
|-------------------------------|------------------------|--------------------------|------------------------|-------------------------|------------------------|-------------------------|--------------------------------|---------|---------------------------|------------------|------------------|
| | | | | | | | °C | °F | | Minutes | n-Butyl Ace. = 1 |
| BENZENE | 28.5 | 0.884 | 7.36 | 0.0012 | 0.0091 | 1.5003 | 80-80.6 | 176-177 | 75 | 1.2 | 4.8 |
| TOLUENE | 30.8 | 0.872 | 7.26 | 0.0011 | 0.0080 | 1.4973 | 110-111 | 230-232 | 38 | 2.7 | 1.5 |
| XYLENE | 31.0 | 0.871 | 7.25 | 0.0010 | 0.0073 | 1.4970 | 138-140 | 281-284 | 9.5 | 10.8 | 0.75 |
| SC #1 | 38.1 | 0.834 | 6.947 | 0.0009 | 0.0059 | 1.4670 | 101.1-116 | 214-240 | 27.5 | | 1.0 |
| SC #2 | 36.2 | 0.8438 | 7.026 | 0.0009 | 0.0059 | 1.4768 | 137.8-153 | 280-308 | 5.2 | | 0.12 |
| SC #3 | 33.0 | 0.860 | 7.158 | 0.0008 | 0.0055 | 1.4897 | 180-199 | 356-390 | 7.0 | | 0.12 |
| SC #28 | 33.3 | 0.859 | 7.15 | 0.0009 | 0.0061 | 1.4882 | 162-201 | 324-394 | | | |
| SC #100 | 30.3 | 0.875 | 7.28 | 0.0008 | 0.0055 | 1.4982 | 155-173 | 311-344 | 1 | 21.0 | 0.19 |
| SC #150 | 25.9 | 0.899 | 7.49 | 0.0008 | 0.0059 | 1.5020 | 183-210 | 362-410 | 1 | 98.0 | 0.04 |
| H.A.N. SOLVENT | 26.9 | 0.893 | 7.44 | 0.0008 | 0.0059 | | 160-293 | 320-560 | <1 | | |

| AROMATIC HYDROCARBON SOLVENTS | Kauri Butanol Value cc. | Aniline Point °F | | Absolute Viscosity cps @ 25°C | Flash Point Tag C.C. °F | Explosive Limits % by Vol. in Air | | Composition % By Volume | | | Solubility Parameters |
|-------------------------------|-------------------------|------------------|-------|-------------------------------|-------------------------|-----------------------------------|-------|-------------------------|----------|----------------------------|-----------------------|
| | | Straight | Mixed | | | Lower | Upper | FIA Saturates | Ole-fins | Aromatics (Tot. Eth. Benz) | |
| BENZENE | 107 | 44 | 52.0 | 0.60 | 10 | 1.7 | 7.1 | 0.1 | 0 | 0 | 9.2 |
| TOLUENE | 105 | | 48.0 | 0.567 | 45 | 1.2 | 7.0 | 0.02 | 0 | 99.98 | 8.9 |
| XYLENE | 98 | | 51.0 | 0.616 | 80 | 1.0 | 7.0 | 0.1 | 0 | 25.7 | 74.2 |
| SC #1 | 86.4 | | 79.0 | | 20 | 1.2 | 7.0 | 27.51 | 0 | 72.5 | 0 |
| SC #2 | 80 | | 78.0 | | 81 | 1.0 | 7.0 | 17.9 | 0 | 9.9 | 78.9 |
| SC #3 | 72.7 | | 81.0 | | 142 | 1.1 | 7.0 | 19.8 | 1.7 | 0 | 77.5 |
| SC #28 | 75 | | 86.0 | | 119 | 1.0 | 6.0 | 25.0 | 0.9 | 0 | 75 |
| SC #100 | 92 | | 56.0 | 0.779 | 110 | 1.0 | 6.5 | 2.0 | 0 | 0 | 98 |
| SC #150 | 92 | | 59.7 | 1.20 | 150 | 0.9 | 6.5 | 2.0 | 0 | 0 | 98 |
| H.A.N. SOLVENT | 78 | | 82.4 | | 140 | | 6.5 | 19.0 | 1 | 0 | 80 |

Table 2.127: Crowley Solvents (60)

METHYL NAPHTHALENE NO. 5

| | <u>Specifications</u> | | <u>Typical</u> | |
|----------------------------------------------|-----------------------|-----------|----------------|------------|
| | <u>°F</u> | <u>°C</u> | <u>°F</u> | <u>°C</u> |
| Specific Gravity 60°/60°F | 0.975/1.010 | | 0.988 | |
| Distillation Range: | | | | |
| IBP, Min. | 400 | 204 | 440 | 227 |
| FBP, Max. | 600 | 315 | 550 | 288 |
| Flash Point, PMCC, Min. (Non-Combustible) | 200 | 93 | 215 | 102 |
| Aromatic Content, Min. | | 95% | | 98% |
| Mixed Aniline Point, ASTM, Max. | 61 | 16.1 | | 11.8 |
| Color, ASTM, Max. | | -2 | | 1.0 |
| Color, Visual | | | | Pale Straw |
| Pour Point | | | 15 | -10 |

AROMATIC SOLVENT 58

SAF-T-SOL 200

| | | | |
|--------------------------|-------------|---------------------------------|---------|
| Specific Gravity @ 60°F. | .9279/.9465 | Specific Gravity @ 60/60°F | 0.987 |
| Distillation Range °F. | | Distillation Range (ASTM D-850) | |
| IBP | 375 | 5% | 430°F |
| 5% | 449 | 50% | 555°F |
| 10% | 465 | 90% | 590°F |
| 50% | 523 | Aniline Point, Mixed ASTM | 15°C |
| 70% | 564 | Color | Yellow |
| 90% | 634 | SSU Viscosity @ 100°F | 40 secs |
| 95% | 666 | Pour Point | -60°F |
| EP | 689 | Flash Point, COC | 250°F |
| Flash Point °F. | 240 | Aromatics | 98% |
| Aromatic Content | 74% | | |
| Color | 2.0 | | |
| SSU Viscosity @ 100°F. | 46.3 | | |
| Pour Point °F. | -25 | | |

Table 2.128: Dynaloy Solvents (37)**DESCRIPTION**

Dynasolve 210 was developed to fill a widespread need for a solvent that would dissolve RTV silicones and silicone conformal coatings effectively at room temperature. Dynasolve 210 dissolves silicones quickly and effectively, but it contains methylene chloride, and may attack other polymers or coatings, such as epoxies and urethanes. Dynasolve 220, 225, and 230, while not quite as fast as Dynasolve 210, contain no chlorinated solvents and are more selective. In most cases, Dynasolve 230 is fastest, followed by Dynasolve 225, and then Dynasolve 220.

Dynasolve 210, 220, 225 and 230, when not contaminated by water, will not attack metal or metal components, with the exception of aluminum. However, aluminum may be etched after extended immersion in these Dynasolves. Contamination of these Dynasolves with water will result in the formation of acids that can attack most metals and other substrates. Test data shows that mu-metal was untouched after a 24 hour immersion in Dynasolve 210. Dynasolve 220, 225, and 230 will not attack acrylic or polycarbonate.

TYPICAL PROPERTIES

| | DYNASOLVE 210 | DYNASOLVE 220 | DYNASOLVE 225 | DYNASOLVE 230 |
|------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Color | Amber | Amber | Amber | Amber |
| Specific Gravity | 1.272 | 0.828 | 0.806 | 0.707 |
| Boiling Point | 104 F | 311-348 F | 235-290 F | 202-222 F |
| Flash Point | None | 110 F | 52 F | 16 F |
| pH | 2.14 | 1.70 | 1.60 | 1.30 |

DYNASOLVE CU-5**SAFETY CLEANING SOLVENT FOR URETHANES****DESCRIPTION**

Dynasolve CU-5 is a unique solvent that was developed for use in cleaning urethane residues and crystallized isocyanates from various types of polyurethane processing equipment.

TYPICAL PROPERTIES

| | |
|-------------------|----------|
| Color: | Clear |
| Specific Gravity: | 1.060 |
| Boiling Point: | 202°C |
| Flash Point: | 191°F CC |
| pH: | 4 - 6 |

DYNASOLVE CU-6**SAFETY CLEANING SOLVENT FOR URETHANES****DESCRIPTION**

Dynasolve CU-6 is a unique solvent that was developed as a non-gelling, higher flash point version of Dynasolve CU-5.

TYPICAL PROPERTIES

| | |
|-------------------|----------|
| Color: | Clear |
| Specific Gravity: | 1.055 |
| Boiling Point: | 202°C |
| Flash Point: | 210°F CC |
| pH: | 4 - 6 |

(continued)

Table 2.128: (continued)

DYNASOLVE XD 16-4**SAFETY SOLVENT FOR REMOVAL OF SILICONE OILS
AND UNCURED SILICONE POLYMERS****DESCRIPTION**

Dynasolve XD 16-4 is an experimental solvent that was developed for removal of silicone oils and uncured silicone polymers from molds, molded parts, and processing equipment.

TYPICAL PROPERTIES

| | |
|-------------------|-------------|
| Color: | Light Amber |
| Specific Gravity: | 1.032 |
| Boiling Point: | >300°F |
| Flash Point: | 262°F |
| pH: | N/A |

DYNASOLVE XD 22-1**SAFETY SOLVENT FOR CLEANING AND DEGREASING****DESCRIPTION**

Dynasolve XD 22-1 is an experimental solvent that was developed for use in cleaning and degreasing applications. Dynasolve XD 22-1 is a non-chlorinated, non-flammable*, non-carcinogenic, non-ozone depleting solvent

TYPICAL PROPERTIES

| | |
|-------------------|----------|
| Color: | Clear |
| Specific Gravity: | 0.780 |
| Boiling Point: | 360°F |
| Flash Point: | 143°F CC |
| pH: | N/A |

DYNASOLVE XD 27-2**SAFETY SOLVENT FOR CIRCUIT BOARD CLEANING AND DEFLUXING****DESCRIPTION**

Dynasolve XD 27-2 is an experimental solvent that was developed for cleaning and defluxing of printed circuit boards. Dynasolve XD 27-2 is a non-chlorinated, non-flammable*, non-carcinogenic, non-ozone depleting solvent designed as a replacement for CFCs.

TYPICAL PROPERTIES

| | |
|-------------------|--------------------|
| Color: | Transparent Yellow |
| Specific Gravity: | 1.000 |
| Boiling Point: | 363°F |
| Flash Point: | 191°F CC |
| pH: | 8 - 9 |

SOLVENT GUIDE UPDATE

- DYNASOLVE DF-1** A replenisher concentrate for Dynaflush. When added to vacuum distilled or spent Dynaflush, will restore its efficiency and loading capacity to original levels.
- DYNASOLVE M-35** A low-toxicity, low volatility solvent for general cleaning applications. Especially suited for use in cleaning of uncured polymers, such as epoxies, urethanes, and silicones. Also very effective for dissolving cured cyanoacrylate instant glues.
- DYNASOLVE XD 16-3** An experimental aqueous solution for use in the removal of silicone oils and uncured silicone polymers from molds, molded parts, and processing equipment. Especially effective for cleaning mold release residue from plastic molded parts, as it will not harm the surface of the parts.

Table 2.129: Eastman Solvents and Diluents (41)

| ACTIVE SOLVENTS | Evaporation Rate | | Formula | Viscosity, cP 8% RS 1/2-s NC @25°C | Viscosity, cP 8% CAB-381-0.5 @ 25°C | Heat Viscosity | | Dilution Ratio ^b | | Blush Resistance % RH @ 60°F | Specific Gravity @ 20/20°C | Weight/Volume @ 20°C | | Flash Point TCC, °F | Freezing Point, °F |
|-------------------------------------|------------------|-----------|-------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------|----------------|----|-----------------------------|---------|------------------------------------|----------------------------------|-------------------------|-------------------|---------------------------|-----------------------|
| | nBuOAc = 1 | Ether = 1 | | | | °C | °C | Toluene | Naphtha | | | Lb/Gal | Kg/L | | |
| METHYLENE CHLORIDE | 14.5 | 0.8 | CH ₂ Cl ₂ | Ins ^c | 22 | 0.33 | 25 | — | — | — | 1.320 ^b | 10.98 ^f | 1.31 ^f | None | -142 |
| TETRAHYDROFURAN | 6.3 | 1.9 | C ₄ H ₈ O | 16 | 13 | 0.48 | 20 | 2.8 | 1.6 | 50 | 0.889 | 7.41 | 0.89 | 6 | -163 |
| ACETONE | 9.1 | 2.1 | CH ₃ COCH ₃ | — | 9 | 0.43 | 20 | 4.1 | 0.9 | 20 | 0.792 | 6.60 | 0.79 | 4 | 138 |
| METHYL ACETATE | 5.3 | 2.3 | CH ₃ COOCH ₃ | 14 | 14 | 0.41 | 20 | 2.9 | 0.9 | 20 | 0.940 | 7.70 | 0.94 | 9 | 144 |
| ETHYL ACETATE, 85%-88% | 4.2 | 2.9 | CH ₃ COOC ₂ H ₅ | 17 | 15 | 0.49 | 25 | 3.3 | 1.2 | 38 | 0.884 | 7.36 | 0.88 | 27 | -118 |
| ETHYL ACETATE, 99% | 4.1 | 3.0 | CH ₃ COOC ₂ H ₅ | 20 | 15 | 0.45 | 25 | 3.1 | 1.1 | 39 | 0.901 | 7.51 | 0.90 | 24 | -118 |
| ISOPROPYL ACETATE | 3.1 | 3.1 | CH ₃ COOC ₃ H ₇ | 17 | 17 | 0.43 | 25 | 3.1 | 1.1 | 41 | 0.902 | 7.51 | 0.90 | 24 | -118 |
| ISOPROPYL ACETATE | 3.0 | 4.0 | CH ₃ COOC ₃ H ₇ | 22 | 17 | 0.60 | 20 | 3.0 | 1.2 | 62 | 0.873 | 7.26 | 0.87 | 35 | 99 |
| METHYL n-PROPYL KETONE | 2.3 | 5.3 | CH ₃ COC ₃ H ₇ | 14 | 13 | 0.68 | 25 | 3.9 | 1.0 | 70 | 0.807 | 6.74 | 0.81 | 46 | -123 |
| n-PROPYL ACETATE | 2.3 | 5.3 | CH ₃ COOC ₃ H ₇ | 22 | 18 | 0.58 | 20 | 3.2 | 1.5 | 65 | 0.889 | 7.39 | 0.89 | 55 | -134 |
| METHYL ISOBUTYL KETONE | 1.6 | 7.6 | CH ₃ COCH ₂ CH ₂ CH ₃ | 8 | 15 | 0.60 | 20 | 3.1 | 1.0 | 78 | 0.802 | 6.67 | 0.80 | 60 | 119 |
| ISOBUTYL ACETATE | 1.4 | 8.6 | CH ₃ COOCH ₂ CH ₂ CH ₃ | 30 | 28 | 0.70 | 20 | 2.7 | 1.0 | 80 | 0.870 | 7.25 | 0.87 | 69 | 146 |
| 2-NITROPROPANE | 1.1 | 11.0 | CH ₃ CHNO ₂ CH ₃ | 60 | 26 | 0.77 | 20 | 1.2 | 0.4 | 82 | 0.988 | 8.23 | 0.99 | 82 | -132 |
| n-BUTYL ACETATE | 1.0 | 12.1 | CH ₃ COOC ₄ H ₉ | 30 | 28 | 0.73 | 20 | 2.7 | 1.2 | 83 | 0.883 | 7.35 | 0.88 | 81 | -101 |
| EASTMAN PM | 0.7 | 17.3 | CH ₃ OCH ₂ CH ₂ CH ₂ OH | 80 | 49 | 1.90 | 20 | 5.2 | 0.9 | 56 | 0.923 | 7.69 | 0.92 | 91 | -139 |
| METHYL ISOAMYL KETONE | 0.5 | 24.2 | CH ₃ COC ₂ H ₄ CH ₂ CH ₂ CH ₃ | 25 | 20 | 0.73 | 25 | 4.1 | 1.2 | 89 | 0.813 | 6.76 | 0.81 | 96 | -101 |
| METHYL AMYL ACETATE | 0.5 | 24.2 | CH ₃ COOCH ₂ (CH ₂) ₄ CH ₃ | 54 | 0 | 0.98 | 25 | 1.7 | 1.0 | 92 | 0.858 | 7.14 | 0.86 | 96 | — |
| EASTMAN PM ACETATE | 0.4 | 30.2 | CH ₃ COOCH ₂ (CH ₂) ₄ OCH ₃ | 65 | 43 | 1.07 | 25 | 2.6 | 0.8 | 92 | 0.970 | 8.06 | 0.97 | 114 ^k | <-89 |
| ALMYL ACETATE (EASTMAN) | 0.4 | 30.2 | CH ₃ COOCH ₂ (CH ₂) ₄ OCH ₃ | — | 27 | 0.98 | 25 | 2.6 | 0.8 | 92 | 0.876 | 7.29 | 0.87 | 105 | -120 |
| METHYL n-AMYL KETONE | 0.4 | 30.2 | CH ₃ COC ₅ H ₁₁ | 23 | 20 | 0.77 | 25 | 3.9 | 1.2 | 93 | 0.818 | 6.80 | 0.82 | 102 | -27 |
| ISOBUTYL ISOBUTYRATE | 0.4 | 30.2 | (CH ₃) ₂ CHCOOCH ₂ CH(CH ₃) ₂ | 100 | Ins ^g | 0.85 | 25 | 1.5 | 0.8 | 92 | 0.855 | 7.13 | 0.86 | 104 | -112 |
| ETHYLENE GLYCOL ETHYL ETHER | 0.3 | 40.3 | C ₂ H ₅ OC ₂ H ₄ OH | 72 | 53 | 2.10 | 20 | 5.0 | 1.1 | 59 | 0.931 | 7.75 | 0.93 | 110 | -137 |
| GLYCOL ETHER | 0.3 | 43.8 | CH ₂ (OH)CH ₂ OH | — | 27 | — | — | — | — | 40 | 0.948 | 7.84 | 0.95 | 110 | — |
| PROPYLENE GLYCOL ETHYL ETHER | 0.2 | 40.3 | C ₃ H ₇ OC ₂ H ₄ OH | — | 46 | — | — | — | — | — | 0.872 ^h | 7.25 | 0.87 | — | — |
| PROPYLENE GLYCOL PROPYL ETHER | 0.2 | 60.5 | C ₃ H ₇ OCH ₂ CH ₂ CH ₂ OH | 95 | Ins | 2.80 | 20 | — | — | — | 0.886 | 7.38 | 0.88 | 119 | -112 |
| ETHYLENE GLYCOL ETHYL ETHER ACETATE | 0.2 | 60.5 | CH ₃ COOC ₂ H ₄ OC ₂ H ₅ | 66 | 45 | 1.30 | 20 | 2.5 | 0.9 | 94 | 0.973 | 8.11 | 0.96 | 130 | -78 |
| MIXED HEPTANE DIACETATE (EASTMAN) | 0.1 | 73.2 | Mix ⁱ | — | 48 | 1.04 | 20 | — | — | — | 0.874 | 7.30 | 0.87 | 112 | -61 |
| DIISOBUTYL KETONE | 0.2 | 60.5 | (CH ₃) ₂ CHCH ₂ COCH ₂ CH(CH ₃) ₂ | 46 | Ins | 0.95 | 20 | 1.5 | 0.8 | 95 | 0.811 | 6.76 | 0.81 | 120 | -43 |

(continued)

Table 2.129: (continued)

| ACTIVE SOLVENTS | Vapor Pressure | | | Surface Tension | | Boiling Range @ 760 Torr, °C | Solubility @ 20°C Wt % | | Azeotrope Wt % Water ^d | | Autoignition Temperature, °C | Refractive Index | | Electrical Resistance, ^e Megaohms | Hansen Solubility Parameters ^f | | | | Gram Molecular Weight | TLV PPM 1992 |
|-------------------------------------|----------------|----|------------|-----------------|----|------------------------------------|---------------------------|----------|-----------------------------------------|--------------------|------------------------------------|---------------------|----|----------------------------------------------------|-------------------------------------------|----------|-------|---------------------|-----------------------------|--------------------|
| | Torr | °C | KPa @ 55°C | Dyne/Cm | °C | | In Water | Water In | BP, °C | Water ^d | | Value | °C | | Total | Nonpolar | Polar | Hydrogen Bonding | | |
| METHYLENE CHLORIDE | 340.0 | 20 | — | 26.5 | 20 | 39-41 | 1.4 | 0.1 | 36.7 | 1.5 | 662 | 1.4242 | 20 | 1.5 | 6.7 | 8.9 | 3.1 | 3.0 | 84.90 | 50 |
| TETRAHYDROFURAN | 143.0 | 20 | — | 26.4 | 25 | 65-67 | Complete | Complete | 45.8 | 4.0 | 321 | 1.4073 | 20 | 2.0 | 9.5 | 8.2 | 2.6 | 3.9 | 72.11 | 200 |
| ACETONE | 185.0 | 20 | 8.1 | 22.3 | 20 | 55.5-57.1 | Complete | Complete | 56.8 | — | 538 | 1.3591 | 20 | <0.01 | 9.6 | 7.1 | — | 3.4 | 58.08 | 750 |
| METHYL ACETATE | 171.0 | 20 | 44.1 | 25.8 | 20 | 55.8-58.2 | 20.0 | — | 50.1 | 5.0 | 501 | 1.3600 | 20 | 0.3 | 9.2 | — | — | 3.7 | 74.09 | 200 |
| ETHYL ACETATE, 85%-88% | 75.0 | 20 | — | 24.2 | 20 | 71-79 | 7.4 | 3.1 | 70.4 | 8.5 | 466 | 1.3693 | 20 | 0.3 | — | — | — | — | 88.11 | — |
| ETHYL ACETATE, 99% | 75.0 | 20 | 45.9 | 23.9 | 20 | 75.5-78 | 7.4 | 3.3 | 70.4 | 8.5 | 485 | 1.3718 | 20 | 20.0 | 8.8 | 7.7 | 2.6 | 3.5 | 88.11 | 400 |
| METHYL ETHYL KETONE | 112.0 | 20 | — | 24.0 | 20 | 79-81 | 2.4 | 1.6 | 81.0 | — | 479 | 1.3772 | 20 | — | — | — | — | — | — | — |
| ISOPROPYL ACETATE | 112.0 | 20 | 6.0 | 22.1 | 20 | 85-90 | 2.4 | 1.8 | 81.0 | 10.0 | 479 | 1.3772 | 20 | 1.0 | 8.4 | — | 2.1 | 4.0 | 102.13 | 250 |
| METHYL n-PROPYL KETONE | 27.8 | 20 | 19.2 | 26.6 | 20 | 101-105 | 3.1 | 4.2 | 83.3 | 19.5 | 449 | 1.3902 | 20 | 0.3 | 8.9 | 7.8 | 3.7 | 2.3 | 86.13 | 200 |
| n-PROPYL ACETATE | 23.0 | 20 | 18.9 | 24.3 | 20 | 99-100 | 2.3 | 2.6 | 82.4 | 14.0 | 457 | 1.3847 | 20 | >20 | 8.6 | 7.5 | 2.1 | 3.7 | 102.14 | 200 |
| METHYL ISOBUTYL KETONE | 15.4 | 20 | 11.7 | 23.6 | 20 | 114-117 | 2.4 | 1.8 | 81.0 | 24.3 | 449 | 1.3958 | 20 | 0.4 | 9.1 | 7.1 | 3.0 | 2.0 | 100.16 | 50 |
| ISOBUTYL ACETATE | 12.0 | 20 | 10.7 | 23.7 | 20 | 112-119 | 0.7 | 1.0 | 87.4 | 16.5 | 427 | 1.3895 | 20 | >20 | 9.2 | 7.4 | 1.8 | 3.1 | 116.20 | 150 |
| 2-NITROPROPANE | 16.0 | 20 | — | 29.9 | 20 | 119-122 | 1.7 | 0.6 | 85.6 | 29.4 | 428 | 1.3944 | 20 | <0.1 | 10.1 | 7.9 | 5.5 | 2.0 | 89.09 | 10 |
| n-BUTYL ACETATE | 10.0 | 20 | 7.4 | 25.1 | 20 | 122-129 | 0.7 | 1.6 | 90.2 | 28.7 | 407 | 1.3941 | 20 | >20 | 8.5 | 7.7 | 1.8 | 3.1 | 116.16 | 150 |
| EASTMAN PM | 8.0 | 20 | 8.1 | 28.3 | 25 | 121 ^g | Complete | Complete | — | — | — | 1.4036 | 20 | 0.4 | 9.9 | 7.6 | 3.1 | 5.7 | 90.12 | 100 |
| METHYL ISOAMYL KETONE | 4.5 | 20 | 3.7 | 25.8 | 20 | 141-148 | 0.2 | 1.2 | 94.7 | 44.0 | 424 | 1.4078 | 20 | 0.6 | 8.3 | 7.6 | 2.8 | 2.0 | 114.19 | 50 |
| METHYL AMYL ACETATE | 3.6 | 20 | — | 22.6 | 20 | 146-153 | 0.1 | 0.6 | 94.8 | 36.7 | — | 1.4008 | 20 | >20 | — | — | — | — | 144.21 | — |
| EASTMAN PM ACETATE | 3.7 | 20 | 3.0 | 26.4 | 20 | 140-153 | 20.0 | 5.9 | — | — | 354 | 1.3995 | 20 | 5.0 | 9.4 | 7.6 | 2.7 | 4.8 | 132.20 | — |
| AMYL ACETATE (EASTMAN) | — | — | — | 28.5 | 25 | 140 | — | — | — | — | — | 1.4115 | 20 | — | — | — | — | — | 130.19 | — |
| METHYL n-AMYL KETONE | 2.14 | 20 | 2.8 | 26.1 | 20 | 147-153 | 0.2 | 1.3 | 95.0 | 48.0 | 393 | 1.4080 | 20 | 0.2 | 8.6 | 7.9 | 2.6 | 2.0 | 114.19 | 50 |
| ISOBUTYL ISOBUTYRATE | 3.2 | 20 | 3.3 | 23.2 | 20 | 144-151 | <0.1 | <0.2 | 95.5 | 39.4 | 432 | 1.3987 | 20 | >20 | 8.1 | 7.4 | 1.4 | 2.9 | 144.22 | — |
| ETHYLENE GLYCOL ETHYL ETHER | 2.8 | 20 | — | 29.3 | 20 | 134-136 | Complete | Complete | 98.2 | 87.0 | 238 | 1.4076 | 20 | <0.1 | 11.5 | 7.9 | 4.5 | 7.0 | 90.12 | 5 |
| CYCLOHEXANONE | — | — | — | 27.7 | 20 | 155-157 | — | — | — | — | 120 | 1.4050 | 20 | — | — | — | — | 2.5 | 98.14 | — |
| PROPYLENE GLYCOL ETHYL ETHER | — | — | — | 24.2 | 25 | 150 | — | — | — | — | — | 1.4110 | 20 | — | — | — | — | 5.4 | 142.20 | — |
| PROPYLENE GLYCOL PROPYL ETHER | — | 20 | — | 27.0 | 25 | 149.8 | Complete | Complete | — | — | — | 1.4121 | 20 | <0.1 | 9.5 | 7.7 | 3.4 | 4.5 | 118.16 | — |
| ETHYLENE GLYCOL ETHYL ETHER ACETATE | 1.0 | 20 | — | 28.2 | 20 | 150-160 | 23.8 | 8.8 | 97.4 | 45.0 | 382 | 1.4030 | 20 | 4.0 | 9.7 | 7.8 | 2.3 | 5.2 | 132.16 | 5 |
| MIXED HEXYL ACETATE (EASTMAN) | — | — | — | 25.0 | 20 | 151-154 | — | — | — | — | 294 | 1.4050 | 20 | — | — | — | — | 2.9 | 144.21 | — |
| DIISOBUTYL KETONE | 1.4 | 20 | 1.4 | 24.6 | 20 | 163-175 | 0.05 | 0.7 | 97.0 | 51.9 | 396 | 1.4150 | 20 | 0.4 | 9.0 | 7.6 | 1.8 | 2.0 | 142.23 | 25 |

Table 2.129: (continued)

| ACTIVE SOLVENTS | Evaporation Rate | | Formula | Viscosity, cP 8% RS 1/2-s NC @25°C | Viscosity, cP 8% CAB-381-0.5 @25°C | Heat Viscosity | | Dilution Ratio ^b | | Blush Resistance % RH @ 80°F | Specific Gravity @ 20°/20°C | Weight: Volume @ 20°C | | Flash Point TCC, °F | Freezing Point, °F |
|-----------------------------------|------------------|----------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------|----------------|-----------|-----------------------------|------------------------|------------------------------------|-----------------------------------|--------------------------|-------------|---------------------------|-----------------------|
| | nBuOAc = 1 | Ether = 1 | | | | cP | °C | Toluene | Naphtha | | | Lb/Gal | Kg/L | | |
| DIMETHYL FORMAMIDE | 0.2 | 60.5 | CHCON(CH ₃) ₂ | 17 | 33 | 0.80 | 25 | — | — | — | 0.951 | 7.92 | 0.95 | 136 | -78 |
| EASTMAN EP | 0.2 | 60.5 | C₃H₇OC₂H₄OH | 86 | ins | 2.42 | 25 | 4.0 | 2.0 | 90 | 0.913 | 7.59 | 0.91 | 120 | <-130 |
| DIACETONE ALCOHOL | 0.12 | 100.8 | (CH ₃) ₂ C(OH)CH ₂ COCH ₃ | 108 | 100 | 1.07 | 25 | — | — | 76 | 0.940 | 7.87 | 0.91 | 136 | -112 |
| EEP (ETHYL 3-ETHOXYPROPIONATE) | 0.12 | 100.8 | C ₂ H ₅ OC ₃ H ₅ O ₂ C ₂ H ₅ | 62 | 54 | 1.20 | 25 | 1.6 | 0.6 | 94 | 0.950 | 7.91 | 0.95 | 136 ^h | <-56 |
| PROPYLENE GLYCOL BUTYL ETHER | 0.08 | 151.3 | C ₄ H ₉ OCH ₂ CH(CH ₃)OH | 124 | ins | 3.40 | 20 | 1.9 | 0.9 | 96 | 0.884 | 7.37 | 0.88 | 138 | -148 |
| EASTMAN EB | 0.09 | 136.0 | C₄H₉OC₂H₄OH | 101 | ins | 6.40 | 20 | 3.4 | 2.1 | 96 | 0.902 | 7.51 | 0.90 | 143 | -103 |
| N METHYL-2-PYRROLIDONE | 0.04 | 302.5 | C ₄ H ₇ NO | 48 | 116 | 1.65 | 25 | — | — | — | 1.027 ^h | 8.55 | 0.94 | 164 | -110 |
| MIXED DODECYL ACETATE ESTERS | 0.03 | 403.4 | Mixture | — | — | 1.74 | 25 | — | — | — | 0.875 | 7.30 | 0.87 | 136 | -83 |
| EASTMAN EB ACETATE | 0.03 | 403.4 | CH₃COOC₂H₄OC₄H₉ | 88 | 65 | 1.80 | 20 | 1.8 | 1.2 | 95 | 0.941 | 7.84 | 0.94 | 160 | -83 |
| 2-ETHYLHEXYL ACETATE | 0.04 | 403.4 | CH ₃ COOCH ₂ CH(C ₂ H ₅)C ₄ H ₉ | 90 | ins | 1.50 | 20 | 1.4 | 0.9 | 94 | 0.873 | 7.27 | 0.87 | 160 | -135 |
| DIPROPYLENE GLYCOL DIMETHYL ETHER | 0.02 | 605.1 | CH ₃ O(CH ₂ CH(CH ₃)) ₂ OCH ₃ | 225 | 130 | 1.20 | 25 | — | — | 90 | 0.951 | 7.91 | 0.95 | 136 | -112 |
| EASTMAN C-11 KETONE | 0.02 | 605.1 | Mixture | 65 | ins | 2.12 | 25 | 2.3 | 1.0 | 96 | 0.840 | 7.02 | 0.84 | 184^l | 11 |
| ISOPHORONE | 0.02 | 605.1 | O=C(C)C(CH ₃)CH ₂ C(CH ₃) ₂ CH ₂ | 110 | 110 | 2.60 | 20 | 6.2 | 1.2 | 97 | 0.922 | 7.67 | 0.92 | 179 | 17 |
| ETHYLENE GLYCOL DIACETATE | 0.02 | 605.1 | (CH ₃ COOCH ₂) ₂ | 220 | 160 | 2.90 | 20 | 1.4 | — | 96 | 1.107 | 9.22 | 1.11 | 191 | -43 |
| EASTMAN DM | 0.02 | 605.1 | CH₃(OC₂H₄)₂OH | 174 | 160 | 3.90 | 20 | 2.3 | imm^m | 76 | 1.023 | 8.51 | 1.02 | 191 | -121 |
| EASTMAN DE | 0.02 | 605.1 | C₂H₅(OC₂H₄)₂OH | 180 | 140 | 4.50 | 20 | 1.9 | imm^m | 76 | 0.990 | 8.25 | 0.99 | 195 | -130 |
| EASTMAN DP | 0.01 | 1,210.2 | C₃H₇(OC₂H₄)₂OH | 190 | ins | 4.12 | 25 | 4.6 | 1.6 | — | 0.963 | 8.04 | 0.96 | 200 | <-90 |
| ETHYLENE GLYCOL HEXYL ETHER | 0.01 | 1,210.2 | C ₆ H ₁₃ OC ₂ H ₄ OH | 120 | ins | 5.20 | 20 | 2.4 | 1.5 | 96 | 0.889 | 7.40 | 0.89 | 179 | -58 |
| EASTMAN DE ACETATE | 0.008 | 1,512.7 | CH₃COO(C₂H₅O)₂C₂H₅ | 162 | 110 | 2.80 | 20 | 2.2 | 0.6 | 92 | 1.012 | 8.42 | 1.01 | 225ⁱ | -13 |
| DIBASIC ESTER | 0.007 | 1,728.9 | CH ₃ COO(CH ₂) ₆ COOCH ₃ | 260 | 143 | 1.17 | 25 | — | — | — | 1.092 | 9.05 | 1.09 | 211 | -4 |
| EASTMAN DB | 0.004 | 4,034.0 | C₄H₉(OC₂H₄)₂OH | 205 | ins | 4.74 | 25 | 3.9 | 1.9 | 85 | 0.955 | 7.94 | 0.96 | 232^f | -105 |
| EASTMAN EEH | 0.003 | 4,034.0 | C₄H₉CH(C₂H₅)CH₂OC₂H₄OH | ins | ins | 7.01 | 25 | — | — | — | 0.892 | 7.42 | 0.89 | 208^k | <-50 |
| EASTMAN DB ACETATE | 0.002 | 6,051.0 | CH₃COO(C₂H₅O)₂C₄H₉ | 186 | 140 | 3.20 | 25 | 1.8 | 0.9 | 96 | 0.980 | 8.16 | 0.98 | 240^g | 26 |
| PROPYLENE GLYCOL DIMETHYL ETHER | 0.002 | 6,051.0 | C ₃ H ₇ OCC(CH ₃) ₂ OCH ₃ | 170 | 170 | 1.20 | 25 | — | — | — | 1.063 ^j | 8.81 | 1.06 | 211 | -11 |
| TEXANOL ESTER-ALCOHOL | 0.002 | 6,051.0 | (CH₃)₂CHCOOCH₂C(CH₃)₂CHOHCH(CH₃)₂ | 1,115 | ins | 18.30 | 20 | — | — | — | 0.950 | 7.90 | 0.95 | 248ⁿ | -58 |
| MIXED TRIDECYL ACETATE ESTERS | 0.001 | 12,100.0 | Mixture | — | — | 4.63 | 25 | — | — | — | 0.880 | 7.30 | 0.88 | 261 | <-60 |

(continued)

Table 2.129: (continued)

| ACTIVE SOLVENTS | Vapor Pressure | | | Surface Tension | | Boiling Range @ 760 Torr, °C | Solubility @ 20°C | | Azeotrope | | Autoignition Temperature, °C | Refractive Index Value °C | Electrical Resistance, ^a Megohms | Hansen Solubility Parameters ¹ | | | | Gram Molecular Weight | TLV PPM 1992 | | | |
|--------------------------------|----------------|----|-------------------------|-----------------|----|------------------------------------|-------------------|----------|-----------|----------------------------|------------------------------------|---------------------------------|---------------------------------------------------|-------------------------------------------|----------|-------|---------------------|-----------------------------|--------------------|--------|--------|-----|
| | Torr | °C | KPa @ 55°C ^c | Dyne/Cm | °C | | In Water | Water In | BP, °C | Wt % Water ^d | | | | Total | Nonpolar | Polar | Hydrogen Bonding | | | | | |
| DIMETHYL FORMAMIDE | 3.1 | 20 | — | 35.2 | 25 | 153 ^e | Complete | Complete | — | — | 445 | 1.4282 | 25 | — | 10.1 | 8.5 | 6.7 | 5.5 | 73.09 | 10 | | |
| EASTMAN EP | 1.3 | 20 | 2.2 | 27.9 | 25 | 149.5–153.5 | Complete | Complete | 98.5 | 73.0 | 235 | 1.4136 | 20 | 0.1 | 11.1 | 7.9 | 4.2 | 6.6 | 104.15 | — | | |
| DIACETONE ALCOHOL | — | — | — | — | — | 135–136 | Complete | Complete | — | — | 103 | 1.4234 | 20 | — | — | — | — | — | 5.3 | 116.16 | 50 | |
| DEP (ETHYL 3-ETHOXYPROPIONATE) | 1.5 | 25 | 1.2 | 27.4 | 23 | 165–172 | 2.9 | 2.2 | 97.0 | 83.0 | 377 | 1.4074 | 20 | 20 | 9.1 | 7.9 | 1.6 | 4.3 | 146.19 | — | | |
| PROPYLENE GLYCOL BUTYL ETHER | 0.6 | 20 | — | 27.4 | 25 | 170.2 ^f | 6.4 | 15.5 | — | — | — | 1.4173 | 20 | 0.4 | 9.6 | 7.5 | 2.2 | 4.5 | 132.20 | — | | |
| EASTMAN EB | 0.6 | 20 | 0.97 | 26.6 | 20 | 169–172.5 | Complete | Complete | 98.8 | 79.2 | 238 | 1.4193 | 20 | <0.2 | 10.2 | 7.8 | 2.5 | 6.0 | 118.17 | 25 | | |
| DIMETHYL PIPERIDONE | — | — | — | — | — | 131 | Complete | Complete | — | — | 187 | 1.4690 | 25 | — | — | — | — | — | 3.5 | 99.10 | — | |
| MIXED DODECYL ACETATE ESTERS | — | — | — | — | — | 160–215 | 0.02 | 0.25 | — | — | 298 | 1.4200 | 20 | >20 | — | — | — | — | — | 172.00 | — | |
| EASTMAN EB ACETATE | 0.29 | 20 | 0.77 | 30.3 | 20 | 186–194 | 1.1 | 1.6 | 98.8 | 71.9 | 340 | 1.4142 | 20 | >20 | 8.9 | 7.5 | 2.2 | 4.3 | 160.21 | — | | |
| 2-ETHYLHEXYL ACETATE | 0.40 | 20 | 0.36 | 25.8 | 20 | 199–205 | 0.03 | 0.6 | 99.0 | 73.5 | 268 | 1.4201 | 20 | >20 | 8.2 | 7.7 | 1.4 | 2.5 | 172.27 | — | | |
| PROPYLENE GLYCOL METHYL ETHER | 0.5 | — | — | 28.1 | 25 | 185–91 | Complete | Complete | — | — | — | 1.4205 | 25 | — | — | — | — | — | 2.8 | 5.5 | 148.20 | 100 |
| EASTMAN C-11 KETONE | — | — | 0.17 | 27.5 | 24 | 200–240 | 0.2 | 0.9 | — | — | 238 | 1.4355 | 20 | 1.5 | 8.1 | 7.9 | 1.0 | 2.0 | — | — | — | |
| ISOPHORONE | 0.18 | 20 | — | 32.3 | 20 | 210–214 | 1.2 | 4.3 | 99.5 | 83.5 | 460 | 1.4781 | 20 | <0.1 | 9.1 | 8.1 | 4.0 | 3.6 | 138.20 | — | 5 | |
| ETHYLENE GLYCOL DIACETATE | 0.2 | 20 | 0.18 | 33.7 | 20 | 187–193 | 16.4 | 7.6 | 99.7 | 84.6 | 482 | 1.4159 | 20 | 5.0 | 9.5 | 7.9 | 2.3 | 4.8 | 146.15 | — | | |
| EASTMAN DM | 0.2 | 20 | 1.4 | 34.8 | 25 | 191–198 | Complete | Complete | — | — | 240 | 1.4268 | 20 | <0.2 | 10.7 | 7.9 | 3.8 | 6.2 | 120.15 | — | | |
| EASTMAN DE | 0.12 | 20 | 0.49 | 32.2 | 20 | 198–204 | Complete | Complete | None | — | 205 | 1.4260 | 20 | <0.2 | 10.7 | 7.9 | 3.8 | 6.2 | 134.17 | — | | |
| EASTMAN DP | 0.05 | 20 | 0.11 | 32.3 | 20 | 202–216 | Complete | Complete | — | — | 204 | 1.4290 | 20 | 0.1 | 10.2 | 7.8 | 3.5 | 5.5 | 148.20 | — | | |
| ETHYLENE GLYCOL HEXYL ETHER | <1.0 | 20 | — | — | — | 208–11 | 1.0 | 18.8 | 99.7 | 91.0 | — | 1.4290 | 20 | 0.3 | — | — | — | — | — | 146.23 | — | |
| EASTMAN DE ACETATE | 0.05 | 20 | 0.16 | 31.7 | 25 | 214–22 | Complete | Complete | 99.2 | 76.0 | 360 | 1.4220 | 20 | 3.0 | 9.4 | 7.9 | 2.5 | 4.5 | 176.21 | — | | |
| DIBASIC ESTERS | — | — | — | — | — | 150–32 | — | — | — | — | — | 1.4220 | 20 | 3.5 | — | — | — | — | 4.1 | 159.00 | — | |
| EASTMAN DB | 0.02 | 20 | 0.04 | 30.0 | 20 | 230–235 | Complete | Complete | None | — | 205 | 1.4316 | 20 | <0.3 | 10.6 | 7.8 | 3.4 | 5.2 | 162.23 | — | | |
| EASTMAN EEH | 0.08 | 20 | 0.06 | 27.6 | 20 | 224–275 | 0.2 | 6.2 | — | — | — | 1.4361 | 20 | 1.5 | 8.4 | 7.8 | 2.0 | 2.5 | — | — | | |
| EASTMAN DB ACETATE | 0.04 | 20 | 0.02 | 30.0 | 20 | 235–250 | 6.5 | 3.7 | 99.8 | 92.0 | 349 | 1.4239 | 20 | >20 | 9.0 | 7.8 | 2.0 | 4.0 | 204.27 | — | | |
| PROPYLENE GLYCOL PHENYL ETHER | — | — | — | — | — | 149.7 | — | — | — | — | — | — | — | — | — | — | — | — | 5.6 | 152.20 | — | |
| TEXANOL ESTER-ALCOHOL | 0.01 | 20 | 0.02 | 28.9 | 20 | 255–260.5 | Ins ^g | 0.9 | — | — | 393 | 1.4423 | 20 | >20 | 9.3 | 7.4 | 3.0 | 4.8 | 216.30 | — | | |
| MIXED TRIDECYL ACETATE ESTERS | 0.03 | 20 | — | 28.0 | 20 | 246–285 | 0.0 | 0.2 | — | — | 302 | 1.4380 | 20 | >20 | 8.0 | 7.7 | 1.2 | 2.0 | 242.00 | — | | |

Table 2.129: (continued)

| LATENT SOLVENTS | Evaporation Rate | | Formula | Viscosity, cP 8% RS 1/2-4 MC @25°C | Viscosity, cP 8% CAB-381-Q5 @25°C | Net Viscosity | | Dilution Ratio ^b @20°C | | Blush Resistance % RH @ 80°F | Specific Gravity @ 20/20°C | Weight/Volume @ 20°C | | Flash Point TCC, °F | Freezing Point, °F |
|----------------------------------------|------------------|-----------|------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------|---------------|----|--------------------------------------|---------|------------------------------------|----------------------------------|-------------------------|-------------------|---------------------------|-----------------------|
| | nBuOAc = 1 | Ether = 1 | | | | cP | °C | Toluene | Naphtha | | | Lb/Gal | Kg/L | | |
| METHYL ALCOHOL | 3.5 | 3.5 | CH ₃ OH | 20 | | 0.60 | 20 | 2.2 | 0.5 | | 0.792 | 6.60 | 0.79 | 50 | — |
| TECSOL INDUS. AND PROPRIETARY SOLVENTS | 1.7-1.9 | — | C ₂ H ₅ OH | | | 1.2-1.5 | 20 | | | | 0.789-0.820 | 6.57-6.83 | 0.79-0.82 | 50 | -173 |
| ISOPROPYL ALCOHOL, 99% | 1.7 | 7.1 | (CH ₃) ₂ CHOH | | | 2.40 | 20 | | | | 0.786 | 6.54 | 0.78 | 55 | -127 |
| n-PROPYL ALCOHOL | 1.0 | 12.1 | C ₃ H ₇ OH | | | 2.00 | 25 | | | | 0.804 | 6.71 | 0.80 | 74 | -197 |
| SECONDARY BUTYL ALCOHOL | 0.9 | 13.4 | CH ₃ CH ₂ CHOHCH ₃ | | | 2.90 | 25 | | | | 0.810 | 6.73 | 0.81 | 72 | — |
| ISOBUTYL ALCOHOL | 0.6 | 20.2 | CH ₃ CH(CH ₃)CH ₂ OH | | | 4.00 | 20 | | | | 0.803 | 6.68 | 0.80 | 85 | -162 |
| n-BUTYL ALCOHOL | 0.5 | 24.2 | C ₄ H ₉ OH | | | 3.00 | 20 | | | | 0.811 | 6.75 | 0.81 | 97 | -129 |
| METHYL ISOBUTYL CARBINOL | 0.3 | 46.3 | CH ₃ CHOHCH ₂ CH(CH ₃) ₂ | | | 3.86 | 25 | | | | 0.805 ^c | 6.69 | 0.80 | 103 | -130 |
| AMYL ALCOHOL (MIXED PRIMARY ISOMERS) | 0.3 | 40.3 | C ₅ H ₁₁ OH | | | 4.30 | 20 | | | | 0.814 ^b | 6.77 ^d | 0.81 ^e | — | -130 |
| CYCLOHEXANOL | 3.05 | 242.0 | CH ₂ (CH ₂) ₄ CHOH | | | 52.70 | 25 | | | | 0.947 ^b | 7.87 ^f | 0.94 ^g | — | — |
| 2-ETHYLHEXANOL | 0.01 | 1,210.2 | C ₄ H ₉ CH(C ₂ H ₅)CH ₂ OH | | | 7.70 | 25 | | | | 0.833 | 6.94 | 0.83 | 164 | -94 |

| LATENT SOLVENTS | Vapor Pressure | | | Surface Tension | | Boiling Range @ 760 Torr, °C | Solubility @ 20°C Wt % | | Azeotrope Wt % Water ^d | Autoignition Temperature, °C | Refractive Index Value | °C | Electrical Resistance, ^e Megohms | Hansen Solubility Parameters ^f | | | | Gram Molecular Weight | TLV PPM 1992 | |
|-----------------------------------------------------|----------------|------|-------------------------|-----------------|----|------------------------------------|---------------------------|-----------------------|-----------------------------------------|------------------------------------|------------------------------|--------|---------------------------------------------------|-------------------------------------------|-------|----------|-------|-----------------------------|--------------------|---------------------|
| | Torr | °C | KPa @ 55°C ^g | Dyne-Cm | °C | | In Water | Water in | | | | | | BP, °C | Total | Nonpolar | Polar | | | Hydrogen Bonding |
| METHYL ALCOHOL | 100.0 | 21.2 | 69.0 | 22.6 | 20 | 64-65 | Complete | Complete | None | — | 463 | 1.3286 | 20 | <0.1 | 14.5 | 7.4 | 6.0 | 10.9 | 32.04 | 200 |
| TECSOL INDUS. AND PROPRIETARY SOLVENTS ^g | — | — | 37.6 ^h | 22.4 | 20 | 74-82 | Complete ^a | Complete ^a | 78.1 | 4.0 | 419 | 1.3614 | 20 | <0.1 | 13.0 | 7.7 | 4.3 | 9.5 | 46.07 | — |
| ISOPROPYL ALCOHOL, 99% | 32.8 | 20 | 30.8 | 21.3 | 20 | 80.8-83.3 | Complete | Complete | 80.3 | 12.6 | 360 | 1.3776 | 20 | <0.2 | 11.5 | 7.7 | 3.0 | 8.0 | 60.10 | 400 |
| n-PROPYL ALCOHOL | 14.5 | 20 | 15.7 | 23.8 | 20 | 96-98 | Complete | Complete | 87.0 | 28.3 | 413 | 1.3856 | 20 | <0.2 | 12.0 | 7.8 | 3.3 | 8.5 | 60.10 | 200 |
| SECONDARY BUTYL ALCOHOL | 12.0 | 20 | — | 24.0 | 20 | 98-101 | 20.6 | 30.7 | 87.0 | 26.8 | 406 | 1.3972 | 20 | <0.2 | 10.8 | 7.7 | 2.8 | 7.1 | 74.12 | 100 |
| ISOBUTYL ALCOHOL | 9.0 | 20 | 9.5 | 22.8 | 20 | 106-108 | 9.5 | 14.3 | 89.8 | 33.0 | 416 | 1.3955 | 20 | <0.2 | 11.1 | 7.4 | 2.8 | 7.8 | 74.12 | 50 |
| n-BUTYL ALCOHOL | 5.5 | 20 | 6.1 | 24.6 | 20 | 116-118 | 7.9 | 20.8 | 92.7 | 42.5 | 355 | 1.3993 | 20 | <0.2 | 11.3 | 7.8 | 2.8 | 7.7 | 74.12 | 50 |
| METHYL ISOBUTYL CARBINOL | — | 20 | — | 22.8 | 20 | 136-137 | — | — | 94.3 | 43.3 | — | 1.4110 | 20 | 0.2 | 9.7 | 7.5 | 1.6 | 6.0 | 102.18 | — |
| AMYL ALCOHOL (MIXED PRIMARY ISOMERS) | 2.9 | 20 | — | 23.8 | 20 | 127-137 | 1.7 | 9.2 | 95.8 | 54.4 | — | 1.4014 | 20 | 0.2 | — | — | — | — | 88.15 | — |
| CYCLOHEXANOL | 0.9 | 20 | — | 35.1 | 20 | 160-162 | 0.1 | 11.8 | 97.8 | 80.0 | 300 | 1.4656 | 20 | 0.4 | 11.0 | 8.5 | 2.0 | 6.6 | 100.16 | 50 |
| 2-ETHYLHEXANOL | 0.05 | 20 | 0.26 | 28.7 | 20 | 182-186 | 0.1 | 2.6 | 99.1 | 80.0 | 288 | 1.4316 | 20 | >20 | 9.9 | 7.8 | 1.6 | 5.8 | 130.20 | — |

Table 2.130: Exxon Hydrocarbon Solvents (B)

| Product | Source | Distillation Range, °C °F | | Flash Point, TCC ^a °C °F | | Specific Gravity, @ 15.6/15.6°C | Density @ 60°F lb/gal | Aniline Pt., ASTM D 611 °C °F | | KB Value | Evaporation Rate, n-BuAc-100 | Surface Tension, Dynes/cm | Hildebrand Solubility Parameter | Composition, Wt % | | | OEL, ppm | CAS Registry Number |
|--------------------------------|--------|---------------------------|----------|-------------------------------------|-----|---------------------------------|-----------------------|-------------------------------|-----|----------|------------------------------|---------------------------|---------------------------------|-------------------|------|-------|----------|---------------------|
| | | Cyclo-paraffin | Paraffin | Aromatics | | | | | | | | | | | | | | |
| ALIPHATICS | | | | | | | | | | | | | | | | | | |
| 1520 Naphtha* | SA | 64-94 | 147-201 | <-18 | <0 | 0.67 | 5.61 | 8 | 155 | 28 | 560 | 18.2 | 7.5 | 2 | 98 | <0.5 | 100 | 64742-49-6 |
| RS Naphtha* | SA | 66-102 | 151-216 | <-18 | <0 | 0.69 | 5.75 | 8 | 137 | 34 | 460 | 19.1 | 7.5 | 2 | 89 | 9 | 100 | 64742-49-6 |
| 2024 Naphtha* | SA | 97-117 | 207-243 | 3 | 26 | 0.74 | 6.15 | ? | 127 | 39 | 260 | 21.3 | 7.5 | 42 | 52 | 6 | 400 | 64742-49-6 |
| 2429 Naphtha* | SA | 115-143 | 239-289 | 10 | 51 | 0.76 | 6.29 | ? | 125 | 39 | 120 | 22.7 | 7.8 | 30 | 58 | 12 | 400 | 64742-49-6 |
| 3135 Naphtha* | SA | 159-176 | 318-349 | 42 | 108 | 0.79 | 6.56 | ? | 126 | 39 | 22 | 23.7 | 7.9 | 35 | 45 | 20 | 200 | 64742-49-6 |
| Varsol® 1 Solvent | BT/SA | 160-205 | 320-401 | 44 | 111 | 0.80 | 6.67 | 15 | 131 | 39 | 10 | 26.6 | 7.9 | 46 | 37 | 17 | 100 | 64742-49-6 |
| Varsol® 18 Solvent | BT/SA | 160-205 | 320-401 | 43 | 110 | 0.79 | 6.62 | 12 | 144 | 36 | 10 | 26.3 | 7.6 | 53 | 40 | 7 | 100 | 64742-49-6 |
| 140 Naphtha* | SA | 187-209 | 369-406 | 65 | 149 | 0.80 | 6.67 | 18 | 137 | 36 | 6 | 25.0 | 7.6 | 34 | 46 | 20 | 200 | 64742-49-6 |
| DX 3841 Naphtha* | SA | 187-210 | 369-410 | 64 | 147 | 0.79 | 6.60 | 17 | 152 | 33 | 6 | 25.1 | 7.5 | 45 | 49 | 6 | 200 | 64742-49-6 |
| AROMATICS | | | | | | | | | | | | | | | | | | |
| Toluene | BT/SA | 110-111 | 230-232 | 7 | 45 | 0.87 | 7.27 | 13 | 48 | 105 | 240 | 29.5 | 8.9 | - | <0.1 | 99.9 | 50 | 64742-49-6 |
| Xylene | BT/SA | 139-141 | 282-286 | 26 | 79 | 0.87 | 7.26 | 11-18 | 50 | 98 | 80 | 30.0 | 8.8 | - | <0.1 | 99.9 | 100 | 64742-49-6 |
| Aromatic 100 Solvent | BT | 160-171 | 320-340 | 47 | 117 | 0.87 | 7.29 | 13-18 | 55 | 94 | 30 | 30.1 | 8.6 | <0.2 | - | 99.8 | 50 | 64742-49-6 |
| Aromatic 150 Solvent | BT | 184-204 | 363-399 | 66 | 151 | 0.90 | 7.49 | 15-18 | 59 | 97 | 6 | 31.4 | 8.9 | <0.2 | - | 99.8 | 100 | 64742-49-6 |
| Aromatic 200 Solvent | BT/SA | 231-276 | 448-530 | 104 ^(b) | 219 | 1.00 | 8.34 | 12-18 | 54 | 98 | <1 | 38.9 | 9.4 | <0.2 | - | 99.8 | 100 | 64742-49-6 |
| DEAROMATIZED ALIPHATICS | | | | | | | | | | | | | | | | | | |
| Excosol® Isopentane Solvent | KR | N/A | N/A | -18 | <0 | 0.62 | 5.21 | N/A | N/A | N/A | 2000 | 14.5 | N/A | - | 100 | <0.01 | 600 | 64742-49-6 |
| Excosol® Methylpentane Naphtha | SA | 59-62 | 138-144 | 18 | <0 | 0.66 | 5.50 | 6 | 147 | 28 | 12 | 17.0 | 7.3 | 1 | 99 | <0.01 | 400 | 64742-49-6 |
| Excosol® Hexane Solvent | BT/SA | 66-69 | 151-156 | 16 | 0 | 0.67 | 5.59 | 6 | 151 | 29 | 12 | 19.4 | 7.3 | 8 | 92 | <0.01 | 50 | 64742-49-6 |
| Excosol® D 75/100 Naphtha | SA | 76-97 | 169-207 | <-18 | <0 | 0.72 | 5.99 | 5 | 132 | 36 | 18 | 20.4 | 7.3 | 19 | 81 | 0.01 | 100 | 64742-49-6 |
| Excosol® Heptane Solvent | BT | 94-98 | 201-208 | -8 | 18 | 0.71 | 5.79 | 6 | 154 | 29 | 9 | 21.2 | 7.3 | 1 | 96 | <0.01 | 100 | 64742-49-6 |
| Excosol® D 115/145 Naphtha | SA | 116-144 | 241-291 | 10 | 50 | 0.72 | 6.22 | 6 | 141 | 35 | 110 | 22.1 | 7.3 | 41 | 59 | 0.01 | 300 | 64742-49-6 |
| Excosol® D 3135 Naphtha | SA | 157-177 | 315-351 | 11 | 105 | 0.77 | 6.43 | 6 | 151 | 34 | 24 | 23.7 | 7.5 | 48 | 52 | 0.02 | 300 | 64742-49-6 |
| Excosol® D 40 Solvent | BT/SA | 159-204 | 318-399 | 43 | 109 | 0.79 | 6.49 | 6 | 152 | 34 | 12 | 26.0 | 7.4 | 57 | 42 | 0.4 | 300 | 64742-49-6 |
| Excosol® D 60 Solvent | BT/SA | 187-210 | 369-410 | 63 | 146 | 0.79 | 6.54 | 7 | 159 | 32 | 6 | 25.1 | 7.4 | 51 | 49 | 0.4 | 300 | 64742-49-6 |
| Excosol® D 80 Solvent | BT | 207-234 | 405-454 | 82 | 180 | 0.80 | 6.65 | 7 | 169 | 29 | <1 | 27.6 | 7.4 | 47 | 53 | <0.2 | 300 | 64742-49-6 |
| Excosol® D 110 Solvent | BT | 251-269 | 483-516 | 114 | 238 | 0.81 | 6.77 | 9 | 183 | 25 | <1 | 28.6 | 7.2 | 41 | 59 | <0.5 | 300 | 64742-49-6 |
| Excosol® D 130 Solvent** | BT | 276-316 | 538-585 | 137 | 279 | 0.81 | 6.99 | 8 | 192 | 24 | <1 | 29.7 | 7.2 | 43 | 57 | <0.5 | 300 | 64742-49-6 |
| ISOPARAFFINS | | | | | | | | | | | | | | | | | | |
| Isopar® C Solvent | BT | 98-104 | 208-219 | -8 | 18 | 0.70 | 5.83 | 7 | 173 | 27 | 560 | 20.3 | 7.2 | - | 100 | <0.01 | 400 | 64742-49-6 |
| Isopar® E Solvent | BT | 118-137 | 244-279 | 7 | 45 | 0.72 | 6.02 | 7 | 167 | 29 | 160 | 22.1 | 7.3 | 1 | 99 | <0.01 | 400 | 64742-49-6 |
| Isopar® G Solvent | BT | 160-176 | 320-349 | 41 | 106 | 0.75 | 6.23 | 7 | 181 | 27 | 30 | 23.8 | 7.3 | 5 | 95 | <0.01 | 300 | 64742-48-9 |
| Isopar® G Naphtha | SA | 156-172 | 313-342 | 39 | 103 | 0.74 | 6.18 | 7 | 171 | 28 | 35 | 22.2 | 7.3 | 1 | 99 | 0.03 | 300 | 64742-48-9 |
| Isopar® H Solvent | BT | 178-188 | 352-370 | 54 | 129 | 0.76 | 6.32 | 8 | 183 | 26 | 9 | 24.1 | 7.3 | 5 | 95 | <0.01 | 300 | 64742-48-9 |
| Isopar® K Solvent | BT | 178-197 | 351-387 | 57 | 135 | 0.76 | 6.34 | 8 | 181 | 27 | 8 | 24.2 | 7.3 | 6 | 94 | <0.01 | 300 | 64742-48-9 |
| Isopar® K Naphtha | SA | 182-204 | 360-399 | 60 | 140 | 0.76 | 6.35 | 8 | 178 | 28 | 7 | 23.3 | 7.3 | 3 | 97 | <0.01 | 300 | 64742-48-9 |
| Isopar® L Solvent | BT | 189-207 | 372-405 | 64 | 147 | 0.77 | 6.40 | 8 | 185 | 27 | 4 | 25.1 | 7.3 | 11 | 89 | <0.01 | 300 | 64742-48-9 |
| Isopar® M Solvent | BT/SA | 223-254 | 433-489 | 93 ^(b) | 199 | 0.79 | 6.57 | 9 | 196 | 25 | <1 | 26.4 | 7.2 | 21 | 80 | <0.05 | 300 | 64742-47-8 |
| Isopar® V Solvent | BT | 273-312 | 523-594 | 129 ^(b) | 265 | 0.82 | 6.82 | 9 | 198 | 23 | <1 | 26.9 | 7.2 | 34 | 66 | <0.5 | 300 | 64742-46-7 |
| NORMAL PARAFFINS | | | | | | | | | | | | | | | | | | |
| Parpar® 12 Solvent | BT | 188-220 | 370-428 | 69 | 156 | 0.75 | 6.24 | 12 | 180 | 23 | 3 | 26.9 | 7.3 | - | 100 | <0.01 | 300 | 64771-72-6 |
| Parpar® 13 Solvent | BT | 222-243 | 432-469 | 95 ^(b) | 203 | 0.76 | 6.35 | 13 | 190 | 21 | <1 | 26.7 | 7.2 | - | 100 | <0.01 | 300 | 64771-72-8 |
| Parpar® 15 Solvent | RT | 255-279 | 491-534 | 120 ^(b) | 248 | 0.77 | 6.44 | 18 | 199 | 20 | <1 | 28.9 | 7.1 | - | 100 | 0.01 | 300 | 64771-72-8 |

(a) Big Closed Cup, ASTM D 56
 (b) ASTM D 93
 (c) ASTM D 611 (Mixed Aniline Point)

(d) Occupational Exposure Limits - Recommended by Exxon
 TLVs have not been established for these compounds by ACGIH.
 (e) TLV - A registered trademark of the ACGIH. Threshold Limit Value (TLV) or Occupational Exposure Limit, is the time weighted average concentration for a normal 8-hour workday, 40-hour workweek, to which nearly all workers may be exposed repeatedly with adverse effect.

NOTE:
 All hydrocarbon solvents test 130 Saybolt Color except for Aromatic 150 @ 178 & Aromatic 200 @ ASTM 1 by ASTM D 1500.
 BT - Baytown SA - Sarnia RT - King Ranch
 * Marketed as Isocel® or Varsol® Solvents in Canada
 ** Preproduction data - Commercially available first quarter 1995

Table 2.131: Fina Aromatic Solvents (6)

| Typical Properties | | | | | |
|----------------------|--------------|-------------|------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Solvent Name | Flash Deg. F | API Gravity | Specific Gravity | Distillation Deg. F | Common Applications |
| FAS 70 | 180 | 20 | 0.9340 | 150 - 645 | Warmer climate oil well applications Wood treating preservative |
| FAS 104 | 115 | 30 | 0.8762 | 300 - 495 | Down hole oil well applications Wash oil Reaction solvent in chemical processing Carrier solvent for specialty chemicals High octane gasoline blendstock |
| FAS 150 | 155 | 22 | 0.9218 | 370 - 630 | Very similar to FAS 104 except higher flash. Used in the same applications as FAS 104. |
| FAS TX-150 | 155 | 26 | 0.8984 | 360 - 400 | Water white (Saybolt +30) solvent Paint blendstock/solvent Reaction solvent in chemical processing for specialty paint and oilfield chemicals Oilfield chemical solvent High quality wash oil |
| FAS TX-200 | 219 | 11 | 0.9930 | 450 - 527 | Carrier for agricultural products High flash solvent applications in coatings Used in manufacturing specialty chemicals |
| Toluene (90% Purity) | | 31 | 0.8708 | 232 - 253 | High octane, low RVP gasoline blendstock |
| Xylene | | 31 | 0.8708 | 281 - 285 | Many uses in solvents, gasoline, chemical processing |

Table 2.132: Hoechst Celanese Methyl Isobutyl Ketone (42)

Methyl Isobutyl Ketone

(MIBK; Isobutyl methyl ketone; Hexone;
Isopropylacetone; 4-Methyl-2-pentanone)

Physical Properties

| | | | | | |
|------------------------------------------------|----------------------------|-------------------------|-------------------------|-------|------|
| Autoignition Temperature: | 840°F (449°C) | | | | |
| Critical Compressibility Factor: | 0.254 | | | | |
| Critical Pressure: | 32.3 atm | | | | |
| Critical Temperature: | 298.3°C | | | | |
| Critical Volume: | 0.369 m ³ /kmol | | | | |
| Dipole Moment: | 9.0 X 10 ⁻³⁰ cm | | | | |
| Evaporation Rate (n-BuAc = 1): | 1.54 | | | | |
| Flammability Limit (vol % in air): | | | | | |
| Upper Limit: | 8.0 | | | | |
| Lower Limit: | 1.2 | | | | |
| Flash Point (Tag Closed Cup): | 60°F (16°C) | | | | |
| Freezing Point: | <-50°C (<-58°F) | | | | |
| Heat of Vaporization: | | | | | |
| (BTU/lb) | 182 | 177 | 172 | 167 | 136 |
| Temperature (°F) | 26 | 61.9 | 98.1 | 134 | 315 |
| Liquid Density: (lb/gal) | 6.86 | 6.71 | 6.55 | 6.24 | 5.90 |
| Temperature (°F) | 25.7 | 61.9 | 98.1 | 171 | 243 |
| Liquid Heat Capacity: | | | | | |
| (BTU/lb°F) | 0.514 | 0.518 | 0.521 | 0.546 | |
| Temperature (°F) | 77.0 | 85.7 | 94.4 | 155 | |
| Liquid Thermal Conductivity: | | | | | |
| (BTU/ft ² sec°F) | 2.45 X 10 ⁻⁵ | 2.32 X 10 ⁻⁵ | 2.06 X 10 ⁻⁵ | | |
| Temperature (°F) | 5.03 | 54.7 | 154 | | |
| Liquid Viscosity: (cp) | 0.774 | 0.570 | 0.436 | 0.345 | |
| Temperature (°F) | 32.8 | 70.7 | 109 | 147 | |
| Normal Boiling Point (760 mm Hg): | 116°C (241°F) | | | | |
| Solubility (grams/100 grams of water at 20°C): | 1.95 | | | | |
| Specific Gravity (20°C/4°C): | 0.801 | | | | |
| Surface Tension: (dynes/cm) | 24.4 22.3 16.3 | | | | |
| Temperature (°F) | 61.9 98.1 207 | | | | |
| Vapor Density (Air = 1, at 20°C): | 3.46 | | | | |
| Vapor Pressure: (mm Hg) | 3.15 | 12.1 | 14.9 | 37.1 | 42.3 |
| Temperature (°F) | 25.7 | 61.9 | 68.0 | 98.1 | 207 |

Table 2.133: Kendall/Amalle, Witco Special Solvents (65)

KENSOL 8

C.A.S. #68410-98-0

| <u>ASTM METHOD</u> | <u>PROPERTIES</u> | <u>SPECIFICATION</u> |
|----------------------|---------------------------------------|---------------------------------------|
| D-287* D-56 | GRAVITY, API FLASH POINT, (T.C.C.) | 69.0 MIN 76.0 MAX -4°F / -20°C MAX |
| <u>TYPICAL VALUE</u> | | |
| D-287* | GRAVITY, API | 72.0 |
| | LBS./GAL. | 5.79 |
| D-156 | COLOR, SAYBOLT ODOR | +30 TYPICAL SOLVENT |
| | DOCTOR TEST | SWEET |
| D-86* | DISTILLATION, | <u>°F</u> <u>°C</u> |
| | IBP | 109 43 |
| | 5% | 129 54 |
| | 50% | 167 75 |
| | 95% | 209 98 |
| | EBP | 247 119 |
| D-323 | REID VAPOR PRESSURE | 6.52 LBS/IN ² |
| | TOTAL AROMATICS | 2.85% |
| | BENZENE | 1.15% |
| | TOLUENE | 1.70% |

KENSOL 10

C.A.S. 68410-97-9

| <u>ASTM METHOD</u> | <u>PROPERTIES</u> | <u>SPECIFICATION</u> |
|----------------------|--------------------------------|-----------------------------------------|
| D-287* | GRAVITY, API | 65 MIN |
| D-323 | REID VAPOR PRESSURE | 4.0 MIN / 6.3 MAX |
| D-97 | POUR POINT | -40°F / -40°C MAX |
| D-86* | DISTILLATION °F | <u>MIN</u> <u>MAX</u> |
| | | <u>°F</u> <u>°C</u> <u>°F</u> <u>°C</u> |
| | IBP | 100 38 134 57 |
| | 10% | 135 57 170 77 |
| | 50% | 200 93 235 113 |
| | 90% | 275 135 310 154 |
| | EBP | 315 157 350 177 |
| <u>TYPICAL VALUE</u> | | |
| D-287* | GRAVITY, API | 68 |
| | LBS./GAL. | 5.9 |
| D-323 | REID VAPOR PRESSURE | 4.6 |
| D-156 | COLOR, SAYBOLT (BEFORE DYE) | +30 |
| D-56 | FLASH POINT, (T.C.C.) | -10°F / -23°C / |

(continued)

Table 2.133: (continued)

KENSOL 17

C.A.S. 64742-48-9

| <u>ASTM METHOD</u> | <u>PROPERTIES</u> | <u>SPECIFICATION</u> | |
|------------------------|----------------------------------------|----------------------|-----|
| D-287* | GRAVITY, API | 58 MIN / 61 MAX | |
| D-86* | DISTILLATION, °F | | |
| | IBP | 170°F MIN | |
| | EBP | 400°F MAX | |
| | | <u>TYPICAL VALUE</u> | |
| D-287* | GRAVITY, API | 61 | |
| | LBS./GAL. | 6.12 | |
| D-86* | DISTILLATION | °F | °C |
| | IBP | 175 | 79 |
| | 5% | 210 | 99 |
| | 10% | 217 | 103 |
| | 50% | 244 | 118 |
| | 90% | 291 | 144 |
| | 95% | 303 | 151 |
| | EBP | 358 | 181 |
| D-1319 | FLORESCENT INDICATOR ANALYSIS (F.I.A.) | | |
| | AROMATICS, VOLUME % | 6.5% | |
| | OLEFINS, VOLUME % | .5% | |
| | SATURATES VOLUME % | 93 | |
| D-156 | COLOR, SAYBOLT | +30 | |
| D-56 | FLASH POINT, (T.C.C.) | +25°F / -4°C | |

KENSOL 30

REGULAR MINERAL SPIRITS, C.A.S. 8052-41-3

| <u>ASTM METHOD</u> | <u>PROPERTIES</u> | <u>SPECIFICATION</u> | |
|------------------------|-------------------------------|------------------------|-----|
| D-287* | GRAVITY, API | 50.8 MIN / 52.7 MAX | |
| D-56 | FLASH POINT, (T.C.C.) | 105°F / 40°C MIN | |
| D-86* | DISTILLATION, °F | | |
| | 5% | 310°F MIN | |
| | 95% | 390°F MAX | |
| | EBP | 410°F MAX | |
| | | <u>TYPICAL VALUE</u> | |
| D-287* | GRAVITY, API | 52 | |
| | LBS./GAL. | 6.42 | |
| D-156 | COLOR, SAYBOLT | +30 | |
| | ODOR | MILD PETROLEUM SOLVENT | |
| D-611 | ANILINE POINT | 149°F / 65°C | |
| D-1133 | KAURI BUTANOL VALUE | 32.5 | |
| D-97 | POUR POINT | -40°F / -40°C | |
| D-1319 | FLORESCENT INDICATOR ANALYSIS | | |
| | AROMATICS, VOLUME % | 9.4 | |
| | OLEFINS, VOLUME % | .7 | |
| | SATURATES, VOLUME | 89.9 | |
| D-86 | DISTILLATION | °F | °C |
| | IBP | 306 | 152 |
| | 5% | 322 | 162 |
| | 50% | 341 | 170 |
| | 95% | 375 | 190 |
| | EBP | 393 | 201 |

(continued)

Table 2.133: (continued)

| KENSOL 33 | | | |
|--------------------------------------------------|-------------------------------|----------------------|-----|
| RULE 66 MINERAL SPIRITS, C.A.S. 8052-41-3 | | | |
| ASTM METHOD | PROPERTIES | SPECIFICATION | |
| D-287* | GRAVITY, API | 51 MIN / 54 MAX | |
| D-56 | FLASH POINT, (T.C.C.) | 105°F / 40°C MIN | |
| D-86* | DISTILLATION, °F | | |
| | 5% | 310°F MIN | |
| | 95% | 390°F MAX | |
| | EBP | 410°F MAX | |
| | UV ANALYSIS, VOL % AROMATICS | 7.2 MIN / 7.8 MAX | |
| | | TYPICAL VALUE | |
| D-287* | GRAVITY, API | 52 | |
| | LBS./GAL. | 6.42 | |
| D-156 | COLOR, SAYBOLT | +30 | |
| D-611 | ANILINE POINT | 65 | |
| D-1133 | KAURI BUTANOL VALUE | 32.5 | |
| D-97 | POUR POINT | -40°F / -40°C | |
| D-1319 | FLORESCENT INDICATOR ANALYSIS | | |
| | AROMATICS, VOLUME % | 7.5 | |
| | OLEFINS, VOLUME % | 0.5 | |
| | SATURATES, VOLUME | 92 | |
| D-86 | DISTILLATION | °F | °C |
| | IBP | 318 | 137 |
| | 5% | 325 | 161 |
| | 50% | 339 | 169 |
| | 95% | 368 | 185 |
| | EBP | 391 | 197 |

KENSOL 48T
NARROW CUT PETROLEUM DISTILLATE, C.A.S. #64741-86-2

| ASTM METHOD | PROPERTIES | SPECIFICATION | |
|------------------------|---------------------------|----------------------|-----|
| D-92 | FLASH POINT °F, COC | 170 / 77°C MIN | |
| D-287* | GRAVITY, °API | 46.8 MIN - 48.0 MAX | |
| D-86* | DISTILLATION, °F | | |
| | IBP | 380 MIN / 193°C MIN | |
| | EBP | 475 MAX / 246°C MAX | |
| | | TYPICAL VALUE | |
| D-287* | GRAVITY °API | 47.4 | |
| | LBS./GAL. | 6.5 | |
| D-92 | FLASH POINT °F, COC | 185 / 85°C | |
| D-156 | COLOR, SAYBOLT | +30 | |
| D-1611 | ANILINE POINT, °C | 72.5 / 162°F | |
| D-1133 | KAURI BUTANOL VALUE | 28.3 | |
| D-86 | DISTILLATION | °F | °C |
| | IBP | 391 | 199 |
| | 10% | 409 | 209 |
| | 50% | 422 | 217 |
| | 90% | 443 | 228 |
| | EBP | 465 | 241 |
| D-97 | POUR POINT, °F | -40 / -40°C | |
| D-88 | VISCOSITY @ 100°F, SUS | 31.2 | |
| D-445 | VISCOSITY @ 40°C, CST | 1.56 | |
| | DOCTOR TEST | SLIGHTLY SOUR | |
| | COPPER STRIP CORROSION | 1b | |
| D-1319 | F.I.A. ANALYSIS, VOLUME % | | |
| | AROMATICS | 11.4 | |
| | OLEFINS | 3.1 | |
| | SATURATES | 85.5 | |

Table 2.134: Mobil Oil Aliphatic and Aromatic Solvents (64)

| Toluene, Nitration Grade | | | |
|-----------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------|----------------|
| <u>Property</u> | <u>Method</u> | <u>Specification</u> | <u>Typical</u> |
| Acidity | ASTM D 847 | No Free Acid | Negative |
| Acid Wash Color | ASTM D 848 | 2 max | < 1 |
| Appearance at 65 to 78 °F (18.3 to 25.6 °C) | Visual | Clear Liquid Free of Sediment & Haze | Clear |
| Color, Platinum-Cobalt | ASTM D 1209 | 20 max | 0 |
| Copper Corrosion | ASTM D 849 | Negative | Pass 1A |
| Distillation Range including 110.6 °C at 760 mm Hg Pressure, °C | ASTM D 850 | 1 max | 0.7 |
| Non-Aromatics, Volume % | Gas Chromatograph | 1.5 max | 0.02 |
| Specific Gravity, 60/60 °F (15.6/15.6 °C) | ASTM D 891 | 0.869 - 0.873 | 0.872 |
| Sulfur Compounds | ASTM D 853 | Free of H ₂ S & SO ₂ | Negative |
| Complies with ASTM D 841 Pounds per Gallon, 60 °F (15.6 °C): 7.26 | | Product Number: 871004 (lbs), 868224 (gals) Specification Date: August 1, 1996 | |

| Solvent Xylene | | | |
|---------------------------------------------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------|----------------|
| <u>Property</u> | <u>Method</u> | <u>Specification</u> | <u>Typical</u> |
| Acidity | ASTM D 847 | No Free Acid | Negative |
| Acid Wash Color | ASTM D 848 | 6 max | 3 |
| Color, Platinum-Cobalt | ASTM D 1209 | 20 max | 0 |
| Copper Corrosion | ASTM D 849 | Negative | Pass 1A |
| Distillation, °C | ASTM D 850 | | |
| Initial Boiling Point | | 137 min | 138 |
| Dry Point | | 143 max | 140 |
| Range including 139.3 °C at 760 mm Hg Pressure | | 5 max | 2 |
| Specific Gravity, 60/60 °F (15.6/15.6 °C) | ASTM D 891 | 0.860 - 0.875 | 0.871 |
| Sulfur Compounds | ASTM D 853 | Free of H ₂ S & SO ₂ | Negative |
| Complies with ASTM D 843 Pounds per Gallon, 60 °F (15.6 °C): 7.26 Production Point: Chalmette, LA | | Product Number: 870808 (lbs), 868182 (gals) Specification Date: August 1, 1996 | |

(continued)

Table 2.134: (continued)

| |
|---------------------------------------|
| Pegasol R-100 Aromatic Solvent |
|---------------------------------------|

| <u>Property</u> | <u>Method</u> | <u>Specification</u> | <u>Typical</u> |
|----------------------------------------------|-------------------|----------------------|----------------|
| Appearance | Visual | Report | Clear & Bright |
| Aromatics, Volume % | Gas Chromatograph | 95 min | 99.3 |
| Benzene, Volume % | Gas Chromatograph | 0.1 max | < 0.01 |
| Distillation, °F | ASTM D 86 | | |
| Initial Boiling Point | | 300 min | 310 |
| Dry Point | | 350 max | 340 |
| Flash Point, TCC, °F | ASTM D 56 | 105 min | 109 |
| Kauri-Butanol Value | ASTM D 1133 | Report | 91 |
| Specific Gravity, 60/60 °F (15.6/15.6 °C) | ASTM D 891 | 0.865 - 0.885 | 0.875 |

| | |
|------------------------------------------|---------------------------------------------|
| Pounds per Gallon, 60 °F (15.6 °C): 7.30 | Product Number: 870204 (lbs), 868331 (gals) |
| Production Point: Chalmette, LA | Specification Date: August 1, 1996 |

| |
|-------------------------------|
| T-400 Aromatic Solvent |
|-------------------------------|

| <u>Property</u> | <u>Method</u> | <u>Specification</u> | <u>Typical</u> |
|----------------------------------------------|-------------------|----------------------|----------------|
| Appearance | Visual | Report | Clear & Bright |
| Aromatics, Volume % | Gas Chromatograph | 95 min | 99.3 |
| Distillation, °F | ASTM D 86 | | |
| Initial Boiling Point | | 300 min | 310 |
| Dry Point | | 400 max | 340 |
| Flash Point, TCC, °F | ASTM D 56 | 105 min | 109 |
| Kauri-Butanol Value | ASTM D 1133 | Report | 91 |
| Specific Gravity, 60/60 °F (15.6/15.6 °C) | ASTM D 891 | 0.865 - 0.885 | 0.875 |

| | |
|------------------------------------------|---------------------------------------------|
| Pounds per Gallon, 60 °F (15.6 °C): 7.30 | Product Number: 870915 (lbs), 860916 (gals) |
| Production Point: Chalmette, LA | Specification Date: August 1, 1996 |

(continued)

Table 2.134: (continued)

T-500-100 Aromatic Solvent

| <u>Property</u> | <u>Method</u> | <u>Specification</u> | <u>Typical</u> |
|----------------------------------------------|-------------------|--------------------------------------------|----------------|
| Acidity | ASTM D 847 | No Free Acid | Negative |
| Aromatics, Volume % | Gas Chromatograph | 94 min | 99.4 |
| Copper Corrosion | ASTM D 849 | Negative | Pass 1A |
| Distillation, °F | ASTM D 850 | | |
| Initial Boiling Point | | 290 min | 300 |
| Dry Point | | 345 max | 340 |
| Doctor | ASTM D 4952 | Sweet | Negative |
| Flash Point, TCC, °F | ASTM D 56 | 100 min | 102 |
| Kauri-Butanol Value | ASTM D 1133 | Report | 92 |
| Specific Gravity, 60/60 °F (15.6/15.6 °C) | ASTM D 891 | 0.860 - 0.875 | 0.874 |
| Sulfur Compounds | ASTM D 853 | Free of H ₂ S & SO ₂ | Negative |

Pounds per Gallon, 60 °F (15.6 °C): 7.29
 Production Point: Chalmette, LA

Product Number: 870923 (lbs), 860924 (gals)
 Specification Date: August 1, 1996

Pegasol R-150 Aromatic Solvent

| <u>Property</u> | <u>Method</u> | <u>Specification</u> | <u>Typical</u> |
|----------------------------------------------|-------------------|----------------------|----------------|
| Appearance | Visual | Clear & Bright | Clear & Bright |
| Aromatics, Volume % | Gas Chromatograph | 95 min | 99.7 |
| Color, Saybolt | ASTM D 156 | + 25 min | 30 |
| Distillation, °F | ASTM D 86 | | |
| Initial Boiling Point | | 350 min | 360 |
| Dry Point | | 420 max | 380 |
| Flash Point, TCC, °F | ASTM D 56 | 142 min | 145 |
| Kauri-Butanol Value | ASTM D 1133 | 89 min | 90 |
| Specific Gravity, 60/60 °F (15.6/15.6 °C) | ASTM D 891 | 0.890 - 0.910 | 0.892 |

Pounds per Gallon, 60 °F (15.6 °C): 7.50
 Production Point: Chalmette, LA

Product Number: 870212 (lbs), 868323 (gals)
 Specification Date: August 1, 1996

Table 2.135: Penreco Hydrocarbon Solvents (18)

| Specifications | 2251 Oil | 2253 Oil | 2257 Oil | 2259 Oil | 2260 Oil |
|------------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| CAS No. | 64742-14-9 | 64742-47-8 | 64742-46-7 | 8042-47-5 | 8042-47-5 |
| API Gravity, 60°F | 46/50 | 46/50 | 44/47 | 43/47 | 40/44 |
| Specific Gravity, 60/60°F | 779/797 | 779/797 | 793/806 | 793/811 | 806/825 |
| Distillation, ASTM D 86 IBP, °F, min (°C, min) | 175 (191) | 175 (191) | 430 (221) | 445 (235) | 510 (266) |
| End Point, °F, max (°C, max) | 461 (238) | 460 (238) | 500 (260) | 540 (282) | 595 (313) |
| Physical Properties (Typical) | | | | | |
| Specific Gravity, 60/60°F | 786 | 786 | 795 | 804 | 812 |
| Pounds/Gallon, 60°F | 6.56 | 6.56 | 6.64 | 6.69 | 6.76 |
| Viscosity, 100°F, SUS | 32.0 | 32.0 | 33.2 | 34.5 | 38.0 |
| Viscosity, 100°F, CST | 1.66 | 1.68 | 2.18 | 2.28 | 4.30 |
| Aniline Point, ASTM D 811, °F | 170 | 168 | 175 | 181 | 192 |
| KB Values, ASTM D 1133 | 28 | 29 | 26.5 | 24.5 | 22.6 |
| Flash Point, ASTM D 92, °F (°C) | 165 (74) | 165 (74) | 210 (99) | 215 (102) | 260 (127) |
| Pour Point, ASTM D 97, °F (°C) | -40 (-40) | -40 (-40) | -15 (-26) | 0 (-18) | 25 (-4) |
| Chemical Properties (Typical) | | | | | |
| Aromatics by UV, Wt% | <1 | <1 | <1 | <1 | <1 |
| Carbon Number, by GC | C ₁₀ -C ₁₄ | C ₁₀ -C ₁₄ | C ₁₁ -C ₁₆ | C ₁₂ -C ₁₇ | C ₁₃ -C ₁₈ |

Table 2.136: Phillips 66 High Purity Hydrocarbon (4)

HYDROCARBON LIQUIDS

| PRODUCT GRADE | CATALOG NO. | MINIMUM PURITY MOL % |
|----------------------------------------------|----------------------------|----------------------|
| n-Butylbenzene Pure | A63400 | 99.0 |
| Isobutylbenzene Pure | A65400 | 99.0 |
| Cyclohexane Pure 98% | N24400 N24900 | 99.0 98.0 |
| Cyclopentane Pure 70% | N22400 N22800 | 99.0 — |
| n-Decane Pure | P10400 | — |
| 2, 2-Dimethylbutane, (Neohexane) Pure | I34400 | 99.0 |
| 3, 3-Dimethylbutene-1 (Neohexene) | O20300 | 95.0 |
| n-Dodecane Technical | P12300 | 95.0 |
| n-Heptane Pure Commercial ASTM | P07400 P07200 P07444 | 99.0 — — |
| n-Hexane Pure Technical High Purity | P06400 P06300 P06200 | 99.0 95.0 85.0 |
| Hexene-1 Technical | O21300 | 95.0 |
| Isohexanes Commercial | I36200 | — |

HYDROCARBON LIQUIDS

| PRODUCT GRADE | CATALOG NO. | MINIMUM PURITY MOL % |
|----------------------------------------|------------------|----------------------|
| Isopentane Pure Commercial | 126400 126200 | 99.0 — |
| 2-Methylbutene-2 Commercial | O17800 | — |
| Methylcyclohexane Pure | N29400 | — |
| 2-Methylpentane Pure | I30400 | 99.0 |
| 3-Methylpentane Pure | I32400 | 99.0 |
| n-Octane Technical | P08700 | 97.0 |
| n-Pentane Pure Commercial | P05400 P05392 | 99.0 98.0 |
| Toluene Pure Reference Fuel | A42400 A42444 | 99.0 — |
| 2,2,4-Trimethylpentane (see Isooctane) | | |
| ortho-Xylene Pure Technical | A47400 A47300 | 99.0 95.0 |
| meta-Xylene Technical | A44300 | 95.0 |
| para-Xylene Pure | A48400 | 99.0 |

Table 2.137: Shell Chemical Solvents (14)

OXYGENATED SOLVENTS

| | Chemical | Molecular Weight | Boiling Point (or Range) | | Flash Point °F ± 5° (Tag Closed Cup) | Vapor Pressure mmHg @ 20°C ¹ | Refractive Index n _D ²⁰ ¹ | Surface Tension, Dynes/CM @ 20°C ¹ | Coefficient of Expansion @ 20°C $\left(\frac{\Delta V}{V\Delta T}\right)$ | Average Pounds Per Gallon @ (VOC Content) | | Average Specific Gravity | | |
|-------------------------------------------------------------|----------------------------------------------------------------------|------------------|--------------------------|---------|--------------------------------------|-----------------------------------------|------------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------|-------|--------------------------|---------------------|---------|
| | | | °C | °F | | | | | | Freezing Point, °C ¹ | 25°C | 60°F | 25/25°C | 60/60°F |
| | | | | | | | | | | | | | | |
| Fast Evaporating—Relative Evaporation Rate >3.0 | | | | | | | | | | | | | | |
| ACETONE ⁶ | CH ₃ COCH ₃ | 58.08 | 56.1 | 133.0 | - 94.9 | -15 | 185.46 | 1.3590 | 22.32 | 0.00143 | 6.55 | 6.64 | 0.788 | 0.797 |
| ETHYL ACETATE (85-88%) ⁷ | CH ₃ COOC ₂ H ₅ | 88.10 | 70-85 | 158-185 | — | 24 | — | — | — | 0.00134 | 7.33 | 7.42 | 0.881 | 0.890 |
| ETHYL ACETATE (95-98%) | CH ₃ COOC ₂ H ₅ | 88.10 | 73-80 | 163-176 | — | — | — | — | — | 0.00134 | 7.43 | 7.51 | 0.894 | 0.902 |
| ETHYL ACETATE (99%) | CH ₃ COOC ₂ H ₅ | 88.10 | 77.1 | 170.8 | - 83.6 | — | 73.8 | 1.3725 | 23.9 | 0.00134 | 7.46 | 7.55 | 0.897 | 0.906 |
| METHYL ACETATE (80%) | CH ₃ COOCH ₃ | 74.08 | 57.1 | 134.8 | - 98.1 | 14 | 172.3 | 1.3594 | — | — | 7.48 | 7.58 | 0.900 | 0.910 |
| METHYL ETHYL KETONE | CH ₃ COC ₂ H ₅ | 72.11 | 79.64 | 175.35 | - 86.69 | 23 | 70.92 | 1.3788 | 24.6 | 0.00131 | 6.67 | 6.75 | 0.802 | 0.812 |
| iso-PROPYL ACETATE (95-97%) | CH ₃ COOCH(CH ₃) ₂ | 102.13 | 88.7 | 191.7 | - 73.1 | 40 | 46.9 | 1.3770 | 21.2 | 0.00131 | 7.19 | 7.28 | 0.866 | 0.875 |
| iso-PROPYL ETHER | (CH ₃) ₂ CHOCH(CH ₃) ₂ | 102.18 | 68.5 | 155.3 | - 85.5 | -18 | 119.5 | 1.3682 | 17.3 | 0.0015 | 5.99 | 6.07 | 0.720 | 0.729 |
| TETRAHYDROFURAN | OCH ₂ CH ₂ CH ₂ CH ₂ | 72.10 | 66.0 | 150.8 | - 108.5 | 6 | 130.0 | 1.4073 | 26.4 ⁹ | — | 7.35 | 7.42 | 0.884 | 0.891 |
| Medium Evaporating—Relative Evaporation Rate 0.8–3.0 | | | | | | | | | | | | | | |
| iso-BUTYL ACETATE (90%) | CH ₃ COOCH ₂ CH(CH ₃) ₂ | 116.16 | 117.2 | 243.0 | - 99.85 | 68 | 15.0 | 1.3880 | 23.3 | 0.00119 | 7.19 | 7.26 | 0.865 | 0.872 |
| n-BUTYL ACETATE (90-92%) | CH ₃ COOC ₄ H ₉ | 116.16 | 118-128 | 244-262 | - 73.5 | 80 | 8.9 | 1.3951 | 24.0 | 0.00117 | 7.25 | 7.32 | 0.872 | 0.879 |
| n-BUTYL ACETATE (99%) | CH ₃ COOC ₄ H ₉ | 116.16 | 126.1 | 259.0 | — | 82 | 8.5 | — | 27.6 | 0.00121 | 7.30 | 7.37 | 0.878 | 0.885 |
| sec-BUTYL ACETATE (90%) | CH ₃ COOCH(CH ₃)C ₂ H ₅ | 116.16 | 112.2 | 234.0 | - 98.9 | 88 | 16.2 | 1.3915 | 22.8 | 0.00118 | 7.15 | 7.23 | 0.860 | 0.868 |
| sec-BUTYL ALCOHOL | CH ₃ CH ₂ CHOHCH ₃ | 74.12 | 99.5 | 211.1 | - 114.7 | 72 | 11.4 | 1.3969 | 23.0 | 0.00101 | 6.69 | 6.75 | 0.805 | 0.811 |
| tert-BUTYL ALCOHOL | C(CH ₃) ₃ OH | 74.12 | 82.6 | 180.7 | 25.66 | 52 | 29.6 ⁹ | 1.3841 ¹⁰ | 20.7 | 0.00133 | 6.50 | — | 0.782 ¹¹ | — |
| 1,1,1,-TRICHLOROETHANE | CH ₃ CCl ₃ | 133.0 | 165.2 | 74.0 | - .38 | none | 100.00 | 1.438 | 25.6 | — | 10.91 | — | 1.319 | 1.321 |
| DIETHYL KETONE | C ₂ H ₅ COC ₂ H ₅ | 86.13 | 101.5 | 214.7 | - 42.0 | 55 ¹³ | 26.9 | 1.3905 | — | — | 6.76 | 6.82 | 0.814 | 0.819 |
| ETHYL ALCOHOL 200 PRF. ANHYD | C ₂ H ₅ OH | 46.07 | 78.32 | 173.0 | - 114.1 | 56 | 43.9 | 1.36143 | 22.27 | 0.0011 | 6.53 | 6.60 | 0.786 | 0.793 |
| ETHYL ALCOHOL 190 PRF. (95%) | C ₂ H ₅ OH | 46.07 | — | — | — | 61 | — | — | — | 0.0011 | 6.73 | 6.79 | 0.809 | 0.816 |
| METHYL ALCOHOL | CH ₃ OH | 32.04 | 64.5 | 148.1 | - 97.8 | 51 | 97.5 | 1.329 | 22.6 | 0.00119 | 6.56 | 6.63 | 0.789 | 0.796 |
| METHYL ISOBUTYL KETONE | CH ₃ COCH ₂ CH(CH ₃) ₂ | 100.16 | 116.2 | 241.2 | - 83.5 | 60 | 14.5 | 1.3957 | 23.64 | 0.00115 | 6.64 | 6.71 | 0.799 | 0.806 |
| METHYL ISOPROPYL KETONE | CH ₃ COCH(CH ₃) ₂ | 86.13 | 93.9 | 201.0 | - 92.0 | — | 39.8 | 1.3862 | — | 0.001 | 6.65 | 6.71 | 0.801 | 0.806 |
| METHYL n-PROPYL KETONE | CH ₃ COC ₃ H ₇ | 86.13 | 102.3 | 216.1 | - 77.5 | 45 | 27.0 | 1.3902 | 26.6 ⁹ | 0.0012 | 6.69 | 6.75 | 0.805 | 0.810 |
| 2-NITROPROPANE | CH ₃ CHNO ₂ CH ₃ | 89.09 | 120.3 | 248.5 | - 93.0 | 82 | 12.9 | 1.3941 | 30.0 | 0.00104 | 8.20 | 8.26 | 0.987 | 0.992 |
| n-PROPYL ACETATE (90-92%) | CH ₃ COOC ₃ H ₇ | 102.13 | 101.6 | 214.9 | - 92.5 | 58 | 24.8 | 1.3844 | 23.9 | 0.00126 | 7.29 | 7.37 | 0.877 | 0.885 |
| iso-PROPYL ALCOHOL | (CH ₃) ₂ CHOH | 60.09 | 82.33 | 180.2 | - 88.43 | 53 | 32.0 | 1.3772 | 21.35 | 0.00104 | 6.51 | 6.57 | 0.783 | 0.790 |
| n-PROPYL ALCOHOL | C ₃ H ₇ OH | 60.09 | 97.15 | 206.9 | - 127.0 | 77 | 14.2 | 1.385 | 23.8 | 0.00096 | 6.67 | 6.74 | 0.803 | 0.809 |

(continued)

Table 2.137: (continued)

| | Chemical Structure | Evaporation Characteristics | | Viscosities cps @ 25°C. | | Blush Resist % Rel. Hum. @ 80°F ³ | Dilution Ratio ⁴ | | Solubility of Pure Compound @ 20°C, % by Weight | | Physical Chemical Parameters | | | |
|-------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------|------------------------------------|----------------------------|--------------------------------------|-------------------------------------------------------|-----------------------------|-----------------------------------|-------------------------------------------------------------|-------------|------------------------------|------------------------|------------------|----------------------------------------|
| | | Seconds to 90% Evap. ² | Relative Rate nBuOAc =1.0 | Neat Compound | 8gm N.C. ¹ Solution | | Toluene | Aliphatic Naphtha ⁵ | In Water | Water In | Solubility Parameter | Fractional Polarity | Index | Hydrogen Bonding Characteristics |
| | | Fast Evaporating—Relative Evaporation Rate >3.0 | | | | | | | | | | | | |
| ACETONE ⁶ | CH ₃ COCH ₃ | 82 | 5.59 | 0.31 | 10 | <20 | 4.4 | 0.8 | Complete | 10.0 | 0.623 | 12.5 | Acceptor | |
| ETHYL ACETATE (85-88%) ⁷ | CH ₃ COOC ₂ H ₅ | 115 | 3.98 | 0.47 | 18 | 37 | 3.3 | 1.3 | 7.9 3.3 | 9.6 | 0.171 | 4.9 | Acceptor | |
| ETHYL ACETATE (95-98%) | CH ₃ COOC ₂ H ₅ | 117 | 3.91 | 0.46 | 19 | 44 | 3.1 | 1.1 | 8.7 3.3 | 9.3 | 0.156 | — | Acceptor | |
| ETHYL ACETATE (99%) | CH ₃ COOC ₂ H ₅ | 117 | 3.91 | 0.45 | 20 | — | 3.1 | 1.1 | 2.9 3.0 | 9.1 | 0.151 | 8.9 | Acceptor | |
| METHYL ACETATE (80%) | CH ₃ COOCH ₃ | 93 | 4.92 | 0.42 | 16 | <35 | 2.9 | 0.9 | 24.5 8.2 | 10.5 | 0.101 | — | Acceptor | |
| METHYL ETHYL KETONE | CH ₃ COC ₂ H ₅ | 121 | 3.79 | 0.41 | 15 | 36 | 4.3 | 0.9 | 27.1 12.5 | 9.3 | 0.514 | 10.5 | Acceptor | |
| iso-PROPYL ACETATE (95-97%) | CH ₃ COOCH(CH ₃) ₂ | 134 | 3.42 | 0.52 | 27 | 62 | 2.8 | 1.3 | 2.9 1.9 | 8.6 | 0.131 | 8.5 | Acceptor | |
| iso-PROPYL ETHER | (CH ₃) ₂ CHOCH(CH ₃) ₂ | 57 | 8.04 | 0.35 | COSOLVENT FOR NITROCELLULOSE | | | | 1.1 0.5 | 7.0 | 0.021 | 15.6 | D-A ⁸ | |
| TETRAHYDROFURAN | <u>O</u> CH ₂ CH ₂ CH ₂ CH ₂ | 97 | 4.72 | 0.50 | 21 | 50 | 2.9 | 1.1 | Complete | 9.9 | 0.135 | 16.5 | Acceptor | |
| Medium Evaporating—Relative Evaporation Rate 0.8-3.0 | | | | | | | | | | | | | | |
| iso-BUTYL ACETATE (90%) | CH ₃ COOCH ₂ CH(CH ₃) ₂ | 305 | 1.50 | 0.68 | 37 | 78 | 2.2 | 1.1 | 0.67 1.65 | 8.3 | 0.093 | 8.7 | Acceptor | |
| n-BUTYL ACETATE (90-92%) | CH ₃ COOC ₄ H ₉ | 458 | 1.00 | 0.71 | 35 | 82 | 2.7 | 1.4 | 1.0 1.37 | 9.0 | 0.096 | 5.7 | Acceptor | |
| n-BUTYL ACETATE (99%) | CH ₃ COOC ₄ H ₉ | 468 | 0.98 | 0.68 | 44 | — | 2.7 | 1.3 | — — | 8.6 | 0.095 | 10.8 | Acceptor | |
| sec-BUTYL ACETATE (90%) | CH ₃ COOCH(CH ₃)C ₂ H ₅ | 257 | 1.78 | 0.65 | 33 | 76 | 2.6 | 1.3 | 0.74 2.1 | 8.2 | 0.090 | 8.3 | Acceptor | |
| sec-BUTYL ALCOHOL | CH ₃ CH ₂ CHOHCH ₃ | 563 | 0.81 | 2.9 | COSOLVENT FOR NITROCELLULOSE | | | | 15.4 65.1 | 10.8 | 0.111 | -17.5 | D-A | |
| tert-BUTYL ALCOHOL | C(CH ₃) ₃ OH | (430) | (1.05) | 3.35 ⁹² | COSOLVENT FOR NITROCELLULOSE | | | | Complete | 10.2 | 0.116 | -17.0 | D-A | |
| 1,1,1,-TRICHLOROETHANE | CH ₃ CCL ₃ | 76 | 6.0 | 0.79 | — | — | — | — | — — | 8.7 | 0.0 | 4.2 | Acceptor | |
| DIETHYL KETONE | C ₂ H ₅ COC ₂ H ₅ | 205 | 2.23 | 0.47 | 20 | 76 | 3.0 | 0.7 | 3.4 2.6 | 9.9 | 0.403 | 7.7 | Acceptor | |
| ETHYL ALCOHOL 200 PRF. ANHYD | C ₂ H ₅ OH | 278 | 1.60 | 1.1 | COSOLVENT FOR NITROCELLULOSE | | | | Complete | 12.7 | 0.299 | -17.7 | D-A | |
| ETHYL ALCOHOL 190 PRF. (95%) | C ₂ H ₅ OH | 328 | 1.40 | 1.4 | COSOLVENT FOR NITROCELLULOSE | | | | Complete | 13.2 | 0.326 | — | D-A | |
| METHYL ALCOHOL | CH ₃ OH | 221 | 2.07 | 0.56 | 19 | — | 2.2 | 0.5 | Complete | 14.5 | 0.484 | -19.8 | D-A | |
| METHYL ISOBUTYL KETONE | CH ₃ COCH ₂ CH(CH ₃) ₂ | 295 | 1.61 | 0.55 | 19 | 78 | 3.6 | 1.0 | 2.04 2.41 | 8.4 | 0.317 | 10.5 | Acceptor | |
| METHYL ISOPROPYL KETONE | CH ₃ COCH(CH ₃) ₂ | 164 | 2.79 | 0.48 | 19 | — | 3.8 | 0.9 | 2.3 2.0 | 8.9 | 0.437 | 10.5 | Acceptor | |
| METHYL n-PROPYL KETONE | CH ₃ COC ₃ H ₇ | 201 | 2.28 | 0.68 | 20 | 70 | 4.0 | 1.1 | 4.3 3.3 | 8.7 | 0.415 | 11.0 | Acceptor | |
| 2-NITROPROPANE | CH ₃ CHNO ₂ CH ₃ | 415 | 1.10 | 0.75 | 63 | 82 | 1.2 | 0.4 | 1.7 0.6 | 9.9 | 0.627 | 4.0 | D-A | |
| n-PROPYL ACETATE (90-92%) | CH ₃ COOC ₃ H ₇ | 220 | 2.08 | 0.59 | 26 | 65 | 3.2 | 1.5 | 2.3 2.6 | 8.75 | 0.102 | 8.5 | Acceptor | |
| iso-PROPYL ALCOHOL | (CH ₃) ₂ CHOH | 319 | 1.44 | 2.4 | COSOLVENT FOR NITROCELLULOSE | | | | Complete | 11.5 | 0.170 | -16.7 | D-A | |
| n-PROPYL ALCOHOL | C ₃ H ₇ OH | 530 | 0.86 | 2.0 | COSOLVENT FOR NITROCELLULOSE | | | | Complete | 11.9 | 0.199 | -16.5 | D-A | |

(continued)

Table 2.137: (continued)

| | Chemical Formula | Molecular Weight | Boiling Point (or Range) | | Freezing Point, °C ¹ | Flash Point °F ± 5° (Tag Closed Cup) | Vapor Pressure mmHg @ 20°C ¹ | Refractive Index n _D ²⁰ ¹ | Surface Tension, Dynes/cm 20°C ¹ | Coefficient of Expansion of (ΔV/VΔT) @ 20°C | Average Pounds Per Gallon @ (VOC Content) | | Average Specific Gravity | |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------|--------------------------|---------|---------------------------------|--------------------------------------|-----------------------------------------|------------------------------------------------------------|---------------------------------------------|---------------------------------------------|-------------------------------------------|------|--------------------------|---------|
| | | | °C | °F | | | | | | | 25°C | 60°F | 25/25°C | 60/60°F |
| Slow Evaporating—Relative Evaporation Rate (0.8) | | | | | | | | | | | | | | |
| AMYL ACETATE (ex Fusel Oil) (85-88%) | CH ₃ COOC ₅ H ₁₁ | 130.18 | 146.0 | 294.8 | - 100.0 | 93 ¹⁸ | 5.2 | 1.401 | 24.3 | 0.00104 | 7.14 | 7.21 | 0.859 | 0.866 |
| AMYL ACETATE, PRIMARY (Mixed Isomers) (95%) | CH ₃ COOC ₅ H ₁₁ | 130.18 | 146.0 | 294.8 | - 100 ¹⁶ | 101 | 3.8 | 1.4013 | 28.5 | 0.00115 | 7.26 | 7.34 | 0.874 | 0.881 |
| AMYL ALCOHOL, PRIMARY (Mixed Isomers) | C ₅ H ₁₁ OH | 88.15 | 133.1 | 271.6 | - 90.0 | — | 2.9 | 1.4014 | 23.8 | 0.00092 | 6.77 | 6.83 | 0.814 | 0.820 |
| tert-AMYL ALCOHOL | (CH ₃) ₂ COHC ₂ H ₅ | 88.15 | 102.2 | 216.0 | - 8.4 | — | — | 1.4048 | — | 0.00133 | 5.71 | 6.77 | 0.807 | 0.814 |
| iso-BUTYL ALCOHOL | CH ₃ CH(CH ₃)CH ₂ OH | 74.12 | 107.8 | 226.0 | - 108.0 | 86 | 8.8 | 1.3859 | 22.8 | 0.00096 | 6.65 | 6.71 | 0.801 | 0.806 |
| n-BUTYL ALCOHOL | C ₄ H ₉ OH | 74.12 | 117.7 | 243.9 | - 89.0 | 98 | 4.1 | 1.3993 | 24.6 | 0.00090 | 6.72 | 6.78 | 0.808 | 0.814 |
| BUTYL DIOXITOL* GLYCOL ETHER | C ₄ H ₉ O(C ₂ H ₄ O) ₂ H | 162.22 | 230.4 | 446.7 | - 68.1 | 220 | <0.01 | 1.4316 | 30.0 ⁹ | 0.00085 | 7.95 | 8.01 | 0.956 | 0.962 |
| BUTYL OXITOL* GLYCOL ETHER | C ₄ H ₉ OC ₂ H ₄ OH | 118.17 | 171.2 | 340.2 | - 75.0 | 143 | 0.8 | 1.4193 | 27.3 | 0.00092 | 7.49 | 7.55 | 0.901 | 0.907 |
| m-CRESOL | CH ₃ C ₆ H ₄ OH | 108.141 | 202.0 | 396.0 | - 12.2 | 187 ¹⁶ | 0.14 ⁹ | 1.5414 | 38.01 ¹⁷ | — | 8.58 | — | 1.030 | — |
| CYCLOHEXANOL | CH ₂ CH ₂ CH ₂ CH ₂ CH ₂ CHOH | 100.16 | 160.65 | 321.2 | - 25.15 | 154 | 1.1 | 1.4656 | 35.1 | 0.00077 | 7.87 | 7.94 | 0.947 | 0.953 |
| CYCLOHEXANONE | CH ₂ CH ₂ CH ₂ CH ₂ CH ₂ CO | 98.14 | 156.7 | 314.1 | - 47.0 | 111 | 3.4 | 1.4507 | 27.7 | 0.00094 | 7.86 | 7.93 | 0.946 | 0.952 |
| DIACETONE ALCOHOL | (CH ₃) ₂ C(OH)CH ₂ COCH ₃ | 116.16 | 169.2 | 362.8 | - 44.0 | 133 | 0.95 | 1.4234 | 28.9 | 0.00094 | 7.79 | 7.86 | 0.937 | 0.944 |
| DIBASIC ESTER | CH ₃ OCO(CH ₂) _n COOCH ₃ (n=2, 3, 4) | 159.0 | 196-225 | 385-437 | - 20.0 | 212 | 0.24 | 1.4213 | 35.1 | 0.0010 | 9.13 | 9.23 | 1.097 | 1.1075 |
| DIETHYLENE GLYCOL | HO(C ₂ H ₄ O) ₂ H | 106.12 | 245.0 | 473.0 | - 7.8 | 300 ²⁰ | 0.02 | 1.4472 | 48.5 | 0.000635 | 9.28 | 9.33 | 1.116 | 1.120 |
| DIETHYLENE GLYCOL MONOBUTYL ETHER ACETATE (95%) | CH ₃ COO(C ₂ H ₄ O) ₂ C ₄ H ₉ | 204.27 | 246.0 | 475.0 | - 32.2 | 240 ¹³ | <0.01 | 1.4262 | — | 0.00101 | 8.15 | 8.19 | 0.981 | 0.984 |
| DIISOBUTYL KETONE | (CH ₃)CHCH ₂ COCH ₂ CH(CH ₃) ₂ | 142.23 | 169.3 | 336.7 | - 41.5 | 140 | 1.4 | 1.4230 | 22.5 | 0.00102 | 6.70 | 6.76 | 0.806 | 0.811 |
| DIMETHYL FORMAMIDE | CHON(CH ₃) ₂ | 73.09 | 153.0 | 307.4 | - 61.0 | 135 | 2.7 | 1.4269 ⁹ | 35.2 | — | 7.79 | 7.87 | 0.938 | 0.945 |
| DIETHYLENE GLYCOL MONOETHYL ETHER—low gravity | C ₂ H ₅ O(C ₂ H ₄ O) ₂ H | 134.18 | 201.9 | 395.4 | - 76.0 | 192 | 0.2 | 1.4273 | 35.5 | 0.00090 | 8.21 | 8.28 | 0.988 | 0.994 |
| DIETHYLENE GLYCOL MONOETHYL ETHER—high gravity | C ₂ H ₅ O(C ₂ H ₄ O) ₂ H | — | 190-205 | 374-401 | — | 201 | 0.1 | 1.4286 | — | 0.00090 | 8.51 | 8.58 | 1.024 | 1.030 |
| DIPROPYLENE GLYCOL MONOMETHYL ETHER | CH ₃ OCH ₂ CHCH ₃ OCH ₂ CHCH ₂ OH | 148.2 | 188.3 | 371.0 | - 80.0 | 167 | 0.4 | 1.4198 | 28.8 | 0.00091 | 7.91 | 7.98 | 0.951 | 0.957 |
| DIPROPYLENE GLYCOL MONOMETHYL ETHER ACETATE | CH ₃ OCH ₂ CHCH ₃ OCH ₂ CHCH ₂ OOCC ₂ H ₅ | 190.2 | 205.0 | 401.0 | — | 187 | 0.2 | 1.4140 | 28.3 | — | 8.09 | 8.18 | 0.972 | 0.983 |
| ETHYL BUTYL KETONE | C ₂ H ₅ COC ₄ H ₉ | 114.18 | 147.6 | 297.7 | - 39.0 | 115 ¹³ | 10.2 | 1.4085 | — | 0.00106 | 6.79 | 6.85 | 0.816 | 0.822 |

(continued)

Table 2.137: (continued)

| | Chemical Structure | Evaporation Characteristics | | Viscosities cpa @ 25°C | | | Dilution Ratio ⁴ | | Solubility of Pure Compound @ 20°C, % by Weight | | Physical Chemical Parameters | | | |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------|--------------------------------|----------------------------------------------|-----------------------------|--------------------------------|-------------------------------------------------|----------|------------------------------|---------------------|-------|------------------|
| | | Seconds to Evap. ² | Relative Rate =1.0 | Neat Compound | 8gm N.C. ³ Solution | Blush Resist % Rel. Hum. @ 80°F ³ | Toluene | Aliphatic Naphtha ⁵ | In Water | Water In | Solubility Parameter | Fractional Polarity | Index | Hydrogen Bonding |
| | | | | | | | | | | | | | | Characteristics |
| | | | | | | | | | | | | | | |
| Slow Evaporating—Relative Evaporation Rate (0.8) | | | | | | | | | | | | | | |
| AMYL ACETATE (ex Fusel Oil) (85-88%) | CH ₃ COOC ₅ H ₁₁ | 689 | 0.67 | 0.83 | 39 | 88 | 2.5 | 1.7 | 0.17 | 1.15 | 8.9 | 0.068 | 8.2 | Acceptor |
| AMYL ACETATE, PRIMARY (Mixed Isomers) (95%) | CH ₃ COOC ₅ H ₁₁ | 1203 | 0.38 | 0.83 | 55 | 92 | 2.3 | 1.4 | 0.20 | 0.90 | 8.45 | 0.077 | 8.2 | Acceptor |
| AMYL ALCOHOL, PRIMARY (Mixed Isomers) | C ₅ H ₁₁ OH | 2305 | 0.20 | 3.7 | COSOLVENT FOR NITROCELLULOSE | | | 1.7 | 9.2 | 10.9 | 0.074 | — | D-A | |
| tert-AMYL ALCOHOL | (CH ₃) ₂ COHC ₂ H ₅ | 505 | 0.91 | 3.5 | COSOLVENT FOR NITROCELLULOSE | | | 13.7 | 20.9 | 10.0 | 0.093 | — | D-A | |
| iso-BUTYL ALCOHOL | CH ₃ CH(CH ₃)CH ₂ OH | 740 | 0.62 | 1.8 | COSOLVENT FOR NITROCELLULOSE | | | 8.7 | 15.0 | 10.7 | 0.125 | -17.9 | D-A | |
| n-BUTYL ALCOHOL | C ₄ H ₉ OH | 1076 | 0.43 | 2.6 | COSOLVENT FOR NITROCELLULOSE | | | 7.7 | 20.1 | 11.4 | 0.102 | -18.0 | D-A | |
| BUTYL DIOXITOL* GLYCOL ETHER | C ₄ H ₉ O(C ₂ H ₄ O) ₂ H | 150390 | <0.01 | 5.3 | 215 | 85 | 3.9 | 1.9 | Complete | 8.9 | 0.060 | 0.0 | D-A | |
| BUTYL OXITOL* GLYCOL ETHER | C ₄ H ₉ OC ₂ H ₄ OH | 6750 | 0.07 | 2.9 | 107 | 96 | 3.3 | 1.8 | Complete | 8.9 | 0.128 | 0.0 | D-A | |
| m-CRESOL | CH ₃ C ₆ H ₄ OH | — | <0.1 | 9.8 ¹² | — | — | — | — | 2.51 ¹⁸ | — | 11.7 | 0.047 | -15.0 | D-A |
| CYCLOHEXANOL | CH ₂ CH ₂ CH ₂ CH ₂ CH ₂ CHOH | 9160 | 0.05 | 52.7 | COSOLVENT FOR NITROCELLULOSE | | | 0.13 | 11.8 | 11.4 | 0.082 | -14.8 | D-A | |
| CYCLOHEXANONE | CH ₂ CH ₂ CH ₂ CH ₂ CH ₂ CO | 1566 | 0.29 | 2.0 | 74 | 92 | 5.8 | 1.3 | 2.3 | 8.0 | 9.9 | 0.469 | 13.7 | Acceptor |
| DIACETONE ALCOHOL | (CH ₃) ₂ C(OH)CH ₂ COCH ₃ | 3840 | 0.12 | 2.9 | 137 | 82 ¹⁹ | 2.3 | 0.6 | Complete | 9.2 | 0.459 | 0.0 | D-A | |
| DIBASIC ESTER | CH ₃ OCO(CH ₂) _n COOCH ₃ (n=2 to 4) | 56700 | <0.01 | 2.39 | — | — | — | — | 5.3 | 3.1 | 9.7 | 0.140 | 8.2 | Acceptor |
| DIETHYLENE GLYCOL | HO(C ₂ H ₄ O) ₂ H | — | <0.001 | 28.9 | — | — | — | — | Complete | 12.1 | 0.602 | 0.0 | D-A | |
| DIETHYLENE GLYCOL MONOBUTYL ETHER ACETATE (95%) | CH ₃ COO(C ₂ H ₄ O) ₂ C ₄ H ₉ | 327780 | <0.01 | 3.1 | — | — | 1.8 | 0.9 | 6.5 | 3.7 | 8.8 | 0.093 | — | Acceptor |
| DIISOBUTYL KETONE | (CH ₃) ₂ CHCH ₂ COCH ₂ CH(CH ₃) ₂ | 2437 | 0.19 | 0.95 | 126 | 95 | 1.5 | 0.8 | <0.05 | 0.75 | 7.8 | 0.157 | 9.8 | Acceptor |
| DIMETHYL FORMAMIDE | CHON(CH ₃) ₂ | 2280 | 0.20 | 0.82 | 14 | — | 7.7 | 0.2 | Complete | 12.1 | 0.796 | 18.9 | D-A | |
| DIETHYLENE GLYCOL MONOETHYL ETHER—low gravity | C ₂ H ₅ O(C ₂ H ₄ O) ₂ H | 27800 | 0.02 | 4.0 | 135 | <50 ¹⁹ | 4.8 | Imm. | Complete | 9.7 | 0.092 | 0.0 | D-A | |
| DIETHYLENE GLYCOL MONOETHYL ETHER—high gravity | C ₂ H ₅ O(C ₂ H ₄ O) ₂ H | 36300 | 0.01 | 7.0 | 320 | — | 2.0 | Imm. | Complete | 11.0 | 0.045 | 3.4 | D-A | |
| DIPROPYLENE GLYCOL MONOMETHYL ETHER | CH ₃ OCH ₂ CHCH ₂ OCH ₂ CHCH ₂ OH | 22900 | 0.02 | 3.4 | — | — | 4.4 | 0.8 | Complete | 9.6 | 0.175 | 0.0 | D-A | |
| DIPROPYLENE GLYCOL MONOMETHYL ETHER ACETATE | CH ₃ OCH ₂ CHCH ₂ OCH ₂ CHCH ₂ OOCCH ₃ | 42200 | <0.01 | 2.1 | — | — | — | — | 12.3 | — | 8.2 | 0.107 | — | Acceptor |
| ETHYL BUTYL KETONE | C ₂ H ₅ COC ₄ H ₉ | 1075 | 0.43 | 0.70 | 49 | 94 | 2.6 | 0.8 | 1.43 | 0.78 | 8.4 | 0.361 | 10.0 | Acceptor |

(continued)

Table 2.137: (continued)

| | Chemical | Molecular Weight | Boiling Point (or Range) | | Freezing Point, °C ¹ | Flash Point °F ± 5° (Tag Closed Cup) | Vapor Pressure mmHg @ 20°C ¹ | Refractive Index n _D ²⁰ ¹ | Surface Tension, Dynes/cm 20°C ¹ | Coefficient of Expansion @ 20°C $\left(\frac{\Delta V}{V\Delta T}\right)$ | Average Pounds Per Gallon @ (VOC Content) | | Average Specific Gravity | |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------|--------------------------|---------|---------------------------------|--------------------------------------|-----------------------------------------|------------------------------------------------------------|---------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------|------|--------------------------|---------|
| | | | °C | °F | | | | | | | 25°C | 60°F | 25/25°C | 60/60°F |
| Slow Evaporating—Relative Evaporation Rate (0.8) | | | | | | | | | | | | | | |
| ETHYL 3-ETHOXY PROPIONATE | C ₂ H ₅ OCOC ₂ H ₄ OC ₂ H ₅ | 146.2 | 165-172 | 329-342 | < -50.0 | 136 | 1.11 | 1.4050 | 24.2 | 0.001176 | 7.82 | 7.95 | 0.946 | 0.954 |
| ETHYLENE GLYCOL | HOC ₂ H ₄ OH | 62.07 | 197.3 | 387.1 | - 12.7 | 250 ²⁰ | 0.06 | 1.4318 | 48.4 | 0.000566 ⁹ | 9.26 | 9.31 | 1.114 | 1.118 |
| 2 ETHYL HEXANOL | C ₄ H ₉ CH(C ₂ H ₅)CH ₂ OH | 130.23 | 184.8 | 364.6 | - 76.0 | 166 | 0.09 | 1.4328 | — | 0.00088 | 6.91 | 6.96 | 0.831 | 0.836 |
| 2 ETHYL HEXYL ACETATE (95%) | CH ₃ COOCH ₂ CH(C ₂ H ₅)C ₄ H ₉ | 172.27 | 199.0 | 390.2 | - 80.0 | 160 | 0.4 | 1.4103 | — | — | 7.23 | 7.30 | 0.870 | 0.876 |
| ETHYLENE GLYCOL MONOETHYL ETHER ACETATE (95%) | CH ₃ COOC ₂ H ₄ OC ₂ H ₅ | 132.16 | 150-160 | 302-320 | — | 126 | — | — | — | 0.00112 | 8.06 | 8.15 | 0.970 | 0.978 |
| ETHYLENE GLYCOL MONOETHYL ETHER ACETATE (99%) | CH ₃ COOC ₂ H ₄ OC ₂ H ₅ | 132.16 | 156.3 | 313.3 | - 61.7 | 126 | 2.0 | 1.4030 | 28.2 | 0.00112 | 8.06 | 8.15 | 0.970 | 0.978 |
| ETHYLENE GLYCOL MONOBUTYL ETHER ACETATE | CH ₃ COOC ₂ H ₄ OC ₄ H ₉ | 160.21 | 191.6 | 376.9 | - 64.6 | 165 | 0.25 | 1.4200 | 30.3 | 0.00104 | 7.79 | 7.88 | 0.938 | 0.946 |
| HEXYLENE GLYCOL | CH ₃ CH(OH)CH ₂ C(OH)(CH ₃) ₂ | 118.17 | 198.27 | 388.9 | - 50 ¹⁵ | 211 ²⁰ | <0.1 | 1.4276 | 33.1 | 0.00072 | 7.65 | 7.71 | 0.921 | 0.926 |
| ISOBUTYL ISOBUTYRATE | (CH ₃) ₂ CHCOOCH ₂ CH(CH ₃) ₂ | 144.21 | 147.3 | 297.1 | - 81.0 | 101 | 3.0 | 1.3999 | — | — | 7.07 | 7.15 | 0.851 | 0.859 |
| ISOPHORONE | COCH ₂ C(CH ₃)CH ₂ C(CH ₃) ₂ CH ₂ | 138.2 | 215.2 | 419.4 | - 8.1 | 184 | 0.3 | 1.4775 | 32.3 | 0.00085 | 7.64 | 7.70 | 0.919 | 0.925 |
| METHYL n-AMYL KETONE | CH ₃ COC ₅ H ₁₁ | 114.18 | 150.5 | 302.9 | - 35.0 | 102 | 1.0 | 1.4110 | — | 0.00104 | 6.77 | 6.83 | 0.814 | 0.820 |
| DIETHYLENE GLYCOL MONOMETHYL ETHER | CH ₃ O(C ₂ H ₄ O) ₂ H | 120.15 | 194.2 | 381.6 | - 85.0 | 189 | 0.2 | 1.4263 | 34.8 ⁹ | 0.00088 | 8.49 | 8.56 | 1.021 | 1.028 |
| METHYL ISOAMYL KETONE | CH ₃ COC ₂ H ₄ CH(CH ₃) ₂ | 114.18 | 145.4 | 293.7 | - 74.21 | 96 | 4.0 | 1.4069 | 28.5 | 0.00107 | 6.79 | 6.85 | 0.817 | 0.822 |
| METHYL ISOBUTYL CARBINOL | CH ₃ CH(OH)CH ₂ CH(CH ₃) ₂ | 102.18 | 131.8 | 269.2 | - 90 ¹⁵ | 103 | 4.6 | 1.4110 | 22.8 | 0.00103 | 6.69 | 6.75 | 0.805 | 0.811 |
| ETHYLENE GLYCOL MONOMETHYL ETHER | CH ₃ OCH ₂ H ₄ OH | 76.09 | 124.5 | 256.1 | - 85.1 | 102 | 7.3 | 1.4021 | 30.6 | 0.00095 | 8.00 | 8.08 | 0.963 | 0.970 |
| N-METHYL-2-PYRROLIDONE | CH ₂ CH ₂ N(CH ₃)COCH ₂ | 99.133 | 202.0 | 396.0 | - 24.4 | 204 ²¹ | 0.32 ⁹ | 1.469 ⁹ | 40.7 ⁹ | — | 8.59 | — | 1.031 | — |
| ETHYLENE GLYCOL MONOETHYL ETHER | C ₂ H ₅ OC ₂ H ₄ OH | 90.12 | 135.1 | 275.2 | - 100.0 | 110 | 4.1 | 1.4076 | 27.9 | 0.00097 | 7.72 | 7.79 | 0.928 | 0.935 |
| PROPYLENE GLYCOL | CH ₃ CH(OH)CH ₂ OH | 76.10 | 187.3 | 369.1 | - 60.0 ¹⁵ | 210 | 0.15 | 1.431 ¹⁰ | 36.0 | 0.000695 | 8.61 | 8.66 | 1.036 | 1.040 |
| PROPYLENE GLYCOL MONOMETHYL ETHER | CH ₃ OCH ₂ CHCH ₂ OH | 90.1 | 120.1 | 248.0 | - 95.0 | 90 | 10.9 | 1.4011 | 27.7 | 0.00099 | 7.65 | 7.72 | 0.919 | 0.927 |
| PROPYLENE GLYCOL MONOMETHYL ETHER ACETATE | CH ₃ OCH ₂ CH ₂ CHOOCCH ₃ | 132.2 | 141.0 | 286.0 | <- 67.0 | 117 | 3.7 | 1.3995 | 27.4 | 0.00096 | 8.03 | 8.10 | 0.964 | 0.969 |
| PROPYLENE GLYCOL MONO TERTIARY BUTYL ETHER | (CH ₃) ₃ COCH ₂ CHCH ₂ OH | 132.2 | 151.0 | 304.0 | - 56.0 | 113 | 4.7 | 1.4116 | 24.2 | — | 7.26 | 7.31 | 0.872 | 0.878 |
| TRIETHYLENE GLYCOL | HO(C ₂ H ₄ O) ₃ H | 150.17 | 287.4 | 549.3 | - 7.2 | 305 ²⁰ | <0.01 | 1.4559 | 45.2 | 0.00171 | 9.34 | 9.39 | 1.123 | 1.128 |
| WATER | HOH | 18.02 | 100.0 | 212.0 | - 0.0 | — | 17.535 | 1.33299 | 72.75 | — | 8.31 | 8.33 | 1.000 | 1.000 |

(continued)

Table 2.137: (continued)

| | Chemical Structure | Evaporation Characteristics | | Viscosities cps @ 25°C | | | Blush Resist % Rel. Hum. @ 80°F ³ | Dilution Ratio ⁴ | | Solubility of Pure Compound @ 20°C, % by Weight | | Physical Chemical Parameters | | | |
|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------|---------------------------|------------------------|--------------------------------|-----------------|----------------------------------------------|--------------------------------|----------|-------------------------------------------------|----------------------|------------------------------|-------|------------------|-----|
| | | Seconds to 90% Evap. ² | Relative Rate nBuOAc =1.0 | Neat Compound | 8gm N.C. ³ Solution | Toluene | | Aliphatic Naphtha ⁵ | In Water | Water In | Solubility Parameter | Fractional Polarity | Index | Hydrogen Bonding | |
| | | | | | | | | | | | | | | Accepter | D-A |
| | | | | | | | | | | | | | | | |
| Slow Evaporating—Relative Evaporation Rate <0.8 | | | | | | | | | | | | | | | |
| ETHYL 3-ETHOXY PROPIONATE | C ₂ H ₅ OCOC ₂ H ₄ OC ₂ H ₅ | 3900 | 0.12 | 1.2 | — | — | 1.8 | 0.6 | 2.9 | 2.9 | 8.7 | 0.094 | 11.5 | Accepter | |
| ETHYLENE GLYCOL | HOC ₂ H ₄ OH | — | <0.01 | 17.4 | — | — | — | — | Complete | Complete | 14.7 | 0.476 | -13.2 | D-A | |
| 2 ETHYL HEXANOL | C ₄ H ₉ CH(C ₂ H ₅)CH ₂ OH | 25730 | 0.02 | 7.7 | COSOLVENT FOR NITROCELLULOSE | | | 0.07 | 2.6 | 9.5 | 0.045 | -18.7 | D-A | | |
| 2 ETHYL HEXYL ACETATE (95%) | CH ₃ COOCH ₂ CH(C ₂ H ₅)C ₄ H ₉ | 13750 | 0.03 | 1.4 | 140 | 94 | 1.3 | 0.9 | 0.03 | 0.55 | 8.5 | 0.020 | 8.8 | Accepter | |
| ETHYLENE GLYCOL MONOETHYL ETHER ACETATE (95%) | CH ₃ COOC ₂ H ₄ OC ₂ H ₅ | 2706 | 0.17 | 1.2 | 57 | 91 | 2.5 | 0.9 | 22.9 | 6.5 | 8.8 | 0.163 | — | Accepter | |
| ETHYLENE GLYCOL MONOETHYL ETHER ACETATE (99%) | CH ₃ COOC ₂ H ₄ OC ₂ H ₅ | 2533 | 0.18 | 1.2 | 60 | — | 2.4 | 0.9 | — | — | 8.7 | 0.160 | 10.1 | Accepter | |
| ETHYLENE GLYCOL MONOBUTYL ETHER ACETATE | CH ₃ COOC ₂ H ₄ OC ₄ H ₉ | 14310 | 0.03 | 1.7 | 102 | 96 | 1.8 | 1.2 | 1.1 | 1.6 | 8.2 | 0.060 | 10.3 | Accepter | |
| HEXYLENE GLYCOL | CH ₃ CH(OH)CH ₂ C(OH)(CH ₃) ₂ | — | <0.01 | 29.8 | — | — | — | — | Complete | Complete | 9.7 | 0.599 | -12.3 | Accepter | |
| ISOBUTYL ISOBUTYRATE | (CH ₃) ₂ CHCOOCH ₂ CH(CH ₃) ₂ | 965 | 0.47 | 0.83 | 87 | — | 1.3 | 0.8 | <0.1 | <0.2 | 7.7 | 0.091 | 8.0 | Accepter | |
| ISOPHORONE | COCH:C(CH ₃)CH ₂ C(CH ₃) ₂ CH ₂ | 20000 | 0.02 | 2.3 | 97 | 97 | 6.2 | — | 1.2 | 4.3 | 9.1 | 0.521 | 14.9 | Accepter | |
| METHYL n-AMYL KETONE | CH ₃ COC ₅ H ₁₁ | 1376 | 0.33 | 0.77 | 42 | 93 | 3.9 | 1.2 | 0.43 | 1.5 | 8.5 | 0.236 | 9.0 | Accepter | |
| DIETHYLENE GLYCOL MONOMETHYL ETHER | CH ₃ O(C ₂ H ₄ O) ₂ H | 26260 | 0.02 | 3.8 | 122 | 57 ⁹ | 2.3 | Imm. | Complete | Complete | 10.2 | 0.108 | 0.0 | D-A | |
| METHYL ISOAMYL KETONE | CH ₃ COC ₂ H ₄ CH(CH ₃) ₂ | 1016 | 0.45 | 0.73 | 40 | 89 | 3.8 | 1.1 | 0.55 | 1.4 | 8.3 | 0.240 | 10.9 | Accepter | |
| METHYL ISOBUTYL CARBINOL | CH ₃ CH(OH)CH ₂ CH(CH ₃) ₂ | 1711 | 0.27 | 3.8 | COSOLVENT FOR NITROCELLULOSE | | | 1.64 | 6.35 | 10.0 | 0.071 | -18.7 | D-A | | |
| ETHYLENE GLYCOL MONOMETHYL ETHER | CH ₃ OC ₂ H ₄ OH | 884 | 0.52 | 1.6 | 50 | 45 ⁹ | 3.4 | 0.2 | Complete | Complete | 10.8 | 0.281 | 0.0 | D-A | |
| N-METHYL-2-PYRROLIDONE | CH ₂ CH ₂ N(CH ₃)COCH ₂ | — | <0.1 | 1.7 | — | — | — | — | Complete | Complete | 11.3 | 0.727 | 23.0 | D-A | |
| ETHYLENE GLYCOL MONOETHYL ETHER | C ₂ H ₅ OC ₂ H ₄ OH | 1213 | 0.38 | 1.9 | 59 | 67 ⁹ | 4.9 | 1.1 | Complete | Complete | 9.9 | 0.216 | 0.0 | D-A | |
| PROPYLENE GLYCOL | CH ₃ CH(OH)CH ₂ OH | — | 0.01 | 43.0 | — | — | — | — | Complete | Complete | 12.6 | 0.773 | -10.9 | D-A | |
| PROPYLENE GLYCOL MONOMETHYL ETHER | CH ₃ OCH ₂ CHCH ₂ OH | 600 | 0.76 | 1.7 | — | — | 5.2 | 0.9 | Complete | Complete | 10.2 | 0.217 | 0.0 | D-A | |
| PROPYLENE GLYCOL MONOMETHYL ETHER ACETATE | CH ₃ OCH ₂ CH ₂ CHOOCC ₂ H ₅ | 1410 | 0.32 | 1.14 | 60 | — | 2.5 | 0.43 | 18.5 | 5.6 | 9.2 | 0.153 | 10.7 | Accepter | |
| PROPYLENE GLYCOL MONO TERTIARY BUTYL ETHER | (CH ₃) ₃ COCH ₂ CHCH ₂ OH | 1830 | 0.25 | 3.3 | — | — | 2.3 | 1.2 | 14.5 | 20.1 | 8.1 | 0.128 | 0.0 | D-A | |
| TRIETHYLENE GLYCOL | HO(C ₂ H ₄ O) ₃ H | — | <0.01 | 38.2 | — | — | — | — | Complete | Complete | 11.0 | 0.656 | 0.0 | D-A | |
| WATER | HOH | 1376 | 0.33 | 0.92 | — | — | — | — | — | — | 23.4 | 0.835 | -30.0 | D-A | |

Table 2.137: (continued)

HYDROCARBON SOLVENTS (Typical Properties*)

Please Note: Shell Sol 71 has changed to Shell Odorless Mineral Spirits (OMS).

| | Calculated Average Molecular Weight ¹⁴ | Distillation Range | | Flash Point °F TCC ²³ or SFCC ²⁴ | Vapor Pressure mmHg @ 20 °C | Aniline Cloud Pt. °F | Mixed Aniline Cloud Pt. °F | Kauri Butanol Value | Average Pounds Per Gallon @ (VOC Content) | | Average Specific Gravity | |
|--------------------------------------|------------------------------------------------------------|--------------------|---------|-----------------------------------------------------------------|--------------------------------------|----------------------------|-------------------------------------|---------------------------|----------------------------------------------------|--------------------|-----------------------------|-----------------------|
| | | °C | °F | | | | | | 25°C | 60°F ²⁵ | 25/25°C | 60/60°F ²⁵ |
| | | | | | | | | | | | | |
| Aliphatic Hydrocarbons | | | | | | | | | | | | |
| SHELL SOL B HT | 88 | 61-77 | 142-170 | — | 140.0 | 152 | — | 29 | 5.53 | 5.61 | 0.666 | 0.675 |
| SHELL TOLU-SOL® A HT SOLVENT | 100 | 90-97 | 194-206 | 7 | 47.8 | 155 | — | 29 | 5.71 | 5.79 | 0.688 | 0.696 |
| SHELL TOLU-SOL W HT SOLVENT | 100 | 98-110 | 209-230 | 20 | 41.4 | 129 | — | 36 | 6.17 | 6.23 | 0.741 | 0.749 |
| SHELL TOLU-SOL 3 SOLVENT | 100 | 91-97 | 195-207 | — | 47.2 | 150 | — | 30 | 5.74 | 5.82 | 0.691 | 0.699 |
| SHELL TOLU-SOL 5 SOLVENT | 100 | 91-98 | 195-209 | 10 | 46.8 | 146 | — | 30 | 5.77 | 5.85 | 0.695 | 0.703 |
| SHELL TOLU-SOL 6 W SOLVENT | 100 | 99-108 | 211-227 | 20 | 40.7 | 113 | — | 43 | 6.23 | 6.29 | 0.748 | 0.755 |
| SHELL TOLU-SOL 10 SOLVENT | 99 | 91-105 | 196-221 | — | 45.8 | 133 | — | 34 | 5.87 | 5.95 | 0.706 | 0.714 |
| SHELL TOLU-SOL 19 EC SOLVENT | 98 | 91-104 | 195-220 | 14 | 44.0 | 116 | — | 39 | 6.00 | 6.08 | 0.722 | 0.730 |
| SHELL TOLU-SOL 25 SOLVENT | 98 | 92-107 | 198-225 | — | 42.7 | 105 | — | 42 | 6.09 | 6.17 | 0.733 | 0.741 |
| SHELL RUBBER SOLVENT | 90 | 64-114 | 147-238 | — | 125.3 | 135 | — | 34 | 5.65 | 5.79 | 0.680 | 0.689 |
| SHELL VM&P NAPHTHA HT | 118 | 119-139 | 247-282 | 55 | 9.8 | 142 | — | 35 | 6.19 | 6.27 | 0.745 | 0.753 |
| SHELL VM&P NAPHTHA EC | 117 | 121-134 | 249-273 | 57 | 9.7 | 128 | — | 38 | 6.24 | 6.31 | 0.751 | 0.758 |
| SHELL MINERAL SPIRITS 135 | 138 | 164-202 | 327-395 | 112 | 1.1 | 138 | — | 37 | 6.56 | 6.63 | 0.789 | 0.796 |
| SHELL MINERAL SPIRITS 145 EC | 131 | 162-201 | 323-393 | 113 | 1.2 | 145 | — | 35 | 6.44 | 6.52 | 0.776 | 0.783 |
| SHELL MINERAL SPIRITS 150 EC | 132 | 162-200 | 323-392 | 109 | 1.1 | 151 | — | 33 | 6.40 | 6.47 | 0.771 | 0.778 |
| SHELL MINERAL SPIRITS 200 HT | 132 | 162-206 | 324-402 | 111 | 1.1 | 154 | — | 32 | 6.40 | 6.47 | 0.770 | 0.777 |
| SHELL SOL 340 HT | 143 | 159-176 | 319-349 | 103 | 1.4 | 152 | — | 32 | 6.37 | 6.44 | 0.766 | 0.773 |
| SHELL SOL 142 HT | 161 | 190-207 | 374-405 | 145 | 0.4 | 159 | — | 30 | 6.52 | 6.58 | 0.784 | 0.791 |
| SHELL SOL 71 | 149 | 179-204 | 355-400 | 125 | 0.5 | 184 | — | 26 | 6.24 | 6.32 | 0.752 | 0.759 |
| Aromatic Hydrocarbons | | | | | | | | | | | | |
| SHELL TOLUENE | 92 | 110-111 | 231-232 | 43 | 21.8 | — | 50 | 105 | 7.16 | 7.25 | 0.862 | 0.871 |
| SHELL XYLENE | 106 | 139-142 | 283-287 | 79 | 6.1 | — | 53 | 95 | 7.17 | 7.25 | 0.883 | 0.871 |
| SHELL CYCLO-SOL® 53 AROMATIC SOLVENT | 120 | 160-176 | 320-349 | 111 | 1.6 | — | 56 | 92 | 7.19 | 7.27 | 0.866 | 0.874 |
| SHELL CYCLO-SOL 63 AROMATIC SOLVENT | 134 | 173-208 | 343-407 | 128 | 0.5 | — | 57 | 89 | 7.35 | 7.43 | 0.884 | 0.892 |

(continued)

Table 2.137: (continued)

| | Evaporation Characteristics ²² | | | Composition, %v | | | | | | | |
|--------------------------------------|-------------------------------------------|---------------------------|---------------------------|-----------------|----------------|------------------------|----------------------------------------|---------|-------|----------------------|--|
| | Seconds to 90% Evap. | Relative Rate nBuOAc =1.0 | Neat Viscosity cps @ 25°C | Saturates | | | Aromatics | | | | |
| | | | | Paraffins | Cycloparaffins | Tol & EB ²⁶ | C ₈ & Higher (excluding EB) | Benzene | Total | Solubility Parameter | |
| Allphatic Hydrocarbons | | | | | | | | | | | |
| SHELL SOL B HT | 49 | 9.4 | 0.37 | 94.7 | 5.3 | — | — | 0.002 | <0.01 | 7.3 | |
| SHELL TOLU-SOL® A HT SOLVENT | 96 | 4.8 | 0.43 | 91.2 | 8.8 | — | — | <0.001 | <0.01 | 7.2 | |
| SHELL TOLU-SOL W HT SOLVENT | 121 | 3.8 | 0.54 | 43 | 57 | <0.01 | — | <0.001 | <0.01 | 7.6 | |
| SHELL TOLU-SOL 3 SOLVENT | 97 | 4.7 | 0.43 | 88.4 | 8.6 | 3.0 | — | <0.001 | 3.0 | 7.3 | |
| SHELL TOLU-SOL 5 SOLVENT | 98 | 4.7 | 0.44 | 86.6 | 8.4 | 5.0 | — | <0.001 | 5.0 | 7.3 | |
| SHELL TOLU-SOL 6 W SOLVENT | 123 | 3.7 | 0.55 | 26.1 | 67.9 | 6.0 | — | <0.001 | 6.0 | 7.7 | |
| SHELL TOLU-SOL 10 SOLVENT | 101 | 4.5 | 0.45 | 82.0 | 8.0 | 10.0 | — | <0.001 | 10.0 | 7.4 | |
| SHELL TOLU-SOL 19 EC SOLVENT | 107 | 4.3 | 0.46 | 73.9 | 7.1 | 19.0 | — | <0.001 | 19.0 | 7.5 | |
| SHELL TOLU-SOL 25 SOLVENT | 112 | 4.1 | 0.47 | 68.4 | 6.6 | 25.0 | — | <0.001 | 25.0 | 7.6 | |
| SHELL RUBBER SOLVENT | 55 | 8.3 | 0.41 | 84.6 | 6.4 | 9.0 | — | <0.004 | 8.0 | 7.4 | |
| SHELL VM&P NAPHTHA HT | 305 | 1.5 | 0.68 | 54.0 | 46.0 | — | — | <0.003 | <0.1 | 7.6 | |
| SHELL VM&P NAPHTHA EC | 316 | 1.4 | 0.68 | 50.1 | 42.8 | 1.5 | 5.5 | <0.003 | 7.0 | 7.7 | |
| SHELL MINERAL SPIRITS 135 | 4660 | 0.10 | 1.10 | 41.9 | 43.1 | — | 15.0 | <0.0001 | 15.0 | 7.6 | |
| SHELL MINERAL SPIRITS 145 EC | 3250 | 0.14 | 1.02 | 44.5 | 48.4 | — | 7.1 | <0.0001 | 7.1 | 7.5 | |
| SHELL MINERAL SPIRITS 150 EC | 3415 | 0.13 | 1.13 | 46.5 | 50.4 | — | 3.1 | <0.0001 | 3.1 | 7.5 | |
| SHELL MINERAL SPIRITS 200 HT | 3420 | 0.13 | 1.12 | 47.9 | 52.0 | — | <0.1 | <0.0001 | <0.1 | 7.4 | |
| SHELL SOL 340 HT | 1725 | 0.27 | 0.95 | 46.0 | 53.9 | — | — | <0.0001 | <0.1 | 7.4 | |
| SHELL SOL 142 HT | 9250 | <0.1 | 1.44 | 53.0 | 47.0 | — | — | <0.0001 | <0.2 | 7.4 | |
| SHELL SOL 71 | 5140 | <0.1 | 1.50 | — | — | — | — | <0.0001 | <0.1 | 7.4 | |
| Aromatic Hydrocarbons | | | | | | | | | | | |
| SHELL TOLUENE | 226 | 2.0 | 0.62 | — | — | — | — | 0.005 | 99.97 | 8.9 | |
| SHELL XYLENE | 628 | 0.73 | 0.67 | — | — | 19.0 | 80.5 | <0.0005 | 99.5 | 8.8 | |
| SHELL CYCLO-SOL® 53 AROMATIC SOLVENT | 2215 | 0.21 | 0.88 | — | — | — | 99.4 | <0.0001 | 99.4 | 8.8 | |
| SHELL CYCLO-SOL 63 AROMATIC SOLVENT | 5000 | <0.1 | 1.08 | — | — | — | 97.5 | <0.0001 | 97.5 | 8.8 | |

NOTES

*Typical properties are to be considered as representative of current production and should not be treated as specifications. Data shown are subject to minor variations in normal manufacturing.

- Determined on pure material.
- Shell Thin Film Evaporometer; 25°C and 0% R.H.
- 8 gms. R.S. 1/2" N.C. (dry)/100 mls solvent.
- At final concentration of 8 gms. R.S. 1/2" N.C. (dry)/100 mls combined solvent and diluent.
- Tolu-Sol 17 or similar.
- Shell Chemical Company products are shown in blue. Selected physical properties of all other products have been obtained wherever possible from published literature of their commercial producers.

- % ester.
- Donor-Acceptor.
- 25°C.
- 26°C.
- 78°F.
- 30°C.
- Tag open cup.
- Calculated from average compositional data.
- Set to glass below this temperature.
- Closed cup.
- 15°C.
- 40°C.

- Nitrocellulose blush.
- Pensky-Martens closed cup.
- Open cup.
- Calculated from distillation data using Shell "Evapo-rator"
- Tag closed cup.

- Setaflash closed cup.
- Calculated from ASTM-IP Petroleum Measurement Tables.
- Toluene and Ethylbenzene.
- NHB=Non-Hydrogen Bonding.
- Wk Acc=Very weak acceptor.

Table 2.138: Sunoco Chemicals Solvents (12)

Mineral Spirits - Toledo Refinery

| Tests | Sales Specs | Typicals | Test Method |
|-----------------------------|-----------------------|----------|-------------|
| Composition, Vol. % | | | Sun GC-MS |
| Paraffins | | 48.0 | |
| Olefins | | 0.2 | |
| Naphthenes | | 34.4 | |
| Aromatics | | 17.4 | |
| Benzene | | <0.01 | |
| Specific Gravity 60F/60F | 0.782 Min - 0.799 Max | 0.791 | D891 |
| Gravity, API | | 47.4 | D287 |
| Distillation, F | | | D86 |
| IBP | 300 Min - 330 Max | 320 | |
| End Point | 395 Max | 387 | |
| Residue, Vol. % | 1.5 Max | 1.0 | |
| Color, Saybolt | 25 Min | 30 | D156 |
| Appearance @ 65 - 78F | Clear | Clear | Visual |
| Flash Point, F | 105 Min | 110 | D56 |
| Kauri-Butanol Value | 29.0 Min - 42.0 Max | 39 | D1133 |
| Aniline Point, F | 120 Min | 126 | D611 |
| Total Sulfur, Wt. ppm | 100 Max | 4 | D4045 |
| Copper Corrosion | | 1A | D130 |
| Bromine Number | | <1 | D1159 |

Meets ASTM D235 Type I Mineral Spirits (Stoddard Solvent).

Toluene (Nitration) - Toledo Refinery

| Tests | Sales Specs | Typicals | Test Method |
|-------------------------------------------------------------|-----------------------|---------------|---------------------|
| Composition, Vol. % | | | D2360 or Equivalent |
| Toluene | | 99.95 | |
| Benzene | 0.03 Max | <0.01 | |
| C8 Aromatics | | 0.03 | |
| Non-Aromatics | 0.3 Max | 0.02 | |
| Specific Gravity 15.56C/15.56C | 0.869 Min - 0.873 Max | 0.872 | D4052 or Equivalent |
| Distillation Range, C (including 110.6 C) | 1.0 Max | 0.6 | D850 or Equivalent |
| Color, Pt-Co Scale | 20 Max | 5 | D1209 |
| Acid Wash Color | 2 Max | 0 | D848 |
| Appearance @ 65 - 78F | Clear | Clear | Visual |
| Total Sulfur, Wt. ppm | 1.0 Max | <0.5 | D4045 |
| Sulfur Compounds (H ₂ S and SO ₂) | None Detected | None Detected | D853 |
| Copper Corrosion | Pass (1A or 1B) | Pass | D849 |
| Acidity | None Detected | None Detected | D847 |
| Bromine Index | | <1 | D1492 |
| Water, Wt. ppm | | 60 | D1744 |

Meets ASTM D841 specifications for Nitration Grade Toluene.

(continued)

Table 2.138: (continued)

Benzene - Toledo Refinery

| Tests | Sales Specs | Typicals | Test Method |
|-------------------------------------------------------------|-----------------------|---------------|---------------------|
| Composition, Wt. % | | | D4492 or Equivalent |
| Benzene | | 99.95 | |
| Toluene | | 0.015 | |
| Non-Aromatics | 0.15 Max | 0.035 | |
| Specific Gravity 15.56C/15.56C | 0.882 Min - 0.886 Max | 0.883 | D4052 or Equivalent |
| Distillation Range, C (including 80.1 C) | 1.0 Max | 0.6 | D850 or Equivalent |
| Solidification Point, C | 5.35 Min | 5.49 | D852 |
| Color, Pt-Co Scale | 20 Max | 5 | D1209 |
| Acid Wash Color | 1 Max | 0 | D848 |
| Appearance (@ 65 - 78F) | Clear | Clear | Visual |
| Total Sulfur, Wt. ppm | 1.0 Max | <0.1 | D4045 |
| Sulfur Compounds (H ₂ S and SO ₂) | None Detected | None Detected | D853 |
| Thiophene, Wt. ppm | 1.0 Max | <1.0 | D1685 |
| Copper Corrosion | Pass (1A or 1B) | Pass | D849 |
| Acidity | None Detected | None Detected | D847 |

Meets ASTM D2359 specifications for Refined Benzene - 535.

Sun does not test for Thiophene. However, we can conclude that chemically if sulfur is not greater than 0.4 ppm on a weight basis, then Thiophene cannot be greater than 1ppm.

CYCLOHEXANE - MARCUS HOOK, PA

| Tests | Sales Specs | Typical * | Test Method |
|--------------------------------|-------------|-----------|-------------|
| Composition | | | D3054 |
| Cyclohexane, Wt. % | | 99.9 Min | |
| Benzene, Wt. ppm | | 20 Max | |
| Total Aromatics, Wt. ppm | | 150 Max | |
| Methylcyclopentane, Wt ppm | | 200 Max | |
| Methylcyclohexane, Wt ppm | | 200 Max | |
| Color, Saybolt | | 30 Min | D156 |
| Total Sulfur, Wt ppm | | 1 Max | D4045 |
| Total Chlorides, Wt ppm | | 1 Max | UOP 395-90 |
| Non-Volatile Matter, mg/100 ml | | 1 Max | D1353 |
| Free Water | | None | Visual |

Meets ASTM D3055, Cyclohexane 995 specifications.

(continued)

Table 2.138: (continued)

CUMENE - PHILADELPHIA, PA

| Tests | Sales Specs | Typical * | Test Method |
|------------------------------|---------------|-----------|-------------|
| Cumene, Wt % | 99.9 Max | 99.95 | D3760 |
| Ethylbenzene, Wt ppm | 50 Max | <5 | D3760 |
| N-Propylbenzene, Wt ppm | 250 Max | 166 | D3760 |
| Butylbenzene, Wt ppm | 200 Max | 93 | D3760 |
| Benzene, Wt ppm | 20 Max | 5 | D3760 |
| Diisopropylbenzene, Wt ppm | 15 Max | 2 | D3760 |
| Toluene, Wt ppm | 5 Max | 3 | D3760 |
| C8 - C9 Saturates, Wt ppm | 100 Max | 52 | D3760 |
| Methylstyrene, Wt ppm | Report | 60 | D3760 |
| Cumene Hydroperoxide, Wt ppm | 100 Max | 43 | D3703 |
| Phenols, Wt ppm | 5 Max | 0.5 | H952 |
| Specific Gravity, 60°/60°F | 0.864 - 0.867 | 0.865 | D891 |
| Color, Pt-Co Scale | 15 Max | 5 | D1209 |
| Acid Wash Color | 2 Max | 1 | D848 |
| Total Sulfur, Wt ppm | 0.1 Max | 0.03 | D4045 |
| Bromine Index | 75 Max | 44 | D1492 |
| Appearance | Clear | Clear | Visual |

Meets ASTM D4077 specifications.

XYLENE - MARCUS HOOK, PA

| Tests | Sales Specs | Typical * | Test Method |
|-----------------------------------------------------------|------------------------|-----------|---------------------|
| Composition, Vol % | | | D2360 or Equivalent |
| Total C ₈ Aromatics | --- | 99.8 | |
| Paraxylene | --- | 23-26 | |
| Metaxylene | --- | 51-57 | |
| Orthoxylene | --- | 12-15 | |
| Ethylbenzene | --- | 2-14 | |
| Benzene | 0.01 Max | <0.005 | |
| Toluene | 0.5 Max | 0.07 | |
| C9+ Aromatics | 1.0 Max | <0.2 | |
| Non-Aromatics | 0.3 Max | 0.02 | |
| Specific Gravity, 15.56C/15.56C | 0.865 Min 0.875 Max | 0.872 | D4052 |
| Color (Pt-Co Scale) | 20 Max | 5 | D1209 |
| Distillation, ° C | | | D850 or Equivalent |
| Range (including 139.3° C) | 5 Max | 2.0 | |
| IBP | 137 Min | 139.0 | |
| Dry Point | 143 Max | 141.0 | |
| Acid Wash Color | 2 Max | 0 | D848 |
| Acidity | Pass | Pass | D847 |
| Total Sulfur, Wt ppm | 1 Max | <0.1 | D4045 |
| Sulfur Compounds (H ₂ S and SO ₂) | Pass | Pass | D853 |
| Copper Corrosion | Pass | Pass | D849 |
| Bromine Index | 8 Max | 1 | D1492 |
| Appearance, @ 65-78 °F | Clear | Clear | Visual |
| Water, Wt ppm | --- | 100 | D1744 |
| Non-volatile Matter, mg/100 ml | --- | <1 | D1353 |

Meets ASTM D843, nitration grade specifications.

Table 2.139: 3M SCOTCH-GRIP Solvents No. 2 and No. 3 (54)**Typical
Physical
Properties**

| | Solvent No. 2 | Solvent No. 3 |
|-------------------------------------|----------------------------------------------|------------------------------|
| Solvent or Blend | Petroleum Distillate N-Hexane and Toluene | MEK (Methyl Ethyl Ketone) |
| Flash Point | -14°F. (TCC) | 20°F. (TCC) |
| Net Weight (Approx.) (lbs./gal.) | 6.3-6.7 | 6.65-6.75 |

Table 2.140: Total Petroleum Special Solvent (52)**HDF-201**

| <u>Property</u> | <u>Test Method⁽¹⁾</u> | <u>Typical</u> | <u>Requirement</u> |
|-----------------------------------------|----------------------------------|-----------------|--------------------|
| Gravity, °API | D-1298 | 42 | 40.0 Min/44.0Max |
| Pounds per gallon @ 60°F | | | 6.71 Min/6.87Max |
| Visual | Appearance @ 70°F | | Clear & Bright |
| Haze | D-4176 | | 1 Max. |
| Color Saybolt | D-156 | +30 | +24 Minimum |
| Flash PM °F | D-93 | 206 | 201 Min/211 Max. |
| Viscosity, 104°F, cst | D-445 | 2.0 | 1.6 Min/2.4 Max. |
| Aniline Point, °F. | D-611 | Report | |
| Kauri-Butanol Value | D-1133 | Report | |
| Distillation, °F | D-86 | | |
| Initial Boiling Point | | 425 | 405 Min/445Max |
| 50% Recovered | | 460 | 435 Min/485 Max. |
| Final Boiling Point | | 480 | 450 Min/510 Max. |
| Pour, °F | D-97 | | -10 Max. |
| Sulfur, wt. % | D-4294 | | .005 Max. |
| Mutation Assay | Ames Test ₍₂₎ | Pass (negative) | |
| Ultraviolet absorbance | 21CFR 178.3620(c) | Pass | |
| U.S. Dept. of Agriculture Authorization | | Pass | |

(1) ASTM Standard Test Methods

(2) Modified Salmonella/Microsome

(continued)

Table 2.140: (continued)**HDF 300**

| <u>Property</u> | <u>Test Method⁽¹⁾</u> | <u>Typical</u> | <u>Requirement</u> |
|-----------------------------------------|----------------------------------|---------------------|--------------------|
| Gravity, API | D-1298 | 40 | 37.0 Min/41.0 Max |
| Pounds per gallon @ 60F | | | 6.83 Min/6.992 Max |
| Visual | Appearance @ 70F | | Clear & Bright |
| Haze | D-4176 | | 1 Max |
| Color Saybolt | D-156 | 28 | +20 Minimum |
| Flash COC F | D-92 | 275 | 265 Minimum |
| Viscosity, SUS @ 104F | D-2161 | 41 | 37 Min/44 Max |
| Aniline Point, F. | D-611 | 189 | |
| Kauri-Butanol Value | D-1133 | 23 | |
| Distillation, F | D-86 | | |
| Initial Boiling Point | | 530 | 480 Min/550 Max |
| 50% Recovered | | 560 | 540 Min/580 Max |
| Final Boiling Point | | 605 | 580 Min/630 Max |
| Benzene | GC | N.D. ⁽²⁾ | |
| Mutation Assay | Ames Test ⁽³⁾ | | Pass (negative) |
| Ultraviolet absorbance | 21CFR 178.3620(c) | | Pass |
| U.S. Dept. of Agriculture Authorization | | | Acceptable |

(1) ASTM Standard Test Methods

(2) Non-detectable with detection limit of 0.5 ppmw

(3) Modified Salmonella/Microsome

HEXENES

| <u>Property</u> | <u>Test Method⁽¹⁾</u> | <u>Requirement</u> |
|------------------------------------|----------------------------------|--------------------|
| Gravity, API | D-1298 | 70 Min/80 Max |
| Olefin Content, Vol. % | D-1319 | 85 Minimum |
| C ₆ Hydrocarbons, Wt. % | D-5134 ⁽²⁾ | 97 Minimum |
| Total Sulfur, ppmw | D-4045 | 20 Maximum |
| Total Chlorides | UOP 395-79 | 5 Maximum |
| Uniroyal Naugard (TM) BHT, ptb | -- | 10 |

This product contains no other gasoline components or gasoline additives.

(1) ASTM Standard Test Methods, unless otherwise specified.

(2) Modified for carbon number separation of olefinic material.

(continued)

Table 2.140: (continued)

P-P MIX (Refinery Grade)

| <u>Property</u> | <u>Test Method⁽¹⁾</u> | <u>Typical</u> | <u>Requirement</u> |
|----------------------------------|----------------------------------|----------------|--------------------|
| Vapor Pressure @ 100°F., psig | D-2598 | 206 | 213 Maximum |
| Volatile Residue: | | | |
| Evaporated Temperature, 95% | D-1837 | -40 | -37 Maximum |
| or | | | |
| Butane and Heavier Percent | D-2163 | 0 - 1.0 | 2.0 Maximum |
| Residual Matter: | | | |
| Residue on Evaporation of 100 ml | D-2158 | <.05 | 0.05 Maximum |
| Oil Stain Observation | D-2158 | Pass | Pass |
| Total Sulfur, ppmw | D-4045 | 0 - 2 | 10 Maximum |
| Hydrogen Sulfide | D-2420 | Pass | Pass |
| Corrosion Copper Strip | D-1838 | 1 | No. 1 Maximum |
| Moisture Content | D-2713 | Pass | Pass |
| Composition (Mole Percent): | D-2163 | | |
| Propylene | | 80 | 70 Minimum |
| Propane | | 19 | 30 Maximum |
| Ethane and lighter | | .1 | 1.0 Maximum |

(1) ASTM Standard Test Methods

220 FLASH SOLVENT

| <u>Property</u> | <u>Test Method⁽¹⁾</u> | <u>Typical</u> | <u>Requirement</u> |
|-----------------------------------------|----------------------------------|---------------------|--------------------|
| Gravity, °API | D-1298 | 41 | 40.0 Min/44.0 Max |
| Pounds per gallon @ 60°F | | | 6.71 Min/6.87 Max |
| Visual | Appearance @ 70°F | | Clear & Bright |
| Haze | D-4176 | | 1 Max |
| Color Saybolt | D-156 | +30 | +20 Minimum |
| Flash COC °F | D-92 | 230 | 220 Minimum |
| Flash PM °F | D-93 | 214 | 210 Minimum |
| Viscosity, 104°F, cst | D-445 | 2.7 | 1.6 Min/2.8 Max |
| Aniline Point, °F. | D-611 | 174 | |
| Kauri-Butanol Value | D-1133 | 28 | |
| Distillation, °F | D-86 | | |
| Initial Boiling Point | | 460 | 450 Min/490 Max |
| 50% Recovered | | 490 | 465 Min/515 Max |
| 95% Recovered | | 515 | 470 Min/520 Max |
| Final Boiling Point | | 530 | 500 Min/560 Max |
| Benzene | GC | N.D. ⁽²⁾ | |
| Mutation Assay | Ames Test ⁽³⁾ | Pass (negative) | |
| Ultraviolet absorbance | 21CFR 178.3620(c) | Pass | |
| U.S. Dept. of Agriculture Authorization | | Acceptable | |

(1) ASTM Standard Test Methods

(2) Non-detectable with detection limit of 0.5 ppmw

(3) Modified Salmonella/Microsome

Table 2.141: UCAR Solvents (19)

Typical Physical Properties of UCAR Solvents

| Solvent | Molecular Weight | Density at 20 ° C. lb/gal | Boiling Point, ° C | Relative Evaporation Rate (BuAc=100) | Vapor Pressure at 20 ° C. mm Hg | Heat of Vaporization at 760 mm Hg. BTU/lb | Flash Point. Closed Cup. ° F | Total Solubility Parameters | Heat of Combustion at 25 ° C. Kcal/Mole | Viscosity at 20 ° C. cP |
|-----------------|---------------------------|---------------------------|--------------------|--------------------------------------|---------------------------------|-------------------------------------------|------------------------------|-----------------------------|-----------------------------------------|-------------------------|
| Alcohols | Ethanol | 46.07 | 78.3 | 333 | 45 | 361 | 58 | 12.78 | -326.85 | 1.2 |
| | 1-Propanol | 60.10 | 97.2 | 133 | 15 | 297 | 74 | 12.18 | -482.75 | 2.2 |
| | Isopropanol | 60.10 | 82.3 | 288 | 33 | 295 | 53 | 11.44 | 479.44 | 2.4 |
| | Butanol | 74.12 | 117.7 | 44 | 4 | 254 | 95 | 11.60 | -639.60 | 3.0 |
| | Isobutanol | 74.12 | 107.9 | 74 | 7 | 248 | 82 | 11.24 | -637.93 | 4.0 |
| | 1-Pentanol | 88.15 | 137.8 | 18 | 2 | 218 | 119 | 10.83 | -795.10 | 3.9 |
| | 2-Ethylhexanol | 130.23 | 184.6 | <1 | <1 | 153 | 162 | 10.15 | -693.37 | 10.3 |
| Esters | Ethyl Acetate | 88.11 | 77.2 | 747 | 76 | 155 | 30 | 8.91 | 537.50 | 0.5 |
| | n-Propyl Acetate | 102.13 | 101.5 | 279 | 26 | 144 | 58 | 8.80 | 693.37 | 0.6 |
| | Isopropyl Acetate | 102.13 | 88.9 | 501 | 47 | 142 | 42 | 8.58 | -691.10 | 0.5 |
| | Butyl Acetate | 116.16 | 126.2 | 100 | 15 | 135 | 84 | 8.69 | 828.60 | 0.7 |
| | Isobutyl Acetate | 116.16 | 118.0 | 172 | 4 | 131 | 62 | 8.43 | - | 0.7 |
| | Primary Amyl Acetate | 130.19 | 146.0 | 49 | 2 | 211 | 101 | 8.34 | -1058.00 | 0.9 |
| | Methyl PROPASOL® Acetate | 132.16 | 145.7 | 34 | 3 | - | 116 | 8.43 | - | 1.2 |
| | Butyl CELLOSOLVE® Acetate | 160.21 | 192.3 | 3 | <1 | 118 | 165 | 8.91 | -1122.38 | 1.8 |
| UCAR® Ester EEP | 146.19 | 169.7 | 11 | <1 | - | 136 | 9.00 | - | 1.3 | |
| Glycol Ethers | Butyl CELLOSOLVE® Solvent | 118.18 | 171.2 | 6 | <1 | 158 | 150 | 9.87 | -914.25 | 6.4 |
| | Methyl CARBITOL® Solvent | 120.16 | 194.0 | <1 | <1 | 170 | 188 | 11.15 | - | 3.9 |
| | CARBITOL® Solvent | 134.18 | 202.7 | <1 | <1 | 151 | 182 | 10.34 | 878.84 | 4.5 |
| | Butyl CARBITOL® Solvent | 162.23 | 230.6 | <1 | <1 | 132 | 214 | 9.79 | -1190.58 | 6.5 |
| Ketones | Acetone | 58.08 | 56.3 | 1440 | 185 | 219 | 0 | 9.62 | 427.77 | 0.3 |
| | Methyl Ethyl Ketone | 72.11 | 79.6 | 631 | 71 | 187 | 24 | 9.45 | -582.80 | 0.4 |
| | Methyl Isobutyl Ketone | 100.16 | 116.1 | 162 | 15 | 147 | 61 | 8.58 | 735.60 | 0.6 |
| | Methyl n-Amyl Ketone | 114.19 | 151.5 | 40 | 2 | 148 | 102 | 8.98 | 985.19 | 0.8 |
| | Diacetone Alcohol | 116.16 | 169.2 | 12 | <1 | 154 | 117 | 9.78 | 847.40 | 3.2 |
| | Isophorone | 138.21 | 215.3 | 2 | <1 | 135 | 179 | 9.36 | 1234.35 | 2.6 |
| | Diisobutyl Ketone | 142.24 | 169.4 | 17 | 1 | 119 | 118 | 8.06 | 1359.20 | 1.0 |

(continued)


Table 2.141: (continued)

UCAR Solvents for Electrostatic Coatings* Resistivity (Megohms)

| Alcohols | | Esters | |
|-------------------------|------|---------------------------------------|--------|
| Ethanol (200 proof) | 0.03 | Butyl CELLOSOLVE [®] Acetate | 3.00 |
| Primary Amyl Alcohol | 0.10 | Butyl Acetate | 3.50 |
| 1-Propanol | 0.18 | Isobutyl Acetate | 5.00 |
| Butanol | 0.18 | Isopropyl Acetate | 7.00 |
| Isobutanol | 0.18 | n-Propyl Acetate | 10.00 |
| Isopropanol (anhydrous) | 0.35 | Ethyl Acetate | 18.00 |
| 2-Ethylhexanol | 8.00 | Primary Amyl Acetate | >20.00 |

| Glycol Ethers | | Ketones | |
|---------------------------------------------|------|------------------------|------|
| CARBITOL [®] Solvent (low gravity) | 0.03 | Acetone | 0.04 |
| Methyl CARBITOL [®] Solvent | 0.03 | Diacetone Alcohol | 0.06 |
| Butyl CELLOSOLVE [®] Solvent | 0.06 | Isophorone | 0.08 |
| Butyl CARBITOL [®] Solvent | 0.13 | Methyl Ethyl Ketone | 0.13 |
| | | Methyl Isobutyl Ketone | 0.45 |
| | | Methyl n-Amyl Ketone | 0.75 |
| | | Diisobutyl Ketone | 1.50 |

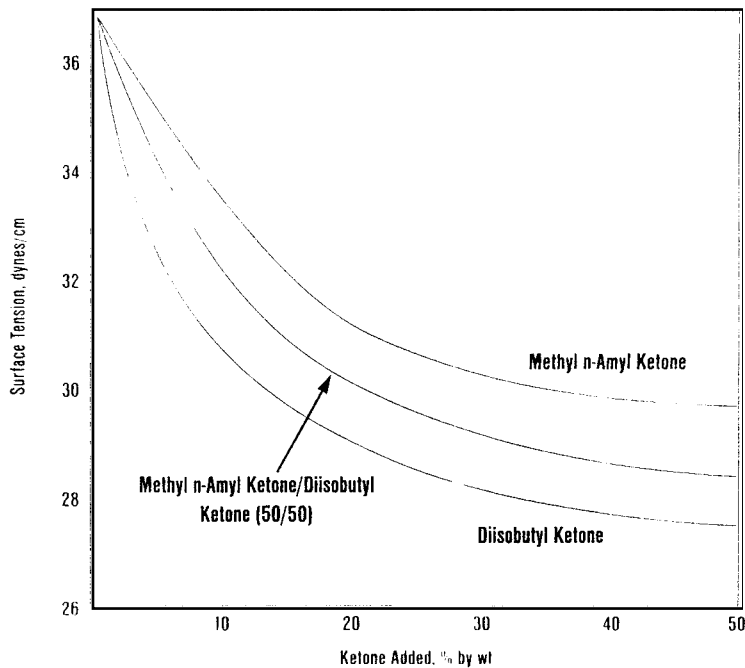Surface Tension Reduction of a Higher Solids Acrylic Resin (19)



(continued)

Table 2.141: (continued)**Surface Tension of UCAR Solvents (19)**

| | Solvent | Surface Tension. dynes/cm |
|----------------------|---------------------------|------------------------------|
| Ketones | Diisobutyl Ketone | 22.2 |
| | Methyl Isobutyl Ketone | 23.6 |
| | Methyl Ethyl Ketone | 24.6 |
| | Methyl n-Amyl Ketone | 26.1 |
| | Diacetone Alcohol | 31.0 |
| | Isophorone | 32.0 |
| Esters | Isopropyl Acetate | 22.3 |
| | Isobutyl Acetate | 23.6 |
| | Ethyl Acetate | 23.7 |
| | n-Propyl Acetate | 24.3 |
| | Primary Amyl Acetate | 25.2 |
| | Butyl Acetate | 25.4 |
| | Butyl CELLOSOLVE® Acetate | 27.4 |
| Glycol Ethers | Butyl CELLOSOLVE® Solvent | 28.6 |
| | Butyl CARBITOL® Solvent | 31.0 |
| | Methyl CARBITOL® Solvent | 35.9 |

Influence of Letdown Solvents¹ (19)

| Solvent | Coating Surface Tension. dynes/cm | Solvent Surface Tension. dynes/cm |
|-------------------|--------------------------------------|--------------------------------------|
| Diisobutyl Ketone | 39.0 | 22.5 |
| Diacetone Alcohol | 44.0 | 31.0 |
| Isopropanol | 46.5 | 21.4 |
| Ethylene Glycol | 55.5 | 48.4 |

⁽¹⁾ *Industrial Higher-Solids Coatings, Present and Future*, A. Heitkamp, et al, High Solids Coatings, December 1980.

Table 2.142: Unocal Aliphatic and Aromatic Hydrocarbons (13)

Aliphatic Hydrocarbons

| Product Name | Chemical Abstract Service Number | Gravity 60°F (15.56°C) | | | Distillation Range, °F (°C) | | | | | | | | % Hydrocarbon Composition | | |
|----------------------------------|----------------------------------|------------------------|----------|--------|-----------------------------|-------------|----------------------------|-----------------------------------|--------------------------------|----------------------------|---------------------|----------------------|---------------------------|-----------|----------------|
| | | API | Specific | lb/gal | IBP | DP | Vapor Pressure @ 28°C mmHg | Coefficient of Expansion (Per °C) | Relative Evap. Rate n-BoAc = 1 | Airline Cloud Pt., °F (°C) | Kaerl-Butanol Value | Flash Point, TCC, °F | Aromatics | Paraffins | Cycloparaffins |
| Rubber Solvent | 64742-89-8 | 71.8 | 0.696 | 5.79 | 118 (47.8) | 275 (135.0) | 180 | 0.0013 | 6.1 | 141 (60.6) | 34 | <0 | 4 | 75 | 21 |
| Textile* Spirits | 64741-84-0 | 77.6 | 0.677 | 5.63 | 149 (65.0) | 183 (79.8) | 115 | 0.0013 | 8.8 | 147 (63.9) | 29 | <0 | <1 | 89 | 11 |
| Hexane | 110-54-3 | 77.8 | 0.676 | 5.63 | 151 (66.1) | 158 (70.0) | 140 | 0.0015 | 8.1 | 151 (66.1) | 30 | <0 | Nil | 89 | 11 |
| Heptane | 142-82-5 | 71.9 | 0.696 | 5.79 | 199 (93) | 210 (98.9) | 45 | 0.0011 | 4.5 | 155 (68.3) | 30 | 15 | Nil | 89 | 11 |
| Lacto* Spirits | 64742-89-8 | 57.9 | 0.747 | 6.22 | 202 (94.4) | 222 (105.6) | 40 | 0.0011 | 3.9 | 109 (42.8) | 42 | 20 | 12 | 42 | 46 |
| Roto Solv | 8032-32-4 | 61.8 | 0.732 | 6.09 | 241 (116.1) | 249 (120.6) | 17 | 0.0011 | 1.7 | 145 (62.8) | 34 | 45 | 5 | 60 | 35 |
| Special Naphtholite* 66/3 (VM&P) | 8032-32-4 | 54.9 | 0.759 | 6.32 | 265 (126.7) | 291 (143.9) | 5.2 | 0.0011 | 1.0 | 143 (61.7) | 35 | 65 | <1 | 42 | 57 |
| Naphthol Spirits 66/3* | 8052-41-3 | 50.9 | 0.776 | 6.46 | 318 (158.9) | 355 (179.4) | 2.9 | 0.0008 | 0.21 | 152 (66.7) | 33 | 105 | <1 | 44 | 55 |
| Regular Mineral Spirits | 8052-41-3 | 48.1 | 0.788 | 6.56 | 315 (157.2) | 385 (196.1) | 3.1 | 0.0009 | 0.12 | 133 (56.1) | 37 | 108 | 16 | 46 | 38 |
| Mineral Spirits 75* | 8052-41-3 | 49.0 | 0.784 | 6.53 | 315 (157.2) | 395 (201.7) | 3.0 | 0.0009 | 0.13 | 148 (64.4) | 34 | 107 | <8 | 48 | 44 |
| Mineral Spirits 66/3* | 8052-41-3 | 50.4 | 0.778 | 6.48 | 321 (160.6) | 382 (194.4) | 2.6 | 0.0009 | 0.13 | 155 (68.3) | 33 | 108 | <1 | 47 | 52 |
| 1-K Kerosine | 8008-20-6 | 41.2 | 0.819 | 6.82 | 345 (173.9) | 525 (273.9) | 1.8 | 0.0010 | 0.01 | 144 (62.2) | 34 | 145 | 18 | 41 | 41 |
| Odorless Mineral Spirits | 8052-41-3 | 54.3 | 0.762 | 6.34 | 358 (181.0) | 407 (208.0) | 1.2 | 0.0011 | 0.17 | 188 (87.0) | 26 | 125 | Nil | 99+ | Nil |
| 460 Solvent | — | 43.8 | 0.807 | 6.72 | 372 (188.9) | 503 (261.7) | <1 | 0.0009 | 0.02 | 153 (67.2) | 33 | 140 | 8 | 56 | 36 |
| 142 Solvent 66/3‡ | 8052-41-3 | 46.7 | 0.794 | 6.61 | 378 (192.2) | 401 (205.0) | <1 | 0.0009 | 0.08 | 162 (72.2) | 31 | 145 | <1 | 45 | 54 |
| Mineral Spirits 150 66/3‡ | 8052-41-3 | 46.4 | 0.795 | 6.62 | 384 (195.6) | 408 (208.9) | <1 | 0.0009 | 0.07 | 161 (71.7) | 32 | 154 | 1 | 44 | 55 |

® Registered Trademark of Unocal
 * Meets Dry Cleaning Fluid Specification PD680, Type I
 ‡ Meets Dry Cleaning Fluid Specification PD680, Type II

Mineral Spirits (Stoddard Solvent) type per ASTM D 235-96

| | |
|--------------------------|-----------|
| Product Name | ASTM Type |
| Naphthol Spirits 66/3 | IV C |
| Regular Mineral Spirits | I A |
| Mineral Spirits 75 | I B |
| Mineral Spirits 66/3 | I C |
| Odorless Mineral Spirits | III C |
| 142 Solvent 66/3 | II C |
| Mineral Spirits 150 66/3 | II C |

The following products meet, at a minimum, the UV requirements of FDA regulation (21 CFR):

- Hexane 175.105
- Heptane 172.882, 175.105, 178.3530
- Special Naphtholite 66/3 (VM&P) 172.882, 175.105, 178.3530
- Naphthol Spirits 66/3 175.105, 178.3620, 178.3910
- Mineral Spirits 66/3 172.882, 172.884, 175.105, 178.3910
- Odorless Mineral Spirits 172.882, 175.105, 178.3650, 178.3910
- 142 Solvent 66/3 175.105, 178.3620, 178.3910
- Mineral Spirits 150 66/3 175.105, 178.3620, 178.3910

Aromatic Hydrocarbons

| Product Name | Chemical Abstract Service Number | Gravity 60°F (15.56°C) | | | Distillation Range, °F (°C) | | | | | | | | % Hydrocarbon Composition | | |
|------------------------|----------------------------------|------------------------|----------|--------|-----------------------------|-------------|----------------------------|-----------------------------------|--------------------------------|----------------------------|---------------------|----------------------|---------------------------|-----------|----------------|
| | | API | Specific | lb/gal | IBP | DP | Vapor Pressure @ 28°C mmHg | Coefficient of Expansion (Per °C) | Relative Evap. Rate n-BoAc = 1 | Airline Cloud Pt., °F (°C) | Kaerl-Butanol Value | Flash Point, TCC, °F | Aromatics | Paraffins | Cycloparaffins |
| Toluene | 108-88-3 | 30.8 | 0.872 | 7.26 | 230 (110.3) | 231 (110.8) | 23.8 | 0.0011 | 1.90 | 48 (8.9) | 105 | 45 | 100 | Nil | Nil |
| Xylene | 1330-20-7 | 30.9 | 0.871 | 7.25 | 280 (137.7) | 285 (140.7) | 6.6 | 0.0010 | 0.80 | 50 (10.0) | 98 | 81 | 100 | Nil | Nil |
| Super Hi-Flash Naphtha | 64742-95-6 | 30.6 | 0.873 | 7.27 | 315 (157.2) | 347 (175.0) | 2.7 | 0.0008 | 0.37 | 56 (13.3) | 91 | 112 | 100 | Nil | Nil |
| Solv G | 64742-94-5 | 26.2 | 0.897 | 7.47 | 363 (183.9) | 413 (211.7) | <1 | 0.0008 | 0.13 | 60 (15.6) | 94 | 149 | 100 | Nil | Nil |

(continued)

Hydrocarbon Solvents

Table 2.142: (continued)

MINERAL SEAL OIL

PRODUCT DESCRIPTION

Unocal Hydrocarbon Sales Mineral Seal Oil is a highly refined, hydrotreated paraffinic light oil that is water-white in appearance. Properties include a very low odor, low aromatic content and low pour point. This product meets 21CFR178.3620(c).

| | | Specifications | Typical Properties | * ASTM Test |
|----------------------------|---------|----------------|--------------------|-------------|
| PRODUCT CODE | | 2540 | | |
| API GRAVITY (60/60 F) | DEGF | | 35.7 | D-287 |
| DISTILLATION, IBP | DEGF | | 493 | D-86 |
| DISTILLATION, 50% | DEGF | | 516 | D-86 |
| DISTILLATION, END POINT | DEGF | | 563 | D-86 |
| SPECIFIC GRAVITY (60/60 F) | | 0.830-0.860 | 0.845 | D-1298 |
| DENSITY @ 60 F (15.6 C) | LB/GAL | 6.93-7.18 | 7.05 | CALC'D |
| VISCOSITY, 40C | cst | 3.0-4.0 | 3.40 | D445/216 |
| VISCOSITY, 100C | cst | | 1.31 | D445/216 |
| VISCOSITY, 100F | SUS | 36-40 | 37.8 | D445/216 |
| ANILINE POINT | DEGF | | 170 | D-611 |
| FLASH POINT (COC) | DEGF | 248 MIN | 259 | D-92 |
| COLOR, SAYBOLT | SAYBOLT | +20 MIN | 30 | D-156 |
| AROMATIC CONTENT | WT% | | <3 | GC |
| SULFUR CONTENT | PPM | | <1 | D-4084 |
| CLOUD POINT | DEGF | -4 MAX | -22 | D-2500 |
| APPEARANCE @ 70 DEGF | | Clear & Bright | C & B | |
| POUR POINT | DEGF | -6 MAX | -27 | D-97 |

RETARDSOL

PRODUCT DESCRIPTION

Unocal Hydrocarbon Sales Retardsol is a water-white kerosine that meets ASTM 2-K specifications. Kerosine consists primarily of C10-C16 aliphatic and aromatic hydrocarbons and is widely used as heating oil and diesel fuel. Because of its high solvency and high flash point Unocal Hydrocarbon Sales Retardsol finds many commercial applications in general cleaning solvents and in agricultural sprays. Specifications and typical properties are listed below.

| | | Specifications | Typical Properties | * ASTM Test |
|----------------------------|-------------------------|----------------|--------------------|-------------|
| MANUFACTURER | | LEMONT REFINRY | | |
| PRODUCT CODE | | 2019 | | |
| API GRAVITY (60/60 F) | | 39-51 | 40.7 | D-287 |
| DISTILLATION, IBP | DEGF | | 320 | D-86 |
| DISTILLATION, 10% | DEGF | 347-400 | 390 | D-86 |
| DISTILLATION, 50% | DEGF | 450 MAX | 430 | D-86 |
| DISTILLATION, DP | DEGF | 550 MAX | 510 | D-86 |
| SPECIFIC GRAVITY (60/60 F) | | | 0.8215 | D-1298 |
| DENSITY @ 60 F (15.6 C) | LB/GAL | | 6.84 | CALC'D |
| VAPOR PRESSURE @ 20 C | mm Hg | | 0.1 | |
| VISCOSITY @ 20 C | cst | | 2.117 | D-445 |
| KAURI-BUTANOL VALUE (KB) | | | 34 | D-1133 |
| ANILINE POINT | DEGF | | 141 | D-611 |
| FLASH POINT (TCC) | DEGF | 110 MIN | 123 | D-56 |
| COLOR, SAYBOLT | | +22 MIN | 27 | D-156 |
| DOCTOR TEST | | | NEGATIVE | D-235 |
| CORROSION, 3 HRS @ 212 F | | | 1A | D-130 |
| PARAFFINS | VOL% | | 42 | GC-MS |
| CYCLOPARAFFINS | VOL% | | 38 | GC-MS |
| AROMATIC CONTENT | VOL% | 20 MAX | 19 | GC |
| BENZENE CONTENT | VOL% | | 0.01 | D-2600 |
| OLEFINS | VOL% | | 0.5 | D-1159 |
| SULFUR CONTENT | WT% | 0.20 MAX | 0.03 | D-4084 |
| REFRACTIVE INDEX @ 20 C | | | 1.4952 | D-1218 |
| SOLUBILITY PARAMETER | (cal/cc) ^{1/2} | | 7.9 | |

Table 2.143: Vista LPA Solvents (40)

| Typical Properties of Vista LPA Solvents | | | | | | |
|--------------------------------------------------------------------|-----------|----------------|---------------|---------------|---------------|---------|
| Typical Properties | Vista LPA | Vista LPA-110* | Vista LPA-142 | Vista LPA-170 | Vista LPA-210 | Vista-7 |
| Distillation Range, °F, | | | | | | |
| IBP | 362 | 335 | 368 | 413 | 465 | 464 |
| 10% | 388 | 340 | 372 | 420 | 474 | 472 |
| 20% | 392 | 341 | 373 | 422 | 475 | 474 |
| 50% | 412 | 345 | 377 | 424 | 479 | 479 |
| 90% | 460 | 355 | 386 | 431 | 495 | 497 |
| 95% | 476 | 360 | 389 | 434 | 506 | 508 |
| EP | 516 | 385 | 405 | 458 | 539 | 531 |
| Flash Point, | | | | | | |
| Tag Closed Cup, °F | 148 | 112 | 146 | 178 | — | — |
| Pensky Martens, °F | — | — | — | — | 226 | 228 |
| Freeze Point, °F | -90 | <-103 | <-103 | -81 | -43 | 0 |
| Pour Point, °F | -95 | <-112 | <-112 | -92 | -45 | 0 |
| Specific Gravity 60°/60°F | .809 | .794 | .809 | .811 | .823 | .812 |
| Density, lbs/gal. @ 60°F | 6.75 | 6.63 | 6.75 | 6.77 | 6.87 | 6.78 |
| Average Molecular Weight | 167 | 141 | 152 | 171 | 194 | 197 |
| Average Composition | | | | | | |
| % Paraffinic | 46 | 25 | 27 | 58 | 65 | 72 |
| % Naphthenic | 54 | 75 | 73 | 42 | 35 | 28 |
| % Aromatic | 0.2 | 0.1 | 0.2 | 0.5 | 0.6 | 0.7 |
| Color, Saybolt Universal | +30 | +30 | +30 | +30 | +20 | +20 |
| Relative Evaporation Rate (n-Butyl Acetate=1) | 0.02 | 0.19 | 0.09 | 0.03 | 0.004 | <0.004 |
| Vapor Pressure, mm Hg | | | | | | |
| 100°F | 1.0 | 2.0 | 1.1 | 0.37 | 0.10 | 0.10** |
| Viscosity, cSt | | | | | | |
| 70°F | 2.2 | 1.4 | 1.8 | 2.4 | 3.8 | 3.8 |
| 100°F | 1.6 | 1.1 | 1.4 | 1.8 | 2.6 | 2.6 |
| Aniline Point, °F | 160 | 137** | 142** | 160 | 170 | 180 |
| Kauri Butanol Value | 32 | 36 | 35 | 32 | 29 | 27 |
| Solubility parameters**, (Cal/cm³)^{0.5} | | | | | | |
| | 8.1 | 8.0 | 8.1 | 8.1 | 7.9 | 7.8 |
| Bromine Number | <2 | <2 | <2 | <2 | <2 | <2 |
| Carbonyl, as C=O ppm | <10 | <10 | <10 | <10 | <10 | <10 |
| Nitrogen, ppm | <1 | <1 | <1 | <1 | <1 | <1 |
| Sulfur, ppm | <1 | <1 | <1 | <1 | <1 | <1 |
| Water, ppm | <50 | <50 | <50 | <50 | <50 | <50 |

Vista MR Solvent (40)

Description

Vista MR Solvent is a highly refined hydrocarbon in the kerosene boiling range. It is colorless, has a mild odor, low viscosity, and a typical aromatics content of 15%. MR Solvent has an extremely low sulfur and nitrogen content. The unique process used to produce MR Solvent yields low levels of normal paraffins. Consequently, MR Solvent has a higher solvent strength and lower freeze point than competitive solvents with equivalent boiling ranges.

| | | | |
|-------------------------------------|-------|-------------------------------------------------------------|-------|
| Distillation Range, °F, (ASTM D-86) | | Color, Saybolt Universal | +30 |
| IBP | 370 | Relative Evaporation Rate (n-Butyl Acetate=1) | 0.02* |
| 10% | 390 | Vapor Pressure, mm Hg 100°F | 1.2 |
| 20% | 400 | Viscosity, cSt | |
| 50% | 420 | 70°F | 2.1 |
| 90% | 475 | 100°F | 1.6 |
| 95% | 480 | Aniline Point, °F | 145 |
| EP | 510 | Kauri Butanol Value | 33 |
| Flash Point, | | Solubility parameter* (Cal/cm ³) ^{0.5} | 8.1 |
| Tag Closed Cup, °F | 148 | Cetane Number | 43 |
| Pensky Martens, °F | 154 | Bromine Number | <0.2 |
| Freeze Point, °F | <-90 | Carbonyl, as C=O ppm | <10 |
| Pour Point, °F | <-95 | Nitrogen, ppm | <1 |
| Specific Gravity 60°/60°F | 0.817 | Sulfur, ppm | <1 |
| Density, lbs/gal. @ 60°F | 6.82 | Water, ppm | <50 |
| Average Molecular Weight | 170 | | |
| Average Composition | | | |
| % Paraffinic | 45 | | |
| % Naphthenic | 40 | | |
| % Aromatic | 15 | | |
| | | *Estimate | |

(continued)

Table 2.143: (continued)

Vista C14 Normal Paraffin

Description:

Vista C₁₄ n-paraffin is a high purity, linear saturated paraffin. It is a clear, low odor, low viscosity liquid.

| <u>Properties</u> | <u>Specification</u> | <u>Typical</u> |
|---------------------------------|----------------------|-----------------------|
| Total n-paraffin, Wt.% | 96.5 | 96.5-98.0 |
| Hydrocarbon Distribution (Wt.%) | | |
| ≤C ₁₃ | 11 max | 6-10 |
| C ₁₄ | 87 min | 87-90 |
| ≥C ₁₅ | 2.5 max | 1-2 |
| Average Molecular Weight | -- | 197-201 |
| Aromatics, Wt.% | 1.5 max | 0.9 |
| Bromine Number | 0.04 max | 0.025 |
| Color Saybolt | +20 min | +25 - +30 |
| Specific Gravity, 15° C/15° C | -- | 0.768 |
| Density at 60° F, lb/gal | -- | 6.40 |
| Flash Point, (PM) °C/°F | 93/200 min | 109-114° C/229-237° F |
| Melting Point, °C/°F | -- | 4/40 |
| Viscosity cSt @ 40° C/104° F | -- | 2.1 |
| Distillation Range, °C/°F | | |
| IBP | -- | 244/472 |
| EP | -- | 251/484 |
| Appearance | -- | Clear Liquid |

Vista C1416 n-Paraffin Solvent

Description:

Vista C1416 n-paraffin is a high purity, linear saturated paraffin blend of various molecular weights in the C13-C17 carbon range. It is a clear, straw colored, low odor, low viscosity liquid.

| <u>Properties</u> | <u>Specification</u> | <u>Typical</u> |
|--------------------------|----------------------|----------------|
| Total n-Paraffin, wt. % | 96.5 | 97.0 |
| C13 and Lower | 5.0 max | 1.0 |
| C14 | — | 26.5 |
| C13 + C14 | — | — |
| C15 | — | 53.5 |
| C16 | — | 14.0 |
| C17 + | 6.0 max | 5.0 |
| Average molecular weight | — | 211 |
| Aromatics, wt. % | 1.5 max | 0.9 |
| Bromine Number | 0.04 max | 0.025 |
| Color, Saybolt | - 16 min | + 10 |
| Specific Gravity, 25°C | — | 0.775 |
| Flash point, °F | — | 250 |
| Melting Range, °C | — | 8 |
| Viscosity @ 100°F cSt | — | 2.7 |
| Distillation range, °F | — | — |
| IBP | — | 487 |
| 50% | — | 493 |
| 95% | — | 511 |
| EP | — | 547 |
| Appearance | — | Clear |
| | — | Straw |
| | — | Liquid |

Halogenated Hydrocarbons

CHLORINATED HYDROCARBONS

Table 3.1: Allyl Chloride (7)

3-Chloropropene-1 $\text{CH}_2=\text{CHCH}_2\text{Cl}$

PHYSICAL PROPERTIES

| | |
|-----------------------------|-----------------|
| Boiling point | 45°C |
| Fire point | 4°C |
| Flash point | 4°C |
| Latent heat of vaporization | 84.6 cal/g |
| Specific gravity @25/25°C | 0.933 |
| Specific heat | 0.31 cal/g/°C |
| Refractive index @25°C | 1.412 |
| Viscosity @25°C | 0.33 centipoise |
| Weight per gallon @25°C | 7.8 lb |

Table 3.2: n-Amyl Chloride (7)

1-Chloropentane $\text{CH}_3\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{Cl}$

PHYSICAL PROPERTIES

| | |
|---------------------------|---------------------------|
| Acidity as HCl | 0.025% max. |
| Amylene | 1% max. |
| Boiling range | 105-109°C |
| Distillation | 95% between 104.9-108.9°C |
| Flash point | 54°F |
| Other hydrocarbons | None |
| Polychlorides content | None |
| Solubility in water | Insoluble |
| Specific gravity @20/20°C | 0.885 |
| Weight per gallon | 7.38 lb |


Table 3.3: Mixed Amyl Chlorides (7)

$\text{C}_5\text{H}_{11}\text{Cl}$

PHYSICAL PROPERTIES

| | | | |
|-----------------------------|------------|---------------------------------|--------------------------------------------------|
| Acidity as HCl | 0.03% max. | Distillation range | 95% between 85-109°C |
| Amylene and pentane content | 3.0% max. | Evaporation rate @108°F:Minutes | |
| Boiling point (approx.) | | 1.30 | 25% |
| 1-Chloropentane | 108.2°C | 1.67 | 50% |
| 2-Chloropentane | 96.7°C | 4.30 | 75% |
| 3-Chloropentane | 97.3°C | 6.58 | 100% |
| 1-Chloro-2-methylbutane | 99.9°C | Flash point (O. C.) | 34°F |
| 4-Chloro-2-methylbutane | 98.8°C | Kauri-butanol value | 71 cc |
| 3-Chloro-2-methylbutane | 93.0°C | Solubility in water | Negligible |
| 2-Chloro-2-methylbutane | 86.0°C | Specific gravity @20°C | 0.88 |
| | | Vapor pressure @20° | 42.8 mm |
| | | Water azeotrope @77-82°C | 90% $\text{C}_5\text{H}_{11}\text{Cl}$ (approx.) |
| | | Weight per gallon | 7.33 lb |

Table 3.4: Benzyl Chloride (7)

 α -Chlorotoluene

PHYSICAL PROPERTIES

| | |
|--------------------------------|---------------------------------------|
| Distillation range | Not more than 2° including 179.4°C |
| Freezing point | -43°C |
| Molecular weight | 126.58 |
| Refractive index N_D^{25} | 1.5365 |
| Specific gravity @15.5°/15.5°C | 1.107 |
| Weight per gallon @15.5°C | 9.23 lb |

Table 3.5: n-Butyl Chloride (7)

PHYSICAL PROPERTIES

| | |
|-------------------------------------|------------------------------------------|
| Acidity | 0.01% max. |
| Boiling point @760 mm | 78°C |
| Distillation range | Not less than 95% between 76.0-79.5°C |
| Flash point (O. C.) | 20°F |
| Latent heat of vaporization @76.5°C | 79.8 cal/g |
| Melting point | -123.1°C |
| Refractive index @20°C | 1.4004 |
| Solubility in water | Negligible |
| Specific gravity @20/4°C | 0.884 |
| Specific heat @20°C | 0.451 cal/g |
| Surface tension @20°C | 23.66 dynes/cm |
| Water content | None |
| Weight per gallon | 7.37 lb |

n-BUTYL CHLORIDE FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|-----|----------------------|-----------------------|
| 80 | Acetone | 55.8 |
| 1.9 | n-Butyl alcohol | 77.7 |
| 57 | n-Butyl nitrite | 76.5 |
| 35 | Ethyl acetate | 76.0 |
| 20. | Ethyl alcohol | 65.7 |
| 4 | Isobutyl alcohol | 77.7 |
| 62 | Isobutyl nitrite | 66.2 |
| 23 | Isopropyl alcohol | 70.8 |
| 29 | Methyl alcohol | 57.0 |
| 38 | Methyl propionate | 76.8 |
| 40 | Methyl propyl ketone | 77.0 |
| 16 | Nitromethane | 75.0 |
| 18 | n-Propyl alcohol | 74.8 |
| 38 | n-Propyl formate | 76.1 |
| 6.6 | Water | 68.1 |

Table 3.6: sec-Butyl Chloride (7)

| FORMULA | |
|---------------------------------|------------------------------------------------------------------------------------------------------|
| | $\begin{array}{c} \text{Cl} \\ \\ \text{CH}_3 - \text{CH} - \text{CH}_2 - \text{CH}_3 \end{array}$ |
| PROPERTIES | 98.0% GRADE |
| Composition, weight percent | |
| secondary-Butyl Chloride | 99.5 |
| Butenes | 0.5 |
| Purity by freezing point, mol % | |
| Freezing point, F | |
| Boiling point, F | |
| Distillation range, F | |
| Initial boiling point | 151 |
| 10% Condensed | |
| 50% Condensed | 154 |
| 90% Condensed | |
| Dry point | 156 |

| PROPERTIES | 98.0% GRADE |
|----------------------------------------------------|----------------|
| Specific gravity of liquid at 60/60 F at 20/4 C | 0.879 0.875 |
| API gravity at 60 F | 29.5 |
| Density of liquid at 60 F, lbs/gal | 7.32 |
| Refractive index, 20/D | 1.396 |
| Color, Saybolt | |
| Acidity, distillation residue | |
| Nonvolatile matter, grams/100 ml | |
| Color Alpha | 10 |
| Flash point, approximate, F | < 80 |
| Flammability limits, volume % in air | |
| Lower | |
| Higher | |

*Literature values.

Table 3.7: Butyryl Chloride (27)

Butanoyl Chloride C_3H_7COCl

Butanoyl chloride is a clear colorless liquid with a characteristic pungent odor. It reacts with water and alcohol and is infinitely soluble in ether. It is used for organic synthesis to introduce the butyryl group.

PHYSICAL PROPERTIES

| | |
|--------------------------------|---------------|
| Molecular Weight | 106.5 |
| Freezing Point | -89°C |
| Boiling Point | 102°C |
| Distillation Range | 100° to 110°C |
| Refractive Index $n_{20/D}$ | 1.4121 |
| Specific Gravity, 15.5°/15.5°C | 1.028 |
| Pounds per Gallon at 15.5°C | 8.56 |

Table 3.8: Caprylyl Chloride (27)

Octanoyl Chloride $CH_3(CH_2)_6COCl$

Caprylyl chloride is a water-white to straw-colored liquid with a pungent odor. It usually contains small quantities of hexanoyl and decanoyl chlorides.

PHYSICAL PROPERTIES

| | |
|------------------------------------------------|---------------|
| Molecular Weight | 162.7 |
| Chlorine Content (typical) | 21.8% |
| Freezing Point | <-70°C |
| Pour Point | <-70°C |
| Distillation Range ⁽¹⁾ | 183° to 212°C |
| Refractive Index, $n_{20/D}$ | 1.4357 |
| Flash Point (Cleveland open cup) | 82°C |
| Fire Point (Cleveland open cup) | 87°C |
| Specific Gravity, 15.5°/15.5°C | 0.955 |
| Pounds per Gallon at 15.5°C | 7.96 |
| Density Correction Factor, gm/cc/1°C | 0.00085 |
| Coefficient of Cubical Expansion at 15.5°C/1°C | 0.00096 |

(1) Typical ASTM distillation to 90%. Decomposition occurs beyond this point.


Table 3.9: Carbon Tetrachloride (7)

Tetrachloromethane


CCl₄

PHYSICAL PROPERTIES

| | |
|----------------------------------------------------|----------------------------------|
| Acidity as HCl | None |
| Boiling point @ 760 mm | 76.7°C (170.1°F) |
| Boiling range | Within 1°C |
| Coefficient of cubical expansion Av./°C, liquid | 0.00127 |
| Dielectric constant, 1000 cycle | 2.24 |
| Electrical conductivity | 4 x 10 ⁻¹⁸ recip. ohm |
| Fire point | Nonflammable |
| Flash point | Nonflammable |
| Freezing point | -23°C |
| Heat of fusion | 4.2 cal/kg |
| Heat of vaporization | 46.5 cal/g |
| Power factor, 1000 cycle | 0.057% |
| Purity | 99.99% min. |
| Refractive index @ 20°C | 1.4607 |
| Residue | 0.0010% by wt, max. |
| Solubility in water @ 20°C | 0.08% by wt |
| Solubility of water in solvent @ 20°C | 0.008% by wt |
| Specific gravity @ 25/4°C | 1.5845 |
| Specific heat | |
| Liquid, 25° | 0.1995 cal/g/°C |
| 76.8°C | 0.2157 cal/g/°C |
| Specific resistivity | 3.8 x 10 ¹² ohms/cm |
| Thermal expansion per °C | 0.127% (of liquid @ 158°F) |
| Vapor density (B.P., 760 mm) | 5.37 g/liter |
| Vapor pressure @ 30°C | 140 mm |
| Viscosity liquid @ 20°C | 0.96 centipoise |
| Weight per gallon @ 25°C | 13.22 lb |

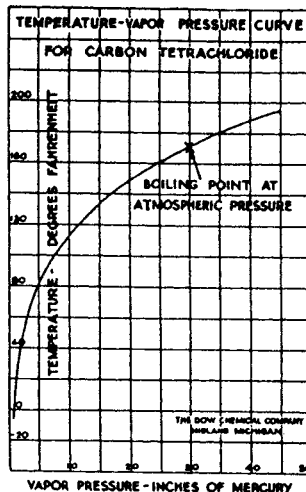

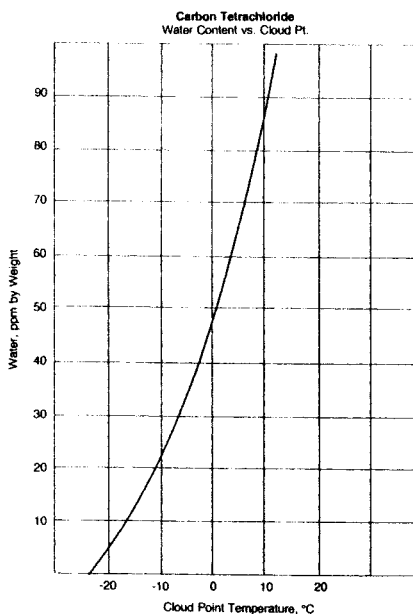Temperature-Vapor Pressure Curve for Carbon Tetrachloride



CARBON TETRACHLORIDE FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|-------|--------------------|-----------------------|
| 88.5 | Acetone | 56.4 |
| | Acetonitrile | 71 |
| 3 | Acetic acid | 76.55 |
| 21 | Acrylonitrile | 66.2 |
| 11.5 | Allyl alcohol | 72.3 |
| 71 | 2-Butanone | 73.8 |
| 4.5 | tert-Amyl alcohol | 76.6 |
| 2.5 | Butyl alcohol | 76.6 |
| 7.6 | sec-Butyl alcohol | 74.6 |
| 24 | tert-Butyl alcohol | 70.5 |
| 35 | Butyl nitrite | 74.8 |
| 21 | 1,2-Dichloroethane | 75.6 |
| 43 | Ethyl acetate | 74.8 |
| 15.85 | Ethyl alcohol | 61.1 |
| 15.5 | Ethyl nitrate | 75 |
| 81.5 | Formic acid | 66.65 |
| 5.5 | Isobutyl alcohol | 75.8 |
| 12 | Isopropyl alcohol | 69 |
| 20.56 | Methanol | 55.7 |
| 25 | Methyl propionate | 76 |
| 17 | Nitromethane | 71.3 |
| 11.5 | Propyl alcohol | 73.1 |
| 31 | Propyl formate | 74.6 |
| 4.1 | Water | 66 |

Table 3.10: Chlorinated Butane Derivatives (73)

| Physical Properties of Intermediates and Products | | | | | | | |
|---------------------------------------------------|------------------------|----------------|-----------------------------------------|---------------------------------------------------|--------------------------|--------|--|
| Compound | B. P., °C., corr. | Press., mm. | Density d ₄ ²⁵ | Refractive Index, N _D ²⁵ | Chlorine, % ¹ | | |
| | | | | | Found | Calcd. | |
| 1-Chlorobutane | 77.5-78.5 | 745 | | 1.3995 | | | |
| 1,1-Dichlorobutane | 114.8-115.1 | 752 | 1.0797 | 1.4305 | | | |
| 1,2-Dichlorobutane | 122.9-123.3 | 743 | 1.1118 | 1.4425 | | | |
| 1,3-Dichlorobutane | 133.0-133.2 | 744 | 1.1083 | 1.4414 | | | |
| 1,4-Dichlorobutane | 154.1-154.2 | 749 | 1.1324 | 1.4522 | | | |
| 1,1,1-Trichlorobutane | 133.1-133.3 | 750 | 1.2242 | 1.4483 | 65.76 | 65.88 | |
| 1,1,2-Trichlorobutane | 156.3-156.8 | 746 | 1.2787 | 1.4667 | 65.95 | 65.88 | |
| 1,1,3-Trichlorobutane | 153.2-153.8 | 750 | 1.2514 | 1.4593 | 65.92 | 65.88 | |
| 1,1,4-Trichlorobutane | 183.6-183.8 | 754 | 1.2967 | 1.4753 | 65.92 | 65.88 | |
| 1,1,1,2-Tetrachlorobutane | 69.1-69.4 | 20.0 | 1.3952 | 1.4812 | 72.63 | 72.39 | |
| 1,1,1,3-Tetrachlorobutane | 69.5-69.8 | 20.0 | 1.3747 | 1.4772 | 72.18 | 72.39 | |
| 1,1,1,4-Tetrachlorobutane | 86.8-87.1 | 20.0 | 1.4001 | 1.4858 | 72.81 | 72.39 | |
| 1,1-Dichloro-1-butene | 103.3-103.5 | 747 | | 1.4465 | 56.21 ² | 56.74 | |
| α -Chlorobutyraldehyde | 106-108 ³ | 740 | | 1.441 | 35.38 | 33.28 | |
| n-Butyl chloride | 101-101.5 ³ | 745 | | 1.4098 | | | |
| α -Chlorobutyryl chloride | 51.5-51.7 | 40.0 | | 1.4410 | | | |
| β -Chlorobutyryl chloride | 53.0-53.3 | 20.0 | | 1.4477 | | | |
| γ -Chlorobutyryl chloride | 71.0-71.2 | 20.0 | | 1.4597 | | | |
| Ethyl α -chlorobutyrate | 64.2-64.4 ³ | 20.0 | | 1.4202 | | | |
| Ethyl β -chlorobutyrate | 69.9-70.1 ³ | 20.0 | | 1.4222 | | | |
| n-Propyl acetate | 101-102 | 745 | | 1.3823 | | | |
| 1-Chloropropyl acetate | 48.6-48.8 | 20.0 | | 1.4143 | | | |
| 2-Chloropropyl acetate | 57.1-57.6 | 20.0 | | 1.4205 | | | |
| 3-Chloropropyl acetate | 58.4-58.8 | 10.0 | | 1.4275 | | | |
| n-Propyl chloroacetate | 52.6-52.8 | 10.0 | | 1.4233 | | | |

¹ Chlorine analysis by reaction with sodium diphenyl in dimethyl "Cellosolve" [L. M. Liggett, Anal. Chem., 26, 748(1954)].² Av. of three analyses (56.17, 56.22 and 56.25%).³ Uncorrected.

Table 3.11: Chlorinated Hydrocarbons (13)

| | | | | | | | | | | | | |
|-----------------------|--------|--------|-----|-----|-------|-------|------|---|---|--------|-----------|---------|
| Carbon Tetrachloride | 1.589* | 13.22* | 170 | 172 | 6.00 | 90.0 | — | — | — | 0.080* | 0.013* | 1.4598 |
| 1,1,1-Trichloroethane | 1.319* | 10.97* | 162 | 190 | 6.00 | 100.0 | — | — | — | — | — | 1.4350* |
| Chloroform Tech | 1.478* | 12.31* | 142 | | 11.60 | 160.0 | — | — | — | 0.800* | 0.097 | 1.4455 |
| Ethylene Dichloride | 1.252* | 10.42* | 179 | 186 | 4.46 | 61.6 | 59CC | — | — | 0.810 | 0.150 | 1.4427 |
| Methylene Chloride | 1.320* | 10.98* | 103 | 104 | 14.50 | 350.0 | — | — | — | 1.320* | 0.198* | 1.4210 |
| Monochlorobenzene | 1.105* | 9.19* | 267 | 270 | 1.07 | 8.8 | 105 | — | — | 0.048 | Insoluble | 1.5215 |
| Orthodichlorobenzene | 1.303* | 10.84* | 355 | 362 | 0.15 | 62.0* | 155 | — | — | 0.014 | Insoluble | 1.5482 |
| Perchloroethylene | 1.618* | 13.46* | 250 | 254 | 2.10 | 14.0 | — | — | — | 0.015* | 0.010* | 1.5044 |
| Propylene Dichloride | 1.159* | 9.64* | 204 | 208 | 3.22 | 43.0 | 63CC | — | — | — | — | 1.4371* |
| Trichlorobenzene | 1.454* | 12.10* | 418 | 427 | 0.06 | 22.0* | 260 | — | — | — | — | 1.5690* |
| Trichloroethylene | 1.459* | 12.14* | 188 | 190 | 4.46 | 59.0 | — | — | — | 0.110* | 0.032* | 1.4780 |

*Dens. at
25°C*Dens. at
25°C*Dens. at
100°C*Dens. at
25/20°C*Dens. at
25/20°C*Dens. at
25/20°C

Table 3.12: Chlorinated Organic Solvents (69)

| | Specific Gravity 20°/20° C | Dist. Range °F | | Flash Pt. °F TOC |
|-----------------------|----------------------------------|----------------|-----|------------------------|
| | | IBP | DP | |
| Carbon Tetrachloride | 1.584 | 169 | 171 | None |
| Chloroform | 1.485 | 140 | 143 | None |
| Ethylene Dichloride | 1.255 | 181 | 183 | 70 |
| Methylene Chloride | 1.366 | 103 | 105 | None |
| Monochlorobenzene | 1.113 | 268 | 271 | 84' |
| Orthodichlorobenzene | 1.313 | 355 | 361 | 170 |
| Perchloroethylene | 1.627 | 247 | 251 | None |
| Trichloroethylene | 1.455 | 187 | 190 | None |
| 1,1,1-Trichloroethane | 1.316 | 162 | 190 | None |

*TCC

Table 3.13: CHLOROWAX Liquid Chlorinated Paraffins, Waxes, and Alpha Olefins (27)

| CHLOROWAX Liquid | SP.GR. | STOKES | POISE | SUS | SUS* | Color | Water | Wt.%Cl ₂ | JQD | HCl | Mol. Wt. |
|-------------------------|-------------|---------|----------|---------|---------------|-------|--------|---------------------|----------|-----|----------|
| Grades | @25°C | @25°C | @25°C | 210°F | 100°F | Max. | % Max. | | Wt.%HCl | ppm | |
| LV | 1.110-1.128 | 5.4-9.0 | 6.0-10.0 | 50-100 | 1,350 | 4 | 0.1 | 35.0-39.5 | 0.50 max | 10 | 545 |
| 100 | 1.113-1.131 | 1.8-2.6 | 2.0-3.0 | 50-60 | 450 | 4 | 0.1 | 39.2-41.0 | 0.50 max | 10 | 454.5 |
| 40 | 1.16-1.185 | 19-27 | 22-32 | 120-160 | 4,000 | 4 | 0.1 | 41.0-44.5 | 0.50 max | 10 | 579.5 |
| 41SW | 1.60-1.175 | 14-28 | 16-33 | 115-145 | 3,200 | 5 | 0.1 | 41-43 | 0.50 max | 15 | 579.5 |
| 42-170 | 1.170-1.180 | 28-37 | 32-44 | 150-185 | 5,200 | 8 | 0.1 | 41-42.5 | 0.50 max | 10 | 578.5 |
| 45-225 | 1.210-1.23 | 55-90 | 66-111 | 205-245 | 11,000 | 8 | 0.1 | 45-46.5 | 0.50 max | 10 | 596 |
| 45LV | 1.08-1.115 | 10-20 | 11-22 | 33 | 58 | 2 | 0.1 | 40-44 | 0.25 max | 10 | 273.5 |
| S-45 | 1.155-1.175 | 1.3-1.9 | 1.5-2.2 | 45-52 | NA | 2 | 0.1 | 43-45 | 0.25 max | 10 | 360 |
| S-52 | 1.255-1.267 | 9-15 | 11-20 | 63-80 | NA | 2 | 0.1 | 51.5-52.5 | 0.25 max | 10 | 440 |
| 50 | 1.22-1.24 | 70-135 | 85-168 | 235-300 | 10,000-16,000 | 4 | 0.1 | 46-50 | 0.50 max | 10 | 648.5 |
| 50LV | 1.196-1.224 | 55-90 | 66-1.1 | 39-41 | 135-190 | 2 | 0.1 | 49-51 | 0.25 max | 10 | 334 |
| 51-225 | 1.270-1.285 | 95-150 | 120-195 | 200-240 | 10,000-14,000 | 8 | 0.1 | 50.0-51.5 | 0.50 max | 10 | 558 |
| 50-410HV | 1.266-1.272 | NA | NA | 550-610 | NA | 8 | 0.1 | 49-53 | 0.50 max | 10 | 648.5 |
| 57-60 | 1.31-1.33 | 12-20 | 16-27 | 55-70 | 1,500-2,000 | 4 | 0.1 | 55-58.5 | 0.25 max | 5 | 391 |
| 500C** | 1.345-1.375 | 12-18 | 17-25 | 55-68 | 1,500-2,100 | 2 | 0.1 | 58.3-60.0 | 0.25 max | 5 | 377.7 |
| 60-70 | 1.374-1.390 | 26-40 | 36-55 | 65-80 | 2,700-3,700 | 4 | 0.1 | 60.2-60.7 | 0.25 max | 10 | 411.5 |
| 63-85 | 1.40-1.42 | 38-66 | 53-94 | 75-92 | 3,700-5,500 | 4 | 0.1 | 61.5-63.3 | 0.25 max | 10 | 446 |
| 70-200 | 1.45-1.51 | NA | NA | 180-230 | 48,000-61,000 | 4 | 0.1 | 63-66 | 0.50 max | 10 | 511 |
| 53-45 | 1.28-1.31 | 4-8 | 5.5-12 | 44-56 | 700-850 | 2 | 0.1 | 53-56 | 0.50 max | 10 | 342 |
| 60-350 | 1.395-1.42 | NA | NA | 300-350 | NA | 4 | 0.1 | 59-62 | 0.50 max | 10 | 600 |
| 65 | 1.445-1.465 | 150-320 | 220-470 | 100-140 | 17,500-24,000 | 4 | 0.1 | 64-65 | 0.25 max | 10 | 446 |
| CHLOROWAX Alpha Olefins | | | | | | | | | | | |
| 100AO | 1.100-1.133 | 2.0-2.6 | 2.2-2.9 | 58-70 | 500 | 2 | 0.1 | 38-40.5 | 0.25 max | 5 | 475 |
| 45AO | 1.090-1.120 | 13-20 | 14-23 | NA | NA | 2 | 0.1 | 40-43 | 0.25 max | 10 | 273.5 |
| 500AO | 1.345-1.370 | 12-24 | 16-33 | 64-78 | 2,000-2,400 | 2 | 0.1 | 57-60 | 0.25 max | 5 | 377 |
| 54-120AO | 1.285-1.325 | 31-68 | 40-90 | 105-135 | 4,500-6,500 | 2 | 0.1 | 53-55 | 0.25 max | 5 | 467 |
| 52AO | 1.240-1.270 | 1.4-2.7 | 1.7-3.4 | 40-50 | 275 | 2 | 0.1 | 51.0-53.5 | 0.25 max | 5 | 342 |
| 51-225AO | 1.27-1.285 | 95-150 | 120-195 | 200-250 | NA | 4 | 0.1 | 50-52 | 0.50 max | 4 | 558 |

(continued)

Table 3.13: (continued)

Compatibility of Liquid Chlorowax with Other Materials

| | |
|------------------------------------|----------|
| Alkyd Resins | |
| Phthalic-Drying Oil Modified | Solution |
| Phthalic-Non-Drying Oil Modified | Solution |
| Resin Modified | Solution |
| Styrene Modified | Solution |
| Rosin Modified | Solution |
| Asphalt, Petroleum | Hot Melt |
| Butyl Oleate | Hot Melt |
| Carbowax | Hot Melt |
| Cellulose Acetate | Hot Melt |
| Cellulose Acetate Butyrate | Solution |
| Chlorinated Rubber | Solution |
| Coumarone-Indene Resins | Solution |
| Dibenzyl Sebacate | Solution |
| Dibutyl Phthalate | Solution |
| Dicapryl Phthalate | Solution |
| Di-iso-butyl Adipate | Solution |
| Di-octyl Adipate | Solution |
| Di-octyl Phthalate | Solution |
| Di-iso-octyl Phthalate | Solution |
| Diocyl Sebacate | Solution |
| Epoxy Resins | Solution |
| Maleic Resins | Solution |
| Methyl Methacrylate | Solution |
| Petroleum Resins | Solution |
| Paraplex G-60 | Solution |
| Paraplex G-62 | Solution |
| Phenolic Resin, Non-heat Hardening | Solution |
| Pliolite Resins | Solution |
| Polydichlorostyrene | Solution |
| Polyester Resins | Solution |
| Polyethylene Resins | Solution |
| Polystyrene Resins | Solution |
| Polyvinyl Chloride Resins | Solution |
| Rosin | Solution |
| Rosin Ester Resins | Solution |
| Rubber | |
| Natural | Solution |
| Nitrile | Solution |
| SBR | Solution |
| Neoprene | Solution |
| Butyl | Solution |
| Santicizer 141 | Solution |
| Santicizer 160 | Solution |
| Terpene Resins | Solution |
| Tetrahydrofurfural Oleate | Solution |
| Triaryl Phosphate | Solution |
| Tricresyl Phosphate | Solution |
| Triphenyl Phosphate | Solution |
| Urea Formaldehyde Resins | Solution |
| Waxes | |
| Mineral | Hot Melt |
| Natural | Hot Melt |
| Paraffin | Hot Melt |

(continued)

Table 3.13: (continued)**Miscibility of OxyChem Chlorowax Grade**

CHLOROWAX is miscible with many organic solvents, including aliphatic, aromatic and terpene hydrocarbons; chlorinated aliphatic and aromatic hydrocarbons; hydrogenated naphthas; ketones, esters and drying oils. They are insoluble in water, glycerine and glycols. With a few exceptions, the liquid grades are insoluble in the lower alcohols.

| SOLVENT | MISCIBLE WITH | |
|----------------------|-----------------------------------------|-----------------|
| | CHLOROWAX 45LV, 500-C, 50 LV & 65 | OTHER GRADES |
| Acetone | Yes | Yes |
| Amyl Acetate | Yes | Yes |
| Benzene | Yes | Yes |
| Butanol, Normal | Yes | No |
| Butanol, Tertiary | Yes | No |
| Carbon Tetrachloride | Yes | Yes |
| Dioxane | Yes | Yes |
| Ethanol | Yes | No |
| Ethylene Acetate | Yes | Yes |
| Ethylene Dichloride | Yes | Yes |
| Ethylene Glycol | No | No |
| Glycerine | No | No |
| Isopropanol | No | No |
| Linseed Oil | Yes | Yes |
| Methanol | Yes | No |
| Methyl Ethyl Ketone | Yes | Yes |
| Methylene Chloride | Yes | Yes |
| Mineral Spirits | Yes | Yes |
| Monochlorobenzene | Yes | Yes |
| Orthodichlorobenzene | Yes | Yes |
| Perchloroethylene | Yes | Yes |
| Perilla Oil | Yes | Yes |
| Propanol | Yes | No |
| Solvesso 100 | Yes | Yes |
| Soy Bean Oil | Yes | Yes |
| Toluene | Yes | Yes |
| Turpentine | Yes | Yes |
| Xylene | Yes | Yes |

Table 3.14: Chlorobenzenes—Vapor Pressures (72)

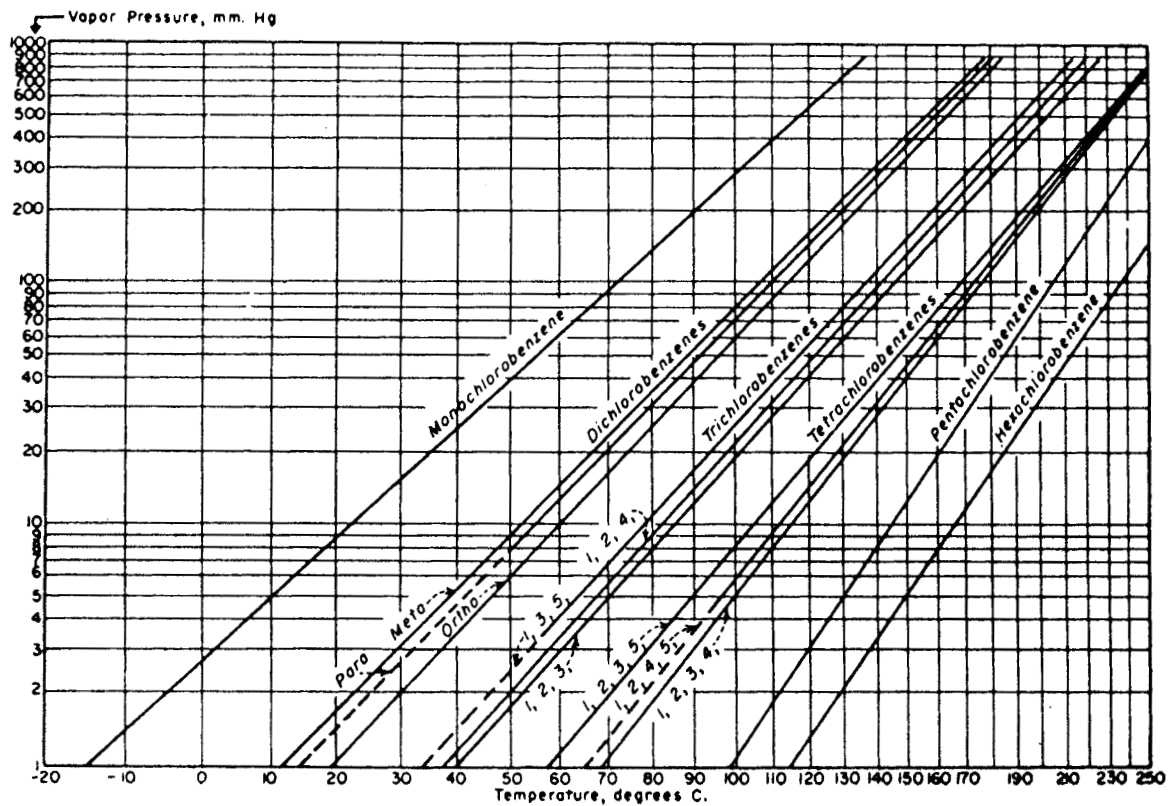


Table 3.15: Chloroform (7)

Trichloromethane

CHCl₃**PHYSICAL PROPERTIES**

| | |
|----------------------------------------------------|---------------------------------|
| Acidity as HCl | 0.001% by wt, max. |
| Boiling point | 61.2°C |
| Boiling range @760 mm | 60.0-61.5°C |
| Coefficient of cubical expansion Av./°C, liquid | 0.001399 |
| Color (Saybolt) | 24 max. |
| Dielectric constant, 1000 cycle | 4.90 |
| Fire point | Nonflammable |
| Flash point | Nonflammable |
| Freezing point | 63°C |
| Heat of evaporation @ B.P. | 59.0 cal/g |
| Latent heat of evaporation @ B.P. | 106.4 Btu/lb |
| Refractive index @20°C | 1.4467 |
| @25°C | 1.4422 |
| Solubility in water @20°C | 0.82 |
| Solubility of water in solvent @10°C | 0.06 g/water/100 g |
| Specific gravity 25/25°C | 1.477 |
| Specific heat Liquid, 20° | 0.234 cal/g/°C |
| Specific resistivity | 4.0 x 10 ⁹ ohms/cm |
| Thermal conductivity Liquid | 0.080 Btu/hr (sq ft) (°F/ft) |
| Vapor density (B.P., 760 mm) | 4.36 g/liter |
| Vapor pressure @30°C | 243 mm |
| Viscosity @20°C | 5.63 millipoises |
| @30°C | 5.10 millipoises |
| Water: no cloud @-10°C | 0.021% by wt, max. |
| Weight per gallon @25°C | 12.29 lb |

CHLOROFORM FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|------|----------------|-----------------------|
| 20.5 | Acetone | 64.5 |
| 35 | 2-Bromopropane | 62.2 |
| 96 | 2-Butanone | 79.7 |
| 6.8 | Ethanol | 59.3 |
| 13 | Ethyl formate | 62.7 |
| 15 | Formic acid | 59.2 |
| 2.8 | n-Hexane | 60 |
| 4.5 | Isopropanol | 60.8 |
| 12.5 | Methanol | 53.5 |
| 23 | Methyl acetate | 64.8 |
| 2.8 | Water | 56.1 |

Table 3.16: Chloromethylene Compounds (24)

| PRODUCT | EMPIRICAL FORMULA | MOL. WT. | PHYSICAL CONSTANTS | | | ASSAY (Method) | ISOMER CONTENT (Prox.) |
|------------------------------------|-------------------------------------------------|----------|-----------------------------|----------------------------|-----------------------|----------------|-------------------------------------------|
| | | | BOILING RANGE °C | SPECIFIC GRAVITY 25°/25°C. | REF. INDEX n_D^{25} | | |
| COMMERCIAL | | | | | | | |
| BENZYL CHLORIDE | C ₇ H ₇ Cl | 126.6 | 95% in 3° range incl. 179°C | 1.040–1.111 | 1.5360–1.5370 | 99% min. (1) | --- |
| para-METHYLBENZYL CHLORIDE | C ₈ H ₉ Cl | 140.6 | 199–204° | --- | 1.535–1.540 | 98% (1) | --- |
| METHYLBENZYL CHLORIDES | C ₈ H ₉ Cl | 140.6 | 199–204° | 1.070–1.080 (15.5°) | 1.5360–1.5370 | 98% (2) | 55% (p-) 45% (o-) |
| ETHYLBENZYL CHLORIDES | C ₉ H ₁₁ Cl | 154.7 | 217–222° | 1.046–1.047 | 1.5293–1.5305 | 99% (2) | 70% (p-) 30% (o-) |
| ISOPROPYLBENZYL CHLORIDES | C ₁₀ H ₁₃ Cl | 168.7 | 109–112° @ 15mm. | 1.01–1.03 | 1.520–1.530 | 98.5% (1) | 85% (p-) 15% (o-) |
| 2,4-DIMETHYLBENZYL CHLORIDES | C ₉ H ₁₁ Cl | 154.7 | 221–226° | 1.050–1.065 | 1.5375–1.5385 | 98.5% (2) | 86% (2,4-) 14% (2,6-) |
| 3,4-DIMETHYLBENZYL CHLORIDES | C ₉ H ₁₁ Cl | 154.7 | 225–232° | 1.059–1.062 | 1.5370–1.5390 | 99% (2) | 64% (3,4-) 34% (2,3-) 2% (2,4; 2,5; 2,6-) |
| DICHLOROBENZYL CHLORIDES | C ₇ H ₅ Cl ₃ | 195.5 | 245–253° | 1.410–1.418 | 1.5755–1.5765 | 94% (2) | 80% (2,4; 2,5; 2,6-) 20% other isomers |
| DEVELOPMENT | | | | | | | |
| 2,5-DIMETHYLBENZYL CHLORIDE | C ₉ H ₁₁ Cl | 154.7 | 221–226° | 1.035–1.045 | 1.5350–1.5360 | 98% (2) | --- |
| meta-CHLOROBYNYL CHLORIDE | C ₇ H ₆ Cl ₂ | 161.1 | 98–104° @ 15mm. | 1.25–1.27 | 1.5532–1.5542 | 97.5% (1) | --- |
| α,α'-DICHLOROXYLENES | C ₈ H ₈ Cl ₂ | 175.1 | prox. 133°C @ 15mm. | --- | --- | 95% (1) | 70-80% (p-) 20-30% (o-) |
| Bis-CHLOROMETHYLDURENE | C ₁₂ H ₁₆ Cl ₂ | 231.2 | 190–196° dec. (3) | --- | --- | 98% (2) | --- |
| RESEARCH | | | | | | | |
| ortho-METHYLBENZYL CHLORIDE | C ₈ H ₉ Cl | 140.6 | --- | --- | --- | 98% (1) | --- |
| meta-METHYLBENZYL CHLORIDE | C ₈ H ₉ Cl | 140.6 | --- | --- | --- | 98% | --- |
| CHLOROMETHYL-TETRALINS | C ₁₁ H ₁₃ Cl | 180.5 | 135–145° @ 7mm. | --- | --- | 98% (2) | 60% (β-) 40% (α-) |
| α-CHLOROMETHYL-β-METHYLNAPHTHALENE | C ₁₂ H ₁₁ Cl | 190.7 | 58–62° (3) | --- | --- | 95% min. (2) | --- |

- (1) Gas-Liquid Partition Chromatography
(2) Alcoholic potassium hydroxide hydrolysis
(3) Melting range


Table 3.17: o- and p-Chlorotoluenes (7)

| $C_6H_4(Cl)CH_3$ | | | |
|-----------------------------------------|--------------------------------------------------------------------------------------|-------------|--------|
| PHYSICAL PROPERTIES | | | |
| | Ortho | Para | |
| Boiling point | 159.4°C | 162.5°C | |
| Coefficient of cubical expansion @ 30°C | 0.00092 | | |
| Distillation range | | | |
| Start | 158.3°C min. | | |
| 100% | 165.1°C max. | | |
| Flash point | 46°C | | |
| Freezing point | -34°C | 7.5°C | |
| Latent heat of vaporization | 77 cal/g | | |
| Purity | 60% approx. | 40% approx. | |
| Solubility of water @ 25°C | 0.037 g/100 g | | |
| Solubility of water in solvent @ 25°C | 0.014 g/100 g | | |
| Refractive index @ 20°C | 1.5238 | 1.5199 | |
| Specific gravity @ 20/4°C | 1.0817 | 1.0697 | |
| Surface tension @ 25°C | 32.9 dynes/cm | | |
| Vapor pressure @ 100°C | 132 mm | | |
| Viscosity @ 100°F | { 0.707 centistoke { 0.747 centipoise { 0.328 centistoke { 0.327 centipoise | | |
| @ 210°F | | | |
| Weight per gallon @ 25°C | | | 9.1 lb |

Table 3.18: p-Chlorotoluene (7)

| $C_6H_4(Cl)CH_3$ | |
|----------------------------------------|-------------------------|
| PHYSICAL PROPERTIES | |
| Acidity as acetic acid | Nil |
| Boiling point @ 760 mm Hg | 162.3°C |
| @ 50 mm Hg | 78.4°C |
| @ 10 mm Hg | 43.8°C |
| Congeaing point | 6.8°C |
| Distillation range @ 760 mm Hg | 162-166°C |
| Flash point (Cleveland O. C.) | 140°F |
| Moisture content | Nil |
| Molecular weight | 126.59 |
| Pounds per gallon | 8.85 |
| Purity | 98.0% |
| Refractive index n_{22}^D | 1.5184 |
| Side chain chlorine | None |
| Solidifies | Below 45°F |
| Specific gravity @ 25/25°C | 1.067 min. - 1.071 max. |
| Surface tension (in air) DuNouy @ 25°C | 34.60 dynes/cm |
| Vapor pressure @ 96.6°C | 100 mm Hg |

Table 3.19: HALSO 99 (27)




Specifications:

| | |
|-------------------|--------------|
| Appearance | Clear liquid |
| Color | 30 APHA Max. |
| Monochlorotoluene | 99.6% Min. |
| Toluene | 0.4% Max. |

Physical Properties:

| | Monochlorotoluene | | Toluene |
|--------------------------------------|----------------------------------|-------------|-------------------------------|
| | <u>Ortho</u> | <u>Para</u> | <u>Toluene</u> |
| Formula | C ₇ H ₇ Cl | | C ₇ H ₈ |
| Molecular Weight | 126.59 | | 92.14 |
| CAS Registry Number | 95-49-8 | 106-43-4 | 108-88-3 |
| Specific Gravity @ 25°C/15.5°C | 1.079 | 1.067 | 0.863 |
| Specific Gravity Correction Factor | -0.00088/°C | -0.00097/°C | - |
| Density (lb/gal) | 9.0 | 8.9 | 7.2 |
| Freeze Point, °C (°F) | -35.6 (-32) | 7.5 (45.5) | -95 (-139) |
| Boiling Point, °C (°F) | 159 (318) | 162 (324) | 111 (231) |
| Flash Point (TCC), °C (°F) | 50.6 (123) | 52.8 (127) | 4.4 (40) |
| Fire Point (COC), °C (°F) | 85 (185) | 87.7 (190) | - |
| Vapor Pressure, 10 mm Hg | 43.2°C | 43.8°C | 6.4°C |
| 100 mm Hg | 94.7°C | 96.6°C | 51.9°C |
| 760 mm Hg | 159.2°C | 161.7°C | 110.6°C |
| Refractive Index (n _D 20) | 1.5268 | 1.5150 | 1.4961 |
| Heat of Vaporization (cal/gm) | 81.2 | 80.2 | 93.1 |
| Specific Heat @ 20°C (cal/gm/°C) | 0.355 | 0.355 | 0.392 |
| Viscosity (Centistokes) @ 100°F | 0.75 | - | - |
| @ 210°F | 0.44 | - | - |
| Kauri-Butanol Value | 110 | - | 105 |
| Solubility in Water @ 23°C (ppm) | 72 | 74 | - |

Table 3.20: HALSO AG 125 (27)



Specifications:

| | |
|-------------------|--------------|
| Appearance | Clear liquid |
| Color | 25 APHA Max. |
| Monochlorotoluene | 99.5% Min. |
| Toluene | 0.4% Max. |

Physical Properties:

| | Monochlorotoluene | | Toluene |
|--------------------------------------|----------------------------------|-------------|-------------------------------|
| | <u>Ortho</u> | <u>Para</u> | <u>Toluene</u> |
| Formula | C ₇ H ₇ Cl | | C ₇ H ₈ |
| Molecular Weight | 126.59 | | 92.14 |
| CAS Registry Number | 95-49-8 | 106-43-4 | 108-88-3 |
| Specific Gravity @ 25°C/15.5°C | 1.079 | 1.067 | 0.863 |
| Specific Gravity Correction Factor | -0.00088/°C | -0.00097/°C | - |
| Density (lb/gal) | 9.0 | 8.9 | 7.2 |
| Freeze Point, °C (°F) | -35.6 (-32) | 7.5 (45.5) | -95 (-139) |
| Boiling Point, °C (°F) | 159 (318) | 162 (324) | 111 (231) |
| Flash Point (TCC), °C (°F) | 50.6 (123) | 52.8 (127) | 4.4 (40) |
| Fire Point (COC), °C (°F) | 85 (185) | 87.7 (190) | - |
| Vapor Pressure, 10 mm Hg | 43.2°C | 43.8°C | 6.4°C |
| 100 mm Hg | 94.7°C | 96.6°C | 51.9°C |
| 760 mm Hg | 159.2°C | 161.7°C | 110.6°C |
| Refractive Index (n _D 20) | 1.5268 | 1.5150 | 1.4961 |
| Heat of Vaporization (cal/gm) | 81.2 | 80.2 | 93.1 |
| Specific Heat @ 20°C (cal/gm/°C) | 0.355 | 0.355 | 0.392 |
| Viscosity (Centistokes) @ 100°F | 0.75 | - | - |
| @ 210°F | 0.44 | - | - |
| Kauri-Butanol Value | 110 | - | 105 |
| Solubility in Water @ 23°C (ppm) | 72 | 74 | - |


Table 3.21: o-Dichlorobenzene (7)

| 1,2-Dichlorobenzene | | $C_6H_4-Cl_2$ |
|------------------------------------------------------------|-----------------------------|-------------------------------|
| PHYSICAL PROPERTIES | | |
| | Purified | Technical |
| Boiling point | 180.2°C | 179.6°C |
| Boiling range (within) | 3.0°C | 4.0°C |
| Dielectric constant 1000 cycles | 9.82 | |
| Electrical conductivity @0°C | 10 ⁻⁹ recip. ohm | |
| Fire point | 103°C | 103°C |
| Flash point | 68°C | 68°C |
| Freezing point | -18.3°C | -22.5°C |
| Heat of combustion | 671.8 kg cal/mol. | |
| Heat of fusion | 88 joules/g | |
| Impurities (p-dichloro- benzene, trichloroben- zene) | Not over 4% | Not over 12% |
| Latent heat of vaporiza- tion @B.P. | | 65 cal/g at. |
| Refractive index @22°C | | 1.5518 |
| Solubility in water @25°C | | Less than 0.01% |
| Specific gravity @20/4°C | | 1.3048 |
| Specific heat | | 0.271 cal/g/°C |
| Specific resistivity | | 2.0 x 10 ⁸ ohms/cm |
| Weight per gallon @25°C | | 10.85 lb |

Table 3.22: p-Dichlorobenzene (7)**p-DICHLOROBENZENE FORMS AZEOTROPES WITH:**

| % | | B. P. °C of Azeotrope |
|------|-----------------------|-----------------------|
| 20 | Cineole | 173.5 |
| 33.5 | Cyclohexanol | 153.6 |
| 37 | 2-Ethoxyethyl acetate | 155.5 |
| 34 | n-Hexyl alcohol | 151.6 |
| 46 | Camphene | 155.0 |
| 63.5 | Isoamyl ether | 172.4 |
| 27 | Isoamyl propionate | 155.2 |
| 14 | d-Limonene | 174.2 |
| 50 | α-Pinene | 153.4 |
| 2 | Phenol | 156.0 |
| 43 | Propyl isovalerate | 154.5 |

Table 3.23: Dichlorodisopropyl Ether (7)




PHYSICAL PROPERTIES


| | |
|--------------------------------------|---------------------------------------------------------------------------------|
| Acidity as HCl | 0.01% by wt, max. |
| Boiling point @760 mm | 187.3°C |
| Boiling range @760 mm | Not more than 5% distills below 180°C Not less than 95% distills below 190°C |
| Color (Pt-Co scale) | 25 max. |
| Flash point (O. C.) | 185°F |
| Solubility in water @20°C | 0.17% by wt |
| Solubility of water in solvent @20°C | 0.11% by wt |
| Specific gravity @20/20°C | 1.1122 |
| Vapor pressure @20°C | 0.85 mm |
| Weight per gallon @20°C | 9.26 lb |

Table 3.24: Dichloroethylene (7)

cis-Acetylene Dichloride



trans-Acetylene Dichloride



PHYSICAL PROPERTIES

cis isomer

| | |
|----------------------------------------------------|---------------------|
| Acidity as HCl | 0.0005% by wt, max. |
| Boiling point @760 mm | 60.3°C |
| Coefficient of cubical expansion Av./°C, liquid | 0.00127 |
| Color (Saybolt) | 24 max. |
| Flash point | 6°C |
| Freezing point | -80.5°C |
| Latent heat of vaporization @B. P. | 73.0 cal/g |
| Refractive index @15°C | 1.4519 |
| Residue on evaporation | 0.007% by wt, max. |
| Solubility in water @25°C | 0.77 g/100 g |
| Solubility of water in solvent @10°C | 0.04 g water/100 g |
| Specific gravity @20/4°C | 1.282 |
| Specific heat Liquid, 20°C | 0.270 cal/g/°C |
| Vapor density (B. P., 760 mm) | 3.54 g/liter |
| Vapor pressure @30°C | 273 mm |
| Viscosity liquid @20°C | 0.48 centipoise |
| Water: no cloud @-15°C | 0.001% by wt, max. |
| Weight per gallon @20°C | 10.70 lb |


PHYSICAL PROPERTIES

trans isomer

| | |
|----------------------------------------------------|---------------------|
| Acidity as HCl | 0.0005% by wt, max. |
| Boiling point @760 mm | 48.0-48.5°C |
| Boiling range @760 mm | 47.0-48.5°C |
| Coefficient of cubical expansion Av./°C, liquid | 0.00136 |
| Color (Saybolt) | 24 max. |
| Flash point | 4°C |
| Freezing point | 50°C |
| Latent heat of vaporization @B. P. | 73.7 cal/g |
| Refractive index @15°C | 1.4490 |
| Residue on evaporation | 0.0007% by wt, max. |
| Solubility in water @25°C | 0.63 g/100 g |
| Solubility of water in solvent @10°C | 0.03 g water/100 g |
| Specific gravity @20/4°C | 1.257 |
| Specific heat Liquid, 20°C | 0.270 cal/g/°C |
| Vapor density (B. P., 760 mm) | 3.67 g/liter |
| Vapor pressure @30°C | 395 mm |
| Viscosity liquid @20°C | 0.41 centipoise |
| Water: no cloud @-15°C | 0.004% by wt, max. |
| Weight per gallon @20°C | 10.49 lb |

Table 3.25: Dichloroethyl Ether (7)

2,2'-Dichloroethyl Ether
 sym- or β,β' -Dichloroethyl Ether




PHYSICAL PROPERTIES

| | |
|--------------------------------------|-------------------------------------------------------------------------------------------|
| Acidity as HCl | 0.005% max. |
| Apparent ignition temperature in air | 396°C |
| Boiling point | 178°C |
| Boiling range @760 mm | Not more than 5% dis- tills below 173°C Not less than 95% dis- tills below 179°C |
| Color (500 mm tube) | Not more than 2 yellow Lovibond |
| Ethylene dichloride | 1.0% max. |
| Flash point (C. C.) | 55°C |
| Latent heat of vaporization @178°C | 64.1 cal/g |
| Refractive index @20°C | 1.457 |
| Specific gravity @20/20°C | 1.219-1.224 |
| Specific heat @20-30°C | 0.369 cal |
| Surface tension @25°C | 41.8 dynes/ sq cm |
| Vapor pressure @20°C | 1.2 mm |
| Viscosity @25°C | 2.0653 centipoises |
| Weight per gallon @20°C | 10.17 lb |

Table 3.26: Dichlorohydrin (7)

Glycerol Dichlorohydrin
 Dichloroisopropyl Alcohol
 1,3-Dichloropropanol-2
 α -Propenyldichlorohydrin



PHYSICAL PROPERTIES

1, 3-DICHLORO-2-PROPANOL FORMS AZEOTROPES WITH:

| Boiling point | (1, 3-) 174°C (1, 2-) 183°C | % | | B. P. °C of Azeotrope |
|------------------|--------------------------------|------|-------------------------|-----------------------|
| Boiling range | 174-176°C (95%) | 91 | Bromobenzene | 155.5 |
| Flash point | 74°C | 39 | o-Bromotoluene | 170.5 |
| Refractive index | 1.47-1.48 | 32 | p-Bromotoluene | 172.8 |
| Specific gravity | 1.36-1.39 | 62 | Camphene | 152.8 |
| Vapor pressure | 7 mm | 43 | α -Chlorotoluene | 168.9 |
| | | 85 | o-Chlorotoluene | 158.0 |
| | | 78 | p-Chlorotoluene | 160.0 |
| | | 45 | Cymene | 165.5 |
| | | 55 | p-Dichlorobenzene | 162.2 |
| | | 62 | 2, 7-Dimethylactane | 155.0 |
| | | 85 | Dimethyl oxalate | 162.0 |
| | | 33.5 | Indene | 173.5 |
| | | 30 | Iodobenzene | 173.0 |
| | | 10 | Isoamyl butyrate | 178.6 |
| | | 52 | Isoamyl ether | 165.9 |
| | | 43 | d-Limonene | 166.8 |
| | | 50 | Mesitylene | 156.0 |
| | | 41 | p-Methylanisole | 173.1 |
| | | 35 | Methylheptenone | 178.5 |
| | | 57 | α -Phellandrene | 163.0 |
| | | 63.5 | α -Pinene | 150.4 |
| | | 63 | Pseudocumene | 164.4 |
| | | 85 | Styrene | 142.5 |
| | | 38 | α -Terpinolene | 166.8 |
| | | 40 | Thymene | 166.5 |

1, 2-DICHLORO-3-PROPANOL FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|----|-------------------------|-----------------------|
| 55 | o-Bromotoluene | 171.6 |
| 75 | Camphene | 156.0 |
| 60 | α -Chlorotoluene | 171.0 |
| 68 | Indene | 160.0 |
| 60 | α -Limonene | 169.3 |
| 43 | 2-Octanol | 172.5 |
| 80 | α -Pinene | 153.0 |
| 50 | Thymene | 170.8 |

Table 3.27: Dichloromethane (22)

Methylene Chloride
Methylene Dichloride



Methylene chloride is a clear, water-white liquid at ordinary temperatures, with a pleasant, ethereal odor. It is

highly volatile and mobile. Methylene chloride is completely miscible with most organic liquids.

TYPICAL PROPERTIES



| | |
|------------------------------------------|--------|
| Molecular Weight | 84.93 |
| Boiling Point, °F | 103.6 |
| °C | 39.8 |
| Freezing Point, °F | -142.1 |
| °C | -96.7 |
| Flash Point (Tag open cup) | none |
| Ignition Temperature, °F | 1224 |
| °C | 662 |
| Specific Gravity of Vapor (air = 1.00) | 2.94 |
| Density at 20°C, pounds per gallon | 11.15 |
| Viscosity at 20°C, centipoises | 0.425 |
| Specific Heat at 20°C, cal/(g)(°C) | 0.29 |
| Vapor Pressure at 20°C, mm | 348.9 |
| Evaporation Rate at 25°C (ether = 100) | 71 |
| Heat of Vaporization, cal/g | 75.3 |
| Btu/lb | 135.5 |
| Solubility | |
| g methylene chloride/100 g water at 20°C | 2.0 |

| | |
|------------------------------------------|-------|
| g water/100 g methylene chloride at 25°C | 0.2 |
| Azeotrope with Water, Boiling Point, °F | 100.6 |
| °C | 38.1 |
| Azeotropic Water Content, wt % | 1.5 |

Specification for standard grade

| | |
|-----------------------------------|---------------------------------|
| Appearance | Clear, free of suspended matter |
| Color, APHA, maximum | 10 |
| Odor | Characteristic; no residual |
| Specific Gravity, 25°C/25°C | 1.319 to 1.323 |
| Acidity, ppm, maximum | 5 |
| Nonvolatile Residue, ppm, maximum | 10 |
| Free Halogen | none |
| Distillation Range (100%), °C | 39.5 to 40.5 |
| °F | 103.1 to 104.9 |
| Water, ppm, maximum | 100 |

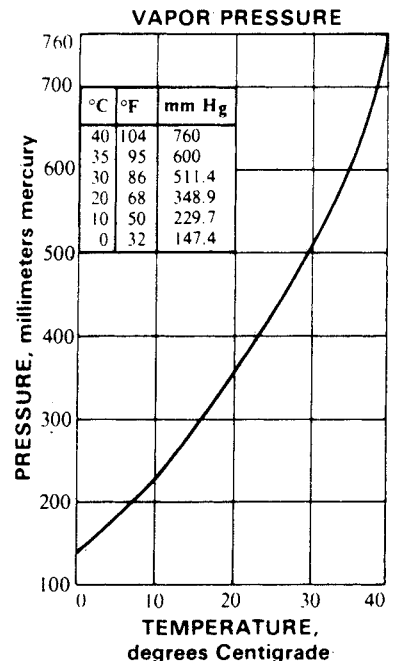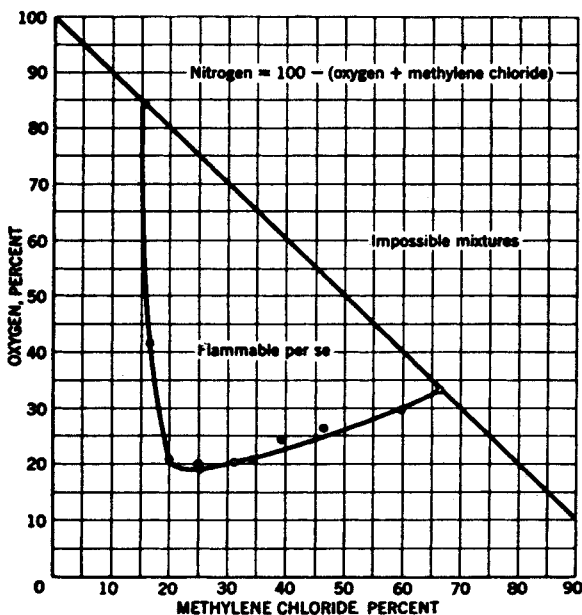Flammability of Methylene Chloride-Oxygen-Nitrogen Mixtures




(continued)

Table 3.27: (continued)

1,1-DICHLOROMETHANE FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|------|---------------------------|-----------------------|
| 30 | Acetone | 57.6 |
| 23 | Biallyl | 56.5 |
| 94.8 | 1,3-Butadiene | -5.0 |
| 20 | Chloromethyl methyl ether | 54 |
| 30 | Cyclopentane | 38.0 |
| 55 | Diethylamine | 52.0 |
| 11.5 | Ethanol | 54.6 |
| 21 | Iodomethane | 39.8 |
| 8 | Isopropanol | 56.6 |
| 51 | Pentane | 35.5 |
| 23 | Propylene oxide | 40.6 |
| 6 | tert-Butanol | 57.1 |
| 1.5 | Water | 38.1 |


Table 3.28: Dichloropentanes (7)



PHYSICAL PROPERTIES

| | |
|---------------------------------|--------------------------------------------------------------|
| Acidity as HCl | 0.025% max. |
| Average chlorine content | 48% |
| Distillation | 95% between 130-200°C |
| Evaporation rate @109°F:Minutes | |
| 3.83 | 25% |
| 8.00 | 50% |
| 14.20 | 75% |
| 90.00 | 100% |
| Flash point (O. C.) | 97°F |
| Heat of vaporization | 68.5 cal/g |
| Kauri-butanol value | 67 cc |
| Solubility in water | Negligible |
| Specific gravity @20°C | 1.07-1.08 |
| Specific heat | 0.369 cal/g |
| Surface tension @25°C | 31.8 dynes/cm |
| Viscosity @25°C | 0.016 poise |
| Water azeotrope @80-97°C | 66% C ₅ H ₁₀ Cl ₂ (approx.) |
| Water content | None |
| Weight per gallon | 8.94 lb |

Table 3.29: 2,4-Dichlorotoluene (7)




PHYSICAL PROPERTIES

| | |
|-------------------------------|------------------------|
| Acidity as acetic acid | Nil |
| Boiling point @760 mm Hg | 200.5°C |
| @50 mm Hg | 113.0°C |
| @10 mm Hg | 77.0°C |
| Congealing point | -13°C |
| Distillation Range @760 mm Hg | 199-202°C |
| Fire point (Cleveland O. C.) | 383°F |
| Flash point (Cleveland O. C.) | 199°F |
| Moisture content | Nil |
| Molecular weight | 161.04 |
| Pounds per gallon | 10.34 |
| Purity | 99.0% |
| Refractive index n_{22}^D | 1.5480 |
| Side chain chlorine | None |
| Specific gravity @25/25°C | 1.247 min. -1.251 max. |
| Surface tension, DuNouy @25°C | 38.29 dynes/cm |
| Vapor pressure @130°C | 100 mm Hg |

Table 3.30: Epichlorohydrin (7)

3-Chloropropylene-1,2-oxide



Epichlorohydrin is a colorless, mobile, highly reactive liquid. It is completely miscible with many organic liquids such as acetone, carbon tetrachloride, alcohols, benzene, ethers, halogenated hydrocarbons, fixed oils, etc. It is not miscible with glycerin and water. The two reactive functional groups make it a very useful chemical intermediate. In the presence of a catalyst, its epoxy group enters into an exothermic reaction with the active hydrogen atoms of alcohols, amines, carboxylic acids, phenols, mercaptans, etc. The atom in the molecule reacts with acid salts, alkali metal phenolates, and alcoholates, amides, amines, etc.

Epichlorohydrin is used to a large extent as a raw material in the manufacture of epoxy resins. When condensed with dihydric phenols or phenolic resins, epoxy resins are obtained which range from liquids to solids. It is also used in the manufacture of ion exchange resins, adhesion resins and a large number of other chemicals.

| | |
|-----------------------------------------------------------------------|---------|
| Absolute viscosity at 20°C., cps. | 1.1 |
| $\Delta\text{BP}/\Delta\text{P.}$, at 740 to 760 mm. Hg, °C. per mm. | 0.044 |
| Boiling point, °C., 760 mm. | 115.2 |
| 50 mm. | 45 |
| 10 mm. | 16 |
| Freezing point, °C. | -58.1 |
| Heat of vaporization at 1 atm., Btu/lb. | 174 |
| Molecular weight | 92.53 |
| Refractive index, n_D at 20°C. | 1.4359 |
| Solubility, % by weight at 20°C., | |
| in water | 5.9 |
| water in | 1.2 |
| $\Delta\text{SG}/\Delta\text{T.}$ at 20° to 30°C. | 0.00120 |
| Specific gravity at 20/20°C. | 1.1761 |
| Vapor pressure at 20°C., mm. Hg | 12.7 |
| Flash point (open cup), °F. | 105 |

Table 3.31: Ethyl Chloride (22) (23)Monochloroethane
Muriatic Ether $\text{C}_2\text{H}_5\text{Cl}$ **TYPICAL PROPERTIES**

| | | | |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-------|
| Molecular Weight: | 64.52 | Refractive Index of Vapor, n_D^{25} | 1.001 |
| Description: | Ethyl chloride is a colorless mobile liquid at 1 atmosphere below 12.4°C (54°F). Above the boiling point, it is a colorless gas. Ethyl chloride has an ethereal odor and is highly volatile and flammable. | Vapor Pressure, mm Hg | |
| | | 0°C (32°F) | 464 |
| | | 10°C (50°F) | 692 |
| | | 20°C (68°F) | 1011 |
| | | Specific Gravity of Vapor (air=1) | 2.23 |
| | | Solubility at 0°C, | |
| | | g ethyl chloride/100 g water | 0.447 |
| | | g water/100 g ethyl chloride | 0.07 |
| Freezing Point, °C | -138.3 | Solubility: | |
| °F | -217 | Ethyl chloride is soluble in most organic solvents. | |

(continued)


Table 3.31: (continued)

| | | |
|-------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Flash Point, Tag open cup, °C | -43 | Reactivity: |
| °F | -45 | At ordinary temperatures the oxidation and hydrolysis of ethyl chloride take place slowly. In the absence of air and water, it can be used with most common metals up to 200°C (392°F). Ethyl chloride burns with a green-edged flame, producing hydrogen chloride, carbon dioxide and water. It is thermally stable to 400°C (752°F); thermal splitting yields ethylene and hydrogen chloride. The reactivity of ethyl chloride as an intermediate is often based on the affinity of alkali metal atoms for its chlorine atom. |
| Explosive Limits, volume % in air | 3.16 to 15 | |
| Autoignition Temperature, °C | 519 | |
| °F | 966 | |
| Specific Heat at 0°C, cal/ (g) (°C) or Btu/ (lb) (°F) | 0.37 | |
| Heat of Vaporization at Boiling Point cal/g | 92.5 | |
| Btu/lb | 165.6 | |
| Viscosity at 10°C, cps | 0.279 | |
| Density at 20°C, pounds/gallon | 7.461 | |

Specification and Typical Analysis:

| | Specification | Typical Analysis |
|---------------------------|---------------------------------|---------------------------------|
| Purity, wt % | 99.5 minimum | 99.97 |
| Color, APHA | 20 maximum | <5 |
| Appearance | clear, free of suspended matter | clear, free of suspended matter |
| Acidity as HCl, wt % | 0.002 maximum | <0.0001 |
| Water, wt % | 0.02 maximum | 0.0010 |
| Nonvolatile Residue, wt % | 0.01 maximum | <0.0001 |
| Total Impurities, wt % | 0.5 maximum | 0.03 |
| Distillation Range, °C | 12 to 13 | 12.2 to 12.4 |
| Specific Gravity, 0°C/4°C | 0.922 to 0.925 | 0.922 |

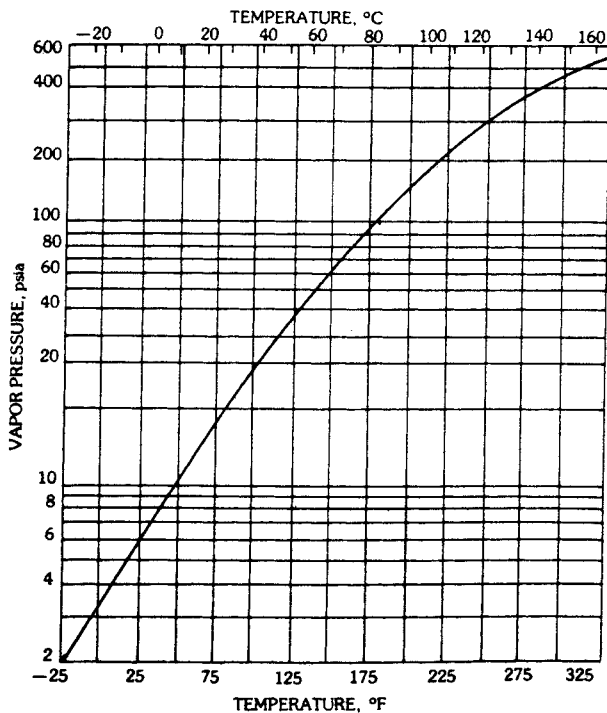Ethyl Chloride Vapor Pressure vs Temperature



Solubility, Approximate, g/100 g Solvent at 25°C

| | |
|----------------|-----|
| Acetone | 103 |
| Benzene | 110 |
| n-Heptane | 87 |
| Ethanol (21°C) | 48 |
| Methanol | 37 |
| Water (20°C) | 0.6 |

Table 3.32: Ethylene Chlorohydrin (7)

Glycol Chlorohydrin
2-Chlorethyl Alcohol

$\text{ClCH}_2\text{CH}_2\text{OH}$

PHYSICAL PROPERTIES

| | |
|--------------------------------------|-----------------|
| Absolute viscosity @20°C | 3.4 centipoises |
| Apparent specific gravity @20/20°C | 1.2040 |
| Boiling point @ 760 mm Hg | 128.7°C |
| @ 50 mm Hg | 60°C |
| @ 10 mm Hg | 29°C |
| Coefficient of expansion @55°C | 0.00092 |
| Flash point (Cleveland O. C.) | 140°F |
| Freezing point | -62.6°C |
| Molecular weight | 80.52 |
| Pounds per gallon @20°C | 10.03 |
| Solubility in water @20°C | Complete |
| Solubility of water in solvent @20°C | Complete |
| Vapor pressure @20°C | 4.9 mm Hg |

Table 3.33: Ethylene Dichloride (7)

1,2-Dichloroethane
sym-Dichloroethane
Ethylene Chloride
Dutch Oil
Elayl Chloride

$\text{ClCH}_2-\text{CH}_2\text{Cl}$

PHYSICAL PROPERTIES

| | | | |
|-----------------------------------------------------------|----------------------------------------|--------------------------------------|-------------------------------|
| Acidity as HCl | Not more than 0.001% | Purity | Not less than 99.0% |
| Apparent ignition temperature in air | 449°C | Refractive index | 1.4443 |
| Boiling point | 83.6°C | Solubility in water @20°C | 0.87% by wt |
| Boiling range @760 mm | Below 82.5°C none Above 84.0°C none | Solubility of water in solvent @20°C | 0.16% by wt |
| Coefficient of cubical expansion Av./°C, liquid (10-30°C) | 0.00116 | Specific gravity @20/20°C | 1.2550 |
| Color (500-mm tube) (Lovibond) | Not more than 1.0 yellow | Specific heat | 0.31 cal/g/°C |
| Dielectric constant @20°C | 10.5±0.3 | Specific resistivity | 9.0 x 10 ⁶ ohms/cm |
| Electrical conductivity | 3 x 10 ⁻⁸ | Surface tension @25°C | 37.5 dynes/cm |
| Explosive limits in air | 6.2-15.9% by vol. | Thermal conductivity @20°C | 0.0038 cal/cm/sec/°C |
| Fire point | 28°C | Vapor density (B. P., 760 mm) | 3.88 g/liter |
| Flash point (ASTM O. C.) | 21°C | Vapor pressure @20°C | 63 mm |
| Freezing point | -35°C | @30°C | 99 mm |
| Heat of combustion | 2720 cal/g | Viscosity @25°C | 0.0078 poise |
| Latent heat of evaporation @B. P. | 77.3 cal/g | Water content | Not more than 0.02% |
| Nonvolatile matter | Not more than 0.001 g/100 cc | Weight per gallon @25°C | 10.38 lb |


(continued)

Table 3.33: (continued)

ETHYLENE DICHLORIDE FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|------|----------------------|-----------------------|
| 18 | Allyl alcohol | 79.9 |
| 6 | tert-Amyl alcohol | 83 |
| 79 | Carbon tetrachloride | 75.6 |
| 19.5 | 1,1-Dichloroethane | 72 |
| 37 | Ethanol | 70.3 |
| 38 | Formic acid | 77.4 |
| 6.5 | Isobutanol | 83.5 |
| 43.5 | Isopropyl alcohol | 74.7 |
| 19 | Propanol | 80.7 |
| 10 | n-Propyl formate | 84.1 |
| 18 | Trichloroethylene | 82.9 |
| 32 | Methanol | 61 |
| 8.2 | Water | 70.5 |

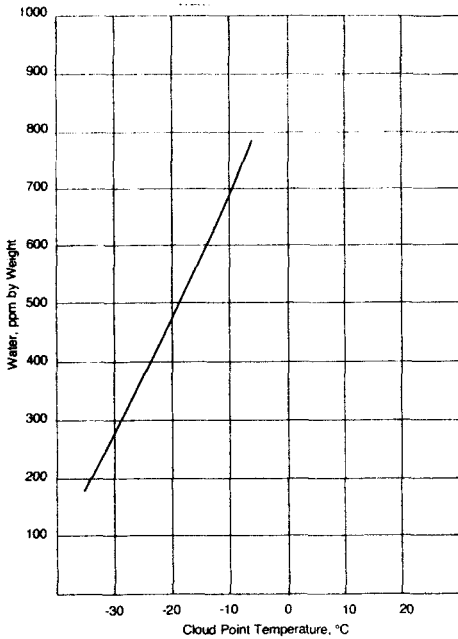Water Content vs. Cloud Point (53)



Limits of Flammability of Ethylene Dichloride in Air and Carbon Dioxide


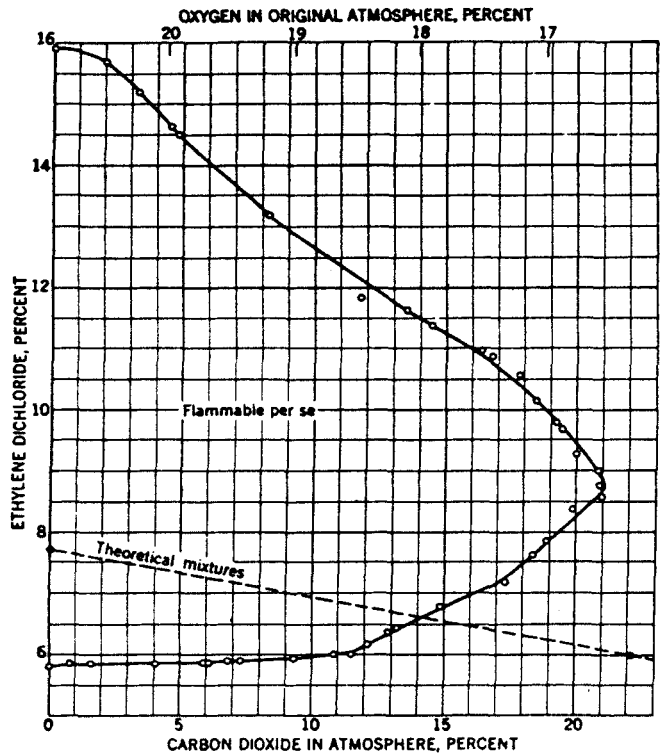


Table 3.34: 2-Ethylhexyl Chloride (7)



PHYSICAL PROPERTIES

| | |
|--------------------------------------|-------------|
| Average weight @20°C | 7.33 lb/gal |
| Boiling point @760 mm Hg | 172.9°C |
| Flash point (O. C.) | 140°F |
| Molecular weight | 148.67 |
| Solubility in water @20°C | 0.1% by wt |
| Solubility of water in solvent @20°C | 0.1% by wt |
| Specific gravity @20/20°C | 0.8833 |
| Vapor pressure @20°C | 1.3 mm Hg |

Table 3.35: Glycerol α-Monochlorohydrin (7)



PHYSICAL PROPERTIES


| | |
|--------------------------|------------------------------|
| Boiling point | 213°C |
| Boiling range (ASTM) | 90% between 136-142°C @40 mm |
| Flash point (O. C.) | 280°F |
| Refractive index @25°C | 1.4781 |
| Solubility in water | 100% |
| Specific gravity @20/4°C | 1.320 |
| Weight per gallon | 10.98 lb |

Table 3.36: Hexachloroethane (7)

Perchloroethane

Carbon Trichloride

Tetrachloroethylene Dichloride




PHYSICAL PROPERTIES

| | |
|-------------------------------------|--------------------------------|
| Acidity as HCl | Less than 0.05% |
| Boiling point @ 760 mm | Sublimes @ 185 °C |
| Latent heat of vaporization @ B. P. | 46.4 cal/g 83.5 Btu/lb |
| Melting point in sealed tube | 188.2 °C |
| Nonvolatile matter | Less than 0.15% |
| Purity | 98.0% min. |
| Specific gravity @ 20/4 °C | 2.091 |
| Specific heat @ 25 °C | 0.174 cal/g/°C or Btu/lb/°F |
| Vapor density (B. P., 760 mm) | 6.30 g/liter |
| Vapor pressure @ 30 °C | 2 mm |
| Water | 0.2% by wt, max. |

HEXACHLOROETHANE FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|------|----------------------|-----------------------|
| 34 | Aniline | 176.8 |
| 12 | Benzyl alcohol | 182.0 |
| 30 | p-Bromotoluene | 183.5 |
| 25 | Chloroacetic acid | 171.2 |
| 28 | o-Cresol | 181.3 |
| 43 | Diethyl oxalate | 178.6 |
| 20 | Diisobutyl carbonate | 184.0 |
| 55 | Dimethyl malonate | 176.0 |
| 49.5 | Ethyl acetoacetate | 172.5 |
| 37 | Isovaleric acid | 172.6 |
| 30 | Phenol | 173.7 |
| 15 | Trichloroacetic acid | 181.0 |

Table 3.37: n-Hexyl Chloride (7)



| | |
|----------------------------------|------------------|
| Boiling range | 133-135°C |
| Flash point | 95°F |
| Specific gravity @20/20°C | 0.877 |

Table 3.38: Methylene Chloride (53)

Product Description

Methylene chloride is a clear, colorless, heavy, nonflammable liquid with a pleasant ethereal odor. It is the least toxic of the chloromethanes and is not photochemically reactive. As one of the most powerful solvents in the chlorinated group, it has found a wide range of applications where superior solvency is important. Vulcan's methylene chloride is available in Technical, Aerosol, Degreasing, Special and Decaffeination grades. The Technical and Decaffeination grades meet the requirements of the American Chemical Society **Reagent Chemical Specifications**, 7th Edition, 1987, the **Food Chemicals Codex**, 3rd Edition, the **National Formulary XVI** and Military Specification MIL-D-6998D.

Physical Properties

| | |
|------------------------------------|---------------------------------|
| Formula | CH ₂ Cl ₂ |
| Molecular Weight | 84.94 |
| Boiling Point | 40.1°C; 104.2°F |
| Density | 10.98 lbs./gal. @ 25°C |
| Specific Gravity @ 25/25°C | 1.320 |
| Freezing Point | -96.7°C; -142.1°F |
| Viscosity @ 25°C | 0.430 cP |
| Flash Point | None |
| Latent Heat of Vaporization @ b.p. | 78.7 cal/g; 141.7 BTU/lb |
| Specific Heat, liquid @ 20°C | 0.276 cal/g°C |
| Solubility @ 25°C | |
| water in solvent | 0.170g/100g solvent |
| solvent in water | 1.32g/100g water |

Methylene Chloride
Water Content vs. Cloud Pt.

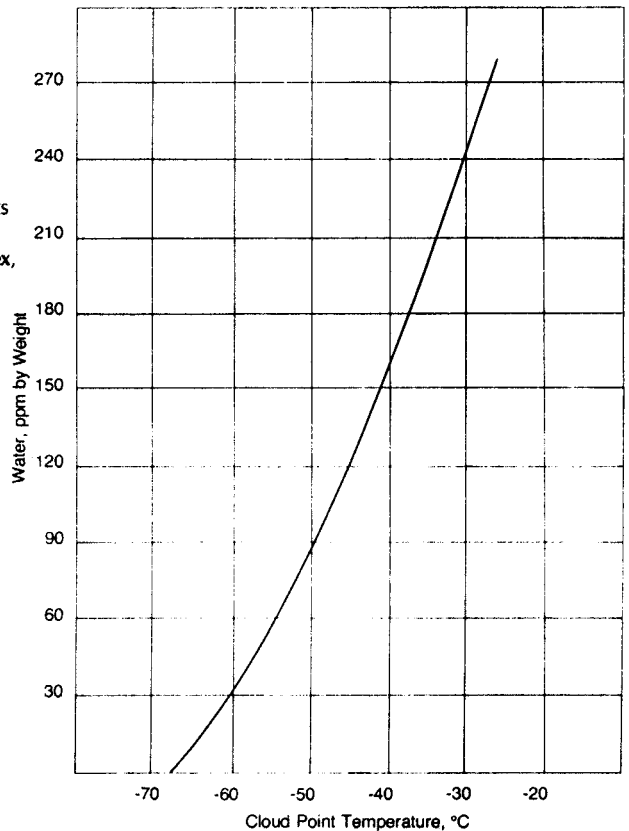


Table 3.39: Isopropyl Chloride (7)

| $\text{CH}_3\text{CHClCH}_3$ | |
|------------------------------|-------------------|
| Boiling point | 35.4°C |
| Freezing point | -117°C |
| Refractive index | 1.3811 |
| Solubility in water @12.5°C | 0.344 |
| Specific gravity @20/4°C | 0.8590 g/100 g |
| Viscosity @22.5°C | 0.2962 centipoise |
| Weight per gallon | 7.5 lb |

Table 3.40: Methyl Chloride (23)

| Monochloromethane | CH_3Cl |
|----------------------------------------------|------------------------|
| PHYSICAL PROPERTIES | |
| Molecular Weight | 50.49 |
| Boiling Point, 760 mm. Hg | -23.7°C. (-10.7°F.) |
| Freezing Point | -97.6°C. |
| Vapor Pressure, mm., Hg. at 0°C. | 1892 |
| psia at 0°C. | 36.6 |
| Flammable limits, (percent by volume in air) | 10.7-17.4 |
| Flash Point | -50°F calculated |
| Heat of Vaporization, | |
| cal./gm. at b.p. | 102.45 |
| Heat of Fusion, Cal./mole | 1537 |
| Heat of Combustion Kcal./mole | 164.2 |
| Specific Heat, cal./gm. °C. | |
| Liquid at 20°C. | 0.381 |
| Vapor at 25°C. and 1.021 atmos. | 0.199 |
| Critical Temperature | 143.1°C. (289.4°F.) |
| Critical Pressure, atmos. | 65.9 (968.7 psia.) |
| Critical Density, gm./cc. | 0.353 |
| Refractive Index, liquid at -23.7°C. | 1.3712 |
| Vapor at 25°C. | 1.000703 |
| Solubility, cc/100 cc. solvent at 20°C. | |
| Water | 303 |
| Benzene | 4723 |
| Carbon Tetrachloride | 3756 |
| Acetic Acid | 3679 |
| Ethyl Alcohol | 3740 |

(continued)


Table 3.40: (continued)

Thermodynamic Properties of Methyl Chloride (Ideal Gas State)


| T TEMP °K | C _p HEAT CAPACITY CAL / DEG / MOLE | H ^o _T - H ^o _{298.15} HEAT CONTENT CAL / MOLE | S ^o ENTROPY CAL / DEG / MOLE | F ^o - H ^o _{298.15} T FREE ENERGY FUNCTION CAL / DEG / MOLE | FORMATION FROM ELEMENTS | | |
|-----------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------------------------------|----------------------------------|
| | | | | | HEAT Δ H ^o _f CAL / MOLE | FREE ENERGY Δ F ^o _f CAL / MOLE | LOG ₁₀ K _p |
| 298 | 9.73 | | 55.80 | 55.80 | -20630 | -14952 | 10.960 |
| 300 | 9.76 | 18 | 55.86 | 55.80 | -20642 | -14918 | 10.868 |
| 400 | 11.50 | 1080 | 58.91 | 56.21 | -21283 | -12907 | 7.052 |
| 500 | 13.28 | 2332 | 61.70 | 57.04 | -21825 | -10750 | 4.699 |
| 600 | 14.64 | 3707 | 64.19 | 58.02 | -22313 | -8495 | 3.094 |
| 700 | 15.92 | 5236 | 66.55 | 59.07 | -22699 | -6144 | 1.918 |
| 800 | 17.03 | 6885 | 68.75 | 60.15 | -23012 | -3764 | 1.028 |
| 900 | 17.76 | 8400 | 70.30 | 60.97 | -23494 | -1111 | .269 |
| 1000 | 18.86 | 10480 | 71.75 | 61.27 | -23444 | 2086 | - .455 |
| 1100 | 19.60 | 12400 | 74.58 | 63.31 | -23586 | 3551 | - .705 |
| 1200 | 20.26 | 14400 | 76.32 | 64.32 | -23673 | 6027 | - 1.097 |
| 1300 | 20.82 | 16450 | 77.97 | 65.32 | -23747 | 8493 | - 1.427 |
| 1400 | 21.32 | 18560 | 79.52 | 66.27 | -23789 | 10987 | - 1.715 |
| 1500 | 21.75 | 20720 | 81.01 | 67.20 | -23803 | 13502 | - 1.967 |

*ACTUALLY IS 298.15° K

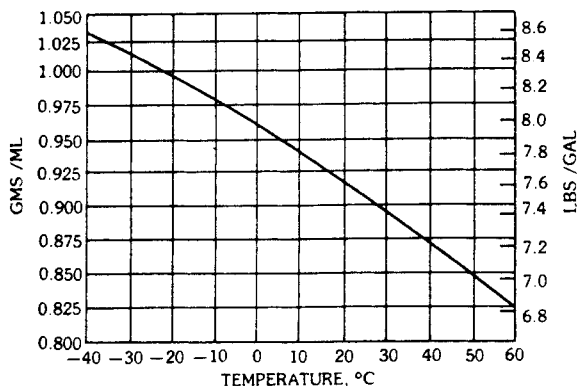
Density of Liquid Methyl Chloride



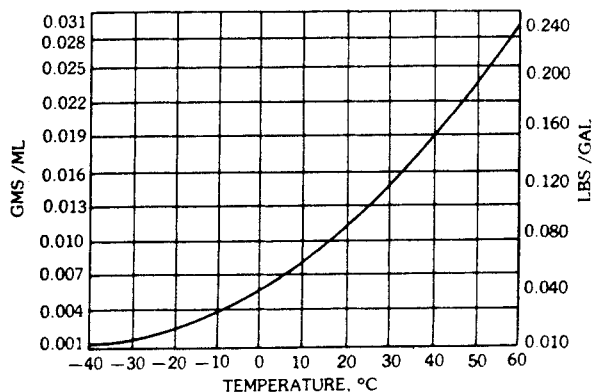
Density of Saturated Methyl Chloride Vapor



Vapor Pressure of Methyl Chloride

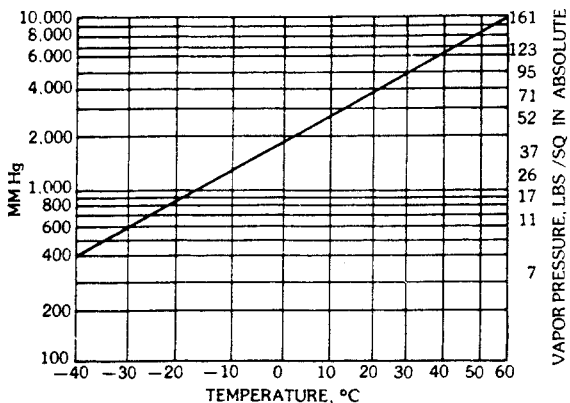

Viscosity of Liquid Methyl Chloride

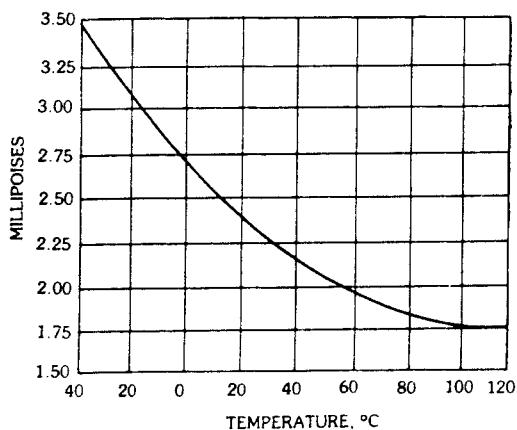


ref. D. B. Stull, Ind. Eng. Chem. 39, 517 (April, 1947)


(continued)

Table 3.40: (continued)

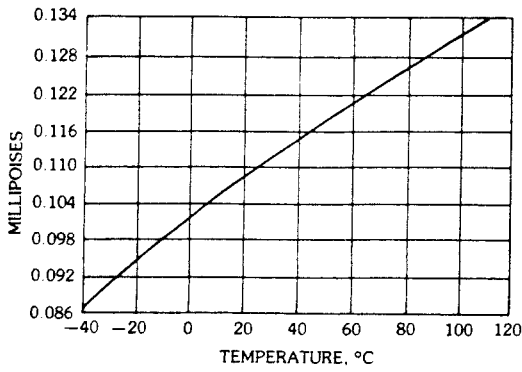
Viscosity of Methyl Chloride Vapor




Heat Capacity of Liquid Methyl Chloride

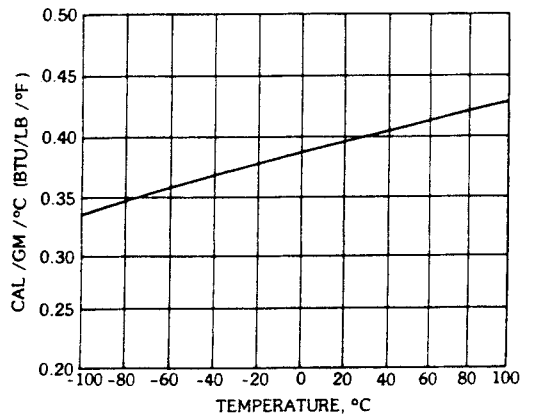


Heat Capacity of Methyl Chloride Vapor

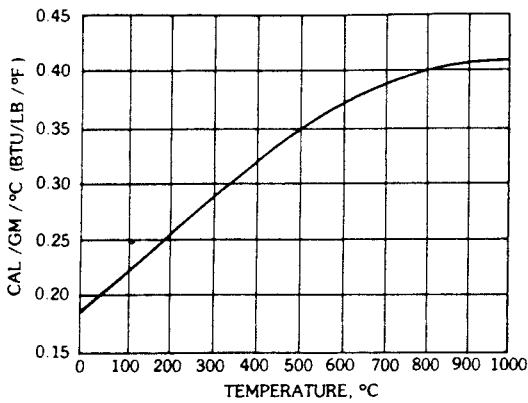

Heat of Vaporization of Methyl Chloride

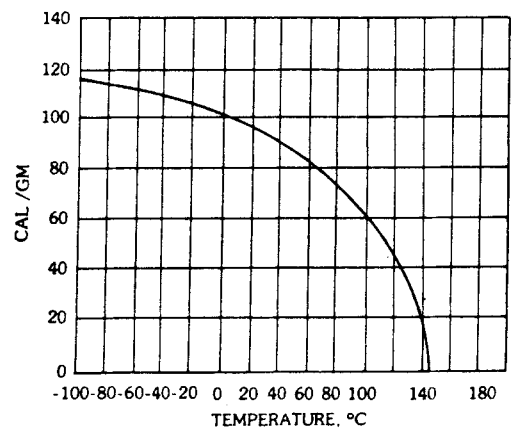

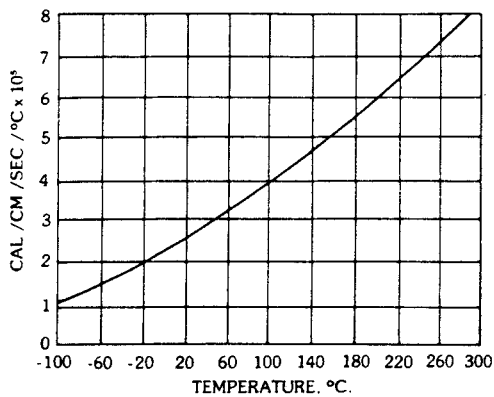Thermal Conductivity of Methyl Chloride Vapor



Surface Tension of Methyl Chloride


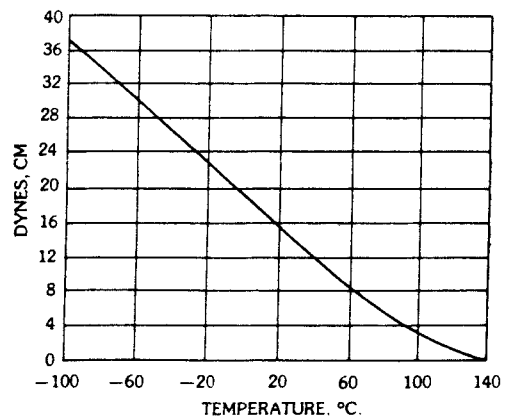


Table 3.41: Monochlorohydrin (7)

$\text{ClCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OH}$
PHYSICAL PROPERTIES

| | |
|------------------------|------------------------|
| Boiling point | 213°C |
| Boiling range | 213-228°C (decomposes) |
| Specific gravity @18°C | 1.326 |

Table 3.42: Pentachloroethane (7)



PHYSICAL PROPERTIES

PENTACHLOROETHANE FORMS AZEOTROPES WITH:

| Acidity as HCl | 0.001% by wt, max. | % | | B. P. °C of Azeotrope |
|----------------------------------------------------|---------------------------|------|-------------------------|-----------------------|
| Boiling point @760 mm | 161.9°C | | | |
| Coefficient of cubical expansion Av./°C, liquid | 0.0009097 | 3 | Acetamide | 160.5 |
| Color (Saybolt) | 18 max. | 26 | Butyric acid | 156.8 |
| Explosion limits | None | 97 | Camphene | 159.3 |
| Flash point | Nonflammable | 9.9 | Chloroacetic acid | 158.7 |
| Free halogen | None | 36 | Cyclohexanol | 157.9 |
| Freezing point | -22.0°C | 28 | Cyclohexanone | 165.4 |
| Latent heat of vaporization @B. P. | 43.6 cal/g 78.4 Btu/lb | 22.5 | 1,3-Dichloro-2-Propanol | 159.7 |
| Nonvolatile matter | 0.0007% by wt, max. | 32 | Dimethyl oxalate | 157.6 |
| Refractive index | 1.5035 | 65 | Ethyl lactate | 153.5 |
| Solubility in water @25°C | 0.05 g/100 g | 50 | 2-Furaldehyde | 155.2 |
| Solubility of water in solvent @20°C | 0.24 g water/100 g | 15 | Glycol | 154.5 |
| Specific gravity @20.4°C | 1.678 | 46 | Hexyl alcohol | 155.8 |
| Specific heat Liquid, 20°C | 0.215 cal/g/°C | 50 | Isoamyl propionate | 158.7 |
| Vapor density (B. P. and 760 mm) | 568 g/liter | 43 | Isobutyric acid | 152.9 |
| Vapor pressure @30°C | 6 mm | 9 | Isovaleric acid | 160.3 |
| Viscosity liquid @20°C | 2.45 centipoises | 56 | Mesitylene | 166.0 |
| Weight per gallon @20°C | 14.00 lb | 97 | Methylheptenone | 173.3 |
| | | 9.5 | Phenol | 160.9 |
| | | 89 | α -Pinene | 155.6 |

Table 3.43: Perchloroethylene (22)

PERCHLOR

TYPICAL PROPERTIES

Perchloroethylene is a clear, water-white liquid at ordinary temperatures. It is completely miscible with most organic liquids. The stabilized product, Perchlor, can be used with any of the common construction metals.

| | | |
|------------------------------------------------|---------------------------|-------|
| Chemical Names: Tetrachloroethylene: | Heat of Vaporization | |
| perchloroethylene | at 760 mm Hg. cal/g | 50.1 |
| Chemical Formula: CCl_2CCl_2 ; | Btu/lb | 90.2 |
| | Vapor Density at 121.1°C | |
| | and 760 mm Hg. g/l | 5.22 |
| | lb/ft ³ | 0.326 |
| | Specific Gravity of Vapor | |
| | (air = 1) | 5.83 |
| | Vapor Pressure at 20°C. | |
| | mm Hg | 14.2 |




Table 3.43: (continued)

TYPICAL PROPERTIES

| | | | |
|-----------------------------------------------------|--------|---------------------------------------------|--------------|
| Molecular Weight | 165.85 | Evaporation Rate at 77°F | |
| Boiling Point, °F | 250.0 | (25°C) (ether = 100) | 9 |
| °C | 121.1 | gal/(ft ² (day) | 0.15 |
| Freezing Point, °F | -8.2 | Flammability | Nonflammable |
| °C | -22.3 | Viscosity at 20°C, cps | 0.88 |
| Pounds per Gallon at 68°F (20°C) | 13.57 | Solubility at 25°C, | |
| Kilograms per Liter at 20°C | 1.63 | g Perchlor/100 g water | 0.015 |
| Refractive Index, n _D ²⁰ | 1.5053 | g water/100 g Perchlor | 0.0105 |
| Dielectric Constant at 1000 cps and 25°C | 2.365 | Azeotrope with Water, | |
| Specific Heat at 20°C cal/(g) (°C) or Btu/(lb) (°F) | 0.205 | Boiling Point, °F | 189.2 |
| Flash Point (Tag open cup) | None | °C | 87.7 |
| Fire Point (Tag open cup) | None | Azeotropic Water Content, wt % | 15.8 |
| | | Permissible Exposure Limit (8-hour TWA) ppm | 100 |

Specification and Typical Analysis, PPG Perchlor, All Grades:

| | Specification | Typical Analysis |
|-------------------------------|---------------------------------|-------------------------------------|
| Appearance | Clear, free of suspended matter | Clear, free of suspended matter |
| Color, APHA | 15 maximum | 8 |
| Odor | Characteristic; no residual | Characteristic; no residual |
| Spot Test | No spot or stain | No spot or stain |
| Specific Gravity, 20°C/20°C | 1.623 to 1.628 | 1.624 |
| Nonvolatile Residue, wt % | 0.0025 maximum | 0.0003 |
| Free Chlorine | None | None |
| Moisture | No cloud at 0°C | No cloud at -5°C |
| Distillation Range (100%), °C | 120.0 to 122.0 | 120.8 to 121.6 |
| °F | 248.0 to 251.6 | 249.4 to 250.9 |
| pH | — | Drycleaning, 6.8 Degreasing, 8.4 |

Perchloroethylene (53)

Water Content vs. Cloud Pt.

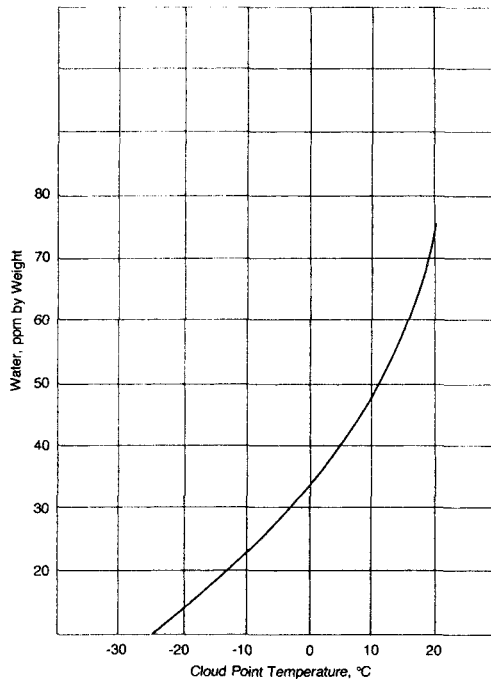


Table 3.44: Propylene Chlorohydrin (7)

Chloroisopropyl Alcohol



Propylene chlorohydrin is a colorless liquid with a milk odor; it is freely soluble in water. It is largely used in organic syntheses, for the purpose of introducing the hydroxypropyl group.

PHYSICAL PROPERTIES

| | |
|----------------------------------------------------------------------------|-----------------------------|
| Acidity as HCl | 0.02% by wt |
| Absolute viscosity @20°C | 4.7 centipoises |
| Apparent specific gravity @20/20°C | 1.1128 |
| Boiling point @760 mm Hg | 127.4°C |
| @ 50 mm Hg | 59°C |
| @ 10 mm Hg | 31°C |
| Coefficient of expansion @55°C | 0.00097 |
| Constant-boiling mixture @760 mm: Chlorohydrin approx. 46% Water 54% | B. P. 95.4°C |
| Flash point (Cleveland O. C.) | 125°F |
| Molecular weight | 94.54 |
| Solubility in water | Miscible in all proportions |
| Vapor pressure @20°C | 4.9 mm Hg |
| Weight per gallon @20°C | 9.29 lb |

Table 3.45: Propylene Dichloride (7)

1,2-Dichloropropane



Propylene Chloride

PHYSICAL PROPERTIES

| | |
|-----------------------------------------|-------------------------------------------------------------|
| Acidity as HCl | 0.005% max. |
| Boiling point | 95.9°C |
| Boiling range @760 mm | 93-99°C |
| Coefficient of expansion per °C | 0.001108-20°C 0.001153-55°C |
| Dielectric constant, 85.8 kilocycles | 8.925 recip. ohms @26° |
| Explosive limits in air | Lower = 3.14% by vol. @25°C Upper = 14.5% by vol. @100°C |
| Flash point (ASTM O. C.) | 21°C |
| Free halogen | None |
| Freezing point | -70°C |
| Ignition temperature in air | 557°C |
| Latent heat of vaporization @ B. P. | 72.2 cal/g |
| Nonvolatile matter | 0.005 g/100 cc, max. |
| Refractive index | 1.4418 |
| Solubility in water @20°C | 0.26% by wt |
| Solubility of water in solvent @20°C | 0.07% by wt |
| Specific gravity @20/20°C | 1.157-1.163 |
| Specific heat Liquid, 20°C | 0.31 cal/g/°C or Btu/lb/°F |
| Surface tension @25°C | 31.4 dynes/cm |
| Vapor density (B. P., 760 mm) | 3.72 g/liter |
| Vapor pressure @20°C | 35.8 mm |
| Viscosity @20°C | 0.00865 poise |
| Weight per gallon @20°C | 9.65 lb |

Table 3.46: 1,1,2,2-Tetrachloroethane (7)


| | |
|----------------------------------------------------|-------------------------------|
| Acetylene Tetrachloride Bonoform | $\text{CHCl}_2\text{-CHCl}_2$ |
| Acidity as HCl | 0.0027% by wt, max. |
| Boiling point | 146.5°C |
| Coefficient of cubical expansion Av./°C, liquid | 0.000998 (15-99°C) |
| Fire point | Nonflammable |
| Flash point | Nonflammable |
| Free halogen | None |
| Freezing point | -43°C |
| Heat of vaporization @B.P. | 55.1 cal/g |
| Refractive index | 1.4942 |
| Residue on evaporation | 0.00062% by wt |
| Solubility in water @25°C | 0.32% by wt |
| Solubility of water in solvent @20°C | 0.03% by wt |
| Vapor pressure @30°C | 9 mm |
| Viscosity liquid @20°C | 1.7 centipoises |
| Water: no cloud @-10°C | 0.032% by wt |
| Weight per gallon @25°C | 13.25 lb |

1, 1, 2, 2-TETRACHLOROETHANE FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|-----|-----------------------|-----------------------|
| 45 | Butyl propionate | 152.5 |
| 3.8 | Butyric acid | 145.7 |
| 1.8 | Chloroacetic acid | 146.3 |
| 55 | Cyclohexanone | 159.1 |
| 74 | 2-Ethoxyethyl acetate | 158.2 |
| 27 | Ethyl chloroacetate | 147.5 |
| 39 | Ethyl orthoformate | 151.5 |
| 97 | 2-Furaldehyde | 161.6 |
| 9 | Glycol | 145.1 |
| 32 | Isoamyl acetate | 150.1 |
| 98 | Isoamyl alcohol | 131.3 |
| 37 | Isobutyl isobutyrate | 144.9 |
| 7 | Isobutyric acid | 144.8 |
| 15 | Mesityl oxide | 147.5 |
| 52 | Methyl lactate | 143.3 |
| 60 | Propionic acid | 140.4 |
| 34 | Propyl butyrate | 150.2 |
| 45 | Styrene | 143.5 |

Table 3.47: Tetrachloroethylene (27)

Perchloroethylene
Tetrachloroethene



PHYSICAL PROPERTIES


| | |
|----------------------------------------------------|------------------------------|
| Acidity as HCl | 0.001% by wt, max. |
| Boiling point | 121.0°C |
| Boiling range @ 760 mm | 120-122°C |
| Coefficient of cubical expansion Av./°C, liquid | 0.001079 (15-90°C) |
| Color (Saybolt) | 22 |
| Dielectric constant, 1000 cycle | 2.20 |
| Dielectric strength, 0.1" gap | 30,000 volts |
| Explosive limits | None |
| Fire point | Nonflammable |
| Flash point | Nonflammable |
| Freezing point | -22.4°C |
| Latent heat of vaporization @ B. P. | 50.1 cal/g |
| Nonvolatile matter | 0.0007% by wt, max. |
| Power factor, 1000 cycle | 0.02% |
| Refractive index | 1.5055 |
| Residue on evaporation | 0.0106% by wt, max. |
| Solubility in water @ 25°C | 0.04% by wt |
| Solubility of water in solvent @ 20°C | 0.02% by wt |
| Specific gravity @ 25/25°C | 1.618 |
| Specific heat | 0.21 cal/g/°C |
| Specific resistivity | 1.8×10^{13} ohms/cm |
| Vapor pressure @ 30°C | 28 mm |
| Viscosity @ 20°C | 0.90 centipoise |
| Water content | 0.008% by wt |
| Weight per gallon @ 25°C | 13.46 lb |

TETRACHLOROETHYLENE FORMS AZEOTROPES WITH:


| % | | B. P. °C of Azeotrope |
|------|-------------------------|-----------------------|
| 2.6 | Acetamide | 120.5 |
| 38.5 | Acetic acid | 107.4 |
| 46 | Allyl alcohol | 93.4 |
| 52 | 1-Bromo-3-Methylbutane | 119.3 |
| 29 | Butanol | 109.0 |
| 24.3 | 2-Chloroethanol | 110.0 |
| 26 | Diethyl carbonate | 118.6 |
| 51.5 | Epichlorohydrin | 110.1 |
| 63 | Ethanol | 76.8 |
| 43 | Ethyl butyrate | 119.5 |
| 6 | Glycol | 119.1 |
| 20 | Isoamyl alcohol | 116.1 |
| 35 | Isoamyl formate | 117.9 |
| 40 | Isobutanol | 103.1 |
| 70 | Isopropanol | 81.7 |
| 3 | Isobutyric acid | 120.5 |
| 53 | Isobutyl acetate | 115.5 |
| 35 | Isobutyl ether | 119.5 |
| 55 | Isopropyl isobutyrate | 119.0 |
| 24.5 | 2-Methoxyethanol | 109.7 |
| 42 | Isobutyl nitrate | 117.0 |
| 52 | 4-Methyl-2-Pentanone | 113.9 |
| 32 | Paraldehyde | 118.8 |
| 48 | Propanol | 94.1 |
| 8.5 | Propionic acid | 119.2 |
| 19.5 | Pyrrrol | 113.4 |
| 43 | 1, 1, 2-Trichloroethane | 112.0 |
| 52 | Triethyl borate | 117.5 |

(continued)

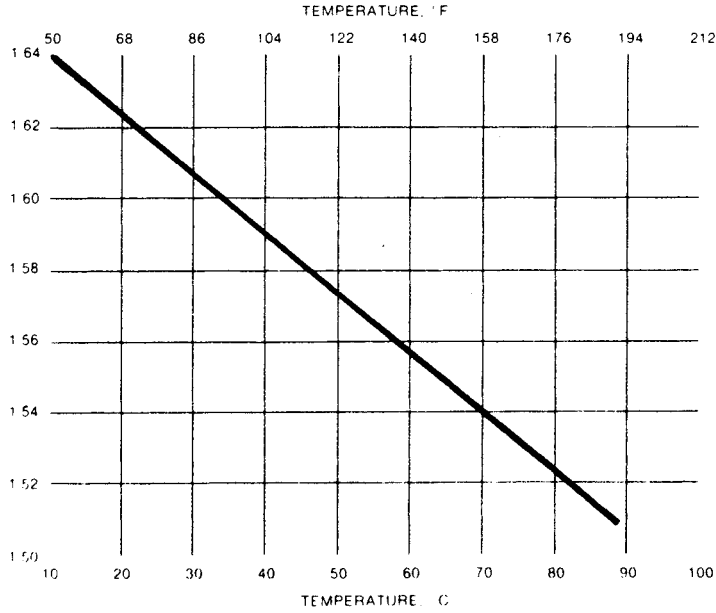Table 3.47: (continued)



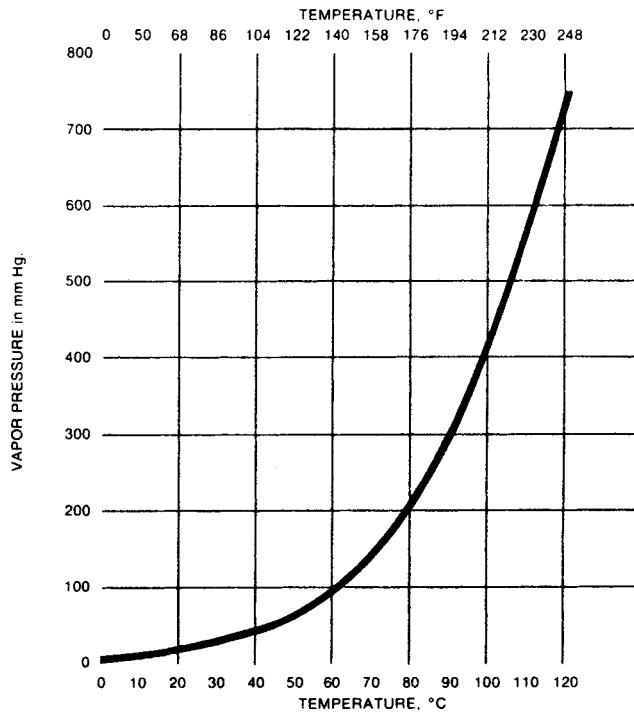Specific Gravity vs Temperature of Hooker Perchloroethylene



Vapor Pressure vs Temperature of Hooker Perchloroethylene

Table 3.48: Trichlorobenzenes (7)




| | 1, 2, 3- TRICHLOROBENZENE | 1, 2, 4- TRICHLOROBENZENE | 1, 3, 5- TRICHLOROBENZENE |
|----------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| |  |  |  |
| Synonym: | vic-Trichlorobenzene | una-Trichlorobenzene | sym-Trichlorobenzene |
| Physical state | White crystals | Colorless liquid | White crystals |
| Boiling point: @ 760 mm | 221°C (429.8°F) | 213°C (415.4°F) | 208.5°C (407.3°F) |
| Density: 25/25°C | 1.69 (solid) | 1.451 (liquid) | |
| Flash point: (Tag C. C.) | 113°C (235.4°F) | 110°C (230.0°F) | 107°C (224.6°F) |
| Index ^(D) of Refraction: | 1.5776 | 1.5732 | 1.5662 |

Table 3.49: 1,1,1-Trichloroethane (53)

TLV-TWA Values

| SOLVENT | TLV-TWA* (ppm in air) |
|--------------------------------------|--------------------------|
| Solvent 111® (1,1,1-trichloroethane) | 350 |
| Trichloroethylene | 50 |
| Perchloroethylene | 50 |
| Methylene Chloride | 100 |
| Chloroform | 10 |
| 1,1,2-trichloroethane | 10 |
| Stoddard Solvent | 100 |
| Toluene | 100 |
| Xylene | 100 |
| Turpentine | 100 |
| Methyl Alcohol (Methanol) | 200 |
| Benzene | 10 |

*1985-86 values

(continued)

Table 3.49: (continued)

Specifications for SOLVENT 111

| General Purpose Grade | |
|----------------------------------------------|-----------------------------------|
| COMPONENT | SPECIFICATIONS |
| Appearance | Clear, free from suspended matter |
| Color, APHA | 15 max. |
| Specific Gravity @ 25/25°C. | 1.318 - 1.324 |
| Distillation Range, °C. 760 mm. IBP to DP | 72 - 88 |
| Free Halogens | None |
| Acidity, as HCl | 0.001% by wt. max. |
| Nonvolatile Matter | 0.001% by wt. max. |
| Water | 0.0100% by wt. max. |
| Purity: | |
| 1,1,1-trichloroethane content | 96.0% by wt. min. |
| 1,1,1-trichloroethane content | 95.0% by vol. min. |
| Individual halogenated impurities | 0.5% by wt. max. |
| Total halogenated impurities | 1.0% by wt. max. |
| Acid Acceptance, as NaOH (ASTM D-2942) | 0.20% by wt. min. |
| Aluminum Corrosion Test | Passes O-T-620c |
| Metals Corrosion Test | Passes MIL-T-81533A |
| Stability (accelerated oxidation test) | Passes MIL-T-81533A |

Solvent 111[®], General Purpose Grade meets requirements of Federal Specification O-T-620c (1,1,1-trichloroethane, technical) and Military Specification MIL-T-81533A (1,1,1-trichloroethane, vapor degreasing.)

| Aerosol Grade | |
|----------------------------------------------|-----------------------------------|
| COMPONENT | SPECIFICATIONS |
| Appearance | Clear, free from suspended matter |
| Color, APHA | 15 max. |
| Specific Gravity @ 25/25°C. | 1.295 - 1.303 |
| Distillation Range, °C. 760 mm. IBP to DP | 68 - 78 |
| Free Halogens | None |
| Acidity, HCl | 0.001% by wt. max. |
| Nonvolatile Matter | 0.001% by wt. max. |
| Water | 0.0100% by wt. max. |
| Purity: | |
| 1,1,1-trichloroethane content | 95.0% by wt. min. |
| 1,1,1-trichloroethane content | 95.0% by vol. min. |
| Individual halogenated impurities | 0.5% by wt. max. |
| Total halogenated impurities | 1.0% by wt. max. |
| Acid Acceptance as NaOH | 0.20% by wt. min. |

(continued)

Table 3.49: (continued)

Physical Properties of SOLVENT 111


| | | |
|-----------------------------------------------------------------------|---------|----------------------------------|
| Chemical Formula | | CCl ₃ CH ₃ |
| Molecular Weight | | 133.4 |
| Freezing Point, °C | | -37.9 |
| Boiling Point at 1 atm, °C | | 74.1 |
| Heat of Vaporization at Boiling Point, cal/g | | 54.4* |
| Btu/lb | | 98* |
| Specific Heat, Liquid at 20°C, cal/g/°C (Btu/lb/°F) | | 0.25* |
| Critical Temperature, °C | | 272.5* |
| Critical Pressure, atm | | 39.8* |
| Thermal conductivity, Liquid at 20°C, Btu/hr/ft ² /°F/ft | | 0.080 |
| Specific Gravity of Liquid, 25/25°C | | 1.319 |
| Liquid Density, pounds per gallon at 25°C | | 10.97 |
| Average Coefficient of Cubical Expansion, Liquid, per °C, (0 to 40°C) | | 0.00116 |
| Specific Gravity of Vapor at 1 atm at bp (air = 1) | | 4.6 |
| Viscosity, Liquid at 20°C, cP | | 0.86 |
| Surface Tension at 25°C, Dynes/cm | | 25.5 |
| Solubility at 25°C, | | |
| g Solvent 111® in 100 g water | | 0.07 |
| g Water in 100 g Solvent 111® | | 0.04 |
| Refractive Index n _D , Liquid at 20°C | | 1.4374* |
| Liquid at 25°C | | 1.435 |
| Dielectric Strength, Liquid at 25°C, kV, (ASTM D 877) | | 25 |
| Dielectric Constant, Liquid, 100 kHz, at 25°C (ASTM D 924) | | 7.0 |
| Vapor Pressure | | 5 |
| Density of Liquid | | 6 |
| Flash Point (ASTM D 1310) | | None |
| Explosion Point (ASTM D 1310) | | None |
| Autoignition Temperature, °C | | 458 |
| Flammable Range, % v in Air at 25°C | | 7.5 - 15.0 |
| Evaporation Rate (Ether = 100) | | 35 |
| Binary Azeotropes: | | |
| Component | % by wt | Boiling Point |
| Water | 4.3 | 65.0°C (149°F) |
| Methanol | 23.0 | 55.5°C (132°F) |
| Ethanol | 17.4 | 64.4°C (148°F) |
| Isopropanol | 18.2 | 68.7°C (155.6°F) |
| n-Propanol | 7.1 | 72.3°C (162°F) |
| Hexane | 28.9 | 60.0°C (140°F) |

*Values for unstabilized 1,1,1-trichloroethane


(continued)

Table 3.49: (continued)

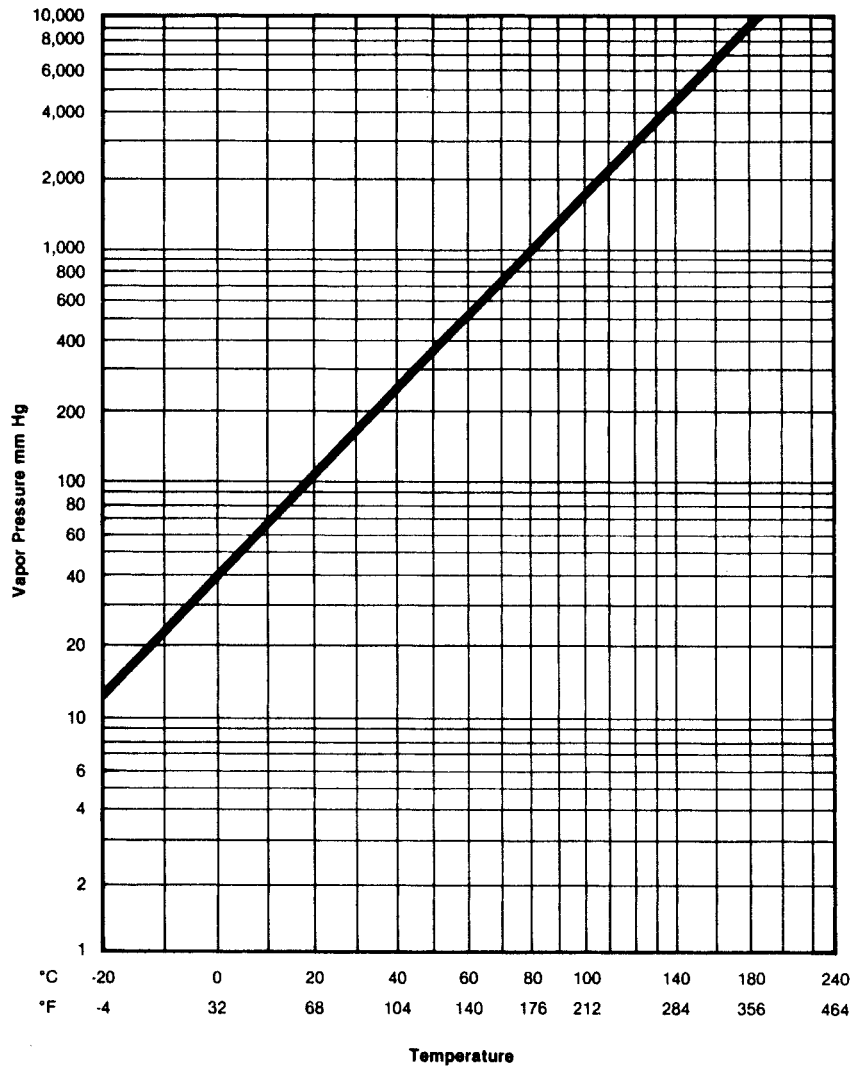Vapor Pressure of SOLVENT 111



Density of SOLVENT 111

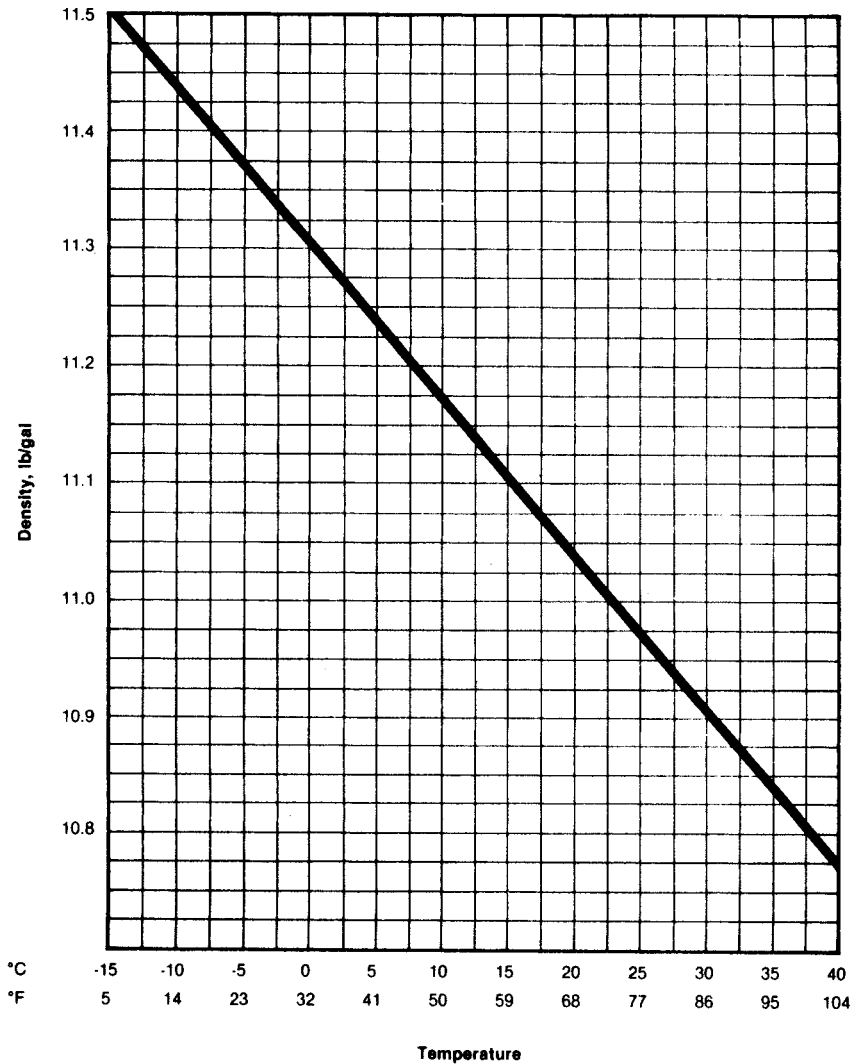


(continued)


Table 3.49: (continued)

Properties of Mixtures of SOLVENT 111 and Oil

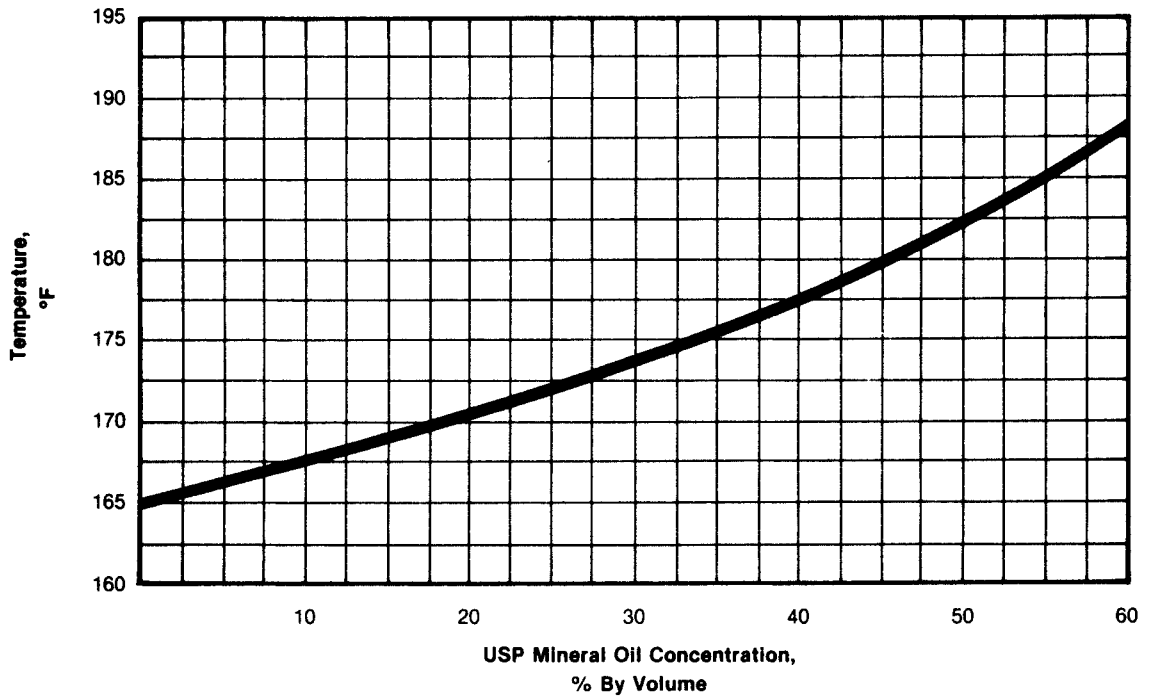Boiling Temperature



Specific Gravity

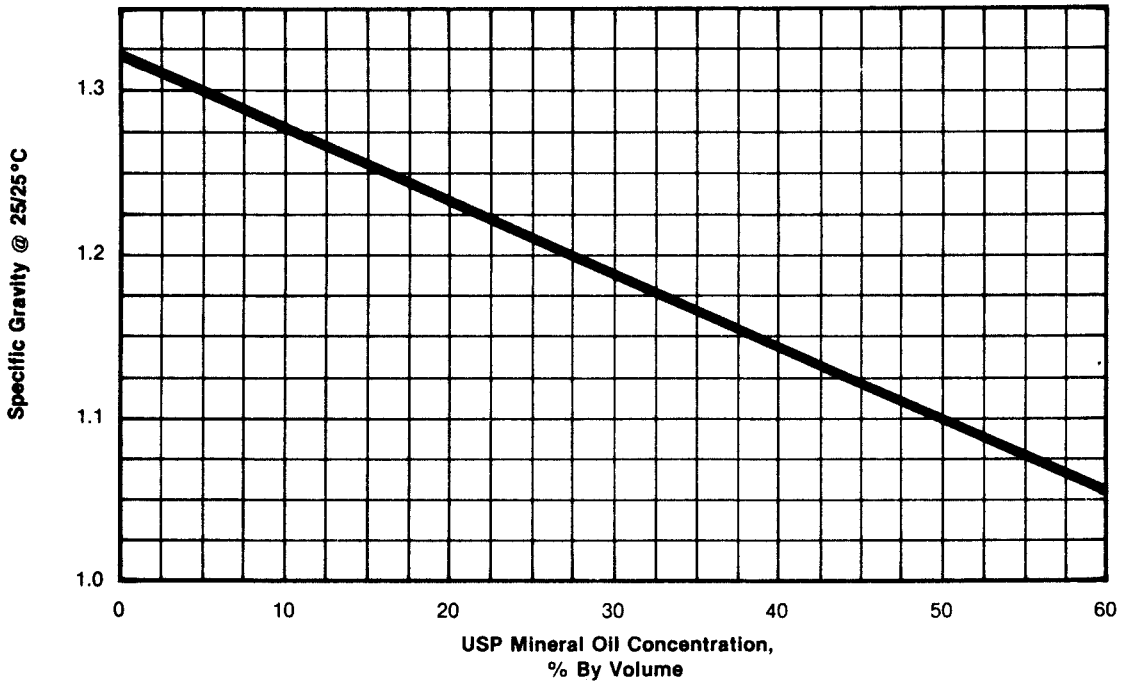

(continued)

Table 3.49: (continued)


Comparative Physical Properties—Chlorinated Solvents

| Properties | Solvent 111® | Trichloro- ethylene | Perchloro- ethylene | Methylene Chloride |
|-------------------------------------------------------------------------------------------|--------------|------------------------|------------------------|-----------------------|
| Boiling Point (760mm Hg), °F (°C) | 165 (74) | 188 (86.7) | 250 (121) | 104 (39.8) |
| Freezing Point, °F (°C) | -36(-38) | -122(-85.5) | -9(-22) | -142(-97) |
| Liquid Specific Gravity, 25/25°C | 1.319 | 1.456 | 1.620 | 1.320 |
| Specific Heat of Liquid at 20°C, (cal/g/°C) or (Btu/lb/°F) | 0.25 | 0.23 | 0.21 | 0.28 |
| Heat of Vaporization, cal/g Btu/lb | 54.4 98.0 | 57.2 103 | 50.8 91.4 | 78.7 141.7 |
| Refractive Index at 25°C | 1.435 | 1.473 | 1.503 | 1.424 |
| Viscosity at 20°C, cP | 0.86 | 0.58 | 0.88 | 0.42 |
| Density at 25°C, (lbs./gal) | 10.97 | 12.10 | 13.47 | 10.98 |
| Flash Point | None | None | None | None |
| Fire Point | None | None | None | None |
| Vapor Density at bp, lb/ft ³ | 0.279 | 0.278 | 0.326 | 0.206 |
| Vapor Specific Gravity (air=1.0) | 4.55 | 4.54 | 5.73 | 2.93 |
| Kauri-butanol value (ASTM D 1133) | 124 | 129 | 90 | 135 |
| Evaporation Rate, Ether=100 Carbon Tetra- chloride=100 | 35 100 | 28 84 | 9 39 | 71 147 |
| Energy required to convert 1 lb. liquid at 70°F to vapor at bp and 1 atm, (Btu) | 127 | 124 | 125 | 151 |
| Energy required to convert 1 gal. liquid at 70°F to vapor at bp and 1 atm, (Btu) | 1410 | 1500 | 1690 | 1660 |

Table 3.50: 1,1,2-Trichloroethane (7)

beta-Trichloroethane

Vinyl Trichloride



Ethylene Trichloride

PHYSICAL PROPERTIES

| | | | |
|-----------------------------------------|-----------------------|-------------------------------|---------------------------|
| Acidity as HCl | 0.0001% by wt. max. | Specific gravity @20/4°C | 1.441 |
| Boiling point @760 mm | 113.5°C | Specific heat Liquid, 20°C | 0.266 cal/g/°C |
| Boiling range @760 mm | 111.8-113.3°C (5-95%) | Specific resistivity | 5.2×10^8 ohms/cm |
| Fire point | Nonflammable | Vapor density (B. P., 760 mm) | 4.21 g/liter |
| Flash point | Nonflammable | Vapor pressure @30°C | 36 mm |
| Free halogen | None | @90°C (194°F) | 369 mm |
| Freezing point | -36.7°C | @100°C (212°F) | 505 mm |
| Latent heat of evaporation @B. P. | 68.7 cal/g | @110°C (230°F) | 680 mm |
| Nonvolatile matter | None | @114°C (237°F) | 764 mm |
| Refractive index | 1.4711 | Water | 0.007% by wt. max. |
| Solubility in water @25°C | 0.48 g/100 g | Weight per gallon @20°C | 12.04 lb |
| Solubility of water in solvent @20°C | 0.03 g water/100 g | | |

Table 3.51: Trichloroethylene (7)(27)

1,2,2-Trichloroethylene


PHYSICAL PROPERTIES

| | |
|-----------------------------------------|--------------------------------------------|
| Acidity as HCl | Not more than 0.001% |
| Boiling point | 86.7°C |
| Boiling range @760 mm | 95% or better distills from 86.0-87.5°C |
| Coefficient of expansion per °C | 0.00115-20°C |
| Color (Saybolt) | 24 max. |
| Dielectric constant, 1000 cycle | 3.27 |
| Fire point | Nonflammable |
| Flash point (ASTM O. C.) | None @B. P. |
| Free chlorine | None |
| Freezing point | -86.4°C |
| Latent heat of vaporization @B. P. | 57.3 cal/g |
| Nonvolatile matter | 0.00067% by wt. max. |
| Power factor, 1000 cycle | 2.2% |
| Refractive index @27°C | 1.4735 |
| Solubility in water @25°C | 0.10% by wt |
| Solubility of water in solvent @25°C | 0.02% by wt |
| Specific gravity @20/20°C | 1.4655 |
| Surface tension @25°C | 32.0 dynes/cm |
| Vapor pressure @-20°C | 4.5 mm |
| @-9°C | 9.0 mm |
| @0°C | 17.4 mm |
| @20°C | 56.0 mm |
| @40°C | 145 mm |
| @50°C | 230 mm |
| @65°C | 385 mm |
| @77°C | 562 mm |
| Viscosity @25°C | 0.00550 poise |
| Water content | 0.002% by wt |
| Weight per gallon @20°C | 12.20 lb |

(continued)

Table 3.51: (continued)

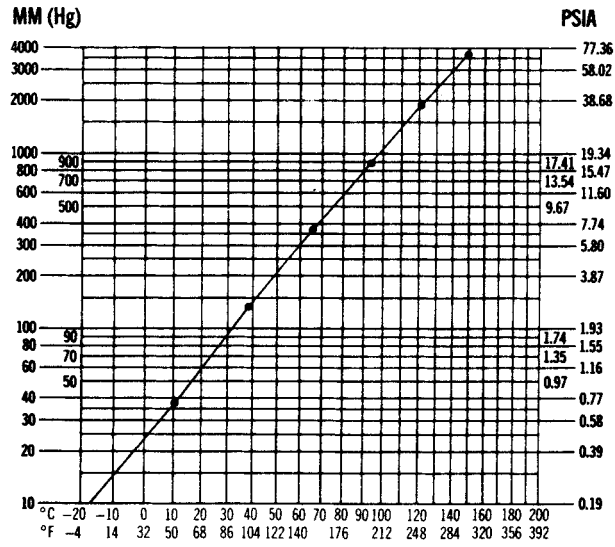Trichloroethylene—Vapor Pressure/Temperature Variation



Typical Boiling Point Curve of Trichloroethylene—Mineral Oil Mixture


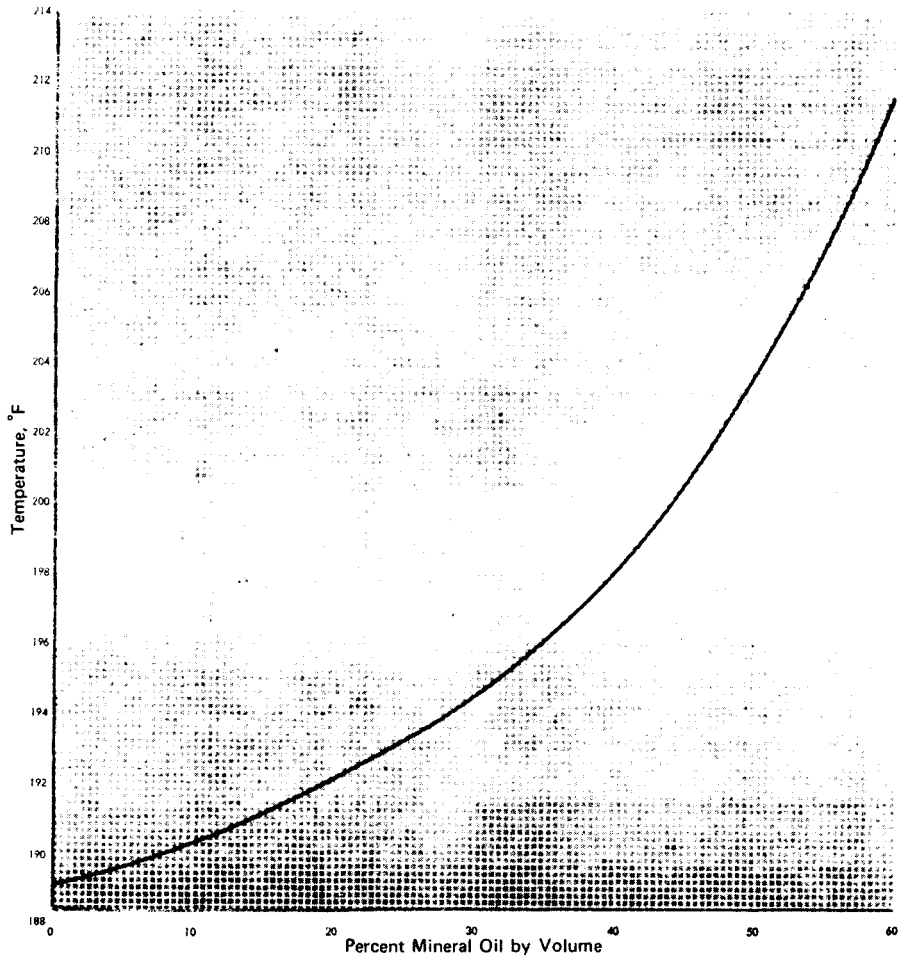


Table 3.51: (continued)



TRICHLOROETHYLENE FORMS AZEOTROPES WITH:

| % | | B. P. °C of Azeotrope |
|-----|--------------------|-----------------------|
| 3.8 | Acetic acid | 87.0 |
| 16 | Allyl alcohol | 81.0 |
| 7.5 | tert-Amyl alcohol | 86.7 |
| 2.5 | Butanol | 86.9 |
| 33 | tert-Butanol | 75.8 |
| 12 | 1,2-Dichloroethane | 82.9 |
| 46. | Diethoxymethane | 89.29 |
| 8 | Isobutanol | 85.4 |
| 30 | Isopropanol | 75.5 |
| 17 | Propanol | 81.8 |
| 80 | Propyl formate | 79.5 |
| 27 | Ethanol | 70.9 |

Trichloroethylene (53)

Water Content vs. Cloud Pt.

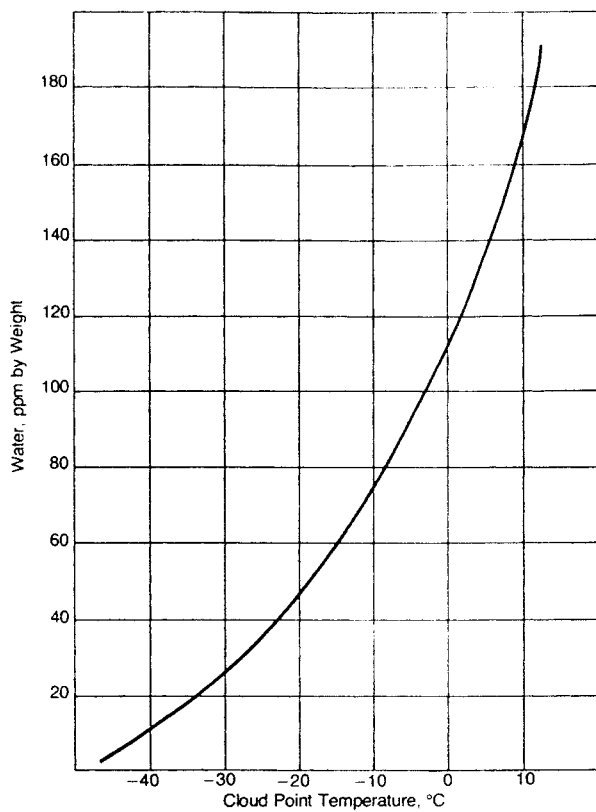


Table 3.52: Density of Chlorinated Solvents (53)

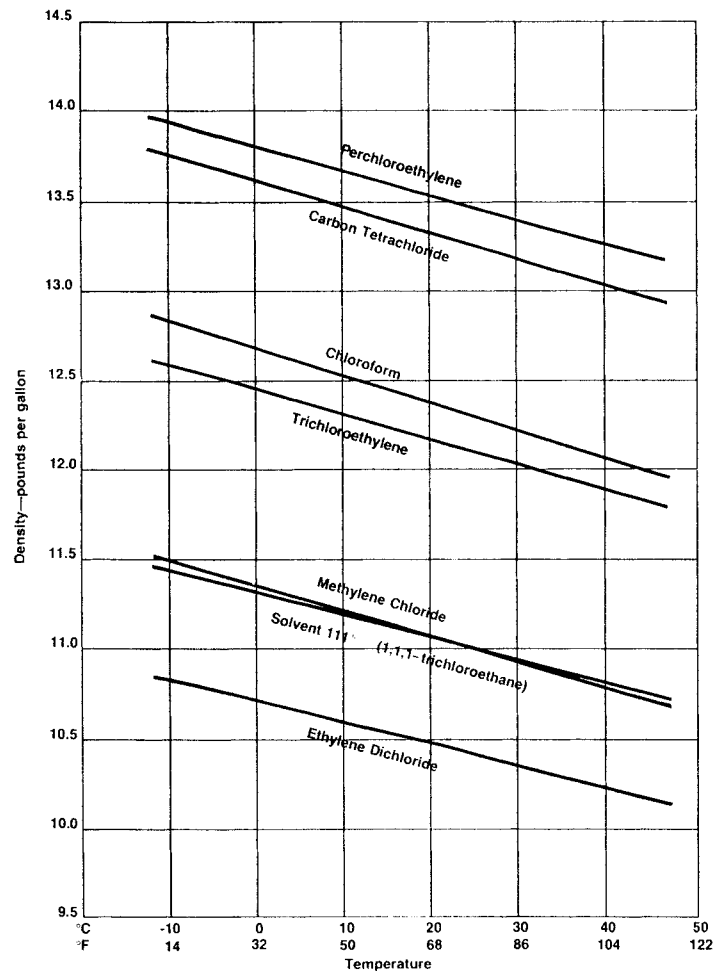


Table 3.53: Vapor Pressure of Chlorinated Solvents (53)

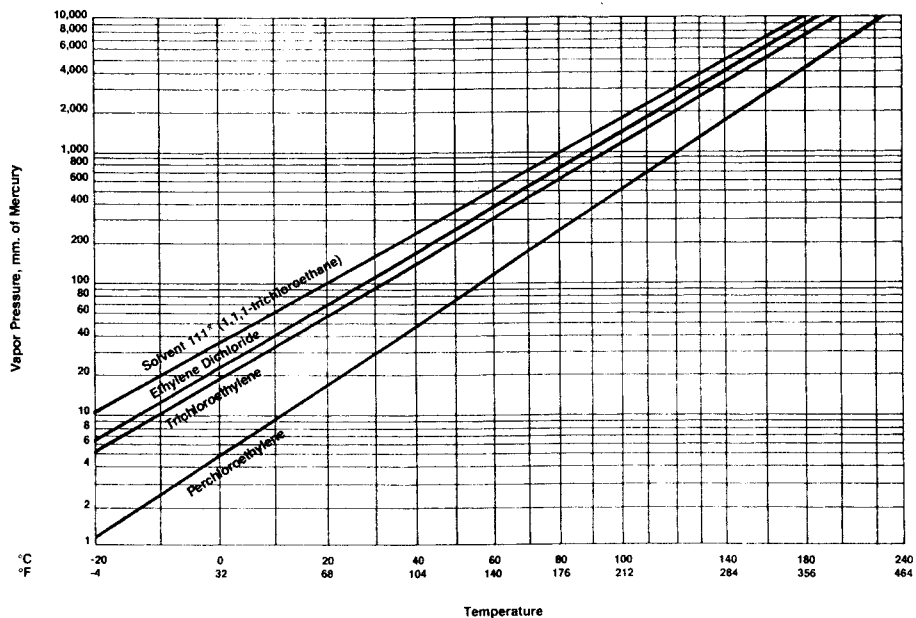
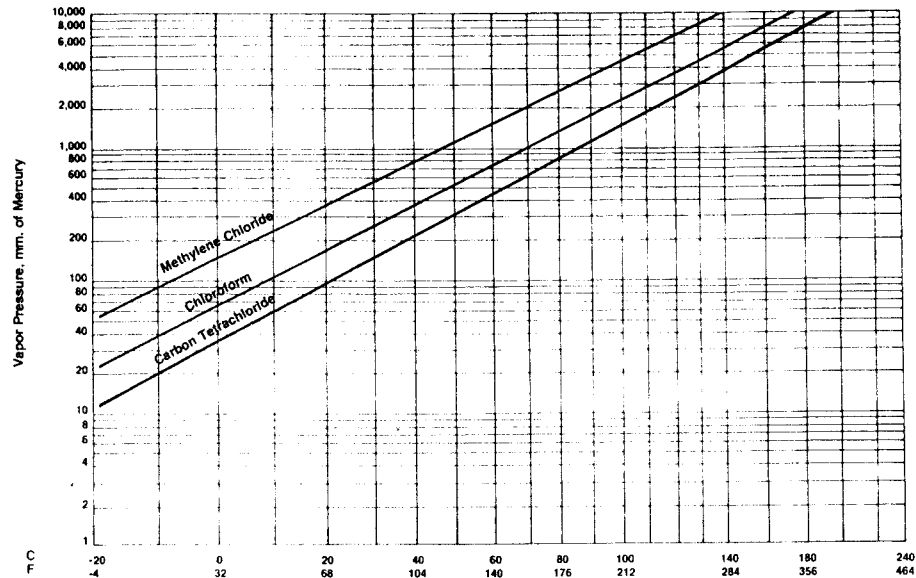



Table 3.54: Trichloropropane (7)**PHYSICAL PROPERTIES**

| | |
|---------------------------|---------|
| Analysis, % W | |
| Trichloropropane | 97.0 |
| Epichlorohydrin | 1.5 |
| Glycerol dichlorohydrin | 1.5 |
| Color, Pt-Co | 15 |
| Distillation range, IBP | 150°C |
| 90% | 156.1°C |
| 95% | 156.1°C |
| DP | 156.6°C |
| Flash point | 165°F |
| Molecular weight | 147.44 |
| Refractive index | 1.4832 |
| Specific gravity @20/20°C | 1.385 |

1, 2, 3-TRICHLOROPROPANE FORMS AZEOTROPES WITH

| % | | B. P. °C of Azeotrope |
|----|---------------------|-----------------------|
| 35 | Camphene | 152.9 |
| 30 | 2, 7-Dimethyloctane | 155.5 |
| 15 | α -Pinene | 150.0 |

Table 3.55: Triglycol Dichloride (7)**PHYSICAL PROPERTIES**

| | |
|--------------------------------------|-------------------------------------------------------------------------------------------|
| Acidity as HCl | 0.01% by wt, max. |
| Boiling point @760 mm | 241.3°C |
| Boiling range @760 mm | Not more than 5% dis- tills below 235°C Not less than 95% dis- tills below 242°C |
| Color (Pt-Co scale) | 25 max. |
| Dryness @20°C | Miscible with 19 vol. 60°Be gasoline |
| Flash point (O. C.) | 250°F |
| Solubility in water @20°C | 1.89% by wt |
| Solubility of water in solvent @20°C | 0.83% by wt |
| Specific gravity @20/20°C | 1.1950-1.2000 |
| Vapor pressure @20°C | 0.06 mm |
| Weight per gallon @20°C | 9.97 lb |

Table 3.56: Vinyl Chloride (7)

Monochloroethylene



PHYSICAL PROPERTIES

| | |
|---------------------------|-----------------------------------------------------------------------------------|
| Acetaldehyde | Not more than 0.5% by wt |
| Boiling point @760 mm | -13.9°C |
| Boiling range @760 mm | Not less than 95% distills over before the temperature of the liquid reaches 10°C |
| Color | Water-white |
| Freezing point | -159.7°C |
| Heat of evaporation | 81.6 cal/g |
| Residue | Not more than 0.5% by vol. |
| Specific gravity @ B. P. | 0.97 |
| Specific heat | 0.27 cal/g/°C |
| Solubility in water @25°C | Slightly soluble |
| Weight per gallon @20°C | 7.59 lb |

Table 3.57: Vinylidene Chloride (23)

| | |
|-------------------------------------------------------------|-----------------|
| Molecular Weight (theoretical) | 96.95 |
| Odor | Pleasant, Sweet |
| Appearance | Clear liquid |
| Color | 10-15 APHA |
| Solubility of monomer in H ₂ O at 25°C, weight % | 0.021 |
| Solubility of H ₂ O in monomer at 25°C, weight % | 0.035 |
| Boiling Point (760 mm Hg), °C | + 31.56 |
| Freezing Point, °C | -122.5 |

Vapor Pressure

$$\log P_{\text{mm}} = 6.98200 - 1104.29/(t + 237.697)$$

Temperatures calculated at selected pressure

Pressure (mm Hg)

760
400
200
100
60
40
20
10
5
1

(continued)

Table 3.57: (continued)

| | | |
|-------------------------------------------|---------------------|--------------------|
| | Liquid density | |
| | Temperature (°C) | |
| | -20 | |
| | 0 | |
| | +20 | |
| | Pounds/gallon | |
| | Temperature (°C) | |
| | -20 | |
| | 0 | |
| | 20 | |
| | Index of Refraction | |
| | Temperature (°C) | |
| | 10 | 1.43062 |
| | 15 | 1.42777 |
| | 20 | 1.42468 |
| | Absolute Viscosity | |
| | Temperature (°C) | Viscosity (cgs) |
| | -20 | 0.4478 |
| | 0 | 0.3939 |
| | +20 | 0.3302 |
| Flash Point (Tag closed cup), °F | | 0 |
| Explosive limits in air (28°C), % | | 7.3 - 16.0 |
| Auto-ignition temperature, °F | | 1058 |
| Q Value | | = 0.22 |
| e Value | | = 0.36 |
| Latent Heat of Vaporization, | | |
| ▲ Hv cal/mole at 25°C | | = 6,328 ± 0.3% |
| at Boiling Point | | = 6,257 ± 0.3% |
| Latent Heat of Fusion, ▲ Hm cal/mole | | = 1,557 |
| Heat of Polymerization, | | |
| ▲ Hp k cal/mole at 25°C | | = -18.0 ± 0.9 |
| ▲ Hp BTU/lb at 77°F | | = 334 (exothermic) |
| Heat of Combustion, Liquid Monomer | | |
| ▲ Hc k cal/mole | | = 261.93 ± 0.3 |
| Heat of Formation, | | |
| Liquid Monomer, ▲ Hr k cal/mole | | = -6.0 ± 0.3 |
| Gaseous Monomer, ▲ Hr k cal/mole | | = +0.3 ± 0.3 |
| Heat Capacity, Liquid Monomer, | | |
| Cp cal/mole deg at 25.15°C | | = 26.745 |
| Heat Capacity, Ideal Gas State | | |
| Cp cal/mole deg at 25.15°C | | = 16.04 |
| Critical Temperature, Tc °C | | = 222 |
| Critical Pressure, Pc Atmospheres | | = 51.3 |
| Critical Volume, Vc cm ³ /mole | | = 219 |

COMPARATIVE DATA

Table 3.58: Alpha Cleaning Solvents (62)

Alpha 564M and 565

Alpha 564M and 565 are functionally azeotropic blends of a chlorinated solvent and a polar component, designed for effective cleaning of post-soldering flux residues from pcb's and other electronic assemblies. Both formulations have no flash points. Compared to the fluorocarbons, they are more aggressive, more effective cleaners, yet lower in cost.

564M

Perchloroethylene and propylene glycol monomethyl ether.

565*

1,1,1,-Trichloroethane and n-propyl alcohol.

PHYSICAL PROPERTIES¹

| Property | 564M | 565 |
|---------------------------------------------------------------------|------------------|------------------|
| Specific Gravity | 1.540 ± 0.010 | 1.285 ± 0.005 |
| Lb./Gal. | 12.81 | 10.69 |
| Residue on Evaporation (ppm max.) | 25 | 10 |
| Alkalinity (calc. as ppm NaOH) | 50 (max.) | — |
| Acidity (calc. as ppm HCl) | — | 10 (max.) |
| Acid Acceptance (calc. as Wt. % NaOH) | 0.07, Min. | 0.15, Min. |
| Appearance clarity | | Clear |
| color (Max. A.P.H.A.) | 40 | 15 |
| Boiling Point | 118°C (244°F) | 74°C (165°F) |
| Freezing Point | <0°C (<32°F) | -34 C (-30°F) |
| Vapor Density at Boiling Point (lb./cu. ft) ² | 0.307 | 0.272 |
| Latent Heat of Vaporization at Boiling Point (Btu/lb.) ² | 100 | 133 |
| Specific Heat (Btu/lb.°F) ² | 0.244 | 0.268 |
| Vapor Pressure (mm Hg) ² @ 20°C | 14.0 | 92.8 |
| Surface Tension (dyne/cm.) @ 20°C ² | 31.9 | 25.0 |
| Kauri-Butanol Value | 182 | 206 |
| Evaporating Rate (relative) ³ | 0.21 | 0.55 |
| Solubility of Water in Solvent (grams/100cc) | <0.1 | 0.2 |
| Toxicity (TLV) ² | 100 | 345 |
| Flash Point ⁴ | | |
| Tag Open Cup | NONE | |
| Tag Closed Cup | NONE | |
| Fire Point | NONE | |

NOTES:

1. Unless specified, properties are at room temperature (25°C; 77°F) and 1 atmosphere (760 mm Hg).
2. Calculated values.
3. Relative evaporation rate calculated with a value of 1.00 assigned to FC113.
4. As per OSHA recommendations.

Alpha 1001 and 1003

Alpha 1001 and 1003 are azeotropes of Fluorocarbon 112 (tetrachlorodifluoroethane) and polar alcohols formulated for effective cleaning of post-soldering flux residues from pcb's and other electronic assemblies. Compared to chlorinated solvents, they are less aggressive and can be used on normally solvent-sensitive plastic materials. They are more effective solvents than Fluorocarbon 113 (trichlorotrifluoroethane)-based products, because of the extra chlorine atom.

1001

Contains 28% isopropyl alcohol and has a Tag Open Cup Flash Point of 85°F.

1003

Contains 15% n-propyl alcohol and has no TOC Flash Point below its boiling point of 180°F.

SPECIFICATIONS¹

| Property | 1001 | 1003 |
|---------------------------------------------------------------------|---------------|-----------------|
| Specific Gravity | 1.254 ± 0.020 | 1.423 ± 0.020 |
| Lb./Gal. | 10.42 | 11.83 |
| Residue on Evaporation (ppm max.) | | 5 |
| pH of Water Extract | | Neutral |
| Min. Acid Acceptance (cal. as Wt. % NaOH) | 0.50 | 0.22 |
| Appearance clarity | | Clear |
| color (Max. A.P.H.A.) | | 15 |
| Boiling Point | 76°C (168°F) | 82°C (180°F) |
| Freezing Point | -14°C (6°F) | 6°C (43°F) |
| Vapor Density at Boiling Point (lb./cu. ft.) ² | 0.268 | 0.323 |
| Latent Heat of Vaporization at Boiling Point (Btu/lb.) ² | 128 | 100 |
| Specific Heat (Btu/lb.°F) ² | 0.323 | 0.271 |
| Vapor Pressure (mm Hg) ² | 42.0 | 39.7 |
| Kauri-Butanol Value ³ | | 71 |
| Evaporation Rate (relative) ⁴ | | 0.53 |
| Solubility of Water in Solvent (grams/100 cc) | 5.6 | 1.8 |
| Toxicity (TLV) ² | 470 | 455 |
| Flash Points ⁵ | | |
| Tag Open Cup | 29°C (85°F) | None to Boiling |
| Tag Closed Cup | None | None |
| Fire Point | 29°C (85°F) | None |

Notes:

¹Unless specified, properties are room temperature (25°C; 77°F) and 1 atmosphere (760 mm Hg).

²Calculated values.

³Major constituent only.

⁴Relative evaporation rate calculated with a value of 1.00 assigned to F113.

⁵As per OSHA recommendations. Use of Cleveland Open Cup Test yields values significantly higher.

Table 3.59: Ashland Chlorinated Solvents (69)

| PRODUCT | LB./GAL. | SP. GR. | BOILING RANGE | | FL. PT. | EVAP. |
|-------------------------|----------|----------|---------------|---------|---------|-------------------|
| | 25°/25°C | 25°/25°C | °C | °F | °F TCC | RATE ¹ |
| Methylene Chloride | 11.0 | 1.321 | 39.4-40.4 | 103-105 | None | 14.5 |
| Chloroform | 12.3 | 1.481 | 60-62 | 140-143 | None | — |
| 1, 1, 1-Trichloroethane | 10.9 | 1.312 | 72-88 | 162-190 | None | 4.6 |
| Carbon Tetrachloride | 13.2 | 1.582 | 76-77 | 169-171 | None | 6.0 |
| Ethylene Dichloride | 10.5 | 1.260 | 83-85 | 180-184 | 70 | 4.5 |
| Trichloroethylene | 12.1 | 1.456 | 86-88 | 187-190 | None | 2.6 |
| Propylene Dichloride | 9.6 | 1.157 | 92-99 | 198-210 | 64 | 3.2 |
| Perchloroethylene | 13.5 | 1.619 | 120-122 | 248-252 | None | 2.1 |
| Monochlorobenzene | 9.2 | 1.101 | 131-133 | 268-271 | 82 | 1.07 |
| Orthodichlorobenzene | 10.9 | 1.308 | 180-183 | 356-361 | 155 | 0.15 |

¹ n-Butyl Acetate = 1

Table 3.60: Chemcentral Chlorinated Solvents (67)

| CHLORINATED SOLVENTS | CAS | Mole Weight | Specific Gravity @ 25/25°C | Pounds Per Gallon @ 25°C | Coeff. of Expan. Per °C | Δ Spec. Gravity Per °C | Refractive Index @ 25°C | Distillation Range @ 760 mm Hg | |
|-----------------------------|----------|-------------|----------------------------|--------------------------|-------------------------|------------------------|-------------------------|--------------------------------|-----------|
| | | | | | | | | °C | °F |
| 1, 1, 1-TRICHLOROETHANE | 71-55-6 | 133.4 | 1.320 | 10.97 | 0.00125 | 0014 | 1.434 | 74-90 | 165-194 |
| ETHYLENE DICHLORIDE | 107-06-2 | 99.0 | 1.252 | 10.42 | 0.00117 | 0012 | 1.4427 | 81.5-85.5 | 179-186 |
| METHYLENE CHLORIDE TECH. | 75-09-2 | 84.9 | 1.320 | 10.98 | 0.0014 | 0016 | 1.421 | 40.0-40.8 | 104-105.5 |
| MONOCHLOROBENZENE | 108-90-7 | 112.6 | 1.105 | 9.19 | | | 1.5215 | 131.7-132 | 269-270 |
| ORTHODICHLOROBENZENE | 95-50-1 | 147.0 | 1.303 | 10.84 | 0.00083 | .0006 | 1.5482 ^a | 180-183 | 356-362 |
| PERCHLOROETHYLENE | 127-18-4 | 165.8 | 1.619 | 13.47 | 0.00102 | 0012 | 1.5029 | 121-123 | 250-254 |
| TRICHLOROETHYLENE—Extract n | 79-01-6 | 131.4 | 1.459 | 12.14 | 0.00117 | 00006 | 1.478 ^b | 87-88 | 188-190 |
| TRICHLOROETHYLENE—Degr g | 79-01-6 | 131.4 | 1.456 | 12.11 | 0.00117 | 00006 | 1.478 ^b | 87-88 | 188-190 |
| CC #49 | | | 1.370 | 11.41 | 0.0013 | 0015 | 1.44 | 39-123 | 103-254 |
| SC #49 COLD DEGREASER | | | 0.939 | 7.82 | | | | 42-201 | 108-386 |
| SC #149 COLD DEGREASER | | | 0.947 | 7.89 | | | | 42-160 | 108-320 |

| CHLORINATED SOLVENTS | Vapor Press. @ 20°C mm Hg | Evaporation Rate | | | Kauri Butanol Value cc. | Freeze Point °C | Flash Point Tag O.C. °F | Explosive Limits % by Vol. in Air | | Solubility Parameter |
|-----------------------------|---------------------------|------------------|----------------|------------------|-------------------------|-----------------|-------------------------|-----------------------------------|-------|----------------------|
| | | Minutes | Carbon Tet = 1 | n-Butyl Ace. = 1 | | | | Lower | Upper | |
| 1, 1, 1-TRICHLOROETHANE | 100.0 | 1.0 | 1.0 | 6.0 | 124 | -37.9 | NONE | 8.0 | 10.5 | 8.5 |
| ETHYLENE DICHLORIDE | 61.6 | 1.3 | 0.77 | 4.46 | 84 | 35.7 | 56 ^e | 6.2 | 15.9 | 9.8 |
| METHYLENE CHLORIDE TECH. | 340 | 0.4 | 2.5 | 14.5 | 136 | 97 | NONE | NONE | NONE | 9.7 |
| MONOCHLOROBENZENE | 300 ^d | 5.4 | 0.19 | 1.07 | 113 | 45.6 | 82 ^e | 1.3 | 7.1 | 9.5 |
| ORTHODICHLOROBENZENE | 0.348 | 38.0 | 0.03 | 0.15 | 240 | -22 | 160 | 2.2 | 9.2 | 10.0 |
| PERCHLOROETHYLENE | 13.0 | 2.8 | 0.34 | 2.1 | 92 | 22.4 | NONE | NONE | NONE | 9.3 |
| TRICHLOROETHYLENE—Extract n | 59.0 | 1.3 | 0.77 | 4.46 | | 86.4 | NONE | 8.0 | 10.5 | 9.3 |
| TRICHLOROETHYLENE—Degr g | 59.0 | 1.3 | 0.77 | 4.46 | 129 | 86.4 | NONE | 8.0 | 10.5 | 9.3 |
| CC #49 | 345.0 | 1.3 | 0.77 | 4.46 | | | NONE | NONE | NONE | 9.6 |
| SC #49 COLD DEGREASER | | 30.0 | 0.03 | 0.17 | | | | | | 8.0 |
| SC #149 COLD DEGREASER | | 10.0 | 0.1 | 0.5 | | | | | | 8.3 |

Table 3.61: Dow Chemical Chlorinated Solvents (23)

Physical Properties of Chlorinated Solvents

| PROPERTIES | SOLVENTS | | | |
|---------------------------------------------------------|---------------------------------|-----------------------------------------------|---------------------------------|--------------------------------|
| | METHYLENE CHLORIDE | INHIBITED 1,1,1- TRICHLOROETHANE | TRICHLORO- ETHYLENE | PERCHLORO- ETHYLENE |
| Chemical Formula | CH ₂ Cl ₂ | C ₂ H ₃ Cl ₃ | C ₂ HCl ₃ | C ₂ Cl ₄ |
| Molecular Weight | 84.9 | 133.4 | 131.4 | 165.8 |
| Boiling Pt. @ 760 mm Hg | 103.5°F (39.7°C) | 165°F (74°C) | 189°F (87°C) | 250°F (121.1°C) |
| Freezing Point | -139°F (-95°C) | -34°F (-37°C) | -124°F (-86.7°C) | -9°F (-22.8°C) |
| Specific Gravity @ 25/25°C | 1.32 | 1.32 | 1.456 | 1.619 |
| Pounds per Gallon @ 25°C | 10.98 | 10.97 | 12.11 | 13.47 |
| Vapor Density (air = 1.00) | 2.93 | 4.60 | 4.53 | 5.76 |
| Specific Heat @ 25°C cal/g°C | 0.283 | 0.259 | 0.226 | 0.209 |
| Heat of Vaporization @ Boiling Point | | | | |
| cal/g | 78.9 | 56.7 | 56.4 | 50.1 |
| BTU/lb | 142 | 102 | 101.6 | 90.2 |
| Refractive Index @ 25°C | 1.421 | 1.434 | 1.474 | 1.503 |
| Viscosity @ 25°C centipoises | 0.41 | 0.79 | 0.54 | 0.84 |
| Flash Point Tag Open Cup ASTM, Method D-1310 | none | none | none | none |
| Tag Closed Cup ASTM, Method D-56 | none | none | none | none |
| Solubility (g/100g) @ 25°C | | | | |
| H ₂ O in solvent | 0.17 | 0.05 | 0.04 | 0.0105 |
| solvent in H ₂ O | 1.70 | 0.07 | 0.10 | 0.015 |
| Surface Tension (dynes/cm @ 25°C) | 27.1 | 25.1 | 28.7 | 31.8 |
| Kauri Butanol Value | 136 | 124 | 129 | 90 |
| Solvent-Water Azeotropic Boiling Point | 100.6°F (38.1°C) | 149°F (65°C) | 164°F (73.3°C) | 190°F (87.8°C) |
| Flammable Limits (volume % of solvent in air) @ 25°C | | | | |
| Lower Limit | 14 | 7.5 | 8.0 | none |
| Upper Limit | 22 | 12.5 | 9.2 (saturation) | none |

(continued)

Table 3.61: (continued)

Relative Evaporation Rates†

| | |
|-----------------------|-----|
| n-Butyl acetate | 1.0 |
| Ethanol* | 1.4 |
| Perchloroethylene | 1.5 |
| Methyl alcohol | 2.1 |
| Trichloroethylene | 3.0 |
| Methyl ethyl ketone | 3.9 |
| 1,1,1-Trichloroethane | 4.6 |
| Acetone | 5.7 |
| Methylene chloride | 7.0 |

*95% Et OH, 5% H₂O

†Evaporation rates measured with respect to n-butyl acetate. Larger numbers reflect faster evaporation. As measured by ASTM D3539-76.

Methylene Chloride Compatibility with Plastics, Elastomers and Rubbers

| | % Linear Swell | |
|------------------------------------------------------------|----------------|--------------|
| | Initial | After Drying |
| Plastics | | |
| Polypropylene (General Purpose Grade) | 3.5 | 0 |
| Polyethylene 3300 (High Density) | 1.0 | 0 |
| Polyethylene (Linear) | 3.0 | -0.5 |
| Polyallomer (Ethylene Propylene Copolymer) | 4.0 | 0 |
| Acetate (Cellulose Acetate) | A,B | 0 |
| Butyrate (Cellulose Acetate Butyrate) | C | - |
| Propionate (Cellulose Acetate Propionate) | C | - |
| Brand of Elastomers and Rubbers | | |
| Chardon 15093 ^a | 56.0 | -0.5 |
| Chardon 15096-2 ^a | 80.5 | -3.0 |
| Chardon 15120 ^a | 76.5 | -2.5 |
| Hycar 1000 x 132 ^c | 44.5 | -3.0 |
| (Acrylonitrile/butadiene high acrylonitrile content) | | |
| Hycar 1014 ^c (Buna N low acrylonitrile content) | 55.0 | -4.5 |
| Thiokol 3000 FA ^d (Polysulfide Rubber) | 52.5 | -1.5 |
| Thiokol 3600 ST-C ^d | 50.0 | -0.5 |
| Thiokol E455 ^d | 64.0 | -4.5 |
| Dow Corning 94-002 ^b (Fluorosilicone Rubber) | 16.0 | -2.0 |
| Silastic LS-63 ^b (Fluorosilicone Rubber) | 16.5 | 0 |
| Silastic S-6526 ^b (Silicone Rubber) | 34.5 | - |
| Silastic 80 ^b (Silicone Rubber) | 24.0 | -0.5 |
| Silastic 675 ^b | 38.5 | -0.5 |

Key: (Negative sign indicates sample decreased in size. Data to nearest 0.5%.)

a. Chardon Rubber Company

b. Dow Corning Corporation

c. B.F. Goodrich Chemical Company

d. Thiokol Chemical Company

A. Distorted and softened

B. Partially dissolved or disintegrated

C. Totally dissolved or disintegrated

(continued)

Table 3.61: (continued)

Solubilities of Resins, Waxes and Fats in Methylene Chloride

| Material or Brand | Solubility† | Material or Brand | Solubility† |
|----------------------------------|-------------|--------------------------------------|-------------------|
| Resins | | | |
| ABALYN – Resin esterified | | Rosin (wood) | >100 |
| with glycerine | >100 | SARAN** F-120 – Vinylidene | |
| ACRYLOID B-82 – Acrylic ester | >100 | chloride-acrylonitrile | < 1 |
| AMBEROL 801-XLT – Phenolic | >100 | SARAN F-220 – Vinylidene | |
| AMBEROL ST-137-X – Phenol- | | chloride-acrylonitrile | < 1 |
| formaldehyde | >100 | VELSICOL AE9 – ETO adducts | < 10 |
| BAKELITE CKR-5254 – Phenolic | < 20 | VERSAMIDE 940 – Polyamide | >100 |
| BECKACITE 1001 – Phenolic | >100 | VINYLLITE AYAA – Vinyl acetate | >100 |
| BECKACITE 1112 – Phenolic | >100 | VINYLLITE VYHH – Vinyl chloride | |
| CUMAR W-1 – Paracumarone- | | acetate | < 50 ¹ |
| indene | >100 | Oils & Resins | |
| D.E.N.* 438 – Epoxy novolac | >100 | ALINCO Z2 – Linseed oil | >100 |
| D.E.R.* 331 – Epoxy | >100 | Lanolin anhydrous | >100 |
| D.E.R. 332 – Epoxy | >100 | OKO S-70 – Soybean oil | >100 |
| D.E.R. 661 – Epoxy | >100 | Waxes | |
| D.E.R. 664 – Epoxy | >100 | Beeswax | < 5 |
| D.E.R. 667 – Epoxy | >100 | Candelilla wax | < 1 |
| DOW Resin PS-3 – Polystyrene | >100 | Carnauba wax | < 1 |
| EPON 812 – Epoxy | >100 | Ceresin wax | < 1 |
| EPON 836 – Epoxy | >100 | Japan wax | < 1 |
| EPON 1004 – Epoxy | >100 | Montan wax | < 1 |
| EPON 1109 – Epoxy | >100 | Paraffin 47-49°C | < 15 |
| GENEPOXY 175 – Epoxy | >100 | White petrolatum | < 20 |
| GENEPOXY M-180 – Epoxy | >100 | Fatty Acids & Derivatives | |
| GENEPOXY 190 – Epoxy | >100 | Calcium Stearate | < 1 |
| GENEPOXY 525 – Epoxy | >100 | Potassium Oleate | < 1 |
| GENEPOXY 925 – Epoxy | >100 | Sodium Oleate | < 1 |
| GENEPOXY 1800 – Epoxy | >100 | Stearic Acid | < 35 |
| HERCOLYN – Resin esterified with | | Miscellaneous | |
| glycerine | >100 | D.C.R.-5061 – Silicone | >100 |
| Polymethyl methacrylate | >100 | D.C.R.-5581 – Silicone | >100 |
| NEVINDENE RS – Cumarin | | PARLON S-5 – Chlorinated | |
| indene | >100 | rubber | >100 |
| Orange Shellac | < 1 | PARLON S-20 – Chlorinated | |
| PICCO 420 ES – Indene polymer | >100 | rubber | >100 |
| PICCOLASTIC A-75 – Polystyrene | >100 | PARLON S-300 – Chlorinated | |
| PICCOLYTE S-85 – Polyterpene | >100 | rubber | > 60 ¹ |
| PICCOPALE 100 – Hydrocarbon | >100 | | |
| Polyvinyl Chloride | < 1 | | |
| Resin 276-V9 – Polyalkyl styrene | >100 | | |

¹Too viscous for further addition.

*Trademark of The Dow Chemical Company

**Trademark of The Dow Chemical Company overseas

†Solubilities were determined by the incremental addition of solute to 100 grams of methylene chloride at room temperature. Solute was added in the following increments: 1 gram, 5 grams, 10 grams and so on in 5-gram steps up to a maximum of 100 grams. Thus a notation of <5 indicates that more than 1 gram but less than 5 grams of solute can be dissolved in 100 grams of methylene chloride. Similarly, a notation of <40 indicates that more than 35 but less than 40 grams of solute will dissolve. Where 100 grams of solute dissolve, the result is reported as >100. Resin solubilities were obtained on uncured material suitable for use in paints, adhesives, and coatings.

(continued)

Table 3.61: (continued)

Thermodynamic Properties of Methylene Chloride in the Ideal Gas State


| Temperature °C | Heat Capacity cal/(mol °C) | Enthalpy cal/mol | Entropy cal/(mol °C) |
|----------------|-------------------------------|---------------------|-------------------------|
| 25 | 12.17 | 0 | 64.61 |
| 50 | 12.70 | 311 | 65.61 |
| 100 | 13.71 | 972 | 67.51 |
| 150 | 14.65 | 1,681 | 69.29 |
| 200 | 15.49 | 2,435 | 70.97 |
| 250 | 16.26 | 3,229 | 72.57 |
| 300 | 16.95 | 4,060 | 74.08 |
| 350 | 17.57 | 4,923 | 75.53 |
| 400 | 18.13 | 5,815 | 76.90 |
| 450 | 18.64 | 6,735 | 78.22 |
| 500 | 19.10 | 7,679 | 79.48 |
| 550 | 19.52 | 8,645 | 80.69 |
| 600 | 19.91 | 9,631 | 81.86 |
| 650 | 20.26 | 10,635 | 82.98 |
| 700 | 20.58 | 11,656 | 84.05 |
| 750 | 20.88 | 12,693 | 85.09 |

Thermodynamic Properties of Perchloroethylene

| Temperature °C | Heat Capacity @ 1 atm cal/(mol °C) | Enthalpy 25°C = 0 cal/mol | Entropy cal/(mol °C) |
|-------------------|------------------------------------------|---------------------------------|-------------------------|
| 27 | 22.9 | 46 | 76.8 |
| 77 | 24.3 | 1,226 | 80.5 |
| 127 | 25.4 | 2,466 | 83.8 |
| 177 | 26.3 | 3,756 | 86.8 |
| 227 | 27.0 | 5,086 | 89.6 |
| 277 | 27.6 | 6,451 | 92.2 |
| 327 | 28.1 | 7,841 | 94.7 |
| 377 | 28.5 | 9,256 | 96.9 |
| 427 | 28.9 | 10,691 | 99.1 |
| 477 | 29.2 | 12,141 | 101.1 |
| 527 | 29.5 | 13,611 | 103.0 |
| 577 | 29.7 | 15,091 | 104.0 |
| 627 | 29.9 | 16,581 | 106.4 |
| 677 | 30.1 | 18,081 | 108.1 |

Heat of formation @ 25°C = 17,700 cal/mol
 Critical temperature = 352.1°C
 Critical pressure = 45.5 atm
 Critical density = 0.492 g/cc

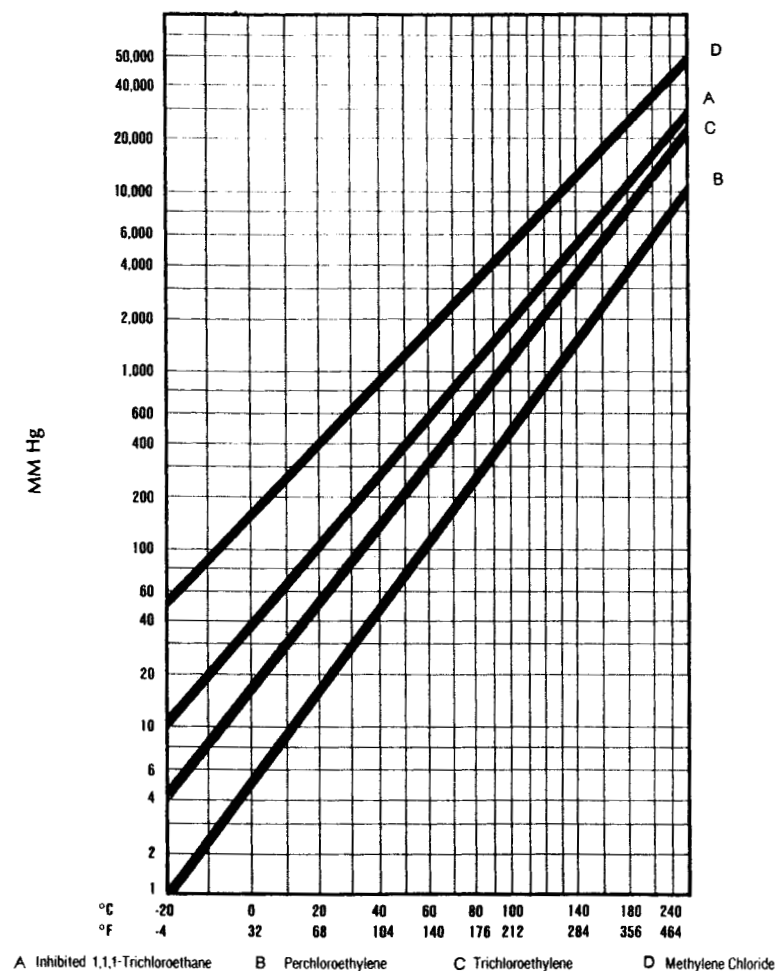Vapor Pressure of Chlorinated Solvents




(continued)


Table 3.61: (continued)

Boiling Temperatures of Chlorinated Solvents and Oil

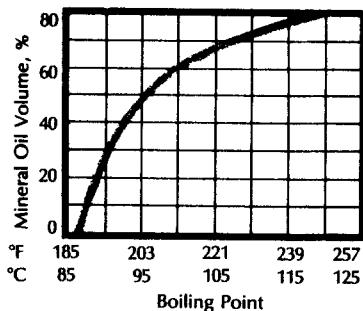
Trichloroethylene




Perchloroethylene

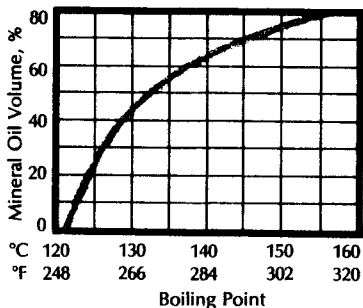


Methylene Chloride

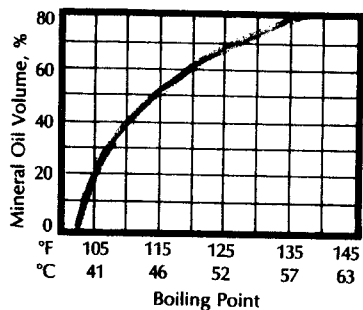

Inhibited 1,1,1-Trichloroethane

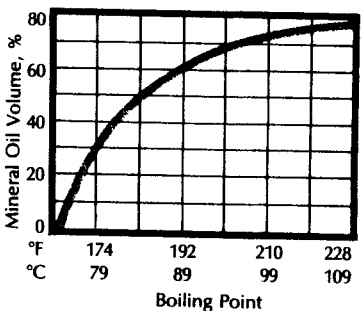


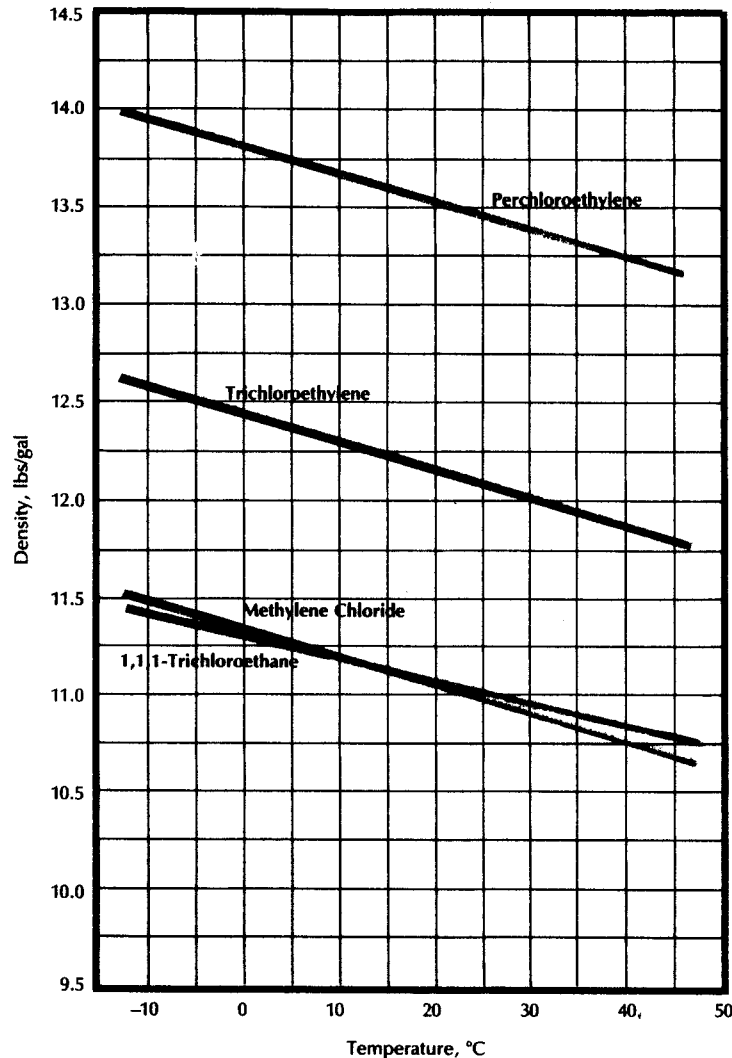Density of Chlorinated Solvents as a Function of Temperature




(continued)

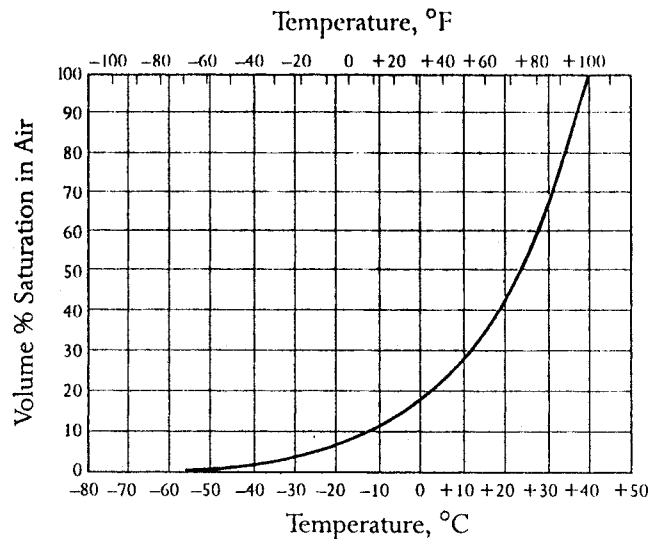Dew Point of Methylene Chloride




Specific Gravity Data

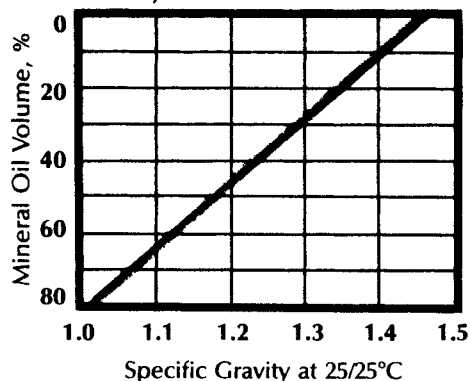
Trichloroethylene




Perchloroethylene

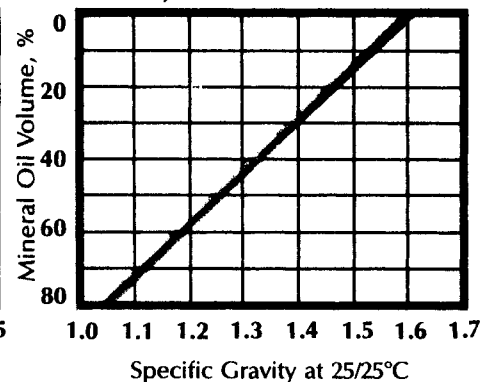

Methylene Chloride

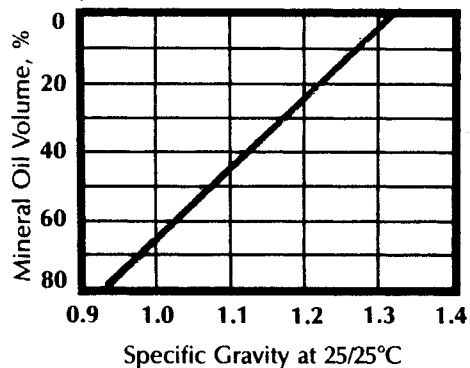

Inhibited 1,1,1-Trichloroethane

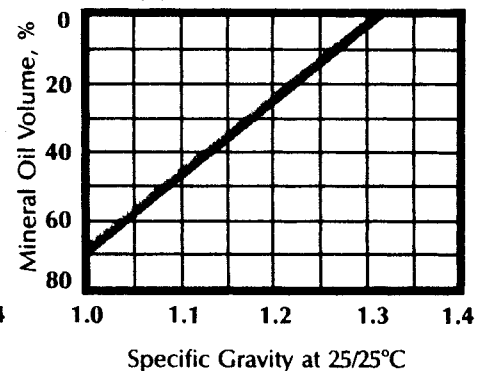


Methylene Chloride Flammability Data

| | |
|-------------------------------------------------|------------------|
| Flash point (Tag Open Cup ASTM D-1310) | None |
| Fire point (Tag Open Cup ASTM D-1310) | None |
| Initial thermal degradation | 250 °F (120 °C) |
| Autoignition temperature | 1033 °F (556 °C) |
| Flammable range | |
| % volume in air (25 °C) 10 kilowatt spark | 14-22 |
| % volume in oxygen (25 °C) | 14-66 |

(continued)

Table 3.61: (continued)

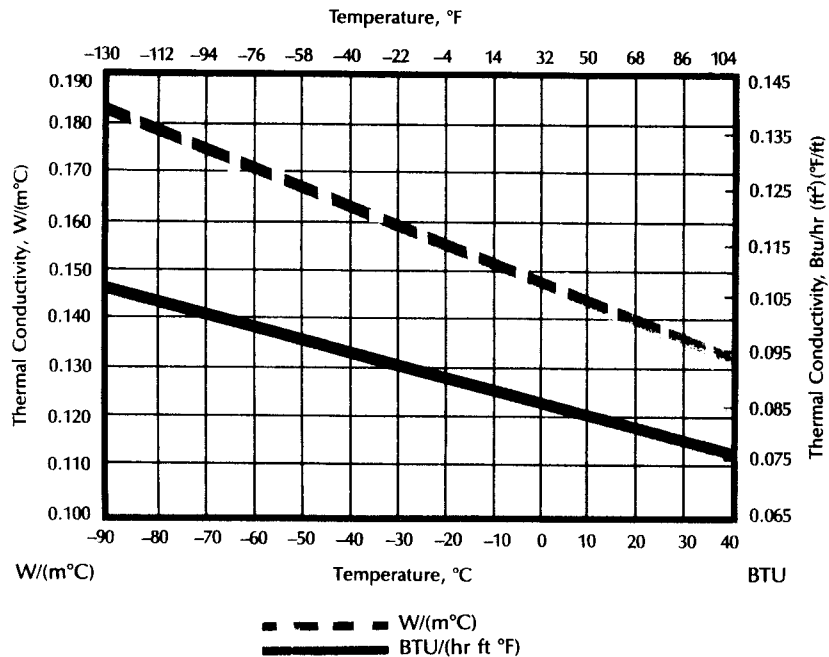Thermal Conductivity vs Temperature of Methylene Chloride



Solvency Power

| | |
|------------------------------------|------|
| Kauri butanol value | 136 |
| Solubility parameter (Cal/cc 25°C) | 9.9 |
| Hydrogen bonding parameter | 2.2 |
| Dipole moment (Debyes) | 1.61 |

Relative Evaporation Rates†

| | |
|-----------------------|-----|
| n-Butyl acetate | 1.0 |
| Ethanol | 1.6 |
| Perchloroethylene | 1.5 |
| Methyl alcohol | 1.8 |
| Heptane | 3.5 |
| Trichloroethylene | 3.1 |
| Methyl ethyl ketone | 3.9 |
| 1,1,1-Trichloroethane | 4.5 |
| Acetone | 5.6 |
| Methylene chloride | 7.0 |

†Evaporation rates measured with respect to n-butyl acetate. Larger numbers reflect evaporation.

Thermal Conductivity vs Temperature of Perchloroethylene

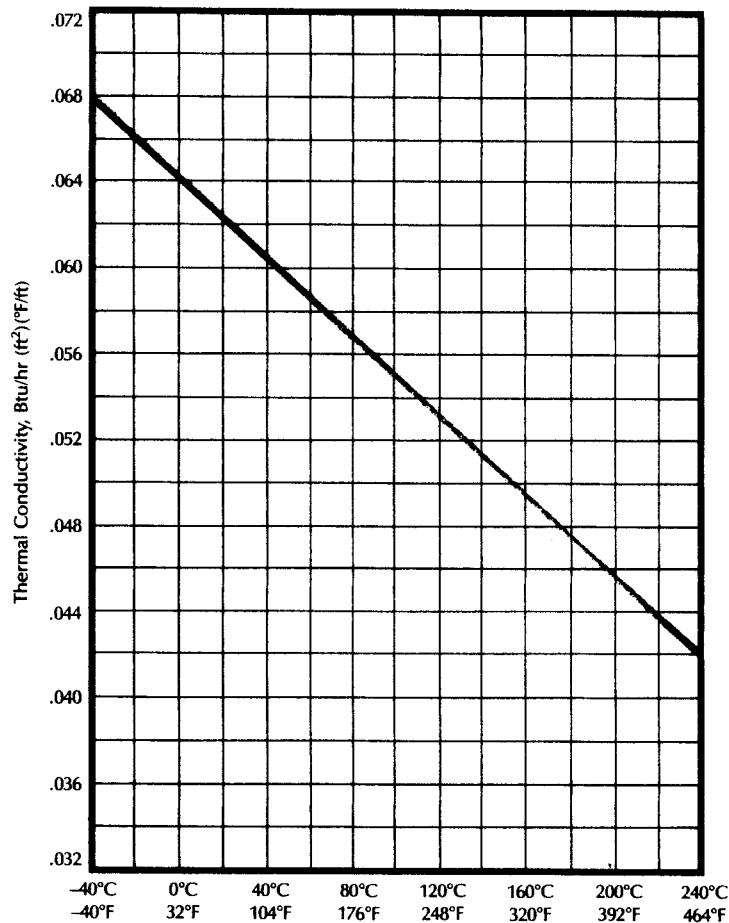



Table 3.61: (continued)

Blending Solvents to Eliminate Flash Points


Flash Points (°F) – Tag Closed Tester
Volume % Chlorinated Solvent

| Family | Flammable Constituent Data Source | Flash Points (°F) – Tag Closed Tester | | | | | |
|-------------|--------------------------------------|---------------------------------------|----|----|----|----|----|
| | | 0 | 10 | 20 | 30 | 40 | 50 |
| Alcohol | Ethanol | 60 | 54 | 48 | NF | | |
| | n-Butanol | 106 | 94 | NF | | | |
| Ester | Butyl Acetate | 84 | 81 | 76 | NF | | |
| | Ethyl Acetate | 25 | 32 | 34 | 39 | 41 | NF |
| Hydrocarbon | Heptane | 21 | 23 | 21 | 22 | NF | |
| | Octane | 59 | 49 | NF | | | |
| Ketone | Methyl Isobutyl Ketone | 64 | 64 | 64 | 62 | NF | |

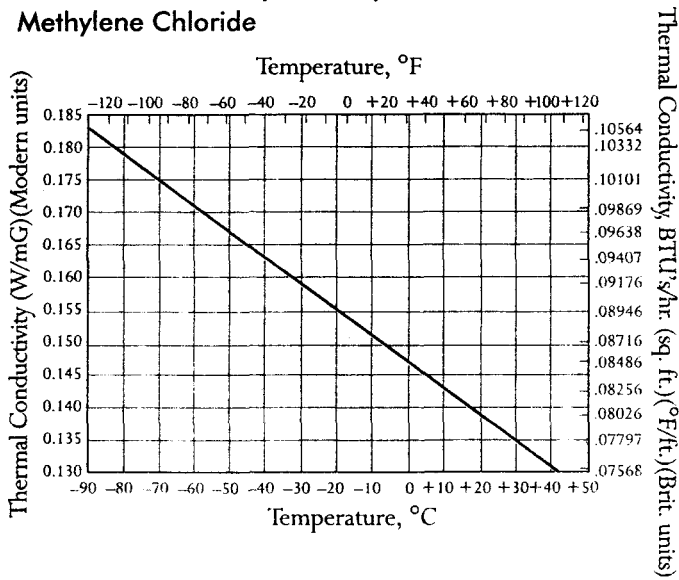Thermal Conductivity vs. Temperature for Methylene Chloride



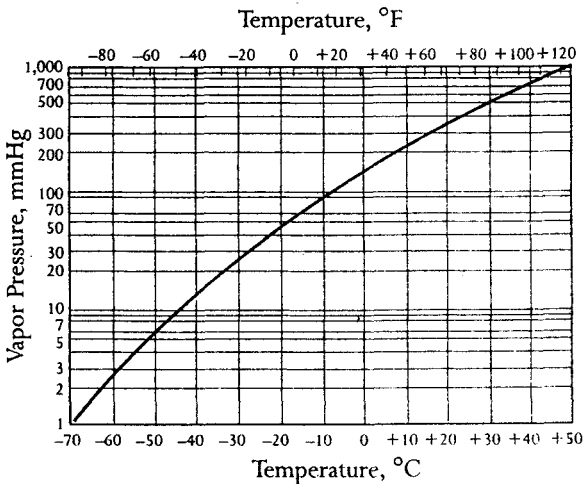Vapor Pressure vs. Temperature for Methylene Chloride



Density vs. Temperature for Methylene Chloride


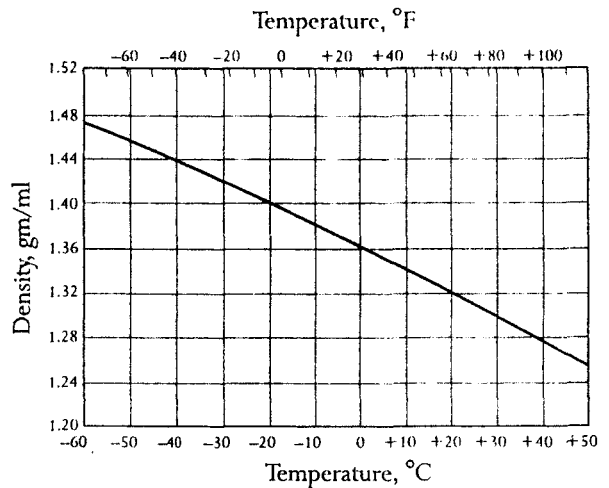


Table 3.61: (continued)

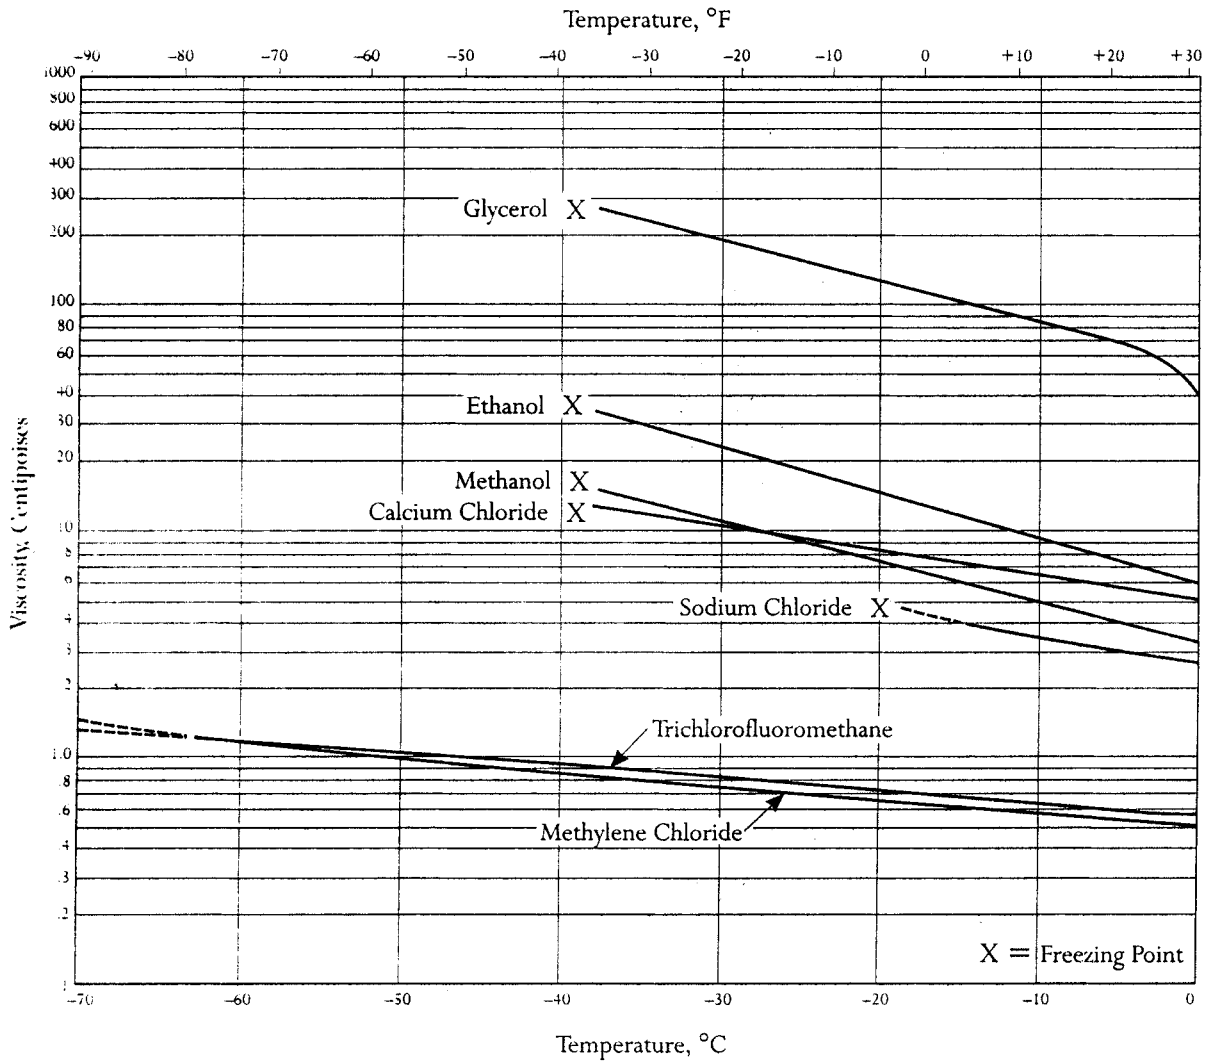Viscosity Curves for Common Secondary Refrigerants



| | |
|------------------------|--------------------------------|
| Glycerol | = 64.8% Wt. (Aqueous Solution) |
| Ethanol | = 56.8% Wt. (Aqueous Solution) |
| Calcium Chloride | = 29.0% Wt. (Aqueous Solution) |
| Methanol | = 38.4% Wt. (Aqueous Solution) |
| Sodium Chloride | = 21.0% Wt. (Aqueous Solution) |
| Trichlorofluoromethane | = 100% Wt. |
| Methylene Chloride | = 100% Wt. |

Table 3.62: Vertrel Cleaning Agents (11)**Vertrel KCD-9547 Cleaning Agent****Introduction**

Vertrel KCD-9547 is a proprietary azeotrope-like blend of Vertrel XF hydrofluorocarbon with trans-1,2-dichloroethylene and cyclopentane. It is ideally suited for use in vapor degreasing equipment to remove light oils, fingerprints, and particulate contaminants. Vertrel KCD-9547 is specially formulated to provide a high degree of compatibility with plastics, elastomers, and other nonferrous metals, such as in aerospace parts. Vertrel KCD-9547 is nonflammable, has "zero" ozone depletion potential, and has low global warming potential. It can replace CFC-113, 1,1,1-trichloroethane (1,1,1-TCA), hydrochlorofluorocarbons (HCFC), and perfluorocarbons (PFC) in many applications.

Physical Properties

| Property* | Units | Vertrel® KCD-9547 | |
|------------------------------------------|-----------|----------------------|-------|
| | | CFC-113 | |
| Boiling Point | °C | 37.2 | 47.6 |
| | °F | 99.0 | 117.6 |
| Liquid Density | g/cc | 1.29 | 1.56 |
| | lb/gal | 10.8 | 13.1 |
| Vapor Pressure | mmHg | 414 | 334 |
| | psi | 8.0 | 6.5 |
| Surface Tension | dyn/cm | 15.3 | 17.3 |
| Freezing Point | °C | <-50 | -35 |
| | °F | <-58 | -31 |
| Heat of Vaporization at boiling point | cal/g | 47 | 35 |
| | Btu/lb | 85 | 63 |
| Heat Capacity at 20°C (68°F) | cal/g °C | 0.21 | 0.21 |
| | Btu/lb °F | 0.21 | 0.21 |
| Viscosity | cps | 0.65 | 0.68 |

*At 25°C (77°F) except where indicated.

**Preliminary Plastic Compatibility Immersion:
15 min at boiling point (37°C [99°F])**

| Compatible | |
|------------------------|-----------------------|
| Acetal | Polyimides |
| Epoxy | Polypropylene |
| HD Polyethylene | Polysulfone |
| Nylon | PVA |
| Phenolic | PVC |
| Polyester, PET and PBT | Teflon® TFE, FEP, PFA |
| Polyethylene | |

Exposure Limits

| Component | Limit, ppm | Type |
|----------------------------|------------|------------------------------|
| Vertrel® XF | AEL 200 | 8- and 12-hr TWA Ceiling* |
| | 400 | |
| trans-1,2-dichloroethylene | TLV 200 | 8-hr TWA |
| Cyclopentane | TLV 600 | 8-hr TWA |

AEL—DuPont's acceptable exposure limit.

TLV—Threshold limit value established by the American Conference of Government & Industrial Hygienists (ACGIH).

TWA—Time weighted average.

*A ceiling limit is the concentration that should not be exceeded during any part of the working day.

**Density and Vapor Pressure Change
with Temperature**

| Temperature, | | Density, | | Vapor Pressure, | |
|--------------|-------|----------|----------|--------------------|--------|
| °C | (°F) | g/cc | (lb/gal) | mmHg | (psi) |
| 0 | (32) | 1.34 | (11.2) | 129 | (2.5) |
| 10 | (50) | 1.32 | (11.1) | 228 | (4.4) |
| 20 | (68) | 1.30 | (10.9) | 336 | (6.5) |
| 25 | (77) | 1.29 | (10.8) | 414 | (8.1) |
| 30 | (86) | 1.27 | (10.6) | 517 | (10.0) |
| 40 | (104) | 1.25 | (10.5) | 776 | (15.0) |
| 50 | (122) | 1.23 | (10.3) | 1034 | (20.0) |
| 60 | (140) | 1.21 | (10.1) | 1396 | (27.0) |

Soils Cleaned with Vertrel® KCD-9547

| | |
|--------------------|----------------------|
| Fingerprints | Other Synthetic Oils |
| Hydraulic Oils | Particulates |
| Light Mineral Oils | Vegetable Oils |

**Preliminary Elastomer Compatibility Immersion:
15 min at boiling point (37°C [99°F])**

| Compatible | |
|----------------------|----------------------------------|
| Buna-S* | Fluoroelastomers |
| Buna-N | Natural Rubber* |
| Butyl Rubber* | Neoprene |
| Chlorosulfonated PE | Polysulfide (e.g., Thiokol's FA) |
| EPDM (e.g., Nordel®) | Urethane |

*Swelling, but with low extractables

Vertrel® KCD-9547 Specifications

| | |
|-------------------------------|------------------|
| Vertrel® XF, % | 65.0 ± 1.0 |
| trans-1,2-dichloroethylene, % | 20.0 ± 1.0 |
| Cyclopentane, % | 15.0 ± 2.0 |
| Appearance | Clear, colorless |
| Nonvolatile Residue, ppm | 10.0 max. |
| Moisture, ppm | <200 |

(continued)

Table 3.62: (continued)

Vertrel KCD-9548 and KCD-9550 Wipe Solvents

Introduction

Vertrel KCD-9548 and Vertrel KCD-9550 are two proprietary blends formulated as wipe solvents. Vertrel KCD-9548 is an azeotrope-like blend of Vertrel XF hydrofluorocarbon with cyclohexane and acetone, whereas Vertrel KCD-9550 is an azeotrope-like blend of Vertrel XF hydrofluorocarbon and acetone. Both solvents are ideally suited for use as a gross wipe solvent; however, Vertrel KCD-9548 has a slight VOC compared with zero VOC for Vertrel KCD-9550.

Physical Properties

| Property* | Units | Vertrel® | Vertrel® |
|---------------------------------------|-----------|----------|----------|
| | | KCD-9548 | KCD-9550 |
| Boiling Point | °C | 52.0 | 60.6 |
| | °F | 125.6 | 141.1 |
| Liquid Density | g/cc | 1.37 | 1.37 |
| | lb/gal | 11.5 | 11.5 |
| Vapor Pressure | mmHg | 186 | 191 |
| | psi | 3.6 | 3.7 |
| Surface Tension | dyn/cm | 15.6 | 15.6 |
| Freezing Point | °C | <-50 | <-50 |
| | °F | <-80 | <-80 |
| Heat of Vaporization at boiling point | cal/g | 43 | 46 |
| | Btu/lb | 77 | 83 |
| Heat Capacity at 20°C (68°F) | cal/g °C | 0.30 | 0.30 |
| | Btu/lb °F | 0.30 | 0.30 |
| Viscosity | cps | 0.64 | 0.62 |

*At 25°C (77°F) except where indicated.

Vertrel® KCD-9548
Density and Vapor Pressure Change with Temperature

| Temperature, °C | (°F) | Density, | | Vapor Pressure, | |
|-----------------|-------|----------|----------|-----------------|--------|
| | | g/cc | (lb/gal) | mmHg | (psi) |
| 0 | (32) | 1.42 | (11.9) | 52 | (1.1) |
| 10 | (50) | 1.40 | (11.8) | 98 | (1.9) |
| 20 | (68) | 1.38 | (11.6) | 155 | (2.9) |
| 25 | (77) | 1.37 | (11.5) | 186 | (3.6) |
| 30 | (86) | 1.36 | (11.4) | 248 | (4.8) |
| 40 | (104) | 1.34 | (11.3) | 362 | (6.9) |
| 50 | (122) | 1.32 | (11.1) | 569 | (11.0) |
| 60 | (140) | 1.30 | (10.9) | 776 | (15.0) |

Preliminary Elastomer Compatibility
Immersion: 5 Minutes
at Room Temperature 25°C (77°F)

Compatible

| | |
|----------------------------|-----------------------|
| Polysulfide (Thiokol's FA) | EPDM (Nordel®) |
| Silicone | Butyl Rubber |
| Chlorosulfonated PE | Natural Rubber |
| Urethane | Neoprene |
| Buna-S | Adiprene |
| Buna-N | Viton® A and Viton® B |

Vertrel® KCD-9550 Specifications

| | |
|--------------------------|------------------|
| Vertrel® XF, % | 85.0 ± 1.0 |
| Acetone, % | 15.0 ± 1.0 |
| Appearance | Clear, Colorless |
| Nonvolatile Residue, ppm | 10.0 max. |
| Moisture, ppm | <200 |

Vertrel® KCD-9548 Specifications

| | |
|--------------------------|------------------|
| Vertrel® XF, % | 85.0 ± 1.0 |
| Acetone, % | 10.0 ± 1.0 |
| Cyclohexane, % | 5.0 ± 1.0 |
| Appearance | Clear, Colorless |
| Nonvolatile Residue, ppm | 10.0 max. |
| Moisture, ppm | <200 |

Exposure Limits

| Component | Limit, ppm | Type |
|-------------|------------|---------------------------|
| Vertrel® XF | AEL 200 | 8- and 12-hr TWA Ceiling* |
| | 400 | |
| Acetone | TLV 750 | 8-hr TWA |
| Cyclohexane | TLV 300 | 8-hr TWA |

TLV—Threshold limit value established by the American Conference of Government & Industrial Hygienists (ACGIH).

TWA—Time weighted average.

*A ceiling limit is the concentration that should not be exceeded during any part of the working day.

Vertrel® KCD-9550
Density and Vapor Pressure Change with Temperature

| Temperature, °C | (°F) | Density, | | Vapor Pressure, | |
|-----------------|-------|----------|----------|-----------------|--------|
| | | g/cc | (lb/gal) | mmHg | (psi) |
| 0 | (32) | 1.42 | (11.9) | 52 | (1.1) |
| 10 | (50) | 1.40 | (11.8) | 98 | (1.8) |
| 20 | (68) | 1.38 | (11.6) | 155 | (2.8) |
| 25 | (77) | 1.37 | (11.5) | 186 | (3.7) |
| 30 | (86) | 1.36 | (11.4) | 248 | (4.5) |
| 40 | (104) | 1.34 | (11.3) | 362 | (6.9) |
| 50 | (122) | 1.32 | (11.1) | 569 | (10.0) |
| 60 | (140) | 1.30 | (10.9) | 776 | (15.0) |

Preliminary Plastic Compatibility
Immersion: 5 Minutes
at Room Temperature 25°C (77°F)

Compatible

| | |
|---------------|-----------------------|
| Acrylic | HD Polyethylene |
| Polyethylene | Epoxy |
| Polypropylene | Phenolic |
| Polycarbonate | Teflon® TFE, FEP, PFA |
| Polystyrene | Polyester, PET, PBT |
| PVA, PVC | Acetal |
| Polyimides | Polysulfone |
| Nylon | |

(continued)

Table 3.62: (continued)

Vertrel MCA Cleaning Agent

Introduction

Vertrel MCA is a proprietary azeotrope of Vertrel XF hydrofluorocarbon with trans-1,2-dichloroethylene. It is ideally suited for use in vapor degreasing equipment. Its enhanced solvency power, compared to Vertrel XF alone, makes it particularly effective for precision and specialty cleaning applications in difficult soil situations. Vertrel MCA is nonflammable, has "zero" ozone depletion, and has low global warming potential. It can replace CFC-113, 1,1,1-trichloroethane (1,1,1-TCA), hydrochlorofluorocarbons (HCFCs), and perfluorocarbons (PFCs) in many applications.

Physical Properties

| Property* | Unit | Vertrel® | |
|---------------------------------------|-----------|-------------|--------------|
| | | MCA | CFC-113 |
| Boiling Point | °C (°F) | 39 (102) | 47.6 (117.6) |
| Liquid Density | g/cc | 1.41 | 1.56 |
| | lb/gal | 11.8 | 13.1 |
| Vapor Pressure | mmHg | 464 | 334 |
| | psia | 9.0 | 6.5 |
| Surface Tension | dyn/cm | 15.2 | 17.3 |
| Freezing Point | °C (°F) | <-50 (<-58) | -35 (-31) |
| Solubility of Water | wt% | 0.065 | 0.011 |
| Heat of Vaporization at Boiling Point | cal/g | 43.3 | 35.1 |
| | Btu/lb | 77.9 | 63.1 |
| Heat Capacity at 20°C (68°F) | cal/g-°C | 0.27 | 0.21 |
| | Btu/lb-°F | 0.27 | 0.21 |
| Viscosity | cPs | 0.49 | 0.68 |

*At 25°C (77°F), except where indicated

Density and Vapor Pressure Change with Temperature

| Temperature, °C (°F) | Density, g/cc (lb/g) | Vapor Pressure, mmHg (psia) |
|----------------------|----------------------|-----------------------------|
| 0 (32) | 1.47 (12.3) | 162 (3.1) |
| 10 (50) | 1.44 (12.0) | 258 (5.0) |
| 20 (68) | 1.42 (11.8) | 375 (7.3) |
| 25 (77) | 1.41 (11.8) | 446 (9.0) |
| 30 (86) | 1.39 (11.6) | 552 (10.7) |
| 40 (104) | 1.37 (11.4) | 795 (15.4) |
| 50 (122) | 1.35 (11.3) | 1111 (21.5) |
| 60 (140) | 1.33 (11.1) | 1509 (29.2) |

Soils Cleaned with Vertrel® MCA

| | |
|---------------|----------------|
| Mineral Oils | Cutting Oils |
| Vacuum Oils | Stamping Oils |
| Waxes | Hydraulic Oils |
| Heavy Greases | Gear Oils |

Preliminary Plastic Compatibility Immersion:
1 Week at 55°C (131°F)

| Compatible | |
|----------------------------|-----------------------|
| Polyethylene | HD Polyethylene |
| Polypropylene | Epoxy |
| Nylon | Phenolic |
| Polyester, PET, and PBT | Teflon® TFE, FEP, PFA |
| Acetal | Polyimides |
| Require Additional Testing | |
| ABS | Polycarbonate |
| Acrylic | Polystyrene |
| Polyvinyl Chloride | Polyphenylene Oxide |
| Polysulfone | |

Preliminary Elastomer Compatibility Immersion:
1 Week at 55°C (131°F)

| Compatible | |
|----------------------------|-----------------|
| Poly sulfide (Thiokol FA) | EPDM (Norde!®) |
| Chlorosulfonated PE | Butyl Rubber* |
| Buna-S* | Natural Rubber* |
| Require Additional Testing | |
| Buna-N | Polychloroprene |
| Urethane | Silicone |
| Fluoroelastomers | |

*Swelling, but with low extractables

Exposure Limits

| Component | Limit, ppm | Type |
|----------------------------|----------------------|----------------------|
| Vertrel® XF | AEL ^a 200 | 8- and 12-hr TWA |
| | 400 | Ceiling ^b |
| trans-1,2-dichloroethylene | TLV ^c 200 | 8-hr TWA |

^aAEL is the DuPont Acceptable Exposure Limit. Where governmentally imposed occupational exposure limits that are lower than the AEL are in effect, such limits shall take precedence.

^bA ceiling limit is the concentration that should not be exceeded during any part of the working day.

^cTLV is the Threshold Limit Value established by the American Conference of Government Industrial Hygienists (ACGIH).

Vertrel® MCA Specifications

| | |
|----------------------------|------------------|
| Vertrel® XF | 62.0% ± 1.0* |
| trans-1,2-dichloroethylene | 38.0% ± 1.0* |
| Appearance | Clear, Colorless |
| Nonvolatile Residue | 10.0 ppm max. |
| Moisture | < 200 ppm |

*Wt%

(continued)

Table 3.62: (continued)

Vertrel MCA Plus Cleaning Agent

Introduction

Vertrel MCA Plus is a proprietary azeotrope of Vertrel XF hydrofluorocarbon with trans-1,2-dichloroethylene and cyclopentane. It is ideally suited for use in vapor degreasing equipment for precision cleaning and specialty applications. Its enhanced solvency power makes it particularly effective in difficult soil situations. Vertrel MCA Plus is nonflammable, has "zero" ozone depletion, and has low global warming potential. It can replace CFC-113, 1,1,1-trichloroethane (1,1,1-TCA), hydrochlorofluorocarbons (HCFC), and perfluorocarbons (PFC) in many applications.

Physical Properties

| Property* | Unit | Vertrel® MCA Plus | HCFC-141b | 1,1,1 TCA | Freon® TF |
|----------------------|-----------|-------------------|-----------|-----------|-----------|
| Boiling Point | °C | 37 | 32 | 74 | 48 |
| | °F | 99 | 90 | 165 | 118 |
| Liquid Density | g/cc | 1.28 | 1.24 | 1.31 | 1.56 |
| | lb/gal | 10.7 | 10.3 | 11.0 | 13.1 |
| Vapor Pressure | mmHg | 440 | 594 | 140 | 226 |
| | psi | 8.5 | 11.5 | 2.7 | 4.4 |
| Surface Tension | dyne/cm | 15.9 | 19.3 | 25.9 | 17.3 |
| Freezing Point | °C | <-50 | -103 | <-50 | -35 |
| | °F | <-58 | -154 | <-58 | -31 |
| Heat of Vaporization | cal/g | 55 | 53 | 57 | 35 |
| at boiling point | Btu/lb | 98 | 94 | 102 | 63 |
| Heat Capacity | cal/g °C | 0.22 | 0.25 | 0.26 | 0.22 |
| | Btu/lb °F | 0.22 | 0.25 | 0.26 | 0.22 |
| Viscosity | cP | 0.61 | 0.43 | 0.45 | 0.67 |
| Flash Point | | None | None | None | None |

*At 25°C (77°F) except where indicated.

Density and Vapor Pressure Change with Temperature

| Temperature, °C | (°F) | Density, | | Vapor Pressure, | |
|-----------------|-------|----------|----------|-----------------|--------|
| | | g/cc | (lb/gal) | mmHg | (psi) |
| 0 | (32) | 1.33 | (11.1) | 124 | (2.4) |
| 10 | (50) | 1.31 | (10.9) | 222 | (4.3) |
| 20 | (68) | 1.29 | (10.8) | 321 | (6.2) |
| 25 | (77) | 1.28 | (10.7) | 440 | (8.5) |
| 30 | (86) | 1.26 | (10.5) | 517 | (10.1) |
| 40 | (104) | 1.24 | (10.3) | 776 | (14.9) |
| 50 | (122) | 1.21 | (10.8) | 1034 | (19.9) |
| 60 | (140) | 1.18 | (9.83) | 1396 | (27.1) |

Soils Cleaned with Vertrel® MCA Plus

| | |
|---------------|---------------------------------|
| Cutting Oils | Stamping Oils |
| Drawing Oils | Synthetic Oils (POE, POG, etc.) |
| Gear Oils | Vacuum Oils |
| Heavy Greases | Hydraulic Oils |
| Mineral Oils | Waxes |

Plastic Compatibility Immersion: 15 min at 37°C (99°F)

| Compatible | |
|------------------------|-----------------------|
| Acetal | Polyimides |
| Epoxy | Polypropylene |
| HD Polyethylene | Polysulfone |
| Nylon | (e.g., GE's Ultem) |
| Phenolic | PVA |
| Polyester, PET and PBT | PVC |
| Polyethylene | Teflon® TFE, FEP, PFA |

Elastomer Compatibility Immersion: 15 min at 37°C (99°F)

| Compatible | |
|----------------------|----------------------------------|
| Buna-S* | Neoprene |
| Butyl Rubber* | Polysulfide (e.g., Thiokol's FA) |
| Chlorosulfonated PE | Polyurethane |
| EPDM (e.g., Nordel®) | Viton® A |
| Natural Rubber* | Viton® B |

*Swelling, but with low extractables

Exposure Limits

| Component | Limit, ppm | Type |
|----------------------------|------------|---------------------------|
| Vertrel® XF | AEL 200 | 8- and 12-hr TWA Ceiling* |
| | 400 | |
| trans-1,2-dichloroethylene | TLV 200 | 8-hr TWA |
| Cyclopentane | TLV 600 | 8-hr TWA |
| Vertrel® MCA Plus | AEL 221 | Calculated ** Ceiling* |
| | 400 | |

AEL—DuPont's acceptable exposure limit.

TLV—Threshold limit value established by the American Conference of Government & Industrial Hygienists (ACGIH).

TWA—Time weighted average.

*A ceiling limit is the concentration that should not be exceeded during any part of the working day.

**Calculated in accordance with ACGIH Formula for TLVs for mixtures.

Vertrel® MCA Plus Specifications

| | |
|-------------------------------|------------------|
| Vertrel® XF, % | 46.0 ± 1.0 |
| trans-1,2-dichloroethylene, % | 40.0 ± 1.0 |
| Cyclopentane, % | 14.0 ± 2.0 |
| Appearance | Clear, colorless |
| Nonvolatile Residue, ppm | 10.0 max. |
| Moisture, ppm | <200 |

(continued)

Table 3.62: (continued)

Vertrel SMT Cleaning Agent

Introduction

Vertrel SMT is a proprietary azeotrope-like blend of Vertrel XF hydrofluorocarbon with trans-1,2-dichloroethylene and methanol. It is ideally suited for use in vapor degreasing equipment with solvency power for cleaning ionic soils and flux residues from electronic assemblies. It can also be used for precision and general industrial cleaning where this enhanced solvency is required. Vertrel SMT is nonflammable, has zero ozone depletion potential, and has low global warming potential. It can replace CFC-113, 1,1,1-trichloroethane (1,1,1-TCA), hydrochlorofluorocarbon (HCFC), and perfluorocarbon (PFC) fluids in many applications.

Physical Properties

| Property* | Vertrel® SMT | Freon® TMS |
|-------------------------------------------------------|--------------|--------------|
| Boiling Point, °C (°F) | 37 (99) | 39.7 (103.5) |
| Liquid Density, g/cc (lb/gal) | 1.35 (11.3) | 1.48 (12.3) |
| Vapor Pressure, mmHg (psia) | 486 (9.4) | 429 (8.3) |
| Surface Tension, dyn/cm | 15.5 | 17.4 |
| Freezing Point, °C (°F) | <-50 (<-58) | -55 (-66) |
| Solubility of Water, wt% | 0.34 | 0.27 |
| Heat of Vaporization at Boiling Point, cal/g (Btu/lb) | 49.5 (89.1) | 50.4 (90.7) |
| Heat Capacity at 20°C (68°F), cal/g·°C (Btu/lb·°F) | 0.27 (0.27) | 0.24 (0.24) |
| Viscosity, cPs | 0.49 | 0.70 |

*At 25°C (77°F), except where indicated.

Preliminary Elastomer Compatibility
Immersion: One Week at 55°C (131°F)

| Compatible | | |
|----------------------------|-----------------|--|
| Polysulfide (Thiokol FA) | EPDM (Nordel®) | |
| Chlorosulfonated PE | Butyl Rubber* | |
| Buna-S* | Natural Rubber* | |
| Require Additional Testing | | |
| Buna-N | Polychloroprene | |
| Urethane | Silicone | |
| Fluoroelastomers | | |

*Swelling, but with low extractables

Exposure Limits

| Component | Limit, ppm | Type |
|----------------------------|-----------------------|---------------------------------------|
| Vertrel® XF | AEL ^a 200 | 8- and 12-hr TWA Ceiling ^d |
| | 400 | |
| trans-1,2-dichloroethylene | TLV ^b 200 | 8-hr TWA |
| Methanol | TLV ^b 200 | 8-hr TWA |
| | STEL ^c 250 | |
| Stabilizer | TLV ^b 20 | 8-hr TWA |

^aAEL is the DuPont Acceptable Exposure Limit. Where governmentally imposed occupational exposure limits that are lower than the AEL are in effect, such limits shall take precedence.

^bTLV is the Threshold Limit Value established by the American Conference of Government Industrial Hygienists (ACGIH).

^cSTEL is short-term exposure limit. A STEL is the concentration to which workers can be exposed continuously for a short period of time, usually 15 min, without suffering from acute effects, e.g., irritation.

^dA ceiling limit is the concentration that should not be exceeded during any part of the working day.

Density and Vapor Pressure
Change with Temperature

| Temperature, °C (°F) | Density, g/cc (lb/g) | Vapor Pressure, mmHg (psia) |
|----------------------|----------------------|-----------------------------|
| 0 (32) | 1.41 (11.7) | 169 (3.3) |
| 10 (50) | 1.38 (11.5) | 265 (5.1) |
| 20 (68) | 1.36 (11.4) | 397 (7.7) |
| 25 (77) | 1.35 (11.3) | 486 (9.4) |
| 30 (86) | 1.34 (11.2) | 581 (11.2) |
| 40 (104) | 1.31 (11.0) | 839 (16.2) |
| 50 (122) | 1.29 (10.8) | 1,192 (23.1) |
| 60 (140) | 1.27 (10.6) | 1,627 (31.5) |

Preliminary Plastic Compatibility
Immersion: One Week at 55°C (131°F)

| Compatible | |
|----------------------------|-----------------------|
| Polyethylene | HD Polyethylene |
| Polypropylene | Epoxy |
| Nylon | Phenolic |
| Polyester, PET, and PBT | Teflon® TFE, FEP, PFA |
| Acetal | Polyimides |
| Require Additional Testing | |
| ABS | Polycarbonate |
| Acrylic | Polystyrene |
| Polyvinyl Chloride | Polyphenylene Oxide |
| Polysulfone | |

Vertrel® SMT Specifications

| | |
|----------------------------|------------------|
| Vertrel® XF | 50.5% ± 1.0* |
| trans-1,2-dichloroethylene | 43.0% ± 1.0 |
| Methanol | 6.0% ± 0.3 |
| Stabilizer | 0.5% ± 0.1 |
| Appearance | Clear, Colorless |
| Nonvolatile Residue | 10.0 ppm max. |
| Moisture | <200 ppm |

*Wt%

(continued)

Table 3.62: (continued)

Vertrel XMS Cleaning Agent

Introduction

Vertrel XMS is a proprietary azeotrope-like blend of Vertrel XF hydrofluorocarbon with trans-1,2-dichloroethylene, cyclopentane, and methanol. It is ideally suited for use in vapor degreasing equipment with solvency power for cleaning ionic soils and flux residues from electronic assemblies.

Physical Properties

| Property (at 25°C) | Unit | Vertrel® XMS | Freon® TMS | HCFC-141b with MeOH |
|---------------------------------------|-----------|--------------|------------|---------------------|
| Boiling Point | °C | 36 | 40 | 29 |
| | °F | 96 | 104 | 85 |
| Liquid Density | g/cc | 1.22 | 1.48 | 1.22 |
| | lb/gal | 10.2 | 12.3 | 10.1 |
| Vapor Pressure | mmHg | 465 | 429 | 527 |
| | psi | 9.0 | 8.3 | 10.2 |
| Surface Tension | dyne/cm | 15.9 | 17.4 | 18.5 |
| Freezing Point | °C | <-50 | -55 | <-103 |
| | °F | <-58 | -67 | <-154 |
| Heat of Vaporization at boiling point | cal/g | 61 | 50 | 62 |
| | Btu/lb | 110 | 91 | 111 |
| Heat Capacity at 20°C (68°F) | cal/g °C | 0.24 | 0.24 | 0.26 |
| | Btu/lb °F | 0.24 | 0.24 | 0.26 |
| Viscosity | cP | 0.65 | 0.7 | 0.45 |
| Flash Point | | None | None | None |

*At 25°C (77°F) except where indicated.

Exposure Limits

| Component | Limit, ppm | Type |
|----------------------------|----------------|---------------------------|
| Vertrel® XF | AEL 200 400 | 8- and 12-hr TWA Ceiling* |
| trans-1,2-dichloroethylene | TLV 200 | 8-hr TWA |
| Cyclopentane | TLV 600 | 8-hr TWA |
| Methanol | TLV200 | 8-hr TWA |
| Vertrel® XMS | AEL 210 400 | Calculated** Ceiling* |

AEL—DuPont's acceptable exposure limit.

TLV—Threshold limit value established by the American Conference of Government & Industrial Hygienists (ACGIH).

TWA—Time weighted average.

*A ceiling limit is the concentration that should not be exceeded during any part of the working day.

**Calculated in accordance with ACGIH Formula for TLVs for mixtures.

Vertrel® XMS Specifications

| | |
|-------------------------------|------------------|
| Vertrel® XF, % | 54.5 ± 1.0 |
| trans-1,2-dichloroethylene, % | 25.0 ± 1.0 |
| Cyclopentane, % | 14.0 ± 2.0 |
| Methanol, % | 6.0 ± 0.3 |
| Inerting Agent, % | 0.5 ± 0.1 |
| Appearance | Clear, colorless |
| Nonvolatile Residue, ppm | 10.0 max. |
| Moisture, ppm | <200 |

Density and Vapor Pressure Change with Temperature

| Temperature, °C | °F | Density, | | Vapor Pressure, | |
|-----------------|-------|----------|----------|-----------------|--------|
| | | g/cc | (lb/gal) | mmHg | (psi) |
| 0 | (32) | 1.27 | (10.6) | 155 | (3.1) |
| 10 | (50) | 1.25 | (10.4) | 259 | (4.9) |
| 20 | (68) | 1.23 | (10.3) | 414 | (8.1) |
| 25 | (77) | 1.22 | (10.2) | 465 | (9.2) |
| 30 | (86) | 1.21 | (10.1) | 620 | (12.1) |
| 40 | (104) | 1.19 | (9.9) | 931 | (17.9) |
| 50 | (122) | 1.17 | (9.8) | 1241 | (23.7) |
| 60 | (140) | 1.15 | (9.6) | 1706 | (33.1) |

Plastic Compatibility Immersion:
15 min at boiling point of
Vertrel® XMS (35.5°C [96°F])

| Compatible | |
|------------------------|-----------------------|
| Acetal | Polyimides |
| Epoxy | Polypropylene |
| HD polyethylene | Polysulfone |
| Nylon | (e.g., GE's Ultem) |
| Phenolic | PVA |
| Polyester, PET and PBT | PVC |
| Polyethylene | Teflon® TFE, FEP, PFA |

Elastomer Compatibility Immersion:
15 min at boiling point
of Vertrel® XMS (35.5°C [96°F])

| Compatible | |
|----------------------|----------------------------------|
| Buna-S* | Neoprene |
| Butyl Rubber* | Polysulfide (e.g., Thiokol's FA) |
| Chlorosulfonated PE | Polyurethane |
| EPDM (e.g., Nordel®) | Viton® A |
| Natural Rubber* | Viton® B |

*Swelling, but with low extractables

(continued)

Table 3.62: (continued)

Vertrel XF Specialty Fluid

Introduction

Vertrel XF is a proprietary hydrofluorocarbon fluid with "zero" ozone depletion and a low global warming potential ideally suited for use in vapor degreasing equipment for cleaning, rinsing, and drying. It can replace current hydrochlorofluorocarbon (HCFC) and perfluorocarbon (PFC) fluids in most applications. Unique physical properties include a higher boiling point and lower surface tension compared to CFC-113. This combined with non-flammability, chemical and thermal stability, low toxicity, and ease of recovery by distillation make Vertrel XF ideal for a broad range of applications. Solvency is more selective than CFC-113, but can be enhanced by use of appropriate azeotropes and blends with alcohols.

Physical Properties

| Property* | Vertrel® XF | CFC-113 |
|-------------------------------------------|----------------|--------------|
| Molecular Weight | 252 | 187 |
| Boiling Point, °C (°F) | 55 (130) | 47.6 (117.6) |
| Surface Tension, dyn/cm | 14.1 | 17.3 |
| Liquid Density, g/cc (lb/gal) | 1.58 (13.2) | 1.56 (13.1) |
| Freezing Point, °C (°F) | -80 (-112) | -35 (-31) |
| Solubility in Water, ppm of Water, ppm | 140 490 | 170 110 |
| Critical Temperature, °C (°F) | 181 (357) | 214 (417) |
| Critical Pressure, psia (atm) | 331.9 (22.6) | 495 (33.7) |
| Critical Volume, cc/mol | 433 | 325 |

*At 25°C (77°F), except where indicated.

Environmental Properties

| Class: | HFC | CFC |
|------------------------------------|-----------------------------------------------|-----------------------------------------------|
| | Vertrel® XF | CFC-113 |
| Formula | C ₃ H ₂ F ₁₀ | C ₂ Cl ₃ F ₃ |
| Flash Point | None | None |
| Flammable Range in Air | None | None |
| Atmospheric Lifetime, yr | 20.8 | 100 |
| Ozone Depletion Potential (ODP) | 0.0 | 0.8 |
| Global Warming Potential (HGWP) | 0.25 | 1.35 |

Heat Transfer Properties

| Property* | Vertrel® XF |
|------------------------------------------------------------|----------------|
| Heat of Vaporization (at boiling point), cal/g (Btu/lb) | 31.0 (55.7) |
| Specific Heat at 20°C (68°F), cal/g·°C (Btu/lb·°F) | 0.27 (0.27) |
| Vapor Pressure, mmHg (psia) | 226 (4.4) |
| Viscosity, cPs | 0.67 |

*At 25°C (77°F), except where indicated.

Density and Vapor Pressure Change
with Temperature

| Temperature, °C (°F) | Density, g/cc (lb/g) | Vapor Pressure, mmHg (psia) |
|-------------------------|-------------------------|-----------------------------------|
| -20 (-4) | 1.70 (14.2) | 16 (0.3) |
| -10 (14) | 1.68 (14.0) | 36 (0.7) |
| 0 (32) | 1.66 (13.8) | 62 (1.2) |
| 10 (50) | 1.62 (13.5) | 109 (2.1) |
| 20 (68) | 1.60 (13.3) | 176 (3.4) |
| 30 (86) | 1.57 (13.1) | 284 (5.5) |
| 40 (104) | 1.55 (12.9) | 434 (8.4) |
| 50 (122) | 1.51 (12.6) | 641 (12.4) |
| 60 (140) | 1.49 (12.4) | 921 (17.8) |
| 70 (158) | 1.46 (12.2) | 1288 (24.9) |
| 80 (176) | 1.43 (11.9) | 1753 (33.9) |
| 90 (194) | 1.40 (11.7) | 2343 (45.3) |
| 100 (212) | 1.38 (11.5) | 3072 (59.4) |
| 110 (230) | 1.34 (11.2) | 3961 (76.6) |
| 120 (248) | 1.32 (11.0) | 5032 (97.3) |
| 130 (266) | 1.30 (10.8) | 6309 (122.0) |

Vertrel® XF Azeotropes

| Vertrel® | XF With | Boiling Point, °C (°F) |
|----------|----------------------------------------------------|---------------------------|
| XM | Methanol | 46 (115) |
| XE | Ethanol | 52 (126) |
| MCA | <i>trans</i> -1,2-dichloroethylene | 39 (102) |
| SMT | <i>trans</i> -1,2-dichloroethylene and Methanol | 37 (99) |

Vertrel® XF Solvating Agents

| |
|--------------------------------------|
| Dibasic Esters (DBE) |
| Diisobutyl DBE |
| Methyl Decanoate |
| Isopropyl Myristate |
| <i>N</i> -Methyl-2-Pyrrolidone (NMP) |
| Tetrahydrofurfuryl Alcohol (THFA) |
| Aliphatic Hydrocarbons |
| Aliphatic Alcohols |

(continued)

Table 3.62: (continued)

| Plastic Compatibility Immersion: Two Weeks at 50°C (122°F) | | | | Elastomer Compatibility Immersion, Sealed Tubes: Two Weeks at 50°C (122°F) | | | |
|---------------------------------------------------------------|-------------------------|----------------|-------------------|-------------------------------------------------------------------------------|--------|--------------------|-----------------------------|
| Plastic | Common Brand Name | Rating | Weight Gain, % | Elastomer | Rating | Linear Swell, % | Units Hardness Change |
| HDPE | "Alathon" | 0 | 0.3 | Natural Rubber | 0 | -0.6 | -1 |
| PP | "Tenite" | 0 | 0.5 | Butyl Rubber | 0 | 1.0 | -1 |
| PS | "Styron" | 0 | 0.3 | Nordel® RPDM | 0 | -1.0 | -2 |
| PVC | | 0 | 0.1 | Neoprene CR | 0 | 0.2 | 1 |
| CPVC | | 0 | 0.1 | SBR | 0 | 0.7 | 0 |
| PTFE | Teflon® | 1 ^a | 3.5 | Nitrile Rubber | | | |
| ETFE | Tefzel® | 1 | 1.4 | NBR | 0 | -0.6 | 2 |
| PVDF | "Kynar" | 0 | 0.4 | NHBR | 0 | 3.9 | -8 |
| Ionomer | Surllyn® | 0 | 0.5 | Vamac® EA | 2* | 13.9 | -12 |
| Acrylic | Lucite® | 2 | — ^b | Hypalon® CSM | 0 | 1.3 | 0 |
| ABS | "Kralastic" | 0 | 0.0 | Fluoroelastomer | | | |
| Phenolic | | 0 | 0.0 | Viton® A | 2 | 17.3 | -14 |
| Cellulosic | "Ethocel" | 1 ^c | 4.7 | Viton® B | 2 | 22.8 | -34 |
| Epoxy | | 0 | 0.0 | Zalak® | 2* | 13.7 | -13 |
| Acetal | Delrin® | 0 | 0.2 | Kalrez® | 2 | 21.6 | -20 |
| PPO | "Noryl" | 0 | 0.2 | Fluorinated Silicone | 2 | 14.1 | -11 |
| PEK | "Ultrapak" | 0 | -0.1 | Silicone | 0 | 0.5 | -4 |
| PEEK | "Victrex" | 0 | -0.1 | Epichlorohydrin Homopolymer | 0 | -0.5 | 1 |
| PET | Rynite® | 0 | 0.2 | Copolymer | 0 | 0.0 | 2 |
| PBT | "Valox" | 0 | 0.0 | "Adiprene" U | 1* | 2.7 | -2 |
| Polyarylate | Arylon® | 0 | 0.0 | FA Polysulfide | 0 | 1.5 | 0 |
| LCP | | 0 | 0.1 | Thermoplastic | | | |
| Polyimide | | | | Alcryn® | 2* | -1.2 | 13 |
| A | VespeI® | 0 | 0.0 | "Santoprene" | 0 | 0.1 | 0 |
| PB | "Ultem" | 0 | 0.1 | "Geoplast" | 1* | -0.5 | -3 |
| PAI | "Torlon" | 0 | 0.0 | HytreI® Polyester | 0 | 0.3 | 0 |
| PPS | "Rython" | 1 | 2.7 | | | | |
| Polysulfone | "Udel" | 0 | -0.1 | | | | |
| Polyaryl Sulfone | "Rydel" | 0 | -0.1 | | | | |

Rating: 0—Compatible; 1—Borderline; 2—Incompatible
*Noticeable extraction affecting rating

| Rating | Physical Change |
|----------------|-------------------|
| 0—Compatible | *More Flexible |
| 1—Borderline | *Sample Dissolved |
| 2—Incompatible | *Some Extraction |

Vertrel® XF Specifications

| | |
|---------------------------|------------------|
| Fluoropentanes | 99.9% min. |
| Appearance | Clear, Colorless |
| Nonvolatile Residue (NVR) | 2.0 ppm max. |
| Moisture | <50 ppm |
| Acidity, mg KOH/g | 0.01 max. |

Exposure Limits

| Component | Limit, ppm | Type |
|-------------|-----------------|------------------------------------------|
| Vertrel® XF | AEL* 200 400 | 8- and 12-hr TWA Ceiling ^b |

*AEL is the DuPont Acceptable Exposure Limit. Where governmentally imposed occupational exposure limits that are lower than the AEL are in effect, such limits shall take precedence.

^bA ceiling limit is the concentration that should not be exceeded during any part of the working day.

(continued)

Table 3.62: (continued)

Vertrel XSi Cleaning Agent

Introduction

Vertrel XSi is a proprietary blend of Vertrel XF hydrofluorocarbon and hexamethyldisiloxane. It is ideally suited for use in medical applications as a solvent for cleaning or depositing of silicone oil-based lubricants. It is also used as a swelling media for silicone rubber tubing.

Physical Properties

| Property (at 25°C) | Unit | Vertrel® XSi | Freon® TF | HCFC-141b |
|---------------------------------------|-----------|--------------|-----------|-----------|
| Boiling Point | °C | 57 | 48 | 32 |
| | °F | 134 | 118 | 90 |
| Liquid Density | g/cc | 1.17 | 1.56 | 1.24 |
| | lb/gal | 9.8 | 13.1 | 10.3 |
| Vapor Pressure | mmHg | 135 | 226 | 594 |
| | psi | 2.6 | 4.4 | 11.5 |
| Surface Tension | dyne/cm | 14.0 | 17.3 | 19.3 |
| Freezing Point | °C | <-50 | -35 | -103 |
| | °F | <-80 | -31 | -154 |
| Heat of Vaporization at boiling point | cal/g | 38 | 35 | 53 |
| | Btu/lb | 69 | 63 | 94 |
| Heat Capacity at 20°C (68°F) | cal/g °C | N/A | 0.22 | 0.25 |
| | Btu/lb °F | N/A | 0.22 | 0.25 |
| Viscosity | cP | 0.60 | 0.67 | 0.43 |
| Flash Point | | None | None | None |

*At 25°C (77°F) except where indicated.

Swelling of Polysilicone Tubing

| Test | Vertrel® XSi | Freon® TF | Hexane |
|----------------------------|--------------|-----------|--------|
| At Room Temperature | | | |
| % Change in Width | 15 | 16 | 23 |
| % Change in Weight | 60 | 133 | 83 |
| At Boiling Point* | | | |
| % Change in Width | 20 | 20 | 24 |
| % Change in Weight | 64 | 144 | 63 |

*47°C (117°F) for Freon® TF; 54°C (129°F) for Vertrel® KCD-XSi; 68°C (154°F) for Hexane

Plastic Compatibility
Immersion: 15 min in Vertrel® XSi at Boiling Point 56.6°C (133.9°F)

| Compatible | |
|------------------------|--------------------------------|
| Polyethylene | HD polyethylene |
| Polypropylene | Epoxy |
| Nylon | Phenolic |
| Polyester, PET and PBT | Teflon® TFE, FEP, PFA |
| Acetal | Polyimides |
| PVC | Polysulfone (e.g., GE's Ultem) |
| Polycarbonate | Polyurethane |

Vertrel® XSi Specifications


| | |
|--------------------------|------------------|
| Vertrel® XF, % | 57.0 ± 1.0 |
| Hexamethyldisiloxane, % | 43.0 ± 1.0 |
| Appearance | Clear, Colorless |
| Nonvolatile Residue, ppm | 10.0 max. |
| Moisture, ppm | <200 |

Solubility of Typical Silicone Fluids in Vertrel® XSi at Room Temperature (% Oil Loading in Solvent)

| Oil | Vertrel® XSi | Freon® TF | Hexane |
|----------------|--------------|-----------|--------|
| DC-200* | 14 | 19 | 25 |
| DC-360* | 21 | 24 | 46 |
| DC-550* | 33 | 39 | 58 |
| DC-1107* | 45 | 51 | 65 |
| NuSil Med 4159 | 28 | 29 | 31 |

*As manufactured by Dow Corning.

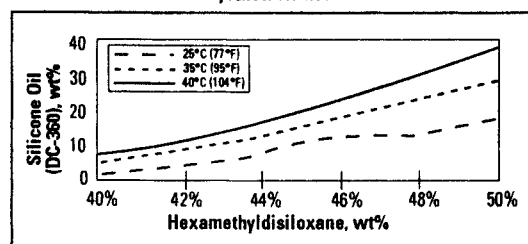Solubility of Silicone Fluid (DC-360) in a Blend of Vertrel® XF + Hexamethyldisiloxane

Elastomer Compatibility
Immersion: 15 min in Vertrel® XSi at Boiling Point 56.6°C (133.9°F)

Compatible

| | |
|----------------------------------|-----------------|
| Polysulfide (e.g., Thiokol's FA) | EPDM (Norden®) |
| Chlorosulfonated PE | Butyl Rubber* |
| Buna-S* | Natural Rubber* |
| Polyurethane | Neoprene |
| Viton® A | Viton® B |

*Swelling, but with low extractable

Exposure Limits

| Component | Limit, ppm | Type |
|---------------------------|----------------|------------------------------|
| Vertrel® XF | AEL 200 400 | 8- and 12-hr TWA Ceiling* |
| Hexamethyl- disiloxane | IHG 200 | 8-hr TWA |
| Vertrel® XSi | AEL 200 400 | Calculated** Ceiling* |

AEL—DuPont's acceptable exposure limit.

IHG—Industrial Hygiene Guidelines.




TWA—Time weighted average.

*A ceiling limit is the concentration that should not be exceeded during any part of the working day.

**Calculated in accordance with ACGIH Formula for TLVs for mixtures.

Table 3.63: Occidental Chemical (OX SOL Solvents) (27)





Pure OXSOL Products (27)

| OX SOL PRODUCT | HOW WILL YOU USE IT? | WHY? | |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>OX SOL 100 100% Parachlorobenzotrifluoride (PCBTf)</p> | <ul style="list-style-type: none"> To clean metal, plastics, electronics, and glass. To dissolve resins in paints, coatings, inks, adhesives, and other resin applications. To dilute for viscosity adjustment, for easy application. | <ul style="list-style-type: none"> To reduce or eliminate VOCs*. To reduce or eliminate HAPs** For selective solvency. For its moderate evaporation rates. For its high stability. It is recyclable. For high purity, low residue. For classical solvent performance. It is not miscible with water. | |
|  | <p>OX SOL 10 100% Monochlorotoluene (MCT)</p> | <ul style="list-style-type: none"> As an aggressive solvent in formulations designed to remove paint and polymeric coatings. As a cleanup solvent in the painting, coating, and printing industries. As an additive to dissolve sludge in heavy fuels, asphalt, and coke applications. | <ul style="list-style-type: none"> For its low cost. To reduce or eliminate HAPs. For its aggressive solvency. When a slow evaporation rate is needed. No stabilizers are required. It is recyclable. It is approved as FIFRA*** inert. |
|  | <p>OX SOL 1000 100% 3,4-Dichlorobenzotrifluoride (3,4-DCBTf)</p> | <ul style="list-style-type: none"> In precision cleaning applications, when a high flashpoint is required. As a stable solvent where contact with oxidizing media may occur. As a stable high flash heat transfer medium. | <ul style="list-style-type: none"> For its high flashpoint (170°). For its slow evaporation rate. For its low reactivity. For selective solvency. It is exceptionally stable. Where high purity and low residue are required. To reduce or eliminate HAPs. |
|  | <ul style="list-style-type: none"> As a stable reaction medium. As an adsorption medium for chlorine and oxygen. In agricultural and pharmaceutical applications, as an extraction medium. | <p>* Volatile Organic Compounds are regulated by Title I of the Clean Air Act of 1990. ** Hazardous Air Pollutants are regulated by Title III of the Clean Air Act of 1990. *** Federal Insecticide Fungicide Rodenticide Act.</p> | |

(continued)

Table 3.63: (continued)

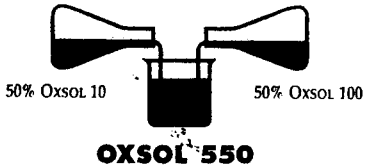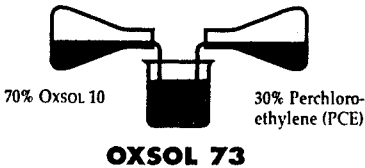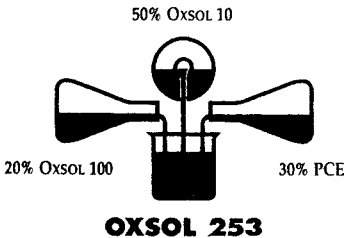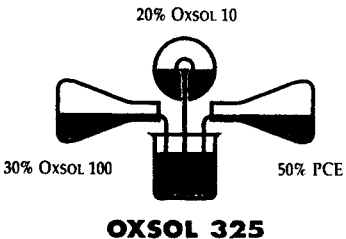Blended OXSOL Products (27)

| | OXSOL BLEND | HOW CAN YOU USE IT? | WHY? |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Combustible Blend |  <p>50% Oxsol 10 50% Oxsol 100</p> <p>OXSOL 550</p> | <ul style="list-style-type: none"> To dissolve resins in paints, coatings, inks, adhesives, and other resin applications. | <ul style="list-style-type: none"> To eliminate HAPs. To reduce VOC (55%). For moderate solvency. For slow to moderate evaporation. For economy. |
| |  <p>70% Oxsol 10 30% Perchloroethylene (PCE)</p> <p>OXSOL 73</p> | <ul style="list-style-type: none"> General purpose heavy duty cleaning. | <ul style="list-style-type: none"> To reduce HAPs (61%). For a low-cost, aggressive solvent. For non-flammability. To minimize worker exposure to PCE. For slow evaporation. |
| Non-Flammable Blends |  <p>50% Oxsol 10</p> <p>20% Oxsol 100 30% PCE</p> <p>OXSOL 253</p> | <ul style="list-style-type: none"> General purpose heavy duty cleaning. | <ul style="list-style-type: none"> To reduce VOCs (21%). To reduce HAPs (37%). For a low-cost, aggressive solvent. For non-flammability. To minimize worker exposure to PCE. For slow to moderate evaporation. |
| |  <p>20% Oxsol 10</p> <p>30% Oxsol 100 50% PCE</p> <p>OXSOL 325</p> | <ul style="list-style-type: none"> Spray and wipe cleaning applications. | <ul style="list-style-type: none"> To reduce VOCs (28%). To reduce HAPs (44%). For non-flammability. To minimize worker exposure to PCE. For fast evaporation (fastest of all Oxsol blends). |

(continued)

Table 3.63: (continued)

Property Comparison

| Product | Evaporation Rate ^a | Flash Point (°F) | Kauri Butanol Value | Solubility Parameter (cal/cm ³) ^{1/2} | Boiling Point (°C) | Density (lbs/gal 20°C) |
|------------------------------------|-------------------------------|-------------------|---------------------|------------------------------------------------------------|--------------------|------------------------|
| OXSOL 100 | 0.9 | 109 | 64 | 8.63 | 139 | 11.2 |
| OXSOL 1000 | 0.2 | 170 | 69 | 8.89 | 174 | 12.3 |
| OXSOL 10 | 0.4 - 0.8 | 123 | 110 | 9.6 | 159 - 162 | 9 |
| OXSOL 550 | 0.7 | 113 | 92 | 8.93 | 142 - 159 | 10.0 |
| OXSOL 73 | 0.6 | None ^a | 114 | 9.11 | 129 - 158 | 10.3 |
| OXSOL 253 | 0.6 | None ^b | 109 | 9.94 | 127 - 159 | 10.7 |
| OXSOL 325 | 1.2 | None ^a | 100 | 8.81 | 121 - 155 | 11.8 |
| Methylene chloride | 14.5 | None | 136 | 9.9 | 40 | 11 |
| Perchloroethylene | 1.5 - 2.59 | None | 90 | 9.8 | 121 | 13.5 |
| Trichloroethylene | 6.39 | None | 130 | 9.3 | 87 | 12.1 |
| 1,1,1-Trichloroethane ^c | 6 | None | 124 | 8.9 | 74 | 11 |
| CFC 113 ^{d,e} | 21 | None | 31 | 7.2 | 48 | 13.1 |
| Dibasic ester | 0.009 | 212 | na ^f | 9.2 | 210 - 215 | 7.3 |
| d-Limonene | 0.1 | 118 | 60 | — | 178 | 7.0 |
| Toluene | 2.0 | 40 - 45 | 105 | 8.9 | 111 | 7.2 |
| Xylene | 0.77 - 0.9 | 85 | 98 | 9.9 | 135 - 143 | 7.2 |
| Acetone | 6.1 | 0 | na | 9.8 | 56 | 6.6 |

^a N-butyl acetate = 1 @ 25°C

^b No flash to boiling using Cleveland closed cup apparatus

^c Not applicable for oxygen containing compounds

^d 1,1,2-trichloro-1,2,2-trifluoroethane

^e Ozone depleting chemical

Regulatory Features Comparison (as of 1/1/96)

| Product | Exempt from VOC Regulations | SARA Title III Reportable | Suspected Animal Carcinogen | Hazardous Air Pollutant |
|------------------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|
| OXSOL 100 | Yes | No | No | No |
| OXSOL 1000 | No | No | No | No |
| OXSOL 10 | No | No | No | No |
| OXSOL 550 | Partial | No | No | No |
| OXSOL 73 | No | Yes | Yes | Partial |
| OXSOL 253 | Partial | Yes | Yes | Partial |
| OXSOL 325 | Partial | Yes | Yes | Partial |
| Methylene chloride | Yes | Yes | Yes | Yes |
| Perchloroethylene | No | Yes | Yes | Yes |
| Trichloroethylene | No | Yes | No | Yes |
| 1,1,1-Trichloroethane ^g | Yes | Yes | No | Yes |
| CFC 113 ^{h,i} | Yes | Yes | No | No |
| Dibasic ester | No | No | No | No |
| d-Limonene | No | No | Yes | No |
| Toluene | No | Yes | No | Yes |
| Xylene | No | Yes | No | Yes |
| Acetone | Yes | No | No | No |

^g Ozone depleting chemical

^h 1,1,2-trichloro-1,2,2-trifluoroethane

Table 3.63: (continued)


Sales Specification

OXSOL® 10**Monochlorotoluenes****Specifications**

| | |
|-------------------|---------------------------------|
| Appearance | Clear, Free of suspended matter |
| Color, APHA | 25 Max. |
| Monochlorotoluene | 99.5% Min. |
| Toluene | 0.4% Max. |

Typical Physical Properties


| | |
|------------------------------|----------------------------------|
| Formula | C ₇ H ₇ Cl |
| Molecular weight | 126.59 |
| Specific gravity @ 25°C/25°C | 1.07 |
| Density, lb/gal (g/l) | 9 (1070) |
| Freeze point, °C (°F) | -25 (-13) |
| Boiling point, °C (°F) | 159 (318) |
| Flash point (TCC), °C (°F) | 50.6 (123) |
| Vapor pressure @ 20°C, mm Hg | 2.6 |
| Kauri-butanol value | 110 |
| Water, ppm | <100 |

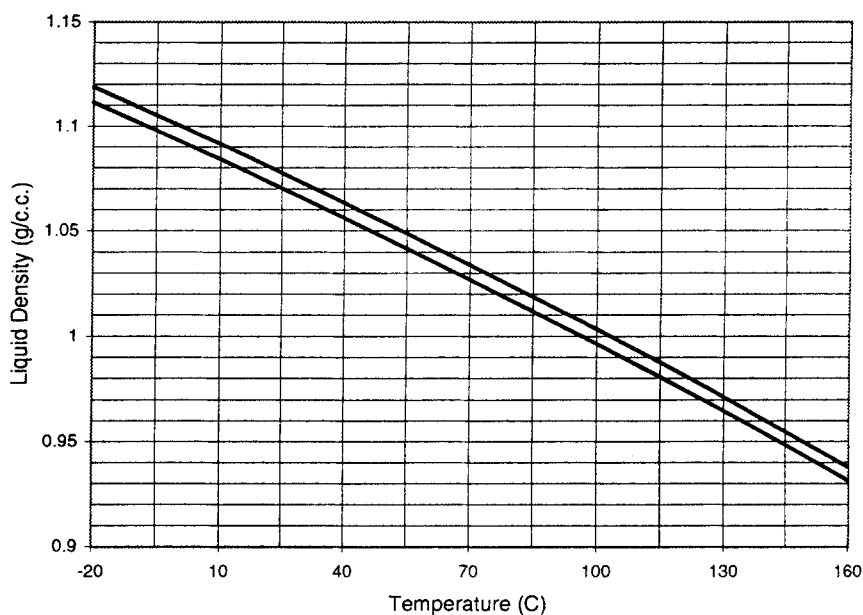Oxsol 10 Liquid Density


(continued)

Table 3.63: (continued)

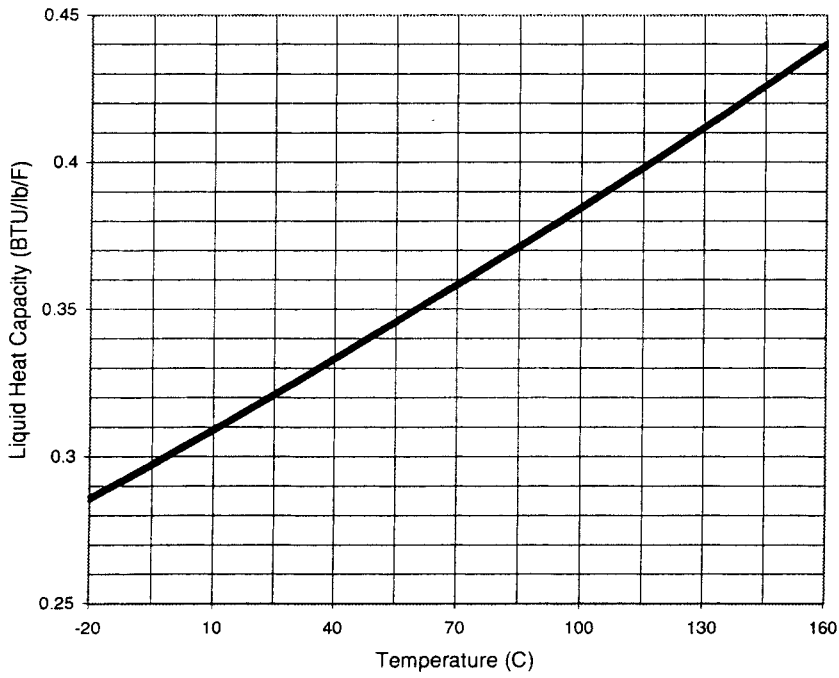Oxsol 10 Liquid Heat Capacity




Oxsol 10 Liquid Thermal Conductivity

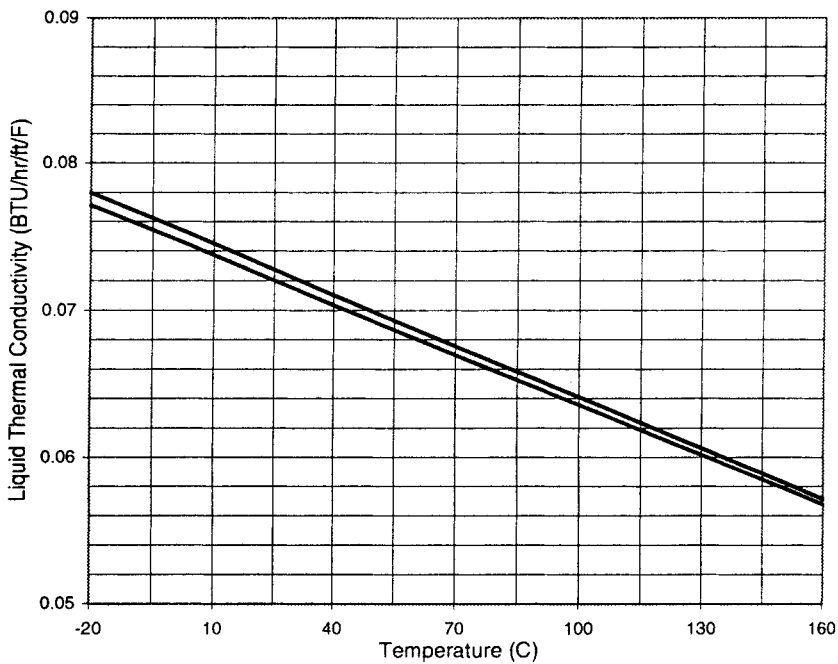


(continued)

Table 3.63: (continued)

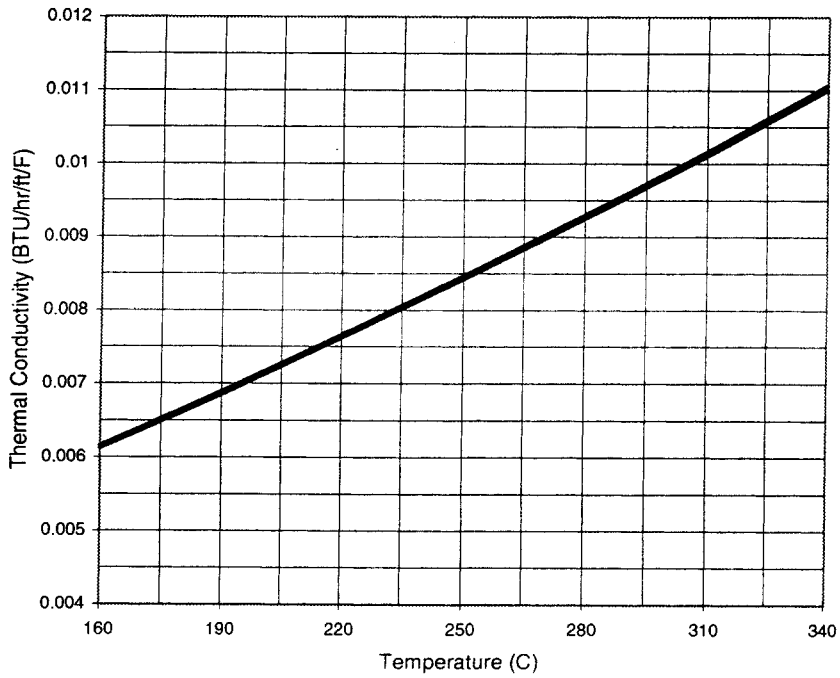Oxsol 10 Vapor Thermal Conductivity




Oxsol 10 Liquid Viscosity

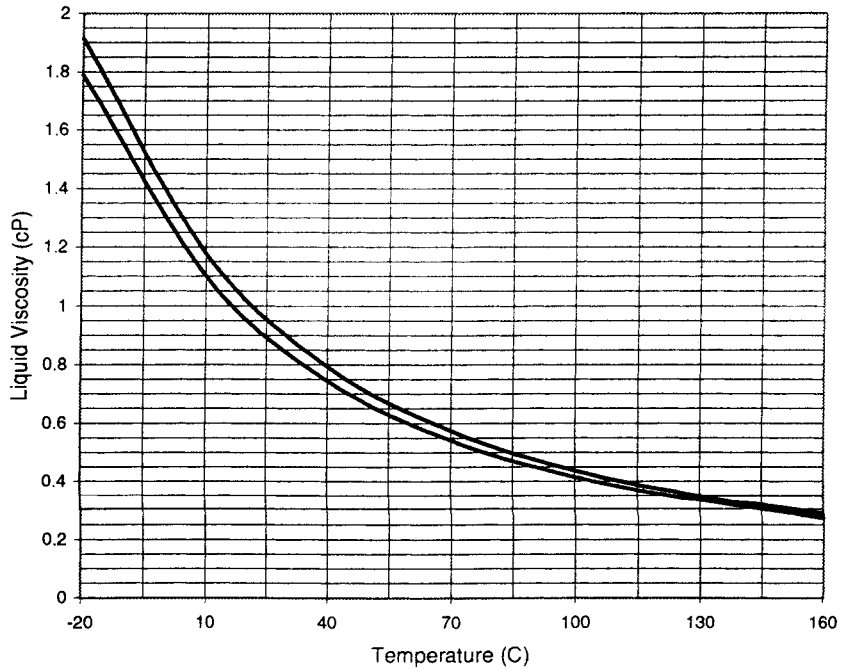


(continued)

Table 3.63: (continued)

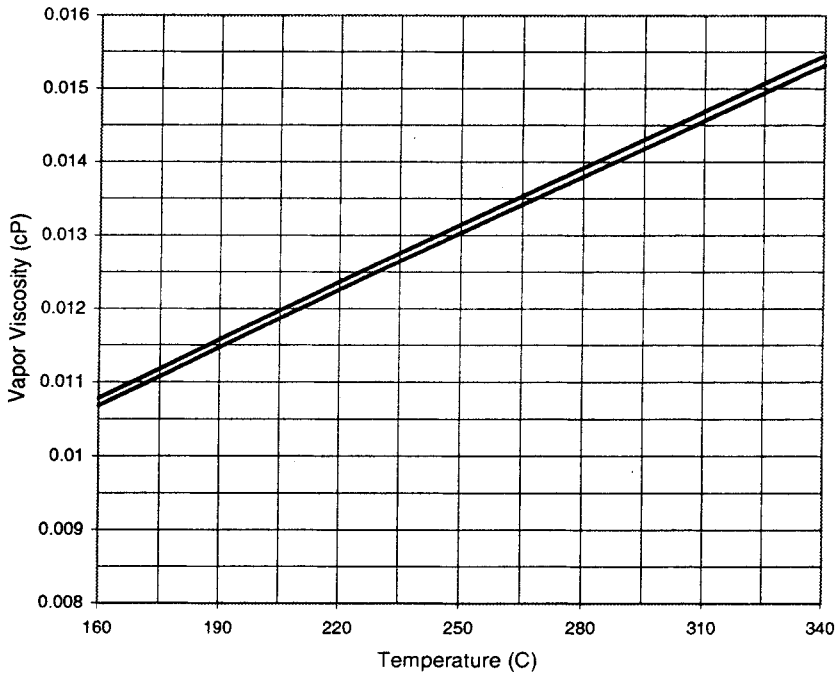Oxsol 10 Vapor Viscosity




Oxsol 10 Liquid Heat of Vaporization

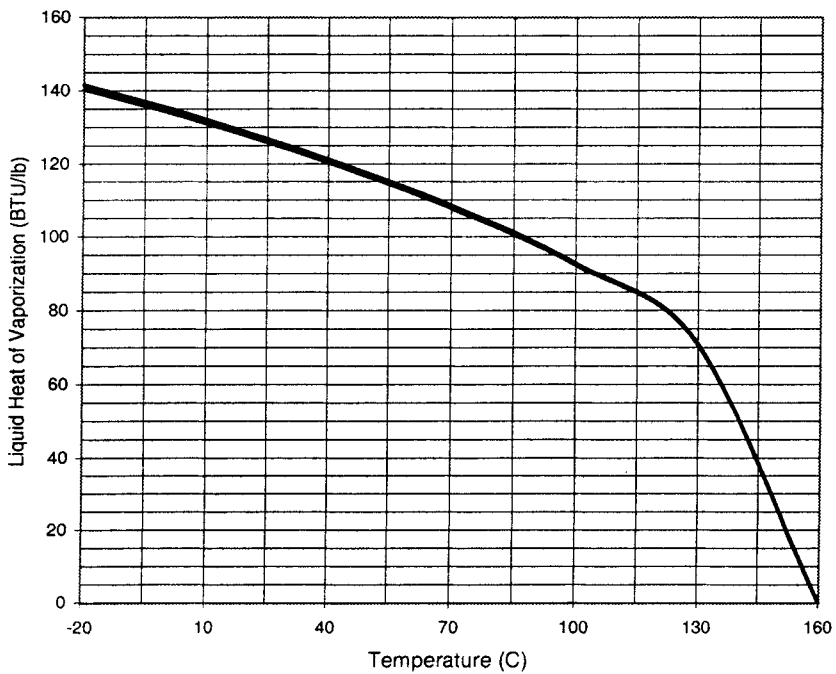


(continued)

Table 3.63: (continued)

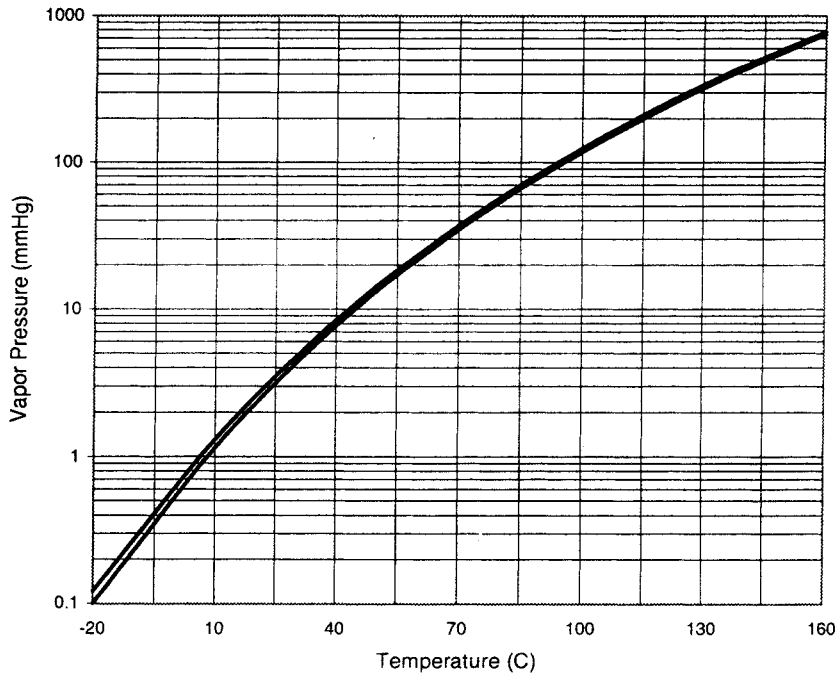Oxsol 10 Liquid Vapor Pressure



Oxsol 10 Liquid Surface Tension

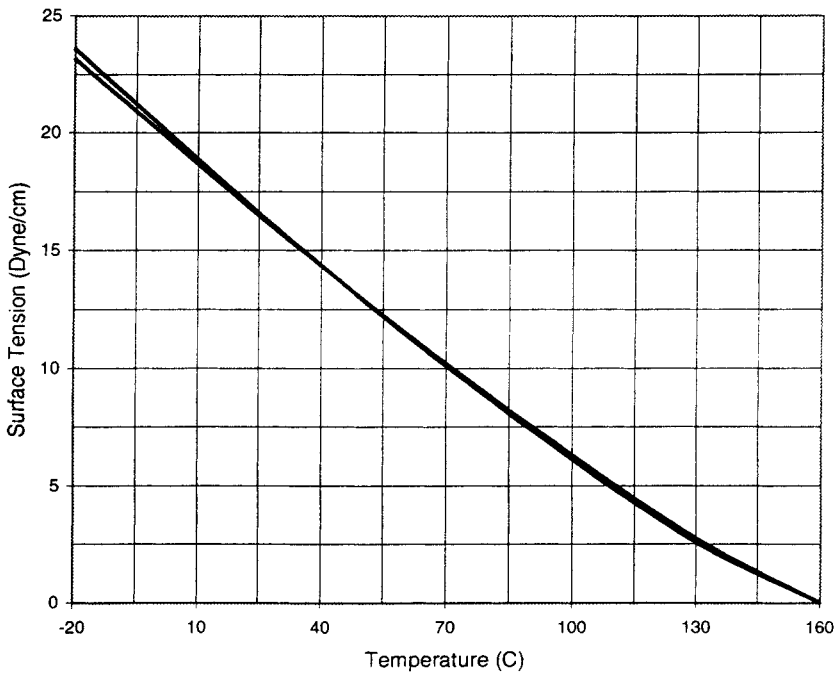

(continued)

Table 3.63: (continued)

OX SOL 100

OX SOL 100 is a purified grade of p-chlorobenzotrifluoride (PCBTF) with the characteristic odor of chlorinated aromatic solvents. OX SOL 100 is a clear water-white liquid with solvency characteristics similar to the classical chlorinated and fluorinated solvents. PCBTF has been commercially produced for over thirty years as a chemical intermediate. OX SOL 100 has been used as a solvent since 1992 as a replacement for solvents with Ozone Depletion Potential (ODP), Volatile Organic Compounds (VOC) and Hazardous Air Pollutants (HAP).

OX SOL 100 is not regulated as an ozone depleter. OX SOL 100 is not regulated as a Hazardous Air Pollutant. And on October 5, 1994, the EPA published in the Federal Register, a revised definition of VOC which specifically exempted OX SOL 100 from VOC regulations. The exemption was based on the very favorable atmospheric profile of the molecule.

The use of OX SOL 100 or other PCBTF based OX SOLs will allow many solvent users to eliminate or reduce their use and emissions of VOCs without giving up the many benefits received from organic solvents. OX SOL can be used to extend or replace many organic solvents, including toluene, xylene, mineral spirits, acetone, methyl ethyl ketone (MEK), trichloroethylene, perchloroethylene, 1,1,1-trichloroethane and n-methyl pyrrolidone (NMP)>


| Physical Properties of OX SOL 100 | |
|------------------------------------------------------------|---------|
| Freezing Point, °C | -36 |
| Boiling Point, °C | 139 |
| Flash Point, TCC, °F | 109 |
| Evaporation Rate at 25°C, n-BuAc = 1 | 0.9 |
| Solubility Parameter (cal/cm ³) ^{1/2} | 7.3 |
| Density @ 25°C, lb/gal | 11.2 |
| Kauri-Butanol Value | 64 |
| Solubility of water in OX SOL @ 25°C, ppm | 240 |
| Solubility of OX SOL in water @ 25°C, ppm | 35 |
| Surface Tension @ 25°C, dynes/cm ² | 25 |
| Heat of Combustion, BTU/lb | 7100 |
| Viscosity @ 25°C, cp | 0.79 |
| CAS# | 98-56-6 |

| Sales Specifications | |
|--------------------------------------|------------|
| Appearance | CFOSM |
| Color, APHA | 20 Max |
| Acidity, ppm (by specific ion probe) | 3 Max |
| Alkalinity, ppm as NaOH | 10 Max |
| Water content, ppm | 150 Max |
| Specific Gravity @ 25°C/25°C | 1.33-1.35 |
| Non Volatile Residue, Wt. % | 0.0020 Max |


(continued)

Table 3.63: (continued)

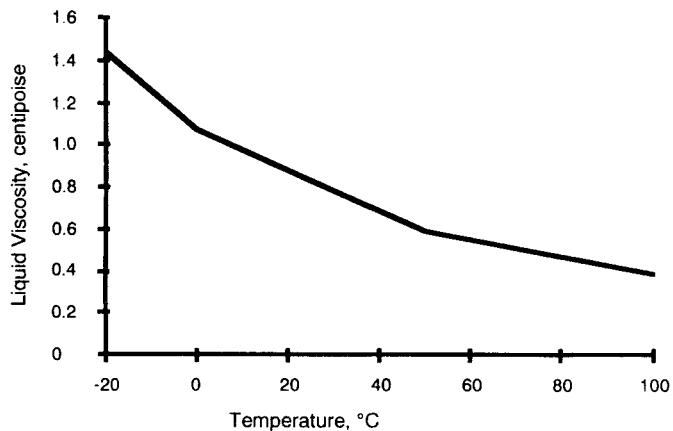
Liquid Viscosity




Vapor Pressure

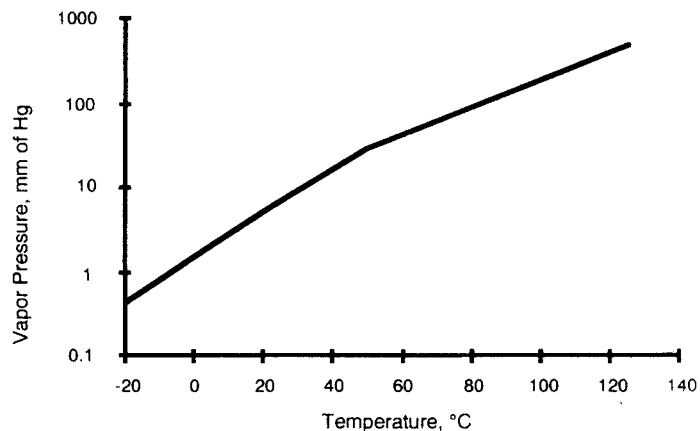

Surface Tension

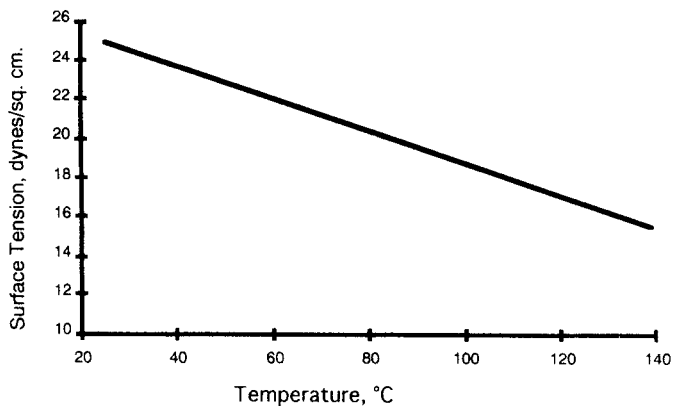

Latent Heat of Vaporization

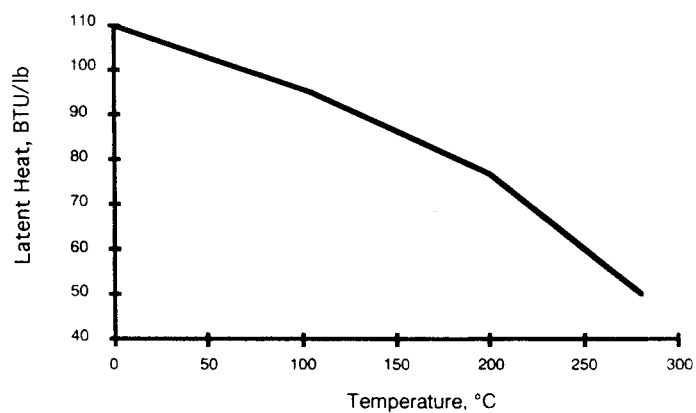

(continued)

Vapor Pressure vs. Temperature - OXSOL 100


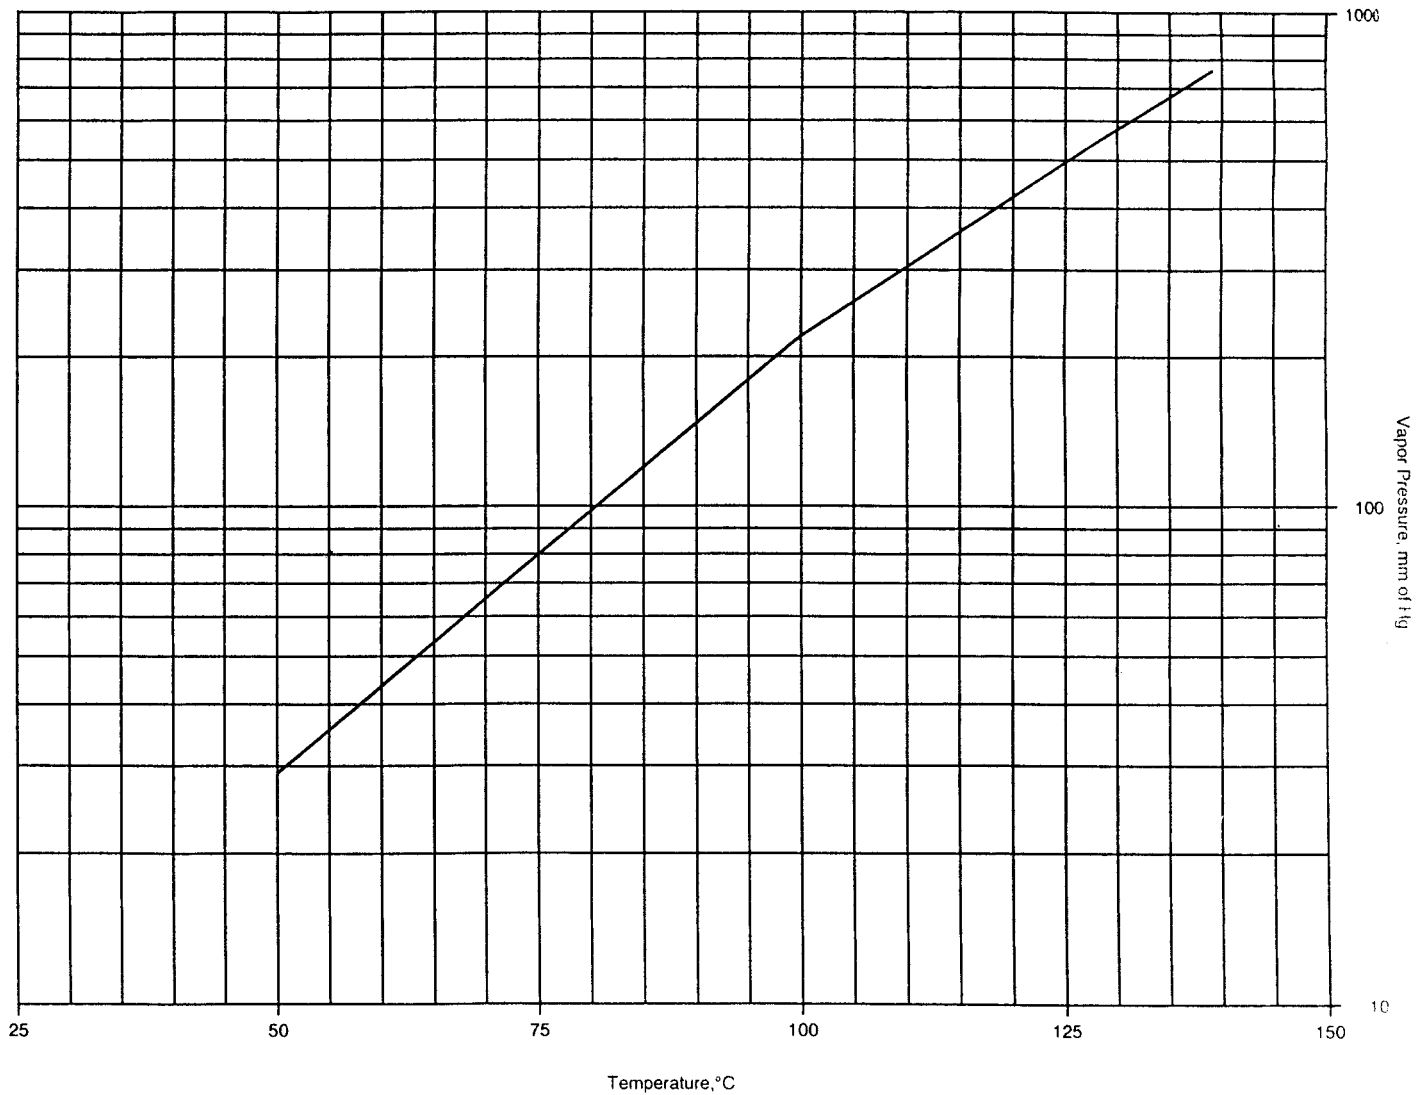



Table 3.63: (continued)

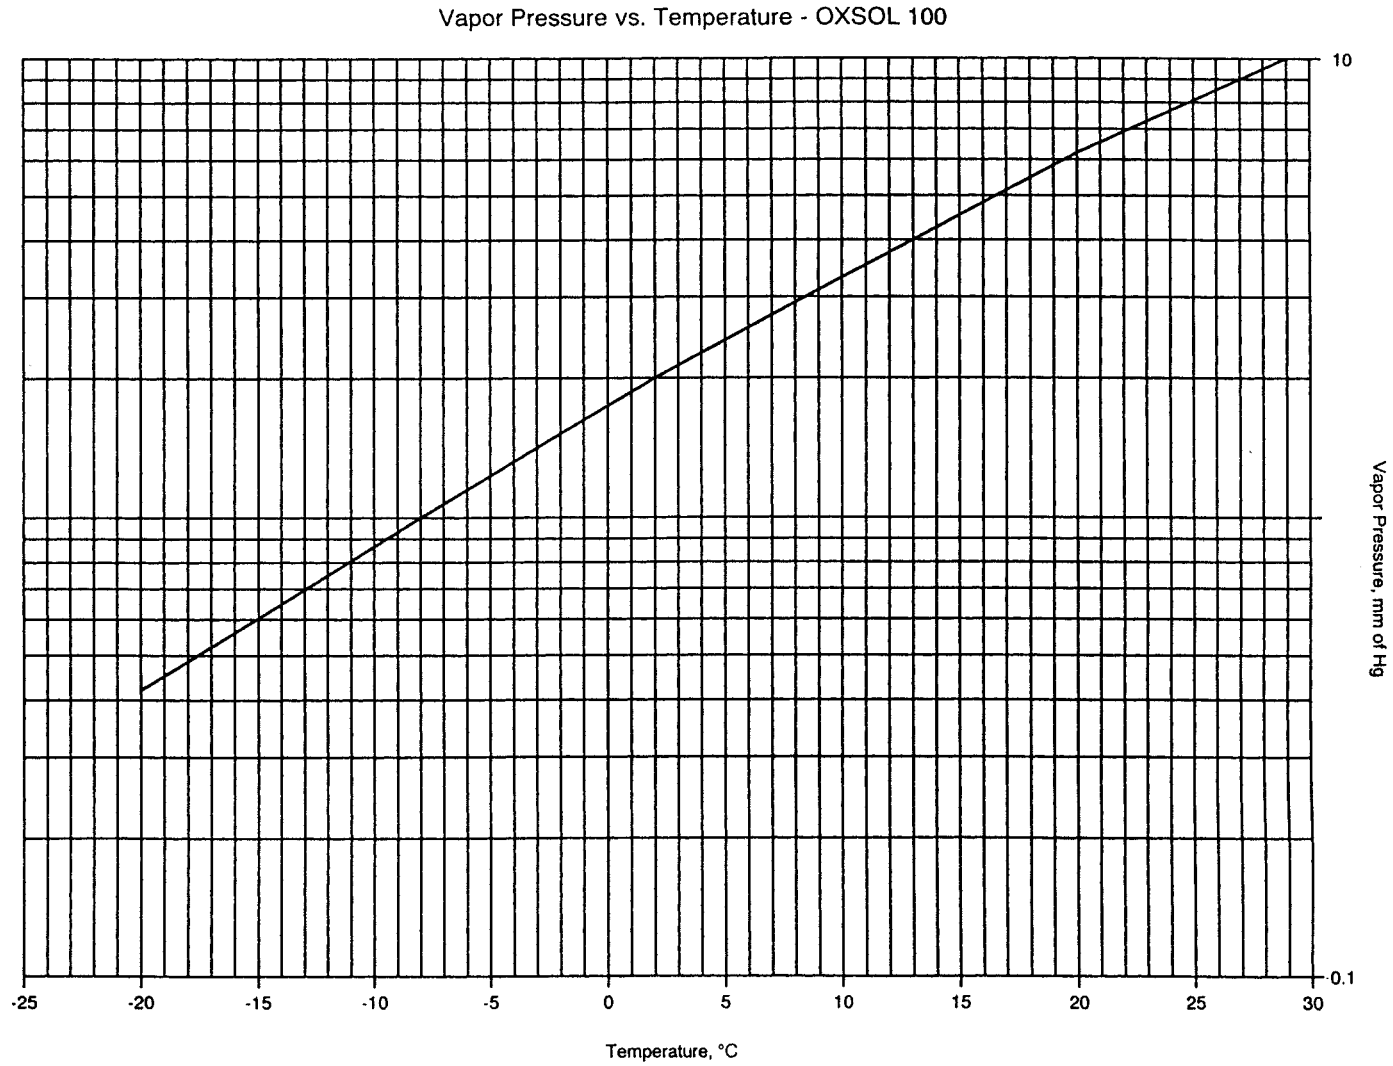

(continued)


Table 3.63: (continued)

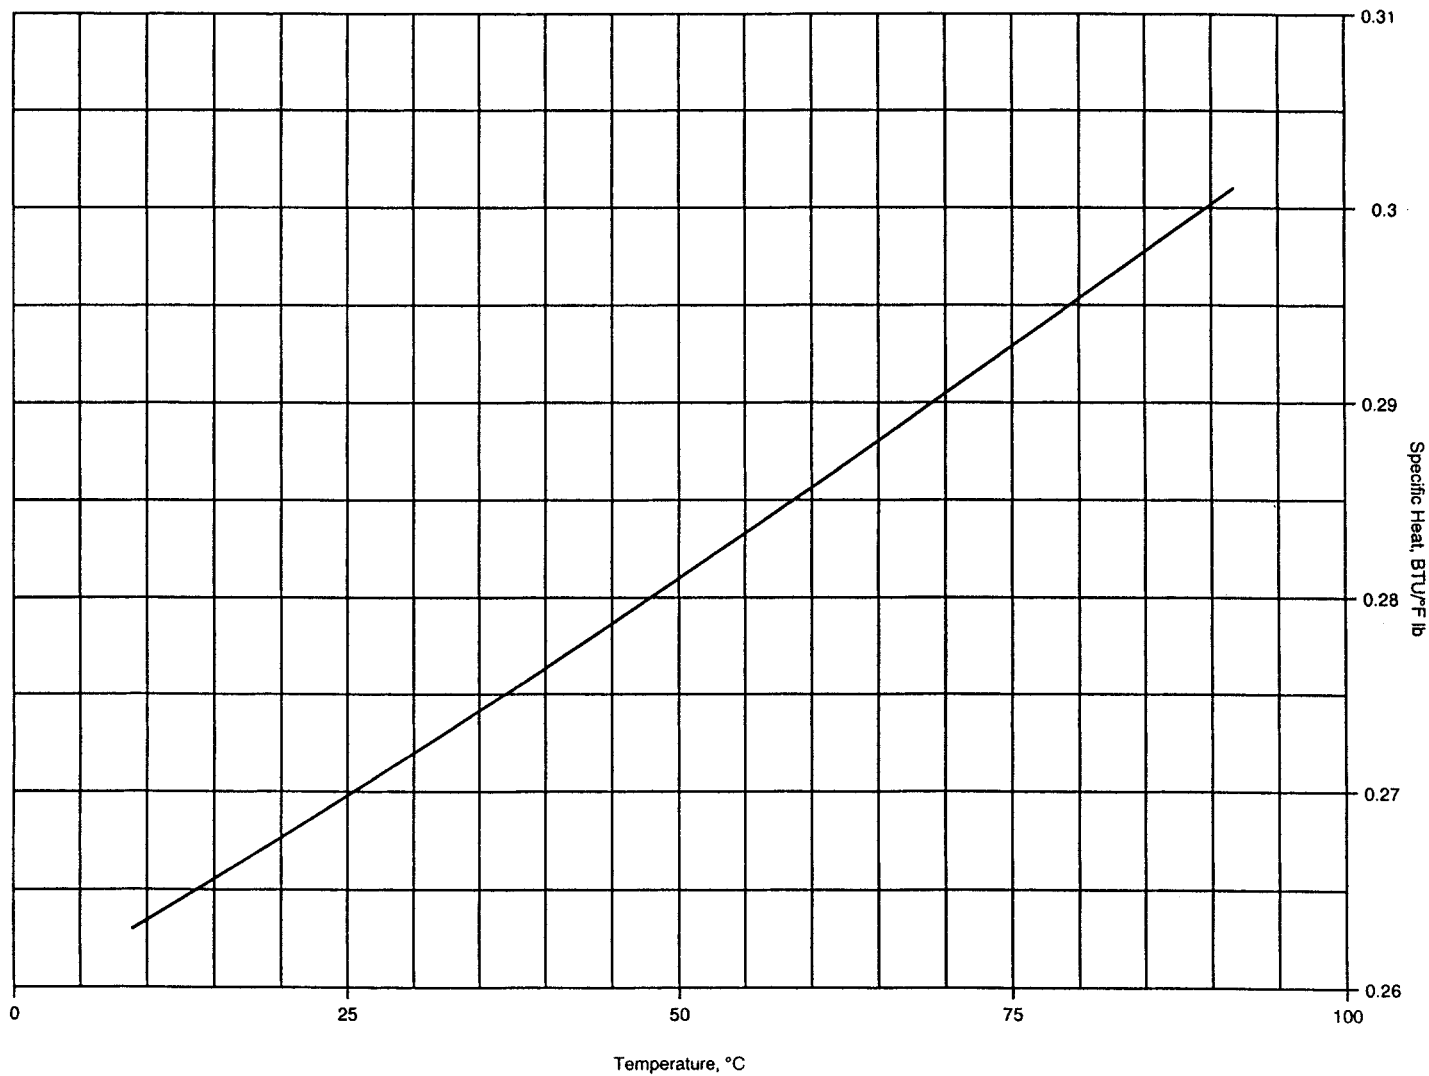Specific Heat vs. Temperature - OXSOL 100



(continued)

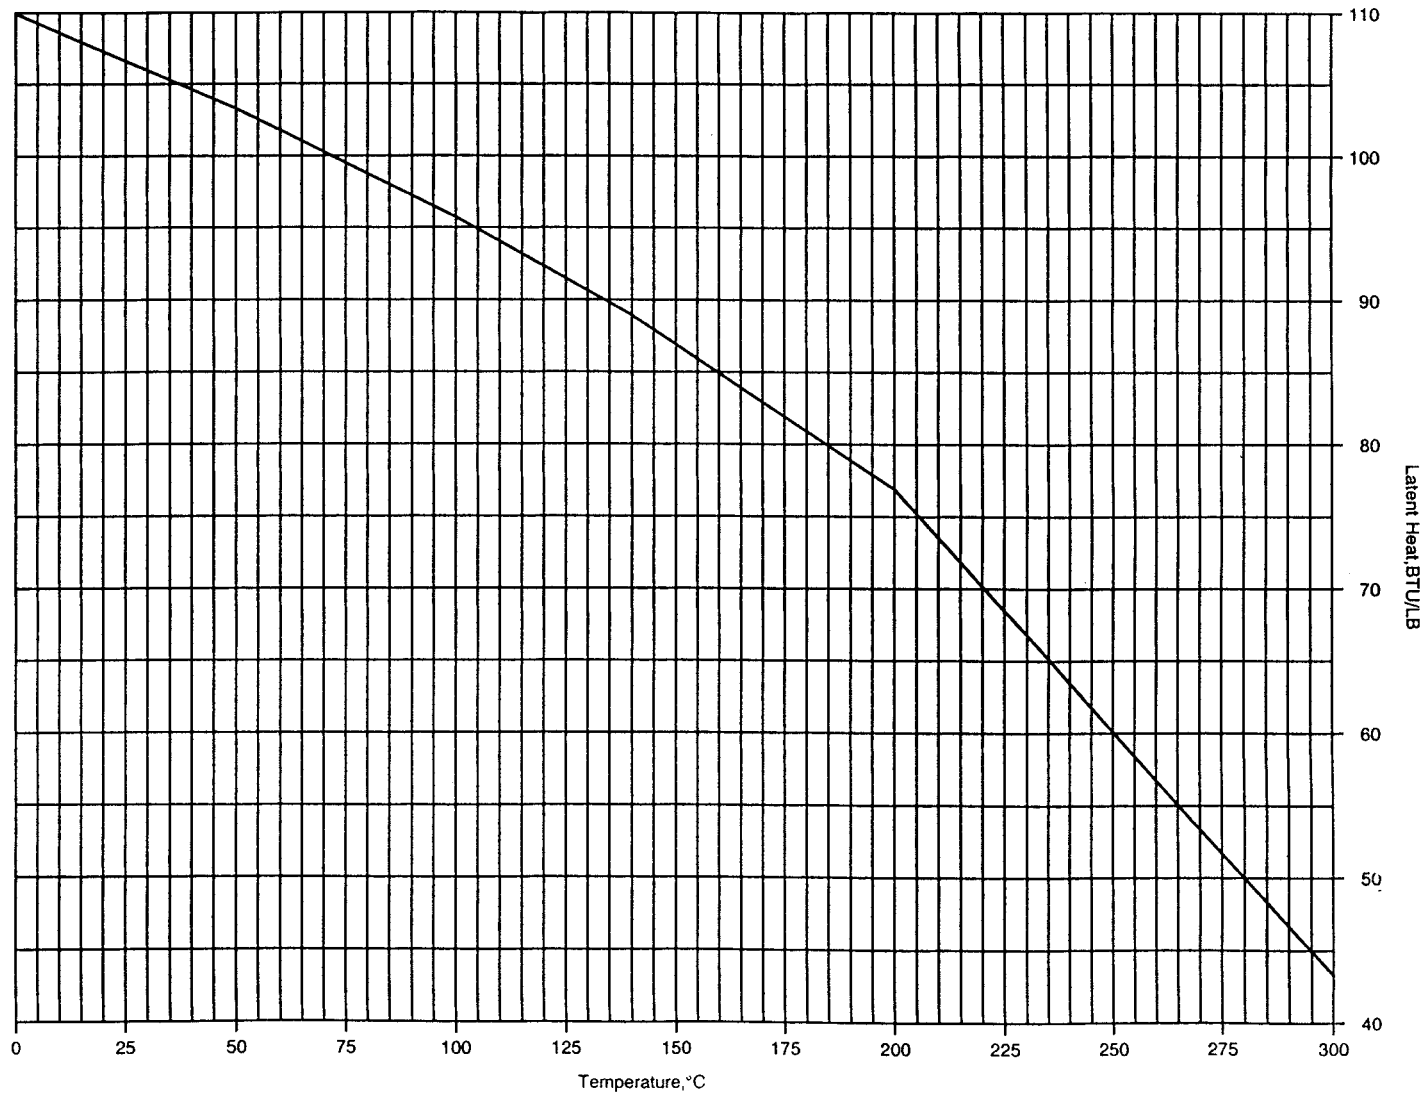Latent Heat vs Temperature - OXSOL 100



(continued)

Liquid Viscosity vs. Temperature - OXSOL 100


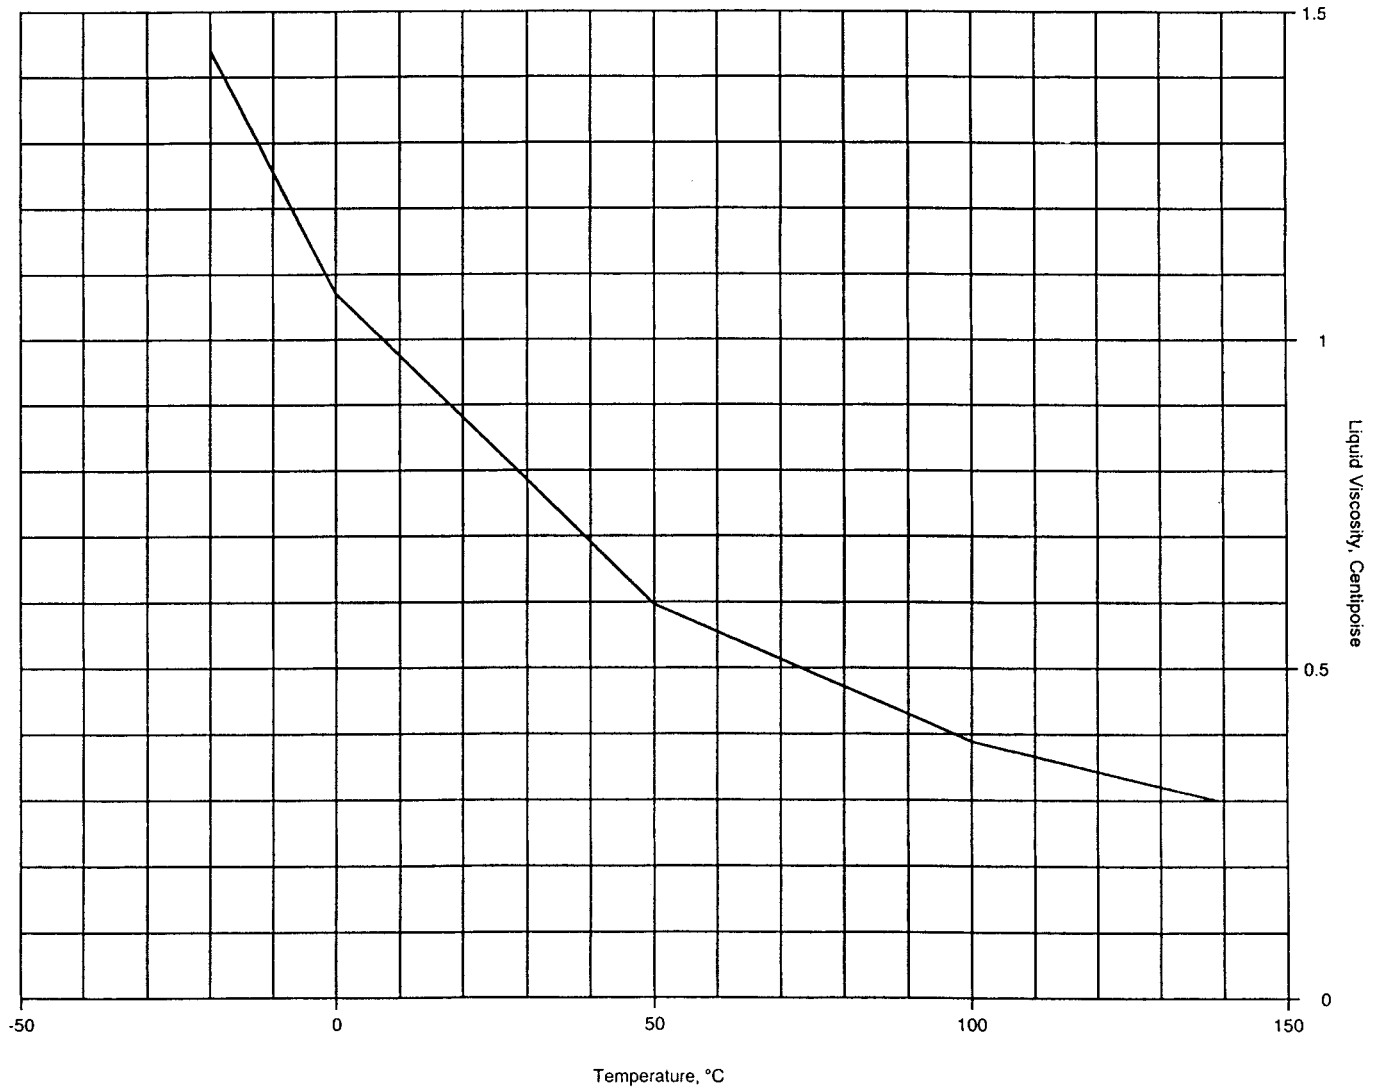


Table 3.63: (continued)

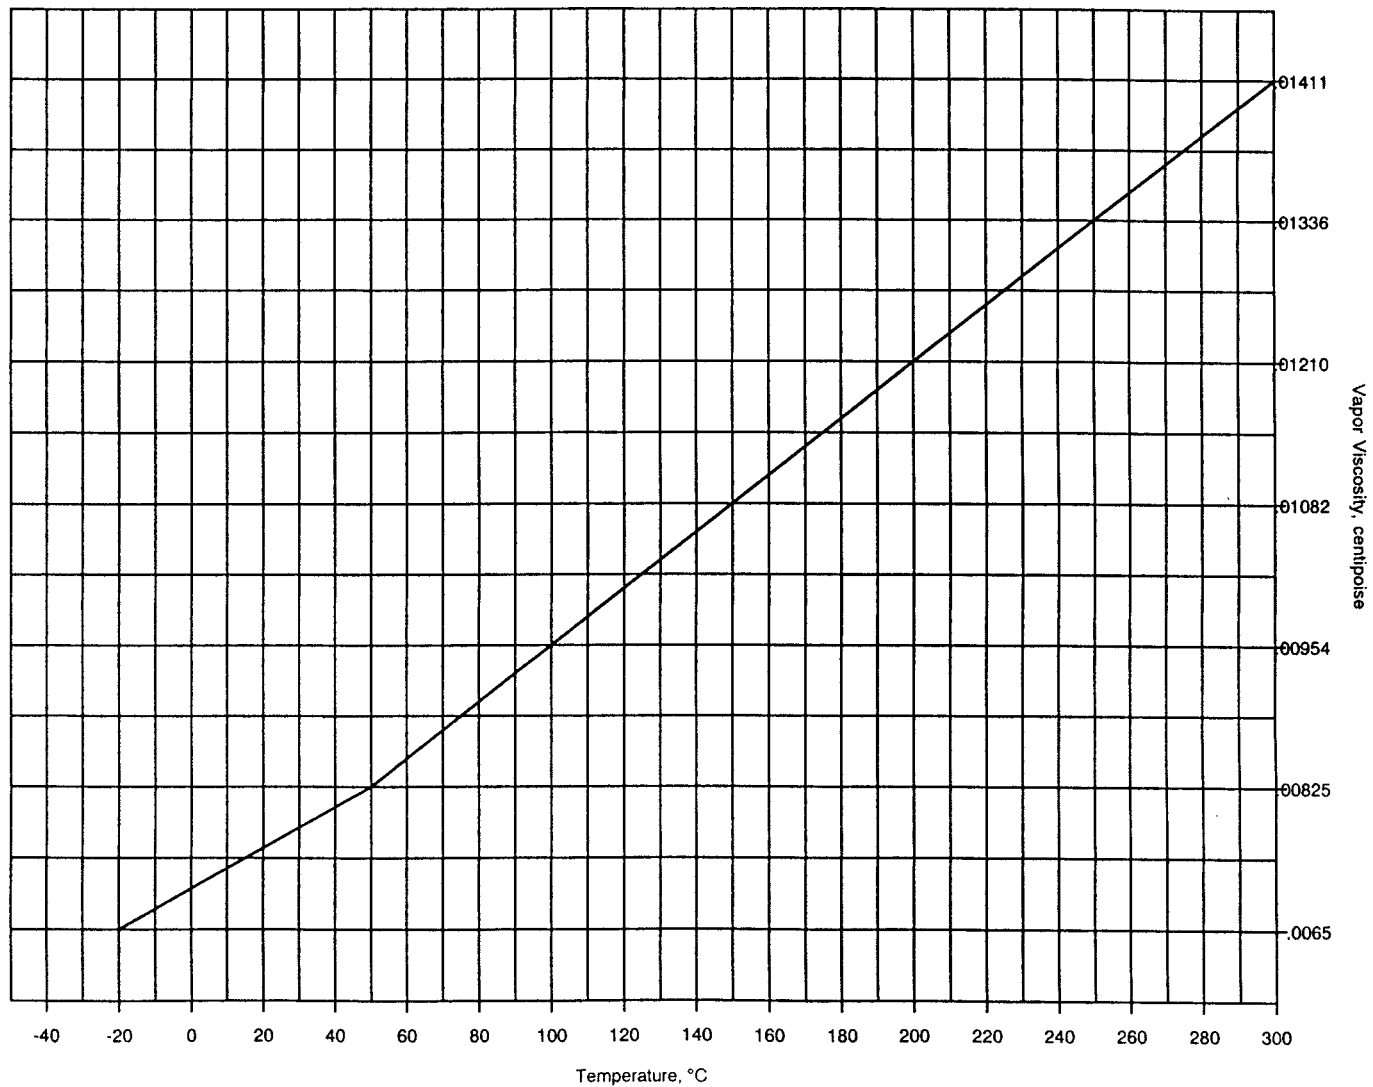
Vapor Viscosity vs. Temperature - OXSOL 100




(continued)

Table 3.63: (continued)

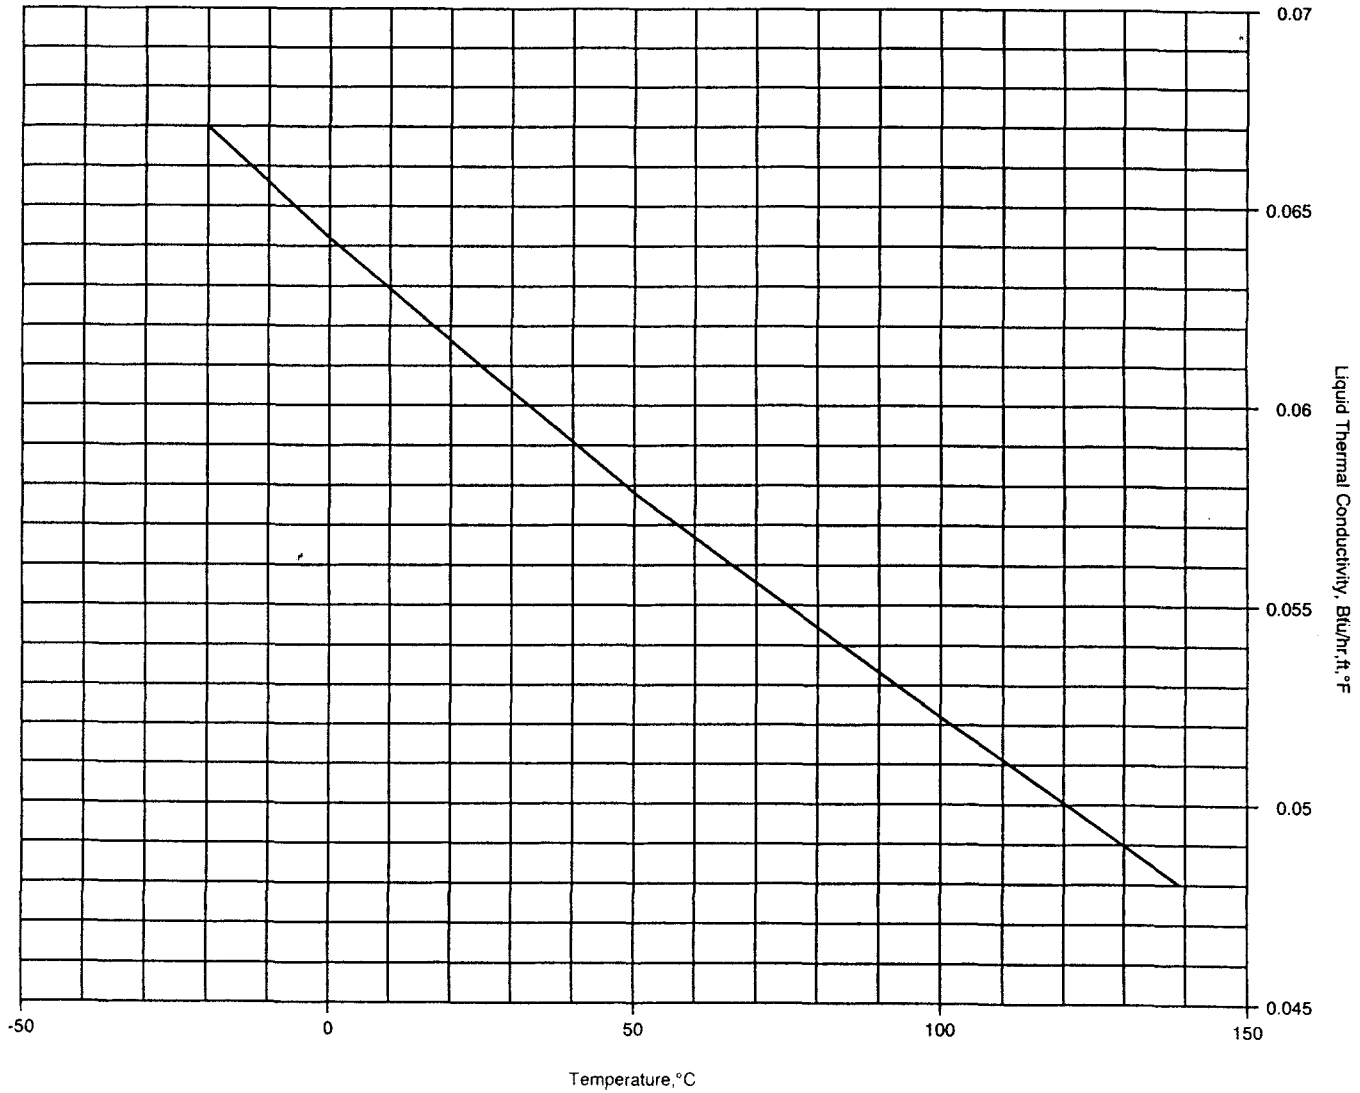Liquid Thermal Conductivity vs. Temperature - OXSOL 100



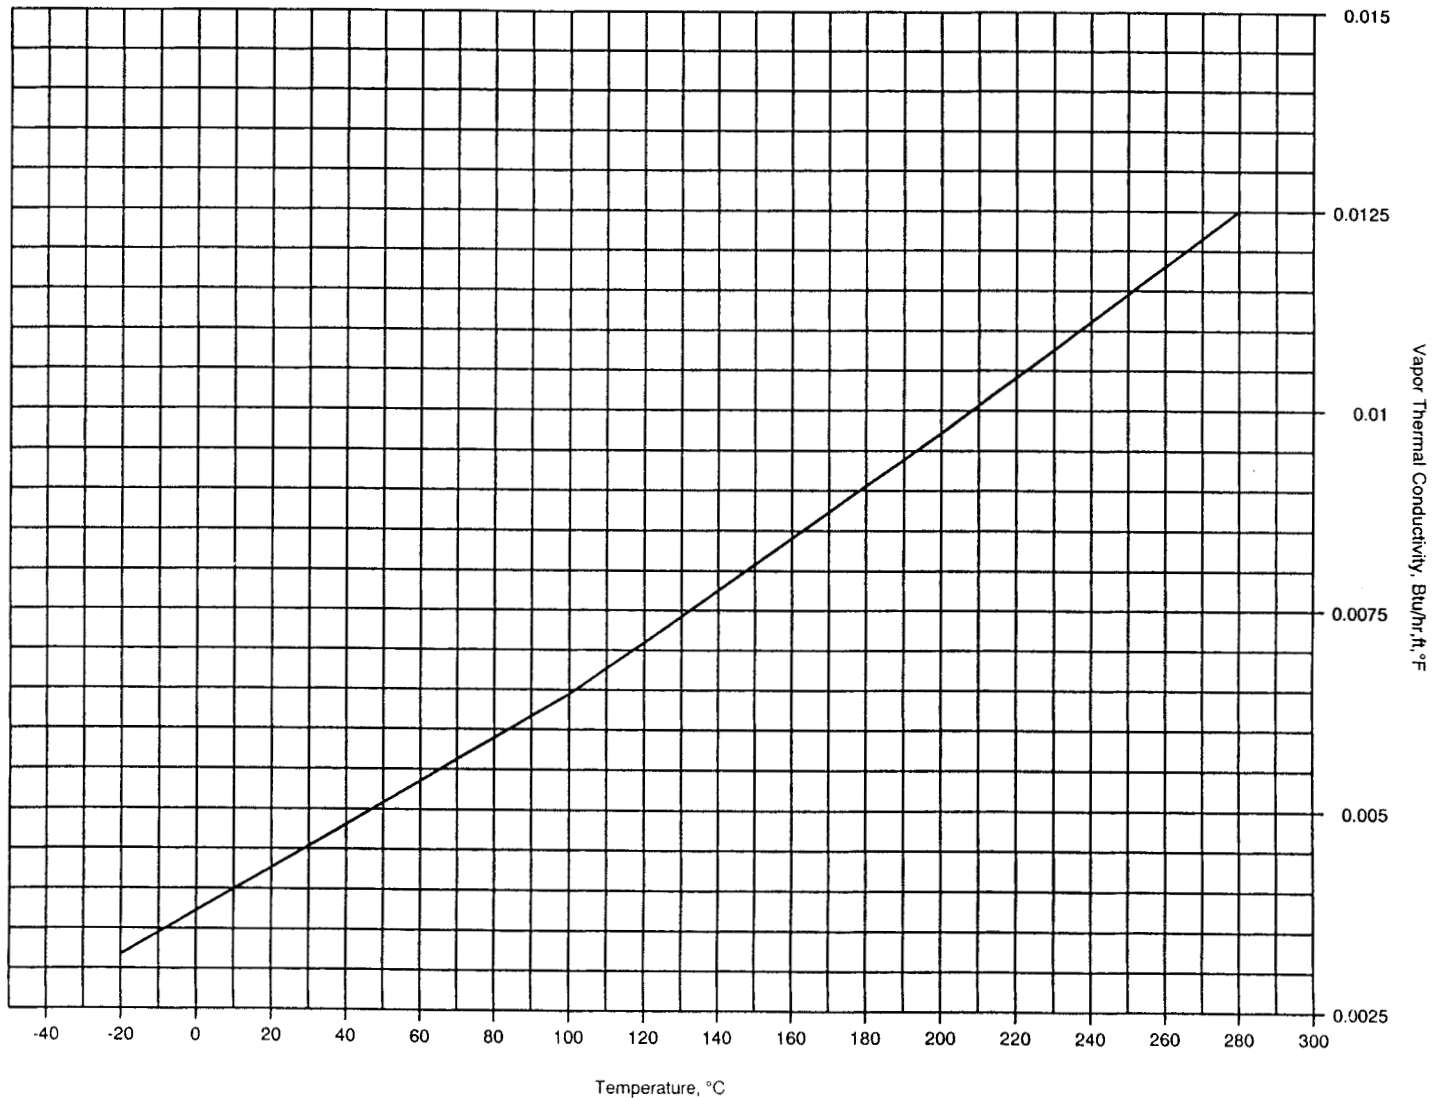Vapor Thermal Conductivity vs. Temperature - OXSOL 100



(continued)

Table 3.63: (continued)

OX SOL 2000


Chemically, OXSOL 2000 is alpha, alpha, alpha-trifluorotoluene, an HFC. OXSOL 2000 has a number of desirable properties for precision cleaning, electronics cleaning, aerosol applications, and wipe cleaning. It is a pure compound, with a relatively fast evaporation rate and toluene-like odor. In its pure form, OXSOL 2000 is a good replacement for hexane, toluene, and VM&P naphtha where a rapid evaporation rate is desirable and a flammable solvent can be used safely. In addition, OXSOL 2000 can be blended with classical solvents like trichloroethylene yielding non-flammable, very fast evaporating compositions.

Physical and Chemical Properties of OXSOL 2000:

Property

| | |
|--------------------------------------------|-------------|
| Chemical Formula | $C_7H_5F_3$ |
| Molecular Weight | 146.11 |
| Boiling Point: °C (°F) | 102 (216) |
| Dielectric Constant, 25°C | 11.5 |
| Flash Point, TCC °C (°F) | 12 (54) |
| Fire Point, TOC °C (°F) | 23 (74) |
| Kauri Butanol Value | 49 |
| Evaporation Rate, n-BuAc = 1 | 2.8 |
| Latent Heat of Vaporization (B.P.), BTU/lb | 97 |
| Specific Heat, Liquid 20°C (BTU/lb/°F) | 0.306 |
| Density, 20°C, gm/cc | 1.185 |
| Density, 20°C, lbs/gal | 9.88 |
| Vapor Pressure (20°C), mm Hg | 30 |
| Vapor Density (Air = 1) | 5.0 |
| Surface Tension in Air: Dynes/cm:20°C | 23 |
| Viscosity (Cp), Liquid, 20°C | 0.56 |

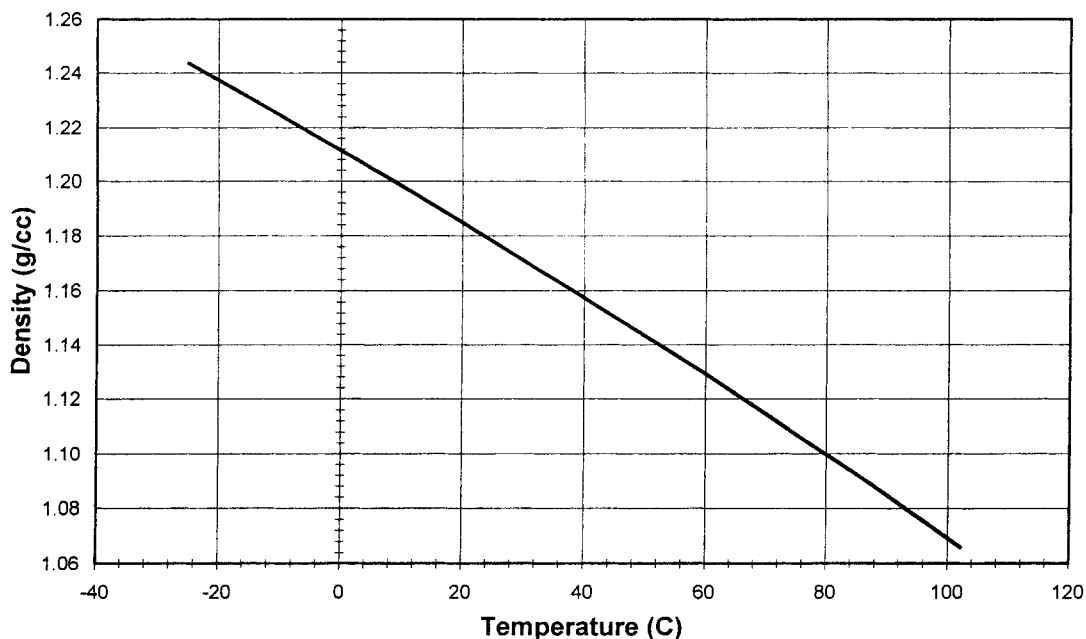
Density of OXSOL 2000




(continued)

Table 3.63: (continued)

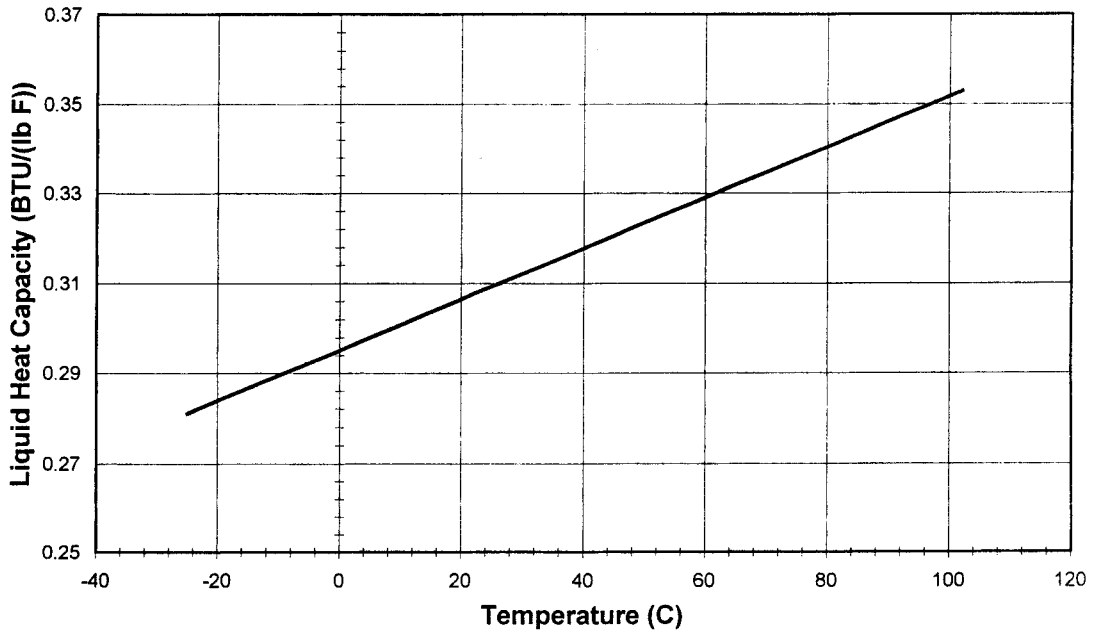Liquid Heat Capacity of OXSOL 2000




OXSOL 2000 Liquid Thermal Conductivity

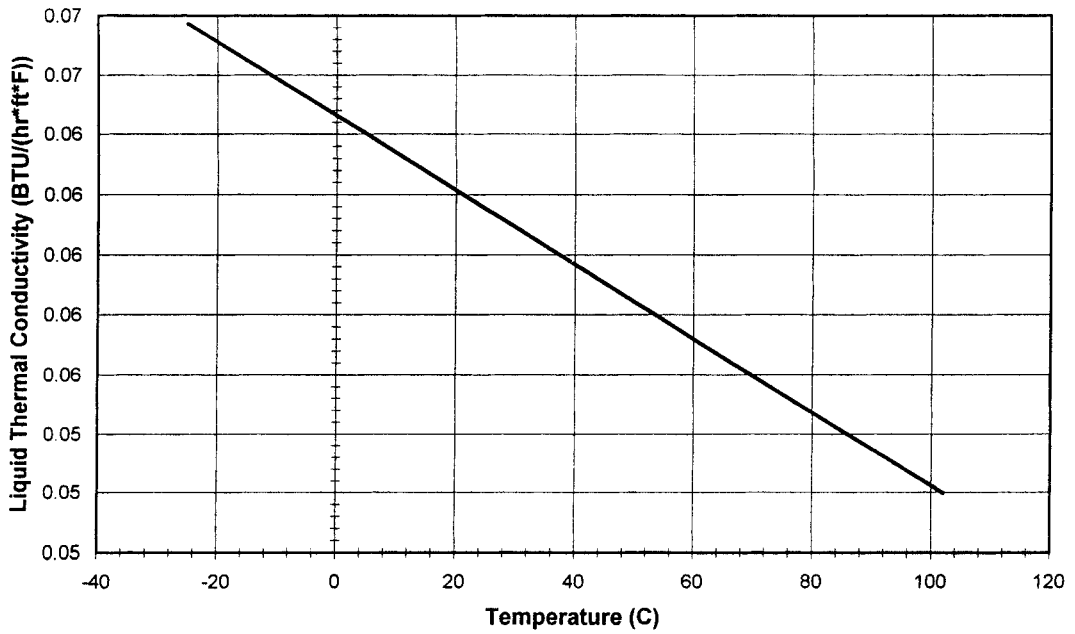


(continued)

Table 3.63: (continued)

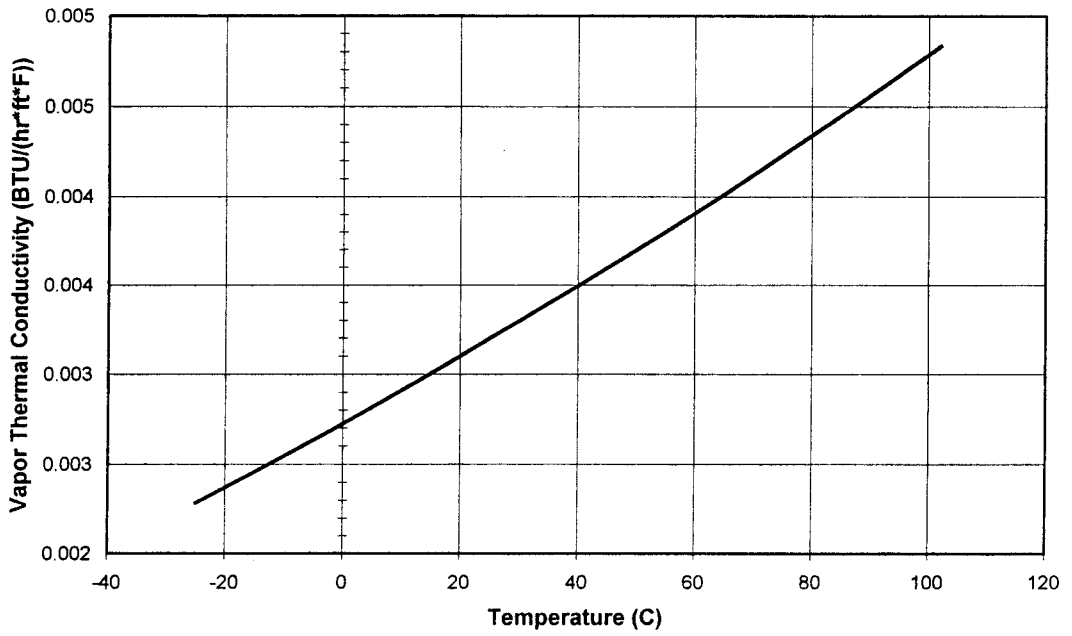OXSOL 2000 Vapor Thermal Conductivity




OXSOL 2000 Liquid Viscosity

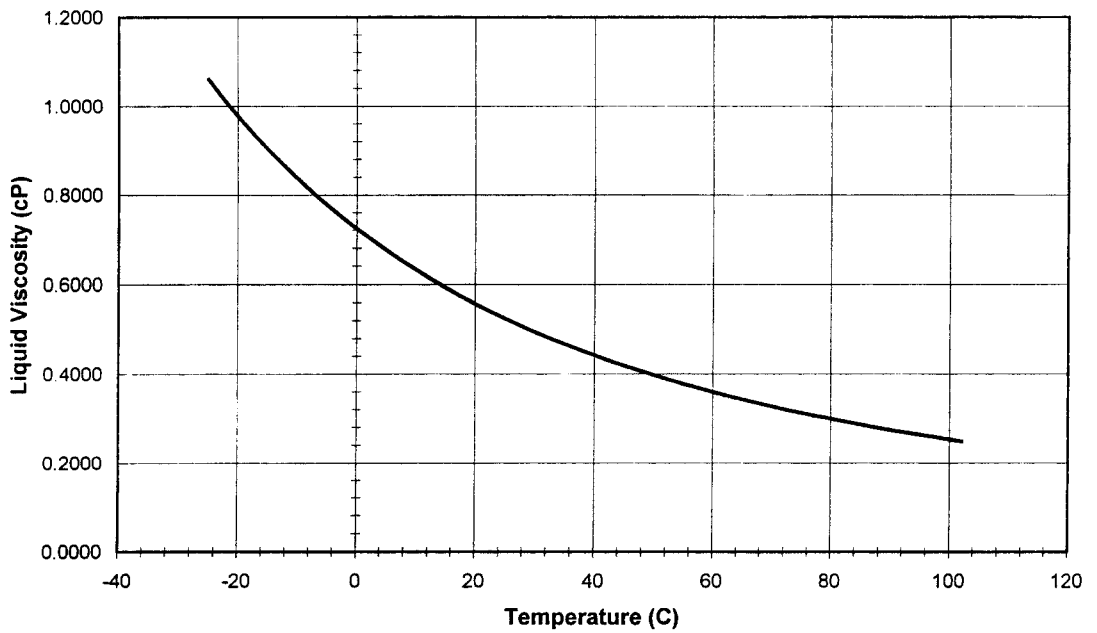


(continued)

Table 3.63: (continued)

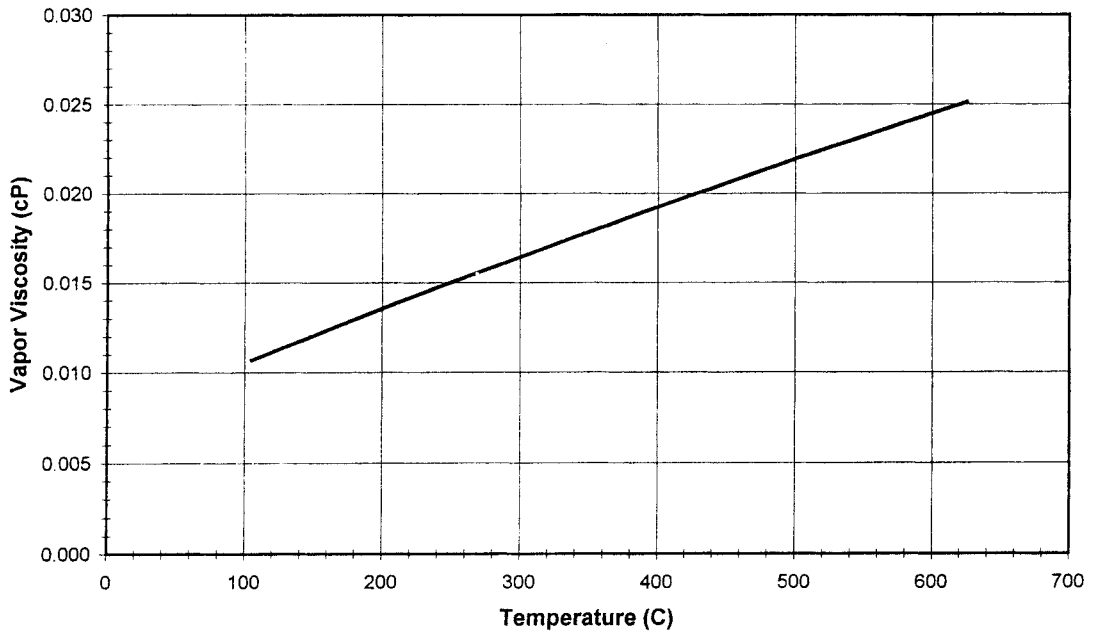OXSOL 2000 Vapor Viscosity




OXSOL 2000 Heat of Vaporization

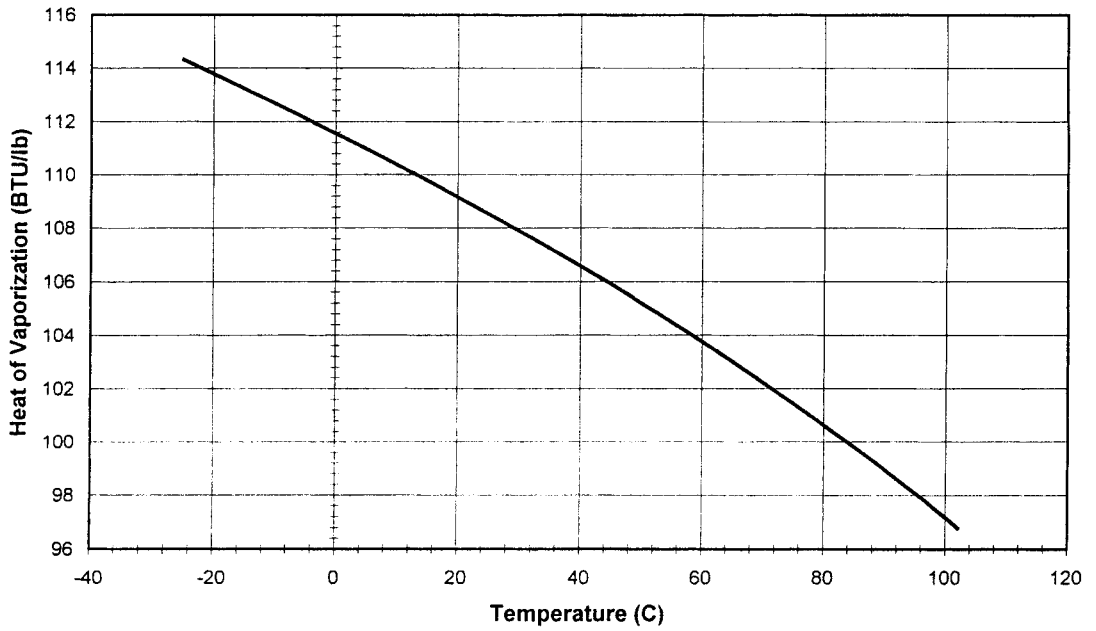


(continued)

Table 3.63: (continued)

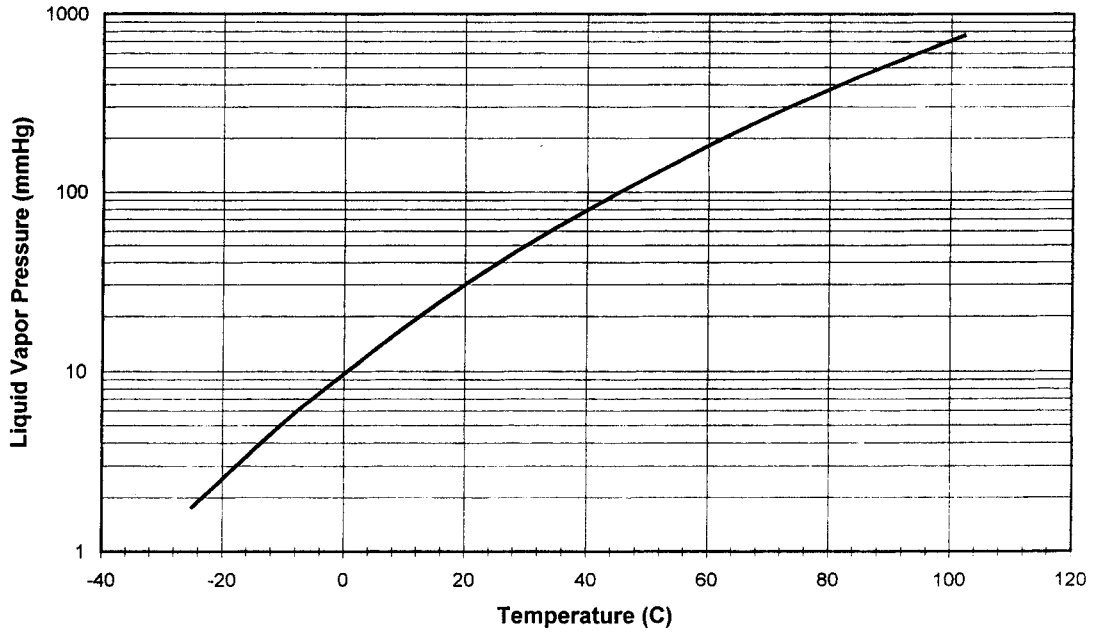OXSOL 2000 Liquid Vapor Pressure



OXSOL 2000 Liquid Surface Tension

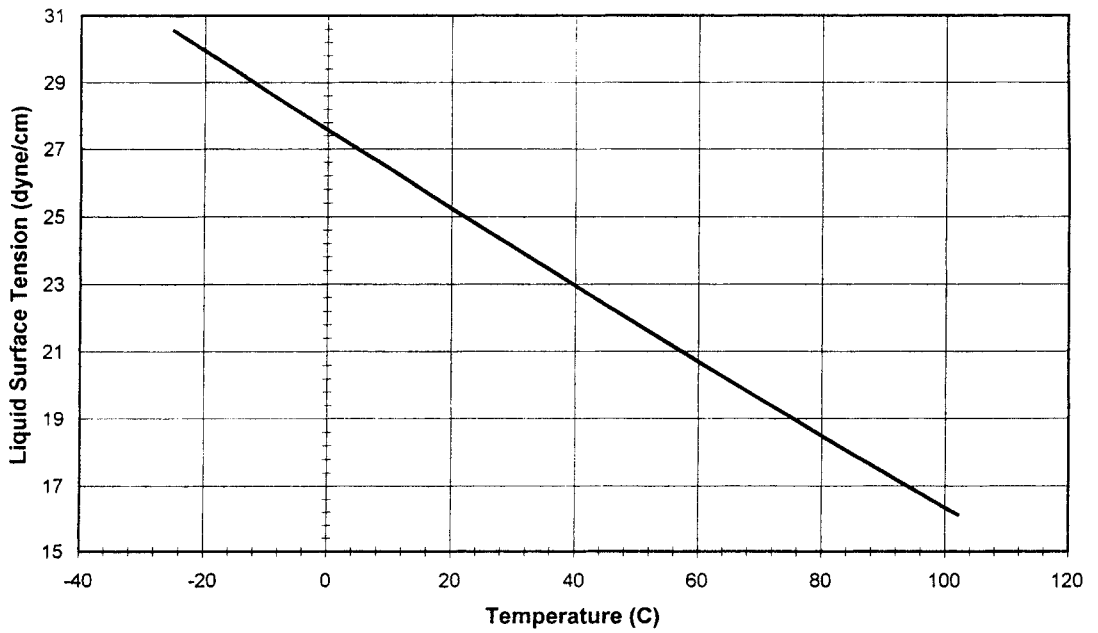

(continued)

Table 3.63: (continued)

Sales Specification

OX SOL[®] 550

| <u>Test</u> | <u>Specifications</u> |
|--------------------------------------------------------------------|---------------------------------|
| Appearance | Clear, Free of Suspended Matter |
| Color, APHA | 30 Max. |
| Acidity, ppm as Total Inorganic Acidity (by Specific Ion Probe) | 3 Max. |
| Alkalinity, ppm as NaOH | 10 Max. |
| Water Content, ppm | 150 Max. |
| Specific Gravity @ 25°C/25°C | 1.20-1.22 |
| Residue on Evaporation, Wt. % | 0.0025 Max. |

Physical Properties

OX SOL 550 is a clear, colorless blend of Halogenated Aromatic solvents with a characteristic chloroaromatic odor and the following physical characteristics:

| | |
|---------------------------------|------------------------------|
| Distillation Range, @ 760 mm Hg | 142-159°C |
| Flash Point, (TCC) | 113°F |
| Freezing Point | <-60°C |
| Evaporation Rate (n-BuAc=1.0) | 0.7 |
| Solubility, @ 25°C | <150 ppm in H ₂ O |
| Density, @ 25°C | 10.11 lbs/gal |
| Vapor Pressure, @ 20°C | 3.9 mm Hg |
| Heat of Combustion | 9,900 BTU/lb |
| Kauri-Butanol Value | 92 |

Sales Specification

OX SOL[®] 73

| <u>Test</u> | <u>Specifications</u> |
|--------------------------------------------------------------------|---------------------------------|
| Appearance | Clear, Free of Suspended Matter |
| Color, APHA | 30 Max. |
| Acidity, ppm as Total Inorganic Acidity (by Specific Ion Probe) | 3 Max. |
| Alkalinity, ppm as NaOH | 15 Max. |
| Water Content, ppm | 100 Max. |
| Specific Gravity @ 25°C/25°C | 1.22-1.26 |
| Residue on Evaporation, Wt. % | 0.0025 Max. |

Physical Properties

OX SOL 73 is a clear, colorless, non-flammable blend of Monochlorotoluenes and Perchloroethylene with a characteristic chloroaromatic odor and the following physical characteristics:

| | |
|---------------------------------|------------------------------|
| Distillation Range, @ 760 mm Hg | 129-158°C |
| Flash Point, (TCC) | NFTB * |
| Freezing Point | -33°C |
| Evaporation Rate (n-BuAc=1.0) | 0.6 |
| Solubility, @ 25°C | <150 ppm in H ₂ O |
| Density, @ 25°C | 10.35 lbs/gal |
| Vapor Pressure, @ 20°C | 8-10 mm Hg |
| Heat of Combustion | 8,300 BTU/lb |
| Kauri-Butanol Value | 114 |

* NFTB - No Flash to Boiling

(continued)

Table 3.63: (continued)

Sales Specification

OX SOL[®] 253

| <u>Test</u> | <u>Specifications</u> |
|--------------------------------------------------------------------|---------------------------------|
| Appearance | Clear, Free of Suspended Matter |
| Color, APHA | 30 Max. |
| Acidity, ppm as Total Inorganic Acidity (by Specific Ion Probe) | 3 Max. |
| Alkalinity, ppm as NaOH | 15 Max. |
| Water Content, ppm | 100 Max. |
| Specific Gravity @ 25°C/25°C | 1.27-1.32 |
| Residue on Evaporation, Wt. % | 0.0025 Max. |

Physical Properties

OX SOL 253 is a clear, colorless, non-flammable blend of Halogenated Aromatics and Perchloroethylene with a characteristic chloroaromatic odor and the following physical characteristics:

| | |
|---------------------------------|------------------------------|
| Distillation Range, @ 760 mm Hg | 127-159°C |
| Flash Point, (TCC) | NFTB * |
| Freezing Point | <-60°C |
| Evaporation Rate (n-BuAc=1.0) | 0.6 |
| Solubility, @ 25°C | <150 ppm in H ₂ O |
| Density, @ 25°C. | 10.81 lbs/gal |
| Vapor Pressure, @ 20°C | 10 mm Hg |
| Heat of Combustion | 7,600 BTU/lb |
| Kauri-Butanol Value | 109 |

* NFTB - No Flash to Boiling

Sales Specification

OX SOL[®] 325

| <u>Test</u> | <u>Specifications</u> |
|--------------------------------------------------------------------|---------------------------------|
| Appearance | Clear, Free of Suspended Matter |
| Color, APHA | 30 Max. |
| Acidity, ppm as Total Inorganic Acidity (by Specific Ion Probe) | 3 Max. |
| Alkalinity, ppm as NaOH | 15 Max. |
| Water Content, ppm | 100 Max. |
| Specific Gravity @ 25°C/25°C | 1.40-1.46 |
| Residue on Evaporation, Wt. % | 0.0025 Max. |

Physical Properties

OX SOL 325 is a clear, colorless, non-flammable blend of Halogenated Aromatics and Perchloroethylene with a characteristic chloroaromatic odor and the following physical characteristics:

| | |
|---------------------------------|------------------------------|
| Distillation Range, @ 760 mm Hg | 121-155°C |
| Flash Point, (TCC) | NFTB * |
| Freezing Point | <-50°C |
| Evaporation Rate (n-BuAc=1.0) | 1.2 |
| Solubility, @ 25°C | <150 ppm in H ₂ O |
| Density, @ 25°C | 11.95 lbs/gal |
| Vapor Pressure, @ 20°C | 13 mm Hg |
| Heat of Combustion | 5,100 BTU/lb |
| Kauri-Butanol Value | 100 |

* NFTB - No Flash to Boiling

(continued)

Table 3.63: (continued)

OX SOL SA

OX SOL SAs are based on parachlorobenzotrifluoride (PCBTF or OX SOL 100), an "environmentally friendly" solvent alternative. PCBTF has a unique atmospheric profile, making it one of the few volatile organic solvents not suspected of causing stratospheric ozone depletion or tropospheric ozone and smog. PCBTF is not an ozone depleting product (ODP). It is exempt from USEPA Volatile Organic Compounds (VOC) regulations. It is not a hazardous air pollutant (HAP). It is not on the SARA Title III, Section 313 list of toxic chemicals. It is not a carcinogen and is considered only "mildly toxic" (from Federal Register 50 FR 42216-4221 10/18/85).

As a result of its favorable regulatory status and excellent properties, PCBTF is an ideal candidate for formulating environmentally friendly solutions without giving up the excellent physical and chemical properties of organic solvents.

OX SOL[®] Dielectric Breakdown*

| <u>Product</u> | <u>Test #1 (kv)</u> | <u>Test #2 (kv)</u> |
|----------------|---------------------|---------------------|
| OX SOL 73 | 30 | 38 |
| OX SOL 253 | 50+ | 50+ |
| OX SOL 325 | 50+ | 50+ |
| OX SOL 550 | 35 | 40 |
| OX SOL 100 | 48 | 50 |
| OX SOL 1000 | 40 | 50 |

* ASTM Test Method D-877; Reported in thousands of volts.

Sales Specification

OX SOL[®] 1000

| <u>Test</u> | <u>Specifications</u> |
|--------------------------------------------------------------------|---------------------------------|
| Appearance | Clear, Free of Suspended Matter |
| Color, APHA | 20 Max. |
| Acidity, ppm as Total Inorganic Acidity (by Specific Ion Probe) | 3 Max. |
| Alkalinity, ppm as NaOH | 10 Max. |
| Water Content, ppm | 150 Max. |
| Specific Gravity @ 25°C/25°C | 1.47-1.49 |
| Residue on Evaporation, Wt. % | 0.0020 Max. |

Physical Properties

OX SOL 1000 (3,4-Dichlorobenzotrifluoride) is a clear, colorless solvent with the following physical characteristics:

| | |
|-------------------------------|------------------------------|
| Boiling Point, @ 760 mm Hg | 174°C |
| Flash Point, (TCC) | 170°F |
| Freezing Point | -12.4°C |
| Evaporation Rate (n-BuAc=1.0) | 0.2 |
| Solubility, @ 25°C | 11.6 ppm in H ₂ O |
| Density, @ 25°C | 12.36 lbs/gal |
| Vapor Pressure, @ 20°C | 1.6 mm Hg |
| Heat of Combustion | 4,830 BTU/lb |
| Kauri-Butanol Value | 69 |

Table 3.64: 3M Hydrofluoroether

3M™ HFE-7100, methoxy-nonafluorobutane (C₄F₉OCH₃), is a clear, colorless and low-odor fluid intended to replace ozone-depleting materials. This proprietary fluid has zero ozone depletion potential and other favorable environmental properties. It has one of the lowest toxicological profiles of the new CFC replace materials, with a time-weighted average exposure guideline of 600 ppm (eight hour average).

The high boiling point, increased solvency and low surface tension of 3M HFE-7100 make it suitable for use in vapor degreasing applications as a neat (pure), azeotropic or co-solvent parts cleaner. In addition, its chemical and thermal stability, non-flammability and low toxicity make it useful for other industrial applications such as specialty solvent and heat transfer applications.

Typical 3M HFE-7100 Applications

- Cleaning and Rinsing Agent
 - Heavy-duty (co-solvent) cleaning - heavy oils, greases, fluxes
 - Medium-duty cleaning (azeotrope) - oils, greases, waxes
 - Light-duty cleaning (neat) - particulates, fluorolubres, light oils, fluoropolymers
- Lubricant Carrier
 - Fluorocarbons
 - Hydrocarbons
 - Silicones
- Spot-Free Water Drying Agent
 - (with surfactants added)
- Specialty Solvents, Dispersion Medium
- Heat Transfer Medium
- Spray Contact Cleaner
- CFC, HCFC, HFC and PFC Replacement Agent

Heat Transfer Properties

| Properties | 3M HFE-7100 | CFC-113 | HCFC-141b | HCFC-225 ca/cb | HFC-4310 |
|-----------------------------------|-------------|---------|-----------|----------------|----------|
| Vapor Pressure ¹ | 210 | 331 | 569 | 290 | 226 |
| Viscosity ² | 0.61 | 0.68 | 0.43 | 0.59 | 0.67 |
| Heat of Vaporization ³ | 30 | 35 | 53.3 | 34.6 | 31 |
| Specific Heat ⁴ | 0.28 | 0.22 | 0.30 | 0.24 | 0.27 |

¹ mmHg @ 25°C

² cps @ 25°C

³ cal/g @ boiling point

⁴ cal/g °C @ 25°C

Data compiled from published information.

Environmental Properties

| Property | 3M HFE-7100 | CFC-113 | HCFC-141b | HCFC-225 ca/cb | HFC-4310 |
|---------------------------------------------|-------------|---------|-----------|----------------|----------|
| Ozone Depletion Potential ¹ -ODP | 0.00 | 0.80 | 0.10 | 0.03 | 0.00 |
| Global Warming Potential ² -GWP | 500 | 5000 | 630 | 170/530 | 1300 |
| Atmospheric Lifetime-ALT (yrs) | 4.1 | 85 | 9.4 | 2.5/6.6 | 17.1 |

¹ CFC-11 = 1.0

² GWP - 100 year Integration Time Horizon (ITH)

*NOTE: HCFC-225 calcb ratio is 45/55
Data compiled from published information*

(continued)

Comparison Guide

| Property | C ₄ F ₉ OCH ₃ HFE-7100 | C ₂ Cl ₃ F ₃ * CFC-113 | CCl ₂ FCH ₃ * HCFC-141b | CH ₃ CCl ₃ * 1,1,1 TCA | C ₃ Cl ₂ HF ₅ * HCFC-225 ca/cb | C ₅ H ₂ F ₁₀ * HFC-4310 |
|--------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------|
| Boiling Point (°C) | 60 | 48 | 32 | 74 | 54 | 54 |
| Surface Tension (dynes/cm @ 25°C) | 13.6 | 17.3 | 19.3 | 25.1 | 16.2 | 14.1 |
| Heat of Vaporization (Cal/g) @ Boiling Point | 30 | 35 | 53.3 | 58 | 35 | 31 |
| Viscosity (cps @ 25°C) | 0.61 | 0.68 | 0.43 | 0.77 | 0.59 | 0.67 |
| Vapor Pressure (mmHg @ 25°C) | 210 | 331 | 569 | 128 | 137-175 | 226 |
| Specific Heat (Cal/g/°C @ 25°C) | 0.28 | 0.22 | 0.30 | 0.25 | 0.24 | 0.27 |
| Flash Point (°C) | NONE | NONE | NONE | NONE | NONE | NONE |
| Liquid Density (g/ml) @ 25°C | 1.52 | 1.56 | 1.23 | 1.30 | 1.55 | 1.58 |
| Freezing Point (°C) | -135 | -35 | -103 | -39 | -131 | -80 |
| Solubility for H ₂ O (ppm by wt.) | 95 | 110 | 420 | 266 | 370 | 490 |
| Solubility in H ₂ O (ppm by wt.) | <20 | 170 | 210 | 700 | 210 | 140 |
| ODP (CFC-11 = 1.0) | 0 | 0.8 | 0.10 | 0.1 | 0.03 | 0 |
| Atmospheric Lifetime (Years) | 4.1 | 85 | 9.4 | 5.4 | 2.5-6.6 | 17.1 |
| GWP (100 Year ITH) | 480 | 5000 | 630 | 110 | 170/530 | 1300 |
| Toxicity Data | | | | | | |
| Acute Inhalation (ppm) (4 hr. LC ₅₀) | >100M | ca50M | 62M | 16M | 37M | 10M |
| 8 hr. Exposure Guideline (ppm) | 600 | 1000 | 500 | 350 | 50 | 200 |

Table 3.64: (continued)

3M HFE-7100 Toxicological Test Results

| | |
|---------------------------------------|----------------------------------------------------------|
| Acute Lethal Inhalation Concentration | >100,000 ppm (4 hr) |
| Oral | Practically non-toxic (>5g/kg) |
| Eye Irritation | Practically non-irritating |
| Skin Irritation | Minimally irritating |
| Skin Sensitization | Not a Skin Sensitizer |
| Inhalation Range Finding (28 day) | 600 ppm Exposure Guideline ¹ |
| Developmental Toxicity | No abnormal effects observed |
| Mutagenicity | Not a mutagen |
| Cardiac Sensitization | No signs of sensitization at exposures up to 100,000 ppm |
| Ecotoxicity | In Progress |
| 90 Day Inhalation | In Progress |

¹ Exposure Guideline set by the 3M Medical Department

3M HFE-7100 Materials Compatibility

| Metals | Plastics | Elastomers |
|---------------------|---------------|----------------|
| Aluminum | Acrylic | Butyl Rubber* |
| Copper | Polyethylene | Natural Rubber |
| Carbon Steel | Polypropylene | Nitrile Rubber |
| 302 Stainless Steel | Polycarbonate | EPDM |
| Brass | Polyester | |
| Molybdenum | Epoxy | |
| Tantalum | PMMA | |
| Tungsten | PET | |
| Cu/Be Alloy C172 | ABS | |
| Mg Alloy AZ32B | | |

Compatible after one hour exposure at boiling temperature.

**Butyl Rubber best for extended exposure >1 month.*

Exceptions: some swelling of PTFE and Silicone Rubber.

Some surface oxidation of copper during heat aging.

3M HFE-71DE Hydrofluoroether Azeotrope

3M™ HFE-71DE is a hydrofluoroether, Methyl Nonafluorobutyl Ethers (C₄F₉OCH₃), in an azeotrope formulation with trans-1,2-dichloroethylene. This mixture is a true azeotrope, with constant vapor and liquid composition at its boiling point. This fluid is suited to medium duty cleaning and degreasing tasks, as well as specialty solvent applications, and is intended to replace ozone-depleting materials. It has zero ozone depletion potential and other favorable environmental properties. 3M HFE-71DE has a time-weighted average exposure guideline of 600 ppm for the 3M™ HFE-7100 component, and 200 ppm for trans-1,2-dichloroethylene (8 hr average).

The increased solvency and low surface tension, nonflammability and constant composition during boiling of 3M HFE-71DE make it suitable for immersion and vapor degreasing applications. These properties also may make the azeotrope suitable for certain coating and lubricant deposition applications where increased solvency is required.

3M HFE-71DE Typical Applications

Cleaning, Rinsing and Drying Agent

Cleaning of oils, greases, waxes

Specialty solvent applications

For information on other applications, contact your 3M representative or 3M authorized distributor.

Table 3.64: (continued)

General Properties

| Properties | 3M HFE-71DE | CFC-113 | HCFC-141b | HCFC-225 ca/cb | HFC-4310 |
|------------------------------|------------------------|-----------------------------------------------|-----------------------------------|------------------------------------------------|------------------------|
| Formulation | Azeotrope ¹ | C ₂ Cl ₃ F ₃ | CCl ₂ FCH ₃ | C ₃ Cl ₂ HF ₅ | Azeotrope ² |
| Boiling Pt °C | 41 | 48 | 32 | 54 | 39 |
| Freeze Pt °C | -24 ³ | -35 | -103 | -131 | not avail. |
| Liquid Density ⁴ | 1.37 | 1.56 | 1.23 | 1.55 | 1.41 |
| Surface Tension ⁵ | 16.6 | 17.3 | 19.3 | 16.2 | 15.2 |
| Kauri-Butanol Value | 27 | 31 | 56 | 31 | N/A |
| Flash Point | None | None | None | None | None |
| Flammability Range in Air | None | None | 7.1-18.6 ⁶ | None | N/A |

¹ 50% 3M HFE-7100 (C₄F₉OCH₃), 50% trans-1, 2-dichloroethylene² 61.7% HFC-4310 (C₅H₂F₁₀), 38% trans-1, 2-dichloroethylene (Dupont Vertrel MCA)³ Critical Solution Temperature⁴ g/ml @ 25°C⁵ dynes/cm @ 25°C⁶ Vol % by ASTM E681-94 @ 100°C**Physical Properties**

| Properties | 3M™ HFE-71DE | CFC-113 | HCFC-141b | HCFC-225 ca/cb | HFC-4310 ¹ |
|--------------------------------------------|------------------|---------|-----------|----------------|-----------------------|
| Vapor Pressure ² | 473 | 331 | 569 | 290 | 464 |
| Viscosity ³ | 0.45 | 0.68 | 0.43 | 0.59 | 0.49 |
| Heat of Vaporization ⁴ | 48 | 35 | 53.3 | 34.6 | 43.3 |
| Ozone Depletion Potential-ODP ⁵ | 0.00 | 0.80 | 0.10 | 0.03 | 0.00 |
| Global Warming Potential ⁶ | 250 | 5000 | 630 | 170/530 | N/A |
| Atmospheric Lifetime (yrs) | 4.1 ⁷ | 85 | 9.4 | 2.5/6.6 | N/A |

¹ 61.7% HFC-4310 (C₅H₂F₁₀), 38% trans-1, 2-dichloroethylene (Dupont Vertrel MCA)² mmHg @ 25°C³ cps @ 25°C⁴ cal/g @ boiling point⁵ CFC-11 = 1.0⁶ GWP - 100 year ITH, CO₂ = 1.0⁷ 4.1 - 3M HFE-7100, 0.01 trans-1, 2-dichloroethylene**3M HFE-71DE Material Specifications**

| | |
|--------------------------------------------|------------------|
| Methyl Nonafluorobutyl Ethers ¹ | 50% by weight |
| Trans-1,2-dichloroethylene | 50% by weight |
| Appearance | Clear, colorless |

¹ 3M HFE-7100 (C₄F₉OCH₃) consists of two inseparable isomers with essentially identical properties. These are (CF₃)₂CF₂OCH₃ (CAS No. 163702-08-7) and CF₃CF₂CF₂OCH₃ (CAS No. 163702-07-6).

(continued)

Table 3.64: (continued)

Regulatory Status

The U.S. Environmental Protection Agency (EPA) has completed its Pre-Manufacturing Notification (PMN) review and has permitted 3M to commercialize 3M™ HFEs immediately. Both components of 3M HFE-71DE are TSCA listed. 3M is pursuing an "Acceptable" listing for Methyl Nonafluorobutyl Ethers under the EPA's Significant New Alternative Policy (SNAP) program. Trans-1,2-dichloroethylene is approved under SNAP for use as a cleaning solvent.

As a result of its lower toxicity, trans-1,2-dichloroethylene is far less regulated in its use compared to "chlorinated solvents." The only regulations affecting 3M HFE-71DE due to the presence of trans are VOC emissions and reporting requirements if it is emitted into water or if a spill of 2000 lb or more occurs. Trans is not considered a Hazardous Air Pollutant and is not subject to annual reporting requirements. The following table lists the regulations covering trans compared to chlorinated solvents.

Regulations on Chlorine-Containing Solvents

| Regulation | Trans-1,2-dichloro ethylene | Trichloro ethylene | Perchloro ethylene | Methylene Chloride |
|---------------------------------------|---------------------------------------------|--------------------|--------------------|--------------------|
| VOC Designation | Yes | Yes | Yes | No |
| Hazardous Waste | Yes for pure trans (no for 3M™ HFE-71DE) | Yes | Yes | Yes |
| Reportable Qty for Accidental Release | 1,000 lbs (2,000 lbs in 3M HFE-71DE) | 100 lbs | 100 lbs | 1,000 lbs |
| Regulated if Emitted into Water | Yes | Yes | Yes | Yes |
| Hazardous Air Pollutant | No | Yes | Yes | Yes |
| Annual Reporting (EPCRA 313) (SARA) | No | Yes | Yes | Yes |
| OSHA List of toxins/carcinogens | No | Yes | Yes | Yes |
| NJ or CA Hazardous Lists | No | Yes | Yes | Yes |

Typical Physical Properties of HFE L-13938

| | |
|----------------------------|------|
| Boiling Point (°C) | 60 |
| Freezing Point (°C) | -135 |
| Flash Point (°C) | None |
| Solubility for water (ppm) | 95 |
| Solubility in water (ppm) | <10 |

Thermal Transport Properties of HFE L-13938

| | <u>@ 0°C</u> | <u>@ -40°C</u> |
|-------------------------------|--------------|----------------|
| Density (gm/ml) | 1.54 | 1.63 |
| Specific Heat (J/Kg °C) | 1133 | 1053 |
| Viscosity (cSt) | .60 | 1.07 |
| Thermal Conductivity (W/m °C) | .074 | .082 |

(continued)


Table 3.64: (continued)

Environmental Properties of HFE L-13938

| | | |
|---------------------------------|-----------|-----------------------------------|
| Ozone Depletion Potential (ODP) | 0 | (CFC11 = 1) |
| Volatile Organic Compound (VOC) | No | |
| Atmospheric Lifetime | 4.0 years | |
| GWP (IPCC 1994) | 500 | (CO ₂ = 1, 100th year) |
| HGWP | 0.09 | (CFC11 = 1) |



Toxicological Properties of HFE L-13938

| | |
|--------------------|-------------------------------------|
| Oral | Practically non-toxic orally |
| Eye Irritation | No irritation |
| Skin Irritation | No Irritaiton |
| Skin Sensitization | Not a Skin Sensitizer |
| Inhalation | No observable effects at 10,000 ppm |
| ALC | >100,000 ppm (4hrs) |
| Chronic Toxicity | In Progress |

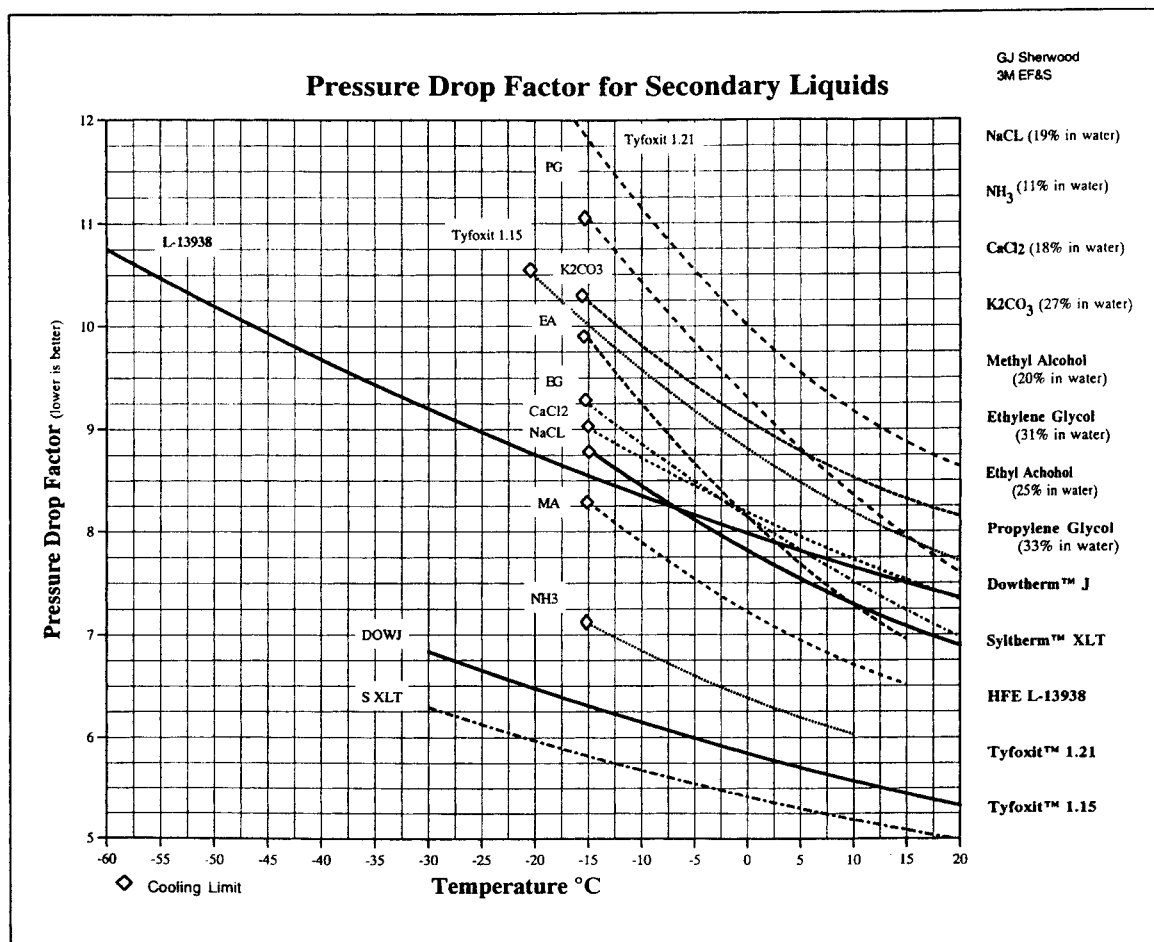

(continued)

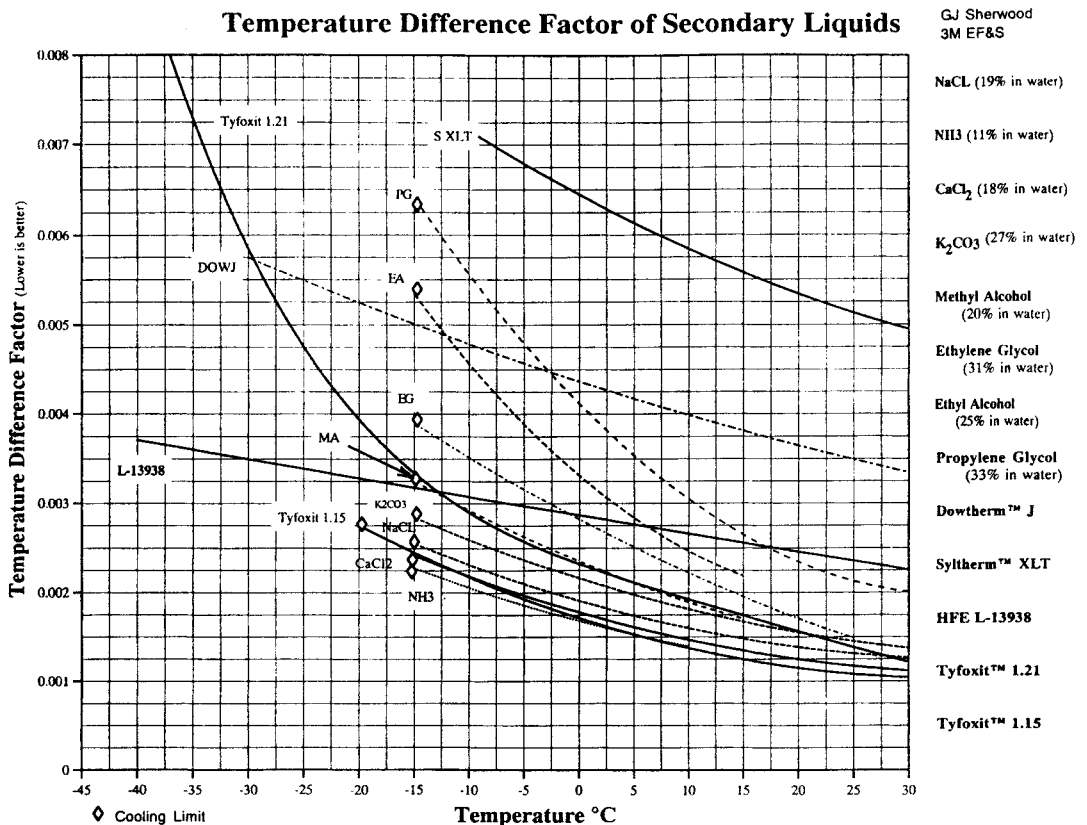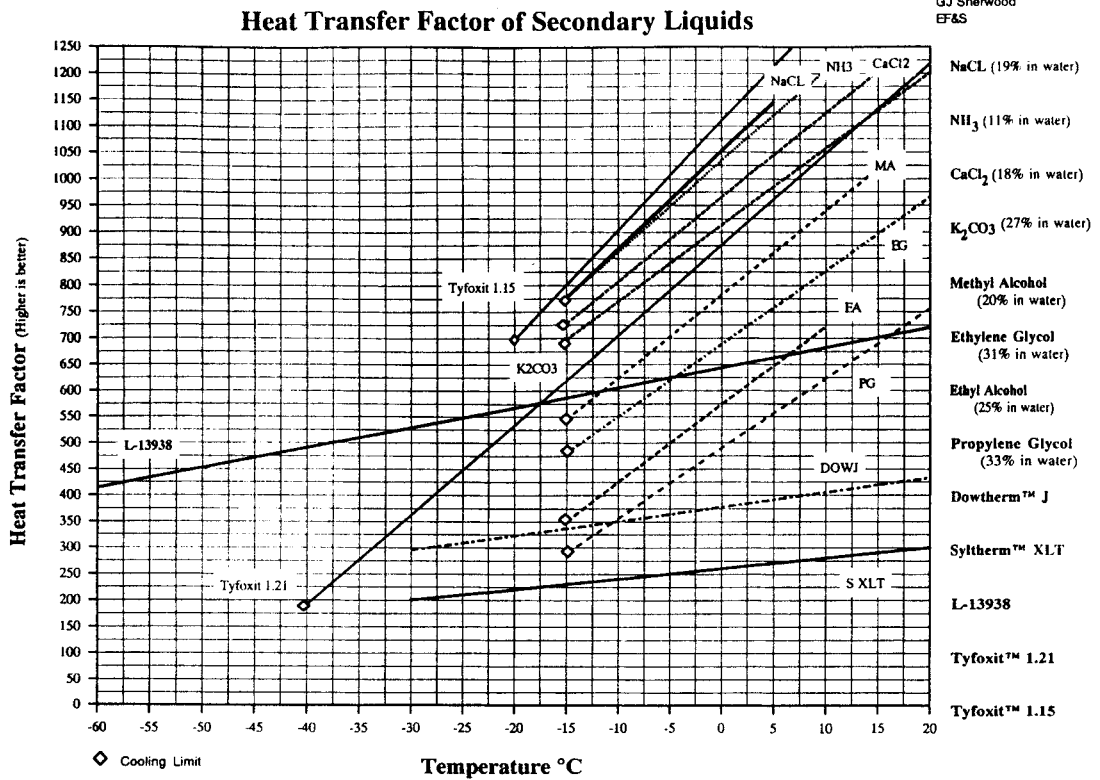
Table 3.64: (continued)



(continued)

Table 3.64: (continued)

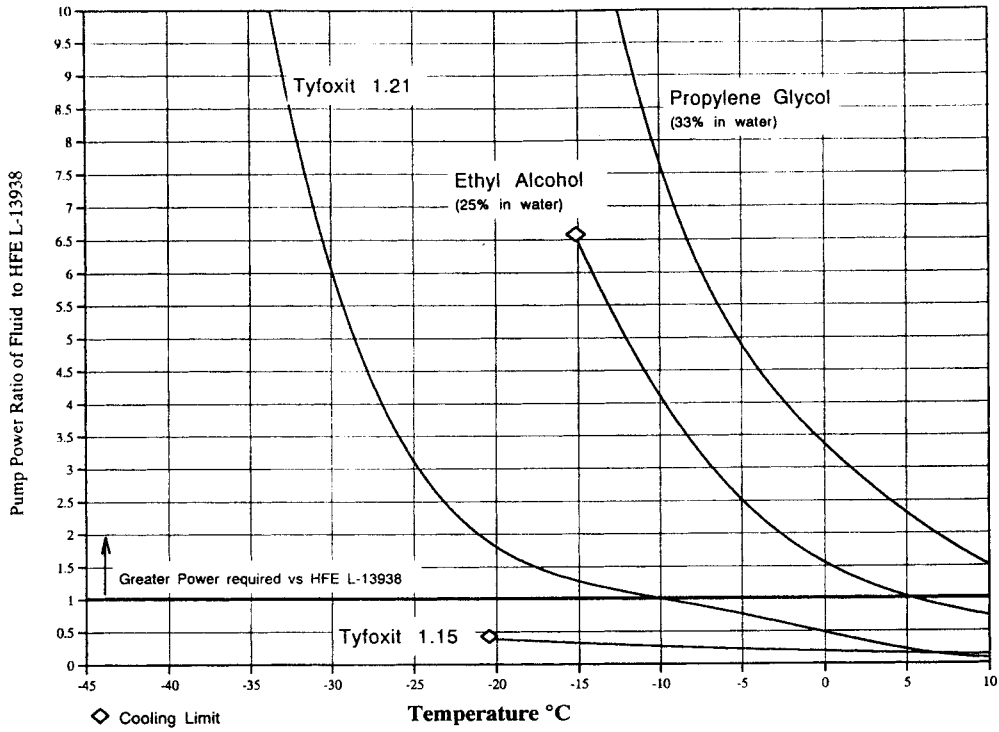Theoretical Specific Pump Power Requirements



| Property | C ₄ F ₉ OCH ₃ (HFE A) | C ₄ F ₉ OC ₂ H ₅ (HFE B) | CF ₂ ClCFCl ₂ (CFC-113) | CH ₂ CCl ₃ (TCA) |
|-----------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------|
| Boiling Point (°C) | 60 | 73 | 48 | 74 |
| Freezing Point (°C) | -135 | -117 | -35 | -39 |
| Flash Point (°C) | None | None | None | None |
| Solubility for Water (ppm)* | 95 | 92 | 170 | 266 |
| Solubility in Water (ppm)* | < 10** | < 10** | 110 | 700 |

* @ 25°C
** detection limit for material

| Property (@23°C) | C ₄ F ₉ OCH ₃ (HFE A) | C ₄ F ₉ OC ₂ H ₅ (HFE B) | CF ₂ ClCFCl ₂ (CFC-113) (@25°C) | CH ₂ CCl ₃ (TCA) |
|------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------|
| Liquid Density (g/ml) | 1.50 | 1.43 | 1.56 | 1.32 |
| Viscosity (cp) | 0.61 | 0.61 | 0.68 | 0.83 |
| Surface Tension (dynes/cm) | 13.6 | 13.6 | 17.3 | 25.1 |
| Heat of Vaporization (cal/g) | 30 | 30 | 35 | 58 |
| Specific Heat (cal/g/°C) | 0.28 | 0.29 | 0.22 | 0.24 |

(continued)

Table 3.64: (continued)

Environmental Properties of HFEs

| Property | C ₄ F ₉ OCH ₃ (HFE A) | C ₇ F ₁₅ OC ₂ H ₅ (HFE B) | CF ₃ CF ₂ CFCl ₂ (CFC-113) | CH ₂ CCl ₂ (TCA) |
|-------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------|----------------------------------------------------------------|-------------------------------------------|
| ODP (CFC-11 = 1) | 0 | 0 | 0.8 | 0.1 |
| VOC | No | No | No | No |
| Atmospheric Lifetime (years) | 5.5 | 1.2 | 110 | 6.1 |
| GWP (CO ₂ =1, 100 Year ITH) | 500 | 110 | 4500 | 100 |
| HGW (CFC-11 = 1) | 0.12 | 0.03 | 1.4 | 0.02 |

Key Material Compatibilities with HFEs

Compatible with:

Metals

Aluminum
Copper*
Carbon Steel
302 Stainless Steel

Plastics

Acrylic
Polyethylene
Polypropylene
PVC
PMMA
Polycarbonate

Elastomers

Natural
Neoprene
Urethane
EPDM
SBR
Nitrile

Exceptions:

Some swelling of PTFE
Significant swelling of Silicone Rubber
* Some surface oxidation during heat aging

One week exposures at boiling temperature

HFE Toxicity Evaluations – Status

● Phase 1 - (Acute) Tests

Oral: Practically non-toxic orally
Inhalation: No observable effects at 10,000 ppm
ALC of C₄F₉-O-CH₃: > 100,000 ppm (4 hr)
ALC of C₇F₁₅-O-C₂H₅: > 50,000 ppm (4 hr)

Skin Irritation: No Irritation
Skin Sensitization: Test In Progress
Eye Irritation: No Irritation
Ames Assay: In Preparation

● Phase 2 - (Advanced) Tests

All In Preparation
Ecotoxicity
Cardiac Sensitization
Inhalation Range Finding & Developmental Toxicity
90 Day Inhalation

Hydrocarbon Solvency Solubility for dodecane (C₁₂H₂₆)


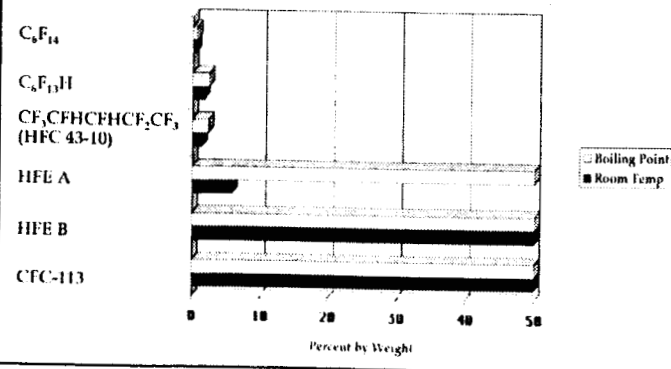


Table 3.64: (continued)

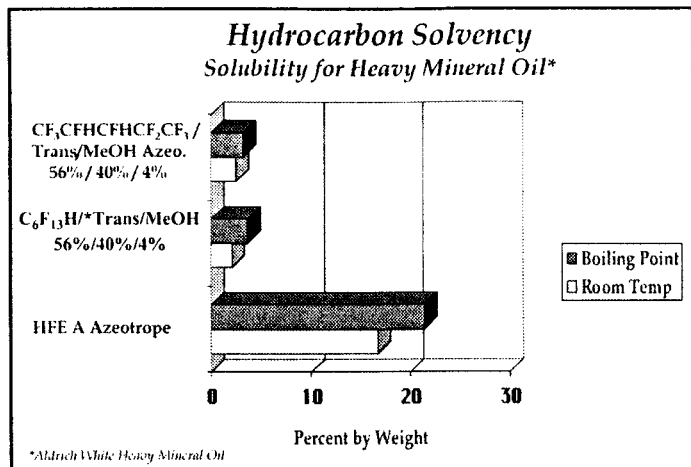

*Trans = Trans 1,2-dichloroethylene

Stability of HFEs
Hydrolytic Stability

| | C ₄ F ₉ OCH ₃ (HFE A) | C ₄ F ₉ OC ₂ H ₅ (HFE B) | CF ₂ ClCFCl ₂ (CFC-113) | C ₆ F ₁₄ |
|----------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------|--------------------------------|
| HF Generation Rate @ Boiling Point (µg/g-hr) | 0.46 | 0.07 | 0.02 | < 0.01 |
| HF Generation Rate @ 110°C (µg/g-hr) | 0.67 | 0.22 | 0.44 | < 0.01 |

• Samples heated for 16 hours in sealed tubes containing 0.1 M aqueous sodium acetate
• Analyzed using coulometric titration employing fluoride ion specific electrode

HFEs vs. HFCS
◆ Higher Hydrolytic Stability

| Compound | HF Generation Rate @ Boiling Point (µg/g-hr) | HF Generation Rate @ Boiling Point + 50 °C (µg/g-hr) |
|-------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------------------------|
| C ₄ F ₉ OCH ₃ (HFE A) | 0.46 | 0.67 |
| C ₄ F ₉ OC ₂ H ₅ (HFE B) | 0.07 | 0.22 |
| C ₂ F ₅ CH ₃ | 1.31 | 18.9 |

• Samples heated for 16 hours in sealed tubes containing 0.1 M aqueous sodium acetate
• Analyzed using coulometric titration employing a fluoride specific electrode


HFEs vs. HFCs
◆ Shorter Atmospheric Lifetimes

| HFE vs HFC | Ratio of Estimated Lifetimes* (HFE/HFC) |
|---------------------------------------------------------------------------------------------------|-----------------------------------------------|
| CF ₃ -O-CH ₃ vs CF ₃ CH ₃ | 0.03 |
| C ₂ F ₅ -O-CH ₃ vs C ₂ F ₅ CH ₃ | 0.13 |
| C ₃ F ₇ -O-CH ₃ vs C ₃ F ₇ CH ₃ | 0.20 |
| C ₄ F ₉ -O-CH ₃ vs C ₄ F ₉ CH ₃ | 0.25 |

*From calculated reaction rates with hydroxyl radical

(continued)

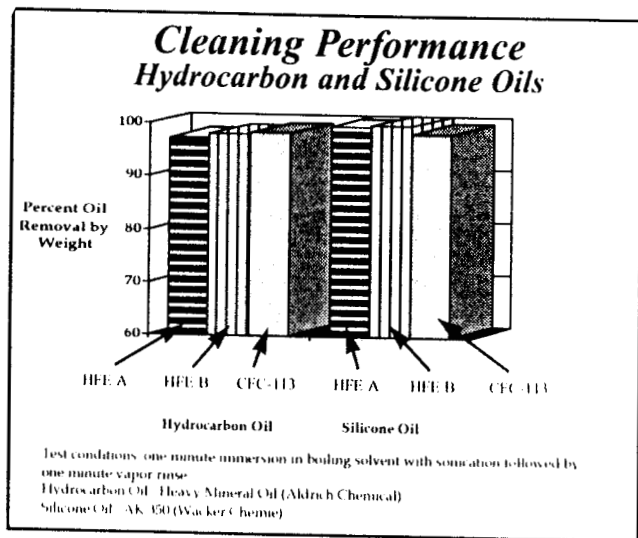Table 3.64: (continued)



HFEs vs. HFCs

◆ Lower Global Warming Potentials

| Compound | Global Warming Potential (CO ₂ = 1, 100 year ITH) |
|----------------------------------------------------------------------|-----------------------------------------------------------------|
| C ₄ F ₉ OC ₂ H ₅ (HFE B) | 110 |
| C ₄ F ₉ OCH ₃ (HFE A) | 500 |
| CF ₃ CFHCFHC ₂ F ₅ (HFC-43-10mee) | 1000 |
| CF ₃ CH ₂ F (HFC-134a) | 1200 |
| CF ₃ CFHCF ₃ (HFC-227ea) | 2050 |

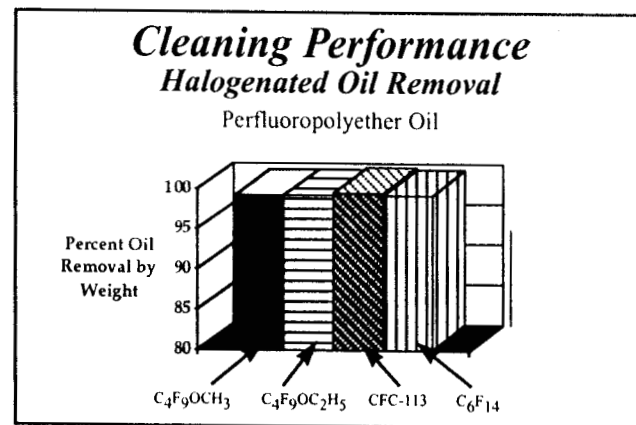
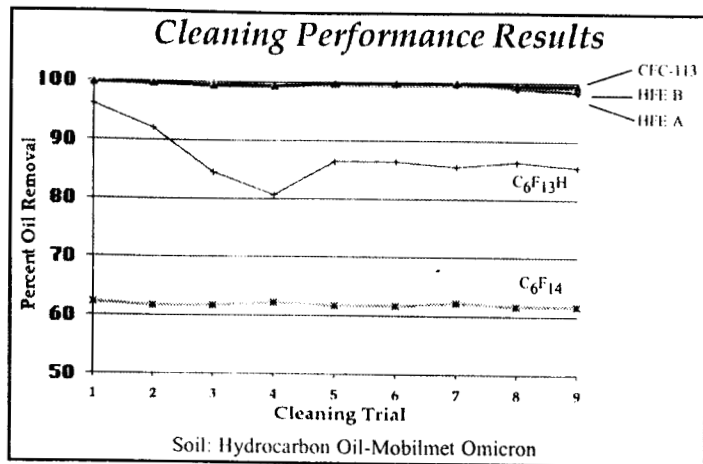


Table 3.64: (continued)

Cleaning Performance Results - As An AVD™ Rinsing Agent

| | Percent Soil Removal | | |
|-----------|------------------------------------------------|--------------------------------------------------------------|---------|
| | C ₄ F ₉ OCH ₃ | C ₄ F ₉ OC ₂ H ₅ | CFC-113 |
| Heavy Oil | 99.9 | 100.0 | 100.0 |
| Flux | 100.0 | 100.0 | 80.8 |

All materials except CFC-113 employed a 1 minute immersion in Petroform Solvating Agent 24 with sonication followed by 30 seconds immersion rinsing at the boiling point




Heavy Oil - Duo Seal Pump Oil (Sargent-Welch Scientific Co.)
Solder Flux - Alpha 611

AVD is a trademark of Petroform Inc.

Solvency of HFES

| Compound | Kauri-Butanol Value* |
|----------------------------------------------------------|----------------------|
| CFC-113 | 32 |
| 1,1,1-trichloroethane | 123 |
| | |
| C ₆ F ₁₄ | 0 |
| C ₄ F ₉ OCH ₃ | 10 |
| C ₄ F ₉ OCH ₃ Azeotrope | 27 |
| Solvating Agent 24 | >150 |

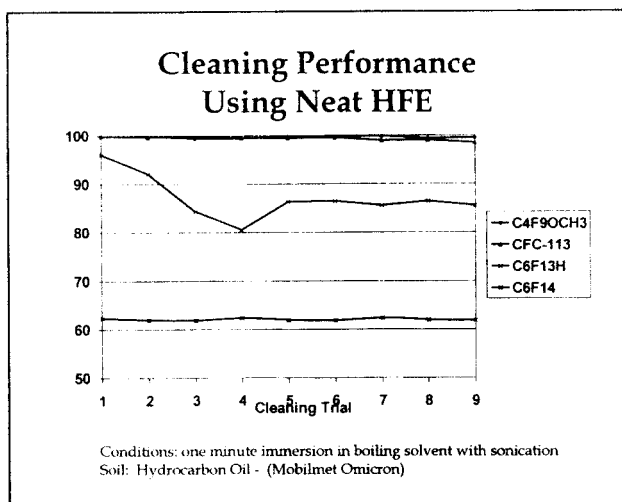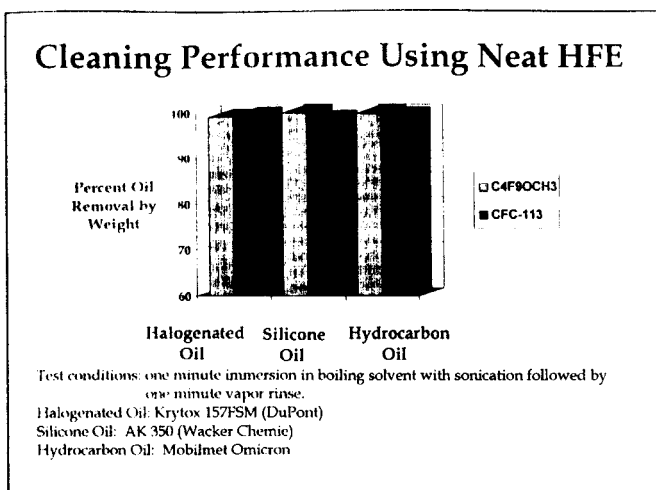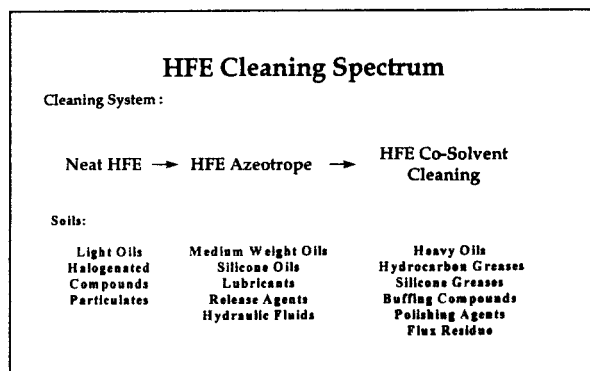* per ASTM D 1133-86



(continued)

Table 3.64: (continued)


Neat HFE Cleaning Performance α - Site Testing Results

Examples of Components Successfully Cleaned using Neat HFEs

| Customer Part | Soil Removed | Result |
|------------------|----------------------------|-----------------------------|
| Medical Device | Light Hydrocarbon Oil | Meets Customer Requirements |
| Gyroscope | Brominated Flotation Fluid | Meets Customer Requirements |
| Diskette Shutter | Light Silicone Oil* | Meets Customer Requirements |

* Cleaned in Vapor Phase

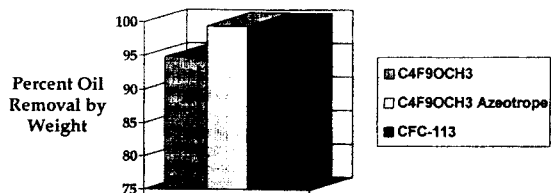Cleaning Performance Using an HFE Azeotrope



Test conditions: one minute immersion in boiling solvent with sonication
Hydrocarbon Oil: Metalub 525

Cleaning Performance as a Co-Solvent Rinsing Agent

Soil Removal (Percent by Weight)

| | C ₄ F ₉ OCH ₃ | CFC-113 | CFC-113/ EtOH |
|-----------|------------------------------------------------|---------|------------------|
| Heavy Oil | 99.9 | 100.0 | ---- |
| RMA Flux | 100.0 | 80.8 | 100.0 |

Use of HFE employed a 1 minute immersion in Petroform Solvating Agent 24 with sonication followed by 30 seconds immersion rinsing at the boiling point CFC-113 used a 1 minute immersion with sonication at the boiling point.

Heavy Oil - Duo Seal Pump Oil (Sargent-Weich Scientific Co.)
Solder Flux - Alpha 611 (Alpha Metals, Inc.)


HFE Azeotrope Cleaning Performance α - Site Testing Results

Examples of Components Successfully Cleaned using an HFE Azeotrope:

| Customer Part | Soil Removed | Results |
|-------------------|--------------------------|-----------------------------|
| Optical Component | Medium Hydrocarbon Oils* | Meets Customer Requirements |
| Medical Component | High MW Silicone Oil | Meets Customer Requirements |
| Metal Component | Hydraulic Oil | Meets Customer Requirements |

* Cleaned in Vapor Phase

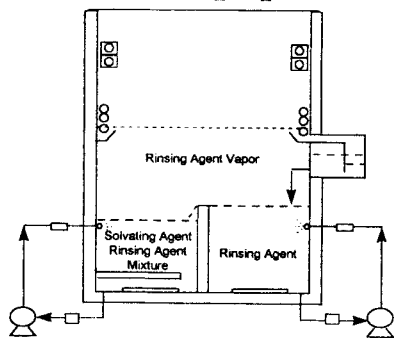Co-Solvent Cleaning Process Equipment



HFE Co-Solvent Cleaning Performance α - Site Testing Results

Examples of Components Successfully Cleaned using an HFE Co-Solvent System:

| Customer Part | Soil Removed | Results |
|----------------------|-------------------------------------|-----------------------------|
| Aerospace Component | Hydrocarbon and Fluorinated Greases | Meets Customer Requirements |
| Assembled Bearing | High MW Hydrocarbon Grease | Meets Customer Requirements |
| Electrical Connector | RMA Flux | Meets Customer Requirements |

(continued)

Table 3.64: (continued)



**Summary:
Performance of Hydrofluoroethers
in Cleaning Applications**

- ◆ Physical Properties Which Closely Match ODSs
- ◆ Very Good Environmental Profile
 - Not Precursors to Photochemical Smog (VOCs)
 - Zero Ozone Depletion Potential
 - Short Atmospheric Lifetimes
 - Low Global Warming Potentials
- ◆ Solvency for a Number of Soils
- ◆ Effective Cleaning Agents in a Variety of Processes

**Solubility (at 25°C) of Various Solutes
in PFC, HFC, and HFE**

| Solute | Solubility (percent) in | | | |
|-------------|-------------------------|--------------------|---------------------------|--------------------------|
| | PFC ⁽¹⁾ | HFC ⁽²⁾ | Methyl HFE ⁽³⁾ | Ethyl HFE ⁽⁴⁾ |
| IPA | <1 | Miscible | Miscible | Miscible |
| Kerosene | <1 | 2 | 5 | Miscible |
| Mineral oil | <1 | <1 | <1 | <1 |
| Limonene | <1 | 3.5 | 20 | Miscible |
| AVD 19 | <1 | Miscible | Miscible | Miscible |

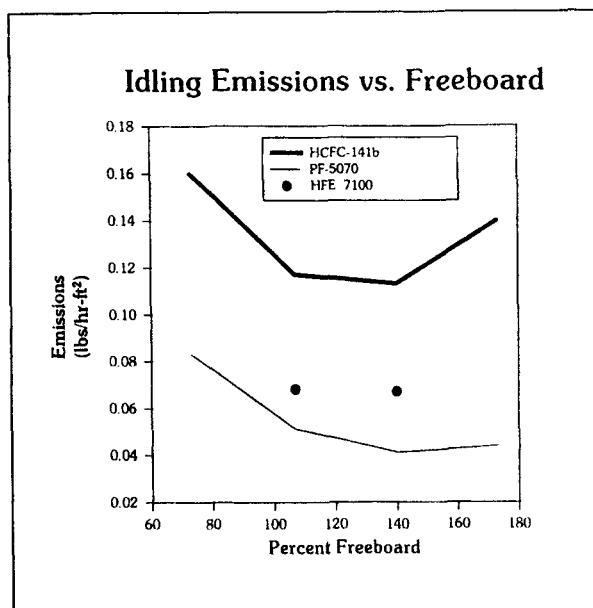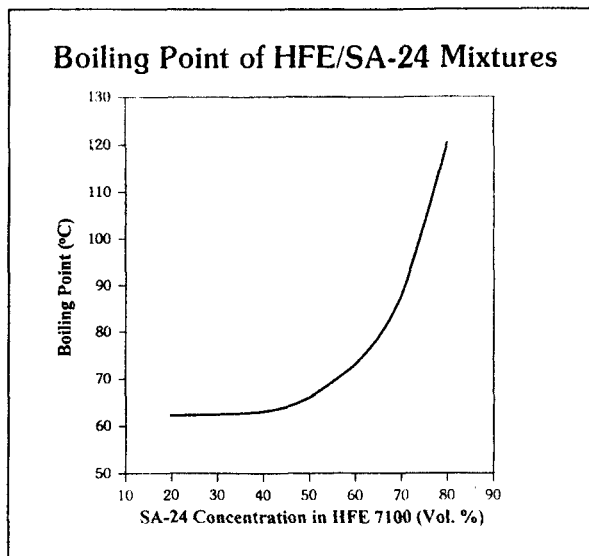(1) C₆F₁₄ (Perfluorohexane)
 (2) C₆F₁₃H ("1-H Perfluorohexane")
 (3) F₅C₂OCH₃
 (4) F₅C₂OC₂H₅




Selected Parts and Soils Cleaned

| | |
|-------------------------------------------|--------------|
| Parts | Soils |
| Ball bearings | Cutting Oil |
| Ball bearing assemblies | EP Grease |
| Contact lens mounts | RMA flux |
| Fuel injector components | Wax |
| Graduated capillary spacing test assembly | |
| Heat exchangers | |
| Printed circuit assemblies | |

(continued)

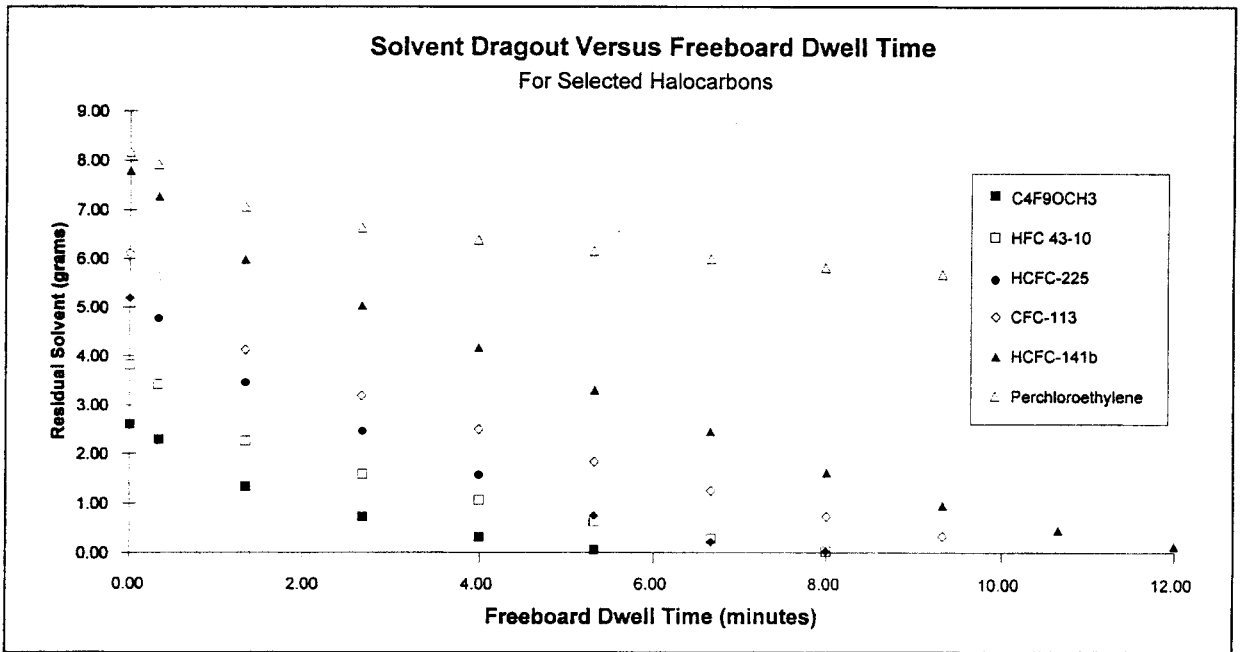Table 3.64: (continued)



HFE Toxicity Evaluation - Status

◆ Phase 1 - Acute Tests

| | |
|-----------------------------------------------------------------------|-------------------------------------|
| Inhalation | No observable effects at 10,000 ppm |
| ALC of C ₃ F ₉ -O-CH ₃ | > 100,000 ppm (4 hr) |
| ALC of C ₃ F ₉ -O-C ₂ H ₅ | > 50,000 ppm (4 hr) |
| Oral | Practically non-toxic orally |
| Eye Irritation | No Irritation |
| Skin Irritation | No Irritation |
| Skin Sensitization | Not a Skin Sensitizer |

◆ Phase 2 - Advanced Tests

In Progress

- Ecotoxicity
- Inhalation Range Finding (28 day)
- Developmental Toxicity
- Cardiac Sensitization
- 90 Day Inhalation

Table 3.64: (continued)

Key Material Compatibilities with HFEs

Compatible after one hour exposure at boiling temperature:


| Metals | Plastics | Elastomers |
|-----------------------|---------------|----------------|
| Aluminum | Acrylic | Natural Rubber |
| Copper | Polyethylene | Butyl Rubber |
| Carbon Steel | Polypropylene | Nitrile Rubber |
| 302 Stainless Steel | Polycarbonate | EPDM |
| Brass | Polyester | |
| Zinc | Nylon | |
| Molybdenum | Epoxy | |
| Tantalum | PMMA | |
| Titanium | PVC | |
| Tungsten | PET | |
| Cu/Be Alloy C172 | ABS | |
| Magnesium Alloy AZ31B | | |

Exceptions: Some swelling of PTFE and Silicone Rubber.
Some surface oxidation of copper during heat aging.

Applications for HFEs

- ◆ **Cleaning Solvents**
 - Metals & Precision Cleaning
 - Electronics Cleaning
- ◆ **Carrier Solvents**
- ◆ **Drying Fluid**
- ◆ **Heat Transfer Fluid**
- ◆ **Clean Extinguishing Agents**

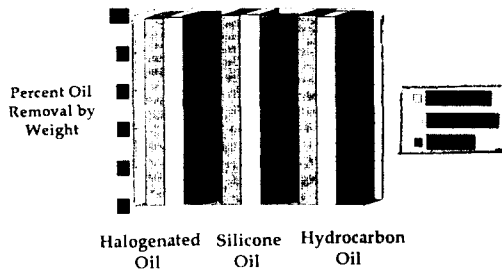Cleaning Performance Using Pure HFE



Test conditions: one minute immersion in boiling solvent with sonication followed by one minute vapor rinse.
Halogenated Oil: Krytox 157FSM (DuPont)
Silicone Oil: AK 350 (Wacker Chemie)
Hydrocarbon Oil: Mobilmet Omicron

Hydrofluoroethers

A Family of New Fluorinated Solvents

- ◆ Cover a Range of Boiling Points
- ◆ Effective Cleaning Agents
- ◆ Good Materials Compatibility and High Stability
- ◆ Are Not Precursors to Photochemical Smog (VOCs)
- ◆ Have Zero Ozone Depletion Potential
- ◆ Short Atmospheric Lifetimes
- ◆ Low Global Warming Potentials
- ◆ With Favorable Toxicity Results
- ◆ Additional New Materials Under Development

Nitroparaffins

Table 4.1: Angus Nitroparaffins (34)

Nitromethane CH_3NO_2
CAS Registry No. 75-52-5

Nitroethane $\text{CH}_3\text{CH}_2\text{NO}_2$
CAS Registry No. 79-24-3

1-Nitropropane $\text{CH}_3\text{CH}_2\text{CH}_2\text{NO}_2$
CAS Registry No. 108-03-2

2-Nitropropane $\text{CH}_3\text{CH}(\text{NO}_2)\text{CH}_3$
CAS Registry No. 79-46-9

Specifications

| | Nitromethane | Nitroethane | 1-Nitropropane | 2-Nitropropane |
|----------------------------------------|--------------|-------------|----------------|----------------|
| Purity, % by wt (min.)* | 98.0 | 98.0 | 98.5 | 98.0 |
| Total nitroparaffins, % by wt (min.)* | 99.0 | 99.0 | 99.0 | 99.0 |
| Specific gravity at 25/25°C | 1.124-1.135 | — | — | — |
| Acidity as acetic acid, % by wt (max.) | 0.1 | — | 0.2 | 0.1 |
| Water, % by wt (max.) | 0.1 | 0.2 | 0.1 | 0.1 |
| Color, APHA (max.) | 20 | 20 | 20 | 20 |

*Determined by gas chromatography

Typical Properties of Commercial-Grade Nitroparaffins

| | Nitromethane | Nitroethane | 1-Nitropropane | 2-Nitropropane |
|----------------------------------------------------------|---------------------|---------------------|---------------------|---------------------|
| Distillation range at 1 atm (90% min.), °C | 100-103 | 112-116 | 129-133 | 119-122 |
| Vapor density (air=1) | 2.11 | 2.58 | 3.06 | 3.06 |
| Change of density with temperature, 0-50°C, g/(ml·°C) | 0.0014 | 0.0012 | 0.0011 | 0.0011 |
| Weight per U.S. gallon at 68°F, lb | 9.4 | 8.75 | 8.35 | 8.24 |
| Flash point, Tag open cup, °F | 112 | 106 | 120 | 100 |
| Tag closed cup, °F | 96 | 87 | 96 | 82 |
| Lower limit of flammability, % by vol (at °C) | 7.3 ⁽³³⁾ | 3.4 ⁽³⁰⁾ | 2.2 ⁽³⁴⁾ | 2.5 ⁽²⁷⁾ |
| Ignition temperature, °C | 418 | 414 | 420 | 428 |
| Evaporation rate (<i>n</i> -butyl acetate=100) | 139 | 121 | 88 | 110 |
| Evaporation number (diethyl ether=1) | 9 | 11 | 16 | 10 |

Physical Properties of the Nitroparaffins

| | Nitromethane | Nitroethane | 1-Nitropropane | 2-Nitropropane |
|-----------------------------------|--------------|-------------|----------------|----------------|
| Molecular weight (calcd.) | 61.041 | 75.068 | 89.095 | 89.095 |
| Boiling point at 760 mmHg, °C | 101.20 | 114.07 | 131.18 | 120.25 |
| Vapor pressure at 25°C, mmHg | 36.66 | 20.93 | 10.23 | 18.0 |
| Freezing point, °C | -28.55 | -89.52 | -103.99 | -91.32 |
| Density at 20°C, g/ml | 1.138 | 1.051 | 1.001 | 0.988 |
| at 30°C, g/ml | 1.124 | 1.039 | 0.991 | 0.977 |
| Coefficient of expansion per °C | 0.00122 | 0.00112 | 0.00101 | 0.00104 |
| per °F | 0.00068 | 0.00062 | 0.00056 | 0.00058 |
| Refractive index, n_D , at 20°C | 1.38188 | 1.39193 | 1.40160 | 1.39439 |
| at 30°C | 1.37738 | 1.38754 | 1.39755 | 1.39028 |
| Surface tension at 20°C, dynes/cm | 37.48 | 32.66 | 30.64 | 29.87 |
| Viscosity at 20°C, cp | 0.647 | 0.677 | 0.844 | 0.770 |
| at 30°C, cp | 0.576 | 0.602 | 0.740 | 0.677 |



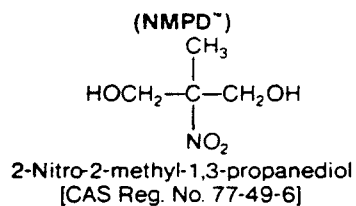


(continued)

Table 4.1: (continued)

Physical Properties of the Nitroparaffins

| | Nitromethane | Nitroethane | 1-Nitropropane | 2-Nitropropane |
|------------------------------------------------|--------------|-------------|----------------|----------------|
| Heat of combustion (liq.) at 25°C, kcal/mole | -169.3 | -325.6 | -481.9 | -478.0 |
| Heat of vaporization (liq.) at 25°C, kcal/mole | 9.147 | 9.94 | 10.37 | 9.88 |
| at bp, kcal/mole | 8.23 | 9.08 | 9.19 | 8.79 |
| Heat of formation (liq.) at 25°C, kcal/mole | -27.03 | -33.9 | -40.15 | -43.2 |
| Specific heat at 25°C, cal/(mole·°C) | 25.33 | 33.10 | 41.96 | 41.87 |
| at 25°C, cal/(g·°C) | 0.415 | 0.441 | 0.471 | 0.470 |
| Dielectric constant at 30°C | 35.87 | 28.06 | 23.24 | 25.52 |
| Dipole moment, μ , gas, Debye units | 3.50 | 3.58 | 3.72 | 3.73 |
| liquid, Debye units | 3.17 | 3.19 | — | — |
| Aqueous azeotrope, bp, °C | 83.59 | 87.22 | 91.63 | 88.55 |
| % NP by wt | 76.4 | 71.0 | 63.5 | 70.6 |
| pH of 0.01M aqueous solution | 6.4 | 6.0 | 6.0 | 6.2 |
| Solubility in water at 20°C, % by wt | 10.5 | 4.6 | 1.5 | 1.7 |
| at 25°C, % by wt | 11.1 | 4.7 | 1.5 | 1.7 |
| at 70°C, % by wt | 19.3 | 6.6 | 2.2 | 2.3 |
| Solubility of water in NP at 20°C, % by wt | 1.8 | 0.9 | 0.6 | 0.5 |
| at 25°C, % by wt | 2.1 | 1.1 | 0.6 | 0.5 |
| at 70°C, % by wt | 7.6 | 3.0 | 1.7 | 1.8 |
| Hydrogen bonding parameter, γ | 2.5 | 2.5 | 2.5 | 2.5 |
| Solubility parameter, δ | 12.7 | 11.1 | 10.7 | 10.7 |

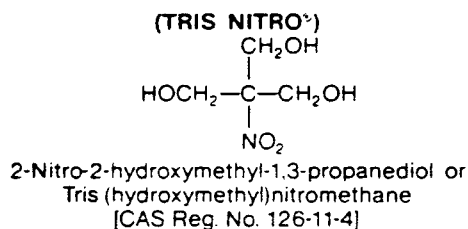Table 4.2: Angus Nitro Alcohols (34)



(continued)

Table 4.2: (continued)

Product Specifications*

| Solid Form | Melting | Water % | Free Formaldehyde | 1% by wt. | |
|--------------------|---------|---------|-------------------|--------------|--------------|
| | Pt., °C | By wt. | % by wt. | Aq. Solution | |
| | (Min.) | (Max.) | (Max.) | pH | Color (max.) |
| NMP (pellets) † | 86-90 | 0.5 | 0.06 | - | - |
| TRIS NITRO (solid) | - | - | - | 2.0-5.0 | 5 Gardner |

† 23.50% (min.) by wt. of bound formaldehyde, 1.5% (max.) by wt. of stearic acid.


| Aqueous Solutions | Assay, % by wt. (min.) | Free Formaldehyde % by wt. (max.) | pH, 20% by wt. Aq. Solution | Color, Gardner, (max.) |
|-------------------|------------------------|-----------------------------------|-----------------------------|------------------------|
| TRIS NITRO 25% | 25.0 | 1.0 | 2.0 - 5.0 | 5 |
| TRIS NITRO 37.5% | 37.5 | 1.0 | - | - |
| TRIS NITRO 50% | 50.0 | 1.0 | 2.0 - 4.5 | 5 |
| NEPD Aqueous | 55.0 | 1.0 | 2.0 - 5.0 | 5 |
| NMP Concentrate | 60.0 | 0.5 | 2.5 - 5.1 | 1 |

• Test methods available upon request

Physical Properties of Purified Materials

| | NMP | NMPD | NEPD | NB | TRIS NITRO |
|-------------------------------------------|--------|---------|---------|-----------|-----------------|
| Molecular weight (calc.) | 119.12 | 135.12 | 149.15 | 119.12 | 151.12 |
| Melting point, °C | 90 | ~160 | ~150 | -47 - -48 | 175-176 decomp. |
| Boiling pt., °C at 10 mmHg | - | decomp. | decomp. | 105 | - |
| at 15 mmHg | 94 | - | - | - | - |
| pH of 0.1 M soln at 20°C | 5.1 | 5.4 | 5.5 | 4.5 | 5.0 |
| Density at 25°C, g/mL | - | - | - | 1.129 | - |
| Wt. per gallon, lb at 68°F | - | - | - | 9.43 | - |
| Coefficient of expansion per °C | - | - | - | 0.00076 | - |
| Refractive index, n _D at 20°C | - | - | - | 1.444 | - |
| Surface tension at 20°C dynes/cm | - | - | - | 37.7 | - |
| Solubility in 100 mL of water at 20°C (g) | 350 | 80 | 400 | 54 | 220 |

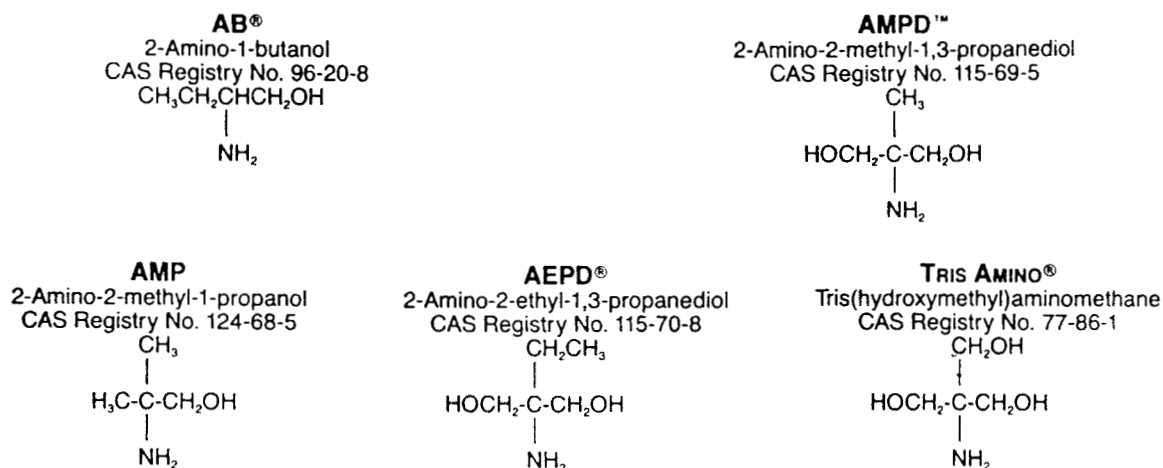Table 4.3: Angus Primary Amino Alcohols (34)



(continued)

Table 4.3: (continued)

| Typical Properties | | | | | | |
|--------------------------------------|-----------------------------|---------|-------------------|---------------------------------|----------------------------------|----------------------------------|
| | 2-Amino-2-methyl-1-propanol | | 2-Amino-1-butanol | 2-Amino-2-ethyl-1,3-propanediol | 2-Amino-2-methyl-1,3-propanediol | Tris(hydroxymethyl)-aminomethane |
| | AMP | AMP-95* | AB | AEPD | AMPD | TRIS AMINO |
| | Regular® | | | | | Crystals |
| Neutral Equivalent | 88.5-91 | 93-97 | 88.5-91 | 124 (max.) | 103-107 | 121-122 |
| Water, % by wt. (max.) | 0.8 | 5.8 | 0.5 | 3.8 | 0.5 | 0.5 |
| Melting point, °C (min.) | — | — | — | — | 100 | 160 |
| Color (max.) | 20 APHA | 20 APHA | 100 APHA | — | — | — |
| Color of 20% aqueous solution (max.) | — | — | — | 2 Gardner | 50 APHA | 40 APHA |

Physical Properties of Purified Materials

| | 2-Amino-2-methyl-1-propanol | 2-Amino-1-butanol | 2-Amino-2-ethyl-1,3-propanediol | 2-Amino-2-methyl-1,3-propanediol | Tris(hydroxymethyl)-aminomethane |
|---------------------------------------|-----------------------------|-------------------|---------------------------------|----------------------------------|----------------------------------|
| | Molecular weight (calcd.) | 89.14 | 89.14 | 119.17 | 105.14 |
| Boiling point at 760 mm Hg, °C | 165 | 178 | — | — | — |
| Boiling point at 10 mm Hg, °C | — | — | 152-153 | 151-152 | 219-220 |
| Melting point, °C | 30-31 | -2 | 37.5-38.5 | 109-111 | 171-172 |
| Specific gravity at 40/40°C | 0.928 | — | 1.101 | — | — |
| pH of 0.1M aqueous solution at 20°C | 11.3 | 11.1 | 10.8 | 10.8 | 10.4 |
| Solubility in water at 20°C, g/100 mL | miscible | miscible | miscible | 250 | 80 |
| Weight per gallon at 20°C, lb | 7.78 | 7.86 | 9.15 | — | — |
| pK _a at 25°C | 9.72 | 9.52 | 8.80 | 8.76 | 8.03 |

Additional Properties of AMP

| | AMP Regular | AMP-95 |
|--------------------------------------------|-------------|---------|
| Viscosity at 10°C, cps | — | 561 |
| 25°C, cps | — | 147 |
| 30°C, cps | 102 | — |
| 50°C, cps | 24 | — |
| 70°C, cps | 9 | — |
| 90°C, cps | 4 | — |
| Vapor pressure at 100°C, mm Hg | 59 | — |
| 150°C, mm Hg | 457 | — |
| Specific gravity at 25/25°C | — | 0.942 |
| Coefficient of expansion per °C | 0.00095 | 0.00096 |
| Refractive index, n _D , at 20°C | 1.449 | — |
| Heat of vaporization at 110°C, kcal/mole | 13.2 | — |
| 130°C, kcal/mole | 12.5 | — |
| 150°C, kcal/mole | 12.3 | — |
| 165°C, kcal/mole | 12.1 | — |
| Heat of dissociation at 25°C, kcal/mole | 1.29 | — |

Table 4.4: Angus DMAMP-80 (34)

80% 2-Dimethylamino-2-Methyl-1-Propanol Solution CAS Reg. No. 7005-47-2

2-Dimethylamino-2-methyl-1-propanol, a member of the family of Angus amino alcohols, is the tertiary-amine homolog of 2-amino-2-methyl-1-propanol (AMP). 2-Dimethylamino-2-methyl-1-propanol is available as DMAMP-80 which contains about 20% by weight water.

(continued)

Table 4.4: (continued)

Typical Properties

The following are typical properties of DMAMP-80; they are not to be considered product specifications.

| | | |
|------------------------------|-------|------------------|
| Neutral Equivalent | | ~148 |
| Specific Gravity @ 25/25°C | | 0.95 |
| Weight per Gallon @ 25°C | | 7.9 lb |
| Flash Point, Tag Open Cup | | 150°F/66°C |
| Tag Closed Cup | | 153°F/67°C |
| Freezing Point | | -4°F/-20°C |
| Boiling point @ 760 mm Hg | | 208°F/~98°C |
| Viscosity @ 25°C, Gardner | | A-A ₂ |
| pH of 0.1 N Aqueous Solution | | 11.6 |

Table 4.5: Industrial Amines Ranked in Order of Decreasing Base Strength (34)

| Amine | pKa (20° C) | Molecular Weight | Vapor Pressure (mm Hg) | Boiling Point °C (1 atm.) | Flash Point (°F C/C ¹) |
|--------------------------------------------------|----------------|---------------------|------------------------------|---------------------------------|------------------------------------------|
| Cyclohexylamine | 10.79 | 99 | 95 | 135 | 90 |
| Triethylamine | 10.74 | 101 | 57 | 90 | 20 |
| Diethylaminoethanol (DEAE) | 9.87 | 117 | 1.0 | 163 | 140 |
| → AMINOMETHYLPROPANOL (AMP-95™) | 9.82 | 89 | 0.7 | 165 | 172 |
| → AMINOBUTANOL (AB™) | 9.52 | 89 | 1.0 | 178 | 193 ² |
| Monoethanolamine (MEA) | 9.44 | 61 | 0.36 | 171 | 195 |
| Monoisopropanolamine (MIPA) | 9.40 | 75 | 0.6 | 160 | 165 |
| Dimethylethanolamine (DMEA) | 9.31 | 89 | 4.0 | 134 | 105 |
| Ammonia (29.4%) | 9.24 | 17 | 357 | N/A | — |
| Diethanolamine (DEA) | 8.88 | 105 | <0.01 | 269 | 300 |
| → AMINOETHYLPROPANEDIOL (AEPD®) | 8.80 | 119 | <0.01 | 153 ³ | >200 |
| → AMINOMETHYLPROPANEDIOL (AMPD™) | 8.76 | 105 | <0.01 | 152 ³ | N/A |
| Diisopropanolamine (DIPA) | 8.70 | 133 | 0.02 | 250 | 250 |
| Morpholine | 8.43 | 87 | 10.08 | 129 | 100 |
| → TRIS(HYDROXYMETHYL)AMINO-METHANE (TRIS AMINO®) | 8.03 | 121 | <0.01 | 220 ³ | N/A |
| Triisopropanolamine (TIPA) | 7.86 | 191 | 0.0008 | 305 | 320 |
| Triethanolamine (TEA) | 7.77 | 149 | <0.01 | 335 | 365 |

¹ Cleveland Open Cup

² Tag Closed Cup

³ 10 mm Hg

Table 4.6: Comparing Amines for Safety (34)

| | Acute Oral LD ₅₀ | Acute Skin Penetration LD ₅₀ (Rabbits) | Eye Injury Rabbits | Primary Skin Irritation | Threshold Limit | Flash Point (Tag Closed Cup) | DOT Hazard Label Required |
|----------------------------------------|--------------------------------|------------------------------------------------------------|--------------------------|-------------------------------|--------------------|---------------------------------------|------------------------------------|
| AMP | 2.9 g/kg (Rats) | No deaths at 2 g/kg | Severe | Severe | None Est. | 172°F | None (Combustible)* |
| Monoethanolamine (MEA) | 2.1 g/kg (Rats) | 1.0 g/kg | Severe | Corrosive | 3 PPM | 185°F | Corrosive |
| Diethylaminoethanol (DEAE) | 1.4 g/kg (Rats) | 1.26 g/kg | Severe | Severe | 10 PPM | 140°F | None (Combustible)* |
| Dimethylaminoethanol (DMAE) | 1.3 g/kg (Rats) | 1.37 g/kg | Severe | Severe | None Est. | 105°F | None (Combustible)* |
| Morpholine | 1.0 g/kg (Rats) | 0.5 g/kg | Severe | Corrosive | 20 PPM | 95°F | Flammable |
| Triethylamine | 0.46 g/kg (Rats) | 0.42 g/kg | Severe | Trace | 25 PPM | 17°F | Flammable |
| Triethanolamine | 8.7 g/kg (Rats) | 22.5 g/kg Killed 0 of 5 | Severe | Minor | None Est. | >200°F | None |

* Combustible Materials Require Placarding Only For Bulk Shipments.

Table 4.7: NIPAR 640 (34)

| Typical Properties of NIPAR 640 | | Specifications |
|------------------------------------------------------------|---------|-----------------------------|
| Distillation range at 760 mmHg (90% min.), °C | 112-133 | Nitroethane, % by wt |
| Freezing point, °C | ~ -100 | 1-Nitropropane, % by wt |
| Vapor pressure at 20°C, mmHg | 13 | Total nitroparaffin content |
| Density of Vapors (air=1) (calcd.) | 2.6-3.0 | % by wt (min.) |
| Specific gravity at 20/20°C | ~ 1.01 | Water, % by wt (max.) |
| Weight per U.S. gallon at 20°C, lb | ~ 8.4 | Color, APHA (max.) |
| Coefficient of expansion per °C | 0.001 | |
| Flash point, Tag closed cup, °F | 94 | |
| Evaporation rate, by vol (<i>n</i> -butyl acetate=100) | 100 | |
| Solubility in water at 20°C, % by wt | 2.6 | |

Azeotropes of NIPAR 640 Components
(Nitroethane and 1-Nitropropane)

| Component "A" | Azeotrope with Nitroethane | | | Azeotrope with 1-Nitropropane | |
|----------------------------------|----------------------------|------------------------|-------------------|-------------------------------|-------------------|
| | Boiling Point, °C | Weight % Component "A" | Boiling Point, °C | Weight % Component "A" | Boiling Point, °C |
| Water | 100.0 | 28.5 | 87.2 | 36.5 | 91.63 |
| Ethyl Alcohol | 78.3 | 87.4 | 78.0 | — | — |
| <i>n</i> -Propyl alcohol | 97.2 | 68.2 | 94.5 | 91.2 | 96.95 |
| Isopropyl alcohol | 82.4 | 89.4 | 81.8 | — | — |
| <i>n</i> -Butyl alcohol | 117.8 | 45 | 107.7 | 67.8 | 115.3 |
| sec-Butyl alcohol | 99.5 | 72.4 | 97.2 | 95.9 | 99.4 |
| Isobutyl alcohol | 108.0 | 60 | 102.5 | 84.8 | 105.28 |
| <i>t</i> -Butyl alcohol | 82.4 | 95.5 | 82.2 | — | — |
| Amyl alcohol | 138.2 | 17 | 137.8 | — | — |
| Isoamyl alcohol | 131.9 | 22 | 112.0 | — | — |
| Ethylene glycol monoethyl ether | 135.1 | — | — | 36.1 | 128.3 |
| <i>n</i> -Heptane | 98.4 | 72 | 89.2 | 85.8 | 94.6 |
| <i>n</i> -Nonane | 150.8 | — | — | 36.4 | 126.2 |
| Toluene | 110.8 | 75 | 106.2 | — | — |
| Ethylbenzene | 136.2 | — | — | 41.0 | 127.5 |
| <i>o</i> -Xylene | 143.6 | — | — | 15.0 | 130.9 |
| Ethyl butyrate | 121.5 | 27 | 113.7 | — | — |
| Ethyl isobutyrate | 110.1 | 73 | 108.5 | — | — |
| Isobutyl acetate | 117.4 | 40 | 112.5 | — | — |
| Ethylene glycol monomethyl ether | 124.5 | — | — | 58.7 | 121.4 |


It is desirable that the optimum quantity of NIPAR 640 be used for each particular system. This optimum will vary from system to system, but normally it will fall in the range of 8% to 25% of the solvent blend.

| | Resistivity, megohm | Relative Evaporation Rate* |
|---------------------------|------------------------|-------------------------------|
| Dimethylformamide | 0.02 | 17 |
| Ektasolve EM ⁺ | 0.02 | 50 |
| NIPAR 640 | 0.03 | 100 |
| Ektasolve EE ⁺ | 0.04 | 38 |
| Ektasolve EB ⁺ | 0.05 | 10 |
| Isopropyl alcohol, 99% | 0.07 | 258 |
| Isophorone | 0.07 | 4 |
| Methyl ethyl ketone | 0.07 | 568 |
| <i>n</i> -Butyl alcohol | 0.08 | 48 |
| Methyl isobutyl ketone | 0.13 | 186 |
| Isobutyl alcohol | 0.15 | 90 |
| Cyclohexanone | 0.20 | 23 |

**n*-Butyl acetate = 100 *Trademark of Eastman Kodak Company

(continued)

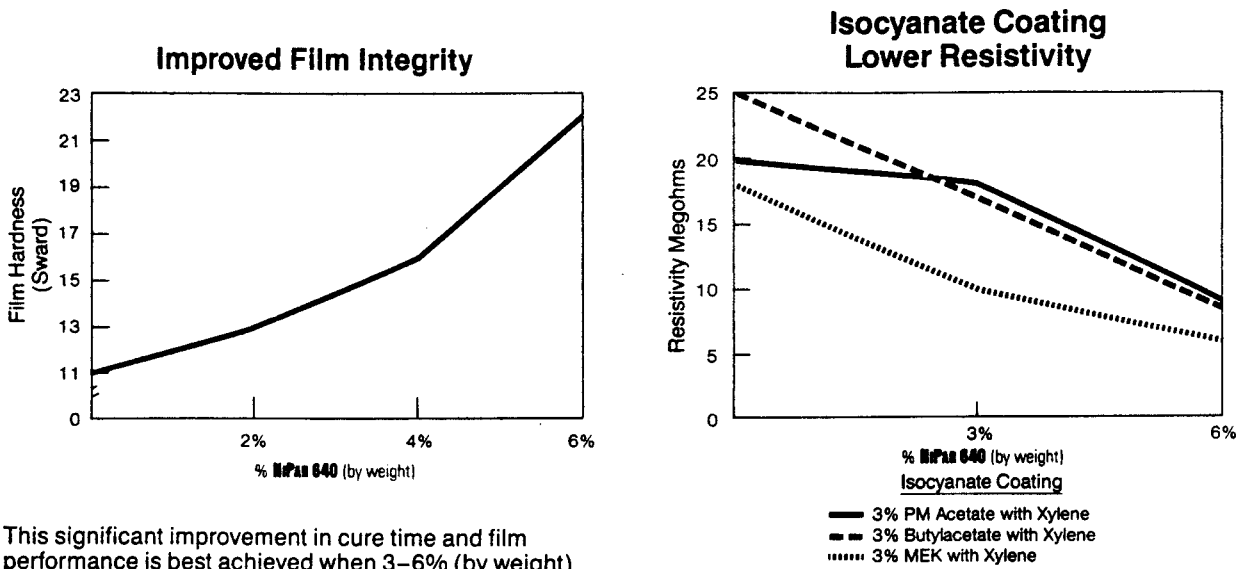Table 4.7: (continued)



This significant improvement in cure time and film performance is best achieved when 3–6% (by weight) of the total solvent blend is replaced with NIPAR 640.

NIPAR 640 will provide the benefits of superior wetting, improved film integrity and improved cure time while enhancing electrostatic spray performance through its contribution to optimum resistivity of the coating.

Specific Gravities of Nitromethane–Methanol Fuel Mixtures (34)


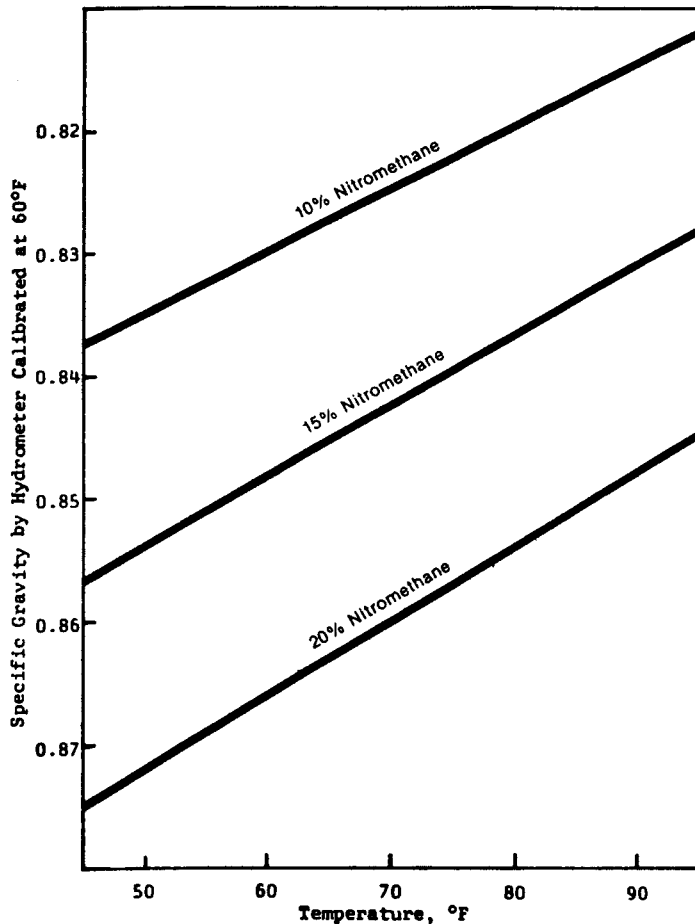


Table 4.8: COMSOL 101-X (34)


Typical Properties of COMSOL 101-X

| | |
|---------------------------------------------|---------|
| Distillation range at 1013 hPa | |
| (90 % min.), °C | 112-116 |
| Freezing point, °C | -89.5 |
| Vapour density (air = 1) | 2.58 |
| Specific gravity at 25/25 °C | 1.045 |
| Change of density with | |
| temperature, 0-50 °C, g/(ml x °C) | 0.0012 |
| Flash point, Tag closed cup, °C | 31 |
| Lower limit of flammability, | |
| % by vol. (at 30 °C) | 3.4 |
| Ignition temperature, °C | 414 |
| Evaporation rate, by vol. | |
| (n-butyl acetate = 100) | 121 |
| Evaporation number | |
| (diethyl ether = 1) | 11 |
| Solubility parameter, δ | 11 |
| Hydrogen bonding parameter, γ | 2.5 |
| Solubility in water at 20 °C, % by wt. | 4.6 |

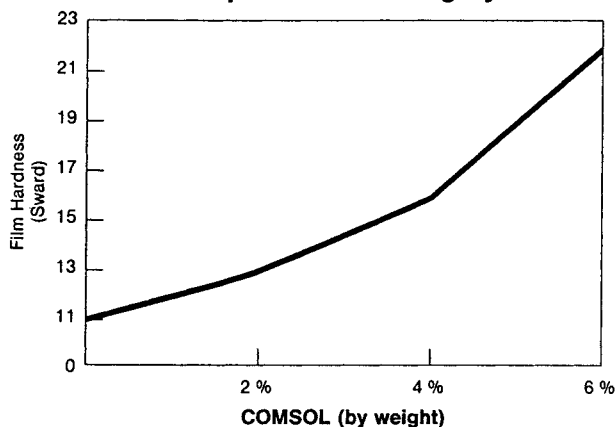Improved Film Integrity



Isocyanate Coating Lower Resistivity

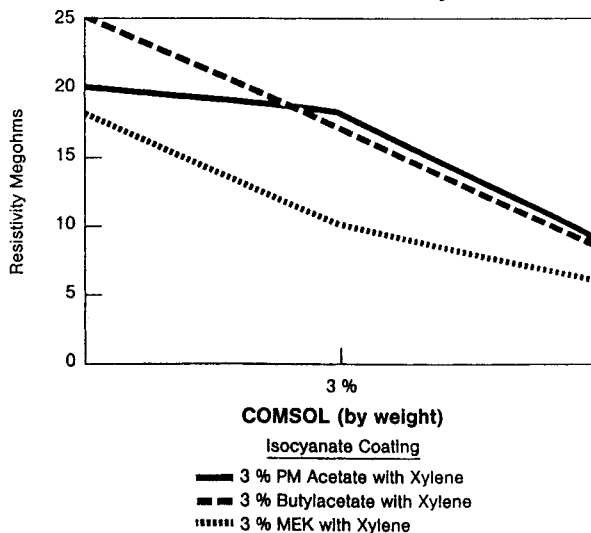


(continued)

Table 4.8: (continued)


VISCOSITY OF VINYL RESIN SOLUTIONS

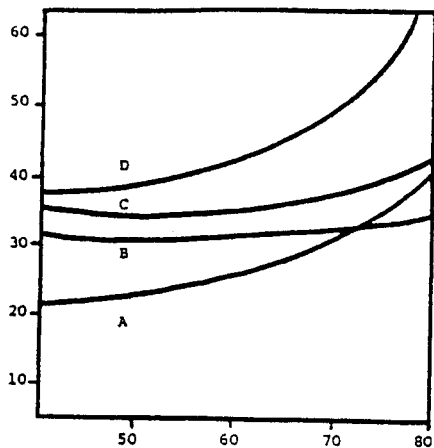VISCOSITY; CENTIPOISE



15 g of Bakelite VYHH (D) in 100 ml solvent

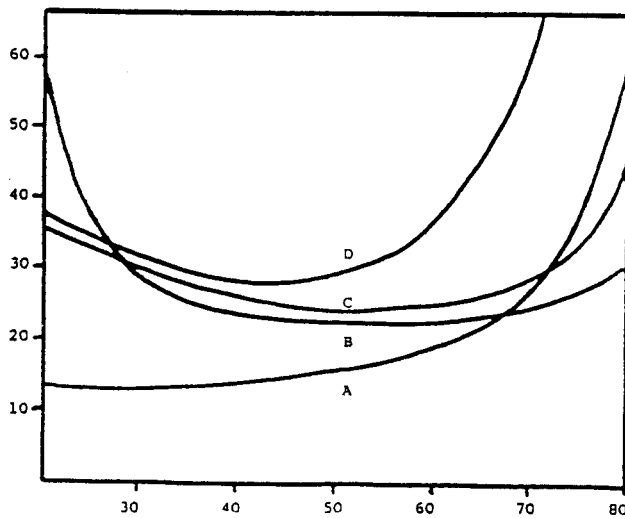
A = methyl ethyl ketone C = NiPar S-20™
 B = COMSOL 101-X D = methyl isobutyl ketone




8 g of Bakelite VYNS-3 (D) in 100 ml solvent

TOLUENE; PERCENT BY VOLUME

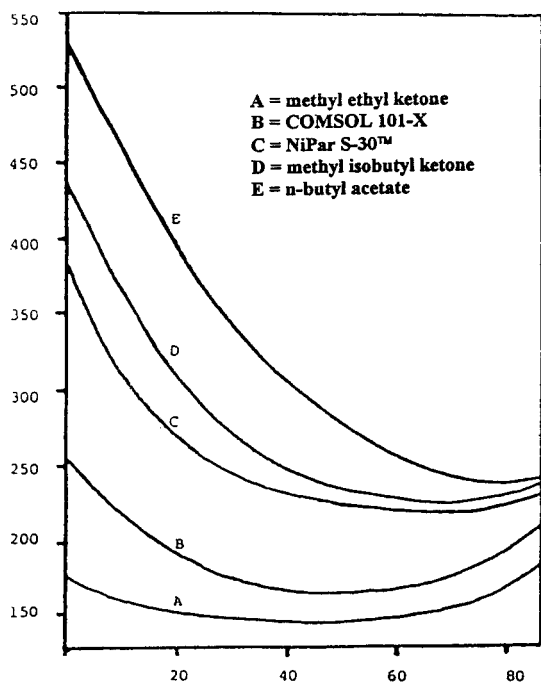VISCOSITY OF ACRYLIC RESIN SOLUTIONS



50 g Acryloid B-66 in 100 ml solvent

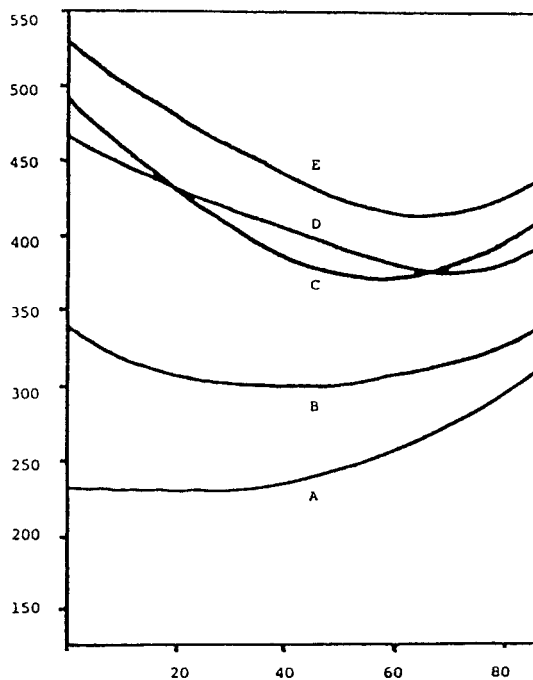

50 g Acryloid B-72 (A) in 100 ml solvent

TOLUENE; PERCENT BY VOLUME

A = methyl ethyl ketone
 B = COMSOL 101-X
 C = NiPar S-30™
 D = methyl isobutyl ketone
 E = n-butyl acetate

Table 4.9: COMSOL 280 (34)**SPECIFICATIONS**

| | |
|------------------------------------------|---------|
| Nitromethane, % wt. | 75 - 85 |
| 1-Nitropropane, % wt. | 15 - 25 |
| 2-Nitropropane, % wt. (max.) | 0.1 |
| Total nitroparaffins, % wt. (min.) | 99 |
| Water, % wt. (max.) | 0.2 |
| Colour, APHA (max.)..... | 80 |

AZEOTROPES OF COMSOL 280 COMPONENTS

| COMPONENT „A“ | B. P. (°C) | Azeoptrope with Nitroethane | | Azeoptrope with 1-Nitropropane | |
|----------------------------------|---------------|--------------------------------|---------------|-----------------------------------|---------------|
| | | Wt. % Comp. „A“ | B. P. (°C) | Wt. % Comp. „A“ | B. P. (°C) |
| Water | 100.0 | 28.5 | 87.2 | 36.5 | 91.63 |
| Ethyl alcohol | 78.3 | 87.4 | 78.0 | - | - |
| n-Propyl alcohol | 97.2 | 68.2 | 94.5 | 91.2 | 96.95 |
| Isoproyl alcohol | 82.4 | 89.4 | 81.8 | - | - |
| n-Butyl alcohol | 117.8 | 45.0 | 107.7 | 67.8 | 115.30 |
| sec-Butyl alcohol | 99.5 | 72.4 | 97.2 | 95.9 | 99.40 |
| Isobutyl alcohol | 108.0 | 60.0 | 102.5 | 84.8 | 105.28 |
| t-Butyl alcohol | 82.4 | 95.5 | 82.2 | - | - |
| Amyl alcohol | 138.2 | < 17.0 | < 37.8 | - | - |
| Isoamyl alcohol | 131.9 | 22.0 | 112.0 | - | - |
| Ethylene glycol monoethyl ether | 135.1 | - | - | 26.1 | 128.30 |
| n-Heptane | 98.4 | 72.0 | 89.2 | 85.8 | 94.60 |
| n-Nonane | 150.8 | - | - | 36.4 | 126.20 |
| Toluene | 110.8 | 75.0 | 106.2 | - | - |
| Ethylbenzene | 136.2 | - | - | 41.0 | 127.50 |
| o-Xylene | 143.6 | - | - | 15.0 | 130.90 |
| Ethyl butyrate | 121.5 | < 27.0 | 113.7 | - | - |
| Etyl isobutyrate | 110.1 | 73.0 | 108.5 | - | - |
| Isobutyl acetate | 117.4 | 40.0 | 112.5 | - | - |
| Ethylene glycol monomethyl ether | 124.5 | - | - | 58.7 | 121.40 |

B.P. = Boiling Point

Table 4.10: COMSOL 820 (34)

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|---------------|
| Total Nitroparaffins, % wt. | 99.0 min. |
| Specific gravity, 25/25 °C | 1.001 - 1.009 |
| Water, % wt. | 0.2 max. |
| Colour, APHA | 80 max. |

TOXICITY DATA

| | | |
|------------------------------------------------------|---|------------------------------------------------------------------------------|
| Skin irritation, Draize test | : | non-irritating |
| Eye irritation, Draize test | : | non-irritating |
| Mutagenicity | : | due to the composition of the product no mutagenic effects must be expected. |
| Sensitization, LANDSTEINER & JACOBS (guinea pig): | | non-sensitizing |

**Lower limits of flammability of some sol-
vents (% by volume in air)**

| | |
|---------------------------------------|------|
| Methyl isobutyl ketone..... | 0.9 |
| Xylene..... | 1.0 |
| Toluene..... | 1.27 |
| n-Butyl acetate..... | 1.7 |
| Methyl ethyl ketone..... | 1.7 |
| Acetone..... | 2.15 |
| Ethylene glycol monoethyl ether | 2.6 |

Flash point, °C (TCC)

| | |
|-----------------------------|------|
| Acetone..... | -19 |
| Ethyl acetate..... | - 4 |
| Methyl ethyl ketone..... | -14 |
| Toluene..... | 6 |
| Methyl isobutyl ketone..... | 14 |
| Isobutyl acetate..... | 18 |
| Xylene..... | 25 |
| COMSOL 820..... | 30.5 |
| Cyclohexanone..... | 44 |

Organic Sulfur Compounds

Table 5.1: Carbon Disulfide (2)

Chemical Names: Carbon Disulfide, Carbon Bisulfide
Common Names: Carbon Disulfide, Carbon Bisulfide
Formula: CS₂

PROPERTIES

Grades: Commercial or Technical, and USP
Important Physical and Chemical Properties

Physical State: Liquid.

Color: Clear, colorless liquid.

Odor: Almost odorless when pure; the commercial grade has a strong disagreeable odor, due to presence of sulfur compounds.

Specific Gravity at 20° C/4° C (68° F/39° F) (Water = 1): 1.263

Vapor Density (Air = 1): 2.63

Boiling Point (760 mm): 46.3° C (115° F)

Melting Point: -108.6° C (-163° F)

Flash Point (closed cup): -30° C (-22° F)

Explosive Limits (per cent by volume in air): 1 to 50

Ignition Temperature: 100° C (212° F)

Corrosive: Commercial grade slightly corrosive to some metals due to impurities.

Dangerously Reactive: No. However, it has an extremely low ignition temperature.

Hygroscopic: No.

Light Sensitive: Turns yellow when exposed to sunlight.


VAPOR PRESSURE OF CARBON DISULFIDE

| TEMPERATURE | | VAPOR PRESSURE MM MERCURY |
|-------------|------|------------------------------|
| °C | °F | |
| -78.2 | -109 | 0.68 |
| -42.6 | -45 | 11.81 |
| -25.35 | -14 | 34.3 |
| -21.5 | -7 | 42.7 |
| 0 | +32 | 127.0 |
| 11.54 | 53 | 211.3 |
| 19.7 | 67 | 294.3 |
| 46.3 | 115 | 760.0 |

Table 5.2: Typical DMSO Properties (36)

| | |
|----------------------------------|--------------------------------------------------------------------------------------------|
| Auto ignition temperature in air | 300-302°C (572-575°F) |
| Boiling point (1 atmosphere) | 189°C (372°F) |
| Coefficient of expansion | 0.00088/°C |
| Conductivity (Electrical) | |
| 20°C | 3x10 ⁹ (ohm ⁻¹ cm ⁻¹) |
| 80°C | 7x10 ⁹ (ohm ⁻¹ cm ⁻¹) |
| Critical heat flux | 1.3x10 ⁸ Btu/hr x ft ² (4.10x10 ⁸ J/s/m ²) |
| Critical molar volume | 2.38x10 ⁻⁴ m ³ |
| Critical Pressure | 56.3 atm. abs. |
| Critical temperature | 447°C (837°F) |
| Density, at 25°C (see Figure 3) | 1.0955 g/cm ³ |
| Dielectric constant, 1MHz | |
| @ 20°C | 48.9 |
| @ 40°C | 45.5 |
| Diffusion coefficient | 9.0x10 ⁴ cm ² /sec. |
| Dipole moment, D | 4.3 |
| Evaporation rate index @ 25°C | |
| Relative to n-butyl acetate | 0.026 |
| Relative to diethylether | 0.0005 |
| Flammability limits in air | |
| lower (100°C) | 3-3.5% by volume |
| upper | 42-63% by volume |
| Flash point (open cup) | 95°C (203°F) |
| Flash point (closed cup) | 89°C (192°F) |
| Freezing point | 18.55°C (65.4°F) |

| | |
|-----------------------------------------|----------------------------------------------------------------------------------------------|
| Heat capacity (liq.), 25°C | 0.47 cal/g°C |
| Heat capacity (ideal gas) | C _p (T°K) = 6.94+5.6x10 ⁻⁷ T -0.227x10 ⁻⁶ T ² |
| Heat of combustion | 6054 cal/g |
| Heat of fusion | 41.3 cal/g |
| Heat of solution in water at 25°C | -54 cal/g@∞ dilution |
| Heat of vaporization at 70°C | 11.3 kcal/mol (260 Btu/lb) |
| Henry's constant @ 21°C | 991000 |
| Molar freezing point constant | 4.07°C/mol |
| Molar volume | 71.2 cm ³ /gm |
| Molecular weight | 78.13 |
| pKa | 35.1 |
| pK BH+ | -2.7 |
| Refractive index N _D @25°C | 1.4768 |
| Solubility parameters | |
| Hansen's | |
| Dispersion | 9.0 (cal/cm ³) ^{1/2} |
| Polar | 8.0 (cal/cm ³) ^{1/2} |
| Hydrogen bonding | 5.0 (cal/cm ³) ^{1/2} |
| Hildebrand's | 13.0 (cal/cm ³) ^{1/2} |
| Specific heat at 29.5°C | 0.47 ± 0.015 cal/g°C |
| Surface tension at 20°C | 43.53 dynes/cm |
| Vapor pressure at 25°C (see Figure 2) | 0.600 mm Hg |
| Viscosity, cP, at 25°C (See Figure 4) | 2.0 |
| Log octanol-water partition coefficient | -1.35 |

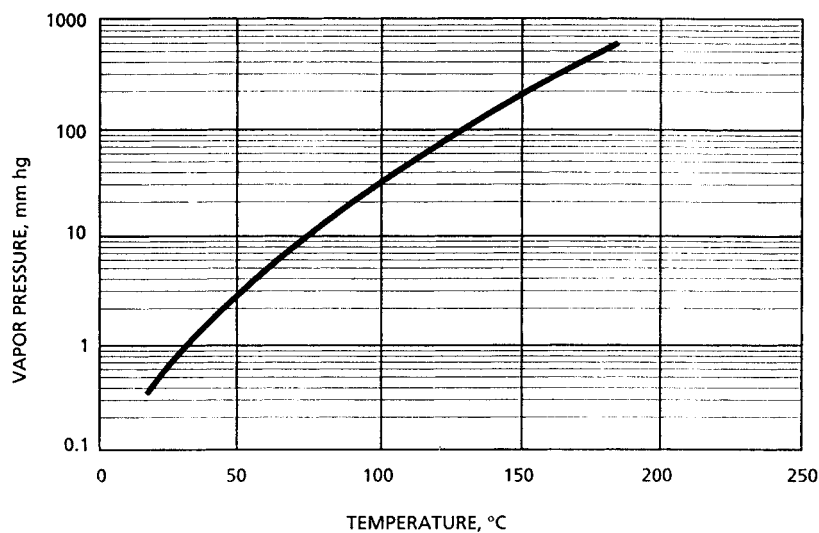Table 5.3: Vapor Pressure vs. Temperature for DMSO (36)**Table 5.4: Specific Gravity of DMSO as a Function of Temperature (36)**

| Temperature (°C) | Specific gravity (g/cm ³) |
|------------------|---------------------------------------|
| 15.6 | 1.1047 |
| 21 | 1.0993 |
| 25 | 1.0955 |
| 30 | 1.0904 |
| 40 | 1.0803 |
| 50 | 1.0702 |
| 75 | 1.0454 |
| 100 | 1.0200 |
| 125 | 0.9946 |
| 150 | 0.974 |

Table 5.5: DMSO Viscosity as a Function of Temperature (36)

| Temperature (°C) | Viscosity (cP) |
|------------------|----------------|
| 25 | 1.991 |
| 30 | 1.808 |
| 40 | 1.511 |
| 50 | 1.286 |
| 75 | 0.916 |
| 100 | 0.691 |
| 125 | 0.546 |

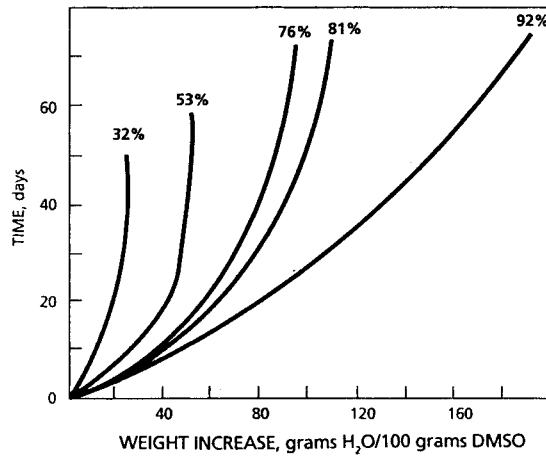
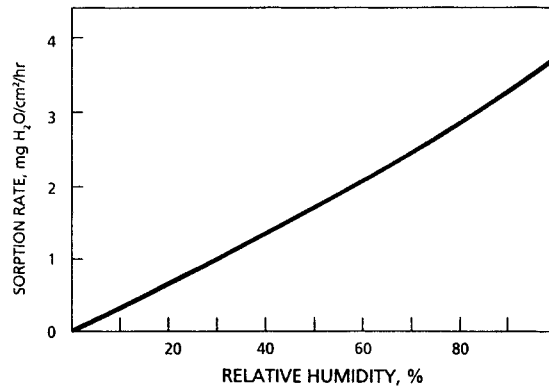
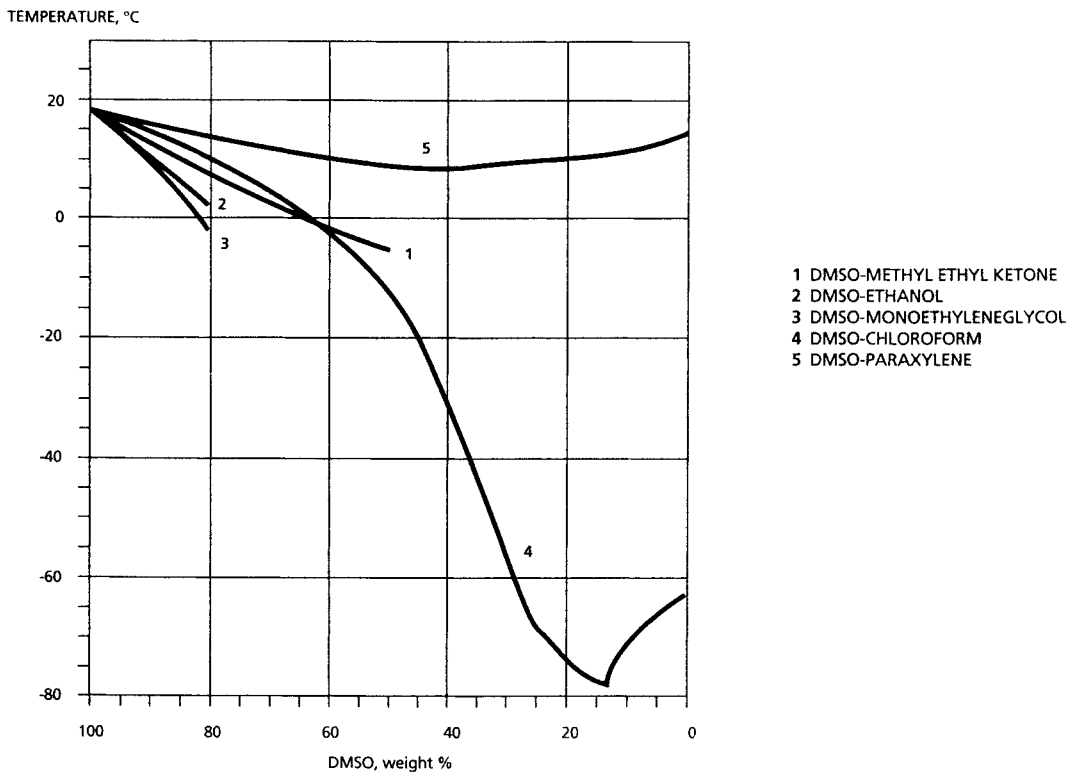
Table 5.6: Comparative Hygroscopicities of DMSO at Various Relative Humidities at 22°C (36)**Table 5.7: Initial Sorption Rates of DMSO at Various Relative Humidities at 22°C (36)****Table 5.8: Freezing Temperatures for DMSO—Solvent Binary System (36)**

Table 5.9: Freezing Point for DMSO—Water Solutions (36)

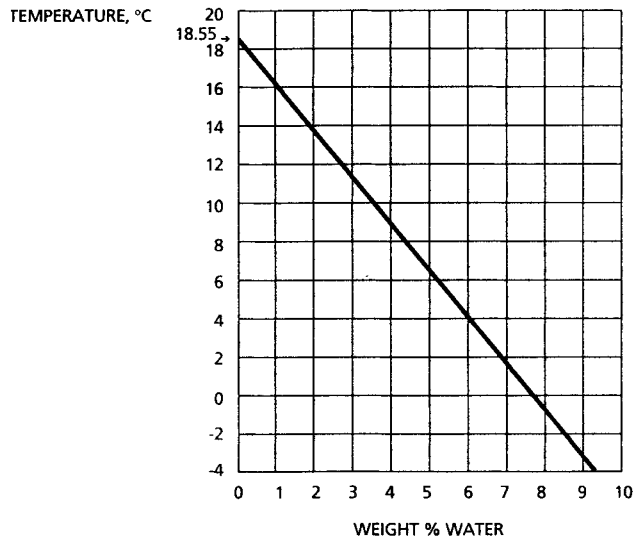


Table 5.10: Freezing Point Curves for DMSO—Water Solutions (36)

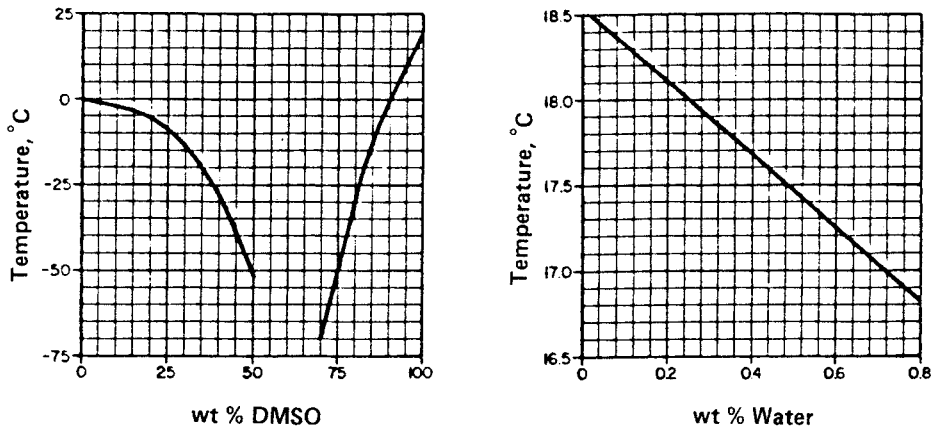


Table 5.11: Heat of Mixing of DMSO—H₂O System at 22°C (36)

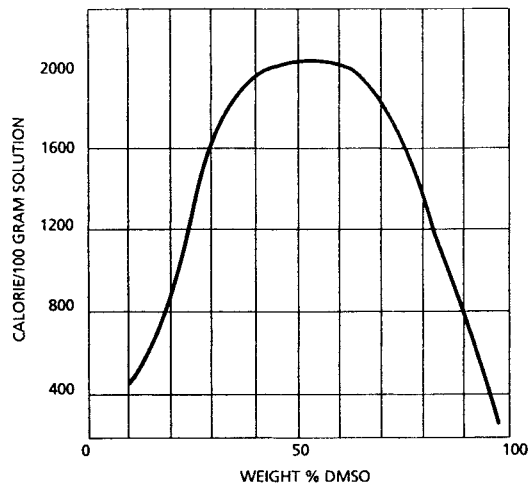
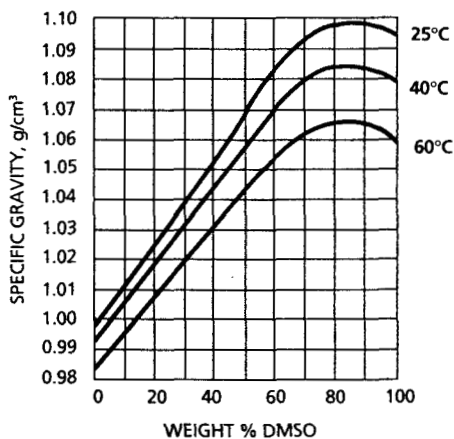
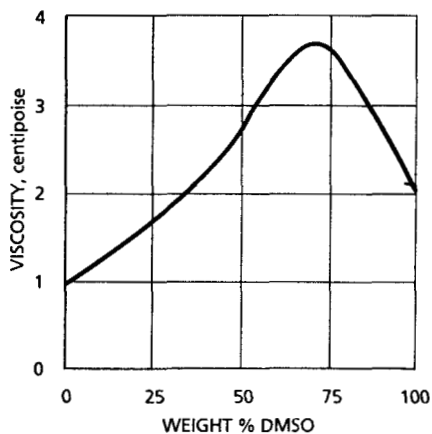


Table 5.12: Specific Gravity of DMSO—Water Solutions (35)**Table 5.13: Viscosity of DMSO—Water Solutions (36)****Table 5.14: Results of Reflux of DMSO for 24 Hours with Various Compounds (35)**

| COMPOUND (100g) IN 300g DMSO | REFLUX TEMP., °C | DMSO RECOVERED % OF ORIGINAL | % DECOMPOSITION PRODUCTS, | | | | |
|---------------------------------|------------------------|---------------------------------|---------------------------|---------------------|---------------------|------|-------------------|
| | | | DMS ^(a) | DMDS ^(b) | BMTM ^(c) | HCHO | MM ^(d) |
| NaOH | 185-140 ^(e) | 93.7 | 63 | 31 | — | — | — |
| Na ₂ CO ₃ | 190 | 96.3 | — | 14 | — | — | — |
| NaCl | 190 | 98.7 | — | 15 | — | — | — |
| NaCN | 148-164 ^(f) | 100.0 | — | — | — | — | — |
| NaOAc | 182-187 | 97.0 | 22 | 33 | 8 | 20 | — |
| Na ₂ SO ₄ | 181-148 ^(g) | 85.4 | 66 | — | — | — | 11 |
| DMSO ONLY | 189 | 98.0 | 15 | 30 | 30 | — | — |

(a) Dimethyl sulfide

(b) Dimethyl disulfide


(c) Bis(methylthio) methane

(d) Methyl mercaptan

(e) Reflux temperature decreased from 185°C to 140°C over the first 16 hours.

(f) Reflux temperature was 148°C for 20 hours; increased to 164°C during the last 4 hours.

(g) Reflux temperature decreased gradually from 181°C to 148°C.

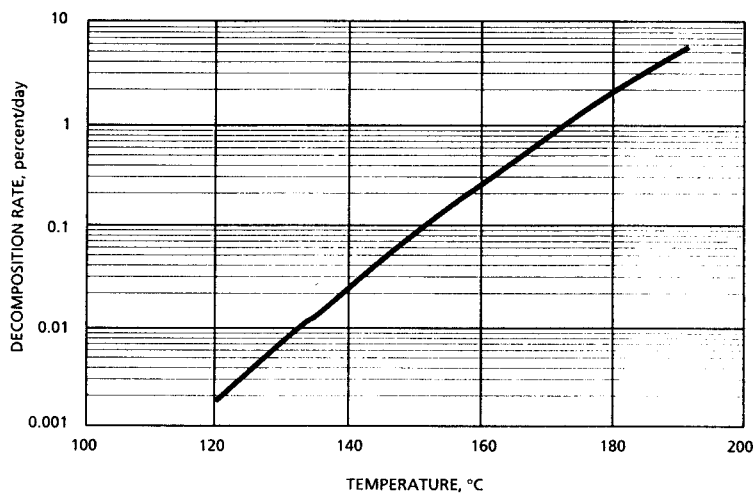Table 5.15: Thermal Stability of DMSO (36)**Table 5.16: Refluxing of DMSO and Mixtures for Shorter Periods (36)**

| COMPOSITION OF SAMPLE PARTS | REFLUX TEMP, °C | TIME HR. | ORGANIC PRODUCT COMPOSITION % | | | |
|------------------------------------------------------|-----------------|----------|-------------------------------|------|------|------|
| | | | DMSO | DMS | DMDS | BMTM |
| 10 DMSO:1 H ₂ O | 152 | 5 | 100 | 0 | 0 | 0 |
| | | 15 | 99.7 | 0.15 | 0 | 0.15 |
| 60 DMSO: 5H ₂ O:1 NaOH | 155 | 5 | 99.8 | 0.1 | 0.1 | 0 |
| | | 8 | 99.3 | 0.6 | 0.1 | 0 |
| 60 DMSO:12 H ₂ O: 1 NaHCO ₃ | 131 | 6 | 99.9 | 0.1 | 0 | 0 |
| | | 12 | 99.8 | 0.2 | 0 | 0 |
| DMSO ONLY | 191 | 5 | 99.8 | 0.1 | 0.1 | 0 |
| | | 9 | 99.1 | 0.2 | 0.2 | 0.5 |
| | | 16 | 99.0 | 0.2 | 0.2 | 0.6 |

Table 5.17: Effect of Heating DMSO with Concentrated Acids (36)

(200g DMSO WITH 20g OF CONCENTRATED ACID)

| ACID | CONC. | TEMP., °C | TIME, MIN. | DMSO LEFT % | % OF DECOMPOSITION PRO | | |
|--------------------------------|-------|-----------|------------|-------------|------------------------|---------------------|------|
| | | | | | DMS ^(a) | DMDS ^(b) | HCHO |
| H ₂ SO ₄ | 36N | 100 | 15 | 99 | 100 | | |
| | | | 30 | 99 | 100 | | |
| | | | 120 | 98 | 100 | | |
| H ₂ SO ₄ | 36N | 125 | 15 | 86 | 7 | 93 | |
| | | | 150 | 86 | 7 | 93 | |
| | | | 210 | 80 | 10 | 90 | |
| H ₃ PO ₄ | 85% | 100 | 15 | 92 | 25 | 75 | |
| | | | 30 | 89 | 45 | 55 | |
| | | | 45 | 89 | 45 | 55 | |
| | | | 60 | 87 | 46 | 54 | |
| | | | 120 | 87 | 46 | 54 | |
| | | | 150 | 86 | 50 | 50 | SOME |
| H ₃ PO ₄ | 85% | 125 | 15 | 84 | 25 | 75 | |
| | | | 60 | 82 | 33 | 67 | |
| | | | 150 | 82 | 33 | 67 | |
| HCl | 12N | 95 | 15 | 99 | 100 | | |
| | | | 30 | 99 | 100 | | |
| | | | 60 | 99 | 100 | | |
| | | | 120 | 98 | 100 | | |
| HCl | 12N | 115 | 15 | 93 | 100 | | |
| | | | 30 | 92 | 100 | | |
| | | | 45 | 87 | 100 | | |
| | | | 60 | 87 | 100 | | |
| | | | 120 | 87 | 100 | | SOME |

(a) Dimethyl Sulfide

(b) Dimethyl Disulfide

Table 5.18: Solubility of Organic Materials in DMSO (36)

| Material | Solubility Grams/100 cc DMSO | | Material | Solubility Grams/100 cc DMSO | |
|---------------------------------------|----------------------------------------------|--------------------|----------------------------------|-------------------------------------------------|---------------------|
| | 20-30°C | 90-100°C | | 20-30°C | 90-100°C |
| Acetic acid | Miscible | - | Dyes | | |
| Acetone | Miscible | - | Burnt Sugar | Soluble | |
| Acrawax | < 1 | > 1 | FD&C Blue | Soluble | |
| Acrawax B | Insol. | 4 | Pistachio Green B | Soluble | |
| Aniline | Miscible | - | 1-Eicosanol | Insol. | |
| Anthracene | 2 | - | Ethyl benzoate | Miscible | |
| Beeswax | - | < 1 | Ethyl alcohol | Miscible | |
| Benzene | Miscible | - | Ethyl bromide | Miscible | Reacts |
| Benzidine | Soluble | - | Ethyl ether | Miscible | |
| Benzidine methane sulfonate | Insol. | - | Ethylene dichloride | Miscible | |
| Bromoethane | Miscible | | Formalin (37%) | Miscible | |
| Butenes | 2.1 | | Formamide | Miscible | |
| n-Butyl acetate | Miscible | | Formic acid | Miscible | |
| Butly carbitol | Miscible | | Glucose | 54 | |
| Calcium methyl sulfonate | Soluble | | Glycerine | Miscible | |
| Camphor | Soluble | Soluble | Glycine | < 0.05 | 0.1 |
| Candelilla wax | | < 1 | Hexane | 2.9 | |
| Carbon | Insol. | | 4-Hydroxy benzoic acid | 24 | |
| Carbon disulfide | 90 | | Hy-Wax 120 | | < 1 |
| Carbon tetrachloride | Miscible | | Imidazole | 80 | |
| Carbowax 600 | Miscible | | Isophthalic acid | 68 | 76 |
| Carbowax 6000 | Insol. | 8 | Isoprene | Miscible | |
| Carnauba wax | | < 1 | Kerosene | 0.5 | |
| Castor oil | Miscible | | Lanolin, hydrated (Lanette 0) | | 11 (gets cold) |
| Ceresin wax | | < 1 | Lauryl amide (Armid 12) | 10 | > 20 |
| Chloroform | Miscible | | Linear alcohols | Miscible | |
| Chlorosulfonic acid | Reacts | | Lorol 5 | Miscible | |
| Citric acid | > 70 | | Lubricating oil | 0.4 | |
| Coconut oil | 0.3 | 1.3 Misc.-160°C | Methionine | 0.1 | 0.3 |
| Cresylic acid | Miscible | | Methyl borate | Miscible | |
| Cumene | Miscible | | Methyl caprate | | Miscible |
| Cyclohexane | 4.67 | | Methyl iodide | Miscible | Reacts |
| Cyclohexene | Miscible | | Methyl isobutyl ketone | Miscible | |
| Cyclohexylamine | Miscible | | Methyl laurate | 7 | Miscible |
| Decalin | 4.5 | | Methyl mercaptan | 40 (Reacts) | |
| n-Decane | 0.7 | | N-methyl morpholine | Miscible | |
| Di-n-butylamine | 11 | | Methyl palmitate | Immiscible | Misc. 130- 180°C |
| o-Dichlorobenzene | Miscible | | Methyl salicylate | Miscible | |
| p-Dichlorobenzene | Very Soluble | | Methyl sulfonic acid | Miscible | |
| SDichlorodiphenyl- trichloroethane | 4 | 100 | Methylene chloride | Miscible | |
| Dicyandiamide | 40 | | Microcrystalline wax | | < 1 |
| Dicyclohexylamine | 4.5 | | Morpholine | Miscible | |
| Diethanolamine | Miscible | | Naphthalene | 40 | Miscible |
| Diethylamine | Miscible | | Neoprene | Insol. | Insol ¹ |
| Diethyl ether | Miscible | | Nitrobenzene | Miscible | |
| bis-(2-ethylhexyl)amine | 0.7 | | Oleic acid | Miscible | |
| Diethyl sulfide | Miscible | | Ouricuri wax | | 1 |
| Di-isobutyl carbinol | Miscible | | Oxalic acid | 38 | |
| Di-isobutylene | 3.3 (0.6% DMSO soluble in di-isobutylene) | | Palmitic acid | 100 | |
| Disopropyl ether | 11 | | Paraffin | Insoluble | |
| Dimethyl ether | 4.4 | | Paraformaldehyde | Insoluble | Slightly soluble |
| Dimethyl formamide | Miscible | | Paradichlorobenzene | 56 | |
| Dimethyl sulfide | Miscible | | Pentaerythritol | 5-10 | 30 |
| Dimethyl sulfone | 33.9 | Miscible | n-Pentane | 0.35 | |
| Dioxane | Miscible | | Pentene 1&2 | 7.1 | |
| Diphenyl | Very soluble | | Perchloric acid | Reacts violently | |
| Dipentene | 10 | | Petroleum ether | 3 (DMSO soluble 0.3-0.5% in petroleum ether) | |
| Dodecanol | >100 | | | | |
| n-Dodecane | 0.38 | | | | |
| Dodecylbenzene (Neolene 400) | 3.5 | | | | |

(Continued)

Table 5.18: (continued)

| Material | Solubility Grams/100 cc DMSO | | Material | Solubility Grams/100 cc DMSO | |
|--------------------------------------|---------------------------------|----------|-----------------------------------------------------|---------------------------------|----------|
| | 20-30°C | 90-100°C | | 20-30°C | 90-100°C |
| Phenol | >100 | | Tallow | Insol. | 1.9 |
| Phosphoric acid | Miscible | | Tallow amide, hydrogenated (Armour Armide HT) | Insol. | > 40 |
| Phosphorus trichloride | Reacts vigorously | | Terephthalic acid | 26 | 33 |
| Phthalic acid | 90 | | Tetrahydrophthalic anhydride | 50 | |
| Picric acid | Soluble | | Tetralin | Miscible | |
| Pyridine | Miscible | | Tetrapropylene | 1 | |
| Pyrogallol | 50 | | Thiourea | 40 | 85 |
| Rosin | > 100 | | Toluene | Miscible | |
| Rosin soap (Hercules Dresinate X) | Slightly soluble 0.9 | | Toluene di-isocyanate | Miscible | |
| Sevin | 50 | | Tributylamine | 0.9 | |
| Silicon tetrachloride | Reacts vigorously | | Tricresyl phosphate | Miscible | |
| Sorbitan sesquioleate | 2.5 | | Triethanolamine laurylsulfate | Soluble | |
| Sorbitan trioleate | | Miscible | Triethanolamine | Miscible | |
| Sorbitol | 60 | > 180 | Triethylamine | 10 | |
| Soybean oil | 0.6 | | Trinitrotoluene | Soluble | |
| Starch, soluble | > 2 | | Turpentine | 10 | |
| Stearic acid | 2 | Miscible | Urea | 40 | 110 |
| Succinic acid | 30 | | Xylene | Miscible | |
| Sugar (sucrose) | 30 | 100 | | | |
| Sulfamic acid | 40 | | | | |
| Sulfuric acid | Miscible | | | | |

Table 5.19: Solubility of Resins and Polymers in DMSO (36)

| Material | Solubility, Grams/100cc DMSO | | | Comments |
|-----------------------------|------------------------------|----------|--|----------------------------------------|
| | 20-30°C | 90-100°C | | |
| Aminoplasts | | | | |
| Melamine Formol | | Soluble | | |
| Urea formol | | Soluble | | |
| Polyacrylics | | | | |
| Orlon (DuPont) | - | 20 | | Viscous soln. |
| Acrilan (Monsanto) | >25 | | | |
| Verel (Eastman) | > 5 | | | 25 at 130°C with some decomposition |
| Creslan (Am. Cyanamid) | 5 | | | 25 at 130°C |
| Polyamides | | | | |
| Nylon 6 | - | Insol. | | 40 at 130°C |
| Nylon 6/6 | - | Insol. | | 25 at 150°C |
| Nylon 6/10 | - | Insol. | | 40 at 150°C |
| Nylon 11 Rilsan(Elf Ato) | - | Insol. | | - |
| Nylon 12 Oryasol(Elf Ato) | - | Insol. | | Soluble @ 140°C |
| Polyimides | | | | |
| Bismaleimide copolymers | | | | |
| Kermid 353 (Rhone-Poulenc) | | Swells | | |
| Kermid 711 (Rhone-Poulenc) | | Soluble | | |
| Polyamino bis maleimide | | | | |
| Kermid 601(Rhone poulenc) I | - | Insol. | | |
| Polyamideimide | | | | |
| Torlon 4203L (Amoco) | | Insol. | | |
| Polyetherimide | | | | |
| Ultem 100 (G.E.) | | Swells | | |
| Cellulose | | | | |
| Cellulose triacetate | 10 | 20 | | |
| Viscose rayon | - | <1 | | |
| Cellophane | - | Insol. | | |
| Carboxymethyl cellulose | - | Insol. | | |
| Nitrocellulose | - | 10 | | |

(continued)

Table 5.19: (continued)

| Material | Solubility, Grams/100cc DMSO | | Comments |
|------------------------------------------|------------------------------|----------|--------------------------------------|
| | 20-30°C | 90-100°C | |
| Cellulose | | | |
| Cellulose triacetate | 10 | 20 | |
| Viscose rayon | - | <1 | |
| Cellophane | - | Insol. | |
| Carboxymethyl cellulose | - | Insol. | |
| Nitrocellulose | - | 10 | |
| Chlorinated Resins | | | |
| Butaclor MC30 (Distugil) | Swells | | |
| CM3630 (Bayer) | Swells | | |
| Hypalon DH70 (DuPont) | Swells | | |
| Epoxies | | | |
| Epikote 1004 (Shell) | Soluble | | |
| Epon 1001 (Shell) | 50 | | |
| Epon 1004 (Shell) | 50 | | |
| Epon 1007 (Shell) | 50 | | |
| Fluorinated Resins | | | |
| Polyvinylidene fluoride | | | |
| Forafion (Atochem) | Swells | | |
| Elastomers | | | |
| Viton DF801 (DuPont) | Swells | | |
| Viton DF809 (DuPont) | Swells | | |
| Kalrez 4079 (DuPont) | Insol. | | |
| Teflon (DuPont) | Insol. | Insol. | |
| Methacrylates | | | |
| Lucite 41, 45 (DuPont) | - | <1 | |
| Plexiglas (Rohm & Haas) | - | <1 | |
| Phenoplasts | | | |
| Modified Novalac | | | |
| R7522 (Ceca) | Soluble | | |
| R7550 (Ceca) | Soluble | | |
| Norsophen Resin PH 13 (CDF Chime) | Soluble | | |
| Polycarbonates | | | |
| Lexan (General Electric) | - | >5 | |
| Polyesters | | | |
| Dacron (DuPont) | - | >1 | Dissolves at 160°C; ppts at 130°C |
| CX 1037 (Goodyear) | - | 7 | |
| Atlac (ICI-America) | - | 50 | |
| Poly(ethylene terephthalate) | - | - | - |
| Poly(butylene terephthalate) | - | - | - |
| Hytrel (DuPont) | - | - | - |
| Silicones | | | |
| Dow Corning 803 soln. | Miscible | - | |
| Dow Corning 805 soln. | Miscible | - | |
| Dow Corning "Sylkyd 50" | Miscible | - | |
| Dow Corning Z6018 (flake) | 70 | - | |
| Sulfur Resins | | | |
| Polyphenylene sulfide | | | |
| Ryton V107 (Philips) | Swells | | |
| Polyethersulfone | | | |
| Victrex 660P (ICI) | Soluble | | |
| Ultrason E3000 (BASF) | Soluble | | |
| Udel (Amoco) | Soluble | | |
| Urethanes | | | |
| Vithane (Goodyear) | - | 100 | |
| Vinyle-Polymers & Co-polymers | | | |
| Butvar B-76 (Monsanto) | - | 20 | Very viscous |
| Formvar 7/70 E (Monsanto) | - | 42 | Very viscous |
| Elvanol 51-05 (DuPont) | - | 90 | Viscous |
| Elvanol 52-22 (DuPont) | - | 15 | Viscous |
| Elvanol 71-24 (DuPont) | - | 30 | Viscous |

(continued)

Table 5.19: (continued)

| Material | Solubility, Grams/100cc DMSO | | Comments |
|------------------------------------------|------------------------------|----------|------------------------------|
| | 20-30°C | 90-100°C | |
| Polyvinyl pyrrolidone (GAF) | 30 | >100 | |
| Geon 101 (PVC Goodrich) | - | 10 | |
| Vynlite WHH (Union Carbide) | 2 | 30 | |
| Teslar (DuPont) | - | - | Partially sol. at 160-170°C |
| Vinylidenes | | | |
| Darvan (Goodrich) | 5 | - | Soln. cloudy and viscous |
| Saran film (Dow) | - | 30 | |
| Geon 200 x 20 (Goodrich) | - | 20 | |
| DNA (Goodrich) | >5 | - | 25 at 130°C |
| Other Resinous Materials | | | |
| Melmac 405 (Am. Cyanamid) | 70 | - | |
| Neoprene | Insol. | Insol. | |
| Polyetherether ketone (PEEK) (ICI) | Insol. | Insol. | |
| Polyethylene | Insol. | Insol. | |
| Polypropylene | Insol. | Insol. | |
| Polystyrene | - | - | Sol. at 150°C; ppts at 130°C |
| Rosin (Hercules) | >100 | - | |
| Penton (chlorinated polyether)(Hercules) | - | 5 | |
| Vinsol (Hercules) | 50 | >100 | |

Table 5.20: Solubility of Inorganic Materials in DMSO (36)

| | Solubility, Grams/100cc DMSO | | Solubility, Grams/100cc DMSO | |
|----------------------------------------------------|------------------------------|--------------------|---------------------------------------------------|------------------|
| | 25°C | 90-100°C | 25°C | 90-100°C |
| Aluminum sulfate (18H ₂ O) | Insol. | 5 | Magnesium nitrate (6H ₂ O) | 40 |
| Aluminum chloride | Reacts | | Manganous chloride (4H ₂ O) | 20 |
| Ammonium borate (3H ₂ O) | 10 | | Mercuric acetate | 100 |
| Ammonium carbonate(H ₂ O) | 1 | | Mercuric bromide | 90 |
| Ammonium chloride | Insol. | 10 | Mercuric iodide | 100 |
| Ammonium chromate | 1 | | Mercuric sulfate | <0.01 |
| Ammonium dichromate ^c | 50 | | Molybdenum bromide | 1 |
| Ammonium nitrate | 80 | | Nickel chloride(6H ₂ O) | 60 |
| Ammonium thiocyanate | 30 | | Nickel nitrate (6H ₂ O) | 60 |
| Barium nitrate | 1 | | Potassium bromide | 6.5 |
| Beryllium nitrate(4H ₂ O) | 10 | | Potassium chloride | 0.2 |
| Bismuth trichloride | 1 | | Potassium cyanide | 1 |
| Boric acid | 45 ^a | | Potassium hydroxide | 0.013 |
| Bromine | Reacts | | Potassium iodide | 20 |
| Cadmium chloride | 20 ^b | | Potassium nitrate | 12 |
| Cadmium iodide | 30 | | Potassium nitrite | 2 |
| Calcium chloride | Insol. | | Potassium perchlorate ^c | 38 |
| Calcium dichromate(3H ₂ O) ^c | 50 | | Potassium thiocyanate | 20 |
| Calcium nitrate(4H ₂ O) | 30 | | Silver chloride | <0.01 |
| Ceric ammonium nitrate | 1 | | Silver iodide | <0.01 |
| Cobaltous chloride (6H ₂ O) | 30 | Misc. m.p. 86°C | Silver nitrate | 130 |
| | | | Sodium Sulfate | <0.01 |
| | | | Sodium azide | <1.0 |
| Cupric acetate(H ₂ O) | Insol. | 6 | Sodium chloride | 0.4 |
| Cupric bromide ^b | 1 | 20 150°C | Sodium cyanide | 1 |
| | | | Sodium dichromate(2H ₂ O) ^c | 12 |
| Cupric chloride(2H ₂ O) | Insol. | 27 | Sodium hydroxide | 0.035 |
| Cupric sulfate(5H ₂ O) | <0.01 | | Sodium iodide | 30 |
| Cuprous iodide | 1 at 30°C | | Sodium nitrate | 20 |
| Ferric ammonium sulfate (12H ₂ O) | Insol. | Misc. m.p. 40°C | Sodium nitrite | 20 |
| | | | Sodium perchlorate ^c | 24.2 |
| Ferric chloride(6H ₂ O) | 30 | 90 | Sodium thiocyanate | 1 |
| Ferrous chloride(4H ₂ O) | 30 | 90 | Stannic chloride | 25 |
| Gold chloride | 5 | | Stannous chloride(2H ₂ O) | 40 |
| Iodine | >100 | | Strontium bromide(6H ₂ O) | 5 |
| Lead chloride ^b | 10 | | Strontium chloride(2H ₂ O) | 10 |
| Lead nitrate | 20 | 60 | Sulfur dichloride | Reacts violently |
| Lithium bromide | 31.4 | | Sulfur monochloride | Reacts violently |
| Lithium chloride | 10.2 | | Tungsten hexachloride | 5 |
| Lithium dichromate(2H ₂ O) ^c | 10 | | Uranyl nitrate (6H ₂ O) | 30 |
| Lithium iodide | 41.1 | | Vanadium chloride | 1 |
| Lithium nitrate | 10 | | Zinc acetate | >100 |
| Lithium perchlorate ^c | 31.5 | | Zinc chloride | 30 ^b |
| Magnesium chloride(6H ₂ O) | 1.0 | | Zinc nitrate(6H ₂ O) | 55 |
| | | | Zinc sulfate | <0.01 |

a) @20.3°C b) possible reaction c) not recommended due to safety considerations

Table 5.21: Solubility of Gases in DMSO at Atmospheric Pressure and 20°C (36)

(FROM PURE GASES IN EACH CASE)

| | Grams Gas/ 100 Grams Solution | Gas Volume/ Volume of DMSO |
|---------------------------------------------------------------------|----------------------------------|-------------------------------|
| Acetylene | 2.99 | 28.1 |
| Ammonia | 2.6 | 40.0 |
| Butadiene | 4.35 | 31.0 |
| Butane | | 4.8 |
| Butylenes (mixed) | 2.05 | |
| Carbon dioxide | .05 | 2.86 |
| Carbon monoxide | <0.01 | |
| Ethane | 6.85×10^{-2} | 0.56 |
| Ethylene | .32 | 2.8 |
| Ethylene oxide | 60.0 | 306.0 |
| Freon 12 | 1.8 | 3.7 |
| Helium | 1.46×10^{-4} | 0.89×10^{-2} |
| Hydrogen | 1.95×10^{-4} | 2.39×10^{-2} |
| Hydrogen sulfide | 0.5 (reacts) | |
| Isobutylene | 2.5-3.0 | |
| Methane | 7.92×10^{-3} | |
| Nitric oxide (NO) | 0.00 | |
| Nitrogen | 2.99×10^{-3} | 0.6 |
| Nitrogen dioxide (NO ₂ , N ₂ O ₄) | Miscible (possible reaction) | |
| Oxygen | 6.44×10^{-3} | 0.049 |
| Ozone | Reacts | |
| Propane | | 1.8 |
| Propyne | | 58.2 |
| Sulfur dioxide | 57.4 (reacts) | |

Table 5.22: Solubility Parameters of Strong Solvents (36)

| Solvent | δ_d | δ_p | δ_h | δ_t |
|------------------------------|------------|------------|------------|------------|
| DIMETHYL SULFOXIDE (DMSO) | 9.0 | 8.0 | 5.0 | 13.0 |
| Butyrolactone | 9.3 | 8.1 | 3.6 | 12.8 |
| Dimethylacetamide (DMAC) | 8.2 | 5.6 | 5.0 | 11.1 |
| Dimethylformamide (DMF) | 8.5 | 6.7 | 5.5 | 12.1 |
| N-Methyl-2-pyrrolidone (NMP) | 8.8 | 6.0 | 3.5 | 11.2 |
| Propylene Carbonate | 9.8 | 8.8 | 2.0 | 13.3 |
| Sulfolane | 9.0 | 7.4 | 5.3 | 12.8 |

Table 5.23: DMSO as a Solvent Replacement (36)

| Solvents to be Replaced | | | | Replacement Mixture | | | |
|-------------------------------------|------------|------------|------------|-------------------------------------------------------|------------|------------|------------|
| | δ_d | δ_p | δ_h | Weight % | δ_d | δ_p | δ_h |
| Acetone | 7.6 | 5.1 | 3.4 | 65% DMSO 35% Aromatic 150 | 8.8 | 5.0 | 3.6 |
| Butyl cellosolve | 7.8 | 2.5 | 6.0 | 10% DMSO 30% Aromatic 150 60% Isopropyl alcohol | 8.0 | 2.7 | 5.9 |
| Butyrolactone | 9.3 | 8.1 | 3.6 | 100% DMSO | 9.0 | 8.0 | 5.0 |
| Cellosolve | 7.9 | 4.5 | 7.0 | 33% DMSO 67% Butyl alcohol | 8.1 | 4.2 | 7.0 |
| Cyclohexanone | 8.7 | 3.1 | 2.5 | 40% DMSO 60% Aromatic 100 | 8.9 | 3.2 | 2.4 |
| Dimethyl acetamide | 8.2 | 5.6 | 5.0 | 67% DMSO 33% Amyl acetate | 8.6 | 5.3 | 5.0 |
| Dimethyl formamide | 8.5 | 6.7 | 5.5 | 80% DMSO 20% 2-methyl butanol | 8.6 | 6.6 | 5.4 |
| Ethyl amyl ketone | 8.0 | 2.5 | 2.1 | 30% DMSO 70% Aromatic 100 | 8.9 | 2.5 | 2.0 |
| Ethylene glycol butyl ether acetate | 8.1 | 2.8 | 6.7 | 20% DMSO 60% Butyl alcohol 20% Amyl acetate | 8.0 | 3.3 | 6.6 |
| Isophorone | 8.1 | 4.0 | 3.6 | 50% DMSO 40% Aromatic 100 10% n-Butanol | 8.9 | 4.1 | 3.5 |
| Methyl ethyl Ketone | 7.8 | 4.4 | 2.5 | 20% DMSO 80% MIBK | 7.8 | 3.8 | 2.5 |

(continued)

Table 5.23: (continued)

| Solvents to be Replaced | | | | Replacement Mixture | | | |
|-----------------------------|-----|-----|-----|------------------------------|-----|-----|-----|
| Methylene chloride | 8.9 | 3.1 | 3.0 | 40% DMSO 60% Aromatic 150 | 8.7 | 3.1 | 2.7 |
| Nitrobenzene | 9.8 | 4.2 | 2.0 | 45% DMSO 55% Toluene | 8.9 | 3.6 | 2.6 |
| NMP | 8.8 | 6.0 | 3.5 | 70% DMSO 30% Aromatic 100 | 8.9 | 5.4 | 3.6 |
| Pentoxone (discontinued) | 7.3 | 4.2 | 2.8 | 50% DMSO 50% Aromatic 100 | 8.9 | 3.9 | 2.8 |
| Propylene carbonate | 9.8 | 8.8 | 2.0 | 100% DMSO | 9.0 | 8.0 | 5.0 |
| Sulfolane | 9.0 | 8.1 | 3.6 | 100% DMSO | 9.0 | 8.0 | 5.0 |

Table 5.24: Hansen Solubility Parameters of Polymer Envelopes (36)

| Polymer | δ_d | δ_p | δ_h | Radius |
|------------------------------------------------------|------------|------------|------------|--------|
| Polymethylmethacrylate Rohm & Haas | 9.1 | 5.1 | 3.7 | 4.2 |
| Epoxy - "Epicote" 1001 Shell Chemical | 10.0 | 5.9 | 5.6 | 6.2 |
| Polystyrene BASF | 10.4 | 2.8 | 2.1 | 6.2 |
| Polyvinyl acetate "Mowilith" 50 Farbwerke Hoechst | 10.2 | 5.5 | 4.7 | 6.7 |
| Nitrocellulose 1/2 sec. H 23 A. Hagedorn | 7.5 | 7.2 | 4.3 | 5.6 |
| Cellulose acetate "Cellidora" A. Bayer A.G. | 9.1 | 6.2 | 5.4 | 3.7 |
| Polyester "Desmophen" 850 A. Bayer A.G. | 10.5 | 7.3 | 6.0 | 8.2 |
| Polyvinyl chloride "Vipla" KR Montecatini | 8.9 | 3.7 | 4.1 | 1.7 |

Table 5.25: Polymer Solvency of DMSO/Tetralin Mixtures (36)

| Polymer | Solvency ⁽¹⁾ Versus Mixture Composition | | | | | | | |
|------------------------------------------------------|----------------------------------------------------|-----|----|----|----|----|----|-----|
| | DMSO, % | 100 | 80 | 60 | 50 | 40 | 20 | 0 |
| | Tetralin, % | 0 | 20 | 40 | 50 | 60 | 80 | 100 |
| Polymethylmethacrylate Rohm & Haas | | 42 | 87 | 99 | 93 | 80 | 38 | ns |
| Epoxy - "Epicote" 1001 Shell Chemical | | 77 | 85 | 81 | - | 60 | 32 | ns |
| Polystyrene BASF | | ns | 35 | 70 | - | 87 | 91 | 84 |
| Polyvinyl acetate "Mowilith" 50 Farbwerke Hoechst | | 73 | 86 | 89 | 84 | 77 | 57 | 28 |
| Nitrocellulose 1/2 sec. H 23 A. Hagedorn | | 67 | 65 | 65 | - | 4 | ns | ns |
| Cellulose acetate "Cellidora" A. Bayer A.G. | | 74 | 89 | 61 | - | 0 | ns | ns |
| Polyester "Desmophen" 850 A. Bayer A.G. | | 85 | 83 | 74 | - | 57 | 35 | 5 |
| Polyvinyl chloride "Vipla" KR Montecatini | | ns | ns | ns | 68 | ns | ns | ns |

⁽¹⁾ Solvency = $100[1 - (\Delta\delta / R)^2]$ See appendix, equation 5 for explanation.
If Solvency < 0, rating is "ns" indicating not soluble.

Table 5.26: Polymer Solvency of DMSO/MIBK Mixtures (36)

| Polymer | Solvency ⁽²⁾ Versus Mixture Composition | | | | | | |
|------------------------------------------------------|----------------------------------------------------|-----|----|----|----|----|-----|
| | DMSO, % | 100 | 80 | 60 | 40 | 20 | 0 |
| | MIBK, % | 0 | 20 | 40 | 60 | 80 | 100 |
| Polymethylmethacrylate Rohm & Haas | | 42 | 77 | 84 | 67 | 38 | 0 |
| Epoxy - "Epicote" 1001 Shell Chemical | | 77 | 73 | 58 | 38 | 9 | ns |
| Polystyrene BASF | | ns | 15 | 27 | 30 | 21 | 12 |
| Polyvinyl acetate "Mowilith" 50 Farbwerke Hoechst | | 73 | 72 | 64 | 43 | 28 | 6 |
| Nitrocellulose I/2 sec. H 23 A. Hagedorn | | 67 | 83 | 82 | 69 | 51 | 27 |
| Cellulose acetate "Cellidora" A. Bayer A.G. | | 74 | 81 | 54 | 0 | ns | ns |
| Polyester "Desmophen" 850 A. Bayer A.G. | | 85 | 74 | 58 | 39 | 16 | ns |
| Polyvinyl chloride "Vipla" KR Montecatini | | ns | ns | ns | ns | ns | ns |

⁽¹⁾ MIBK - methyl isobutyl ketone

⁽²⁾ Solvency = $100[1 - (\Delta\delta) R^2]$ See appendix, equation 5 for explanation.
If Solvency < 0, rating is "ns" indicating not soluble.

Table 5.27: Solvent Viscosities (36)

| Solvent | Viscosity, cps @25°C |
|----------------------------------|----------------------|
| DIMETHYL SULFOXIDE (DMSO) | 2.0 |
| Dimethylformamide (DMF) | 0.8 |
| N-Methyl-2-pyrrolidone (NMP) | 1.6 |
| Butyrolactone | 1.7 |
| Cyclohexanone | 2.1 |
| Isophorone | 2.5 |
| Diacetone alcohol | 3.0 |
| Propylene Carbonate | 4.0 |
| Sulfolane | 10.3 @ 30°C |

Table 5.28: Solvent Evaporation Times (36)

| Solvent | 90% Evaporation Times, seconds |
|----------------------------------|--------------------------------|
| DIMETHYL SULFOXIDE (DMSO) | 17,600 |
| Cyclohexanone | 1,570 |
| Dimethylformamide (DMF) | 2,280 |
| Diacetone alcohol | 3,840 |
| N-Methyl-2-pyrrolidone (NMP) | 15,400 |
| Isophorone | 20,000 |
| Butyrolactone | 23,700 |
| Propylene carbonate | 119,660 |
| Sulfolane | >1,000,000 |

SULFOLANE

Table 5.29: Properties of Sulfolane (4)

| Property | Typical Value | Specification | Test Method |
|----------------------------------------------------------|-------------------------|---------------|--------------------|
| Distillation, Range, °C, 760 mm | | | ASTM D 1078 |
| 5% | 284.8 | 282 Min. | |
| 50% | 285.2 | | |
| 95% | 285.6 | 288 Max. | |
| Specific Gravity, 30/4°C | 1.264 | | ASTM D 891 |
| 100/4°C | 1.201 | | |
| Flash Point, °F | 330 | | Literature Value |
| Freezing Point, °F | 79 | | PPCo-6518-CH |
| Composition, wt. % | | | Gas Chromatography |
| Sulfolane (Water-free) | 99.9 | 99.0 Min. | PPCo-6517-CG-1 |
| Ash Content, wt. % | 0.006 | 0.1 Max. | PPCo-7505-CF |
| Water Content, wt. % | 0.06 | 0.25 Max. | ASTM D 1744 |
| SO ₂ Stability, mg SO ₂ /250 ml/hr | 4 | 20 Max. | PPCo-6533-CZ |
| Molecular Weight | 120.17 | | Literature Value |
| Boiling Point, °C | 287.3 | | Literature Value |
| Melting Point, °C | 28.5 | | Literature Value |
| Density, 15°C | 1.276 g/cm ³ | | Literature Value |
| Viscosity, mPa.s (= cP), 30°C | 10.3 | | Literature Value |
| 100°C | 2.5 | | Literature Value |
| 200°C | 1.0 | | Literature Value |
| Refractive Index, n _D , 30°C | 1.48 | | Literature Value |
| Heat of Fusion, kJ/kg* | 11.44 | | Literature Value |
| Dielectric Constant | 43.3 | | Literature Value |
| Surface Tension, 30°C mN/m (= dyn/cm) | 35.5 | | Literature Value |

*To convert J to cal, divide by 4.184.

This product is also sold as Sulfolane-W, which is 3.0 wt. % water added to Sulfolane, Anhydrous. Phillips Chemical's Sulfolane-W meets all specifications for the Sulfolane process licensed by UOP, Inc.

Table 5.30: Solubility of Sulfolane in Various Chemical Compounds (4)

| Chemical Compound | Temperature | | Grams Sulfolane/ 100 gms Chemical |
|---------------------|-------------|----|--------------------------------------|
| | °C | °F | |
| Benzene | 25.0 | 77 | Miscible |
| Cyclohexane | 25.0 | 77 | 0.4 |
| 2,3, Dimethylbutane | 25.0 | 77 | 0.3 |
| Hexene-1 | 25.0 | 77 | 1.0 |
| Normal Hexane | 25.0 | 77 | 0.3 |
| Perchloroethylene | 24.4 | 76 | 1.6 |
| Toluene | 25.0 | 77 | Miscible |
| Mixed Xylenes | 25.0 | 77 | Miscible |

Table 5.31: Solubility of Various Chemical Compounds in Sulfolane (4)

| Chemical Compound | Temperature | | Grams Chemical/ 100 gms Sulfolane |
|-------------------------------|-------------|-----|--------------------------------------|
| | °C | °F | |
| Hydrogen Chloride (gas) | 25.0 | 77 | 9.3 |
| Ethyl Mercaptan | 26.6 | 80 | Miscible |
| Methyl Mercaptan | 0.0 | 32 | Miscible |
| Methyl Mercaptan | 25.0 | 77 | 21.7* |
| Tertiary Dodecyl Mercaptan | 25.0 | 77 | 2.0 |
| Perchloroethylene | 24.4 | 76 | 37.5 |
| Polystyrene | 199.8 | 392 | 0.02 |
| Trichloroethylene | 24.4 | 76 | Miscible |

*Test performed at atmospheric pressure, approx. 34° F above the normal boiling point (42.6° F) of methyl mercaptan.

Table 5.32: Thermal Stability of Sulfolane (4)


The tests summarized below were made with Sulfolane containing 10 mg of SO₂ per 250 ml. Phillips Test Method PPCo-6533-CZ.*

| Temperature | | SO ₂ (mg.) Liberated Per Hour From 250ml Sulfolane |
|-------------|-----|---------------------------------------------------------------------|
| °C | °F | |
| 180 | 356 | 0.6 |
| 200 | 392 | 2.8 |
| 220 | 428 | 3.3 |
| 240 | 464 | 24.1 |

FINDINGS: Sulfolane has good thermal stability up to and including 428° F, but has a rather sharp decomposition rate beyond this temperature. Excessive temperatures will cause Sulfolane to "crack" to a dark polymer and SO₂.

*Description of test method available on request.

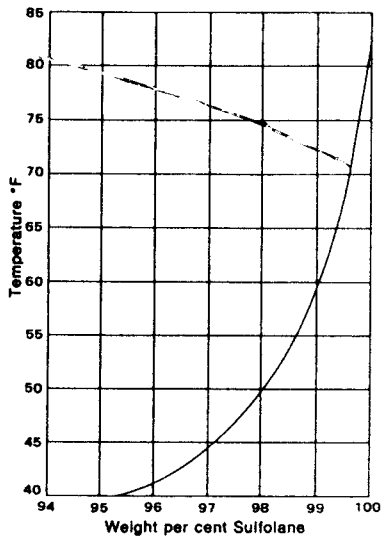
Table 5.33: Comparative Freezing Point Depression (4)



| Impurity | Mol. % Impurity Required to Lower Freezing Point 1°F |
|---------------------|------------------------------------------------------|
| Normal Butylbenzene | 0.098 |
| 2-Phenylpentane | 0.103 |
| Sulfolene | 0.228 |
| 3-Methylsulfolane | 0.189 |
| Water | 0.163 |

Freezing point curve for Sulfolane — water mixtures

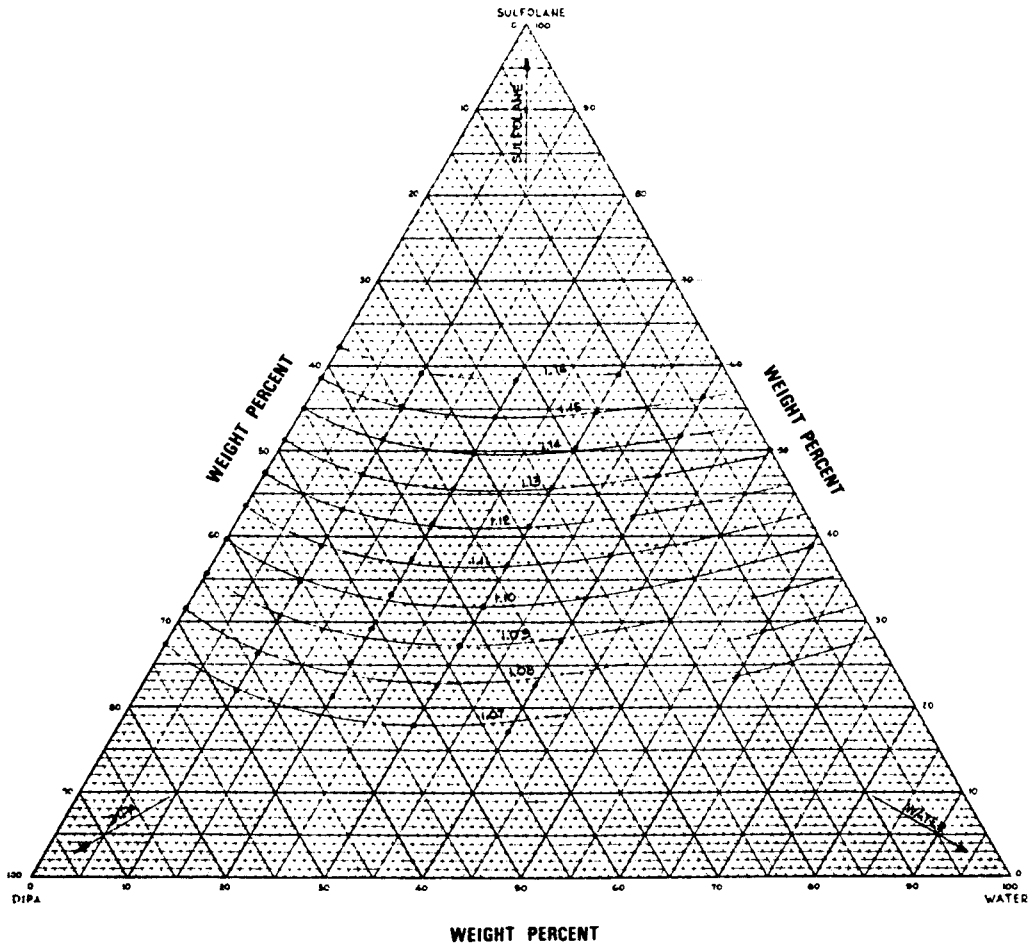Table 5.34: Specific Gravity (4)



Monohydric Alcohols

METHANOL

Table 6.1: Physical Properties of Methanol (70)

| | | | |
|-------------------------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------|-----------------------------------|
| Chemical Family | Alcohol | Critical Temperature, °C (°F) | 240 (464) |
| Chemical Formula | CH ₃ OH | Critical Volume, cc/g (cu ft/lb) | 3.6829 (.05899) |
| Chemical Structure | H ₃ -C-OH | Density, lb/gal @ 15.6°C (60°F) | 6.63 |
| Chemical Abstract Service Number | 67-56-1 | Explosive Limits, % Volume in Air, Lower | 6.0 |
| Molecular Weight | 32.04 | Upper | 36.5 |
| Synonyms | Methyl Alcohol Carbinol Wood Alcohol | Flash Point, Tag Closed Cup, °C (°F) | 11 (52) |
| Auto Ignition Temperature, @ 760 mm Hg, °C (°F) | 385 (725) | Heat of Formation, Liquid, @ 25°C, K cal/g mol @ 77°F, BTU/lb mol | -57.021 -102.6x10 ³ |
| Boiling Point, @ 760 mm Hg, °C (°F) | 64.7 (148.4) | Heat of Formation, Vapor, @ 25°C, K cal/g mol @ 77°F, BTU/lb mol | -48.08 -86.5x10 ³ |
| Freezing Point, °C (°F) | -97.7 (-143.8) | Heat of Fusion, @ -97°C, K cal/g mol @ -142.6°F, BTU/lb mol | 16.4 29.5 |
| Coefficient of Expansion, per °C @ 20°C per °F @ 68°F | 0.00119 0.00066 | Refractive Index, N _D ²⁰ | 1.3286 |
| Critical Compressibility | 0.224 | Solubility in Water, @ 20°C (68°F) | Completely Miscible |
| Critical Density, g/cc (lb/cu ft) | 0.272 (16.952) | | |
| Critical Pressure, Kg/cm ² (PSIA) | 81.12 (1153.95) | | |

Table 6.2: Properties of Aqueous Solutions of Methanol (31)

| METHANOL | | FREEZING POINT °F. | BOILING POINT °F. | FLASH POINT °F. (Closed Cup) | DENSITY (g./ml.) AT VARIOUS TEMPERATURES | | | | VISCOSITY (MILLIPOISES) AT VARIOUS TEMPERATURES | | | |
|----------|--------|--------------------|-------------------|------------------------------|------------------------------------------|-------|-------|-------|-------------------------------------------------|-------|-------|-------|
| WT. % | VOL. % | | | | 0°C. | 10°C. | 15°C. | 20°C. | 25°C. | 35°C. | 45°C. | 55°C. |
| 0 | 0 | 32 | 212 | — | .9999 | .9997 | .9993 | .9982 | 8.9 | 7.2 | 5.9 | 5.1 |
| 10 | 12.35 | 21.7 | 197.2 | 130 | .9842 | .9834 | .9824 | .9815 | 11.8 | 9.2 | 7.4 | 6.2 |
| 20 | 24.33 | 5.9 | 187.3 | 107 | .9725 | .9700 | .9681 | .9666 | 14.1 | 10.9 | 8.6 | 7.1 |
| 30 | 35.95 | -14.6 | 180.0 | 94 | .9604 | .9560 | .9537 | .9515 | 15.5 | 11.9 | 9.4 | 7.7 |
| 40 | 47.11 | -39.1 | 174.2 | 84 | .9459 | .9403 | .9372 | .9345 | 15.8 | 12.3 | 9.7 | 7.9 |
| 50 | 57.71 | -65.7 | 169.5 | 76 | .9287 | .9221 | .9185 | .9156 | 15.7 | 12.2 | 9.7 | 7.9 |
| 60 | 67.69 | -101.2 | 165.6 | 69 | .9090 | .9018 | .8978 | .8946 | 14.0 | 10.9 | 8.8 | 7.2 |
| 70 | 76.98 | -156.1 | 161.6 | 63 | .8869 | .8794 | .8751 | .8715 | 12.2 | 9.6 | 7.8 | 6.4 |
| 80 | 85.50 | -175.0* | 157.5 | 58 | .8634 | .8551 | .8505 | .8469 | 10.1 | 8.1 | 6.7 | 5.6 |
| 90 | 93.19 | -171.4 | 153.0 | 53 | .8374 | .8287 | .8240 | .8202 | 7.9 | 6.5 | 5.5 | 4.6 |
| 100 | 100.0 | -142.6 | 148.3 | 49 | .8102 | .8009 | .7958 | .7917 | 5.5 | 4.8 | 4.1 | 3.6 |

| WT. % | VAPOR PRESSURE (mm Hg) AT VARIOUS TEMPERATURES | | | | WT. % METHANOL IN VAPOR AT 760 mm. | THERMAL CONDUCTIVITY (CAL./SEC./CM. ² /°C./CM.) AT VARIOUS TEMPERATURES | | | SPECIFIC HEAT AT VARIOUS TEMPERATURES | | | |
|-------|------------------------------------------------|-------|--------|--------|------------------------------------|------------------------------------------------------------------------------------|--------|--------|---------------------------------------|-------|-------|--------|
| | 20°C. | 60°C. | 100°C. | 140°C. | | 10°C. | 40°C. | 70°C. | 30°C. | 50°C. | 80°C. | 100°C. |
| 0 | 17.5 | 149 | 760 | 2700 | 0 | .00138 | .00149 | .00160 | 0.990 | 0.994 | 1.000 | 1.004 |
| 10 | 28.0 | 206 | 1030 | 3640 | 43.4 | .00126 | .00135 | .00145 | 1.015 | 1.022 | 1.032 | 1.039 |
| 20 | 35.5 | 258 | 1260 | 4300 | 61.2 | .00115 | .00122 | .00129 | 1.000 | 1.014 | 1.035 | 1.049 |
| 30 | 41.5 | 307 | 1450 | 4780 | 70.5 | .00105 | .00110 | .00115 | 0.974 | 0.997 | 1.031 | 1.054 |
| 40 | 46.5 | 350 | 1600 | 5200 | 76.5 | .00096 | .00098 | .00100 | 0.947 | 0.979 | 1.026 | 1.057 |
| 50 | 52.0 | 390 | 1740 | 5620 | 81.0 | .00088 | .00088 | .00088 | 0.888 | 0.928 | 0.988 | 1.028 |
| 60 | 59.0 | 427 | 1880 | 6040 | 84.8 | .00079 | .00078 | .00076 | 0.821 | 0.869 | 0.941 | 0.990 |
| 70 | 66.5 | 462 | 2020 | 6470 | 88.5 | .00072 | .00069 | .00066 | 0.764 | 0.820 | 0.905 | 0.961 |
| 80 | 75.5 | 503 | 2190 | 6970 | 92.2 | .00065 | .00061 | .00057 | 0.726 | 0.790 | 0.886 | 0.951 |
| 90 | 87.0 | 557 | 2380 | 7550 | 96.0 | .00059 | .00054 | .00049 | 0.665 | 0.737 | 0.846 | 0.918 |
| 100 | 99.0 | 620 | 2600 | 8150 | 100.0 | .00053 | .00048 | .00043 | 0.626 | 0.706 | 0.826 | 0.887 |

* The eutectic point or minimum freezing temperature is approximately -128.7°C. (-199.7°F.) at a composition of 82.9% Wt. methanol (87.8% Vol.). In the vicinity of the eutectic, the solutions become vitreous and direct determinations of the freezing point are difficult to make.

Table 6.3: Freezing Points of Methanol-Water Solutions (34)

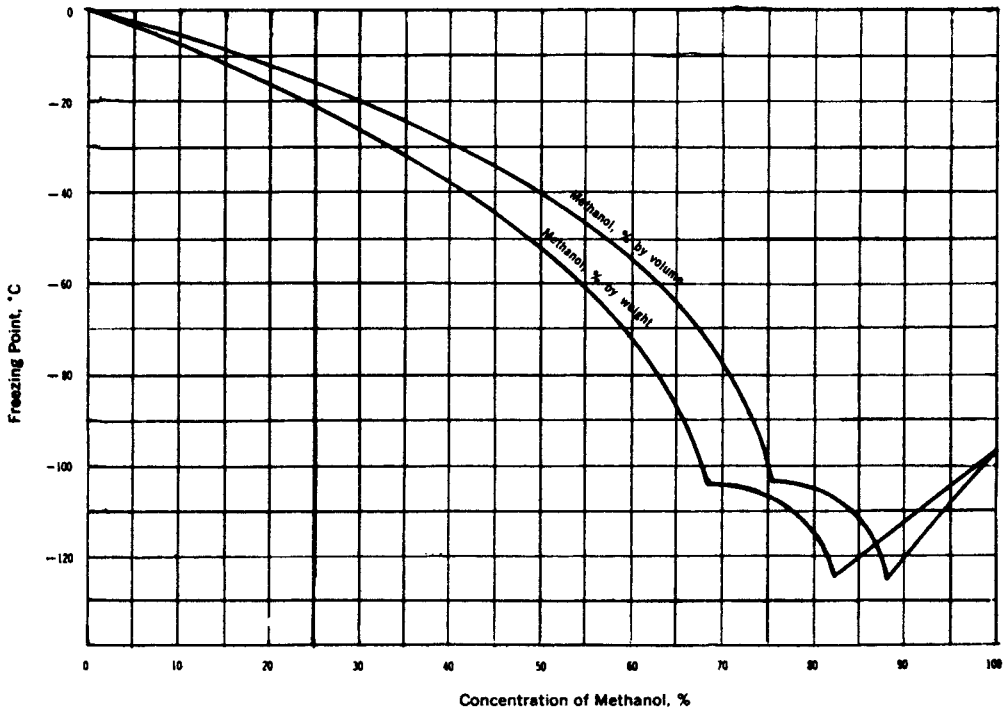


Table 6.4: Density and Specific Gravity of Methanol–Water Solutions at 15°C (34)

| Methanol | | Density, 15/4°C | Specific Gravity, 15/15°C | Methanol | | Density, 15/4°C | Specific Gravity, 15/15°C |
|----------------|----------------|--------------------|---------------------------------|----------------|----------------|--------------------|---------------------------------|
| % by Weight | % by Volume | | | % by Weight | % by Volume | | |
| 0 | 0 | 0.99913 | 1.00000 | 50 | 57.712 | 0.91852 | 0.91931 |
| 1 | 1.253 | 0.99727 | 0.99813 | 51 | 58.739 | 0.91653 | 0.91732 |
| 2 | 2.502 | 0.99543 | 0.99629 | 52 | 59.759 | 0.91451 | 0.91530 |
| 3 | 3.746 | 0.99370 | 0.99456 | 53 | 60.773 | 0.91248 | 0.91327 |
| 4 | 4.986 | 0.99198 | 0.99284 | 54 | 61.781 | 0.91044 | 0.91123 |
| 5 | 6.222 | 0.99029 | 0.99115 | 55 | 62.783 | 0.90839 | 0.90918 |
| 6 | 7.454 | 0.98864 | 0.98950 | 56 | 63.778 | 0.90631 | 0.90709 |
| 7 | 8.682 | 0.98701 | 0.98786 | 57 | 64.767 | 0.90421 | 0.90499 |
| 8 | 9.908 | 0.98547 | 0.98632 | 58 | 65.750 | 0.90210 | 0.90288 |
| 9 | 11.128 | 0.98394 | 0.98479 | 59 | 66.725 | 0.89996 | 0.90074 |
| 10 | 12.345 | 0.98241 | 0.98326 | 60 | 67.693 | 0.89781 | 0.89859 |
| 11 | 13.559 | 0.98083 | 0.98178 | 61 | 68.654 | 0.89563 | 0.89640 |
| 12 | 14.779 | 0.97945 | 0.98030 | 62 | 69.607 | 0.89341 | 0.89418 |
| 13 | 15.977 | 0.97802 | 0.97887 | 63 | 70.552 | 0.89117 | 0.89194 |
| 14 | 17.181 | 0.97660 | 0.97745 | 64 | 71.490 | 0.88890 | 0.88967 |
| 15 | 18.382 | 0.97518 | 0.97602 | 65 | 72.420 | 0.88662 | 0.88739 |
| 16 | 19.579 | 0.97377 | 0.97461 | 66 | 73.344 | 0.88433 | 0.88510 |
| 17 | 20.773 | 0.97237 | 0.97321 | 67 | 74.252 | 0.88203 | 0.88279 |
| 18 | 21.963 | 0.97096 | 0.97180 | 68 | 75.172 | 0.87971 | 0.88047 |
| 19 | 23.149 | 0.96955 | 0.97039 | 69 | 76.077 | 0.87739 | 0.87815 |
| 20 | 24.322 | 0.96814 | 0.96898 | 70 | 76.976 | 0.87507 | 0.87583 |
| 21 | 25.512 | 0.96673 | 0.96757 | 71 | 77.864 | 0.87271 | 0.87346 |
| 22 | 26.688 | 0.96533 | 0.96614 | 72 | 78.746 | 0.87033 | 0.87108 |
| 23 | 27.860 | 0.96392 | 0.96475 | 73 | 79.618 | 0.86792 | 0.86867 |
| 24 | 29.029 | 0.96251 | 0.96334 | 74 | 80.480 | 0.86546 | 0.86621 |
| 25 | 30.193 | 0.96108 | 0.96191 | 75 | 81.336 | 0.86300 | 0.86375 |
| 26 | 31.354 | 0.95963 | 0.96046 | 76 | 82.182 | 0.86051 | 0.86125 |
| 27 | 32.510 | 0.95817 | 0.95900 | 77 | 83.022 | 0.85801 | 0.85875 |
| 28 | 33.662 | 0.95668 | 0.95751 | 78 | 83.855 | 0.85551 | 0.85625 |
| 29 | 34.809 | 0.95518 | 0.95601 | 79 | 84.680 | 0.85300 | 0.85374 |
| 30 | 35.952 | 0.95366 | 0.95499 | 80 | 85.499 | 0.85048 | 0.85122 |
| 31 | 37.091 | 0.95213 | 0.95295 | 81 | 86.310 | 0.84794 | 0.84867 |
| 32 | 38.224 | 0.95056 | 0.95138 | 82 | 87.110 | 0.84536 | 0.84609 |
| 33 | 39.352 | 0.94896 | 0.94978 | 83 | 87.899 | 0.84274 | 0.84347 |
| 34 | 40.476 | 0.94734 | 0.94816 | 84 | 88.677 | 0.84009 | 0.84082 |
| 35 | 41.594 | 0.94570 | 0.94652 | 85 | 89.448 | 0.83742 | 0.83814 |
| 36 | 42.708 | 0.94404 | 0.94486 | 86 | 90.212 | 0.83475 | 0.83547 |
| 37 | 43.816 | 0.94237 | 0.94319 | 87 | 90.968 | 0.83207 | 0.83279 |
| 38 | 44.919 | 0.94067 | 0.94148 | 88 | 91.716 | 0.82937 | 0.83009 |
| 39 | 46.016 | 0.93894 | 0.93975 | 89 | 92.456 | 0.82666 | 0.82738 |
| 40 | 47.109 | 0.93720 | 0.93801 | 90 | 93.118 | 0.82396 | 0.82467 |
| 41 | 48.195 | 0.93543 | 0.93624 | 91 | 93.912 | 0.82124 | 0.82195 |
| 42 | 49.277 | 0.93365 | 0.93446 | 92 | 94.627 | 0.81849 | 0.81920 |
| 43 | 50.353 | 0.93185 | 0.93266 | 93 | 95.326 | 0.81568 | 0.81639 |
| 44 | 51.422 | 0.93001 | 0.93081 | 94 | 96.017 | 0.81285 | 0.81355 |
| 45 | 52.486 | 0.92815 | 0.92895 | 95 | 96.697 | 0.80999 | 0.81069 |
| 46 | 53.544 | 0.92627 | 0.92707 | 96 | 97.370 | 0.80713 | 0.80783 |
| 47 | 54.595 | 0.92436 | 0.92516 | 97 | 98.036 | 0.80428 | 0.80498 |
| 48 | 55.639 | 0.92242 | 0.92322 | 98 | 98.696 | 0.80143 | 0.80212 |
| 49 | 56.678 | 0.92048 | 0.92128 | 99 | 99.351 | 0.79859 | 0.79928 |
| | | | | 100 | 100.000 | 0.79577 | 0.79646 |

Table 6.5: Density and Specific Gravity of Methanol–Water Solutions at 30°C (34)

| Methanol | | Density, 30/4°C | Specific Gravity, 30/30°C | Methanol | | Density, 30/4°C | Specific Gravity, 30/30°C |
|----------------|----------------|--------------------|---------------------------------|----------------|----------------|--------------------|---------------------------------|
| % by Weight | % by Volume | | | % by Weight | % by Volume | | |
| 0 | 0.000 | 0.9957 | 1.0000 | 50 | 58.089 | 0.9084 | 0.9123 |
| 1 | 1.271 | 0.9939 | 0.9982 | 51 | 59.121 | 0.9064 | 0.9103 |
| 2 | 2.538 | 0.9921 | 0.9964 | 52 | 60.140 | 0.9043 | 0.9082 |
| 3 | 3.800 | 0.9903 | 0.9946 | 53 | 61.148 | 0.9021 | 0.9060 |
| 4 | 5.057 | 0.9886 | 0.9929 | 54 | 62.149 | 0.8999 | 0.9038 |
| 5 | 6.310 | 0.9868 | 0.9911 | 55 | 63.146 | 0.8977 | 0.9016 |
| 6 | 7.559 | 0.9850 | 0.9893 | 56 | 64.136 | 0.8955 | 0.8994 |
| 7 | 8.802 | 0.9832 | 0.9874 | 57 | 65.114 | 0.8932 | 0.8971 |
| 8 | 10.042 | 0.9815 | 0.9857 | 58 | 66.093 | 0.8910 | 0.8948 |
| 9 | 11.278 | 0.9798 | 0.9840 | 59 | 67.059 | 0.8887 | 0.8925 |
| 10 | 12.511 | 0.9782 | 0.9824 | 60 | 68.019 | 0.8864 | 0.8902 |
| 11 | 13.738 | 0.9765 | 0.9807 | 61 | 68.981 | 0.8842 | 0.8880 |
| 12 | 14.962 | 0.9749 | 0.9791 | 62 | 69.929 | 0.8819 | 0.8857 |
| 13 | 16.182 | 0.9733 | 0.9775 | 63 | 70.872 | 0.8796 | 0.8834 |
| 14 | 17.398 | 0.9717 | 0.9759 | 64 | 71.809 | 0.8773 | 0.8811 |
| 15 | 18.610 | 0.9701 | 0.9743 | 65 | 72.731 | 0.8749 | 0.8787 |
| 16 | 19.820 | 0.9686 | 0.9728 | 66 | 73.656 | 0.8726 | 0.8764 |
| 17 | 21.024 | 0.9670 | 0.9712 | 67 | 74.566 | 0.8702 | 0.8740 |
| 18 | 22.224 | 0.9654 | 0.9696 | 68 | 75.471 | 0.8678 | 0.8715 |
| 19 | 23.420 | 0.9638 | 0.9680 | 69 | 76.369 | 0.8654 | 0.8691 |
| 20 | 24.612 | 0.9622 | 0.9664 | 70 | 77.261 | 0.8630 | 0.8667 |
| 21 | 25.799 | 0.9606 | 0.9647 | 71 | 78.146 | 0.8606 | 0.8643 |
| 22 | 26.983 | 0.9590 | 0.9631 | 72 | 79.017 | 0.8581 | 0.8618 |
| 23 | 28.162 | 0.9574 | 0.9615 | 73 | 79.881 | 0.8556 | 0.8593 |
| 24 | 29.338 | 0.9558 | 0.9599 | 74 | 80.729 | 0.8530 | 0.8567 |
| 25 | 30.509 | 0.9542 | 0.9583 | 75 | 81.580 | 0.8505 | 0.8542 |
| 26 | 31.676 | 0.9526 | 0.9567 | 76 | 82.425 | 0.8480 | 0.8517 |
| 27 | 32.839 | 0.9510 | 0.9551 | 77 | 83.253 | 0.8454 | 0.8491 |
| 28 | 33.998 | 0.9494 | 0.9535 | 78 | 84.085 | 0.8429 | 0.8465 |
| 29 | 35.149 | 0.9477 | 0.9518 | 79 | 84.900 | 0.8403 | 0.8439 |
| 30 | 36.296 | 0.9460 | 0.9501 | 80 | 85.719 | 0.8378 | 0.8414 |
| 31 | 37.439 | 0.9443 | 0.9484 | 81 | 86.522 | 0.8352 | 0.8388 |
| 32 | 38.577 | 0.9426 | 0.9467 | 82 | 87.317 | 0.8326 | 0.8362 |
| 33 | 39.706 | 0.9408 | 0.9449 | 83 | 88.095 | 0.8299 | 0.8335 |
| 34 | 40.831 | 0.9390 | 0.9431 | 84 | 88.867 | 0.8272 | 0.8308 |
| 35 | 41.952 | 0.9372 | 0.9412 | 85 | 89.631 | 0.8245 | 0.8281 |
| 36 | 43.067 | 0.9354 | 0.9394 | 86 | 90.389 | 0.8218 | 0.8253 |
| 37 | 44.179 | 0.9336 | 0.9376 | 87 | 91.139 | 0.8191 | 0.8226 |
| 38 | 45.285 | 0.9318 | 0.9358 | 88 | 91.883 | 0.8164 | 0.8199 |
| 39 | 46.387 | 0.9300 | 0.9340 | 89 | 92.608 | 0.8136 | 0.8171 |
| 40 | 47.479 | 0.9281 | 0.9321 | 90 | 93.327 | 0.8108 | 0.8143 |
| 41 | 48.572 | 0.9263 | 0.9303 | 91 | 94.038 | 0.8080 | 0.8115 |
| 42 | 49.654 | 0.9244 | 0.9284 | 92 | 94.730 | 0.8051 | 0.8086 |
| 43 | 50.732 | 0.9225 | 0.9265 | 93 | 95.415 | 0.8022 | 0.8057 |
| 44 | 51.805 | 0.9206 | 0.9246 | 94 | 96.080 | 0.7992 | 0.8027 |
| 45 | 52.867 | 0.9186 | 0.9226 | 95 | 96.737 | 0.7962 | 0.7996 |
| 46 | 53.925 | 0.9166 | 0.9206 | 96 | 97.400 | 0.7933 | 0.7967 |
| 47 | 54.977 | 0.9146 | 0.9185 | 97 | 98.054 | 0.7904 | 0.7938 |
| 48 | 56.024 | 0.9126 | 0.9165 | 98 | 98.702 | 0.7875 | 0.7909 |
| 49 | 57.059 | 0.9105 | 0.9144 | 99 | 99.355 | 0.7847 | 0.7881 |
| | | | | 100 | 100.000 | 0.7819 | 0.7853 |

Table 6.6: Resultant Volume When Methanol and Water are Mixed (31)

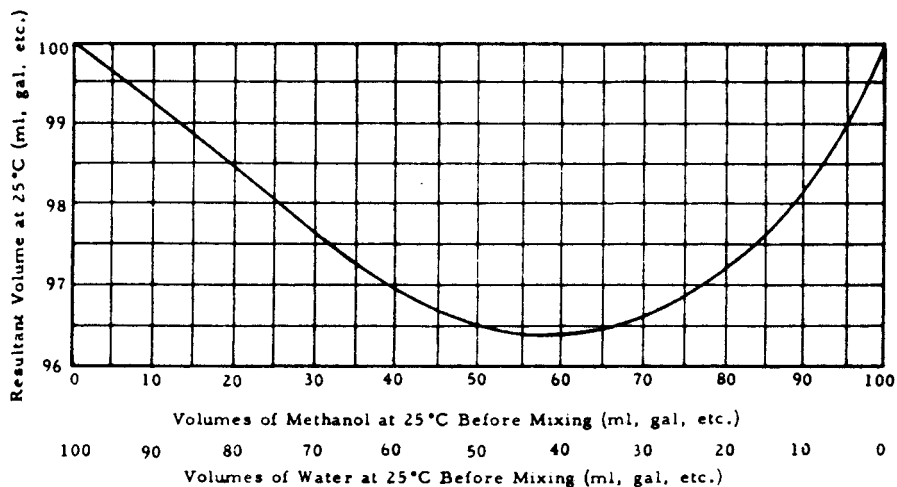


Table 6.7: Solubility of Methanol in Gasoline from 15° to 30°C (31)

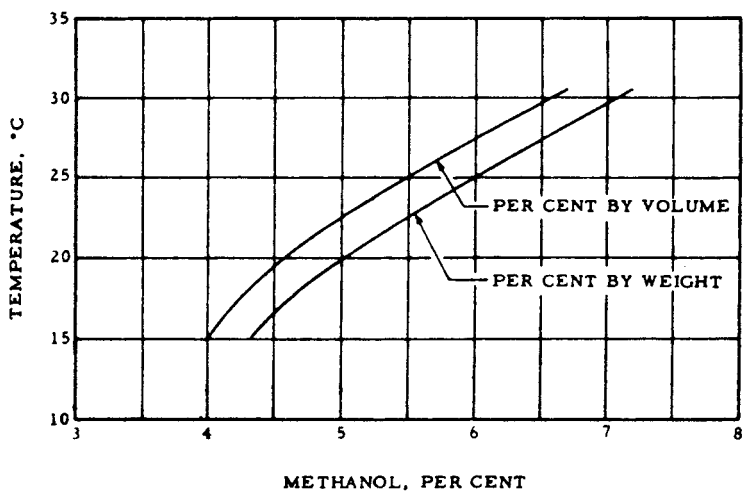


Table 6.8: Liquid Density of Methanol (70)

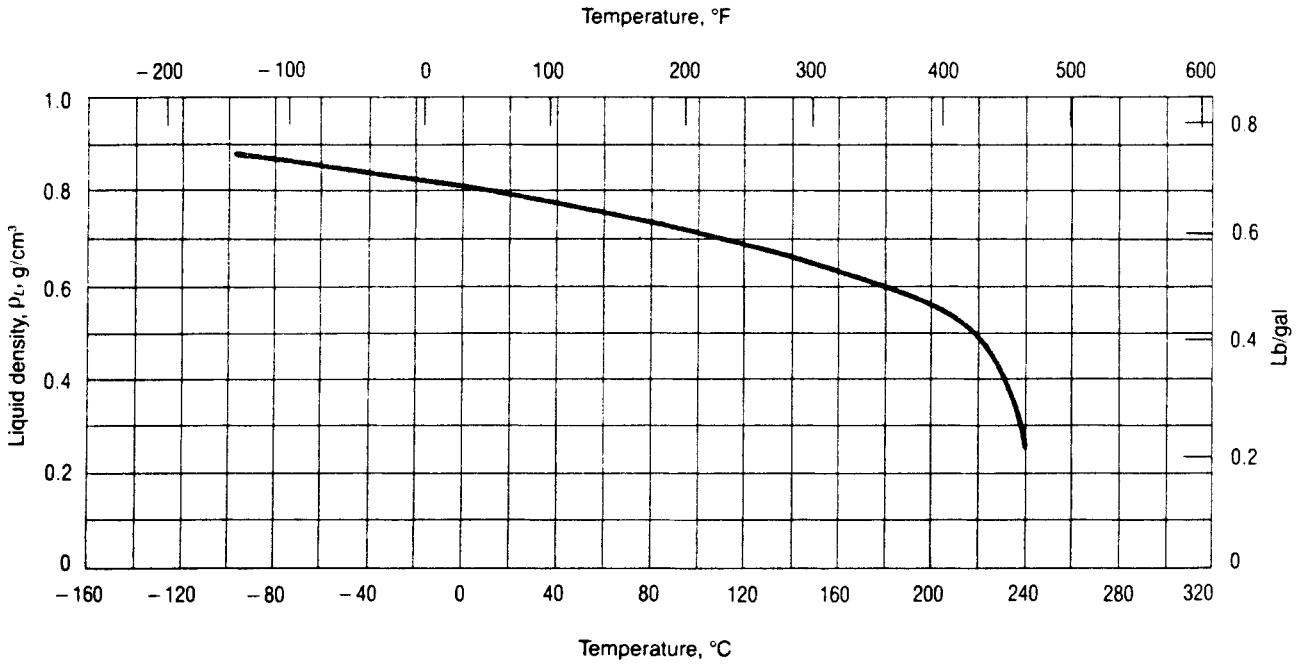


Table 6.9: Liquid Heat Capacity of Methanol (70)

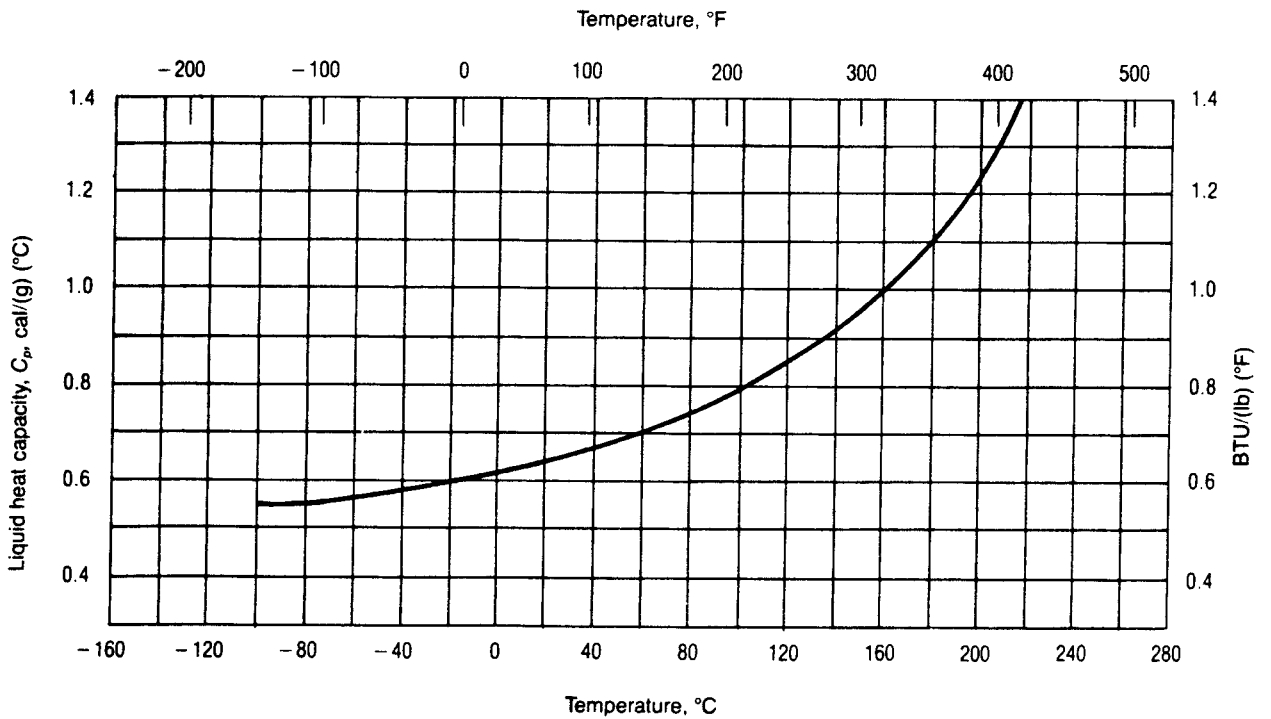


Table 6.10: Vapor Heat Capacity of Methanol (70)

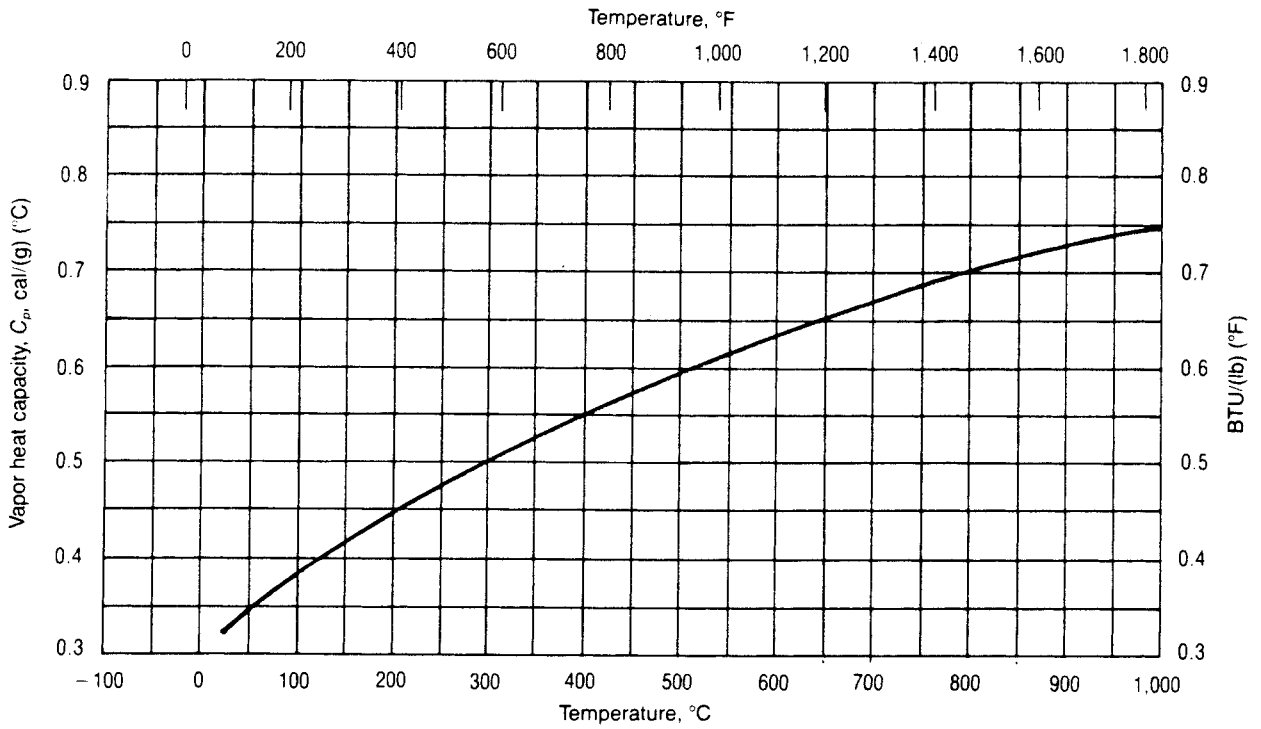


Table 6.11: Heat of Vaporization of Methanol (70)

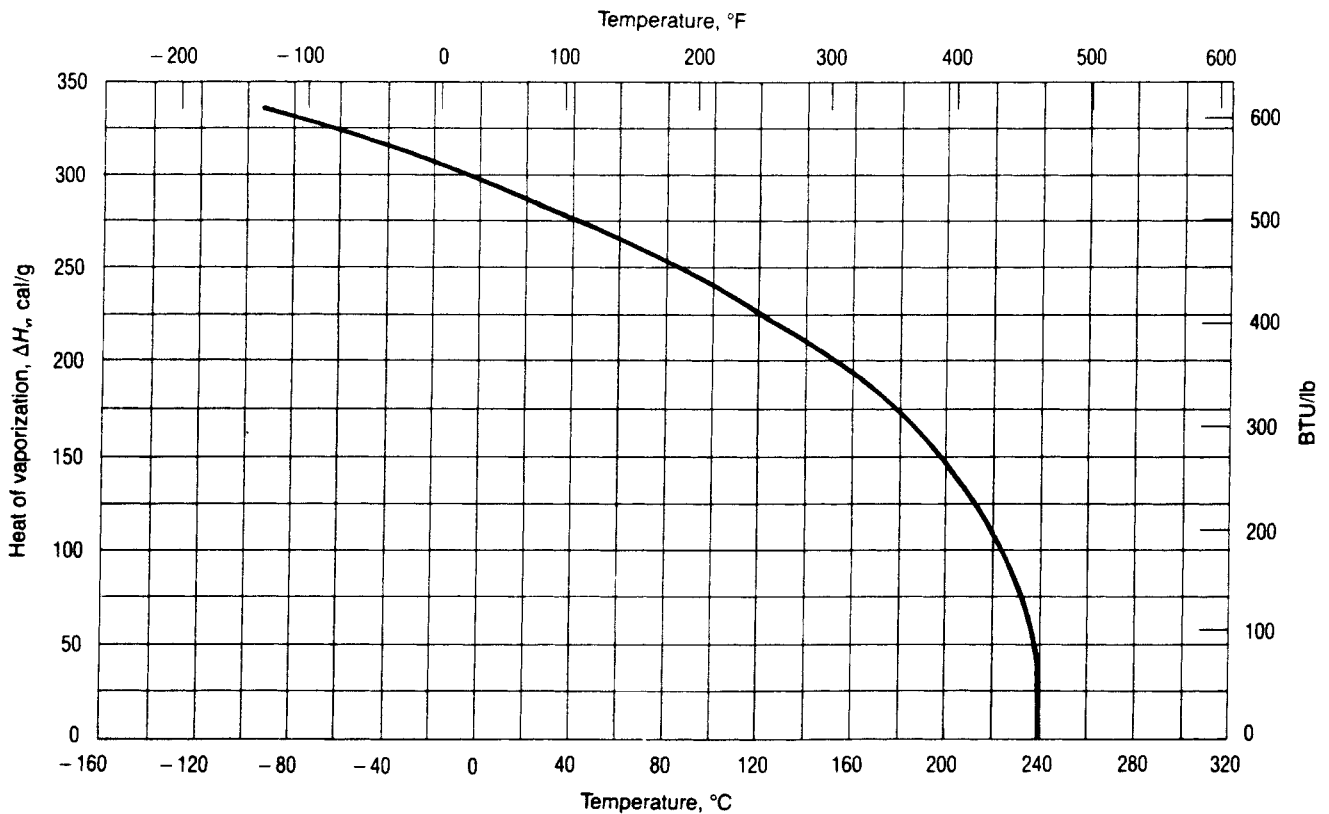


Table 6.12: Surface Tension of Methanol (70)

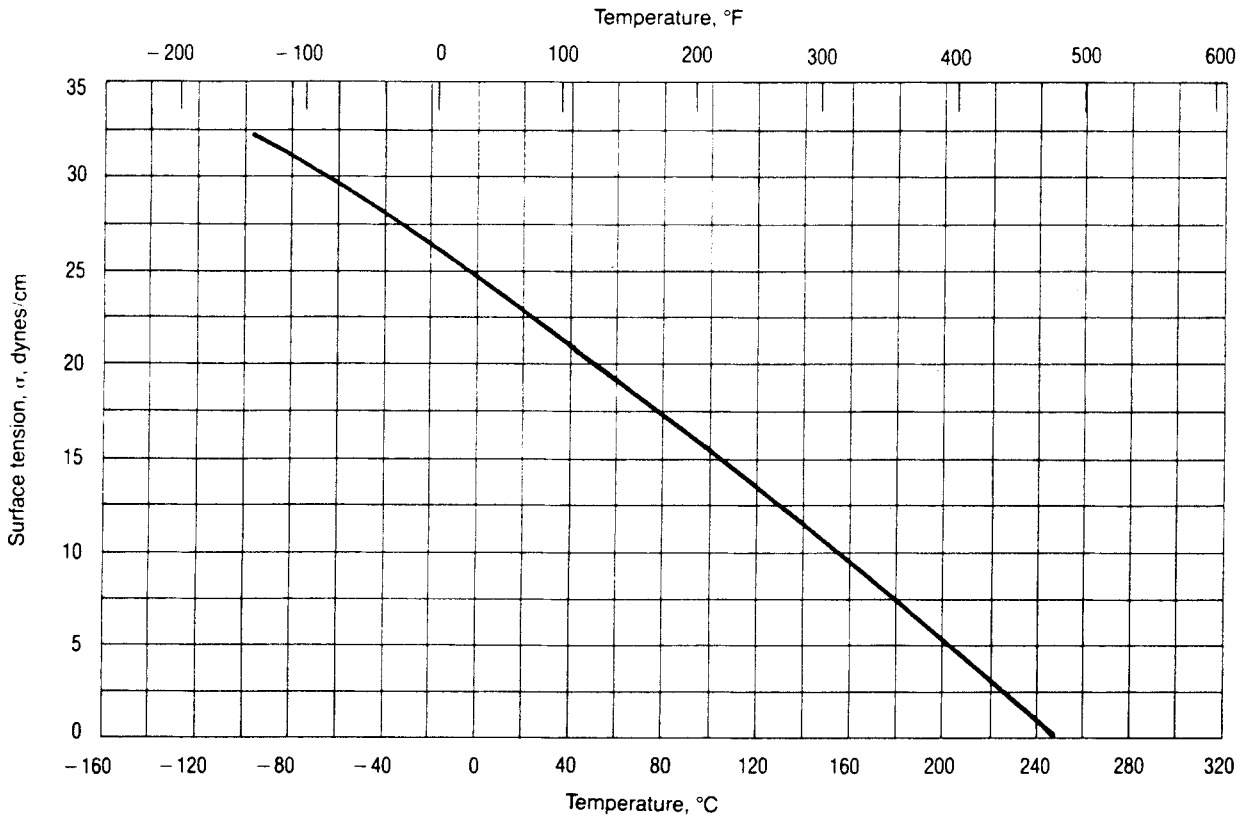


Table 6.13: Liquid Thermal Conductivity of Methanol (70)

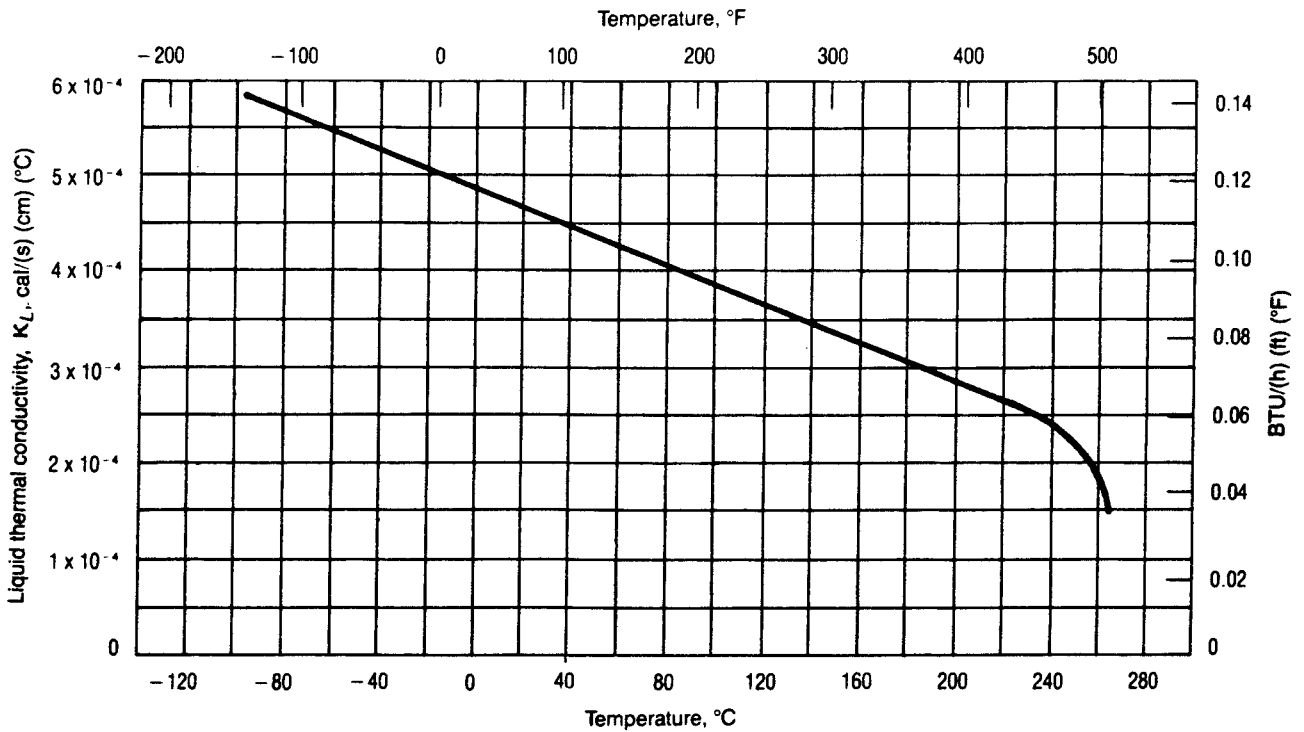


Table 6.14: Vapor Thermal Conductivity of Methanol (70)

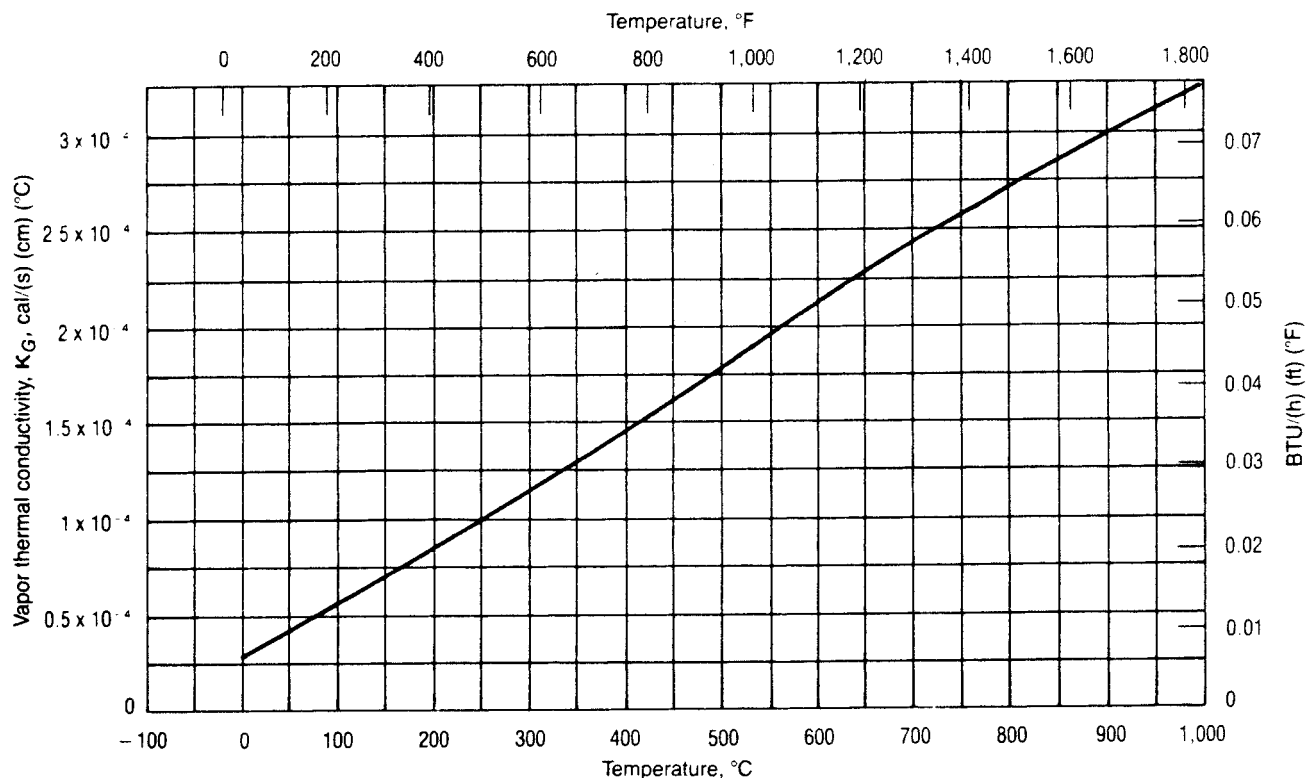


Table 6.15: Vapor Pressure of Methanol (70)

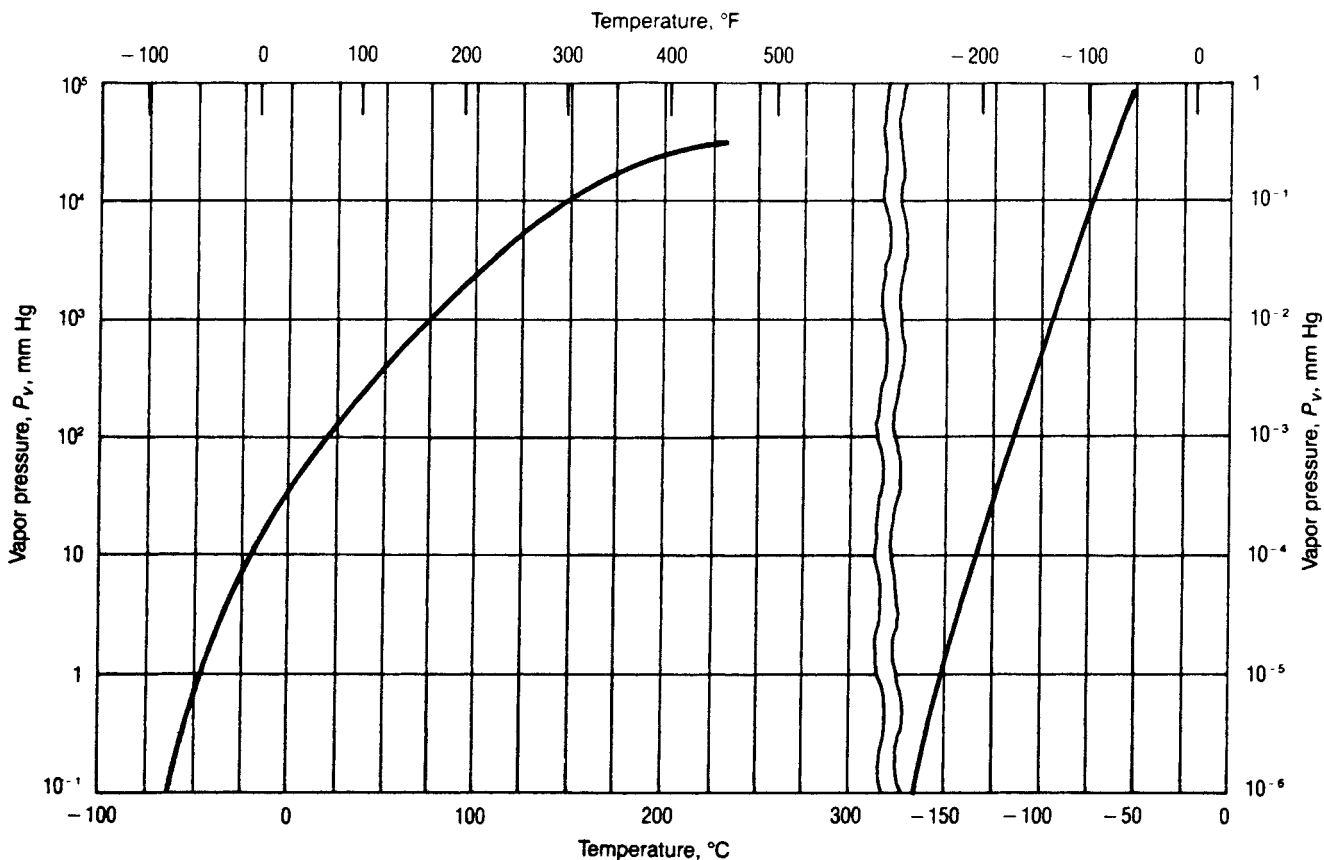


Table 6.16: Vapor Viscosity of Methanol (70)

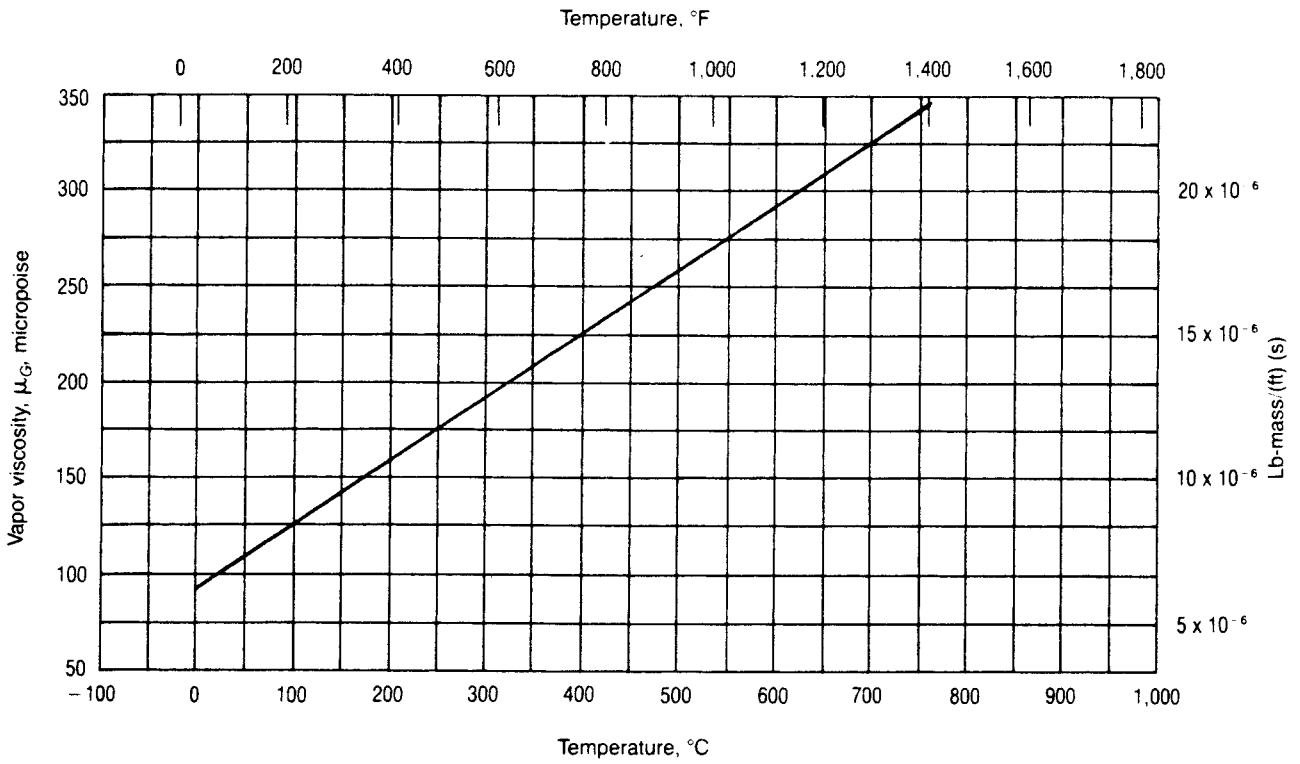


Table 6.17: Liquid Viscosity of Methanol (70)

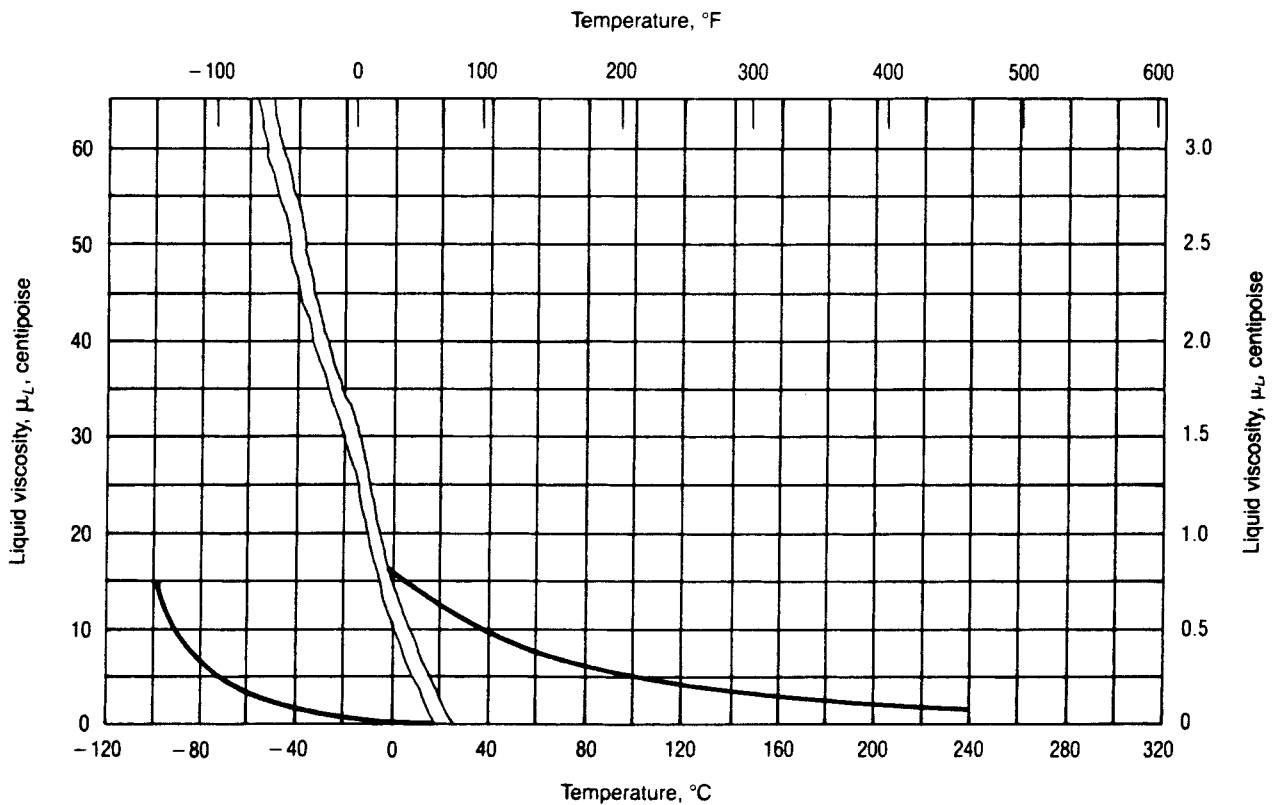


Table 6.18: Azeotropes of Methanol (31)

| METHANOL FORMS BINARY AZEOTROPES WITH: | | | | | | | | |
|----------------------------------------|------------------------------|------|-----------------------|---------------------------|------|-----------------------------------------|--------------------------|------|
| % | B.P. of Azeotrope °C. | % | B.P. of Azeotrope °C. | | % | B.P. of Azeotrope °C. | | |
| 88 | Acetone | 55.5 | 68 | 1, 1-Dichloroethane | 59.0 | 77.7 | 2-Methylfuran | 51.5 |
| 81 | Acetonitrile | 63.5 | 87 | 1, 2-Dichloroethane | 61.0 | 25 | Methyl isobutyrate | 64.0 |
| 38.7 | Acrylonitrile | 61.4 | 47 | cis-1, 2-Dichloroethylene | 51.5 | 52.5 | Methyl propionate | 62.5 |
| 50 | tert-Amyl methyl ether | 62.3 | 79 | 1, 2-Dichloropropane | 62.9 | 88 | Methyl propyl ether | 38.0 |
| 60.5 | Benzene | 58.3 | 75 | 2, 2-Dichloropropane | 55.5 | 87 | Methyl sulfide | 34.5 |
| 77.5 | Biallyl | 47.1 | 35 | 1, 2-Dichloro-1-propene | 56.5 | 91 | n-Pentane | 30.8 |
| 41 | 1-Bromobutane | 63.7 | 10 | Diethoxymethane | 63.2 | 9.3 | α -Pinene | 64.6 |
| 58.5 | 2-Bromobutane | 61.5 | 75.8 | 1, 2-Dimethoxyethylene | 63.5 | 28 | Propyl ether | 63.8 |
| 95 | Bromoethane | 35 | 80 | Dimethyl acetal | 57.5 | 49.8 | Propyl formate | 61.9 |
| 58 | 1-Bromo-2-methylpropane | 61.6 | 40 | 2, 3-Dimethylbutane | 45.0 | 28 | Octane | 63.0 |
| 76 | 2-Bromo-2-methylpropane | 55.6 | 54 | 2, 5-Dimethylhexane | 61.0 | 36.5 | Tetrachloroethylene | 63.8 |
| 79 | 1-Bromopropane | 54.5 | 44 | Ethyl acetate | 77.1 | 45 | Thiophene | 59.6 |
| 85.5 | 2-Bromopropane | 49.0 | 65 | Ethyl butyl ether | 62.6 | 31 | Toluene | 63.8 |
| 88 | cis-1-Bromopropene | 48 | 79 | Ethylene dichloride | 59.5 | 78.3 | 1, 1, 1-Trichloroethane | 56.0 |
| 85 | trans-1-Bromopropene | 50.8 | 84 | Ethylene sulfide | 47.0 | 3 | 1, 1, 2-Trichloroethane | 64.5 |
| 89 | 2-Bromopropene | 42.7 | 43 | Ethyl formate | 51.0 | 62 | Trichloroethylene | 59.3 |
| 79.5 | 3-Bromopropene | 54.0 | 76 | Ethyl nitrate | 61.8 | 47 | 2, 2, 4-Trimethylpentane | 59.4 |
| 30 | 2-Butanone | 63.5 | 38 | Ethyl propyl ether | 55.5 | METHANOL FORMS TERNARY AZEOTROPES WITH: | | |
| 64.6 | Butyl methyl ether | 56.3 | 68 | Ethyl sulfide | 61.2 | % | B.P. of Azeotrope °C. | |
| 86 | Carbon disulfide | 37.7 | 93 | Fluorobenzene | 59.7 | 43.5 | Acetone | |
| 79.4 | Carbon tetrachloride | 55.7 | 48.5 | Furan | 30.5 | 40.5 | Cyclohexane | 51.1 |
| 71.5 | 1-Chlorobutane | 57.2 | 83 | n-Heptane | 59.1 | 5.8 | Acetone | |
| 80 | 2-Chlorobutane | 52.7 | 50 | Iodoethane | 55.0 | 76.8 | Methyl acetate | 53.7 |
| 87 | Chloroform | 53.5 | 62 | 1-Iodopropane | 63.1 | 40 | Carbon disulfide | |
| 43 | 1-Chloro-3-methylbutane | 62.0 | 38 | 2-Iodopropane | 61.0 | 50 | Bromoethane | 33.9 |
| 65 | Chloromethyl methyl ether | 56.0 | 60 | 3-Iodopropene | 63.5 | 55 | Carbon disulfide | |
| 77 | 1-Chloro-2-methylpropane | 53.1 | 20 | Isobutyraldehyde | 62.7 | 38 | Methylal | 35.6 |
| 90 | 2-Chloro-2-methylpropane | 43.8 | 67 | Isopropyl acetate | 64.5 | 47 | Chloroform | 47.0 |
| 90 | 1-Chloropropane | 40.6 | 92.1 | Isopropyl formate | 57.2 | 30 | Acetone | |
| 94 | 2-Chloropropane | 33.4 | 80.5 | Methylal | 41.8 | 57.2 | Methyl acetate | |
| 97 | 2-Chloropropene | 22.0 | 46 | Methyl acetate | 54.0 | 46.5 | Carbon disulfide | 37.0 |
| 90 | 3-Chloropropene | 39.9 | 68 | Methyl acrylate | 62.5 | 48.6 | Methyl acetate | |
| 61.2 | 1, 3-Cyclohexadiene | 56.4 | 93 | Methyl borate | 54.6 | 33.6 | Cyclohexane | 50.8 |
| 57.5 | 1, 4-Cyclohexadiene | 58.0 | 97 | 2-Methyl-2-butene | 31.8 | 27 | Methyl acetate | |
| 60 | Cyclohexane | 55.9 | 85 | 3-Methyl-1-butene | 19.8 | 59 | Hexane | 45.0 |
| 86 | Cyclopentane | 38.8 | 30 | Methyl tert-butyl ether | 51.6 | 5.3 | Water | |
| 18 | 1, 1-Dibromoethane | 64.2 | 46 | Methyl carbonate | 62.7 | 13.5 | Methyl chloroacetate | 67.9 |
| 38 | trans-1, 2-Dibromoethylene | 64.1 | 68 | Methylcyclohexane | 59.2 | | | |
| 50 | 2, 3-Dichloro-1, 3-butadiene | 61.5 | 65 | Methylcyclopentane | 51.3 | | | |
| | | | | Methylcyclopentene | 53.0 | | | |

ETHYL ALCOHOL

Table 6.19: Physical Properties of Anhydrous Ethyl Alcohol (31)

| | | | |
|--------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------|------------------------------------------------------------------------------------------------------|
| Acidity as acetic acid | 0.0015% by wt. max. | Latent heat of fusion | 24.9 cal/g |
| Boiling point at 760 mm Hg | 78.32°C | Latent heat of vaporization at 78.3°C | 204.3 cal/g |
| dt/dp at 760 mm Hg | 0.0334°C/mm Hg | MAC | 1000 ppm in air |
| Coefficient of cubical expansion | 0.00060 per 1°F | Melting point | -114.4°C |
| Color, Pt-Co scale | 10 max. | Molecular weight | 46.07 |
| Critical pressure | 63.1 atm | Non-volatile matter | Not more than 0.0025 gram when 100 ml are evaporated and heated to constant weight at 100°C to 110°C |
| Critical temperature | 243.1°C | Reducing substances | At least 25 minutes permanganate time at 15°C |
| Density at 25°C | 0.7851 g/ml | Refractive index at 25°C, n _D | 1.3596 |
| Dielectric constant at 20°C | 25.7 | Specific gravity at 15.56°C (60/60°F) | 0.7937 |
| Dipole moment, μ x 10 ¹⁸ | 1.70 μ | Specific heat at 20°C | 0.61 cal/g |
| Electrical conductivity at 25°C | 1.35 x 10 ⁻⁹ ohm ⁻¹ cm ⁻¹ | Specific tension at 25°C | 22.1 dynes/cm |
| Explosive range | 3.28 - 19% | Thermal conductivity, k, at 68°F | 0.105 (Btu) (ft) (sq ft) (°F) |
| Fire hazard | Dangerous when exposed to heat or flame | Toxicity | Moderately toxic by ingestion and inhalation |
| Flash point, Tag open cup | 61°F | Vapor pressure at 20°C | 44.0 mm Hg |
| Free energy of formation, ΔF° at 25°C | -40.2 kcal/mole | Viscosity at 20°C | 1.22 centipoises |
| Freezing point | -114.1°C | Weight per gallon at 20°C | 6.61 lbs |
| Heat capacity, Cp, Liquid at 25°C | 0.581 cal/g | | |
| Cp, Vapor, 90°C, 1 atm | 0.406 cal/(g) (°C) | | |
| Cv, Vapor, 90°C, 1 atm | 0.359 cal/(g) (°C) | | |
| Heat of combustion | 328 kcal/mole | | |
| Heat of formation, Liquid, ΔH at 25°C | -64.7 kcal/mole | | |
| Heat of solution in Water at 13°C | 2.54 kcal/mole solute | | |
| Heat of solution of Water in Ethyl Alcohol, mole fraction of Water | | | |
| 0.640 at 77°C | -0.018 | | |
| 0.843 at 79.2°C | -0.038 | | |

Table 6.20: Physical Properties of 95% Ethanol (31)

| | |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Acidity as acetic acid | 0.0025 g/100 ml, max. |
| Color, Pt-Co scale | 10 max. |
| Distillation range at 760 mm Hg | 77°C - 90°C |
| Non-volatile matter | Not more than 0.0025 gram when 100 ml are evaporated and heated to constant weight at 100°C to 110°C |
| Permanganate time | 30 minutes, min. |
| Reducing substances | At least 25 minutes permanganate time at 15°C |
| Relative evaporation rate, n-Butyl Acetate = 100 | 230 |
| Specific gravity at 15.56 (60/60°F) | 0.8160 |
| Weight per gallon at 20°C | 6.76 lbs |

Table 6.21: Properties and Specifications of Ethyl Alcohol (30)

| Specifications | Units | 190° | 200° | Test Method |
|--------------------------------------------|-------------------------|--------|--------|--------------------|
| Ethyl Alcohol, minimum strength | vol % | 95 | 99.9 | IRS Gauging Manual |
| Acidity as Acetic Acid, maximum | g/100 ml | 0.0025 | 0.0025 | ASTM D 1613 |
| Non-Volatile Matter, maximum | g/100 ml | 0.0025 | 0.0025 | ASTM D 1353 |
| Permanganate Time, minimum | minutes | 50 | 30 | Quantum test |
| Specific Gravity @ 60°F (15.56°C), maximum | | 0.816 | 0.794 | ASTM D 891 |
| Color, maximum | Pt-Co | 10 | 10 | ASTM D 1209 |
| Odor | Free from foreign odors | | | Organoleptic |


| Typical Properties | Units | 190° | 200° |
|--------------------------------------|-------|----------------------------|---------|
| Boiling Point | °C | 78.3 | 78.4 |
| | °F | 172.9 | 173.1 |
| Coefficient of Expansion | | | |
| Per °C | | 0.0011 | 0.0011 |
| Per °F | | 0.00062 | 0.00062 |
| Flash Point | | | |
| ASTM D 1310 | °C | 21 | 18 |
| (Tag Open Cup) | °F | 69 | 65 |
| ASTM D 56 | °C | 17 | 14 |
| (Tag Closed Cup) | °F | 62 | 57 |
| Weight per Gallon @ 60 °F (15.56 °C) | lbs | 6.794 | 6.610 |
| Water Solubility | | soluble in all proportions | |

Table 6.22: Conversion Table—Weight and Volume Percent of Ethyl Alcohol in Ethyl Alcohol–Water Mixtures (30)

| % Alcohol By Volume at 60°F | % to be Converted | % Alcohol By Weight | % Alcohol By Volume at 60°F | % to be Converted | % Alcohol By Weight | % Alcohol By Volume at 60°F | % to be Converted | % Alcohol By Weight | % Alcohol By Volume at 60°F | % to be Converted | % Alcohol By Weight |
|-----------------------------|-------------------|---------------------|-----------------------------|-------------------|---------------------|-----------------------------|-------------------|---------------------|-----------------------------|-------------------|---------------------|
| 1.257 | 1 | 0.795 | 31.555 | 26 | 21.285 | 58.844 | 51 | 43.428 | 82.121 | 76 | 68.982 |
| 2.510 | 2 | 1.593 | 32.719 | 27 | 22.127 | 59.852 | 52 | 44.374 | 82.967 | 77 | 70.102 |
| 3.758 | 3 | 2.392 | 33.879 | 28 | 22.973 | 60.854 | 53 | 45.326 | 83.805 | 78 | 71.234 |
| 5.002 | 4 | 3.194 | 35.033 | 29 | 23.820 | 61.850 | 54 | 46.283 | 84.636 | 79 | 72.375 |
| 6.243 | 5 | 3.998 | 36.181 | 30 | 24.670 | 62.837 | 55 | 47.245 | 85.459 | 80 | 73.526 |
| 7.479 | 6 | 4.804 | 37.323 | 31 | 25.524 | 63.820 | 56 | 48.214 | 86.275 | 81 | 74.686 |
| 8.712 | 7 | 5.612 | 38.459 | 32 | 26.382 | 64.798 | 57 | 49.187 | 87.083 | 82 | 75.858 |
| 9.943 | 8 | 6.422 | 39.590 | 33 | 27.242 | 65.768 | 58 | 50.167 | 87.885 | 83 | 77.039 |
| 11.169 | 9 | 7.234 | 40.716 | 34 | 28.104 | 66.732 | 59 | 51.154 | 88.678 | 84 | 78.233 |
| 12.393 | 10 | 8.047 | 41.832 | 35 | 28.971 | 67.690 | 60 | 52.147 | 89.464 | 85 | 79.441 |
| 13.613 | 11 | 8.862 | 42.944 | 36 | 29.842 | 68.641 | 61 | 53.146 | 90.240 | 86 | 80.662 |
| 14.832 | 12 | 9.679 | 44.050 | 37 | 30.717 | 69.586 | 62 | 54.152 | 91.008 | 87 | 81.897 |
| 16.047 | 13 | 10.497 | 45.149 | 38 | 31.596 | 70.523 | 63 | 55.165 | 91.766 | 88 | 83.144 |
| 17.259 | 14 | 11.317 | 46.242 | 39 | 32.478 | 71.455 | 64 | 56.184 | 92.517 | 89 | 84.408 |
| 18.469 | 15 | 12.138 | 47.328 | 40 | 33.364 | 72.380 | 65 | 57.208 | 93.254 | 90 | 85.689 |
| 19.676 | 16 | 12.961 | 48.407 | 41 | 34.254 | 73.299 | 66 | 58.241 | 93.982 | 91 | 86.989 |
| 20.880 | 17 | 13.786 | 49.480 | 42 | 35.150 | 74.211 | 67 | 59.279 | 94.700 | 92 | 88.310 |
| 22.081 | 18 | 14.612 | 50.545 | 43 | 36.050 | 75.117 | 68 | 60.325 | 95.407 | 93 | 89.652 |
| 23.278 | 19 | 15.440 | 51.605 | 44 | 36.955 | 76.016 | 69 | 61.379 | 96.103 | 94 | 91.025 |
| 24.472 | 20 | 16.269 | 52.658 | 45 | 37.865 | 76.909 | 70 | 62.441 | 96.787 | 95 | 92.423 |
| 25.662 | 21 | 17.100 | 53.705 | 46 | 38.778 | 77.794 | 71 | 63.511 | 97.459 | 96 | 93.851 |
| 26.849 | 22 | 17.933 | 54.746 | 47 | 39.697 | 78.672 | 72 | 64.588 | 98.117 | 97 | 95.315 |
| 28.032 | 23 | 18.768 | 55.780 | 48 | 40.622 | 79.544 | 73 | 65.674 | 98.759 | 98 | 96.820 |
| 29.210 | 24 | 19.604 | 56.808 | 49 | 41.551 | 80.410 | 74 | 66.768 | 99.386 | 99 | 98.381 |
| 30.388 | 25 | 20.443 | 57.830 | 50 | 42.487 | 81.269 | 75 | 67.870 | 100.000 | 100 | 100.000 |


Values from Tables 5 and 6, Bureau of Standards Circular No. 19

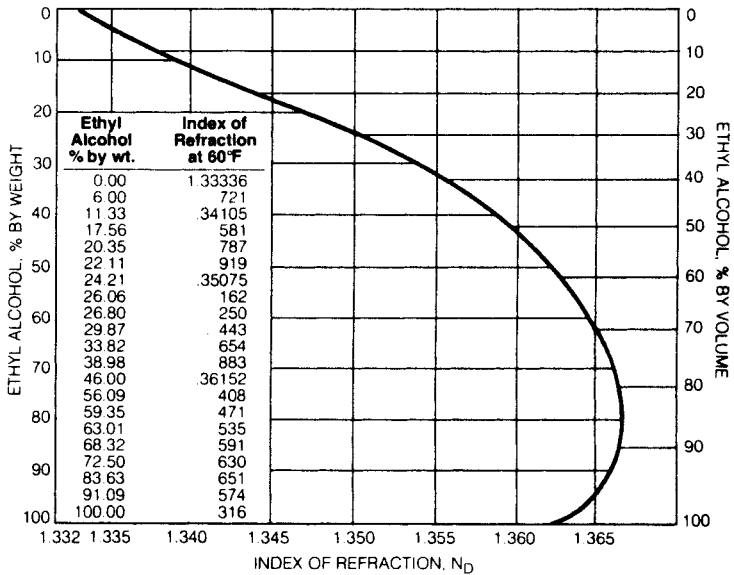Table 6.23: Index of Refraction of Ethyl Alcohol–Water Mixtures at 60°F (30)



Data from International Critical Tables

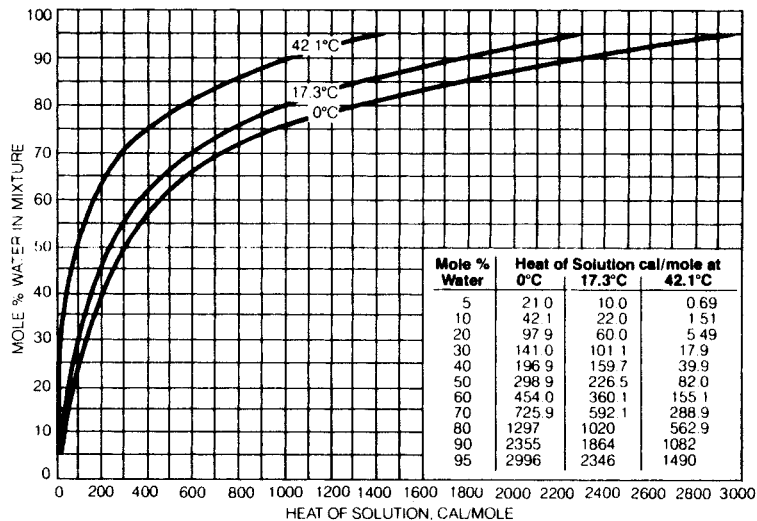Table 6.24: Heat of Solution of Ethyl Alcohol in Water (30)



Data from International Critical Tables
 BTU/lb mole = 1.8 cal/g mole

Table 6.25: Resultant Volume When Ethyl Alcohol and Water are Mixed (30)



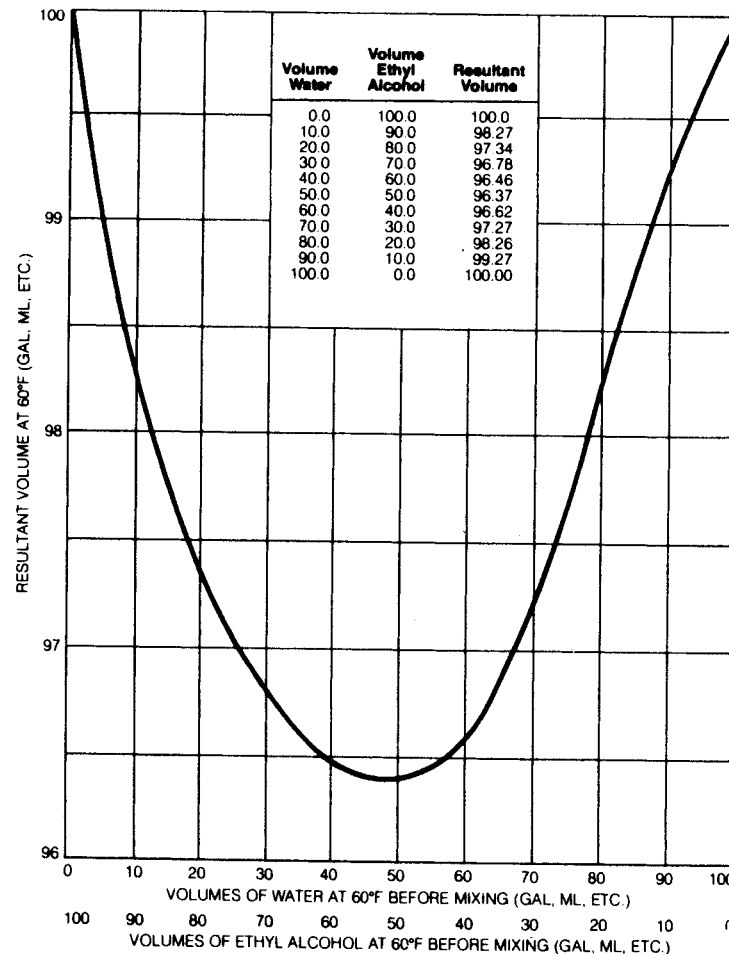


Table 6.26: Boiling Points of Ethyl Alcohol-Water Solutions (34)

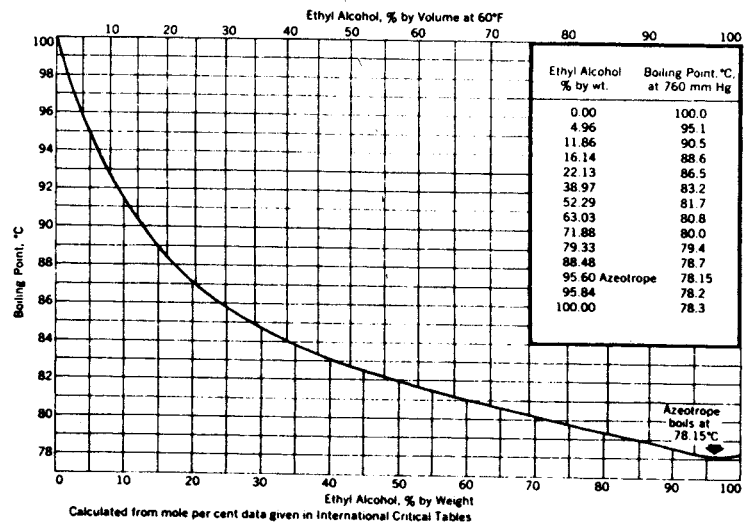


Ibert Mellan, 'Industrial Solvents Handbook', 2nd Edition, Noyes Data Corporation (1977)

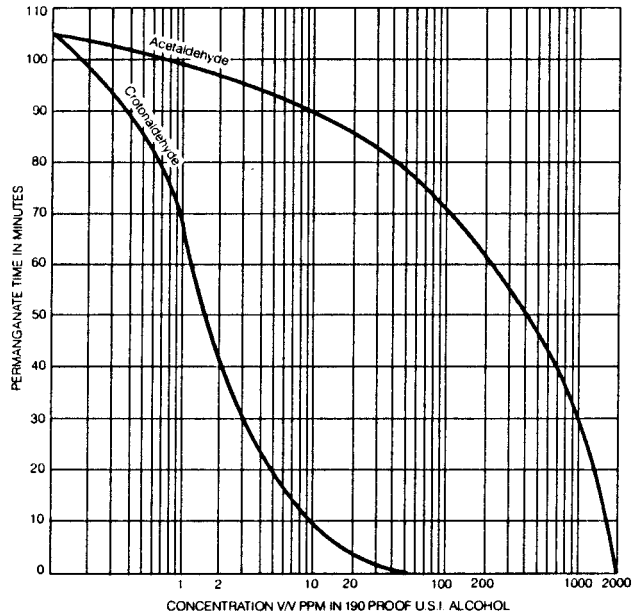Table 6.27: Permanganate Time Test (30)




Ref. U.S. Industrial Chemicals Company, Tuscola, IL.

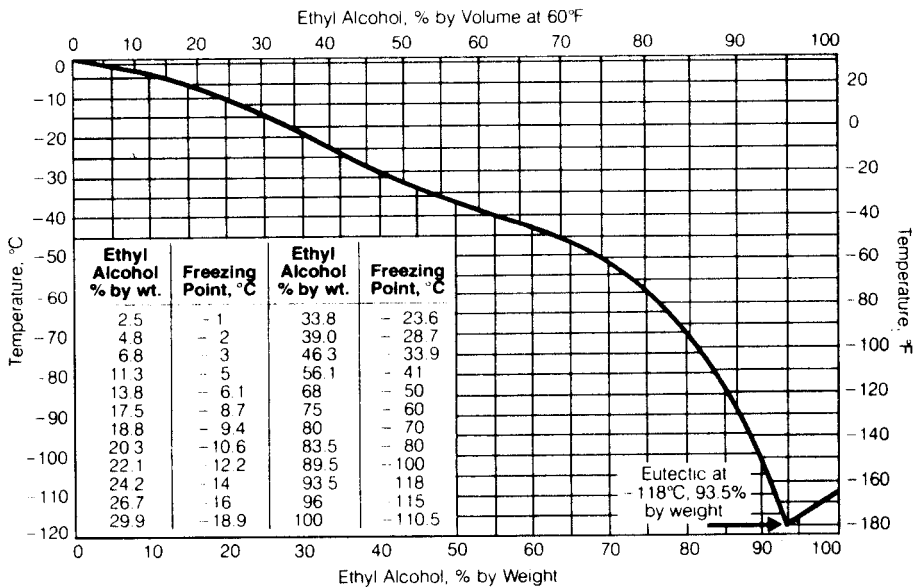Table 6.28: Freezing Points of Ethyl Alcohol-Water Mixtures (30)



Robert Mellan, 'Industrial Solvents Handbook', 2nd Ed., Noyes Data Corporation (1977)

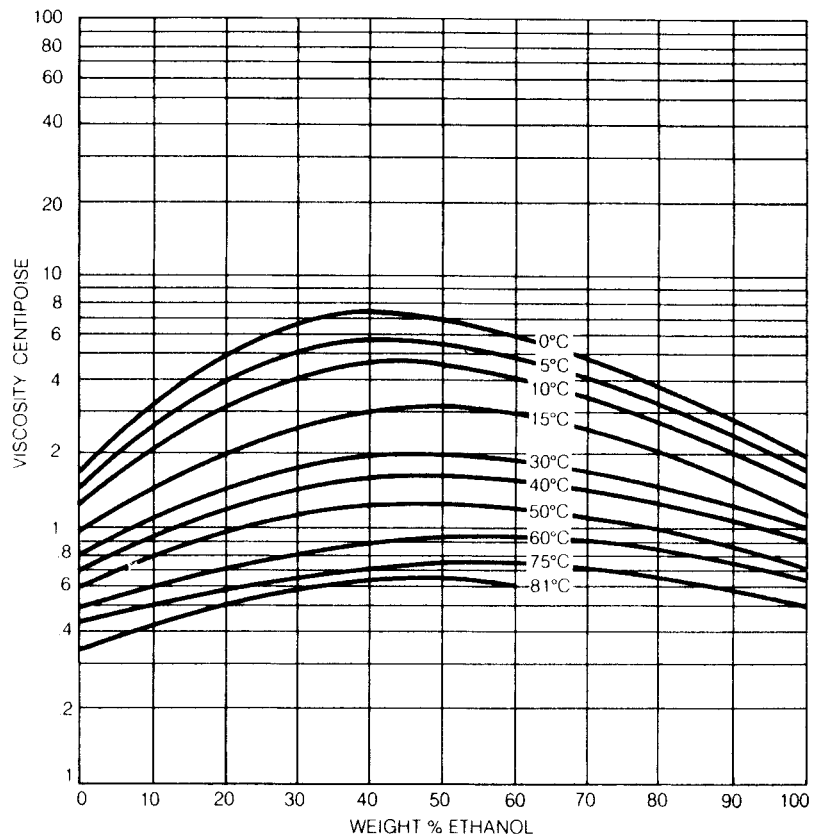Table 6.29: Viscosity of Ethyl Alcohol-Water Mixtures (30)



National Bureau of Standards Bulletin, 14 (1918), 59
 U.S. Industrial Chemical Company, Tuscola, Illinois

(Alcohol % by Weight in Water)

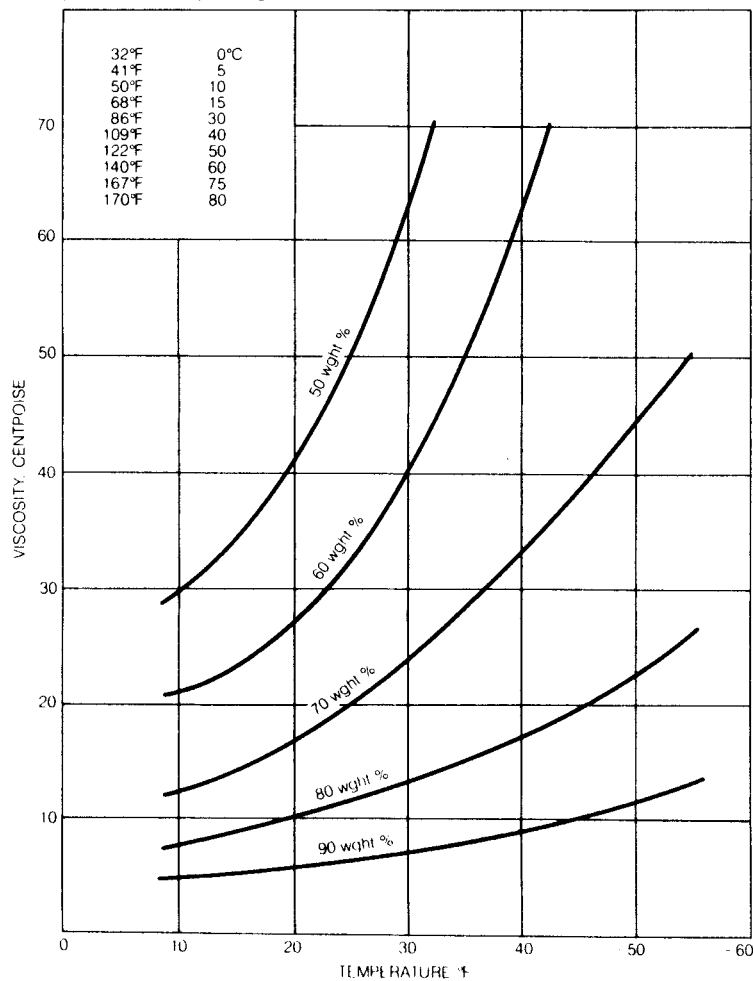


Table 6.30: Flash Point of Aqueous Ethyl Alcohol Solutions °C and °F vs Vol % Ethanol (30)



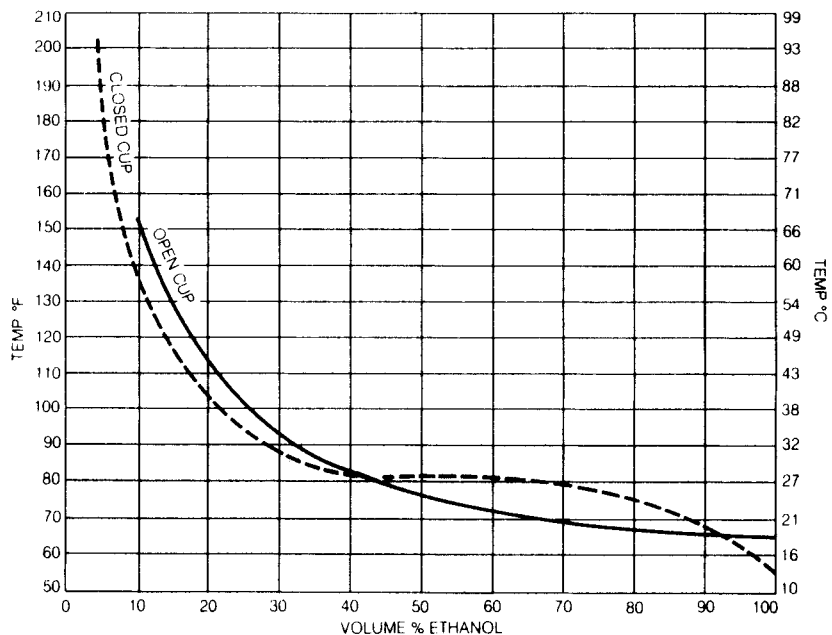


Table 6.31: Specific Heat of Aqueous Solutions of Ethanol (30)

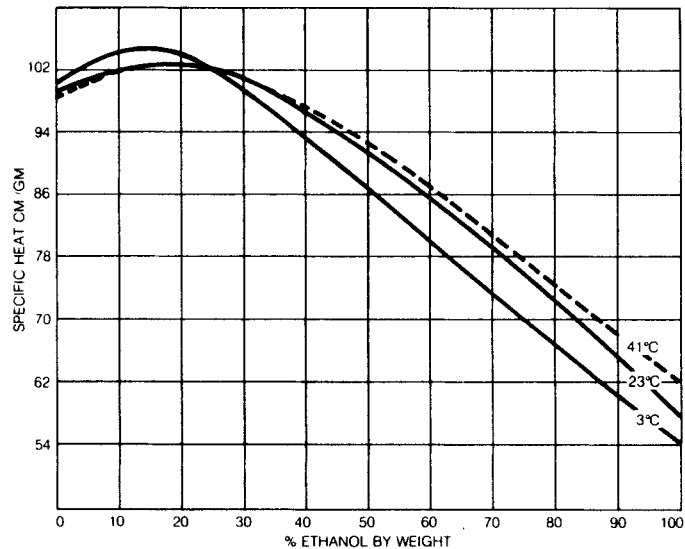

Ibert Mellan, 'Industrial Solvents', 2nd Edition, Reinhold Publishing Corp. (1950)

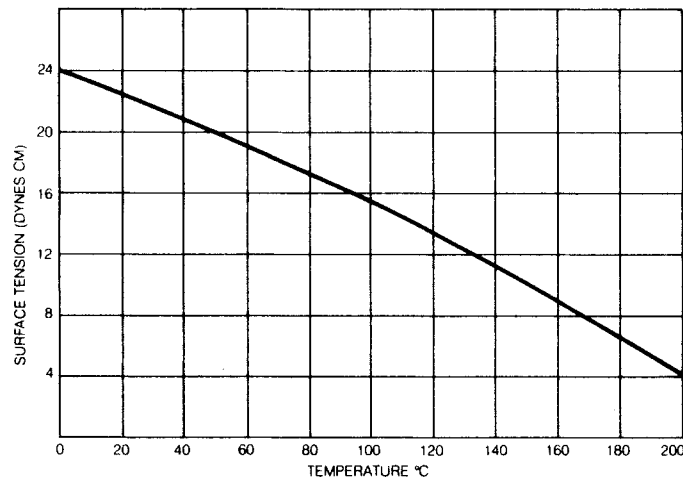Table 6.32: Surface Tension of Pure Ethanol at Various Temperatures (30)



Ibert Mellan, 'Industrial Solvents', 2nd Edition, Reinhold Publishing Corp. (1950)

Table 6.33: Latent Heat of Vaporization of Ethyl Alcohol (34)

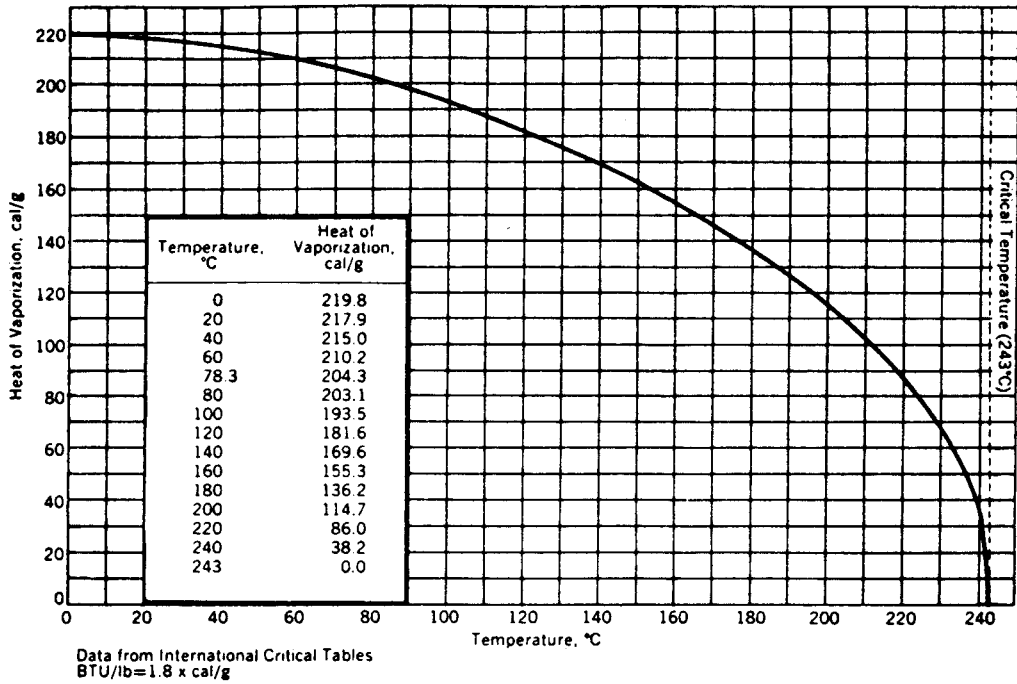


Table 6.34: Heat Capacity of Ethyl Alcohol at Various Temperatures (30)

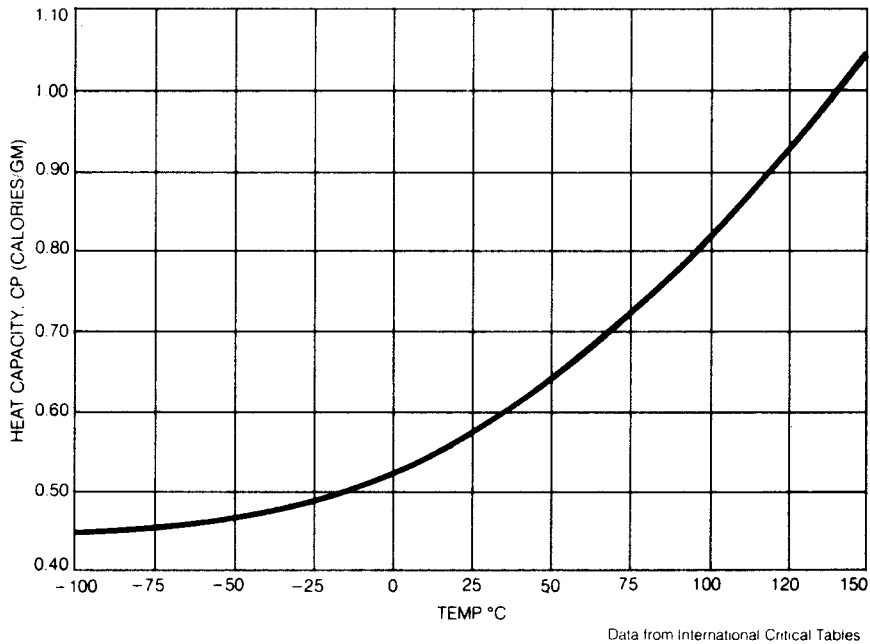


Table 6.35: Volumetric Equivalents (30)

The following table will be helpful in the preparation of reports showing disposition of 190 proof and anhydrous (200 proof) tax-free and specially denatured alcohol.

| Fluid Ounces | Milliliters | Wine Gallons | Proof Gallons | |
|---------------------|-------------|--------------|---------------|-----------|
| | | | 190 proof | 200 proof |
| 1 | 30. | 0.008 | 0.015 | 0.016 |
| 2 | 59. | .016 | .030 | .031 |
| 3 | 89. | .023 | .045 | .047 |
| 4 | 118. | .031 | .059 | .062 |
| 5 | 148. | .039 | .074 | .078 |
| 6 | 177. | .047 | .088 | .094 |
| 7 | 207. | .055 | .103 | .109 |
| 8 | 237. | .063 | .119 | .125 |
| 9 | 266. | .070 | .134 | .140 |
| 10 | 296. | .078 | .149 | .156 |
| 11 | 325. | .086 | .164 | .172 |
| 12 | 355. | .094 | .179 | .187 |
| 13 | 385. | .102 | .194 | .203 |
| 14 | 414. | .109 | .209 | .218 |
| 15 | 444. | .117 | .224 | .234 |
| 16 (1 pint) | 473. | .125 | .238 | .250 |
| 32 (1 quart) | 946. | .250 | .475 | .500 |
| 64 (2 quarts) | 1892 | .500 | .950 | 1.000 |
| 96 | 2839 | .750 | 1.425 | 1.500 |
| 128 (1 U.S. gallon) | 3785 | 1.000 | 1.900 | 2.000 |
| | | 5.000 | 9.500 | 10.000 |
| | | 30.000 | 57.000 | 60.000 |
| | | 54.000 | 102.600 | 108.000 |
| | | 55.000 | 104.500 | 110.000 |

Table 6.36: Ethyl Alcohol-Water Mixtures (30)

Corresponding values for proof, parts by volume of water and alcohol, weight % alcohol and specific gravity in air.

| U.S. PROOF degrees at 60°F | PARTS BY VOLUME* OF | | WEIGHT % ETHYL ALCOHOL | SPECIFIC GRAVITY | | |
|----------------------------------|---------------------|---------------|------------------------------|---------------------------------|---------------------------|---------------------------|
| | WATER | ETHYL ALCOHOL | | at 60°/60°F (15.56°/15.56°C) | at 68°/68°F (20°/20°C) | at 77°/77°F (25°/25°C) |
| 0 | 100.00 | 0.0 | 0.00 | 1.0000 | 1.0000 | 1.0000 |
| 1 | 99.53 | 0.5 | 0.40 | .9992 | .9992 | .9992 |
| 2 | 99.06 | 1.0 | 0.80 | .9985 | .9985 | .9985 |
| 3 | 98.58 | 1.5 | 1.19 | .9978 | .9978 | .9978 |
| 4 | 98.12 | 2.0 | 1.59 | .9970 | .9970 | .9970 |
| 5 | 97.65 | 2.5 | 1.99 | .9963 | .9963 | .9963 |

*The parts by volume of water and the parts by volume of ethyl alcohol do not add to unity (100) at any one proof reading, because of the shrinkage in volume which occurs when ethyl alcohol and water are mixed. The parts by volume of ethyl alcohol are the same as percent by volume of ethyl alcohol used to determine proof for tax purposes. Ethyl alcohol proof, by legal definition, is twice the percent by volume.

(continued)

Table 6.36: (continued)

| U.S. PROOF degrees at 60°F | PARTS BY VOLUME* OF | | WEIGHT % ETHYL ALCOHOL | SPECIFIC GRAVITY | | |
|----------------------------------|---------------------|---------------|------------------------------|---------------------------------|---------------------------|---------------------------|
| | WATER | ETHYL ALCOHOL | | at 60°/60°F (15.56°/15.56°C) | at 68°/68°F (20°/20°C) | at 77°/77°F (25°/25°C) |
| 6 | 97.18 | 3.0 | 2.39 | .9956 | .9956 | .9956 |
| 7 | 96.71 | 3.5 | 2.79 | .9949 | .9949 | .9948 |
| 8 | 96.24 | 4.0 | 3.19 | .9942 | .9942 | .9941 |
| 9 | 95.78 | 4.5 | 3.60 | .9935 | .9935 | .9934 |
| 10 | 95.31 | 5.0 | 4.00 | .9928 | .9928 | .9927 |
| 11 | 94.85 | 5.5 | 4.40 | .9921 | .9921 | .9921 |
| 12 | 94.39 | 6.0 | 4.80 | .9915 | .9914 | .9914 |
| 13 | 93.93 | 6.5 | 5.21 | .9908 | .9908 | .9907 |
| 14 | 93.46 | 7.0 | 5.61 | .9902 | .9902 | .9901 |
| 15 | 93.01 | 7.5 | 6.02 | .9896 | .9895 | .9894 |
| 16 | 92.55 | 8.0 | 6.42 | .9890 | .9889 | .9888 |
| 17 | 92.09 | 8.5 | 6.83 | .9884 | .9883 | .9882 |
| 18 | 91.63 | 9.0 | 7.23 | .9878 | .9876 | .9875 |
| 19 | 91.18 | 9.5 | 7.64 | .9872 | .9870 | .9869 |
| 20 | 90.72 | 10.0 | 8.05 | .9866 | .9864 | .9863 |
| 21 | 90.27 | 10.5 | 8.46 | .9860 | .9858 | .9856 |
| 22 | 89.81 | 11.0 | 8.86 | .9854 | .9852 | .9850 |
| 23 | 89.36 | 11.5 | 9.27 | .9848 | .9846 | .9844 |
| 24 | 88.90 | 12.0 | 9.68 | .9843 | .9840 | .9838 |
| 25 | 88.45 | 12.5 | 10.09 | .9837 | .9835 | .9832 |
| 26 | 88.00 | 13.0 | 10.50 | .9832 | .9829 | .9826 |
| 27 | 87.55 | 13.5 | 10.91 | .9826 | .9823 | .9820 |
| 28 | 87.10 | 14.0 | 11.32 | .9821 | .9817 | .9814 |
| 29 | 86.65 | 14.5 | 11.73 | .9816 | .9812 | .9808 |
| 30 | 86.20 | 15.0 | 12.14 | .9810 | .9806 | .9802 |
| 31 | 85.75 | 15.5 | 12.55 | .9805 | .9801 | .9796 |
| 32 | 85.30 | 16.0 | 12.96 | .9800 | .9797 | .9790 |
| 33 | 84.85 | 16.5 | 13.37 | .9794 | .9790 | .9784 |
| 34 | 84.40 | 17.0 | 13.79 | .9789 | .9784 | .9778 |
| 35 | 83.95 | 17.5 | 14.20 | .9784 | .9779 | .9773 |
| 36 | 83.50 | 18.0 | 14.61 | .9779 | .9773 | .9767 |
| 37 | 83.06 | 18.5 | 15.03 | .9774 | .9768 | .9761 |
| 38 | 82.61 | 19.0 | 15.44 | .9769 | .9763 | .9756 |
| 39 | 82.16 | 19.5 | 15.85 | .9764 | .9757 | .9750 |
| 40 | 81.72 | 20.0 | 16.27 | .9759 | .9752 | .9744 |
| 41 | 81.27 | 20.5 | 16.68 | .9754 | .9747 | .9739 |
| 42 | 80.82 | 21.0 | 17.10 | .9749 | .9741 | .9733 |
| 43 | 80.38 | 21.5 | 17.52 | .9744 | .9736 | .9727 |
| 44 | 79.93 | 22.0 | 17.93 | .9739 | .9731 | .9721 |

*The parts by volume of water and the parts by volume of ethyl alcohol do not add to unity (100) at any one proof reading, because of the shrinkage in volume which occurs when ethyl alcohol and water are mixed. The *parts by volume* of ethyl alcohol are the same as *percent by volume* of ethyl alcohol used to determine proof for tax purposes. Ethyl alcohol proof, by legal definition, is twice the percent by volume.

(continued)

Table 6.36: (continued)

| U.S. PROOF degrees at 60°F | PARTS BY VOLUME* OF | | WEIGHT % ETHYL ALCOHOL | SPECIFIC GRAVITY | | |
|----------------------------------|---------------------|---------------|------------------------------|---------------------------------|---------------------------|---------------------------|
| | WATER | ETHYL ALCOHOL | | at 60°/60°F (15.56°/15.56°C) | at 68°/68°F (20°/20°C) | at 77°/77°F (25°/25°C) |
| 45 | 79.48 | 22.5 | 18.35 | .9734 | .9725 | .9715 |
| 46 | 79.03 | 23.0 | 18.77 | .9729 | .9720 | .9710 |
| 47 | 78.58 | 23.5 | 19.19 | .9724 | .9714 | .9704 |
| 48 | 78.14 | 24.0 | 19.60 | .9718 | .9708 | .9698 |
| 49 | 77.69 | 24.5 | 20.02 | .9713 | .9703 | .9692 |
| 50 | 77.24 | 25.0 | 20.44 | .9708 | .9697 | .9686 |
| 51 | 76.79 | 25.5 | 20.86 | .9703 | .9691 | .9679 |
| 52 | 76.34 | 26.0 | 21.28 | .9697 | .9686 | .9673 |
| 53 | 75.89 | 26.5 | 21.71 | .9692 | .9680 | .9667 |
| 54 | 75.44 | 27.0 | 22.13 | .9687 | .9674 | .9661 |
| 55 | 74.98 | 27.5 | 22.55 | .9681 | .9668 | .9654 |
| 56 | 74.53 | 28.0 | 22.97 | .9676 | .9662 | .9648 |
| 57 | 74.08 | 28.5 | 23.40 | .9670 | .9656 | .9642 |
| 58 | 73.62 | 29.0 | 23.82 | .9664 | .9650 | .9635 |
| 59 | 73.17 | 29.5 | 24.24 | .9659 | .9644 | .9629 |
| 60 | 72.72 | 30.0 | 24.67 | .9653 | .9638 | .9622 |
| 61 | 72.26 | 30.5 | 25.10 | .9647 | .9632 | .9616 |
| 62 | 71.81 | 31.0 | 25.52 | .9641 | .9626 | .9609 |
| 63 | 71.35 | 31.5 | 25.95 | .9635 | .9619 | .9602 |
| 64 | 70.89 | 32.0 | 26.38 | .9629 | .9613 | .9595 |
| 65 | 70.43 | 32.5 | 26.81 | .9623 | .9606 | .9588 |
| 66 | 69.97 | 33.0 | 27.24 | .9616 | .9599 | .9581 |
| 67 | 69.51 | 33.5 | 27.67 | .9610 | .9593 | .9574 |
| 68 | 69.05 | 34.0 | 28.10 | .9604 | .9586 | .9567 |
| 69 | 68.59 | 34.5 | 28.54 | .9597 | .9579 | .9559 |
| 70 | 68.12 | 35.0 | 28.97 | .9590 | .9572 | .9552 |
| 71 | 67.66 | 35.5 | 29.41 | .9584 | .9565 | .9544 |
| 72 | 67.19 | 36.0 | 29.84 | .9576 | .9557 | .9537 |
| 73 | 66.72 | 36.5 | 30.28 | .9570 | .9550 | .9529 |
| 74 | 66.25 | 37.0 | 30.72 | .9562 | .9542 | .9521 |
| 75 | 65.78 | 37.5 | 31.16 | .9555 | .9535 | .9513 |
| 76 | 65.31 | 38.0 | 31.60 | .9548 | .9527 | .9505 |
| 77 | 64.84 | 38.5 | 32.04 | .9540 | .9519 | .9497 |
| 78 | 64.37 | 39.0 | 32.48 | .9533 | .9512 | .9489 |
| 79 | 63.90 | 39.5 | 32.92 | .9525 | .9504 | .9481 |
| 80 | 63.42 | 40.0 | 33.36 | .9517 | .9496 | .9473 |
| 81 | 62.95 | 40.5 | 33.81 | .9509 | .9488 | .9464 |
| 82 | 62.47 | 41.0 | 34.25 | .9501 | .9479 | .9456 |
| 83 | 61.99 | 41.5 | 34.70 | .9493 | .9471 | .9447 |

*The parts by volume of water and the parts by volume of ethyl alcohol do not add to unity (100) at any one proof reading, because of the shrinkage in volume which occurs when ethyl alcohol and water are mixed. The parts by volume of ethyl alcohol are the same as percent by volume of ethyl alcohol used to determine proof for tax purposes. Ethyl alcohol proof, by legal definition, is twice the percent by volume.

(continued)

Table 6.36: (continued)

| U.S. PROOF degrees at 60°F | PARTS BY VOLUME* OF | | WEIGHT % ETHYL ALCOHOL | SPECIFIC GRAVITY | | |
|----------------------------------|---------------------|---------------|------------------------------|---------------------------------|---------------------------|---------------------------|
| | WATER | ETHYL ALCOHOL | | at 60°/60°F (15.56°/15.56°C) | at 68°/68°F (20°/20°C) | at 77°/77°F (25°/25°C) |
| 84 | 61.52 | 42.0 | 35.15 | .9485 | .9463 | .9439 |
| 85 | 61.04 | 42.5 | 35.60 | .9477 | .9454 | .9430 |
| 86 | 60.56 | 43.0 | 36.05 | .9469 | .9446 | .9421 |
| 87 | 60.08 | 43.5 | 36.50 | .9460 | .9437 | .9412 |
| 88 | 59.59 | 44.0 | 36.96 | .9452 | .9428 | .9403 |
| 89 | 59.11 | 44.5 | 37.41 | .9443 | .9419 | .9394 |
| 90 | 58.63 | 45.0 | 37.86 | .9434 | .9410 | .9385 |
| 91 | 58.14 | 45.5 | 38.32 | .9426 | .9402 | .9376 |
| 92 | 57.66 | 46.0 | 38.78 | .9417 | .9292 | .9366 |
| 93 | 57.17 | 46.5 | 39.24 | .9408 | .9383 | .9357 |
| 94 | 56.68 | 47.0 | 39.70 | .9399 | .9374 | .9348 |
| 95 | 56.19 | 47.5 | 40.16 | .9389 | .9364 | .9338 |
| 96 | 55.70 | 48.0 | 40.62 | .9380 | .9355 | .9328 |
| 97 | 55.21 | 48.5 | 41.09 | .9371 | .9345 | .9319 |
| 98 | 54.72 | 49.0 | 41.55 | .9361 | .9336 | .9309 |
| 99 | 54.22 | 49.5 | 42.02 | .9352 | .9326 | .9299 |
| 100 | 53.73 | 50.0 | 42.49 | .9342 | .9316 | .9289 |
| 101 | 53.24 | 50.5 | 42.96 | .9332 | .9306 | .9279 |
| 102 | 52.74 | 51.0 | 43.43 | .9322 | .9296 | .9269 |
| 103 | 52.25 | 51.5 | 43.90 | .9312 | .9286 | .9258 |
| 104 | 51.75 | 52.0 | 44.37 | .9302 | .9276 | .9248 |
| 105 | 51.25 | 52.5 | 44.85 | .9292 | .9266 | .9238 |
| 106 | 50.75 | 53.0 | 45.33 | .9282 | .9256 | .9228 |
| 107 | 50.26 | 53.5 | 45.80 | .9272 | .9245 | .9217 |
| 108 | 49.76 | 54.0 | 46.28 | .9262 | .9235 | .9207 |
| 109 | 49.26 | 54.5 | 46.76 | .9252 | .9225 | .9196 |
| 110 | 48.76 | 55.0 | 47.24 | .9241 | .9214 | .9185 |
| 111 | 48.25 | 55.5 | 47.73 | .9230 | .9204 | .9175 |
| 112 | 47.75 | 56.0 | 48.21 | .9220 | .9193 | .9164 |
| 113 | 47.25 | 56.5 | 48.70 | .9210 | .9182 | .9153 |
| 114 | 46.75 | 57.0 | 49.19 | .9199 | .9171 | .9142 |
| 115 | 46.24 | 57.5 | 49.68 | .9188 | .9161 | .9131 |
| 116 | 45.74 | 58.0 | 50.17 | .9177 | .9150 | .9120 |
| 117 | 45.23 | 58.5 | 50.66 | .9166 | .9139 | .9109 |
| 118 | 44.72 | 59.0 | 51.15 | .9156 | .9128 | .9098 |
| 119 | 44.22 | 59.5 | 51.65 | .9144 | .9116 | .9087 |
| 120 | 43.71 | 60.0 | 52.15 | .9133 | .9105 | .9076 |
| 121 | 43.20 | 60.5 | 52.65 | .9122 | .9094 | .9064 |
| 122 | 42.69 | 61.0 | 53.15 | .9111 | .9083 | .9053 |

*The parts by volume of water and the parts by volume of ethyl alcohol do not add to unity (100) at any one proof reading, because of the shrinkage in volume which occurs when ethyl alcohol and water are mixed. The parts by volume of ethyl alcohol are the same as percent by volume of ethyl alcohol used to determine proof for tax purposes. Ethyl alcohol proof, by legal definition, is twice the percent by volume.

(continued)

Table 6.36: (continued)

| U.S. PROOF degrees at 60 F | PARTS BY VOLUME OF | | WEIGHT % ETHYL ALCOHOL | SPECIFIC GRAVITY | | |
|----------------------------------|--------------------|---------------|------------------------------|---------------------------------|---------------------------|---------------------------|
| | WATER | ETHYL ALCOHOL | | at 60°/60°F (15.56°/15.56°C) | at 68°/68°F (20°/20°C) | at 77°/77°F (25°/25°C) |
| 123 | 42.18 | 61.5 | 53.65 | .9100 | .9071 | .9041 |
| 124 | 41.67 | 62.0 | 54.15 | .9088 | .9060 | .9030 |
| 125 | 41.16 | 62.5 | 54.66 | .9077 | .9048 | .9018 |
| 126 | 40.65 | 63.0 | 55.16 | .9065 | .9037 | .9006 |
| 127 | 40.14 | 63.5 | 55.67 | .9054 | .9025 | .8995 |
| 128 | 39.62 | 64.0 | 56.18 | .9042 | .9014 | .8983 |
| 129 | 39.11 | 64.5 | 56.70 | .9031 | .9002 | .8971 |
| 130 | 38.60 | 65.0 | 57.21 | .9019 | .8990 | .8959 |
| 131 | 38.08 | 65.5 | 57.72 | .9007 | .8978 | .8948 |
| 132 | 37.57 | 66.0 | 58.24 | .8996 | .8966 | .8936 |
| 133 | 37.05 | 66.5 | 58.76 | .8984 | .8954 | .8924 |
| 134 | 36.54 | 67.0 | 59.28 | .8972 | .8942 | .8912 |
| 135 | 36.02 | 67.5 | 59.80 | .8960 | .8930 | .8899 |
| 136 | 35.50 | 68.0 | 60.32 | .8948 | .8918 | .8887 |
| 137 | 34.99 | 68.5 | 60.85 | .8936 | .8906 | .8875 |
| 138 | 34.47 | 69.0 | 61.38 | .8923 | .8894 | .8862 |
| 139 | 33.95 | 69.5 | 61.91 | .8911 | .8882 | .8850 |
| 140 | 33.43 | 70.0 | 62.44 | .8899 | .8869 | .8838 |
| 141 | 32.91 | 70.5 | 62.98 | .8886 | .8856 | .8825 |
| 142 | 32.38 | 71.0 | 63.51 | .8874 | .8844 | .8812 |
| 143 | 31.86 | 71.5 | 64.05 | .8861 | .8831 | .8800 |
| 144 | 31.34 | 72.0 | 64.59 | .8848 | .8819 | .8787 |
| 145 | 30.82 | 72.5 | 65.13 | .8836 | .8806 | .8774 |
| 146 | 30.29 | 73.0 | 65.67 | .8823 | .8793 | .8761 |
| 147 | 29.76 | 73.5 | 66.22 | .8810 | .8780 | .8748 |
| 148 | 29.24 | 74.0 | 66.77 | .8797 | .8767 | .8735 |
| 149 | 28.71 | 74.5 | 67.32 | .8784 | .8754 | .8722 |
| 150 | 28.19 | 75.0 | 67.87 | .8771 | .8741 | .8709 |
| 151 | 27.66 | 75.5 | 68.43 | .8758 | .8728 | .8696 |
| 152 | 27.13 | 76.0 | 68.98 | .8745 | .8715 | .8682 |
| 153 | 26.60 | 76.5 | 69.54 | .8732 | .8702 | .8669 |
| 154 | 26.07 | 77.0 | 70.10 | .8718 | .8688 | .8655 |
| 155 | 25.54 | 77.5 | 70.67 | .8705 | .8674 | .8642 |
| 156 | 25.01 | 78.0 | 71.23 | .8691 | .8661 | .8628 |
| 157 | 24.47 | 78.5 | 71.80 | .8678 | .8647 | .8614 |
| 158 | 23.94 | 79.0 | 72.38 | .8664 | .8633 | .8600 |
| 159 | 23.40 | 79.5 | 72.95 | .8650 | .8620 | .8586 |
| 160 | 22.87 | 80.0 | 73.53 | .8636 | .8606 | .8572 |
| 161 | 22.33 | 80.5 | 74.11 | .8622 | .8592 | .8558 |

*The parts by volume of water and the parts by volume of ethyl alcohol do not add to unity (100) at any one proof reading, because of the shrinkage in volume which occurs when ethyl alcohol and water are mixed. The parts by volume of ethyl alcohol are the same as percent by volume of ethyl alcohol used to determine proof for tax purposes. Ethyl alcohol proof, by legal definition, is twice the percent by volume.

(continued)

Table 6.36: (continued)

| U.S. PROOF degrees at 60°F | PARTS BY VOLUME* OF | | WEIGHT % ETHYL ALCOHOL | SPECIFIC GRAVITY | | |
|----------------------------------|---------------------|---------------|------------------------------|---------------------------------|---------------------------|---------------------------|
| | WATER | ETHYL ALCOHOL | | at 60°/60°F (15.56°/15.56°C) | at 68°/68°F (20°/20°C) | at 77°/77°F (25°/25°C) |
| 162 | 21.80 | 81.0 | 74.69 | .8608 | .8577 | .8544 |
| 163 | 21.26 | 81.5 | 75.27 | .8594 | .8563 | .8530 |
| 164 | 20.72 | 82.0 | 75.86 | .8580 | .8549 | .8516 |
| 165 | 20.18 | 82.5 | 76.45 | .8566 | .8535 | .8501 |
| 166 | 19.64 | 83.0 | 77.04 | .8552 | .8520 | .8487 |
| 167 | 19.10 | 83.5 | 77.64 | .8537 | .8506 | .8472 |
| 168 | 18.55 | 84.0 | 78.23 | .8522 | .8491 | .8458 |
| 169 | 18.01 | 84.5 | 78.84 | .8508 | .8476 | .8443 |
| 170 | 17.46 | 85.0 | 79.44 | .8493 | .8461 | .8428 |
| 171 | 16.92 | 85.5 | 80.05 | .8478 | .8446 | .8413 |
| 172 | 16.37 | 86.0 | 80.66 | .8462 | .8431 | .8398 |
| 173 | 15.82 | 86.5 | 81.28 | .8447 | .8416 | .8382 |
| 174 | 15.27 | 87.0 | 81.90 | .8432 | .8400 | .8367 |
| 175 | 14.72 | 87.5 | 82.52 | .8416 | .8385 | .8351 |
| 176 | 14.16 | 88.0 | 83.14 | .8401 | .8369 | .8335 |
| 177 | 13.61 | 88.5 | 83.78 | .8385 | .8353 | .8319 |
| 178 | 13.05 | 89.0 | 84.41 | .8369 | .8337 | .8303 |
| 179 | 12.49 | 89.5 | 85.05 | .8353 | .8321 | .8287 |
| 180 | 11.93 | 90.0 | 85.69 | .8336 | .8305 | .8271 |
| 181 | 11.37 | 90.5 | 86.34 | .8320 | .8288 | .8254 |
| 182 | 10.80 | 91.0 | 86.99 | .8303 | .8271 | .8237 |
| 183 | 10.24 | 91.5 | 87.65 | .8286 | .8254 | .8220 |
| 184 | 9.67 | 92.0 | 88.31 | .8268 | .8237 | .8203 |
| 185 | 9.09 | 92.5 | 88.98 | .8251 | .8219 | .8185 |
| 186 | 8.52 | 93.0 | 89.65 | .8233 | .8201 | .8167 |
| 187 | 7.94 | 93.5 | 90.34 | .8215 | .8183 | .8149 |
| 188 | 7.36 | 94.0 | 91.02 | .8196 | .8164 | .8130 |
| 189 | 6.77 | 94.5 | 91.72 | .8178 | .8146 | .8111 |
| 190 | 6.18 | 95.0 | 92.42 | .8158 | .8126 | .8092 |
| 191 | 5.59 | 95.5 | 93.14 | .8138 | .8107 | .8072 |
| 192 | 4.99 | 96.0 | 93.85 | .8118 | .8087 | .8052 |
| 193 | 4.39 | 96.5 | 94.58 | .8098 | .8066 | .8032 |
| 194 | 3.78 | 97.0 | 95.32 | .8077 | .8045 | .8011 |
| 195 | 3.17 | 97.5 | 96.07 | .8056 | .8024 | .7990 |
| 196 | 2.55 | 98.0 | 96.82 | .8033 | .8002 | .7968 |
| 197 | 1.93 | 98.5 | 97.60 | .8010 | .7978 | .7944 |
| 198 | 1.29 | 99.0 | 98.38 | .7987 | .7955 | .7921 |
| 199 | .65 | 99.5 | 99.19 | .7962 | .7930 | .7896 |
| 200 | .00 | 100.0 | 100.00 | .7936 | .7905 | .7871 |

U.S. Department of Commerce. STANDARD DENSITY AND VOLUMETRIC TABLES. CIRCULAR OF THE BUREAU OF STANDARDS NO. 19 (Washington: U.S. Government Printing Office, 1924) pp. 8, 9 & 18

U.S. Treasury Department. GAUGING MANUAL EMBRACING INSTRUCTIONS AND TABLES FOR DETERMINING THE QUANTITY OF DISTILLED SPIRITS BY PROOF AND WEIGHT (Washington: U.S. Government Printing Office, 1970).

Specific Gravity at 20°/20°C and 25°/25°C from Table 52.003. OFFICIAL METHODS OF ANALYSIS OF THE ASSOCIATION OF OFFICIAL ANALYTICAL CHEMISTS, Twelfth Edition, 1975.

*The parts by volume of water and the parts by volume of ethyl alcohol do not add to unity (100) at any one proof reading, because of the shrinkage in volume which occurs when ethyl alcohol and water are mixed. The parts by volume of ethyl alcohol are the same as percent by volume of ethyl alcohol used to determine proof for tax purposes. Ethyl alcohol proof, by legal definition, is twice the percent by volume.

Table 6.37: Specially Denatured Alcohols (30)

AUTHORIZED COMPOSITION:

| | SDA 1-1 ⁽¹⁾ | | SDA 1-2 ⁽²⁾ | | SDA 2B-1 | | Test Method |
|------------------------------------------------|------------------------|------------------|------------------------|--------------------|---------------|------------------|-----------------------|
| To every 100 gallons of alcohol add: | | | | | | | |
| Methyl Alcohol, gallons | 4 | | 4 | | — | | |
| Denatonium Benzoate, N.F. avdp. oz. | 1/8 | | — | | — | | |
| Methyl Isobutyl Ketone, gallons | — | | 1 | | — | | |
| Benzene, gallons | — | | — | | 0.5 | | |
| Rubber Hydrocarbon Solvent, gallons | — | | — | | — | | |
| Toluene, gallons | — | | — | | — | | |
| Metallic Sodium, pounds | — | | — | | — | | |
| FORMULATION: | 190° | Anhydrous | 190° | Anhydrous | 190° | Anhydrous | |
| | Min. Max. | Min. Max. | Min. Max. | Min. Max. | Min. Max. | Min. Max. | |
| SPECIFICATIONS: | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C (60°F/60°F) | 0.8144 0.8156 | 0.7934 0.7944 | 0.8142 0.8154 | 0.7934 0.7944 | 0.8154 0.8166 | 0.7939 0.7949 | ASTM D-891 |
| @ 20°C/20°C | 0.8113 0.8124 | 0.7902 0.7912 | 0.8111 0.8122 | 0.7902 0.7912 | 0.8122 0.8134 | 0.7908 0.7918 | |
| @ 25°C/25°C | 0.8078 0.8090 | 0.7868 0.7879 | 0.8076 0.8088 | 0.7868 0.7879 | 0.8088 0.8100 | 0.7874 0.7884 | |
| Acidity, wt/wt% as acetic acid | — 0.0025 | — 0.0025 | — 0.0025 | — 0.0025 | — 0.0025 | — 0.0025 | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | — 0.0025 | — 0.0025 | — 0.0025 | — 0.0025 | — 0.0025 | — 0.0025 | ASTM D-1353 |
| Color, Pt-Co | — 10 | — 10 | — 10 | — 10 | — 10 | — 10 | ASTM D-1209 |
| Water content, vol/vol % | — — | — 0.10 | — — | — 0.10 | — — | — 0.10 | ASTM D-1364 |
| Odor | Typical | | Typical | | Typical | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | |
| Apparent proof at 60°F | 190.4 | 199.9 | 190.5 | 199.9 | 189.9 | 199.7 | I.R.S. Gauging Manual |
| Composition wt/wt% | | | | | | | |
| Ethyl Alcohol | 88.95 | 96.14 | 88.12 | 95.22 | 91.92 | 99.45 | |
| Methyl Alcohol | 3.76 | 3.86 | 3.72 | 3.82 | — | — | |
| Denatonium Benzoate | 0.001 | 0.001 | — | — | — | — | |
| Methyl Isobutyl Ketone | — | — | 0.94 | 0.96 | — | — | |
| Benzene | — | — | — | — | 0.54 | 0.55 | |
| Rubber Hydrocarbon Solvent | — | — | — | — | — | — | |
| Toluene | — | — | — | — | — | — | |
| Metallic sodium | — | — | — | — | — | — | |
| Water | 7.29 | — | 7.22 | — | 7.54 | — | |
| Coefficient of expansion | | | | | | | |
| Per 1°C | 0.0010 | 0.0011 | 0.0010 | 0.0011 | 0.0010 | 0.0010 | |
| Per 1°F | 0.0006 | 0.0006 | 0.0006 | 0.0006 | 0.0006 | 0.0006 | |
| Flash point | | | | | | | |
| Tag closed cup | | | | | | | ASTM D-56 |
| C | 13 | 12 | 14 | 11 | 18 | 12 | |
| F | 56 | 53 | 58 | 52 | 64 | 54 | |
| Tag open cup | | | | | | | ASTM D-1310 |
| C | 23 | 22 | 18 | 16 | 18 | 16 | |
| F | 73 | 71 | 65 | 60 | 65 | 60 | |
| Pounds per gallon @ 60 F, per 27 CFR 212.115 | 6.788 | 6.612 | 6.788 | 6.611 ³ | 6.795 | 6.612 | |
| Shipping containers | | | | | | | |
| Tank cars | ✓ | | ✓ | | ✓ | | |
| Tank trucks | ✓ | | ✓ | | ✓ | | |
| Drums | ✓ | | ✓ | | ✓ | | |
| Pails | ✓ | | ✓ | | ✓ | | |

Comments:

- Wood alcohol is an authorized denaturant for SDA 1 (27 CFR 212.16) but it is of no present commercial importance.
- This formula must be used in a closed end continuous system unless it is shown that it is not practical to do so.
- Determined by U.S.I.
- 27 CFR 212.18 authorizes the use of one-half gallon rubber hydrocarbon solvent or toluene in lieu of benzene. Metallic sodium in excess of 33 pounds is also authorized. SDA 2C is only supplied in the anhydrous formulation. It must be used in a closed and continuous system unless it is shown that it is not practical to do so.

(continued)

Table 6.37: (continued)

AUTHORIZED COMPOSITION:

| | SDA 2B-2 ⁽²⁾ | | | | SDA 2B-3 ⁽²⁾ | | | | SDA 2C-1 ⁽⁴⁾ | | SDA 3A | | | | Test Method |
|---------------------------------------------|-------------------------|--------|----------------------|--------|-------------------------|--------|----------------------|--------|-------------------------|--------|----------|--------|-----------|--------|-----------------------|
| To every 100 gallons of alcohol add: | | | | | | | | | | | 5 | | | | |
| Methyl Alcohol, gallons | — | | | | — | | | | — | | — | | | | |
| Denatonium Benzoate, N.F. avdp. oz. | — | | | | — | | | | — | | — | | | | |
| Methyl Isobutyl Ketone, gallons | — | | | | — | | | | — | | — | | | | |
| Benzene, gallons | — | | | | — | | | | 0.5 | | — | | | | |
| Rubber Hydrocarbon Solvent, gallons | 0.5 | | | | — | | | | — | | — | | | | |
| Toluene, gallons | — | | | | 0.5 | | | | — | | — | | | | |
| Metallic Sodium, pounds | — | | | | — | | | | 33 | | — | | | | |
| FORMULATION: | 190° | | Anhydrous | | 190° | | Anhydrous | | Anhydrous | | 190° | | Anhydrous | | |
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | |
| SPECIFICATIONS: | | | | | | | | | | | | | | | |
| Specific gravity @ 15.56°C (60°F) 60°F | 0.8144 | 0.8156 | 0.7926 | 0.7936 | 0.8154 | 0.8166 | 0.7936 | 0.7946 | 0.8339 | 0.8372 | 0.8144 | 0.8156 | 0.7934 | 0.7944 | ASTM D-891 |
| @ 20°C (68°F) 20°C | 0.8113 | 0.8124 | 0.7895 | 0.7905 | 0.8122 | 0.8134 | 0.7905 | 0.7915 | 0.8308 | 0.8340 | 0.8113 | 0.8124 | 0.7902 | 0.7912 | |
| @ 25°C (77°F) 25°C | 0.8078 | 0.8090 | 0.7862 | 0.7871 | 0.8088 | 0.8100 | 0.7871 | 0.7882 | 0.8274 | 0.8306 | 0.8078 | 0.8090 | 0.7869 | 0.7879 | |
| Acidity, wt.% as acetic acid | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | ASTM D-1353 |
| Color, Pt-Co | — 10 | | — 10 | | — 10 | | — 10 | | — 10 | | — 10 | | — 10 | | ASTM D-1209 |
| Water content, vol/vol % | — | | 0.10 | | — | | 0.10 | | — | | — | | 0.10 | | ASTM D-1364 |
| Odor | Typical | | | | Typical | | | | Typical | | Typical | | | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | | | | | | | |
| Apparent proof at 60°F | 190.4 | | 200.2 | | 189.9 | | 199.8 | | 178.8 | | 190.4 | | 199.9 | | I.R.S. Gauging Manual |
| Composition wt./wt. % | | | | | | | | | | | | | | | |
| Ethyl Alcohol | 92.03 | | 99.56 | | 91.93 | | 99.45 | | | | 88.12 | | 95.22 | | |
| Methyl Alcohol | — | | — | | — | | — | | | | 4.65 | | 4.78 | | |
| Denatonium Benzoate | — | | — | | — | | — | | | | — | | — | | |
| Methyl Isobutyl Ketone | — | | — | | — | | — | | | | — | | — | | |
| Benzene | — | | — | | — | | — | | | | — | | — | | |
| Rubber Hydrocarbon Solvent | 0.42 | | 0.44 | | — | | — | | | | — | | — | | |
| Toluene | — | | — | | 0.53 | | 0.55 | | | | — | | — | | |
| Metallic sodium | — | | — | | — | | — | | | | — | | — | | |
| Water | 7.55 | | — | | 7.54 | | — | | | | 7.23 | | — | | |
| Coefficient of expansion | | | | | | | | | | | | | | | |
| Per 1°C | 0.0010 | | 0.0010 | | 0.0010 | | 0.0011 | | 0.0010 | | 0.0010 | | 0.0011 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | | | | | | | |
| Tag closed cup | | | | | | | | | | | | | | | ASTM D-56 |
| C | 15 | | 13 | | 16 | | 14 | | | | 16 | | 13 | | |
| F | 59 | | 56 | | 61 | | 57 | | | | 60 | | 55 | | |
| Tag open cup | | | | | | | | | | | | | | | ASTM D-1310 |
| C | 16 | | 13 | | 21 | | 19 | | 16 | | 18 | | 16 | | |
| F | 60 | | 55 | | 69 | | 66 | | 60 | | 65 | | 60 | | |
| Pounds per gallon @ 60°F per 27 CFR 212.115 | 6.788 ⁽³⁾ | | 6.606 ⁽³⁾ | | 6.797 ⁽³⁾ | | 6.613 ⁽³⁾ | | 6.959 | | 6.785 | | 6.609 | | |
| Shipping containers | | | | | | | | | | | | | | | |
| Tank cars | ✓ | | | | ✓ | | | | No | | | | | | |
| Tank trucks | ✓ | | | | ✓ | | | | No | | | | | | |
| Drums | ✓ | | | | ✓ | | | | No | | | | | | |
| Pails | ✓ | | | | ✓ | | | | No | | | | | | |

Comments

1. Wood alcohol is an authorized denaturant for SDA 1 (27 CFR 212.16) but it is of no present commercial importance.
2. This formula must be used in a closed end continuous system unless it is shown that it is not practical to do so.
3. Determined by U.S.I.
4. 27 CFR 212.18 authorizes the use of one-half gallon rubber hydrocarbon solvent or toluene in lieu of benzene. Metallic sodium in excess of 33 pounds is also authorized. SDA 2C is only supplied in the anhydrous formulation. It must be used in a closed and continuous system unless it is shown that it is not practical to do so.

(continued)

Table 6.37: (continued)

| AUTHORIZED COMPOSITION: | | | | | | | | | | | |
|------------------------------------------------|----------------------|--------|--------------|--------|-----------|--------|-----------|--------|-----------|--------|-----------------------|
| | SDA 4 ⁽³⁾ | | SDA 6B | | | | SDA 12A-1 | | | | Test Method |
| To every 100 gallons of alcohol add: | | | | | | | | | | | |
| Nicotine, solution ⁽²⁾ , gallons | 1 | | — | | | | — | | | | |
| Pyridine Bases, gallons | — | | 0.5 | | | | — | | | | |
| Benzene, gallons | — | | — | | | | 5 | | | | |
| Rubber Hydrocarbon Solvent, gallons | — | | — | | | | — | | | | |
| Toluene, gallons | — | | — | | | | — | | | | |
| Ethyl Ether, gallons | — | | — | | | | — | | | | |
| FORMULATION: | 190° | | 190° | | Anhydrous | | 190° | | Anhydrous | | |
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | |
| SPECIFICATIONS: | | | | | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C (60 F 60°F) | 0.8181 | 0.8193 | 0.8160 | 0.8172 | 0.7939 | 0.7949 | 0.8183 | 0.8194 | 0.7972 | 0.7986 | ASTM D-891 |
| @ 20°C/20°C | 0.8149 | 0.8161 | 0.8128 | 0.8140 | 0.7907 | 0.7918 | 0.8151 | 0.8162 | 0.7940 | 0.7955 | |
| @ 25°C/25°C | 0.8115 | 0.8126 | 0.8094 | 0.8105 | 0.7873 | 0.7884 | 0.8117 | 0.8128 | 0.7907 | 0.7921 | |
| Acidity, wt/wt% as acetic acid | — 0.0025 | | ← alkaline → | | | | — 0.0025 | | — 0.0025 | | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | — 0.01 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | ASTM D-1353 |
| Color, Pt-Co | Blue | | — 30 | | — 30 | | — 10 | | — 10 | | ASTM D-1209 |
| Water content, vol. vol. % | — — | | — — | | — 0.20 | | — — | | — 0.10 | | ASTM D-1364 |
| Odor | Typical | | Typical | | | | Typical | | | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | | | |
| Apparent proof at 60°F | 188.5 | | 189.6 | | 199.7 | | 188.4 | | 198.3 | | I.R.S. Gauging Manual |
| Composition, wt/wt% | | | | | | | | | | | |
| Ethyl Alcohol | 91.30 | | 91.88 | | 99.38 | | 87.69 | | 94.73 | | |
| Nicotine | 0.024 | | — | | — | | — | | — | | |
| Methylene Blue | 0.0003 | | — | | — | | — | | — | | |
| Pyridine Bases | — | | 0.59 | | 0.62 | | — | | — | | |
| Benzene | — | | — | | — | | 5.12 | | 5.27 | | |
| Rubber Hydrocarbon Solvent | — | | — | | — | | — | | — | | |
| Toluene | — | | — | | — | | — | | — | | |
| Ethyl Ether | — | | — | | — | | — | | — | | |
| Water | 8.68 | | 7.53 | | — | | 7.19 | | — | | |
| Coefficient of expansion | | | | | | | | | | | |
| Per 1°C | 0.0010 | | 0.0010 | | 0.0010 | | 0.0011 | | 0.0011 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | | | |
| Tag closed cup | | | | | | | | | | | |
| C° | 17 | | 18 | | 17 | | 6 | | 6 | | ASTM D-56 |
| F° | 63 | | 64 | | 62 | | 42 | | 42 | | |
| Tag open cup | | | | | | | | | | | |
| C° | 18 | | 18 | | 16 | | 10 | | 7 | | ASTM D-1310 |
| F° | 65 | | 65 | | 60 | | 50 | | 45 | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 6.823 | | 6.801 | | 6.618 | | 6.820 | | 6.645 | | |
| Shipping containers | | | | | | | | | | | |
| Tank cars | \ | | \ | | | | \ | | | | |
| Tank trucks | \ | | \ | | | | \ | | | | |
| Drums | \ | | \ | | | | \ | | | | |
| Pails | \ | | \ | | | | \ | | | | |

Comments:

- SDA 3B, prepared by the addition of one gallon pine tar N.F. to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use, it is not discussed in this book.
- Nicotine Solution Composition: Five gallons of an aqueous solution containing 40 percent nicotine and 3.6 av. ounces of methylene blue N.F., plus sufficient water to make 100 gallons.
- Available in 190 formulation only.
- Determined by U.S.I.
- SDA 17, prepared by the addition of 0.05 gallon (6.4 fluid ounces) of bone oil (Dipple's Oil) to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use it is not discussed in this book.

(continued)

Table 6.37: (continued)

AUTHORIZED COMPOSITION:

| | SDA 12A-3 | | | | SDA 13A | | | | Test Method |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------|------------------------|--------|------------------------|--------|------------------------|--------|-----------------------|
| To every 100 gallons of alcohol add: Nicotine, solution ⁽²⁾ , gallons Pyridine Bases, gallons Benzene, gallons Rubber Hydrocarbon Solvent, gallons Toluene, gallons Ethyl Ether, gallons | — — — 5 — | | | | — — — — 10 | | | | |
| FORMULATION: | 190° Min. Max. | | Anhydrous Min. Max. | | 190° Min. Max. | | Anhydrous Min. Max. | | |
| SPECIFICATIONS: | | | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C (60°F/60°F) | 0.8077 | 0.8189 | 0.7972 | 0.7986 | 0.8067 | 0.8100 | 0.7883 | 0.7895 | ASTM D-891 |
| @ 20°C/20°C | 0.8146 | 0.8157 | 0.7940 | 0.7955 | 0.8056 | 0.8068 | 0.7857 | 0.7863 | |
| @ 25°C/25°C | 0.8111 | 0.8123 | 0.7907 | 0.7921 | 0.8022 | 0.8034 | 0.7816 | 0.7828 | |
| Acidity, wt/wt% as acetic acid | — | 0.0025 | — | 0.0025 | — | 0.0025 | — | 0.0025 | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | — | 0.0025 | — | 0.0025 | — | 0.0025 | — | 0.0025 | ASTM D-1353 |
| Color, Pt-Co | — | 10 | — | 10 | — | 10 | — | 10 | ASTM D-1209 |
| Water content, vol/vol % | — | — | — | 0.10 | — | — | — | 0.10 | ASTM D-1364 |
| Odor | Typical | | | | Typical | | | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | |
| Apparent proof at 60°F | 188.7 | | 198.3 | | 193.2 | | 200 | | I.R.S. Gauging Manual |
| Composition, wt/wt% | | | | | | | | | |
| Ethyl Alcohol | 87.74 | | 94.78 | | 85.07 | | 91.81 | | |
| Nicotine | — | | — | | — | | — | | |
| Methylene Blue | — | | — | | — | | — | | |
| Pyridine Bases | — | | — | | — | | — | | |
| Benzene | — | | — | | — | | — | | |
| Rubber Hydrocarbon Solvent | — | | — | | — | | — | | |
| Toluene | 5.07 | | 5.22 | | — | | — | | |
| Ethyl Ether | — | | — | | 7.92 | | 8.15 | | |
| Water | 7.19 | | — | | 7.01 | | 0.04 | | |
| Coefficient of expansion | | | | | | | | | |
| Per 1°C | 0.0011 | | 0.0011 | | 0.0011 | | 0.0012 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | |
| Tag closed cup | | | | | | | | | ASTM D-56 |
| C° | 11 | | 9 | | -14 | | -16 | | |
| F° | 52 | | 49 | | 6 | | 4 | | |
| Tag open cup | | | | | | | | | ASTM D-1310 |
| C° | 18 | | 16 | | -12 | | -12 | | |
| F° | 65 | | 60 | | 10 | | 10 | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 6.815 ⁽⁴⁾ | | 6.644 ⁽⁴⁾ | | 6.740 | | 6.572 | | |
| Shipping containers | | | | | | | | | |
| Tank cars | ✓ | | ✓ | | ✓ | | ✓ | | |
| Tank trucks | ✓ | | ✓ | | ✓ | | ✓ | | |
| Drums | ✓ | | ✓ | | ✓ | | ✓ | | |
| Pails | ✓ | | ✓ | | ✓ | | ✓ | | |

Comments:

1. SDA 3B, prepared by the addition of one gallon pine tar N.F. to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use, it is not discussed in this book.
2. Nicotine Solution Composition: Five gallons of an aqueous solution containing 40 percent nicotine and 3.6 av. ounces of methylene blue N.F., plus sufficient water to make 100 gallons.
3. Available in 190° formulation only.
4. Determined by U.S.I.
5. SDA 17, prepared by the addition of 0.05 gallon (6.4 fluid ounces) of bone oil (Dipple's Oil) to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use it is not discussed in this book.

(continued)

Table 6.37: (continued)

| AUTHORIZED COMPOSITION: | | | | | | | | | |
|--------------------------------------------------|-----------------------|----------------|-----------------------|----------------|----------------|----------------|------------------|----------------|-----------------------|
| | SDA 20 ⁽³⁾ | | SDA 22 ⁽⁴⁾ | | SDA 23A | | | | Test Method |
| To every 100 gallons of alcohol add: | | | | | | | | | |
| Chloroform, gallons | 5 | | — | | | — | | | |
| Formaldehyde, Solution U.S.P., gallons | — | | 10 | | | — | | | |
| Acetone, N.F., gallons | — | | — | | | 8 | | | |
| Salicylic Acid, N.F., pounds | — | | — | | | — | | | |
| Resorcin, U.S.P. pounds | — | | — | | | — | | | |
| Bergamot Oil, N.F., gallons | — | | — | | | — | | | |
| Methyl Isobutyl Ketone, gallons | — | | — | | | — | | | |
| FORMULATION: | Anhydrous | | 190° | | 190° | | Anhydrous | | |
| | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | |
| SPECIFICATIONS: | | | | | | | | | |
| Specific gravity @ 15.56°C, 15.56°C (60°F, 60°F) | 0.8265 | 0.8282 | 0.8444 | 0.8462 | 0.8144 | 0.8156 | 0.7939 | 0.7949 | ASTM D-891 |
| @ 20°C/20°C | 0.8233 | 0.8251 | 0.8413 | 0.8431 | 0.8113 | 0.8124 | 0.7908 | 0.7918 | |
| @ 25°C/25°C | 0.8199 | 0.8216 | 0.8379 | 0.8398 | 0.8078 | 0.8090 | 0.7874 | 0.7884 | |
| Acidity, wt.-% as acetic acid | — | 0.0050 | — | 0.010 | — | 0.0025 | — | 0.0025 | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | — | 0.0025 | — | 0.0025 | — | 0.0025 | — | 0.0025 | ASTM D-1353 |
| Color, Pt-Co | — | 10 | — | 10 | — | 10 | — | 10 | ASTM D-1209 |
| Water content, vol.-% | — | 0.10 | — | — | — | — | — | 0.10 | ASTM D-1364 |
| Odor | Typical | | Typical | | Typical | | | | Organolectic |
| TYPICAL PROPERTIES: | | | | | | | | | |
| Apparent proof at 60°F | 183.7 | | 172.6 | | 190.4 | | 199.7 | | I.R.S. Gauging Manual |
| Composition, wt.-% | | | | | | | | | |
| Ethyl Alcohol | 91.50 | | 81.50 | | 85.73 | | 92.57 | | |
| Chloroform | 8.50 | | — | | — | | — | | |
| Formaldehyde | — | | 4.37 | | — | | — | | |
| Acetone | — | | 1.42-Methanol | | 7.24 | | 7.43 | | |
| Salicylic Acid | — | | — | | — | | — | | |
| Resorcin | — | | — | | — | | — | | |
| Bergamot Oil | — | | — | | — | | — | | |
| Methyl Isobutyl Ketone | — | | — | | — | | — | | |
| Water | — | | 12.71 | | 7.03 | | — | | |
| Coefficient of expansion | | | | | | | | | |
| Per 1°C | 0.0011 | | 0.0010 | | 0.0011 | | 0.0011 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | |
| Tag closed cup | | | | | | | | | ASTM D-56 |
| C | 13 | | 18 | | 6 | | 4 | | |
| F | 56 | | 65 | | 43 | | 40 | | |
| Tag open cup | | | | | | | | | ASTM D-1310 |
| C | 13 | | 17 | | 16 | | 16 | | |
| F | 55 | | 62 | | 60 | | 60 | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 6.886 | | 7.037 | | 6.788 | | 6.621 | | |
| Shipping containers | | | | | | | | | |
| Tank cars | No | | No | | | | ✓ | | |
| Tank trucks | No | | No | | | | ✓ | | |
| Drums | | | | | | | ✓ | | |
| Pails | | | | | | | ✓ | | |

Comments

- SDA 18, prepared by the addition of 100 gallons of vinegar of not less than 90-grain strength or 150 gallons of vinegar of not less than 60-grain strength to every 100 gallons of alcohol is an authorized formula. It is not discussed in this book because of limited commercial importance.
- SDA 19 prepared by the addition of 100 gallons of ethyl ether to every 100 gallons of alcohol is an authorized formula. Because of very limited use it is not discussed in this book.
- Available in anhydrous formulation only.
- The 190° formulation is typically used.
- 27 CFR 212.31 also authorizes the use of 1 gallon bay oil N.F., in lieu of the 1 gallon bergamot oil N.F.

(continued)

Table 6.37: (continued)

| AUTHORIZED COMPOSITION: | | SDA 23F-1 ⁽⁵⁾ | | | | SDA 23H | | | | Test Method |
|-------------------------------------------------|--|--------------------------|---------|------------|---------|---------|---------|-----------|---------|-----------------------|
| To every 100 gallons of alcohol add | | | | | | | | | | |
| Chloroform, gallons | | — | | | | — | | | | |
| Formaldehyde, Solution U.S.P., gallons | | — | | | | 8 | | | | |
| Acetone, N.F., gallons | | — | | | | — | | | | |
| Salicylic Acid, N.F., pounds | | 3 | | | | — | | | | |
| Resorcin, U.S.P. pounds | | 1 | | | | — | | | | |
| Bergamot Oil, N.F., gallons | | 1 | | | | — | | | | |
| Methyl Isobutyl Ketone, gallons | | — | | | | 1.5 | | | | |
| FORMULATION: | | 190° | | Anhydrous | | 190° | | Anhydrous | | |
| | | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | |
| SPECIFICATIONS: | | | | | | | | | | |
| Specific gravity @ 15.56 C (59.8 F) (60 F 60 F) | | 0.8193 | 0.8204 | 0.7964 | 0.7979 | 0.8140 | 0.8152 | 0.7942 | 0.7952 | ASTM D-891 |
| @ 20 C 20 C | | 0.8161 | 0.8172 | 0.7932 | 0.7948 | 0.8109 | 0.8120 | 0.7910 | 0.7920 | |
| @ 25 C 25 C | | 0.8126 | 0.8138 | 0.7899 | 0.7914 | 0.8074 | 0.8086 | 0.7876 | 0.7886 | |
| Acidity, wt wt% as acetic acid | | 0.10 | 0.20 | 0.10 | 0.20 | — | 0.0025 | — | 0.0025 | ASTM D-1613 |
| Non-volatile matter, grams 100 ml | | N/A | | N/A | | — | 0.0025 | — | 0.0025 | ASTM D-1353 |
| Color, Pt-Co | | Pale Green | | Pale Green | | — | 10 | — | 10 | ASTM D-1209 |
| Water content, vol vol % | | — | — | — | 0.40 | — | — | — | 0.10 | ASTM D-1364 |
| Odor | | Typical | | | | Typical | | | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | | |
| Apparent proof at 60 F | | 187.9 | | 198.6 | | 190.6 | | 199.6 | | I.R.S. Gauging Manual |
| Composition, wt wt% | | | | | | | | | | |
| Ethyl Alcohol | | 90.91 | | 98.26 | | 84.58 | | 91.29 | | |
| Chloroform | | — | | — | | — | | — | | |
| Formaldehyde | | — | | — | | 7.14 | | 7.33 | | |
| Acetone | | — | | — | | — | | — | | |
| Salicylic Acid | | 0.43 | | 0.45 | | — | | — | | |
| Resorcin | | 0.14 | | 0.15 | | — | | — | | |
| Bergamot Oil | | 1.06 | | 1.09 | | — | | — | | |
| Methyl Isobutyl Ketone | | — | | — | | 1.35 | | 1.38 | | |
| Water | | 7.46 | | — | | 6.93 | | — | | |
| Coefficient of expansion | | | | | | | | | | |
| Per 1 C | | 0.0010 | | 0.0010 | | 0.0011 | | 0.0011 | | |
| Per 1 F | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | | |
| Tag closed cup | | | | | | | | | | ASTM D-56 |
| C | | 16 | | 13 | | 6 | | 2 | | |
| F | | 60 | | 56 | | 43 | | 36 | | |
| Tag open cup | | | | | | | | | | ASTM D-1310 |
| C | | 18 | | 18 | | 10 | | 2 | | |
| F | | 65 | | 65 | | 50 | | 35 | | |
| Pounds per gallon @ 60 F per 27 CFR 212.115 | | 6.808 | | 6.627 | | 6.785 | | 6.617 | | |
| Shipping containers | | | | | | | | | | |
| Tank cars | | No | | | | ✓ | | | | |
| Tank trucks | | No | | | | ✓ | | | | |
| Drums | | No | | | | ✓ | | | | |
| Pails | | — Polyethylene lined | | | | ✓ | | | | |

Comments

- SDA 18 prepared by the addition of 100 gallons of vinegar of not less than 90-grain strength or 150 gallons of vinegar of not less than 60-grain strength to every 100 gallons of alcohol is an authorized formula. It is not discussed in this book because of limited commercial importance.
- SDA 19 prepared by the addition of 100 gallons of ethyl ether to every 100 gallons of alcohol is an authorized formula. Because of very limited use it is not discussed in this book.
- Available in anhydrous formulation only.
- The 190° formulation is typically used.
- 27 CFR 212.31 also authorizes the use of 1 gallon bay oil N.F. in lieu of the 1 gallon bergamot oil N.F.

(continued)

Table 6.37: (continued)

AUTHORIZED COMPOSITION:

| | SDA 25-1 ⁽¹⁾ | | SDA 25-2 ⁽¹⁾ | | SDA 25A-1 ⁽¹⁾ | | SDA 25A-2 ⁽¹⁾ | | Test Method |
|---------------------------------------------------|-----------------------------------------------|---------|-----------------------------------------------|---------|-----------------------------------------------|---------|-----------------------------------------------|---------|--------------------------------------------------------------------------|
| To every 100 gallons of alcohol add: | | | | | | | | | |
| Iodine, U.S.P., pounds | 20 | | 20 | | 20 | | 20 | | |
| Potassium iodide, U.S.P., pounds | 15 | | — | | 15 | | — | | |
| Sodium iodide, U.S.P., pounds | — | | 15 | | — | | 15 | | |
| Water, pounds | — | | — | | 15 | | 15 | | |
| Rosemary Oil, N.F., gallons | — | | — | | — | | — | | |
| Camphor, U.S.P., pounds | — | | — | | — | | — | | |
| Clove Oil, U.S.P., gallons | — | | — | | — | | — | | |
| Lavender Oil, U.S.P., gallons | — | | — | | — | | — | | |
| Medicinal Soft Soap, U.S.P. pounds ⁽²⁾ | — | | — | | — | | — | | |
| FORMULATION: | 190° | | 190° | | 190° | | 190° | | |
| | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | |
| SPECIFICATIONS: | | | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C (60°F/60°F) | 0.8491 | 0.8521 | 0.8494 | 0.8523 | 0.8535 | 0.8564 | 0.8541 | 0.8571 | ASTM D-891 |
| @ 20°C/20°C | 0.8460 | 0.8490 | 0.8463 | 0.8492 | 0.8504 | 0.8533 | 0.8510 | 0.8539 | |
| @ 25°C/25°C | 0.8426 | 0.8456 | 0.8429 | 0.8459 | 0.8471 | 0.8500 | 0.8476 | 0.8506 | |
| Acidity, wt/wt% as acetic acid | — | — | — | — | — | — | — | — | ASTM D-1613 ASTM D-1353 ASTM D-1209 ASTM D-1364 Organoleptic |
| Non-volatile matter, grams/100 ml | — | — | — | — | — | — | — | — | |
| Color, Pt-Co | Deep Red-Brown | | Deep Red-Brown | | Deep Red-Brown | | Deep Red-Brown | | |
| Water content, vol/vol % | — | — | — | — | — | — | — | — | |
| Odor | Typical | | Typical | | Typical | | Typical | | |
| TYPICAL PROPERTIES: | | | | | | | | | |
| Apparent proof at 60°F | 169.1 | | 168.9 | | 166.1 | | 165.7 | | I.R.S. Gauging Manual |
| Composition, wt/wt% | | | | | | | | | |
| Ethyl Alcohol | 87.90 | | 87.90 | | 86.09 | | 86.09 | | |
| Iodine | 2.80 | | 2.80 | | 2.74 | | 2.74 | | |
| Potassium iodide | 2.10 | | — | | 2.06 | | — | | |
| Sodium iodide | — | | 2.10 | | — | | 2.06 | | |
| Rosemary Oil | — | | — | | — | | — | | |
| Camphor | — | | — | | — | | — | | |
| Clove Oil | — | | — | | — | | — | | |
| Lavender Oil | — | | — | | — | | — | | |
| Soft Soap | — | | — | | — | | — | | |
| Water | 7.20 | | 7.20 | | 9.11 | | 9.11 | | |
| Coefficient of expansion | | | | | | | | | |
| Per 1°C | 0.0010 | | 0.0010 | | 0.0010 | | 0.0010 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash Point | | | | | | | | | |
| Tag closed cup | | | | | | | | | ASTM D-56 |
| C° | 16 | | 16 | | 16 | | 16 | | |
| F° | 60 | | 60 | | 60 | | 60 | | ASTM D-1310 |
| Tag open cup | | | | | | | | | |
| C° | 18 | | 18 | | 18 | | 18 | | |
| F° | 65 | | 65 | | 65 | | 65 | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 7.080 | | 7.083 | | 7.119 | | 7.117 | | |
| Shipping containers | | | | | | | | | |
| Tank cars | No | | No | | No | | No | | |
| Tank trucks | No | | No | | No | | No | | |
| Drums | 50 gallon, polyethylene returnable drums only | | 50 gallon, polyethylene returnable drums only | | 50 gallon, polyethylene returnable drums only | | 50 gallon, polyethylene returnable drums only | | |
| Pails | No | | No | | No | | No | | |

Comments:

1. These SDA's typically supplied only in the 190° formulation
2. The requirements of this formula may be met by adding 66.5 pounds of U.S.P. quality soap concentrate containing 25 percent water to 100 gallons of alcohol and, after mixing, by adding thereto 33.5 pounds of water and mixing again.

(continued)

Table 6.37: (continued)

AUTHORIZED COMPOSITION:

| | SDA 27 | | | | SDA 27A ⁽¹⁾ | | SDA 27B ⁽¹⁾ | | Test Method |
|---------------------------------------------------|---------|---------|-----------|---------|------------------------|---------|------------------------|---------|----------------------------|
| To every 100 gallons of alcohol add: | | | | | | | | | |
| Iodine, U.S.P., pounds | — | | | | — | | — | | |
| Potassium Iodide, U.S.P., pounds | — | | | | — | | — | | |
| Sodium Iodide, U.S.P., pounds | — | | | | — | | — | | |
| Water, pounds | — | | | | — | | — | | |
| Rosemary Oil, N.F., gallons | 1 | | | | — | | — | | |
| Camphor, U.S.P., pounds | 30 | | | | 35 | | — | | |
| Clove Oil, U.S.P., gallons | — | | | | 1 | | — | | |
| Lavender Oil, U.S.P., gallons | — | | | | — | | 1 | | |
| Medicinal Soft Soap, U.S.P. pounds ⁽²⁾ | — | | | | — | | 100 | | |
| FORMULATION: | 190° | | Anhydrous | | 190° | | 190° | | |
| | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | |
| SPECIFICATIONS: | | | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C (60°F/60°F) | 0.8202 | 0.8240 | 0.7996 | 0.8020 | 0.8238 | 0.8263 | 0.8408 | 0.8448 | ASTM D-891 |
| @ 20°C/20°C | 0.8170 | 0.8207 | 0.7964 | 0.7988 | 0.8207 | 0.8231 | 0.8377 | 0.8417 | |
| @ 25°C/25°C | 0.8136 | 0.8172 | 0.7930 | 0.7954 | 0.8172 | 0.8197 | 0.8343 | 0.8383 | |
| Acidity, wt/wt% as acetic acid | — | 0.005 | — | 0.010 | — | 0.030 | — | — | ASTM D-1613 ASTM D-1353 |
| Non-volatile matter, grams/100 ml | N/A | | N/A | | N/A | | — | | |
| Color, Pt-Co | — | 40 | — | 40 | — | 60 | — | — | ASTM D-1209 |
| Water content, vol/vol % | — | — | — | 0.10 | — | — | — | — | ASTM D-1364 |
| Odor | Typical | | | | Typical | | Typical | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | |
| Apparent proof at 60°F | 186.7 | | 197.1 | | 185.2 | | 174.2 | | I.R.S. Gauging Manual |
| Composition, wt/wt% | | | | | | | | | |
| Ethyl Alcohol | 87.58 | | 94.62 | | 86.83 | | 79.79 | | |
| Iodine | — | | — | | — | | — | | |
| Potassium Iodide | — | | — | | — | | — | | |
| Sodium Iodide | — | | — | | — | | — | | |
| Rosemary Oil | 1.06 | | 1.08 | | — | | — | | |
| Camphor | 4.18 | | 4.30 | | 4.84 | | — | | |
| Clove Oil | — | | — | | 1.21 | | — | | |
| Lavender Oil | — | | — | | — | | 0.96 | | |
| Soft Soap | — | | — | | — | | 6.35 | | |
| Water | 7.18 | | — | | 7.12 | | 12.90 | | |
| Coefficient of expansion | | | | | | | | | |
| Per 1°C | 0.0010 | | 0.0010 | | 0.0010 | | 0.0010 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash Point | | | | | | | | | |
| Tag closed cup | | | | | | | | | |
| C° | 14 | | 13 | | 16 | | 18 | | ASTM D-56 |
| F° | 58 | | 56 | | 60 | | 64 | | |
| Tag open cup | | | | | | | | | |
| C° | 18 | | 16 | | 18 | | 18 | | ASTM D-1310 |
| F° | 65 | | 60 | | 65 | | 65 | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 6.846 | | 6.670 | | 6.867 | | 7.027 | | |
| Shipping containers | | | | | | | | | |
| Tank cars | | | No | | No | | No | | |
| Tank trucks | | | No | | No | | No | | |
| Drums | | | ✓ | | X | | ✓ | | |
| Pails | | | ✓ | | X | | ✓ | | |

X = resin lined containers only.

Comments:

- 1 These SDA's typically supplied only in the 190° formulation.
- 2 The requirements of this formula may be met by adding 6.5 pounds of U.S.P. quality soap concentrate containing 25 percent water to 100 gallons of alcohol and, after mixing, by adding thereto 33.5 pounds of water and mixing again.

(continued)

Table 6.37: (continued)

AUTHORIZED COMPOSITION:

| | SDA 28A ⁽¹⁾ | | SDA 29-3 ⁽²⁾ | | | | SDA 30 | | Test Method |
|------------------------------------------------|------------------------|----------------|-------------------------|----------------|----------------------|----------------|----------------|----------------|-----------------------|
| To every 100 gallons of alcohol add: | | | | | | | | | |
| Gasoline, gallons | 1 | | — | | — | | — | | |
| Ethyl Acetate, gallons | — | | 1 | | — | | — | | |
| Methyl Alcohol, gallons | — | | — | | — | | 10 | | |
| Ethyl Ether, gallons | — | | — | | — | | — | | |
| FORMULATION: | Anhydrous | | 190° | | Anhydrous | | 190° | | |
| | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | |
| SPECIFICATIONS: | | | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C (60°F/60°F) | 0.7923 | 0.7933 | 0.8160 | 0.8172 | 0.7944 | 0.7954 | 0.8132 | 0.8146 | ASTM D-891 |
| @ 20°C/20°C | 0.7891 | 0.7901 | 0.8128 | 0.8140 | 0.7912 | 0.7922 | 0.8101 | 0.8115 | |
| @ 25°C/25°C | 0.7857 | 0.7867 | 0.8094 | 0.8105 | 0.7879 | 0.7889 | 0.8066 | 0.8080 | |
| Acidity, wt/wt% as acetic acid | — | 0.0025 | — | 0.0025 | — | 0.0025 | — | 0.0025 | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | — | 0.0025 | — | 0.0025 | — | 0.0025 | — | 0.0025 | ASTM D-1353 |
| Color, Pt-Co | — | 10 | — | 10 | — | 10 | — | 10 | ASTM D-1209 |
| Water content, vol/vol % | — | 0.20 | — | — | — | 0.10 | — | — | ASTM D-1364 |
| Odor | Typical | | Typical | | | | Typical | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | |
| Apparent Proof at 60°F | >200 | | 189.6 | | 199.5 | | 191.0 | | I.R.S. Gauging Manual |
| Composition wt/wt% | | | | | | | | | |
| Ethyl Alcohol | 99.13 | | 91.41 | | 98.87 | | 84.21 | | |
| Gasoline | 0.87 | | — | | — | | — | | |
| Ethyl Acetate | — | | 1.10 | | 1.13 | | — | | |
| Methyl Alcohol | — | | — | | — | | 8.89 | | |
| Ethyl Ether | — | | — | | — | | — | | |
| Water | — | | 7.49 | | — | | 6.90 | | |
| Coefficient of expansion | | | | | | | | | |
| Per 1°C | 0.0011 | | 0.0010 | | 0.0011 | | 0.0010 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | |
| Tag closed cup | | | | | | | | | ASTM D-56 |
| C° | 7 | | 17 | | 15 | | 16 | | |
| F° | 45 | | 62 | | 69 | | 60 | | |
| Tag open cup | | | | | | | | | ASTM D-1310 |
| C° | 10 | | 16 | | 21 | | 18 | | |
| F° | 50 | | 60 | | 69 | | 65 | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 6.603 | | 6.801 ⁽⁶⁾ | | 6.621 ⁽⁶⁾ | | 6.785 | | |
| Shipping containers | | | | | | | | | |
| Tank cars | ✓ | | | | | | ✓ | | |
| Tank trucks | ✓ | | | | | | ✓ | | |
| Drums | ✓ | | | | | | ✓ | | |
| Pails | ✓ | | | | | | ✓ | | |

Comments:

- This SDA typically supplied only in the anhydrous formulation.
- This formulation, typically used for vinegar manufacture, is but one of many which is of commercial importance. Other denaturants may be approved by the ATF director, provided the proposed denaturant be not less than 6.8 pounds of solid, or 1 gallon of liquid to 100 gallons alcohol. This formula is restricted to processes in which the alcohol loses its identity by being converted to other chemicals.
- SDA 31A, prepared by the addition of 100 pounds of glycerol, U.S.P. and 20 pounds of hard soap, N.F. to 100 gallons alcohol is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- SDA 33, prepared by the addition of 30 pounds of methyl violet or methyl violet U.S.P. to 100 gallons alcohol is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- SDA 35, prepared by the addition of 29.75 gallons of ethyl acetate having an ester content of 100 percent by weight or the equivalent thereof not to exceed 35 gallons of ethyl acetate with an ester content of not less than 85 percent by weight to 100 gallons alcohol is an ATF authorized formulation. Because of very limited use it is not discussed within this book.
- Determined by U.S.I.

(continued)

Table 6.37: (continued)

AUTHORIZED COMPOSITION:

| | SDA 30 | | SDA 32 | | | | SDA 35A | | | | Test Method |
|------------------------------------------------|------------------|---------|-------------|---------|------------------|---------|-------------|---------|------------------|---------|-----------------------|
| To every 100 gallons of alcohol add: | | | | | | | | | | | |
| Gasoline, gallons | — | | — | | | | — | | | | |
| Ethyl Acetate, gallons | — | | — | | | | 4.25 | | | | |
| Methyl Alcohol, gallons | 10 | | — | | | | — | | | | |
| Ethyl Ether, gallons | — | | 5 | | | | — | | | | |
| FORMULATION: | Anhydrous | | 190° | | Anhydrous | | 190° | | Anhydrous | | |
| | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | |
| SPECIFICATIONS: | | | | | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C (60°F/60°F) | 0.7934 | 0.7944 | 0.8122 | 0.8134 | 0.7911 | 0.7921 | 0.8185 | 0.8196 | 0.7974 | 0.7989 | ASTM D-891 |
| @ 20°C/20°C | 0.7902 | 0.7912 | 0.8091 | 0.8103 | 0.7879 | 0.7889 | 0.8153 | 0.8164 | 0.7942 | 0.7957 | |
| @ 25°C/25°C | 0.7868 | 0.7879 | 0.8056 | 0.8068 | 0.7845 | 0.7855 | 0.8119 | 0.8130 | 0.7909 | 0.7923 | |
| Acidity, wt. wt% as acetic acid | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | — 0.0025 | | ASTM D-1353 |
| Color, Pt-Co | — 10 | | — 10 | | — 10 | | — 10 | | — 10 | | ASTM D-1209 |
| Water content, vol/vol % | — 0.20 | | — | | — 0.20 | | — | | — 0.10 | | ASTM D-1364 |
| Odor | Typical | | Typical | | | | Typical | | | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | | | |
| Apparent Proof at 60°F | 199.9 | | 191.5 | | > 200 | | 188.3 | | 198.2 | | I.R.S. Gauging Manual |
| Composition wt/wt% | | | | | | | | | | | |
| Ethyl Alcohol | 90.88 | | 88.59 | | 95.73 | | 88.26 | | 95.38 | | |
| Gasoline | | | | | | | 4.50 | | 4.62 | | |
| Ethyl Acetate | 9.12 | | | | | | | | | | |
| Methyl Alcohol | | | 4.13 | | 4.24 | | | | | | |
| Ethyl Ether | | | 7.28 | | 0.03 | | 7.24 | | | | |
| Water | | | | | | | | | | | |
| Coefficient of expansion | | | | | | | | | | | |
| Per 1°C | 0.0011 | | 0.0011 | | 0.0011 | | 0.0011 | | 0.0011 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | | | |
| Tag closed cup | | | | | | | | | | | ASTM D-56 |
| C° | 13 | | -4 | | -9 | | 14 | | 10 | | |
| F° | 53 | | 25 | | 15 | | 58 | | 50 | | |
| Tag open cup | | | | | | | | | | | ASTM D-1310 |
| C° | 13 | | -4 | | -9 | | 21 | | 17 | | |
| F° | 55 | | 25 | | 15 | | 70 | | 62 | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 6.617 | | 6.769 | | 6.593 | | 6.826 | | 6.649 | | |
| Shipping containers | | | | | | | | | | | |
| Tank cars | ✓ | | | | | | | | | | |
| Tank trucks | ✓ | | | | | | | | | | |
| Drums | ✓ | | | | | | | | | | |
| Pails | ✓ | | | | | | | | | | |

Comments:

1. This SDA typically supplied only in the anhydrous formulation.
2. This formulation, typically used for vinegar manufacture, is but one of many which is of commercial importance. Other denaturants may be approved by the ATF director, provided the proposed denaturant be not less than 6.8 pounds of solid, or 1 gallon of liquid to 100 gallons alcohol. This formula is restricted to processes in which the alcohol loses its identity by being converted to other chemicals.
3. SDA 31A, prepared by the addition of 100 pounds of glycerol, U.S.P. and 20 pounds of hard soap, N.F. to 100 gallons alcohol is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
4. SDA 33, prepared by the addition of 30 pounds of methyl violet or methyl violet U.S.P. to 100 gallons alcohol is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
5. SDA 35, prepared by the addition of 29.75 gallons of ethyl acetate having an ester content of 100 percent by weight or the equivalent thereof not to exceed 35 gallons of ethyl acetate with an ester content of not less than 85 percent by weight to 100 gallons alcohol is an ATF authorized formulation. Because of very limited use it is not discussed within this book.
6. Determined by U.S.I.

(continued)

Table 6.37: (continued)

AUTHORIZED COMPOSITION:

| | SDA 36 ^(1, 2) | | SDA 37 ⁽¹⁾ | | TYPICAL SDA 38B | | Test Method |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------|-----------------------|----------------|-------------------------|--------|-----------------------|
| To every 100 gallons of alcohol add: Ammonia, aqueous, 27 to 30 percent by weight, gallons Eucalyptol, U.S.P., fluid ounces Thymol N.F. avdp. ounce Menthol, U.S.P., avdp. ounce Formaldehyde Solution, U.S.P., gallons Boric Acid, ⁽⁴⁾ U.S.P., pounds Chlorothymol, N.F., pounds | 3 | | — | | Denaturant 10 lbs. | | |
| FORMULATION: | 190° | | 190° | | 190° 200° | | |
| | Minimum | Maximum | Minimum | Maximum | | | |
| SPECIFICATIONS: | | | | | See Table 6.37 | | |
| Specific gravity @ 15.56°C/15.56°C (60°F 60°F) | 0.8189 | 0.8209 | 0.8162 | 0.8174 | | | ASTM D-891 |
| @ 20°C/20°C | 0.8157 | 0.8177 | 0.8130 | 0.8142 | | | |
| @ 25°C/25°C | 0.8123 | 0.8143 | 0.8097 | 0.8108 | | | |
| Acidity, wt/wt% as acetic acid | — | Alkaline | — | 0.0030 | | | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | — | 0.0025 | — | N/A | | | ASTM D-1353 |
| Color, Pt-Co | — | 10 | — | 20 | | | ASTM D-1209 |
| Water content, vol/vol % | — | — | — | — | | | ASTM D-1364 |
| Odor | Typical | | Typical | | | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | |
| Apparent proof at 60°F | 187.9 | | 189.5 | | 189.4 | 199.3 | I.R.S. Gauging Manual |
| Composition, wt/wt% | | | | | | | |
| Ethyl Alcohol | 89.46 | | 91.64 | | 91.08 | 98.51 | |
| Ammonia | 0.91 | | | | | | |
| Eucalyptol | | | 0.40 | | | | |
| Thymol | | | 0.27 | | | | |
| Menthol | | | 0.18 | | | | |
| Formaldehyde | | | — | | | | |
| Boric Acid | | | — | | | | |
| Chlorothymol | | | — | | | | |
| Water | 9.63 | | 7.51 | | Denaturant 1.45 7.47 | 1.49 | |
| Coefficient of expansion | | | | | | | |
| Per 1°C | 0.0011 | | 0.0010 | | 0.0010 | 0.0010 | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | 0.0006 | |
| Flash point | | | | | | | |
| Tag closed cup | | | | | | | ASTM D-56 |
| C° | 15 | | 13 | | | | |
| F° | 59 | | 55 | | | | |
| Tag open cup | | | | | | | ASTM D-1310 |
| C° | 20 | | 21 | | | | |
| F° | 68 | | 70 | | | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 6.837 | | 6.794 | | 6.804 | 6.622 | |
| Shipping containers | | | | | | | |
| Tank cars | ✓ | | ✓ | | ✓ | | |
| Tank trucks | ✓ | | ✓ | | ✓ | | |
| Drums | ✓ | | ✓ | | ✓ & \ | | |
| Pails | ✓ | | ✓ | | ✓ & \ | | |

Comments:

1. This SDA typically supplied only in the 190° proof formulation
2. Alternate denaturants include: 3 gallons of strong ammonia solution, U.S.P.; 17.5 pounds of caustic soda, liquid grade, containing 50 percent sodium hydroxide by weight; or 12.0 pounds of caustic soda, liquid grade containing 73 percent sodium hydroxide by weight to 100 gallons alcohol.
3. 27 CFR 212.51 also authorizes the use of 7 pounds of boric acid U.S.P. and a total of 3 pounds of any two or more denaturing materials listed under Formula No. 38-B.
4. The use of Polysorbate* 80 is an authorized replacement for boric acid.

(continued)

AUTHORIZED COMPOSITION:

| | SDA 38C ⁽¹⁾ | | SDA 38D ⁽¹⁾ | | SDA 38F ^(1,3) | | Test Method |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| To every 100 gallons of alcohol add: Ammonia, aqueous, 27 to 30 percent by weight, gallons Eucalyptol, U.S.P., fluid ounces Thymol N.F. avdp. ounce Menthol, U.S.P., avdp. ounce Formaldehyde Solution, U.S.P., gallons Boric Acid, ⁽⁴⁾ U.S.P., pounds Chlorothymol, N.F., pounds | — — — 10 lbs 1.25 — — | — — — — — — — | — — — 2.5 lbs 2.5 — — | — — — — — — — | — — — 1 1/2 lbs 1 1/2 lbs — 6 1 1/2 | — — — — — — — | |
| FORMULATION: | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | |
| SPECIFICATIONS: Specific gravity @ 15.56°C/15.56°C (60°F/60°F) @ 20°C/20°C @ 25°C/25°C Acidity, wt/wt% as acetic acid Non-volatile matter, grams/100 ml Color, Pt-Co Water content, vol/vol % Odor | 0.8202 0.8170 0.8136 — — — — — | 0.8217 0.8185 0.8151 0.005 N/A 10 — Typical | 0.8231 0.8200 0.8165 — — — — Typical | 0.8252 0.8221 0.8187 0.005 N/A 10 — Typical | 0.8194 0.8162 0.8127 — — — — — | 0.8206 0.8174 0.8140 N/A N/A 10 — Typical | ASTM D-891 ASTM D-1613 ASTM D-1353 ASTM D-1209 ASTM D-1364 Organoleptic |
| TYPICAL PROPERTIES: Apparent proof at 60°F Composition, wt/wt% Ethyl Alcohol Ammonia Eucalyptol Thymol Menthol Formaldehyde Boric Acid Chlorothymol Water Coefficient of expansion Per 1°C Per 1°F Flash point Tag closed cup C° F° Tag open cup C° F° Pounds per gallon @ 60°F, per 27 CFR 212.115 Shipping containers Tank cars Tank trucks Drums Pails | 187.3 89.60 1.43 0.60 0.19 Methanol 8.18 0.0010 0.0006 17 62 19 67 6.832 No No X X | 0.35 1.20 0.39 Methanol 8.95 0.0010 0.0006 17 63 22 71 6.863 ✓ ✓ X X | 185.5 89.11 0.35 1.20 0.39 Methanol 8.95 0.0010 0.0006 17 63 22 71 6.863 ✓ ✓ X X | 187.8 91.09 0.19 0.87 0.19 7.47 0.0010 0.0006 16 61 19 66 6.828 ✓ ✓ X X | ASTM D-56 ASTM D-1310 | I.R.S. Gauging Manual | |

X = resin lined containers

Comments:

1. This SDA typically supplied only in the 190° proof formulation
2. Alternate denaturants include: 3 gallons of strong ammonia solution, U.S.P.; 17.5 pounds of caustic soda, liquid grade, containing 50 percent sodium hydroxide by weight; or 12.0 pounds of caustic soda, liquid grade containing 73 percent sodium hydroxide by weight to 100 gallons alcohol.
3. 27 CFR 212.51 also authorizes the use of 7 pounds of boric acid U.S.P. and a total of 3 pounds of any two or more denaturing materials listed under Formula No. 38-B.
4. The use of Polysorbate® 80 is an authorized replacement for boric acid.

(continued)

Table 6.37: (continued)

| AUTHORIZED COMPOSITION: | SDA 39B | | | | SDA 39C | | | | SDA 40-1 | | | | Test Method | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------|------------------------|--------|----------------------------|--------|------------------------|--------|----------------------------------|--------|------------------------|--------|--------------------------|--------------------------------------------------------------------------|
| To every 100 gallons of alcohol add: Diethyl Phthalate, gallons tert-Butyl Alcohol, gallons Brucine Alkaloid, avdp ounces Brucine Sulfate N.F. IX, avdp ozs. Sucrose Octaacetate, pounds Denatonium Benzoate, N.F., avdp ounces | 2.5 1/8 — — — — | | | | 1 — — — — — | | | | — 1/8 1 1/2 — — — | | | | | |
| FORMULATION: | 190° Min. Max. | | Anhydrous Min. Max. | | 190° Min. Max. | | Anhydrous Min. Max. | | 190° Min. Max. | | Anhydrous Min. Max. | | | |
| SPECIFICATIONS: | | | | | | | | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C(60°F/60°F) @ 20°C/20°C @ 25°C/25°C | 0.8228 | 0.8238 | 0.8028 | 0.8038 | 0.8182 | 0.8192 | 0.7964 | 0.7979 | 0.8150 | 0.8164 | 0.7934 | 0.7944 | ASTM D-891 | |
| Acidity, wt:wt% as acetic acid | 0.8196 | 0.8207 | 0.7997 | 0.8007 | 0.8149 | 0.8161 | 0.7932 | 0.7948 | 0.8122 | 0.8132 | 0.7902 | 0.7912 | | ASTM D-1613 ASTM D-1353 ASTM D-1209 ASTM D-1364 Organoleptic |
| Non-volatile matter, grams/100 ml Color, Pt-Co Water content, vol/vol % Odor | 0.8162 | 0.8172 | 0.7963 | 0.7972 | 0.8155 | 0.8126 | 0.7899 | 0.7914 | 0.8088 | 0.8098 | 0.7868 | 0.7879 | | |
| | — | 0.0050 | — | 0.0050 | — | 0.0050 | — | 0.0050 | — | 0.0025 | — | 0.0025 | | |
| | N/A | | N/A | | N/A | | N/A | | 0.020 | | 0.020 | | | |
| | — | 20 | — | 20 | — | 10 | — | 10 | — | 10 | — | 10 | | |
| | — | — | — | 0.10 | — | — | — | 0.10 | — | — | — | 0.10 | | |
| | Typical | | | | Typical | | | | Typical | | | | | |
| TYPICAL PROPERTIES: | | | | | | | | | | | | | | |
| Apparent Proof at 60°F | 186.0 | | 196.0 | | 188.5 | | 198.6 | | 190.0 | | 199.9 | | I.R.S. Gauging Manual | |
| Composition wt/wt% | | | | | | | | | | | | | | |
| Ethyl Alcohol | 89.25 | | 96.47 | | 91.17 | | 98.61 | | 92.30 | | 99.87 | | | |
| Diethyl Phthalate | 3.32 | | 3.41 | | 1.36 | | 1.39 | | — | | — | | | |
| tert-Butyl Alcohol | 0.12 | | 0.12 | | — | | — | | 0.12 | | 0.12 | | | |
| Brucine Alkaloid | — | | — | | — | | — | | 0.014 | | 0.014 | | | |
| Brucine Sulfate | — | | — | | — | | — | | — | | — | | | |
| Sucrose Octaacetate | — | | — | | — | | — | | — | | — | | | |
| Denatonium Benzoate | — | | — | | — | | — | | — | | — | | | |
| Water | 7.31 | | — | | 7.47 | | — | | 7.57 | | — | | | |
| Coefficient of expansion Per 1°C Per 1°F | 0.0010 0.0006 | | 0.0011 0.0006 | | 0.0010 0.0006 | | 0.0011 0.0006 | | 0.0010 0.0006 | | 0.0011 0.0006 | | | |
| Flash point | | | | | | | | | | | | | | |
| Tag closed cup | | | | | | | | | | | | | ASTM D-56 | |
| C° | 14 | | 13 | | 16 | | 13 | | 16 | | 13 | | | |
| F° | 58 | | 55 | | 60 | | 55 | | 61 | | 56 | | | |
| Tag open cup | | | | | | | | | | | | | ASTM D-1310 | |
| C° | 18 | | 16 | | 18 | | 16 | | 18 | | 16 | | | |
| F° | 65 | | 60 | | 65 | | 60 | | 65 | | 60 | | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 6.857 | | 6.677 | | 6.819 | | 6.642 | | 6.795 | | 6.611 | | | |
| Shipping containers | | | | | | | | | | | | | | |
| Tank cars | | | ✓ | | | | ✓ | | | | ✓ | | | |
| Tank trucks | | | ✓ | | | | ✓ | | | | ✓ | | | |
| Drums | | | ✓ | | | | ✓ | | | | ✓ | | | |
| Pails | | | ✓ | | | | ✓ | | | | ✓ | | | |

Comments:

- SDA 39, prepared by the addition of 9 pounds of sodium salicylate or salicylic acid U.S.P., 1.25 gallons fluid extract of quassia, N.F. VII and 1/8 gallon of tert-butyl alcohol to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- SDA 39A, prepared by the addition of 60 avdp. ounces of any of the following alkaloids or salts together with 1/8 gallon of tert-butyl alcohol: quinine N.F., quinine bisulfate N.F., quinine hydrochloride, U.S.P. cinchonidine, cinchonidine sulfate, N.F. IX to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- SDA 39D, prepared by the addition of one gallon bay oil N.F. and either 50 avdp ounces of quinine sulfate, U.S.P., 50 avdp ounces of quinine bisulfate, N.F., or 200 avdp. ounces sodium salicylate, U.S.P. to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- Determined by U.S.I.
- This formula shall be used only in the manufacture of products which will be packaged in pressurized containers in which the liquid contents are in intimate contact with the propellant and from which the contents are not easily removable in liquid form.

(continued)

Table 6.37: (continued)

| AUTHORIZED COMPOSITION: | SDA 40-2 | | | | SDA 40A | | | | SDA 40B | | | | SDA 40C ⁽⁵⁾ | | | | Test Method |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------|------------------------|--------|-------------------|--------|------------------------|--------|-------------------|--------|------------------------|--------|------------------------|--------|------------------------|--------|-----------------------|
| To every 100 gallons of alcohol add: Diethyl Phthalate, gallons tert-Butyl Alcohol, gallons Brucine Alkaloid, avdp ounces Brucine Sulfate N.F. IX, avdp ozs. Sucrose Octaacetate, pounds Denatonium Benzoate, N.F., avdp ounces | --- | | | | 1/8 | | | | 1/8 | | | | 3 | | | | |
| | 1 1/2 | | | | --- | | | | --- | | | | --- | | | | |
| | --- | | | | 1 | | | | --- | | | | --- | | | | |
| | --- | | | | --- | | | | 1/16 | | | | --- | | | | |
| FORMULATION: | 190° Min. Max. | | Anhydrous Min. Max. | | 190° Min. Max. | | Anhydrous Min. Max. | | 190° Min. Max. | | Anhydrous Min. Max. | | 190° Min. Max. | | Anhydrous Min. Max. | | |
| SPECIFICATIONS: | | | | | | | | | | | | | | | | | |
| Specific gravity | | | | | | | | | | | | | | | | | |
| @ 15.56°C/15.56°C(60°F/60°F) | 0.8154 | 0.8164 | 0.7934 | 0.7944 | 0.8158 | 0.8170 | 0.7939 | 0.7949 | 0.8152 | 0.8164 | 0.7934 | 0.7944 | 0.8148 | 0.8160 | 0.7829 | 0.7939 | ASTM D-891 |
| @ 20°C/20°C | 0.8122 | 0.8132 | 0.7902 | 0.7912 | 0.8126 | 0.8138 | 0.7908 | 0.7918 | 0.8120 | 0.8132 | 0.7902 | 0.7912 | 0.8116 | 0.8128 | 0.7898 | 0.7908 | |
| @ 25°C/25°C | 0.8088 | 0.8098 | 0.7868 | 0.7879 | 0.8192 | 0.8104 | 0.7874 | 0.7884 | 0.8086 | 0.8098 | 0.7868 | 0.7879 | 0.8082 | 0.8094 | 0.7864 | 0.7874 | |
| Acidity, wt/wt% as acetic acid | --- | | 0.0050 | | --- | | 0.0025 | | --- | | 0.0025 | | --- | | 0.0025 | | ASTM D-1613 |
| Non-volatile matter, grams/100 ml | --- | | 0.020 | | --- | | 0.16 | | --- | | 0.0025 | | --- | | 0.0025 | | ASTM D-1353 |
| Color, Pt-Co | --- | | 10 | | --- | | 10 | | --- | | 10 | | --- | | 10 | | ASTM D-1209 |
| Water content, vol/vol % | --- | | 0.10 | | --- | | 0.10 | | --- | | 0.10 | | --- | | 0.10 | | ASTM D-1364 |
| Odor | Typical | | | | Typical | | | | Typical | | | | Typical | | | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | | | | | | | | | |
| Apparent Proof at 60°F | 190.0 | | 199.9 | | 189.7 | | 199.7 | | 190.0 | | 199.9 | | 190.2 | | 200.1 | | I.R.S. Gauging Manual |
| Composition wt/wt% | | | | | | | | | | | | | | | | | |
| Ethyl Alcohol | 92.30 | | 99.87 | | 92.18 | | 99.73 | | 92.31 | | 99.88 | | 89.84 | | 97.13 | | |
| Diethyl Phthalate | --- | | --- | | --- | | --- | | --- | | --- | | --- | | --- | | |
| tert-Butyl Alcohol | 0.12 | | 0.12 | | 0.12 | | 0.12 | | 0.12 | | 0.12 | | 2.79 | | 2.87 | | |
| Brucine Alkaloid | --- | | --- | | --- | | --- | | --- | | --- | | --- | | --- | | |
| Brucine Sulfate | 0.014 | | 0.014 | | --- | | --- | | --- | | --- | | --- | | --- | | |
| Sucrose Octaacetate | --- | | --- | | 0.15 | | 0.15 | | --- | | --- | | --- | | --- | | |
| Denatonium Benzoate | --- | | --- | | --- | | --- | | 0.0006 | | 0.0006 | | --- | | --- | | |
| Water | 7.57 | | --- | | 7.55 | | --- | | 7.57 | | --- | | 7.37 | | --- | | |
| Coefficient of expansion | | | | | | | | | | | | | | | | | |
| Per 1°C | 0.0010 | | 0.0010 | | 0.0011 | | 0.0011 | | 0.0010 | | 0.0011 | | 0.0010 | | 0.0011 | | |
| Per 1°F | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | | | | | | | | | |
| Tag closed cup | | | | | | | | | | | | | | | | | |
| C° | 16 | | 13 | | 16 | | 12 | | 17 | | 13 | | 16 | | 13 | | ASTM D-56 |
| F° | 61 | | 56 | | 60 | | 53 | | 63 | | 56 | | 61 | | 55 | | |
| Tag open cup | | | | | | | | | | | | | | | | | |
| C° | 18 | | 16 | | 18 | | 17 | | 18 | | 16 | | 18 | | 16 | | ASTM D-1310 |
| F° | 65 | | 60 | | 65 | | 62 | | 65 | | 60 | | 65 | | 60 | | |
| Pounds per gallon | | | | | | | | | | | | | | | | | |
| @ 60°F, per 27 CFR 212.115 | 6.795 ⁴ | | 6.611 ⁴ | | 6.798 | | 6.613 | | 6.794 | | 6.610 | | 6.788 | | 6.609 | | |
| Shipping containers | | | | | | | | | | | | | | | | | |
| Tank cars | ✓ | | | | ✓ | | | | ✓ | | | | ✓ | | | | |
| Tank trucks | ✓ | | | | ✓ | | | | ✓ | | | | ✓ | | | | |
| Drums | ✓ | | | | ✓ | | | | ✓ | | | | ✓ | | | | |
| Pails | ✓ | | | | ✓ | | | | ✓ | | | | ✓ | | | | |

Comments:

- SDA 39, prepared by the addition of 9 pounds of sodium salicylate or salicylic acid U.S.P., 1.25 gallons fluid extract of quassia, N.F. VII and 1/2 gallon of tert-butyl alcohol to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- SDA 39A, prepared by the addition of 60 avdp. ounces of any of the following alkaloids or salts together with 1/2 gallon of tert-butyl alcohol: quinine N.F., quinine bisulfate N.F., quinine hydrochloride, U.S.P. cinchonidine, cinchonidine sulfate, N.F. IX to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- SDA 39D, prepared by the addition of one gallon bay oil N.F. and either 50 avdp ounces of quinine sulfate, U.S.P., 50 avdp ounces of quinine bisulfate, N.F., or 200 avdp. ounces sodium salicylate, U.S.P. to every 100 gallons alcohol, is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- Determined by U.S.I.
- This formula shall be used only in the manufacture of products which will be packaged in pressurized containers in which the liquid contents are in intimate contact with the propellant and from which the contents are not easily removable in liquid form.

(continued)

Table 6.37: (continued)

AUTHORIZED COMPOSITION:

| | SDA 45 | | | | SDA 46 ⁽⁴⁾ | | | | Test Method |
|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------|-----------|---------|-----------------------|---------|-----------|---------|-----------------------|
| To every 100 gallons of alcohol add: Refined Shellac, pounds Phenol, U.S.P., fl. ounces Methyl Salicylate, U.S.P., fl. ounces | 300 — — | | | | — 25 4 | | | | |
| FORMULATION: | 190° | | Anhydrous | | 190° | | Anhydrous | | |
| | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | Minimum | Maximum | |
| SPECIFICATIONS: | | | | | | | | | |
| Specific gravity @ 15.56°C/15.56°C (60°F/60°F) | 0.9036 | 0.9071 | 0.8868 | 0.8905 | 0.8166 | 0.8178 | 0.7946 | 0.7954 | ASTM D-891 |
| @ 20°C/20°C | 0.9008 | 0.9043 | 0.8838 | 0.8875 | 0.8134 | 0.8146 | 0.7915 | 0.7925 | |
| @ 25°C/25°C | 0.8977 | 0.9012 | 0.8806 | 0.8844 | 0.8100 | 0.8112 | 0.7882 | 0.7892 | |
| Acidity as acetic acid | N/A | | N/A | | — | | — | | 0.02 |
| Non-volatile matter, grams/100 ml | N/A | | N/A | | N/A | | N/A | | |
| Color, Pt-Co | N/A | | N/A | | — | | — | | 10 |
| Water content, vol/vol % | N/A | | N/A | | — | | — | | 0.10 |
| Odor | Typical | | | | Typical | | | | Organoleptic |
| TYPICAL PROPERTIES: | | | | | | | | | |
| Apparent Proof at 60°F | 127.0 | | 141.0 | | 189.3 | | 199.4 | | I.R.S. Gauging Manual |
| Composition, wt/wt % | | | | | | | | | |
| Ethyl Alcohol | 64.11 | | 68.78 | | 92.18 | | 99.73 | | |
| Shellac | 30.63 | | 31.22 | | — | | — | | |
| Phenol | — | | — | | 0.23 | | 0.23 | | |
| Methyl Salicylate | — | | — | | 0.04 | | 0.04 | | |
| Water | 5.26 | | — | | 7.55 | | — | | |
| Coefficient of expansion | | | | | | | | | |
| Per 1°C | 0.0009 | | 0.0009 | | 0.0011 | | 0.0010 | | |
| Per 1°F | 0.0005 | | 0.0005 | | 0.0006 | | 0.0006 | | |
| Flash point | | | | | | | | | |
| Tag closed cup | | | | | | | | | |
| C° | — | | — | | 17 | | 12 | | ASTM D-56 |
| F° | — | | — | | 63 | | 54 | | |
| Tag open cup | | | | | | | | | |
| C° | 21 | | 18 | | 21 | | 16 | | ASTM D-1310 |
| F° | 70 | | 65 | | 70 | | 60 | | |
| Pounds per gallon @ 60°F, per 27 CFR 212.115 | 7.545 | | 7.403 | | 6.805 | | 6.621 | | |
| Shipping containers | | | | | | | | | |
| Tank cars | No | | | | No | | | | |
| Tank trucks | No | | | | No | | | | |
| Drums | 50 gallon open load drums | | | | X | | | | |
| Pails | No | | | | X | | | | |

Comments:

- SDA 42, prepared by addition of (1) 80 grams of potassium iodide, U.S.P. and 109 grams of red mercuric iodide, N.F.; (2) 95 grams thimerosal, N.F.; or (3) 76 grams of any of the following: phenyl mercuric nitrate, N.F.; phenyl mercuric chloride, N.F. IX or phenyl mercuric benzoate, to every 100 gallons alcohol is an ATF authorized formulation. Because of very limited use it is not discussed in this book.
- SDA 44, prepared by the addition of 10 gallons of n-butyl alcohol is an ATF authorized formulation. Because of very limited use it is not discussed in this book. Specific information may be obtained by contacting any U.S.I. sales office.
- This formula may be used only by institutions and organizations which are of a semipublic character and engaged in charitable work.
- This formula may be used only by organizations or institutions which are of a semipublic character and engaged in charitable work.

Table 6.38: Authorized Denaturants for SDA 38B (30)

The properties of SDA 38B are as diverse as are the denaturants used in this formula and the products formulated with it.

The authorized composition of SDA 38B requires that 10 pounds of any one, or a total of 10 pounds of two or more, of the oils and substances listed below are to be added to 100 gallons of alcohol. The authorized denaturants include:

Anethole, U.S.P.
 Anise oil, U.S.P.
 Bay oil (myrcia oil), N.F.
 Benzaldehyde, N.F.
 Bergamot oil, N.F.
 Bitter Almond oil, N.F.
 Camphor, U.S.P.
 Cedar leaf oil, U.S.P. XIII
 Chlorothymol, N.F.
 Cinnamic Aldehyde, N.F. IX
 Cinnamon oil (Cassia oil), U.S.P.
 Citronella oil, Natural
 Clove oil, U.S.P.
 Coal tar, U.S.P.
 Eucalyptol, U.S.P.
 Eucalyptus oil, N.F.
 Eugenol, U.S.P.
 Guaiacol, N.F.
 Lavender oil, N.F.
 Menthol, U.S.P.
 Mustard oil, volatile (allyl isothiocyanate) U.S.P.
 Peppermint oil, U.S.P.
 Phenol, U.S.P.
 Phenyl salicylate (Salol), N.F.
 Pine oil, N.F.
 Pine needle oil, dwarf, N.F.
 Rosemary oil, N.F.
 Spearmint oil, N.F.
 Spearmint oil, terpeneless
 Spike lavender oil, natural
 Storax, U.S.P.
 Thyme oil, N.F.
 Thymol, N.F.
 Tolu balsam, U.S.P.
 Turpentine oil, N.F.
 Wintergreen oil (methyl salicylate) U.S.P.

Because of the virtually infinite number of authorized denaturants and denaturant combinations, only a typical set of properties for SDA 38B have been listed

Table 6.39: Denaturants Authorized for Completely Denatured Alcohol (CDA) and Specially Denatured Alcohol (SDA) (30)

| DENATURANT | USED IN | DENATURANT | USED IN |
|--------------------------------------------|---------------------------------------------|---------------------------------------------------------|--------------------------------------|
| Acetaldehyde | S.D.A. 29 | Methyl isobutyl ketone | C.D.A. 18; 19; S.D.A. 1; S.D.A. 23-H |
| Acetone N.F. | S.D.A. 23A; 23-H | Methyl normal-butyl ketone | C.D.A. 18; 19; S.D.A. 1 |
| Acetaldo | C.D.A. 18 | Methyl violet (methylosaniline chloride) | S.D.A. 33 |
| Almond oil, bitter N.F. | S.D.A. 38-B | Methyl violet (methylosaniline chloride) U.S.P. | S.D.A. 33 |
| Ammonia, aqueous | S.D.A. 36 | Mustard oil, volatile (allyl isothiocyanate) U.S.P. XII | S.D.A. 38-B |
| Anethole U.S.P. | S.D.A. 38-B | Nicotine solution | S.D.A. 4 |
| Anise oil U.S.P. | S.D.A. 38-B | Peppermint oil U.S.P. | S.D.A. 38-B |
| Bay oil (myrcia oil) N.F. | S.D.A. 23-F; 38-B; 39-D | Phenol U.S.P. | S.D.A. 38-B; 46 |
| Benzaldehyde N.F. | S.D.A. 38-B | Phenyl mercuric benzoate | S.D.A. 42 |
| Benzene | S.D.A. 2-B; 2-C; 12-A | Phenyl mercuric chloride N.F. IX | S.D.A. 42 |
| Bergamot oil N.F. | S.D.A. 23-F; 38-B | Phenyl mercuric nitrate N.F. | S.D.A. 42 |
| Bone oil (Dipple's oil) | S.D.A. 17 | Phenyl salicylate (salol) N.F. | S.D.A. 38-B |
| Boric acid U.S.P. | S.D.A. 38-F | Pine needle oil, dwarf N.F. | S.D.A. 38-B |
| Brucine alkaloid | S.D.A. 40 | Pine oil N.F. | S.D.A. 38-B |
| Brucine sulfate N.F. IX | S.D.A. 40 | Pine tar N.F. | S.D.A. 3-B |
| n-Butyl alcohol | S.D.A. 44 | Polysorbate 80 U.S.P. | S.D.A. 38-F |
| tert-Butyl alcohol | S.D.A. 39, 39-A; 39-B; 40; 40-A; 40-B; 40-C | Potassium iodide U.S.P. | S.D.A. 25; 25-A; 42 |
| Camphor U.S.P. | S.D.A. 27; 27-A; 38-B | Pyridine bases | S.D.A. 6-B |
| Caustic soda, liquid | S.D.A. 36 | Pyronate | C.D.A. 18 |
| Cedar leaf oil U.S.P. XIII | S.D.A. 38-B | Quassia, fluid extract of N.F. VII | S.D.A. 39 |
| Chloroform | S.D.A. 20 | Quassin | S.D.A. 40 |
| Chlorothymol N.F. | S.D.A. 38-B; 38-F | Quinine N.F. | S.D.A. 39-A |
| Cinchonidine | S.D.A. 39-A | Quinine bisulfate N.F. | S.D.A. 39-A; 39-D |
| Cinchonidine sulfate N.F. IX | S.D.A. 39-A | Quinine hydrochloride U.S.P. | S.D.A. 39-A |
| Cinnamic aldehyde (cinnamaldehyde) N.F. IX | S.D.A. 38-B | Quinine sulfate U.S.P. | S.D.A. 39-D |
| Cinnamon oil (cassia oil) U.S.P. | S.D.A. 38-B | Resorcin U.S.P. | S.D.A. 23-F |
| Citronella oil, natural | S.D.A. 38-B | Rosemary oil N.F. | S.D.A. 27; 38-B |
| Clove oil U.S.P. | S.D.A. 27-A; 38-B | Rubber hydrocarbon solvent | S.D.A. 2-B; 2-C |
| Coal tar U.S.P. | S.D.A. 38-B | Salicylic acid U.S.P. | S.D.A. 23-F; 39 |
| Denatonium benzoate N.F. (Bitrex) | S.D.A. 1; 40-B | Shellac (refined) | S.D.A. 45 |
| Diethyl phthalate | S.D.A. 39-B; 39-C | Soap, hard N.F. | S.D.A. 31-A |
| Ethyl acetate | S.D.A. 29; 35; 35-A | Soap, medicinal soft U.S.P. | S.D.A. 27-B |
| Ethyl ether | S.D.A. 13-A; 19; 32 | Sodium iodide U.S.P. | S.D.A. 25; 25-A |
| Eucalyptol U.S.P. | S.D.A. 37; 38-B | Sodium, metallic | S.D.A. 2-C |
| Eucalyptus oil N.F. | S.D.A. 38-B | Sodium salicylate U.S.P. | S.D.A. 39; 39-D |
| Eugenol U.S.P. | S.D.A. 38-B | Spearmint oil N.F. | S.D.A. 38-B |
| Formaldehyde solution U.S.P. | S.D.A. 22; 38-C; 38-D | Spearmint oil, terpeneless | S.D.A. 38-B |
| Gasoline | C.D.A. 18; 19; 20; S.D.A. 28-A | Spike lavender oil, natural | S.D.A. 38-B |
| Glycerol U.S.P. | S.D.A. 31-A | Storax U.S.P. | S.D.A. 38-B |
| Guaiacol N.F. | S.D.A. 38-B | Sucrose octa-acetate | S.D.A. 40-A |
| Iodine U.S.P. | S.D.A. 25; 25-A | Thimerosal, N.F. | S.D.A. 42 |
| Kerosene | C.D.A. 18; 19; 20 | Thyme oil N.F. | S.D.A. 38-B |
| Lavender oil U.S.P. | S.D.A. 27-B; 38-B | Thymol N.F. | S.D.A. 37; 38-B; 38-F |
| Menthol U.S.P. | S.D.A. 37; 38-B; 38-C; 38-D; 38-F | Tolu balsam U.S.P. | S.D.A. 38-B |
| Mercuric iodide, red N.F. | S.D.A. 42 | Toluene | S.D.A. 2-B; 2-C; 12-A |
| Methyl alcohol | S.D.A. 3-A; 30 | Turpentine oil N.F. | S.D.A. 38-B |
| Methylene blue N.F. | S.D.A. 4 | Vinegar | S.D.A. 18 |
| | | Wintergreen (Methyl salicylate) U.S.P. | S.D.A. 38-B; 46 |

Table 6.40: Uses of Specially Denatured Alcohol* (30)

| PRODUCT OR PROCESS | CODE NO. | FORMULAS AUTHORIZED |
|----------------------------------------------------------|----------|-----------------------------------------------------------------------------------|
| Acetaldehyde | .551 | 1, 2-B, 29 |
| Acetic acid | .512 | 1, 2-B, 29, 35-A |
| Adhesives and binders | .036 | 1, 3-A, 12-A, 23-A, 30 |
| Aldehydes, miscellaneous | .552 | 1, 2-B, 29 |
| Alkaloids (processing) | .344 | 1, 2-B, 2-C, 3-A, 12-A, 13-A, 17, 23-A, 30, 32, 35-A |
| Animal feed supplement | .910 | 35-A |
| Antibiotics (processing) | .343 | 1, 2-B, 3-A, 12-A, 13-A, 23-A, 30, 32, 35-A |
| Antifreeze, proprietary | .760 | 1 |
| Antiseptic, bathing solution (restricted) | .220 | 46 |
| Antiseptic solutions, U.S.P. or N.F. | .244 | 23-A, 37, 38-B, 38-F |
| Bath preparations | .142 | 1, 3-A, 3-B, 23-A, 30, 36, 38-B, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Bay rum | .112 | 23-A, 37, 38-B, 39, 39-B, 39-D, 40, 40-A, 40-B, 40-C |
| Biocides, miscellaneous | .410 | 1, 3-A, 3-B, 23-A, 23-H, 27-A, 27-B, 30, 37, 38-B, 39B, 40, 40-A, 40-B, 40-C |
| Blood and blood products (processing) | .345 | 1, 3-A, 12-A, 13-A, 23-A, 30 |
| Brake fluids | .720 | 1, 3-A |
| Candy glazes | .015 | 13-A, 23-A, 35, 35-A, 45 |
| Cellulose coatings | .011 | 1, 23-A, 30 |
| Cellulose compounds (dehydration) | .311 | 1, 2-B, 3-A, 32 |
| Cellulose intermediates | .034 | 1, 3-A, 12-A, 13-A, 19, 23-A, 32 |
| Chemicals (miscellaneous) | .579 | 1, 2-B, 2-C, 3-A, 6-B, 12-A, 13-A, 17, 20, 29, 30, 32, 36 |
| Cleaning solutions | .450 | 1, 3-A, 23-A, 23-H, 30, 36, 39-B, 40, 40A, 40-B, 40-C |
| Coatings, miscellaneous | .016 | 1, 23-A |
| Collodions, industrial | .034 | 1, 3-A, 12-A, 13-A, 19, 23-A, 32 |
| Collodions, U.S.P. or N.F. | .241 | 13-A, 19, 32 |
| Colognes | .122 | 38-B, 39, 39-A, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Crude drugs (processing) | .341 | 1, 2-B, 3-A, 23-A, 30 |
| Cutting oils | .730 | 1, 3-A, 12-A |
| Dehydration products, miscellaneous | .315 | 1, 2-B, 3-A |
| Dentifrices | .131 | 31-A, 37, 38-B, 38-C, 38-D |
| Deodorants (body) | .114 | 23-A, 38-B, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Detergents, household | .450 | 1, 3-A, 23-A, 23-H, 30, 36, 39-B, 40, 40-A, 40-B, 40-C |
| Detergents, industrial | .440 | 1, 3-A, 23-A, 30 |
| Detonators | .574 | 1, 6-B |
| Disinfectants | .410 | 1, 3-A, 3-B, 23-A, 23-H, 27-A, 27-B, 30, 37, 38-B, 39-B, 40, 40-A, 40-B, 40-C |
| Drugs and medicinal chemicals | .575 | 1, 2-B, 2-C, 3-A, 6-B, 12-A, 13-A, 17, 29, 30, 32 |
| Drugs, miscellaneous (processing) | .349 | 1, 2-B, 3-A, 13-A, 23-A, 30, 35-A, 38-B |
| Duplicating fluids | .485 | 1, 3-A, 30 |
| Dyes and intermediates | .540 | 1, 2-B, 2-C, 3-A, 12-A, 29, 36 |
| Dyes and intermediates (processing) | .351 | 1, 2-B, 3-A, 12-A |
| Dye solutions, miscellaneous | .482 | 1, 3-A, 23-A, 30, 39-C, 40, 40-A, 40-B, 40-C |
| Embalming fluids, etc. | .420 | 1, 3-A, 22, 23-A |
| Esters, ethyl (miscellaneous) | .523 | 1, 2-B, 2-C, 3-A, 6-B, 12-A, 13-A, 17, 29, 32, 35-A |
| Ether, ethyl | .561 | 1, 2-B, 13-A, 29, 32 |
| Ethers, miscellaneous | .562 | 1, 2-B, 13-A, 29, 32 |
| Ethyl acetate | .521 | 1, 2-B, 29, 35-A |
| Ethylamines | .530 | 1, 2-B, 2-C, 3-A, 12-A, 29, 36 |
| Ethyl chloride | .522 | 1, 2-B, 29, 32 |
| Ethylene dibromide | .571 | 1, 2-B, 29, 32 |
| Ethylene gas | .572 | 1, 2-B, 29, 32 |
| Explosives | .033 | 1, 2-B, 3-A |
| External pharmaceuticals (not U.S.P. or N.F.) | .210 | 23-A, 23-F, 23-H, 27-A, 27-B, 36, 37, 38-B, 38-F, 39-B, 40, 40-A, 40-B, 40-C |
| External pharmaceuticals, miscellaneous (U.S.P. or N.F.) | .249 | 23-A, 25, 25-A, 38-B |
| Fluid uses, miscellaneous | .750 | 1, 3-A, 23-A, 30 |
| Food products, miscellaneous (processing) | .332 | 1, 2-B, 3-A, 13-A, 23-A, 30, 32, 35-A |
| Fuel uses, miscellaneous | .630 | 1, 3-A, 28-A |
| Fuels, airplane and supplementary | .612 | 1, 3-A, 28-A |
| Fuels, automobile and supplementary | .611 | 1, 3-A, 28-A |
| Fuels, proprietary heating | .620 | 1, 3-A, 28-A |
| Fuels, rocket and jet | .613 | 1, 3-A, 28-A |
| Fungicides | .410 | 1, 3-A, 3-B, 23-A, 23-H, 27-A, 27-B, 30, 37, 38-B, 39-B, 40, 40-A, 40-B, 40-C |
| Glandular products (processing) | .342 | 1, 2-B, 3-A, 12-A, 13-A, 23-A, 30, 32, 35-A |
| Hair and scalp preparations | .111 | 3-B, 23-A, 23-F, 23-H, 37, 38-B, 39, 39-A, 39-B, 39-C, 39-D, 40, 40-A, 40-B, 40-C |
| Hormones (processing) | .342 | 1, 2-B, 3-A, 12-A, 13-A, 23-A, 30, 32, 35-A |

*Other products or processes may be authorized by the Director of the Bureau of Alcohol, Tobacco and Firearms, Department of the Treasury, Washington, D.C. Uses of Specially Denatured Alcohol—27 CFR 212.105

(continued)

Table 6.40: (continued)

| PRODUCT OR PROCESS | CODE NO. | FORMULAS AUTHORIZED |
|--------------------------------------------------------|----------|-------------------------------------------------------------------------------|
| Incense | 470 | 3-A, 22, 37, 38-B, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Inks | .052 | 1, 3-A, 13-A, 23-A, 30, 32, 33 |
| Inks (including meat branding) | .052 | 23-A, 32 |
| Insecticides | 410 | 1, 3-A, 3-B, 23-A, 23-H, 27-A, 27-B, 30, 37, 38-B, 39-B, 40, 40-A, 40-B, 40-C |
| Iodine solutions (including U.S.P. and N.F. tinctures) | 230 | 25, 25-A |
| Laboratory reagents (for sale) | 810 | 3-A, 30 |
| Laboratory uses | 810 | 3-A, 30 |
| Lacquer thinners | .042 | 1, 23-A |
| Liniments (U.S.P. or N.F.) | 243 | 27, 27-B, 38-B |
| Lotions and creams (body, face, and hand) | 113 | 23-A, 23-H, 31-A, 37, 38-B, 39, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Medicinal chemicals (processing) | 344 | 1, 2-B, 2-C, 3-A, 12-A, 13-A, 17, 23-A, 30, 32, 35-A |
| Miscellaneous chemicals (processing) | 358 | 1, 2-B, 2-C, 3-A, 12-A, 13-A, 17, 23-A, 30, 35-A |
| Miscellaneous products (processing) | 359 | 1, 2-B, 2-C, 3-A, 12-A, 13-A, 17, 23-A, 30, 35-A |
| Mouth washes | 132 | 37, 38-B, 38-C, 38-D, 38-F |
| Organo-silicone products | 576 | 2-B, 3-A |
| Pectin (processing) | 331 | 1, 2-B, 3-A, 13-A, 23-A, 30, 35-A |
| Perfume materials (processing) | 352 | 1, 2-B, 3-A, 12-A, 13-A, 30 |
| Perfumes and perfume tinctures | 121 | 38-B, 39, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Petroleum products | 320 | 1, 2-B, 3-A |
| Photoengraving dyes and solutions | 481 | 1, 3-A, 13-A, 30, 32 |
| Photographic chemicals (processing) | 353 | 1, 2-B, 3-A, 13-A, 30 |
| Photographic film and emulsions | 031 | 1, 2-B, 3-A, 13-A, 19, 30, 32 |
| Pill and tablet manufacture | 349 | 1, 2-B, 3-A, 13-A, 23-A, 30, 35-A, 38-B |
| Plastics, cellulose | 021 | 1, 2-B, 3-A, 12-A, 13-A, 30 |
| Plastics, non-cellulose (including resins) | 022 | 1, 2-B, 3-A, 12-A, 13-A, 30 |
| Polishes | 051 | 1, 3-A, 30, 40, 40-A, 40-B, 40-C |
| Preserving solutions | 430 | 1, 3-A, 12-A, 13-A, 22, 23-A, 30, 32, 37, 38-B, 42, 44 |
| Proprietary solvents (standard formulas) | 041 | 1 |
| Refrigerating uses | 740 | 1, 3-A, 23-A, 30 |
| Resin coatings, natural | 014 | 1, 23-A |
| Resin coatings, synthetic | 012 | 1, 23-A, 30 |
| Resins, synthetic | 590 | 3-A, 29, 30, 35-A |
| Room deodorants | 470 | 3-A, 22, 37, 38-B, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Rosin (processing) | 354 | 1, 3-A, 12-A |
| Rotogravure dyes and solutions | 481 | 1, 3-A, 13-A, 30, 32 |
| Rubber (latex) (processing) | 355 | 1, 3-A |
| Rubber, synthetic | 580 | 29, 32 |
| Rubbing alcohol | 220 | 23-H |
| Scientific instruments | 710 | 1, 3-A |
| Shampoos | 141 | 1, 3-A, 3-B, 23-A, 27-B, 31-A, 36, 38-B, 39-A, 39-B, 40, 40-A, 40-B, 40-C |
| Shellac coatings | 013 | 1, 23-A |
| Soaps, industrial | 440 | 1, 3-A, 23-A, 30 |
| Soaps, toilet | 142 | 1, 3-A, 3-B, 23-A, 30, 36, 38-B, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Sodium ethylate, anhydrous (restricted) | 524 | 2-B |
| Sodium hydrosulfite (dehydraticn) | 312 | 1, 2-B, 3-A |
| Soldering flux | 035 | 1, 3-A, 23-A, 30 |
| Solutions, miscellaneous | 485 | 1, 3-A, 23-A, 30, 39-B, 40, 40-A, 40-B, 40-C |
| Solvents and thinners, miscellaneous | 042 | 1, 23-A |
| Solvents, special (restricted sale) | 043 | 1, 3-A |
| Stains (wood) | 053 | 1, 3-A, 23-A, 30 |
| Sterilizing solutions | 430 | 1, 3-A, 12-A, 13-A, 22, 23-A, 30, 32, 37, 38-B, 42, 44 |
| Theater sprays | 470 | 3-A, 22, 37, 38-B, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Tobacco sprays and flavors | 460 | 4 |
| Toilet waters | 122 | 38-B, 39, 39-A, 39-B, 39-C, 40, 40-A, 40-B, 40-C |
| Transparent sheetings | 032 | 1, 2-B, 3-A, 13-A, 23-A |
| Unclassified uses | 900 | 1, 3-A |
| Vaccine (processing) | 343 | 1, 2-B, 3-A, 12-A, 13-A, 23-A, 30, 32, 35-A |
| Vinegar | 511 | 18, 29, 35-A |
| Vitamins (processing) | 342 | 1, 2-B, 3-A, 12-A, 13-A, 23-A, 30, 32, 35-A |
| Xanthates | 573 | 1, 2-B, 2-C, 29 |
| Yeast (processing) | 342 | 1, 2-B, 3-A, 12-A, 13-A, 23-A, 30, 32, 35-A |

*Other products or processes may be authorized by the Director of the Bureau of Alcohol, Tobacco and Firearms, Department of the Treasury, Washington, D.C. Uses of Specially Denatured Alcohol—27 CFR 212.105

Table 6.41: Filmex Special Industrial Solvent Formulations (30)

Quantum's Filmex Solvents are typically used in flexographic printing for cleaning equipment, formulating and thinning inks and in producing rotogravure etchings; in the textile industry to promote adhesion, improve dye penetration and to soften fibers; in chemical and pharmaceutical processing; and in chemical specialties production, such as latex coagulants and lacquers, among others.

| Code # | Proof | Formulation |
|----------------------------------------------------|-------|-------------------------------------------------------------------------------------------------|
| To every 100 gallons of ethyl alcohol, add: | | |
| Filmex A-1 | 190 | 5.0 gal. methyl alcohol 1.05 gal. methyl isobutyl ketone 10.5 lbs isopropyl alcohol, 99% |
| Filmex A-2 | 190 | 15.5 gal. methyl alcohol 1.05 gal. methyl isobutyl ketone |
| Filmex B | 190 | 10.25 gal. methyl alcohol 1.05 gal. methyl isobutyl ketone 5.25 lbs isobutyl alcohol, 99% |
| Filmex C | 190 | 5.0 gal. methyl alcohol 4.46 gal. ethyl acetate, 99% 1.05 gal. methyl isobutyl ketone |
| Filmex D-1 | 190 | 5.0 gal. methyl alcohol 1.05 gal. methyl isobutyl ketone 15.75 lb isopropyl alcohol, 99% |
| Filmex D-2 | 190 | 20.75 gal. methyl alcohol 1.05 gal. methyl isobutyl ketone |

Filmex Solvents are also available in 200° (anhydrous) formulations.

Table 6.42: Completely Denatured Alcohol (CDA) Formulations (30)

| CDA | Proof | Formulation | Applications |
|----------------------------------------------------|-------|---------------------------------------------------------------------------|--------------------------------------------------------------------------|
| To every 100 gallons of ethyl alcohol, add: | | | |
| CDA 19-1 | 190 | 4.0 gal. methyl isobutyl ketone 1.0 gal. kerosene, odorless | Cleaning fluids, antifreeze, thinners, detergents, brake fluids |
| CDA 19-3 | 190 | 4.0 gal. methyl isobutyl ketone 1.0 gal. rubber hydrocarbon solvent | Cleaning fluids, antifreeze, thinner, detergents, brake fluids |
| CDA 19-3 | 200 | 4.0 gal. methyl isobutyl ketone 1.0 gal. rubber hydrocarbon solvent | Cleaning fluids, detergents, antifreeze, thinners, brake fluids |

Table 6.43: Proprietary Solvent Formulations (30)

| Code # | Formulation | Applications |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Propolv I-1 | 100 gal. SDA 1-1 (190° or 200°) 1.0 gal. rubber hydrocarbon solvent 4.25 gal. ethyl acetate | Shellac, chemical specialties, latex coagulants |
| Propolv I-2 | 100 gal. SDA 1-2 (190° or 200°) 1.0 gal. rubber hydrocarbon solvent 4.25 gal. ethyl acetate | Shellac, chemical specialties, latex coagulants |
| Propolv III-1 | 100 gal. SDA 1-1 (190° or 200°) 1.0 gal. methyl isobutyl ketone 1.0 gal. rubber hydrocarbon solvent 0.87 gal. ethyl acetate | Shellac, chemical specialties, latex coagulants |
| Propolv III-2 | 100 gal. SDA 1-2 (190° or 200°) 1.0 gal. methyl isobutyl ketone 0.87 gal. ethyl acetate 1.0 gal. rubber hydrocarbon solvent | Shellac, chemical specialties, latex coagulants |

Table 6.44: Punctilious Specially Denatured Alcohol (SDA) Formulations (30)

| SDA | Formulation | Applications | SDA | Formulation | Applications |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| | To 100 gallons of 190° ethyl alcohol or, for anhydrous products, 200°, add: | | | To 100 gallons of 190° ethyl alcohol or, for anhydrous products, 200°, add: | |
| SDA 1-1 | 0.125 oz. Bitrex 4.0 gal. methanol | Coatings, solvents | SDA 35A-1 | 4.25 gal. ethyl acetate, 99% | Animal feed supplement, pill and tablet manufacturing |
| SDA 1-2 | 4.0 gal. methanol 1.0 gal. methyl isobutyl ketone | Miscellaneous chemical manufacture | SDA 37 | 1.25 lb. menthol, natural 45.0 fl. oz. eucalyptol 30.0 av.oz. thymol | Pharmaceuticals, mouthwashes, antiseptic solutions |
| SDA 2B-2 | 0.50 gal. rubber hydrocarbon solvent | Pharmaceuticals, agricultural chemicals | SDA 38B | 10.0 lb. of any denaturant approved by the ATF for SDA 38B or any combination of approved denaturants adding up to 10.0 lbs. | Fragrances, toiletries, disinfectants, pharmaceuticals |
| SDA 2B-3 | 0.50 gal. toluene | Cosmetics and toiletries | SDA 38F | 10.0 lb. of any denaturant approved by the ATF for SDA 38F or any combination of approved denaturants adding up to 10.0 lbs. | Pharmaceuticals, mouthwashes |
| SDA 2B-4 | 0.50 gal. Shell Solvent B | Plastics | SDA 39B | 2.5 gal. diethyl phthalate, odorless 0.125 gal. t-butyl alcohol | Detergents, coatings, fungicides, pharmaceuticals |
| SDA 3A | 5.0 gal. methanol | Chemical specialties | SDA 39 | 1.0 gal. diethyl phthalate, odorless or 1.0 gal. diethyl phthalate, regular | Fragrances |
| SDA 3C | 5.0 lb. isopropyl alcohol | Chemical intermediates | SDA 40-1 | 1.5 oz. brucine alkaloid 0.125 gal. t-butyl alcohol | Flavors and fragrances, hair sprays, disinfectants, insecticides, dye solutions |
| SDA 4 | 0.0022 lb. methylene blue 0.05 lb. nicotine, 40% soln 0.95 gal. water | Tobacco sprays | SDA 40-2 | 1.5 oz. brucine sulfate 0.125 gal. t-butyl alcohol | Flavors and fragrances, hair sprays, disinfectants, insecticides, dye solutions |
| SDA 12A-3 | 5.0 gal. toluene | Chemical specialties | SDA 40A | 1.0 lb. sucrose octa-acetate 0.125 gal. t-butyl alcohol | Fragrances |
| SDA 13A | 10 gal. ethyl ether, USP | Miscellaneous chemical manufacture | SDA 40B | 0.0625 oz. Bitrex 0.125 gal. t-butyl alcohol | Fragrances, cleaning solutions, household detergents, fungicides, polishes |
| SDA 19 | 100 gal. ethyl ether, USP | Miscellaneous chemical manufacture | SDA 40C | 3.0 gal. t-butyl alcohol | Fragrances |
| SDA 23A | 8.0 gal. acetone | External pharmaceuticals | SDA 45 | 300.0 lb. shellac | Candy glazes |
| SDA 23H | 8.0 gal. acetone 1.5 gal. methyl isobutyl ketone | Pharmaceuticals and disinfectants | Reagent | 5.0 gal. methyl alcohol | Chemical reagents |
| SDA 25-1 | 20.0 lb. iodine 15.0 lb. potassium iodide | Pharmaceuticals | Rubbing Alcohol | 5.53 lb. isopropyl alcohol, 99% | |
| SDA 25-2 | 20.0 lb. iodine 15.0 lb. sodium iodide | Pharmaceuticals | Rubbing Alcohol Base | 0.27 oz. Bitrex 8.0 gal. acetone 1.5 gal. methyl isobutyl ketone | Rubbing alcohol |
| SDA 25A-1 | 20.0 lb. iodine 15.0 lb. potassium iodide 15.0 lb. water | Pharmaceuticals | Rubbing Alcohol Concentrate | 0.27 oz. Bitrex 0.003 lb. menthol racemic 8.0 gal. acetone 1.5 gal. methyl isobutyl ketone | Rubbing alcohol |
| SDA 25A-2 | 20.0 lb. iodine 15.0 lb. sodium iodide 15.0 lb. water | Pharmaceuticals | | | |
| SDA 29-3 | 1.0 gal. ethyl acetate, 99% (ATF may approve other denaturants provided that amounts are not less than 6.8 lbs. of solid or 1.0 gal. of liquid/100 gal. ethyl alcohol) | Vinegar and other products | | | |
| SDA 30 | 10.0 gal. methanol | Miscellaneous chemicals, solvents and drugs | | | |
| SDA 32 | 5.0 gal. ethyl ether | Solvents, extractants, chemical specialties | | | |

*Not all SDAs. Formulations or applications can be presented here. For further information, contact your Quantum chemicals sales representative.

Table 6.45: Composition and Typical End Uses of Specially Denatured Alcohols (30)

| Specially Denatured Alcohol (SDA) | Ethanol ⁽¹⁾ | Acetone N.F. | Methanol | Methyl Isobutyl Ketone | Isopropanol | t-Butanol | Ethyl Acetate | Toluene ⁽⁴⁾ |
|-----------------------------------|------------------------|--------------|----------|------------------------|-------------|-----------|---------------|------------------------|
| SDA 1 | 100 gal | | 4 gal | 1 gal | | | | |
| SDA 2B | 100 gal | | | | | | | 0.5 gal |
| SDA 3A | 100 gal | | 5 gal | | | | | |
| SDA 3C | 100 gal | | | | 5 gal | | | |
| SDA 23A | 100 gal | 8 gal | | | | | | |
| SDA 23H | 100 gal | 8 gal | | 1.5 gal | | | | |
| SDA 29 ⁽²⁾ | 100 gal | | | | | | 1 gal | |
| SDA 30 | 100 gal | | 10 gal | | | | | |
| SDA 35A | 100 gal | | | | | | 4.25 gal | |
| SDA 37 ⁽³⁾ | 100 gal | | | | | | | |
| SDA 38B ⁽³⁾ | 100 gal | | | | | | | |
| SDA 38E ⁽³⁾ | 100 gal | | | | | | | |
| SDA 39C | 100 gal | | | | | | | |
| SDA 40-2 | 100 gal | | | | | 0.125 gal | | |
| SDA 40B | 100 gal | | | | | 0.125 gal | | |

| Specially Denatured Alcohol (SDA) | Diethyl Phthalate | Oils and Substances | Brucine Sulfate | Bitrex | Applications ⁽⁶⁾ |
|-----------------------------------|-------------------|---------------------|-----------------|--------------|---------------------------------------------------------------------------------|
| SDA 1 | | | | | Solvent for coatings, adhesives, thinner, polishes. |
| SDA 2B | | | | | Solvent for processing food products, antibiotics and vaccines and dyes. |
| SDA 3A | | | | | Solvent for soap and bath preparations, latex processing, proprietary solvents. |
| SDA 3C | | | | | Solvent for shampoos, stains, processing food products, and cleaning solutions. |
| SDA 23A | | | | | Solvent for lotions and creams, soaps, antiseptic solutions, processing foods. |
| SDA 23H | | | | | Solvent for external pharmaceuticals, disinfectants, cleaning solutions. |
| SDA 29 ⁽²⁾ | | | | | Vinegar manufacture, ethyl ether and ethylamines production. |
| SDA 30 | | | | | Solvent for industrial detergents and soaps, dye solutions. |
| SDA 35A | | | | | Solvent for candy glazes, processing antibiotics, animal feed supplements. |
| SDA 37 ⁽³⁾ | | (5) | | | Mouthwashes, antiseptic solutions, USP or NF, room deodorants. |
| SDA 38B ⁽³⁾ | | 10 lb | | | Mouthwashes, deodorants, perfumes, soap and bath preparations. |
| SDA 38E ⁽³⁾ | | 10 lb | | | Mouthwashes, antiseptic solutions. |
| SDA 39C | 1 gal | | | | Lotions and creams, perfumes, soap and bath preparations. |
| SDA 40-2 | | | 1.5 av. oz | | Hair preparations, lotions and creams, shampoos. |
| SDA 40B | | | | 0.063 av. oz | Hair preparations, lotions, and creams, shampoos. |

(1) 190 and 200 proof formulations available
 (2) Or permissible materials approved by BATF
 (3) Denaturants may need to be supplied by customer
 (4) Or rubber hydrocarbon solvent
 (5) 45 fl oz eucalyptol, NF; 30 av oz thymol, NF; and 20 av oz menthol, USP
 (6) For a more complete listing, see Codes of Federal Regulations, Vol 27, Part 21

Table 6.46: Composition of Completely Denatured Alcohol (CDA) (19)

| Completely Denatured Alcohol (CDA) | Ethanol ⁽¹⁾ | Methyl Isobutyl Ketone | Rubber Hydrocarbon Solvent |
|------------------------------------|------------------------|------------------------|----------------------------|
| CDA 19 | 100 gal | 4 gal | 1 gal |

Table 6.47: Composition of Synasol Proprietary Solvents, Anhydrol Special Industrial Solvents, and Inksolv Ink Solvents (19)

| SYNASOL® Solvents | Ethanol | Methanol | Isopropanol | Methyl Isobutyl Ketone | Ethyl Acetate | n-Propyl Acetate | Approved Hydrocarbon |
|----------------------------------------|----------------------------|----------|-------------|------------------------|---------------|------------------|----------------------|
| PM-41 | SDA 1, 190 Proof, 100 gal | | | | 5 gal | | 1 gal |
| PM-100 | SDA 1, 200 Proof, 100 gal | | | | 5 gal | | 1 gal |
| PM-3224 | SDA 1, 190 Proof, 100 gal | | | 1 gal | 1 gal | | 1 gal |
| PM-509 | SDA 1, 200 Proof, 100 gal | | | 1 gal | 1 gal | | 1 gal |
| ANHYDROL® Solvents | | | | | | | |
| PM-4079 | SDA 3A, 190 Proof, 100 gal | 10 gal | | 1 gal | | | |
| PM-4083 | SDA 3A, 200 Proof, 100 gal | 10 gal | | 1 gal | | | |
| PM-4078 | SDA 3A, 190 Proof, 100 gal | 15 gal | | 1 gal | | | |
| PM-4217 | SDA 3A, 200 Proof, 100 gal | 15 gal | | 1 gal | | | |
| PM-4081 | SDA 3A, 190 Proof, 100 gal | | 10 gal | 1 gal | | | |
| PM-4082 | SDA 3A, 200 Proof, 100 gal | | 10 gal | 1 gal | | | |
| PM-4080 | SDA 3A, 190 Proof, 100 gal | | 15 gal | 1 gal | | | |
| PM-4176 | SDA 3A, 200 Proof, 100 gal | | 15 gal | 1 gal | | | |
| PM-4085 | SDA 3A, 190 Proof, 100 gal | | | 1 gal | 5 gal | | |
| PM-4084 | SDA 3A, 200 Proof, 100 gal | | | 1 gal | 5 gal | | |
| PM-4157 | SDA 3A, 190 Proof, 100 gal | 5 gal | 5 gal | 1 gal | | | |
| PM-4135 | SDA 3A, 200 Proof, 100 gal | 5 gal | 5 gal | 1 gal | | | |
| INKSOLV® Solvents⁽¹⁾ | | | | | | | |
| PM-6127 | SDA 3A, 190 Proof, 85 gal | 14 gal | | | | 1 gal | |
| PM-6129 | SDA 3A, 200 Proof, 85 gal | 14 gal | | | | 1 gal | |
| PM-6118 | SDA 3A, 200 Proof, 89 gal | 10 gal | | | | 1 gal | |
| PM-6193 | SDA 3C, 200 Proof, 89 gal | | 10 gal | | | 1 gal | |
| PM-6264 | SDA 3C, 200 Proof, 95 gal | | | | | 5 gal | |

(1) Additional non-methanol-containing formulas may be available on request

Table 6.48: Typical Physical Properties (19)

| Product | Relative Evaporation Rate (BuAc=100) | Average Wt/gal at 60°F, lb | Δ lb/gal /Δ°F at 50-86°F | Coefficient of Expansion, per °C | | Flash Point, Closed Cup, °F °C | | ASTM Distillation at 760 mm Hg, °C |
|-------------------------------------------|--------------------------------------|----------------------------|--------------------------|----------------------------------|---------|--------------------------------|----|------------------------------------|
| INKSOLV® Solvents | | | | | | | | |
| PM-6118 | 380 | 6.62 | 0.00399 | 0.00109 | 0.00113 | 57 | 14 | — |
| PM-6127 | 390 | 6.77 | 0.00401 | 0.00107 | 0.00111 | 62 | 17 | — |
| PM-6129 | 400 | 6.62 | 0.00403 | 0.00110 | 0.00114 | 59 | 15 | — |
| PM-6193 | 280 | 6.62 | 0.00393 | 0.00107 | 0.00112 | 58 | 14 | — |
| PM-6264 | 330 | 6.65 | 0.00401 | 0.00109 | 0.00113 | 55 | 13 | — |
| ANHYDROL® Solvents | | | | | | | | |
| PM-1473 | 210 | 6.77 | 0.00402 | 0.00107 | 0.00112 | 61 | 16 | 75.5-80.5 |
| PM-1474 | 210 | 6.62 | 0.00402 | 0.00110 | 0.00114 | 55 | 13 | 75.5-80.5 |
| PM-4081 | 320 | 6.76 | 0.00402 | 0.00108 | 0.00112 | 61 | 16 | 77.0-80.5 |
| PM-4082 | 200 | 6.60 | 0.00398 | 0.00109 | 0.00113 | 57 | 14 | 77.0-80.5 |
| PM-4079 | 360 | 6.77 | 0.00402 | 0.00107 | 0.00111 | 60 | 16 | 75.0-80.0 |
| PM-4083 | 380 | 6.62 | 0.00402 | 0.00110 | 0.00114 | 58 | 14 | 74.0-80.0 |
| PM-4157 | 330 | 6.74 | 0.00402 | 0.00108 | 0.00112 | 60 | 16 | 76.0-81.0 |
| PM-4135 | 350 | 6.61 | 0.00402 | 0.00110 | 0.00114 | 56 | 13 | 76.0-80.0 |
| PM-4085 | 370 | 6.81 | 0.00412 | 0.00109 | 0.00113 | 55 | 13 | 76.0-80.0 |
| PM-4084 | 360 | 6.66 | 0.00412 | 0.00112 | 0.00116 | 53 | 12 | 75.0-79.0 |
| PM-4080 | 330 | 6.75 | 0.00402 | 0.00107 | 0.00112 | 62 | 17 | 76.5-80.5 |
| PM-4176 | 350 | 6.63 | 0.00398 | 0.00108 | 0.00113 | 58 | 14 | 77.0-82.0 |
| PM-4078 | 370 | 6.76 | 0.00407 | 0.00109 | 0.00113 | 58 | 14 | 74.0-79.0 |
| PM-4217 | 380 | 6.62 | 0.00407 | 0.00111 | 0.00116 | 55 | 13 | 74.0-79.0 |
| SYNASOL® Solvents | | | | | | | | |
| PM-0041 | 350 | 6.80 | 0.00413 | 0.00110 | 0.00114 | 53 | 12 | 74.5-79.5 |
| PM-0100 | 410 | 6.66 | 0.00410 | 0.00111 | 0.00116 | 47 | 8 | 74.5-79.5 |
| PM-3224 | 360 | 6.78 | 0.00406 | 0.00108 | 0.00118 | 57 | 14 | 74.5-79.5 |
| PM-0509 | 360 | 6.62 | 0.00406 | 0.00111 | 0.00120 | 51 | 11 | 74.5-79.5 |
| Completely Denatured Alcohol (CDA) | | | | | | | | |
| Ethanol CD-19 | | | | | | | | |
| 190 Proof | 290 | 6.79 | 0.00407 | 0.00109 | 0.00113 | 54 | 12 | 76.0-82.0 |
| 200 Proof | 330 | 6.61 | 0.00402 | 0.00110 | 0.00114 | 51 | 11 | 76.0-82.0 |
| Specially Denatured Alcohol (SDA) | | | | | | | | |
| Ethanol SDA-2B | | | | | | | | |
| 190 Proof | 300 | 6.80 | 0.00394 | 0.00105 | 0.00109 | 58 | 14 | 77.0-80.0 |
| 200 proof | 330 | 6.61 | 0.00395 | 0.00107 | 0.00113 | 55 | 13 | 77.0-80.0 |
| Ethanol SDA-3A | | | | | | | | |
| 190 Proof | 320 | 6.78 | 0.00403 | 0.00107 | 0.00112 | 62 | 17 | 76.0-80.0 |
| 200 Proof | 360 | 6.62 | 0.00398 | 0.00110 | 0.00111 | 56 | 13 | 76.0-80.0 |
| Ethanol SD-4 | | | | | | | | |
| 190 Proof | 290 | 6.82 | 0.00403 | 0.00107 | 0.00111 | 63 | 17 | — |
| Ethanol SD-23A | | | | | | | | |
| 190 Proof | 370 | 6.78 | 0.00412 | 0.00111 | 0.00115 | 44 | 7 | — |
| 200 Proof | 410 | 6.63 | 0.00416 | 0.00113 | 0.00121 | 37 | 3 | — |
| Ethanol SD-23H | | | | | | | | |
| 190 Proof | 390 | 6.78 | 0.00416 | 0.00111 | 0.00115 | 55 | 13 | — |
| Ethanol SD-29H | | | | | | | | |
| 190 Proof | 290 | 6.80 | 0.00401 | 0.00107 | 0.00111 | 63 | 17 | — |
| 200 Proof | 340 | 6.62 | 0.00396 | 0.00108 | 0.00112 | 57 | 14 | — |
| Ethanol SD-29E | | | | | | | | |
| 190 Proof | 290 | 6.79 | 0.00402 | 0.00107 | 0.00111 | 60 | 16 | 76.0-79.0 |
| Ethanol SD-30 | | | | | | | | |
| 190 Proof | 330 | 6.78 | 0.00403 | 0.00107 | 0.00112 | 60 | 16 | 76.0-80.0 |
| 200 Proof | 370 | 6.62 | 0.00398 | 0.00109 | 0.00113 | 59 | 15 | 76.0-80.0 |
| Ethanol SD-35A | | | | | | | | |
| 190 Proof | 310 | 6.83 | 0.00410 | 0.00109 | 0.00113 | 57 | 14 | 76.0-79.0 |
| 200 Proof | 340 | 6.66 | 0.00407 | 0.00111 | 0.00115 | 52 | 11 | 76.0-79.0 |

(continued)

Table 6.48: (continued)

| Product | Relative Evaporation Rate (BuAc=100) | Average Wt/gal at 60°F, lb | Δ lb/gal / Δ °F at 50-86°F | Coefficient of Expansion, per °C | | Flash Point, Closed Cup, °F °C | | ASTM Distillation at 760 mm Hg, °C |
|-----------------------------|--------------------------------------|----------------------------|------------------------------------------|----------------------------------|---------|--------------------------------|----|------------------------------------|
| | | | | at 20°C | at 55°C | | | |
| Ethanol SD-37 190 Proof | 280 | 6.79 | 0.00402 | 0.00107 | 0.00111 | 61 | 16 | — |
| Ethanol SD-38B 190 Proof | 300 | 6.80 | 0.00399 | 0.00106 | 0.00110 | 63 | 17 | — |
| Ethanol SD-38F 190 Proof | 280 | 6.83 | 0.00402 | 0.00107 | 0.00111 | 63 | 17 | — |
| Ethanol SD-39C 190 Proof | 300 | 6.81 | 0.00403 | 0.00107 | 0.00111 | 61 | 16 | 76.0-80.0 |
| 200 Proof | 330 | 6.62 | 0.00398 | 0.00107 | 0.00111 | 57 | 14 | 76.0-80.0 |
| Ethanol SD-40 190 Proof | 290 | 6.79 | 0.00401 | 0.00107 | 0.00111 | 61 | 16 | 77.0-80.0 |
| 200 Proof | 330 | 6.62 | 0.00402 | 0.00110 | 0.00114 | 58 | 14 | 77.0-80.0 |
| Ethanol SD-40A 190 Proof | 290 | 6.79 | 0.00402 | 0.00107 | 0.00111 | 62 | 17 | — |
| 200 Proof | 310 | 6.62 | 0.00397 | 0.00109 | 0.00113 | 58 | 14 | — |
| Ethanol SD-40B 190 Proof | 300 | 6.79 | 0.00400 | 0.00107 | 0.00111 | 62 | 17 | 77.0-80.0 |
| 200 Proof | 330 | 6.61 | 0.00396 | 0.00108 | 0.00116 | 57 | 14 | 77.0-80.0 |
| Ethanol SD-40C 200 Proof | 330 | 6.61 | 0.00395 | 0.00108 | 0.00112 | 59 | 15 | 77.0-80.0 |
| Pure Alcohols | | | | | | | | |
| 190 Proof | 300 | 6.79 | 0.00403 | 0.00107 | 0.00111 | 62 | 17 | 78.2 |
| 200 Proof | 330 | 6.61 | 0.00398 | 0.00109 | 0.00113 | 58 | 14 | 78.3 |

Table 6.49: Densities of Pure Ethanol-Water Mixtures at Various Temperatures (19)

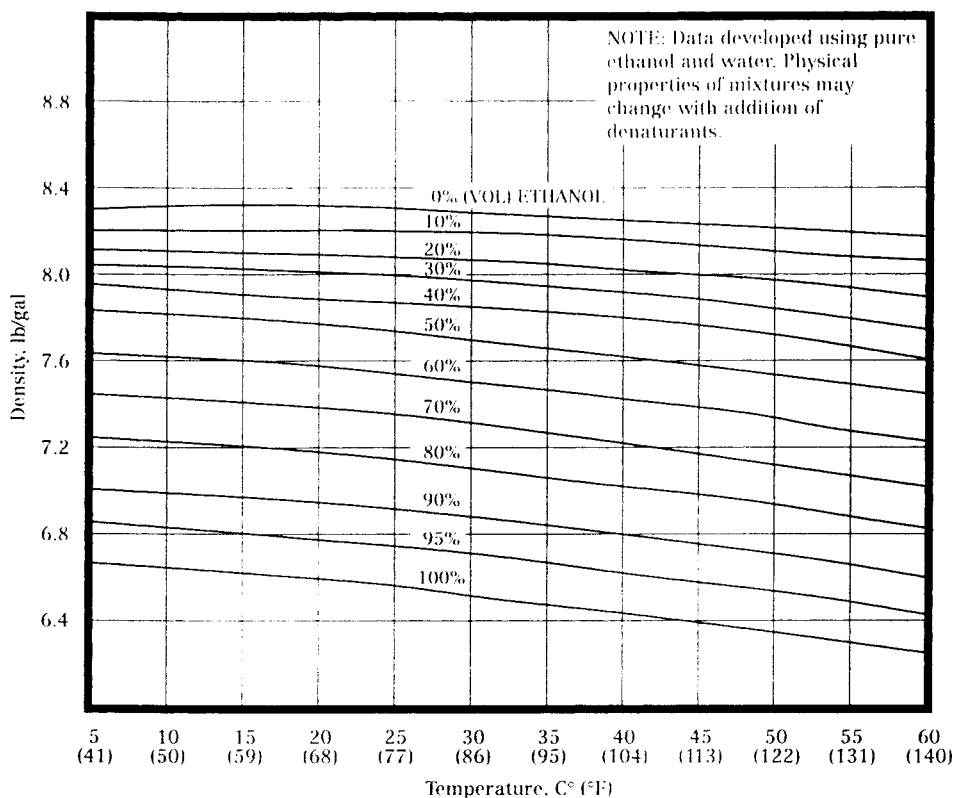


Table 6.50: Vapor Pressure of Pure Ethanol at Various Temperatures (19)

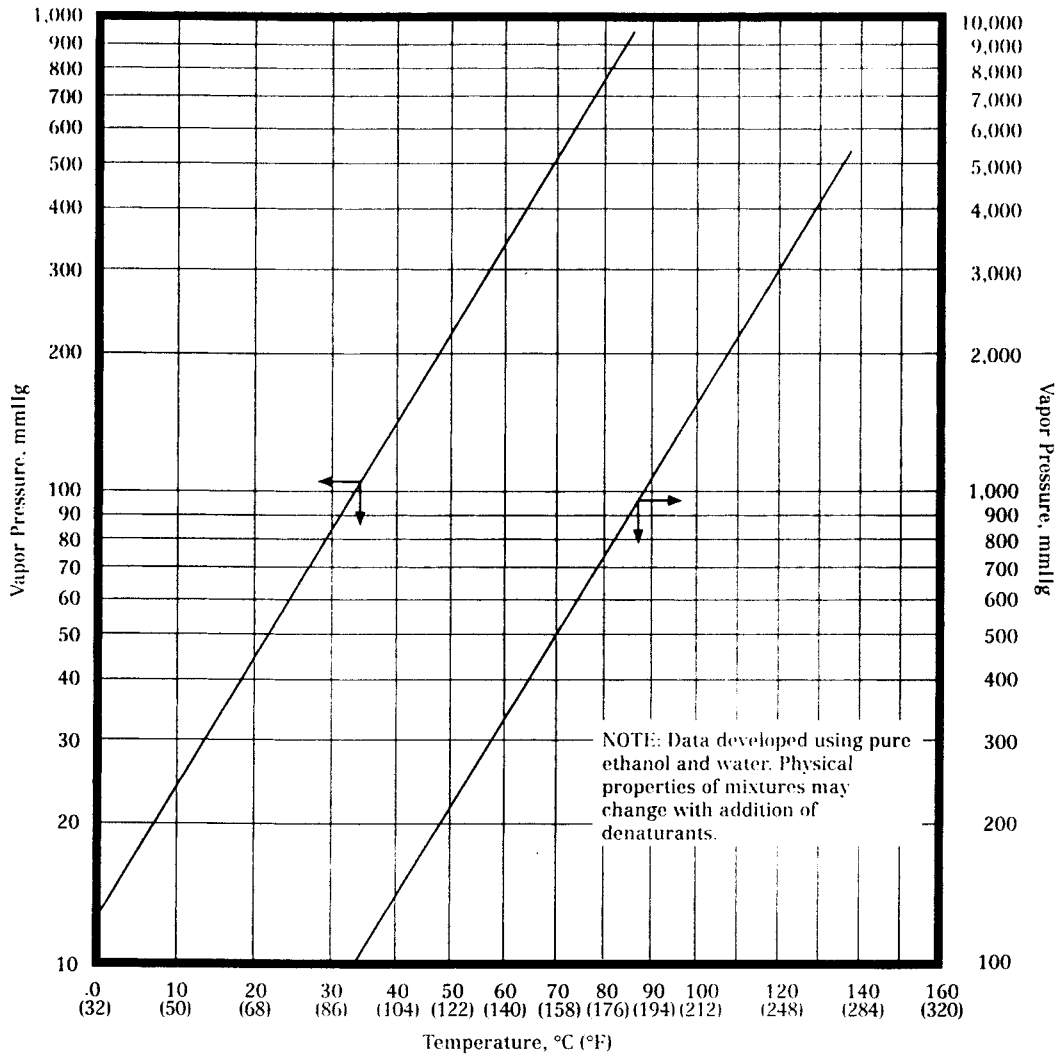


Table 6.51: Constant Boiling Mixtures (19)

| COMPONENTS | | | AZEOTROPE | | |
|-------------------------|-----------------------------|--------------------------------|--------------------------------|-----------------------------------|-----------------------------------------|
| Compound ⁽¹⁾ | Specific Gravity at 20/20°C | Boiling point at 760 mm Hg, °C | Boiling Point at 760 mm Hg, °C | Composition in Azeotrope, % by wt | Sp Gr of Azeotrope or Layers at 20/20°C |
| Ethanol | 0.7905 | 78.3 | 42.4 | 9.0 | 1.197 |
| Carbon Disulfide | 1.2657 | 46.5 | | 91.0 | |
| Ethanol | 0.7905 | 78.3 | 41.3 | 5.0 | Homogeneous |
| Carbon Disulfide | 1.2657 | 46.5 | | 93.4 | |
| Water | 1.0000 | 100.0 | | 1.6 | |
| Ethanol | 0.7905 | 78.3 | 65.0 | 15.8 | 1.377 |
| Carbon Tetrachloride | 1.5875 | 76.5 | | 84.2 | |
| Ethanol | 0.7905 | 78.3 | 61.8 | 10.3 | U 0.935 L 1.519 |
| Carbon Tetrachloride | 1.5875 | 76.5 | | 86.3 | |
| Water | 1.0000 | 100.0 | | 3.4 | |
| Ethanol | 0.7905 | 78.3 | 59.4 | 7.0 | 1.403 |
| Chloroform | 1.4756 | 61.2 | | 93.0 | |
| Ethanol | 0.7905 | 78.3 | 55.5 | 4.0 | U 0.976 L 1.519 |
| Chloroform | 1.4756 | 61.2 | | 92.5 | |
| Water | 1.0000 | 100.0 | | 3.5 | |

(continued)

Table 6.51: (continued)

| COMPONENTS | | | AZEOTROPE | | |
|-------------------------|-----------------------------|--------------------------------|--------------------------------|-----------------------------------|-----------------------------------------|
| Compound ⁽¹⁾ | Specific Gravity at 20/20°C | Boiling point at 760 mm Hg, °C | Boiling Point at 760 mm Hg, °C | Composition in Azeotrope, % by wt | Sp Gr of Azeotrope or Layers at 20/20°C |
| Ethanol | 0.7905 | 78.3 | 62.6 | 19.7 | Homogeneous |
| Cyclohexane | 0.7797 | 80.7 | | 75.5 | |
| Water | 1.0000 | 100.0 | | 4.8 | |
| Ethanol | 0.7905 | 78.3 | 71.8 | 31.0 | 0.863 |
| Ethyl Acetate | 0.9018 | 77.2 | | 69.0 | |
| Ethanol | 0.7905 | 78.3 | 70.2 | 8.4 | 0.901 ⁽²⁾ |
| Ethyl Acetate | 0.9018 | 77.2 | | 82.6 | |
| Water | 1.0000 | 100.0 | | 9.0 | |
| Ethanol | 0.7905 | 78.3 | 71.0 | 33.5 | 1.049 |
| Ethylene Dichloride | 1.2556 | 83.5 | | 66.5 | |
| Ethanol | 0.7905 | 78.3 | 67.8 | 15.7 | U 0.941 |
| Ethylene Dichloride | 1.2556 | 83.5 | | 77.1 | L 1.167 |
| Water | 1.0000 | 100.0 | | 7.2 | |
| Ethanol | 0.7905 | 78.3 | 72 | 48.0 | 0.729 |
| Heptane | 0.6845 | 98.4 | | 52.0 | |
| Ethanol | 0.7905 | 78.3 | 68.8 | 33.0 | U 0.686 |
| Heptane | 0.6845 | 98.4 | | 60.9 | L 0.801 |
| Water | 1.0000 | 100.0 | | 6.1 | |
| Ethanol | 0.7905 | 78.3 | 58.7 | 21.0 | 0.687 |
| Hexane | 0.6601 | 68.7 | | 79.0 | |
| Ethanol | 0.7905 | 78.3 | 56 | 12.0 | U 0.672 |
| Heptane | 0.6601 | 68.7 | | 85.0 | L 0.833 |
| Water | 1.0000 | 100.0 | | 3.0 | |
| Ethanol | 0.7905 | 78.3 | 74.8 | 19.4 | 0.874 |
| Isopropyl Acetate | 0.8737 | 88.5 | | 70.8 | |
| Water | 1.0000 | 100.0 | | 9.8 | |
| Ethanol | 0.7905 | 78.3 | 64.0 | 17.1 | 0.741 |
| Isopropyl Ether | 0.7245 | 68.5 | | 82.9 | |
| Ethanol | 0.7905 | 78.3 | 61.0 | 6.5 | U 0.737 |
| Isopropyl Ether | 0.7245 | 68.5 | | 89.5 | L 0.967 |
| Water | 1.0000 | 100.0 | | 4.0 | |
| Ethanol | 0.7905 | 78.3 | 74.8 | 34.0 | 0.802 |
| Methyl Ethyl Ketone | 0.8061 | 79.6 | | 66.0 | |
| Ethanol | 0.7905 | 78.3 | 73.2 | 14.0 | 0.832 |
| Methyl Ethyl Ketone | 0.8061 | 79.6 | | 75.0 | |
| Water | 1.0000 | 100.0 | | 11.0 | |
| Ethanol | 0.7905 | 78.3 | 34.3 | 5.0 | |
| Pentane | 0.6269 | 36.1 | | 95.0 | |
| Ethanol | 0.7905 | 78.3 | 76.7 | 68.0 | 0.815 |
| Toluene | 0.8683 | 110.6 | | 32.0 | |
| Ethanol | 0.7905 | 78.3 | 74.4 | 37.0 | U 0.849 |
| Toluene | 0.8683 | 110.6 | | 51.0 | L 0.855 |
| Water | 1.0000 | 100.0 | | 12.0 | |
| Ethanol | 0.7905 | 78.3 | 70.9 | 27.0 | 1.197 |
| Trichloroethylene | 1.4655 | 87.1 | | 73.0 | |
| Ethanol | 0.7905 | 78.3 | 76.9 | 51.0 | 0.775 |
| Triethylamine | 0.7290 | 89.5 | | 49.0 | |
| Ethanol | 0.7905 | 78.3 | 74.7 | 15.0 | 0.774 |
| Triethylamine | 0.7290 | 89.5 | | 75.0 | |
| Water | 1.0000 | 100.0 | | 10.0 | |
| Ethanol (95 mm) | 0.7905 | 33.5 ⁽³⁾ | 33.4 ⁽³⁾ | 99.5 | 0.792 |
| Water | 1.0000 | 51.0 ⁽³⁾ | | 0.5 | |
| Ethanol | 0.7905 | 78.3 | 78.2 | 95.6 | 0.804 |
| Water | 1.0000 | 100.0 | | 4.4 | |
| Ethanol (3 atm) | 0.7905 | 109.0 ⁽³⁾ | 109.0 ⁽³⁾ | 95.2 | 0.805 |
| Water | 1.0000 | 134.0 ⁽³⁾ | | 4.8 | |

(1) The ethanol listed as a compound in this table is pure. Azeotropes vary with the addition of denaturants.

(2) At 25/20°C

(3) At the pressure investigated

NON-AZEOTROPES: In binary systems with ethanol and ternary systems with ethanol and water, these materials do not form azeotropes: Acetone, Butanol, 1,4-Dioxane, Ethyl Ether, Methanol, m-Xylene, o-Xylene, p-Xylene, Water-Methanol

Table 6.52: Proof Definitions and Conversion Factors (19)

Proof: The ethanol content of a liquid at 60°F (15.56°C) stated as twice the percent of ethanol by volume.
 Proof = 2 x volume percent ethanol in a liquid (at 60°F)

Apparent Proof: The equivalent of proof for ethanol solutions containing ingredients other than water (i.e., de-natured alcohol). Apparent proof is determined by specific gravity readings for ethanol–water mixtures at 60/60°F.

Proof Gallon: Amount of ethanol in one wine gallon of 100 proof alcohol at 60°F.
 Proof gallons = wine gallons at 60°F x 100/proof

Wine Gallon: A United States gallon of liquid measure equivalent to the volume of 231.2 cubic inches.
 1 Wine gallon = 231.2 cubic inches

Tax Gallon: The unit measure of spirits for the imposition of tax under section 5001, IRC. For spirits that are 100 degrees of proof or more when withdrawn from bond, the tax is determined on a proof gallon basis. When less than 100 degrees of proof, the tax is determined on a wine gallon basis. Table 6.53 covers ethanol–water compositions from 0 to 200 proof. Keep in mind that, because of the contraction that occurs when ethanol and water are mixed, 100 volumes of ethanol of the designated proof result from mixing the volumes of ethanol and water given in columns 2 and 4.

Table 6.53: Proof Conversion Tables (19)

| Proof at 60°F | Pure 200 Proof | | | | Proof at 60°F | Pure 200 Proof | | | |
|---------------|----------------------------------|------------------------------|--------------------------------|-----------------------------|---------------|----------------------------------|------------------------------|--------------------------------|-----------------------------|
| | Ethanol, Parts by Volume at 60°F | Ethanol, % by Weight at 60°F | Water, Parts by Volume at 60°F | Specific Gravity at 60/60°F | | Ethanol, Parts by Volume at 60°F | Ethanol, % by Weight at 60°F | Water, Parts by Volume at 60°F | Specific Gravity at 60/60°F |
| 0 | 0.0 | 0.00 | 100.00 | 1.0000 | 40 | 20.0 | 16.27 | 81.72 | 0.9759 |
| 1 | 0.5 | 0.39 | 99.53 | 0.9993 | 41 | 20.5 | 16.68 | 81.27 | 0.9754 |
| 2 | 1.0 | 0.80 | 99.06 | 0.9985 | 42 | 21.0 | 17.10 | 80.82 | 0.9749 |
| 3 | 1.5 | 1.19 | 98.58 | 0.9978 | 43 | 21.5 | 17.52 | 80.38 | 0.9744 |
| 4 | 2.0 | 1.59 | 98.12 | 0.9970 | 44 | 22.0 | 17.93 | 79.93 | 0.9739 |
| 5 | 2.5 | 1.99 | 97.65 | 0.9963 | 45 | 22.5 | 18.35 | 79.48 | 0.9734 |
| 6 | 3.0 | 2.39 | 97.18 | 0.9956 | 46 | 23.0 | 18.77 | 79.03 | 0.9729 |
| 7 | 3.5 | 3.79 | 96.71 | 0.9949 | 47 | 23.5 | 19.19 | 78.58 | 0.9724 |
| 8 | 4.0 | 3.19 | 96.24 | 0.9942 | 48 | 24.0 | 19.60 | 77.14 | 0.9719 |
| 9 | 4.5 | 3.60 | 95.78 | 0.9935 | 49 | 24.5 | 20.02 | 77.69 | 0.9713 |
| 10 | 5.0 | 4.00 | 95.31 | 0.9928 | 50 | 25.0 | 20.44 | 77.24 | 0.9708 |
| 11 | 5.5 | 4.40 | 94.85 | 0.9921 | 51 | 25.5 | 20.86 | 76.79 | 0.9703 |
| 12 | 6.0 | 4.80 | 94.39 | 0.9915 | 52 | 26.0 | 21.29 | 76.34 | 0.9697 |
| 13 | 6.5 | 5.21 | 93.93 | 0.9908 | 53 | 26.5 | 21.71 | 75.89 | 0.9692 |
| 14 | 7.0 | 5.61 | 93.46 | 0.9902 | 54 | 27.0 | 22.13 | 75.44 | 0.9687 |
| 15 | 7.5 | 6.02 | 93.01 | 0.9896 | 55 | 27.5 | 22.50 | 74.98 | 0.9681 |
| 16 | 8.0 | 6.42 | 92.55 | 0.9890 | 56 | 28.0 | 22.97 | 74.53 | 0.9676 |
| 17 | 8.5 | 6.83 | 92.09 | 0.9884 | 57 | 28.5 | 23.40 | 74.08 | 0.9670 |
| 18 | 9.0 | 7.23 | 91.63 | 0.9878 | 58 | 29.0 | 23.82 | 73.62 | 0.9664 |
| 19 | 9.5 | 7.64 | 91.18 | 0.9872 | 59 | 29.5 | 24.24 | 73.17 | 0.9659 |
| 20 | 10.0 | 8.05 | 90.72 | 0.9866 | 60 | 30.0 | 24.67 | 72.72 | 0.9653 |
| 21 | 10.5 | 8.45 | 90.27 | 0.9860 | 61 | 30.5 | 25.10 | 72.26 | 0.9647 |
| 22 | 11.0 | 8.86 | 89.81 | 0.9854 | 62 | 31.0 | 25.52 | 71.81 | 0.9641 |
| 23 | 11.5 | 9.27 | 89.36 | 0.9849 | 63 | 31.5 | 25.95 | 71.35 | 0.9635 |
| 24 | 12.0 | 9.68 | 88.90 | 0.9843 | 64 | 32.0 | 26.38 | 70.89 | 0.9629 |
| 25 | 12.5 | 10.09 | 88.45 | 0.9837 | 65 | 32.5 | 26.81 | 70.43 | 0.9623 |
| 26 | 13.0 | 10.50 | 88.00 | 0.9832 | 66 | 33.0 | 27.24 | 69.97 | 0.9617 |
| 27 | 13.5 | 10.91 | 87.55 | 0.9826 | 67 | 33.5 | 27.67 | 69.51 | 0.9619 |
| 28 | 14.0 | 11.32 | 87.10 | 0.9821 | 68 | 34.0 | 28.10 | 69.05 | 0.9604 |
| 29 | 14.5 | 11.73 | 86.65 | 0.9816 | 69 | 34.5 | 28.53 | 68.59 | 0.9597 |
| 30 | 15.0 | 12.14 | 86.20 | 0.9810 | 70 | 35.0 | 28.97 | 68.12 | 0.9590 |
| 31 | 15.5 | 12.55 | 85.75 | 0.9805 | 71 | 35.5 | 29.41 | 67.66 | 0.9584 |
| 32 | 16.0 | 12.96 | 85.30 | 0.9800 | 72 | 36.0 | 29.84 | 67.19 | 0.9577 |
| 33 | 16.5 | 13.37 | 84.85 | 0.9794 | 73 | 36.5 | 30.28 | 66.72 | 0.9570 |
| 34 | 17.0 | 13.79 | 84.40 | 0.9789 | 74 | 37.0 | 30.72 | 66.25 | 0.9652 |
| 35 | 17.5 | 14.20 | 83.95 | 0.9784 | 75 | 37.5 | 31.16 | 65.78 | 0.9555 |
| 36 | 18.0 | 14.61 | 83.50 | 0.9779 | 76 | 38.0 | 31.60 | 65.31 | 0.9548 |
| 37 | 18.5 | 15.03 | 83.06 | 0.9774 | 77 | 38.5 | 32.04 | 64.84 | 0.9540 |
| 38 | 19.0 | 15.44 | 82.61 | 0.9769 | 78 | 39.0 | 32.48 | 64.37 | 0.9533 |
| 39 | 19.5 | 15.85 | 82.16 | 0.9764 | 79 | 39.5 | 32.92 | 63.90 | 0.9525 |

(continued)

Table 6.53: (continued)


| Proof at 60°F | Pure 200 Proof | | | | Proof at 60°F | Pure 200 Proof | | | |
|---------------------|-------------------------------------------|---------------------------------------|-----------------------------------------|--------------------------------------|---------------------|-------------------------------------------|---------------------------------------|-----------------------------------------|--------------------------------------|
| | Ethanol, Parts by Volume at 60°F | Ethanol, % by Weight at 60°F | Water, Parts by Volume at 60°F | Specific Gravity at 60/60°F | | Ethanol, Parts by Volume at 60°F | Ethanol, % by Weight at 60°F | Water, Parts by Volume at 60°F | Specific Gravity at 60/60°F |
| 80 | 40.0 | 33.36 | 63.42 | 0.9517 | 140 | 70.0 | 62.44 | 33.43 | 0.8899 |
| 81 | 40.5 | 33.81 | 62.95 | 0.9509 | 141 | 70.5 | 62.98 | 32.91 | 0.8886 |
| 82 | 41.0 | 34.25 | 62.47 | 0.9501 | 142 | 71.0 | 63.51 | 32.38 | 0.8874 |
| 83 | 41.5 | 34.70 | 61.99 | 0.9493 | 143 | 71.5 | 64.05 | 31.86 | 0.8861 |
| 84 | 42.0 | 35.15 | 61.52 | 0.9485 | 144 | 72.0 | 64.59 | 31.34 | 0.8849 |
| 85 | 42.5 | 35.60 | 610.04 | 0.9474 | 145 | 72.5 | 65.13 | 30.82 | 0.8836 |
| 86 | 43.0 | 36.05 | 60.56 | 0.9469 | 146 | 73.0 | 65.67 | 30.29 | 0.8823 |
| 87 | 43.5 | 36.50 | 60.08 | 0.9460 | 147 | 73.5 | 66.22 | 29.76 | 0.8810 |
| 88 | 44.0 | 36.96 | 59.59 | 0.9452 | 148 | 74.0 | 66.77 | 29.24 | 0.8797 |
| 89 | 44.5 | 37.41 | 59.11 | 0.9443 | 149 | 74.5 | 67.32 | 28.71 | 0.8784 |
| 90 | 45.0 | 37.87 | 58.63 | 0.9434 | 150 | 75.0 | 67.87 | 28.19 | 0.8771 |
| 91 | 45.5 | 38.32 | 58.14 | 0.9426 | 151 | 75.5 | 68.43 | 27.66 | 0.8758 |
| 92 | 46.0 | 38.78 | 57.66 | 0.9417 | 152 | 76.0 | 68.98 | 27.13 | 0.8745 |
| 93 | 46.5 | 39.24 | 57.17 | 0.9408 | 153 | 76.5 | 69.54 | 26.60 | 0.8732 |
| 94 | 47.0 | 39.70 | 56.68 | 0.9399 | 154 | 77.0 | 70.10 | 26.07 | 0.8718 |
| 95 | 47.5 | 40.16 | 56.19 | 0.9389 | 155 | 77.5 | 70.67 | 25.54 | 0.8705 |
| 96 | 48.0 | 40.62 | 55.70 | 0.9380 | 156 | 78.0 | 71.23 | 25.01 | 0.8691 |
| 97 | 48.5 | 41.09 | 55.21 | 0.9371 | 157 | 78.5 | 71.80 | 24.47 | 0.8678 |
| 98 | 49.0 | 41.55 | 54.72 | 0.9361 | 158 | 79.0 | 72.38 | 23.94 | 0.8664 |
| 99 | 49.5 | 42.02 | 54.22 | 0.9352 | 159 | 79.5 | 72.95 | 23.40 | 0.8650 |
| 100 | 50.0 | 42.49 | 53.73 | 0.9342 | 160 | 80.0 | 73.53 | 22.87 | 0.8636 |
| 101 | 50.5 | 42.96 | 53.24 | 0.9332 | 161 | 80.5 | 74.11 | 22.33 | 0.8623 |
| 102 | 51.0 | 43.43 | 52.74 | 0.9322 | 162 | 81.0 | 74.69 | 21.80 | 0.8608 |
| 103 | 51.5 | 43.90 | 52.25 | 0.9312 | 163 | 81.5 | 75.27 | 21.26 | 0.8594 |
| 104 | 52.0 | 44.37 | 51.75 | 0.9302 | 164 | 82.0 | 75.86 | 20.72 | 0.8580 |
| 105 | 52.5 | 44.85 | 51.25 | 0.9292 | 165 | 82.5 | 76.45 | 20.18 | 0.8566 |
| 106 | 53.0 | 45.33 | 50.75 | 0.9282 | 166 | 83.0 | 77.04 | 19.64 | 0.8552 |
| 107 | 53.5 | 45.80 | 50.26 | 0.9272 | 167 | 83.5 | 77.64 | 19.10 | 0.8537 |
| 108 | 54.0 | 46.28 | 49.76 | 0.9262 | 168 | 84.0 | 78.23 | 18.55 | 0.8522 |
| 109 | 54.5 | 46.76 | 49.26 | 0.9252 | 169 | 84.5 | 78.84 | 18.01 | 0.8508 |
| 110 | 55.0 | 47.25 | 48.76 | 0.9241 | 170 | 85.0 | 79.44 | 17.46 | 0.8493 |
| 111 | 55.5 | 47.73 | 48.25 | 0.9231 | 171 | 85.5 | 80.05 | 16.92 | 0.8478 |
| 112 | 56.0 | 48.21 | 47.75 | 0.9220 | 172 | 86.0 | 80.62 | 16.37 | 0.8463 |
| 113 | 56.5 | 48.70 | 47.25 | 0.9210 | 173 | 86.5 | 81.28 | 15.82 | 0.8447 |
| 114 | 57.0 | 49.19 | 46.75 | 0.9199 | 174 | 87.0 | 81.90 | 15.27 | 0.8432 |
| 115 | 57.5 | 49.68 | 46.24 | 0.9188 | 175 | 87.5 | 82.52 | 14.72 | 0.8416 |
| 116 | 58.0 | 50.17 | 45.74 | 0.9177 | 176 | 88.0 | 83.14 | 14.16 | 0.8401 |
| 117 | 58.5 | 50.66 | 45.23 | 0.9167 | 177 | 88.5 | 83.78 | 13.61 | 0.8385 |
| 118 | 59.0 | 51.15 | 44.72 | 0.9156 | 178 | 89.0 | 84.41 | 13.05 | 0.8369 |
| 119 | 59.5 | 51.65 | 44.22 | 0.9144 | 179 | 89.5 | 85.05 | 12.49 | 0.8353 |
| 120 | 60.0 | 52.15 | 43.71 | 0.9133 | 180 | 90.0 | 85.69 | 11.93 | 0.8336 |
| 121 | 60.5 | 52.65 | 43.20 | 0.9122 | 181 | 90.5 | 86.34 | 11.37 | 0.8320 |
| 122 | 61.0 | 53.15 | 42.69 | 0.9111 | 182 | 91.0 | 86.99 | 10.80 | 0.8303 |
| 123 | 61.5 | 53.65 | 42.18 | 0.9100 | 183 | 91.5 | 87.65 | 10.24 | 0.8286 |
| 124 | 62.0 | 54.15 | 41.67 | 0.9088 | 184 | 92.0 | 88.31 | 9.67 | 0.8269 |
| 125 | 62.5 | 54.66 | 41.16 | 0.9077 | 185 | 92.5 | 88.98 | 9.09 | 0.8251 |
| 126 | 63.0 | 55.17 | 40.65 | 0.9065 | 186 | 93.0 | 89.65 | 8.52 | 0.8233 |
| 127 | 63.5 | 55.67 | 40.14 | 0.9054 | 187 | 93.5 | 90.34 | 7.94 | 0.8215 |
| 128 | 64.0 | 56.18 | 39.62 | 0.9042 | 188 | 94.0 | 91.03 | 7.36 | 0.8196 |
| 129 | 64.5 | 56.70 | 39.11 | 0.9031 | 189 | 94.5 | 91.72 | 6.77 | 0.8178 |
| 130 | 65.0 | 57.21 | 38.60 | 0.9019 | 190 | 95.0 | 92.42 | 6.18 | 0.8158 |
| 131 | 65.5 | 57.72 | 38.08 | 0.9007 | 191 | 95.5 | 93.14 | 5.59 | 0.8139 |
| 132 | 66.0 | 58.24 | 37.57 | 0.8996 | 192 | 96.0 | 93.85 | 4.99 | 0.8118 |
| 133 | 66.5 | 58.76 | 37.05 | 0.8984 | 193 | 96.5 | 94.58 | 4.39 | 0.8098 |
| 134 | 67.0 | 59.28 | 36.54 | 0.8972 | 194 | 97.0 | 95.32 | 3.78 | 0.8077 |
| 135 | 67.5 | 59.80 | 36.02 | 0.8969 | 195 | 97.5 | 96.07 | 3.17 | 0.8056 |
| 136 | 68.0 | 60.33 | 35.50 | 0.8948 | 197 | 98.5 | 97.60 | 1.93 | 0.8010 |
| 137 | 68.5 | 60.85 | 34.99 | 0.8936 | 198 | 99.0 | 98.38 | 1.29 | 0.7987 |
| 138 | 69.0 | 61.38 | 34.47 | 0.8923 | 199 | 99.5 | 99.19 | 0.65 | 0.7962 |
| 139 | 69.5 | 61.91 | 33.95 | 0.8911 | 200 | 100.0 | 100.0 | 0.00 | 0.7937 |

Table 6.54: Azeotropes of Ethanol (31)

| ETHYL ALCOHOL FORMS BINARY AZEOTROPES WITH: | | | B.P. of Azeotrope °C | | | B.P. of Azeotrope °C | | |
|---------------------------------------------|--------------------------|------|----------------------------------------------|----------------------|------|----------------------------|----------------------|---|
| % | B.P. of Azeotrope °C | % | | B.P. of Azeotrope °C | % | | B.P. of Azeotrope °C | % |
| 79 | tert-Amyl ethyl ether | 27.3 | Ethyl acrylate | 77.5 | 7.4 | Water | | |
| 67.6 | Benzene | 25 | Ethyl propionate | 78.0 | 70 | Bromodichloromethane | 72.0 | |
| 57 | 1-Bromobutane | 75 | Ethyl propyl ether | 61.2 | 8 | Water | | |
| 67 | 2-Bromobutane | 44 | Ethyl sulfide | 72.6 | 65 | 1-Bromo-2-methylpropane | 69.5 | |
| 22.5 | cis-1-Bromo-1-butene | 75 | Fluorobenzene | 70.0 | 3 | Water | | |
| 64.3 | trans-1-Bromo-1-butene | 51 | n-Heptane | 70.9 | 91 | cis-1-Bromopropene | 54.0 | |
| 66.3 | cis-2-Bromo-2-butene | 79 | n-Hexane | 58.6 | 4 | Water | | |
| 73.3 | trans-2-Bromo-2-butene | 30 | 2-Iodobutane | 77.2 | 7.5 | trans-Bromopropene | 54.5 | |
| 77.8 | 2-Bromo-1-butene | 30 | 1-Iodo-2-methylpropane | 77.0 | 5 | Water | | |
| 18 | 1-Bromo-3-methylbutane | 56 | 1-Iodopropane | 75.4 | 83 | 1-Bromopropene | 60.0 | |
| 59 | 1-Bromo-1-methylpropane | 75 | 2-Iodopropane | 70.2 | 1 | Water | | |
| 85 | 2-Bromo-2-methylpropane | 58 | 3-Iodopropene | 75.4 | 95 | 2-Bromopropene | 43.3 | |
| 83.7 | 1-Bromopropene | 33 | Isobutyl formate | 77.0 | 1.6 | Water | | |
| 88.5 | 2-Bromopropene | 97 | Isoprene | 32.7 | 3.4 | Carbon disulfide | 41.3 | |
| 94 | 2-Bromopropene | 47 | Isopropyl acetate | 76.8 | 3.5 | Water | | |
| 89 | trans-1-Bromopropene | 55.5 | Methyl acetate | 56.9 | 92.5 | Chloroform | 55.4 | |
| 91 | cis-1-Bromopropene | 46.2 | Methyl acrylate | 73.5 | 4.5 | Water | | |
| 79 | tert-Butyl ethyl ether | 57.6 | Methyl borate | 63.0 | 82.5 | 1-Chloro-2-methylpropane | 58.6 | |
| 91 | Carbon disulfide | 75 | 2-Methylbutane | 26.8 | 7 | Water | | |
| 84.2 | Carbon tetrachloride | 96.5 | Methyl butyrate | 78.0 | 73 | Cyclohexene | 64.1 | |
| 79.7 | 1-Chlorobutane | 17 | Methyl carbonate | 73.5 | 5 | Water | | |
| 84.2 | 2-Chlorobutane | 55 | Methylcyclopentene | 63.3 | 78 | 1,2-Dichloroethane | 66.7 | |
| 85.2 | cis-1-Chloro-1-butene | 72 | Methylcyclopentene | 60.3 | 2.85 | Water | | |
| 79.8 | trans-1-Chloro-1-butene | 75 | Methyl ethyl ketone | 74.8 | 90.5 | cis-1,2-Dichloroethylene | 53.8 | |
| 88.5 | 2-Chloro-1-butene | 66 | Methyl propionate | 72.0 | 1.1 | Water | | |
| 84.6 | cis-2-Chloro-2-butene | 67 | Octane | 77.0 | 94.5 | trans-1,2-Dichloroethylene | 44.4 | |
| 93.0 | Chloroform | 22 | Pentane | 34.3 | 12.8 | Water | | |
| 59 | 1-Chloro-3-methylbutane | 95 | 2-Pentanone | 77.7 | 69.5 | Dimethoxymethane | 73.2 | |
| 83.7 | 1-Chloro-2-methylpropane | 8.8 | Perchloroethylene | 78.0 | 9 | Water | | |
| 94 | 1-Chloropropene | 19 | Propanediol | 63.5 | 82.6 | Ethyl acetate | 70.2 | |
| 97.2 | 2-Chloropropene | 81 | Propyl acetate | 78.2 | 17.5 | Water | | |
| 96 | trans-1-Chloropropene | 15 | Propyl ether | 74.4 | 20.8 | Ethyl chloroacetate | 81.4 | |
| 95 | 3-Chloropropene | 56 | Thiophene | 70.0 | 5.5 | Water | | |
| 66 | 1,3-Cyclohexadiene | 55 | Toluene | 76.7 | 78.4 | Trichloroethylene | 67.0 | |
| 69.5 | Cyclohexane | 32 | Trichloroethylene | 70.9 | 9 | Water | | |
| 66 | Cyclohexene | 73 | | | 78 | Triethylamine | 74.7 | |
| 92.5 | Cyclopentane | | | | | | | |
| 47.2 | 1,1-Dichloropropane | | ETHYL ALCOHOL FORMS TERNARY AZEOTROPES WITH: | | | | | |
| 85.5 | 2,2-Dichloropropane | | | | | | | |
| 41 | 2,5-Dimethylhexane | | | | | | | |
| 58 | Diethoxymethane | | | | | | | |
| 69 | Ethyl acetate | | | | | | | |

n-PROPYL ALCOHOL

n-Propanol



n-Propyl alcohol is a colorless, volatile liquid.

Table 6.55: Physical Properties of n-Propyl Alcohol (31)

| | |
|-----------------------------------------------|------------------------------------------|
| Acidity as acetic acid | 0.003% by wt, max. |
| Alkalinity as ammonia | 0.003% by wt, max. |
| Autoignition temperature | 540°C |
| Boiling point at 760 mm | 97.15°C |
| Coefficient of cubical expansion, 0 - 94°C | 0.000956 x 10 ⁻³ |
| Color, APHA | 5 max. |
| Critical density | 0.2734 |
| Critical pressure | 49.9 atm |
| Critical temperature | 263.7°C |
| Distillation range at 760 mm | 2°C including 97.15°C |
| Electrical conductivity, mhos per cm at 25°C | 2 x 10 ⁻⁸ |
| Explosive limits, Lower | 2.6% by vol. in air |
| Upper | 13.5% by vol. in air |
| Fire hazard | Dangerous when exposed to heat or flame. |
| Flash point (open cup) | 90°F |
| (closed cup) | 59°F |
| Freezing point | -127°C (-196°F) |
| Heat of combustion | 8020 cal/g |
| Heat of vaporization at 97.15°C | 162.6 cal/g |
| Limits of flammability (in air by volume) | 2.5% (Lower) |
| Melting point | -127.0°C |
| Molecular weight | 60.09 |
| Non-volatile material | 0.001 gm/100 ml sample, max. |
| Odor | Alcohol-like |
| Refractive index at 20°C | 1.3845 |
| Reid vapor pressure at 100°F | 0.1 psi |
| Relative evaporation rate (butyl acetate = 1) | 1.3 |
| Specific gravity at 20/4°C | 0.8036 |
| at 20/20°C | 0.8050 |
| Specific heat at 25°C | 0.586 cal/g/°C |
| Surface tension in air, -5°C | 25.9 dynes/cm |
| 20°C | 23.8 dynes/cm |
| 60°C | 20.5 dynes/cm |
| Toxicity | Slight |
| Vapor pressure | mm Hg |
| °C °F | |
| 0 32 | 3.44 |
| 10 50 | 7.26 |
| 20 68 | 14.5 |
| 30 86 | 27.6 |
| 40 104 | 50.2 |
| 50 122 | 87.2 |
| 60 140 | 147.0 |
| 70 158 | 239.0 |
| 80 176 | 376.0 |
| 90 194 | 574.0 |
| 97.19 206.9 | 760.0 |
| Viscosity, 0°C | 3.8827 centipoises |
| 20°C | 2.2563 centipoises |
| 40°C | 1.4050 centipoises |
| 90°C | 0.5310 centipoises |
| Water content | 0.2% by wt, max. |
| Weight per gallon at 20°C (68°F) | 6.7 lbs |

Table 6.56: Azeotropes of n-Propyl Alcohol (31)

| n-PROPYL ALCOHOL FORMS BINARY AZEOTROPES WITH: | | | n-PROPYL ALCOHOL FORMS TERNARY AZEOTROPES WITH: | | |
|------------------------------------------------|--------------------------|----------------------|-------------------------------------------------|-----------------------------|----------------------|
| % | | B.P. of Azeotrope °C | % | | B.P. of Azeotrope °C |
| 63 | Acetal | 92.4 | 27.4 | Water | |
| 83.1 | Benzene | 77.1 | 21 | Acetaldehyde dipropylacetal | 87.6 |
| 75 | Biacetyl | 85.0 | 7.6 | Water | |
| 31 | 1-Bromobutane | 89.5 | 82.3 | Benzene | 67.0 |
| 89.5 | 2-Bromobutane | 85.3 | 5 | Water | |
| 82 | n-Butyl chloride | 74.8 | 84 | Carbon tetrachloride | 65.4 |
| 36 | Butyl formate | 95.5 | 9 | Water | |
| 88.5 | Carbon tetrachloride | 73.1 | 79 | 1,3-Cyclohexadiene | 67.8 |
| 17 | Chlorobenzene | 96.9 | 8.5 | Water | |
| 82 | 1-Chlorobutane | 74.8 | 81.5 | Cyclohexane | 66.6 |
| 91 | 2-Chlorobutane | 67.2 | 9 | Water | |
| 69 | 1-Chloro-3-methylbutane | 89.4 | 79.5 | Cyclohexene | 63.2 |
| 78 | 1-Chloro-2-methylpropane | 67.7 | 8 | Water | |
| 89 | Diethoxymethane | 86.2 | 47.2 | Dipropoxymethane | 86.4 |
| 45 | Dioxane | 95.3 | 17.6 | Water | |
| 70 | Di-n-propyl ether | 85.7 | 59.5 | Ethoxypropoxymethane | 83.8 |
| 49 | Ethyl propionate | 93.4 | 8 | Water | |
| 72 | Ethyl sulfide | 85.5 | 72 | 3-Iodopropene | 78.2 |
| 81 | Ethylene chloride | 80.7 | 17.5 | Water | |
| 82 | Fluorobenzene | 80.2 | 55.9 | Nitromethane | 82.3 |
| 96 | n-Hexane | 65.7 | 20 | Water | |
| 34 | 1-Iodobutane | 96.2 | 60 | 3-Pentanone | 81.2 |
| 47 | 2-Iodobutane | 94.2 | 21 | Water | |
| 55 | 1-Iodo-2-methylpropane | 93.0 | 59.5 | Propyl acetate | 82.2 |
| 60 | Isobutyl formate | 93.2 | 25.3 | Water | |
| 30 | Isobutyronitrile | 95.0 | 16.5 | Propyl chloroacetate | 88.6 |
| 94.6 | Methyl acrylate | 70.9 | 11.7 | Water | |
| 65 | 3-Methyl-2-butanol | 93.5 | 68.1 | Propyl ether | 74.8 |
| 53 | Methyl butyrate | 94.4 | 13 | Water | |
| 74 | Methyl isobutyrate | 89.5 | 82 | Propyl formate | 70.8 |
| 32 | 2-Pentanone | 96.0 | 7 | Water | |
| 37 | 3-Pentanone | 96.0 | 81 | Trichloroethylene | 71.6 |
| 1.5 | α -Pinene | 97.1 | | | |
| 60 | Propyl acetate | 94.2 | | | |
| 91 | n-Propyl bromide | 69.7 | | | |
| 90.2 | Propyl formate | 80.6 | | | |
| 47.5 | Toluene | 92.4 | | | |
| 28.3 | Water | 87.7 | | | |

Table 6.57: n-Propanol-Water-Benzene (19)

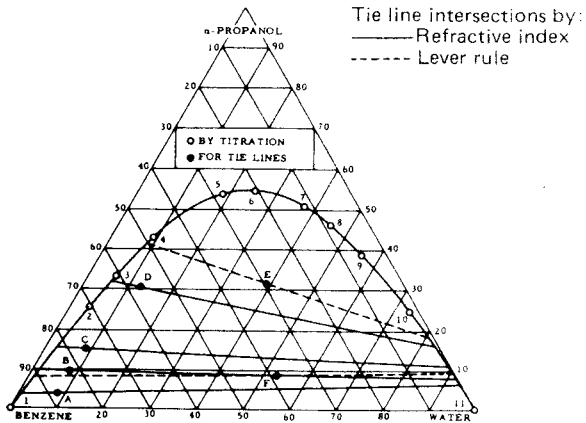


Table 6.58: n-Propanol-Water-n-Butanol (19)

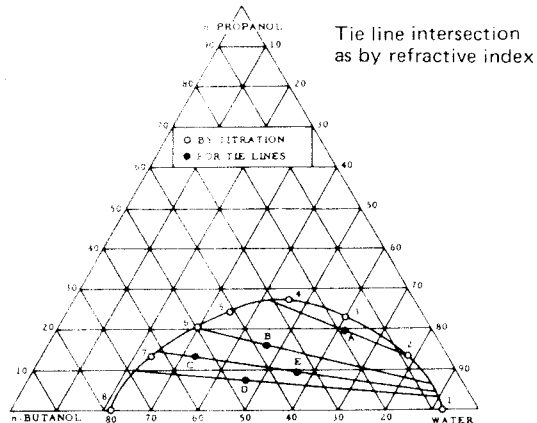


Table 6.59: n-Propanol-Water-Heptane (19)


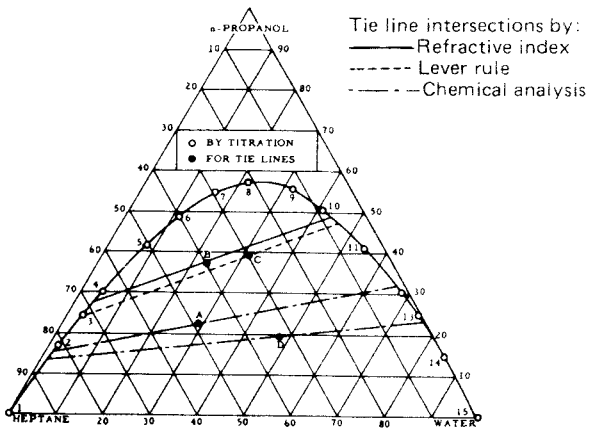


Table 6.60: n-Propanol-Water-Hexane (19)

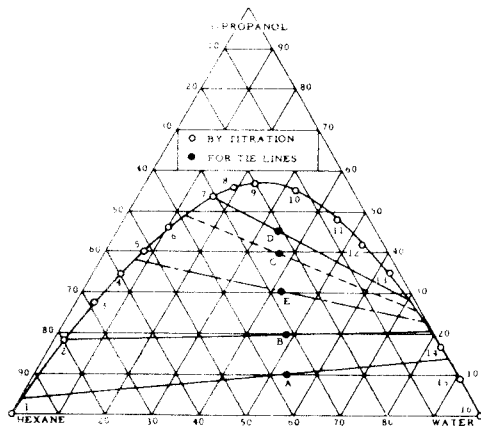

ISOPROPYL ALCOHOL

Isopropanol, Dimethyl Carbinol, 2-Propanol




Table 6.61: Physical Properties of Anhydrous Isopropyl Alcohol (31)

| | | | |
|----------------------------------|--------------------------------------------------------------------|-----------------------------------|--------------------------------------------|
| Acidity, as acetic acid | 0.002% by wt, max. | Heat of fusion | 21.08 cal/g |
| Boiling point at 760 mm | 82.3°C | Heat of vaporization | 287 Btu/lb |
| 50 mm | 27°C | Lower limit of flammability | |
| 10 mm | 2°C | in air | 2.65% vol. |
| Coefficient of expansion at 55°C | 0.00111 | MAC | 400 ppm in air |
| Color, Pt-Co scale | 10 max. | Molecular weight | 60.09 |
| Critical pressure | 53 atm. | Non-volatile matter | 0.002 g/100 ml, max. |
| Critical temperature | 234.9°C | Odor | Non-residual |
| Dielectric constant at 20°C | 18.62 | Purity | 99.5% - 99.9% by vol. |
| 40°C | 16.24 | Refractive index at 20°C | 1.3772 |
| 80°C | 11.91 | Specific gravity at 20/20°C | 0.7862 - 0.7867 |
| Distillation at 760 mm | Distills entirely within 1.0°C range which in- cludes 82.3°C | Specific heat at 20°C | 0.596 cal/g/°C |
| Fire hazard | Dangerous when exposed to heat or open flame | Surface tension at 25°C | 20.8 dynes/cm |
| Flash point (open cup) | 70°F | Toxicity | Moderate by ingestion; otherwise slight |
| Freezing point | -87.8°C | Vapor pressure at 20°C | 33.0 mm Hg |
| Heat of combustion | 7970 cal/g 7942 cal/g | Viscosity at 20°C | 2.4 cps. |
| | | Water content | 0.5% by wt, max. |
| | | Weight per gallon at 20°C 60°F | 6.55 lb 6.58 lb |

Table 6.62: Physical Properties of 91% Isopropyl Alcohol (31)

| | |
|-----------------------------------|----------------------------------------------------------------------|
| Acidity, as acetic acid | 0.0024% by wt, max. |
| Color, Pt-Co scale | 15 max. |
| Distillation at 760 mm | Distills entirely within a 1.0°C range which in- cludes 80.4°C |
| Fire hazard | Dangerous when exposed to heat or open flame |
| Flash point (open cup) | 75°F |
| Non-volatile matter | 0.005 g/100 ml, max. |
| Odor | Non-residual |
| Permanganate time | 30 minutes, minimum, at 15°C when using the Barbet end point |
| Purity | 91.09% by volume, min- imum, at 15.56°C. |
| Specific gravity at 20/20°C | 0.8175 - 0.8185 |
| Toxicity | Moderate by ingestion; otherwise slight |
| Water content | 9% by volume, max. |
| Weight per gallon at 20°C 60°F | 6.81 lb 6.84 lb |

Table 6.63: Specific Gravity of Isopropyl Alcohol–Water Mixtures (8)

| Specific Gravity | 20/20°C | | Specific Gravity | 20/20°C | | Specific Gravity | 20/20°C | |
|------------------|---------|-------|------------------|---------|-------|------------------|---------|--------|
| | % Vol. | % Wt. | | % Vol. | % Wt. | | % Vol. | % Wt. |
| 1.000 | 0.0 | 0.0 | | | | | | |
| 0.9990 | 0.8 | 0.6 | 0.9240 | 50.7 | 43.3 | 0.8490 | 80.60 | 74.95 |
| 0.9980 | 1.6 | 1.3 | 0.9230 | 51.2 | 43.7 | 0.8490 | 80.96 | 75.37 |
| 0.9970 | 2.4 | 1.9 | 0.9220 | 51.6 | 44.2 | 0.8470 | 81.32 | 75.79 |
| 0.9960 | 3.2 | 2.6 | 0.9210 | 52.0 | 44.6 | 0.8460 | 81.68 | 76.21 |
| 0.9950 | 4.0 | 3.3 | 0.9200 | 52.5 | 45.0 | 0.8450 | 82.04 | 76.63 |
| 0.9940 | 4.8 | 3.9 | 0.9190 | 52.9 | 45.5 | 0.8440 | 82.40 | 77.04 |
| 0.9930 | 5.6 | 4.5 | 0.9180 | 53.4 | 45.9 | 0.8430 | 82.76 | 77.45 |
| 0.9920 | 6.5 | 5.2 | 0.9170 | 53.8 | 46.3 | 0.8420 | 83.12 | 77.86 |
| 0.9910 | 7.3 | 5.8 | 0.9160 | 54.2 | 46.7 | 0.8410 | 83.48 | 78.27 |
| 0.9900 | 8.1 | 6.5 | 0.9150 | 54.7 | 47.2 | 0.8400 | 83.84 | 78.68 |
| 0.9890 | 8.9 | 7.1 | 0.9140 | 55.1 | 47.6 | 0.8390 | 84.20 | 79.09 |
| 0.9880 | 9.8 | 7.8 | 0.9130 | 55.5 | 48.0 | 0.8380 | 84.55 | 79.50 |
| 0.9870 | 10.6 | 8.4 | 0.9120 | 56.0 | 48.5 | 0.8370 | 84.90 | 79.91 |
| 0.9860 | 11.5 | 9.1 | 0.9110 | 56.4 | 48.9 | 0.8360 | 85.25 | 80.32 |
| 0.9850 | 12.3 | 9.8 | 0.9100 | 56.4 | 48.9 | 0.8350 | 85.60 | 80.73 |
| 0.9840 | 13.2 | 10.5 | 0.9090 | 57.3 | 49.7 | 0.8340 | 85.95 | 81.14 |
| 0.9830 | 14.0 | 11.2 | 0.9080 | 57.7 | 50.2 | 0.8330 | 86.30 | 81.55 |
| 0.9820 | 14.9 | 11.9 | 0.9070 | 58.1 | 50.6 | 0.8320 | 86.65 | 81.96 |
| 0.9810 | 15.7 | 12.6 | 0.9060 | 58.6 | 51.0 | 0.8310 | 87.00 | 82.37 |
| 0.9800 | 16.6 | 13.3 | 0.9050 | 59.0 | 51.4 | 0.8300 | 87.33 | 82.78 |
| 0.9790 | 17.4 | 14.1 | 0.9040 | 59.4 | 51.8 | 0.8290 | 87.69 | 83.19 |
| 0.9780 | 18.3 | 14.8 | 0.9030 | 59.8 | 52.3 | 0.8280 | 88.03 | 83.60 |
| 0.9770 | 19.1 | 15.5 | 0.9020 | 60.3 | 52.7 | 0.8270 | 88.36 | 84.01 |
| 0.9760 | 19.9 | 16.2 | 0.9010 | 60.7 | 53.1 | 0.8260 | 88.69 | 84.42 |
| 0.9750 | 20.8 | 16.9 | 0.9000 | 61.1 | 53.5 | 0.8250 | 89.02 | 84.83 |
| 0.9740 | 21.7 | 17.5 | 0.8990 | 61.5 | 53.9 | 0.8240 | 89.35 | 85.24 |
| 0.9730 | 22.5 | 18.2 | 0.8980 | 62.0 | 54.4 | 0.8230 | 89.68 | 85.65 |
| 0.9720 | 23.4 | 18.8 | 0.8970 | 62.4 | 54.8 | 0.8220 | 90.01 | 86.06 |
| 0.9710 | 24.2 | 19.4 | 0.8960 | 62.8 | 55.2 | 0.8210 | 90.34 | 86.47 |
| 0.9700 | 25.1 | 20.1 | 0.8950 | 63.2 | 55.6 | 0.8200 | 90.67 | 86.88 |
| 0.9690 | 25.8 | 20.7 | 0.8940 | 63.6 | 56.0 | 0.8190 | 91.00 | 87.29 |
| 0.9680 | 26.6 | 21.3 | 0.8930 | 64.1 | 56.5 | 0.8180 | 91.32 | 87.70 |
| 0.9670 | 27.3 | 22.0 | 0.8920 | 64.5 | 56.9 | 0.8170 | 91.63 | 88.10 |
| 0.9660 | 28.0 | 22.6 | 0.8910 | 64.9 | 57.3 | 0.8160 | 91.93 | 88.50 |
| 0.9650 | 28.7 | 23.2 | 0.8900 | 65.3 | 57.7 | 0.8150 | 92.23 | 88.90 |
| 0.9640 | 29.4 | 23.8 | 0.8890 | 65.7 | 58.1 | 0.8140 | 92.53 | 89.30 |
| 0.9630 | 30.1 | 24.4 | 0.8880 | 66.1 | 58.6 | 0.8130 | 92.83 | 89.70 |
| 0.9620 | 30.8 | 25.0 | 0.8870 | 66.5 | 59.0 | 0.8120 | 93.13 | 90.10 |
| 0.9610 | 31.4 | 25.6 | 0.8860 | 66.9 | 59.4 | 0.8110 | 93.43 | 90.50 |
| 0.9600 | 32.1 | 26.2 | 0.8850 | 67.3 | 59.8 | 0.8100 | 93.72 | 90.90 |
| 0.9590 | 32.7 | 26.7 | 0.8840 | 67.7 | 60.2 | 0.8090 | 94.01 | 91.30 |
| 0.9580 | 33.3 | 27.2 | 0.8830 | 68.0 | 60.7 | 0.8080 | 94.30 | 91.70 |
| 0.9570 | 33.9 | 27.7 | 0.8820 | 68.4 | 61.1 | 0.8070 | 94.58 | 92.10 |
| 0.9560 | 34.5 | 28.2 | 0.8810 | 68.8 | 61.5 | 0.8060 | 94.86 | 92.49 |
| 0.9550 | 35.1 | 28.7 | 0.8800 | 69.2 | 61.9 | 0.8050 | 95.14 | 92.88 |
| 0.9540 | 35.7 | 29.2 | 0.8790 | 69.6 | 62.3 | 0.8040 | 95.42 | 93.27 |
| 0.9530 | 36.3 | 29.7 | 0.8780 | 69.9 | 62.8 | 0.8030 | 95.69 | 93.66 |
| 0.9520 | 36.8 | 30.3 | 0.8770 | 70.3 | 63.2 | 0.8020 | 95.96 | 94.04 |
| 0.9510 | 37.4 | 30.8 | 0.8760 | 70.7 | 63.6 | 0.8010 | 96.23 | 94.42 |
| 0.9500 | 38.0 | 31.3 | 0.8750 | 71.1 | 64.0 | 0.8000 | 96.50 | 94.80 |
| 0.9490 | 38.5 | 31.8 | 0.8740 | 71.4 | 64.4 | 0.7990 | 96.77 | 95.18 |
| 0.9480 | 39.0 | 32.3 | 0.8730 | 71.8 | 64.9 | 0.7980 | 97.04 | 95.56 |
| 0.9470 | 39.6 | 32.8 | 0.8720 | 72.2 | 65.3 | 0.7970 | 97.31 | 95.94 |
| 0.9460 | 40.1 | 33.3 | 0.8710 | 72.6 | 65.7 | 0.7960 | 97.57 | 96.32 |
| 0.9450 | 40.6 | 33.8 | 0.8700 | 72.9 | 66.1 | 0.7950 | 97.83 | 96.70 |
| 0.9440 | 41.1 | 34.3 | 0.8690 | 73.3 | 66.5 | 0.7940 | 98.08 | 97.08 |
| 0.9430 | 41.6 | 34.8 | 0.8680 | 73.7 | 67.0 | 0.7930 | 98.33 | 97.46 |
| 0.9420 | 42.1 | 35.2 | 0.8670 | 74.0 | 67.4 | 0.7920 | 98.58 | 97.84 |
| 0.9410 | 42.7 | 35.7 | 0.8660 | 74.4 | 67.8 | 0.7910 | 98.83 | 98.22 |
| 0.9400 | 43.2 | 36.1 | 0.8650 | 74.8 | 68.2 | 0.7900 | 99.08 | 98.60 |
| 0.9390 | 43.7 | 36.6 | 0.8640 | 75.2 | 68.6 | 0.7890 | 99.33 | 98.98 |
| 0.9380 | 44.2 | 37.0 | 0.8630 | 75.5 | 69.1 | 0.7880 | 99.58 | 99.36 |
| 0.9370 | 44.7 | 37.5 | 0.8620 | 75.9 | 69.5 | 0.7870 | 99.83 | 99.74 |
| 0.9360 | 45.2 | 38.0 | 0.8610 | 76.3 | 69.9 | 0.7863 | 100.00 | 100.00 |
| 0.9350 | 45.6 | 38.4 | 0.8600 | 76.6 | 70.3 | | | |
| 0.9340 | 46.1 | 38.8 | 0.8590 | 77.00 | 70.75 | | | |
| 0.9330 | 46.6 | 39.3 | 0.8580 | 77.36 | 71.17 | | | |
| 0.9320 | 47.1 | 39.7 | 0.8570 | 77.72 | 71.59 | | | |
| 0.9310 | 47.5 | 40.2 | 0.8560 | 78.08 | 72.01 | | | |
| 0.9300 | 48.0 | 40.6 | 0.8550 | 78.44 | 72.43 | | | |
| 0.9290 | 48.5 | 41.1 | 0.8540 | 78.80 | 72.85 | | | |
| 0.9280 | 48.9 | 41.5 | 0.8530 | 79.16 | 73.27 | | | |
| 0.9270 | 49.4 | 42.0 | 0.8520 | 79.52 | 73.69 | | | |
| 0.9260 | 49.8 | 42.4 | 0.8510 | 79.88 | 74.11 | | | |
| 0.9250 | 50.3 | 42.9 | 0.8500 | 80.24 | 74.54 | | | |

Gravity-temperature coefficient of 100% alcohol 20-22 = .00086/°C

Table 6.64: Vapor-Liquid Compositions of Isopropyl Alcohol-Water Mixtures and Their Boiling Points (8)

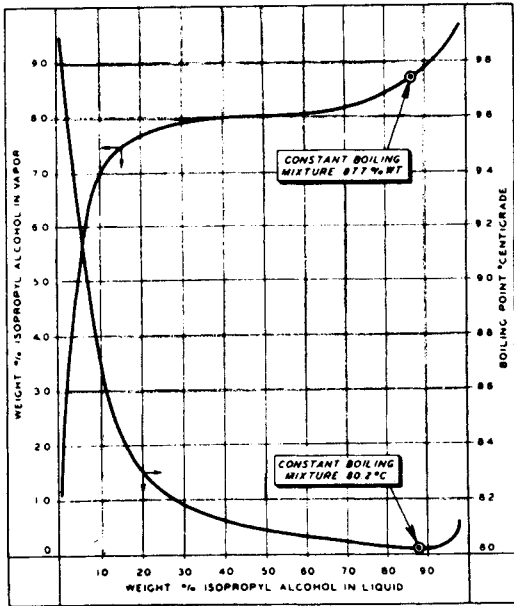


Table 6.65: Refractive Index vs Composition of Isopropyl Alcohol-Water Mixtures at 25°C (19)

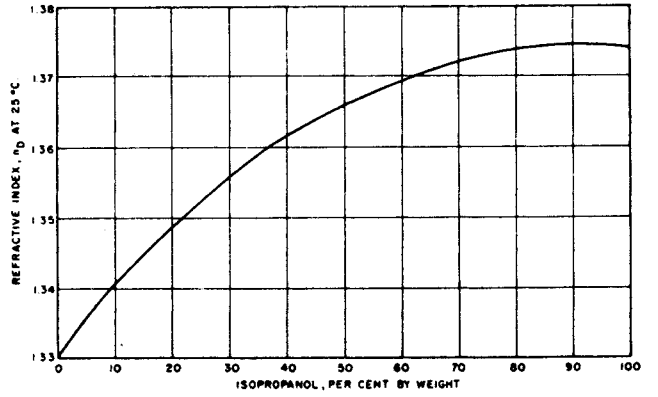


Table 6.66: Isopropyl Alcohol-Water: Kinematic Viscosity vs Composition at 25°C (19)

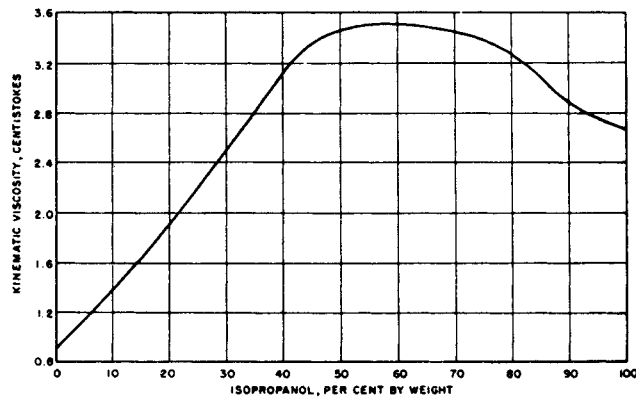


Table 6.67: Azeotropes of Isopropyl Alcohol (31)

| ISOPROPYL ALCOHOL FORMS BINARY AZEOTROPES WITH: | | | ISOPROPYL ALCOHOL FORMS TERNARY AZEOTROPES WITH: | | |
|-------------------------------------------------|-------------------------|----------------------|--------------------------------------------------|---------------------|----------------------|
| % | | B.P. of Azeotrope °C | % | | B.P. of Azeotrope °C |
| 56 | Acrylonitrile | 71.7 | 7.5 | Water | |
| 66.7 | Benzene | 71.9 | 73.8 | Benzene | 66.5 |
| 66 | 2-Bromobutane | 77.5 | 7.5 | Water | |
| 68 | 2-Butanone | 77.9 | 74 | Cyclohexane | 64.8 |
| 40 | n-Butylamine | 84.7 | 7.5 | Water | |
| 28.1 | Butyl isopropyl ether | 79.0 | 71 | Cyclohexene | 61.1 |
| 92 | Carbon disulfide | 44.6 | 10 | Water | |
| 82 | Carbon tetrachloride | 67.0 | 9.3 | Diisobutylene | 72.3 |
| 77 | 1-Chlorobutane | 70.8 | 10.4 | Water | |
| 82 | 2-Chlorobutane | 64.0 | 67.7 | Ethyl butyl ether | 73.4 |
| 57 | 1-Chloro-3-methylbutane | 79.2 | 7.7 | Water | |
| 64 | 1,3-Cyclohexadiene | 70.4 | 73.3 | Ethylene dichloride | 69.7 |
| 67 | Cyclohexane | 68.6 | 11 | Water | |
| 73 | Cyclohexene | 70.5 | 76 | Isopropyl acetate | 75.5 |
| 48 | Diethoxymethane | 79.6 | 4.7 | Water | |
| 45.5 | Diisobutylene | 77.8 | 88 | Isopropyl ether | 61.6 |
| 91 | 2,3-Dimethylbutane | 53.8 | 6 | Water | |
| 22 | 1,3-Dimethylcyclohexane | 81.0 | 32 | Nitromethane | 78.0 |
| 38 | 2,5-Dimethylhexane | 79.0 | 13.1 | Water | |
| 74 | Ethyl acetate | 74.0 | 48.7 | Toluene | 76.3 |
| 90 | Ethyl propyl ether | 62.0 | | | |
| 48 | Ethyl sulfide | 78.0 | | | |
| 60.8 | Ethylene dichloride | 72.7 | | | |
| 70 | Fluorobenzene | 74.5 | | | |
| 49.5 | n-Heptane | 76.4 | | | |
| 77 | Hexane | 62.7 | | | |
| 30 | 1-Iodo-2-methylpropane | 81.5 | | | |
| 81 | Isobutyl chloride | 63.8 | | | |
| 47.7 | Isopropyl acetate | 80.1 | | | |
| 83.7 | Isopropyl ether | 66.2 | | | |
| 53.5 | Methyl acrylate | 76.0 | | | |
| 47 | Methylcyclohexane | 77.6 | | | |
| 75 | Methylcyclopentane | 63.3 | | | |
| 70 | Methyl ethyl ketone | 77.3 | | | |
| 35 | Methyl isobutyrate | 81.4 | | | |
| 62 | Methyl propionate | 76.4 | | | |
| 16 | Octane | 81.8 | | | |
| 94 | Pentane | 55.5 | | | |
| 48 | Propyl ether | 78.2 | | | |
| 64 | Propyl formate | 76.9 | | | |
| 19 | Tetrachloroethylene | 81.7 | | | |
| 57 | Thiophene | 76.0 | | | |
| 31 | Toluene | 80.6 | | | |
| 72 | Trichloroethylene | 74.0 | | | |
| 77.6 | Vinyl acetate | 70.8 | | | |
| 12.2 | Water | 79.5 | | | |

Table 6.68: The Effect of Isopropyl Alcohol on the Dilution Ratio of Solvents (14)

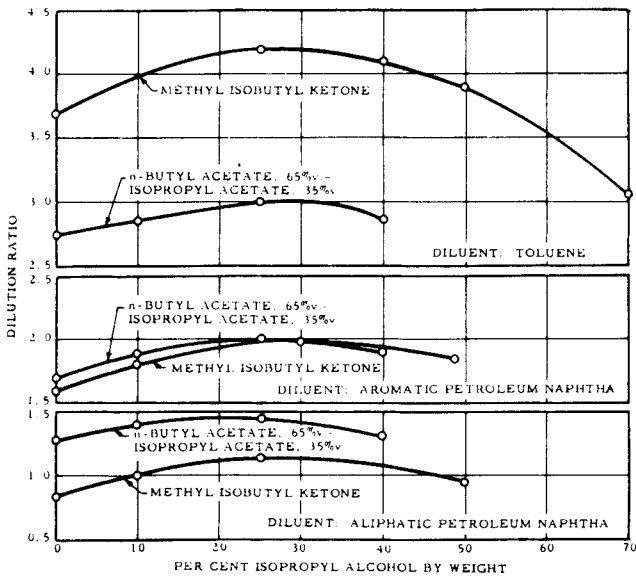


Table 6.69: Viscosity of RS 1/2 Sec. Nitrocellulose in Mixtures of Toluene, Isopropyl Alcohol and Methyl Isobutyl Ketone (14)

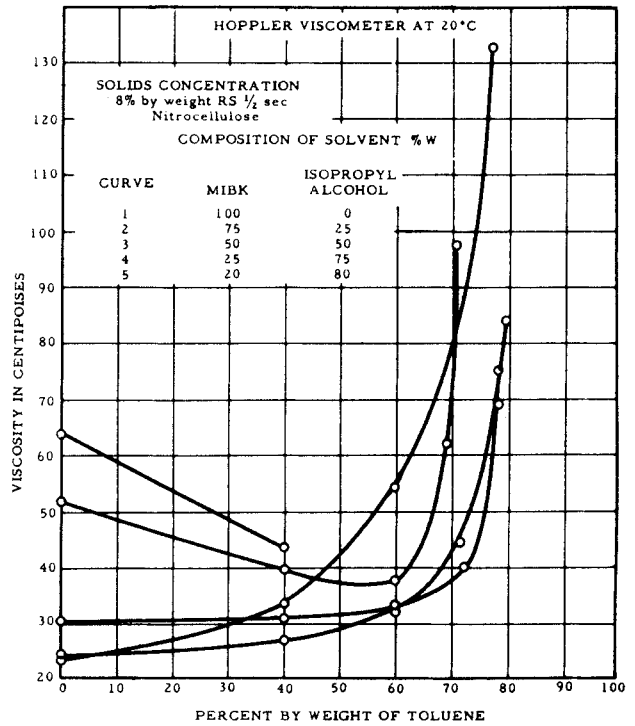


Table 6.70: Methanol-Isopropyl Alcohol: Boiling Point vs Composition at 760 mm Hg (19)


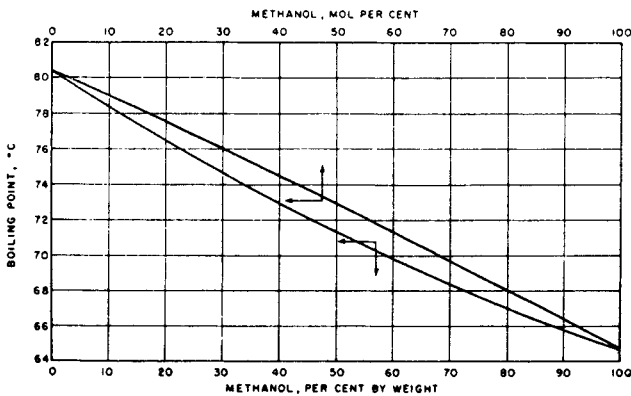


Table 6.71: Methanol-Isopropyl Alcohol: Liquid-Vapor Equilibria at Atmospheric Pressure (19)

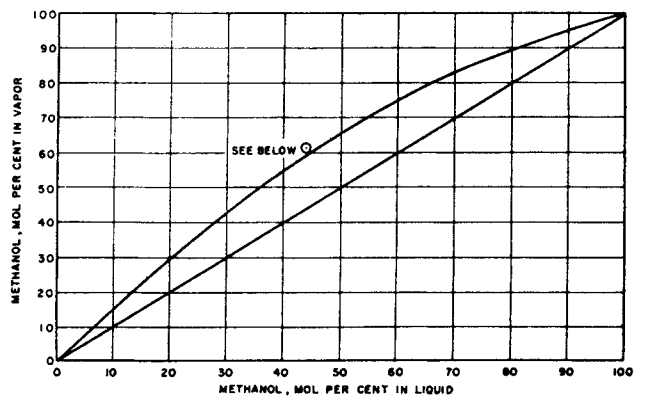

Composition at 200 mm. Hg: 43.9 mol per cent in liquid, 60.9 mol per cent in vapor. Isopropanol-Water azeotrope contains 68.3 mol per cent isopropanol.

Table 6.72: Vapor Pressure of Isopropyl Alcohol (Anhydrous) and sec-Butyl Alcohol at Various Temperatures (8)


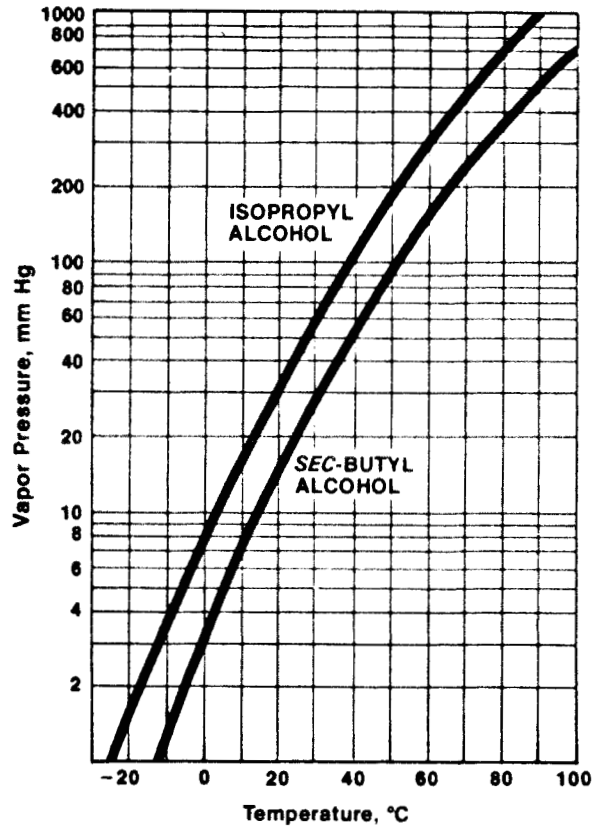


Table 6.73: Specific Gravities of Alcohols vs Temperature (8)

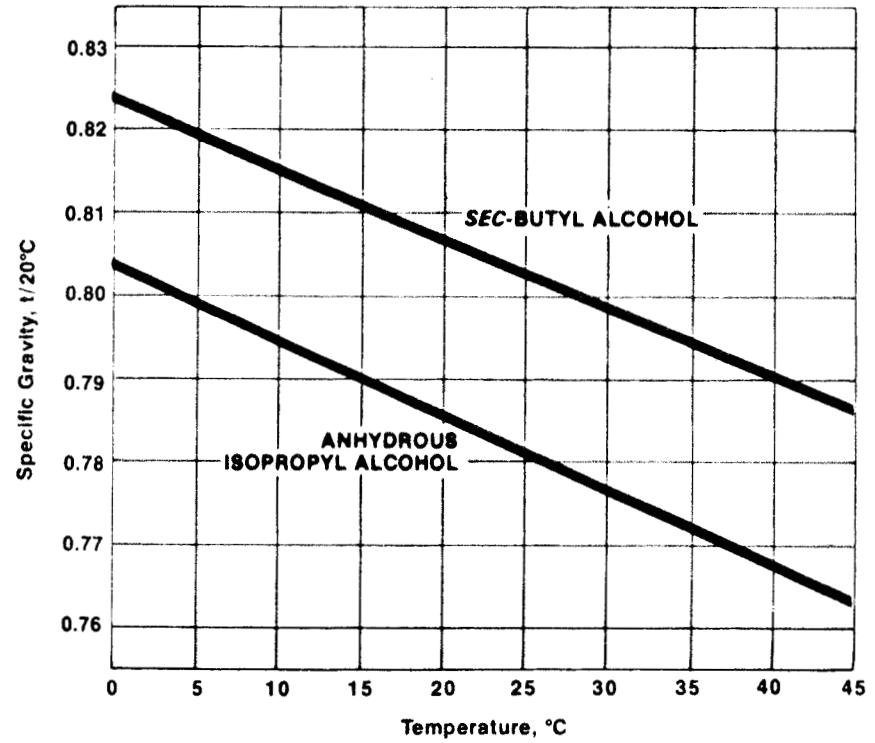

n-BUTYL ALCOHOL

n-Butanol, Butanol-1, Butyric Alcohol



Table 6.74: Physical Properties of n-Butyl Alcohol (31)

| PHYSICAL PROPERTIES OF n-BUTYL ALCOHOL | |
|------------------------------------------------|---------------------------------------------------------------|
| Acidity as acetic acid | 0.005% by wt, max. |
| Aldehydes | None |
| Boiling point at 760 mm | 117.7°C |
| Chlorides | None |
| Coefficient of cubical expansion | |
| per °C | 0.00093 |
| per °F | 0.00052 |
| Color, Pt-Co | 10 max. |
| Critical pressure | 48.4 atm |
| Critical temperature | 287°C |
| Dielectric constant at 25°C | 16.1 |
| Distillation range (including 117.7°C) | 1.5°C max. |
| Electrical conductivity at 25°C | 9.12×10^{-9} reciprocal ohms |
| Explosive limits in air, Lower | 1.45% by vol. |
| Upper | 11.25% by vol. |
| Fire hazard | Moderate |
| Flash point, Tag open cup | 115°F |
| Freezing point | -89.0°C |
| Heat of combustion | 8626 cal/g |
| Heat of fusion | 29.9 cal/g |
| Heat of vaporization at boiling point | 141.3 cal/g |
| Ignition temperature | 367°C |
| Iron | None |
| MAC | 100 ppm in air |
| Melting point | -89.8°C |
| Molecular weight | 74.12 calculated |
| Non-volatile matter | 0.005 g/100 ml, max. |
| Odor | Characteristic, non-residual |
| Refractive index at 20°C, n_D | 1.3992 |
| Relative evaporation rate, n-butyl acetate = 1 | 0.45 |
| Solubility in water at 20°C | 7.8% by wt |
| Solubility of water in n-Butanol at 20°C | 20.1% by wt |
| Specific gravity at 20/20°C | 0.8109 |
| Specific heat of liquid at 20°C | 0.563 cal/g |
| Sulfuric acid test (Pt-Co) | 25 max. |
| Surface tension at 20°C | 24.6 dynes/cm |
| Suspended matter | Substantially free |
| Toxicity | Moderately toxic by inhalation, ingestion and skin absorption |
| Vapor pressure at 20°C | 4.39 mm Hg |
| 40°C | 18.6 mm Hg |
| 60°C | 59.2 mm Hg |
| 75°C | 131.3 mm Hg |
| 100.8°C | 400.0 mm Hg |
| Viscosity at 20°C | 2.948 centipoises |
| Water content | 0.10% by wt, max. |
| Weight per gallon at 20°C | 6.756 lbs |

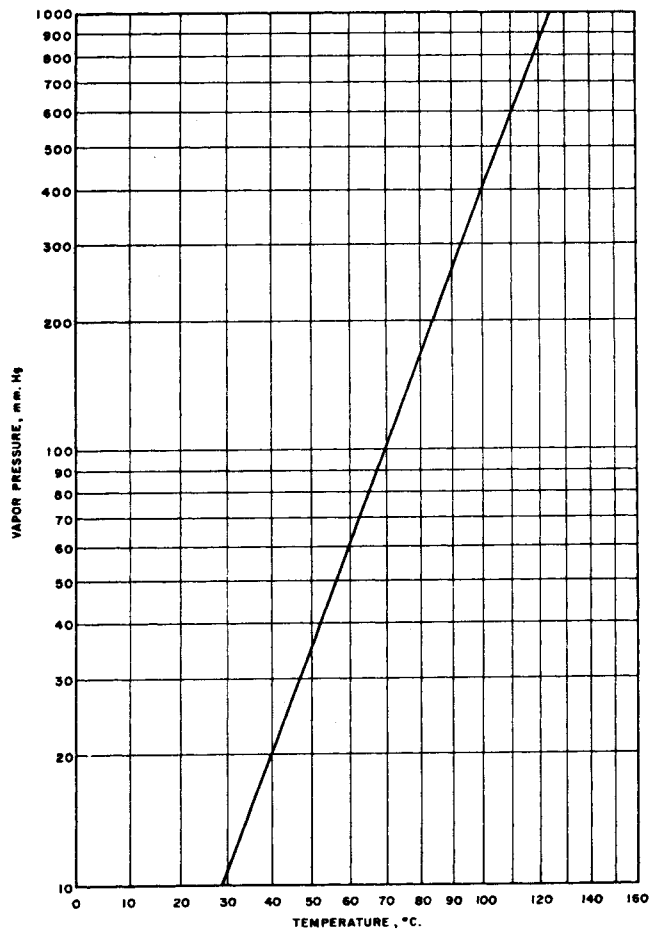
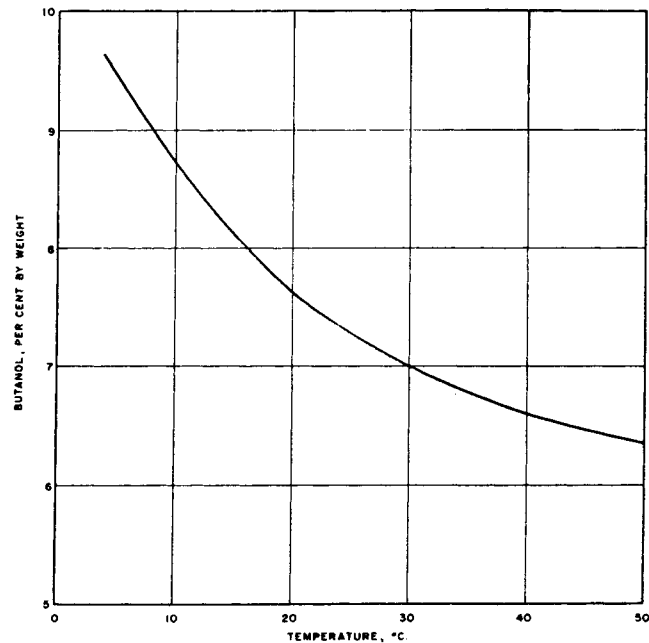
Table 6.75: Vapor Pressure of Butyl Alcohol at Various Temperatures (19)**Table 6.76: Solubility of Water in Butyl Alcohol at Various Temperatures (19)**

Table 6.77: Solubility of Butyl Alcohol in Water at Various Temperatures (19)

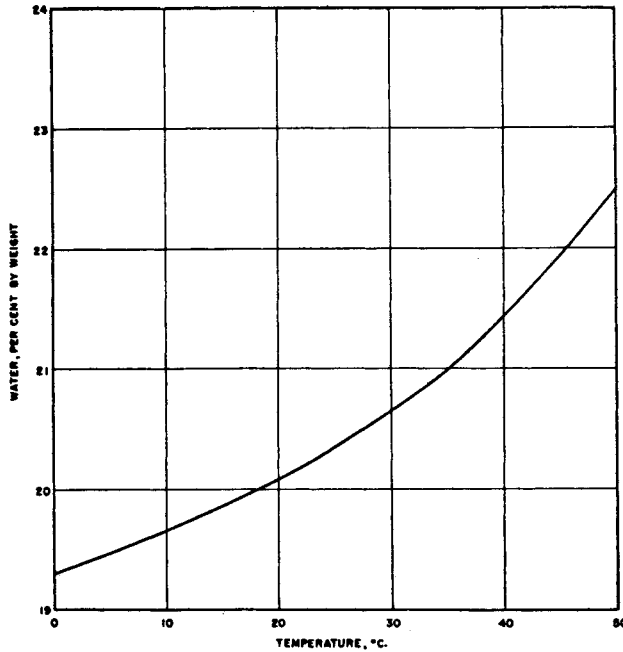


Table 6.78: Azeotropes of n-Butyl Alcohol (31)

n-BUTYL ALCOHOL FORMS BINARY AZEOTROPES WITH:

| % | | B. P. of Azeotrope °C | % | | B. P. of Azeotrope °C |
|------|-------------------------|-----------------------|----|----------------------|-----------------------|
| 87 | Acetal | 101.0 | 60 | Methyl isovalerate | 116.3 |
| 68.5 | 1-Bromo-3-methylbutane | 110.7 | 70 | 4-Methyl-2-pentanone | 114.4 |
| 32.8 | Butyl acetate | 117.6 | 50 | Octane | 110.2 |
| 12 | Butyl ether | 117.3 | 48 | Paraldehyde | 115.8 |
| 76.4 | Butyl formate | 105.8 | 12 | α -Pinene | 117.4 |
| 92.2 | Butyl vinyl ether | 93.3 | 29 | Pyridine | 118.7 |
| 2 | Camphene | 117.8 | 21 | Styrene | 116.5 |
| 44 | Chlorobenzene | 115.3 | 68 | Tetrachloroethylene | 110.0 |
| 88 | 1-Chloro-3-methylbutane | 97.0 | 73 | Toluene | 105.6 |
| 90 | Cyclohexane | 79.8 | 25 | o-Xylene | 116.8 |
| 95 | Cyclohexene | 82.0 | 32 | p-Xylene | 115.7 |
| 17.5 | Dibutyl ether | 117.6 | | | |
| 57 | 1,3-Dimethylcyclohexane | 108.5 | | | |
| 72 | 2,5-Dimethylhexane | 101.9 | | | |
| 48 | Ethyl borate | 113.0 | | | |
| 36 | Ethyl butyrate | 115.7 | | | |
| 37 | Ethyl carbonate | 116.5 | | | |
| 83 | Ethyl isobutyrate | 109.2 | | | |
| 82 | Heptane | 93.3 | | | |
| 97 | Hexane | 67.0 | | | |
| 18.2 | 2-Hexanone | 116.5 | | | |
| 20 | 3-Hexanone | 117.2 | | | |
| 22 | 1-Iodo-3-methylbutane | 117.3 | | | |
| 31 | Isomyl formate | 115.9 | | | |
| 50 | Isobutyl acetate | 114.5 | | | |
| 52 | Isobutyl ether | 113.5 | | | |
| 46 | Isopropyl isobutyrate | 115.5 | | | |
| 55 | Isopropyl sulfide | 112.0 | | | |
| 86 | Methylcyclohexane | 95.3 | | | |
| 92 | Methylcyclopentane | 71.8 | | | |

| n-BUTYL ALCOHOL FORMS TERNARY AZEOTROPES WITH: | | | | | |
|------------------------------------------------|----------------------|--|---|--|-----------------------|
| % | | | % | | B. P. of Azeotrope °C |
| 37.3 | Water | | | | |
| 35.3 | Butyl acetate | | | | 89.4 |
| 41.8 | Water | | | | |
| 7.9 | Butyl chloroacetate | | | | 93.1 |
| 29.3 | Water | | | | |
| 27.7 | Butyl ether | | | | 91.0 |
| 21.3 | Water | | | | |
| 68.7 | Butyl formate | | | | 83.6 |
| 3.1 | Water | | | | |
| 85.0 | Carbon tetrachloride | | | | 64.7 |

ISOBUTYL ALCOHOL

Isobutanol, 2-Methyl Propanol-1, Isopropyl Carbinol




Table 6.79: Physical Properties of Isobutyl Alcohol (31)

| | |
|-------------------------------------------------|-----------------------------------------|
| Alkalinity | 0.003% by wt, max. |
| Boiling point at 760 mm | 107.9°C |
| Coefficient of cubical expansion at 10 to 30°C | 0.95×10^{-3} |
| Color, APHA | 10 max. |
| Critical pressure | 48 atm |
| Critical temperature | 265°C |
| Distillation range (including 107.9°C) | 2°C max. |
| Electrical conductivity at 25°C | 8×10^{-3} mho per cm. |
| Evaporation rate (n-Butyl Acetate = 1.0) | 0.8 |
| Explosive limits in air, lower limit | 1.68% by volume |
| Fire hazard | Moderate |
| Flash point, Tag open cup | 103°F |
| Heat of combustion | 6382 cal/g |
| Heat of vaporization at boiling point | 138 cal/g/mole |
| Ignition temperature | 440°C |
| Melting point | -108°C |
| Molecular weight | 74.12 calculated |
| Non-volatile matter | 0.001 g/100 ml, max. |
| Refractive index at 20°C, n_D | 1.3959 |
| Solubility in water at 25°C | 8.8 ml per 100 ml |
| Solubility of water in isobutyl alcohol at 25°C | 20.0 ml per 100 ml |
| Specific gravity at 20/20°C | 0.8034 |
| Specific heat at 15°C | 0.716 cal/g/°C |
| Surface tension at 20°C | 22.8 dynes/cm |
| Toxicity | Highly toxic by inhalation or ingestion |
| Vapor density (Air = 1.0) | 2.55 |
| Vapor pressure at 20°C | 8.8 mm |
| Viscosity at 20°C | 6.68 centipoises |
| Water content | 0.2% by wt, max. |
| Weight per gallon at 20°C | 6.68 lbs |


Table 6.80: Azeotropes of Isobutyl Alcohol (31)

| ISOBUTYL ALCOHOL FORMS BINARY AZEOTROPES WITH: | |
|------------------------------------------------|-------------------------------|
| % | B.P. of Azeotrope °C |
| 90.7 | Benzene 79.9 |
| 36.4 | 1-Bromo-3-methylbutane 103.4 |
| 60 | Butyl formate 103.0 |
| 37 | Chlorobenzene 107.1 |
| 78 | 1-Chloro-3-methylbutane 94.5 |
| 88 | 1,3-Cyclohexadiene 79.4 |
| 86 | Cyclohexane 78.1 |
| 85.8 | Cyclohexene 80.5 |
| 44 | 1,3-Dimethylcyclohexane 102.2 |
| 48 | Ethyl isobutyrate 105.5 |
| 87 | Ethyl propionate 98.9 |
| 91 | Fluorobenzene 84.0 |
| 73 | Heptane 90.8 |
| 97.5 | Hexane 68.3 |
| 45 | Isobutyl acetate 107.4 |
| 79.4 | Isobutyl formate 97.8 |
| 93.8 | Isobutyl vinyl ether 82.7 |
| 27 | Isopropyl sulfide 105.8 |
| 75 | Methyl butyrate 101.3 |
| 68 | Methylcyclohexane 92.6 |
| 95 | Methylcyclopentane 71.0 |
| 10 | Methyl isovalerate 107.5 |
| 9 | 4-Methyl-2-pentanone 107.9 |
| 81 | 2-Pentanone 101.8 |
| 80 | 3-Pentanone 101.7 |
| 68 | Pinacolone 105.5 |
| 83 | Propyl acetate 101.0 |
| 90 | Propyl ether 89.5 |
| 55 | Toluene 101.2 |
| 73 | 2,2,4-Trimethylpentane 92.0 |

ISOBUTYL ALCOHOL FORMS TERNARY AZEOTROPES WITH:

| | | |
|------|------------------------|------|
| 30.4 | Water | |
| 46.5 | Isobutyl acetate | 86.8 |
| 33.6 | Water | |
| 13.3 | Isobutyl chloroacetate | 90.2 |
| 17.3 | Water | |
| 76 | Isobutyl formate | 80.2 |

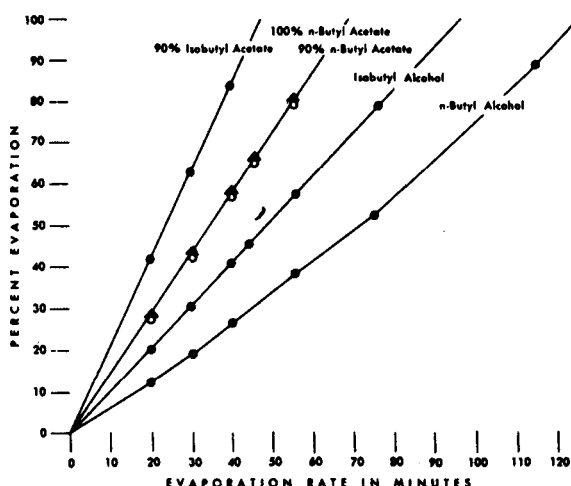Table 6.81: Relative Evaporation Rates of Various Butyl Alcohols and Acetates (41)



sec-BUTYL ALCOHOL

sec-Butanol, Butanol-2, Methyl Ethyl Carbinol



Table 6.82: Physical Properties of sec-Butyl Alcohol (31)

Table 6.83: Azeotropes of sec-Butyl Alcohol (31)

| | |
|--------------------------------------------------|--------------------------------------------------------------|
| Acidity as acetic acid | 0.003% by wt. max. |
| Boiling point at 760 mm | 99.5°C |
| Coefficient of cubical expansion at 20°C | 0.00101°C |
| Color, Pt-Co (Hazen) | 10 max. |
| Critical pressure | 46.9 atm |
| Critical temperature | 265.19°C |
| Distillation range | 98.0-101.0°C |
| Fire hazard | Dangerous when exposed to heat or flame |
| Flash Point, Tag open cup | 80°F |
| Tag closed cup | 75°F |
| Freezing point | -114.7°C |
| Heat of vaporization at 1 atm. | 134.4 g cal/g |
| Molecular weight | 74.12 |
| Non-volatile matter | 0.002 ml. max. |
| Purity | 99.0% min. |
| Refractive index at 20°C n _D | 1.39719 |
| Relative evaporation rate, n-Butyl acetate = 100 | 120 |
| Solubility in water at 20°C | 22.5% by wt |
| Solubility of water in, at 20°C | 60.0% by wt |
| Specific gravity at 20/20°C | 0.8079 |
| Specific heat at 8.5°C | 0.596 |
| Surface tension at 20°C | 23.0 dynes/cm |
| Toxicity | Moderate |
| Vapor pressure at 20°C | 12.1 mm |
| Viscosity at 20°C | 3.78 cps. |
| Water, presence of | Miscible without turbidity with 19 vol. of n-heptane at 20°C |
| Weight per gallon at 20°C | 6.73 lb |

sec-BUTYL ALCOHOL FORMS BINARY AZEOTROPES WITH:

| % | B.P. of Azeotrope °C |
|------|------------------------------|
| 61 | tert-Amyl ethyl ether 94.5 |
| 93 | tert-Amyl methyl ether 86.0 |
| 84.6 | Benzene 78.6 |
| 13.7 | sec-Butyl acetate 99.6 |
| 32 | Butyl formate 98.0 |
| 71 | 1-Chloro-3-methylbutane 91.5 |
| 79 | Cyclohexene 78.7 |
| 46 | 2,5-Dimethylhexene 93.0 |
| 53 | Ethyl propionate 95.7 |
| 68 | Ethyl sulfide 89.0 |
| 62 | Heptane 89.0 |
| 92 | Hexane 67.2 |
| 60 | Isobutyl formate 94.7 |
| 41 | Methyl butyrate 97.7 |
| 59 | Methylcyclohexane 89.9 |
| 88.5 | Methylcyclopentane 69.7 |
| 77 | Methyl isobutyrate 92.0 |
| 42 | 3-Pentanone 98.0 |
| 16 | Pinacolone 99.1 |
| 48 | Propyl acetate 96.5 |
| 78 | Propyl ether 87.0 |
| 45 | Toluene 95.3 |

tert-BUTYL ALCOHOL

tert-Butanol, 2-Methyl Propanol-2

(CH₃)₃COH

Table 6.84: Physical Properties of tert-Butyl Alcohol (31)

| | |
|---------------------------------------------------------|--------------------------------------------------------------|
| Acidity as acetic acid | 0.003% by wt, max. |
| Boiling point at 760 mm | 82.36°C |
| Coefficient of cubical expansion at 26°C | 0.00132°C |
| Color, Pt-Co (Hazen) max. | 10 max. |
| Compressibility at 20°C, between 100-500 megabars | 79.6 x 10 ⁻⁶ megadynes/cm |
| Critical pressure | 46 atm |
| Critical temperature | 234.9°C |
| Dielectric constant at 19°C (audio) | 11.4 cgs units |
| Distillation range | 81.5-83.0°C |
| Dipole moment | 1.65 x 10 ¹⁸ |
| Fire hazard | Dangerous when exposed to heat or flame |
| Flash point, Tag open cup | 60°F (approx.) |
| Tag closed cup | 48°F (approx.) |
| Freezing point | 25.57°C |
| Heat of combustion | |
| Liquid at constant volume | 6290 cal/g |
| constant pressure | 6302 cal/g |
| Vapor at constant pressure | 6426 cal/g |
| Heat of fusion at 25.5°C | 21.88 cal/g |
| Heat of solution at 15°C, of the solid alcohol in water | 3.23 kg cal |
| Heat of vaporization at 1 atm. | 130.6 g cal/g |
| Melting point | 25.57°C |
| Molecular weight | 74.12 |
| Molecular volume, 20/V _M | 94.3 cc |
| Non-volatile matter | 0.002 g/100 ml, max. |
| Purity | 99.0% by wt, min. |
| Refractive index at 20°C, n _D | 1.3841 |
| Solubility at 20°C, in water | Complete |
| water in | Complete |
| Specific heat at 26°C | 0.726 g cal/g |
| Specific gravity at 26/4°C | 0.7793 |
| Surface tension at 20°C | 20.7 dynes |
| 34.5°C | 19.45 dynes |
| 80°C | 14.6 dynes |
| Toxicity | Moderate |
| Vapor pressure at 30°C | 57.3 mm |
| Viscosity at 30°C | 3.316 cps. |
| Water | Miscible without turbidity with 19 vol. of n-heptane at 20°C |
| Weight per gallon at 26°C | 6.50 lb |

Table 6.85: Azeotropes of tert-Butyl Alcohol (31)

| tert-BUTYL ALCOHOL FORMS BINARY AZEOTROPES WITH: | | B.P. of Azeotrope °C |
|--------------------------------------------------|-------------------------|----------------------|
| % | | |
| 63.4 | Benzene | 74.0 |
| 94 | Carbon disulfide | 45.7 |
| 76 | Carbon tetrachloride | 29.5 |
| 41 | 1-Chloro-3-methylbutane | 81.2 |
| 61.5 | 1,3-Cyclohexadiene | 73.4 |
| 63 | Cyclohexane | 71.3 |
| 60 | Cyclohexene | 73.2 |
| 93 | Cyclopentane | 48.2 |
| 65 | Dibromodichloromethane | 79.0 |
| 94 | 1,1-Dichloroethane | 57.1 |
| 33 | Diisobutyl alcohol | 81.5 |
| 87 | 2,3-Dimethylbutane | 55.3 |
| 10 | 1,3-Dimethylcyclohexane | 82.2 |
| 23 | 2,5-Dimethylhexane | 81.5 |
| 75 | Ethyl acetate | 76.0 |
| 38 | Ethyl nitrate | 78.0 |
| 30 | Ethyl sulfide | 79.8 |
| 69 | Fluorobenzene | 76.0 |
| 38 | Heptane | 78.0 |
| 78 | Hexane | 63.7 |
| 83 | Isobutyl chloride | 65.5 |
| 34 | Methylcyclohexane | 78.8 |
| 74 | Methylcyclopentane | 66.6 |
| 70 | Methylcyclopentene | 69.5 |

PRIMARY AMYL ALCOHOL

Primary amyl alcohol, a mixture of isomers all of which are primary alcohols, is composed of approximately 60% pentanol-1 ($\text{CH}_3\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{OH}$); 35% 2-methyl butanol-1 ($\text{CH}_3\text{CH}_2\text{CH}(\text{CH}_3)\text{CH}_2\text{OH}$); and 5% 3-methyl butanol-1 ($\text{CH}_3\text{CH}(\text{CH}_3)\text{CH}_2\text{CH}_2\text{OH}$).

Table 6.86: Physical Properties of Primary Amyl Alcohol (19)

| | |
|------------------------------------|------------------------------|
| Acidity as acetic acid | 0.01% by wt. max. |
| Boiling point at 760 mm | 133.1°C |
| 50 mm | 68°C |
| 10 mm | 39°C |
| Carbonyl, as C_5 aldehyde | 0.20% by wt. max. |
| Coefficient of expansion at 20°C | 0.00092 per °C |
| Color, Pt-Co | 15, max. |
| Distillation at 760 mm lbp | 127.5°C |
| Dp | 139.0°C, max. |
| Fire hazard | Moderate |
| Flash point (open cup) | 118°F |
| Freezing point | Sets to glass below -90°C |
| Heat of vaporization at 133°C | 242 Btu/lb |
| Purity, as primary amyl alcohols | 98.0% by wt. min. |
| Refractive index at 20°C, n_D | 1.4084 |
| Solubility in water at 20°C | 1.7% by wt |
| Solubility of water in, at 20°C | 9.2% by wt |
| Specific gravity at 20/20°C | 0.8134 |

PRIMARY n-AMYL ALCOHOL

Table 6.87: Physical Properties of Primary n-Amyl Alcohol (31)

| | |
|------------------------------------|-----------------------------------------------|
| Acidity (mg KOH/g) | 0.06 max. |
| Boiling point | 137.8°C |
| Clarity | No turbidity or sus- pended matter |
| Coefficient of expansion per °C | 0.00092 |
| Distillation, initial | Not below 134.8°C |
| final | Not above 140.0°C |
| Fire point | 140°F |
| Fire hazard | Moderate |
| Flash point (open cup) | 135°F |
| Heat of vaporization | 120.6 cal/g (cal- culated) |
| Melting point | -78.5°C |
| Molecular weight | 88.15 (calculated) |
| Non-volatile matter at 100°C | 5.0 mg/100 ml, max. |
| Refractive index at 20°C | 1.4099 |
| Specific gravity at 20/20°C | 0.82 |
| Specific heat | 0.712 cal/g |
| Toxicity | Highly toxic by inhal- ation and ingestion |
| Viscosity at 25°C | 3.31 centipoises |
| 60°C | 1.33 centipoises |
| Weight per gallon | 6.82 lbs |

sec-AMYL ALCOHOL

Table 6.88: Physical Properties of sec-Amyl Alcohol (31)

| | |
|-----------------------------------------|------------------------------------------|
| Acidity as acetic acid | 0.02% max. |
| Boiling point | 119.3°C |
| Coefficient of expansion per 1°F | 0.00053 |
| 1°C | 0.00095 |
| Distillation range | 105° - 125°C |
| Evaporation rate at 90°F in minutes: | |
| 5% | 2.25 |
| 25% | 11.75 |
| 50% | 24.25 |
| 75% | 38.25 |
| 90% | 50.25 |
| 95% | 56.50 |
| Flash point, Open cup | 105°F |
| Fire hazard | Moderate |
| Heat of vaporization | 97.8 cal/g (calculated) |
| Non-volatile at 100°C | 0.003 g/100 cc max. |
| Purity | 99% by wt. min. |
| Refractive index at 25°C, n_D | 1.4041 |
| Solubility of water in | 8.2% by vol. |
| Specific gravity at 20°C | 0.811 |
| Toxicity | Highly toxic by ingestion and inhalation |
| Weight per gallon at 20°C | 6.75 lbs |

Table 6.89: Azeotropes of sec-Amyl Alcohol (31)

| sec-AMYL ALCOHOL FORMS BINARY AZEOTROPES WITH: | | | |
|------------------------------------------------|----|-------------------------|----------------------|
| | % | | B.P. of Azeotrope °C |
| | 45 | Chlorobenzene | 118.2 |
| | 62 | 1,3-Dimethylcyclohexane | 113.0 |
| | 33 | Ethylbenzene | 118.0 |
| | 53 | Ethyl butyrate | 118.5 |
| | 85 | Heptane | 96.0 |
| | 68 | Isobutyl acetate | 116.5 |
| | 59 | Isobutyl ether | 115.0 |
| | 82 | Methylcyclohexane | 98.6 |
| | 80 | Methyl isovalerate | 115.8 |
| | 44 | Octane | 114.8 |
| | 72 | Toluene | 107.0 |
| | 30 | m-Xylene | 118.3 |

sec-n-AMYL ALCOHOL

Table 6.90: Physical Properties of sec-n-Amyl Alcohol (31)

| | |
|------------------------------------|---------------------------------------------|
| Acidity as acetic acid | 0.06% max. |
| Boiling point | 115.6°C |
| Coefficient of expansion per °C | 0.00149 |
| Distillation, 95% | Between 113.6 - 117.6°C |
| Fire hazard | Moderate |
| Flash point | 100°F |
| Freezing point | Less than -75°C |
| Heat of vaporization | 96.8 cal/g (calculated) |
| Non-volatile at 100°C | 0.003 g/100 cc max. |
| Refractive index at 20°C | 1.4098 |
| Specific gravity at 20°C | 0.82 |
| Toxicity | Highly toxic by inhalation and ingestion |
| Viscosity at 25°C | 4.12 centipoises |
| 60°C | 1.09 centipoises |
| Weight per gallon at 20°C | 6.81 lbs |

Table 6.91: Azeotropes of sec-n-Amyl Alcohol (31)

sec-n-AMYL ALCOHOL FORMS BINARY AZEOTROPES WITH:

| % | | B.P. of Azeotrope °C |
|----|----------------------|----------------------|
| 97 | Cyclohexane | 80.0 |
| 80 | Heptane | 96.0 |
| 77 | Methylcyclohexane | 97.4 |
| 65 | 4-Methyl-2-pentanone | 115.0 |
| 65 | Toluene | 106.0 |

tert-AMYL ALCOHOL, REFINED

2-Methyl Butanol-2, Dimethylethyl Carbinol, Amylene Hydrate, tert-Pentanol

**Table 6.92: Physical Properties of Refined tert-Amyl Alcohol (31)**

| | |
|-------------------------------------------|-----------------------------------------|
| Acidity as acetic acid | 0.15% max. |
| Boiling point | 101.8°C |
| Clarity | No turbidity or suspended matter |
| Coefficient of expansion per °C | 0.00133 (calculated) |
| Distillation, 95% between | 98.8 - 103.8°C |
| Fire hazard | Dangerous when exposed to heat or flame |
| Flash point, Open cup | 70°F |
| Freezing point | -11.9°C |
| Heat of vaporization | 93.4 cal/g |
| Molecular weight | 88.15 (calculated) |
| Neutralization value, mg KOH/g | 0.06 max. |
| Non-volatile matter | 0.003 g/100 cc, max. |
| Odor | Camphor-like |
| Refractive index at 20°C | 1.4052 |
| Specific gravity at 20/20°C | 0.81 - 0.82 |
| Specific heat | 0.753 cal/g |
| Toxicity | Moderate |
| Viscosity at 25°C | 3.70 centipoises |
| at 63°C | 0.99 centipoises |
| Water content | None |
| Water tolerance, water per 100 cc alcohol | 18.0 min. |
| Weight per gallon | 6.75 lbs |

Table 6.93: Azeotropes of tert-Amyl Alcohol (31)**tert-AMYL ALCOHOL FORMS BINARY AZEOTROPES WITH:**

| % | | B. P. of Azeotrope °C |
|------|-------------------------|-----------------------|
| 85 | Benzene | 80.0 |
| 85 | 1,3-Cyclohexadiene | 79.7 |
| 84 | Cyclohexane | 78.5 |
| 83 | Cyclohexene | 80.8 |
| 32 | 1,3-Dimethylcyclohexane | 101.1 |
| 50 | 2,5-Dimethylhexane | 97.0 |
| 73.5 | Heptane | 92.2 |
| 96 | Hexane | 68.3 |
| 60 | Methylcyclohexane | 92.0 |
| 95 | Methylcyclopentane | 71.5 |
| 25 | Octane | 101.1 |
| 80 | Propyl ether | 88.8 |
| 44 | Toluene | 100.5 |

ISOAMYL ALCOHOL

3-Methyl-1-Butanol, Primary Isoamyl Alcohol, Isobutyl Carbinol




Table 6.94: Physical Properties of Isoamyl Alcohol (31)

| | |
|------------------------------------------------|------------------------------------------------------------------------------------------------|
| Acidity as acetic acid | 0.01% max. |
| Boiling point at 760 mm | 131.4°C |
| Coefficient of expansion per °C per °F | 0.00090 0.00050 |
| Color, APHA | No. 10 max. |
| Critical temperature | 307°C |
| Distillation range, below 128°C above 132°C | None None |
| Dryness | A 5 ml. sample is clearly miscible with at least 19 parts of 60 Be gas- oline at 60°F |
| Esters | Not more than 0.060% as amyl acetate |
| Fire hazard | Moderate |
| Flash point, Open cup | 125°F |
| Heat of combustion | 794.5 gram calories per gram |
| Latent heat of vaporization | 105.4 gram calories per gram |
| MAC | 100 ppm in air |
| Melting point | -117.2°C |
| Molecular weight | 88.15 |
| Non-volatile matter | 0.003% max. |
| Odor | Alcoholic, non-residual |
| Refractive index at 20°C | 1.4014 |
| Solubility in water at 14°C | 2.0% by wt |
| Specific gravity at 20/20°C | 0.810 - 0.813 |
| Specific heat at 20°C | 0.544 gram calories per gram per °C |
| Surface tension at 20°C | 23.8 dynes per cm |
| Toxicity | Highly toxic by ingestion and inhalation |
| Vapor pressure at 20°C | 2.8 mm Hg |
| Viscosity (absolute) at 23.8°C | 3.86 centipoises |
| Weight per gallon at 20°C | 6.76 lbs approx. |

Table 6.95: Azeotropes of Isoamyl Alcohol (31)

| ISOAMYL ALCOHOL FORMS BINARY AZEOTROPES WITH: | | |
|------------------------------------------------|------|-------------------------------|
| | % | B.P. of Azeotrope °C |
| | 15 | Bromobenzene 131.7 |
| | 82.5 | Butyl acetate 125.9 |
| | 35 | Butyl ether 129.8 |
| | 76 | Camphene 130.9 |
| | 66 | Chlorobenzene 124.4 |
| | 6 | Cumene 131.6 |
| | 73 | 1,3-Dimethylcyclohexane 116.6 |
| | 85 | 2,5-Dimethylhexane 107.6 |
| | 42 | Ethyl isovalerate 130.5 |
| | 93 | Heptane 97.7 |
| | 2.6 | Isoamyl acetate 129.1 |
| | 74.5 | Isoamyl formate 123.6 |
| | 88 | Isoamyl vinyl ether 112.1 |
| | 78 | Isobutyl ether 119.8 |
| | 28 | Isobutyl propionate 131.2 |
| | 76 | Mesityl oxide 129.2 |
| | 87 | Methylcyclohexane 98.2 |
| | 65 | Octane 120.0 |
| | 78 | Paraldehyde 123.5 |
| | 26 | α-Pinene 137.7 |
| | 47 | Propyl isobutyrate 130.2 |
| | 21 | Propyl sulfide 130.5 |
| | 95 | 2,2,4-Trimethylpentane 99.0 |
| | 48 | o-, m-, or p-Xylene 125-126 |
| ISOAMYL ALCOHOL FORMS TERNARY AZEOTROPES WITH: | | |
| | % | B.P. of Azeotrope °C |
| | 44.8 | Water 93.6 |
| | 24.0 | Isoamyl acetate 95.4 |
| | 46.2 | Water 89.8 |
| | 6.5 | Isoamyl chloroacetate 89.8 |
| | 32.4 | Water 89.8 |
| | 48 | Isoamyl formate 89.8 |

ACTIVE AMYL ALCOHOL**Table 6.96: Physical Properties of Active Amyl Alcohol (31)**

| | |
|------------------------------------|----------------------------------------------|
| Acidity (mg KOH per g) | 0.06 max. |
| Boiling point | 128°C |
| Coefficient of expansion per °C | 0.00078 |
| Distillation: 95% 30% | Between 125 - 131°C min. Above 130°C max. |
| Flash point, Open cup | 120°F |
| Freezing point | Less than -70°C |
| Heat of vaporization | 100.0 cal/g (calculated) |
| Refractive index at 20°C | 1.4097 |
| Residue | 0.003 g/100 cc |
| Specific gravity at 20/4°C | 0.816 |
| Viscosity at 20°C 60°C | 5.09 centipoises 1.44 centipoises |
| Weight per gallon at 20°C | 6.80 lbs |

FUSEL OIL, REFINED


Refined fusel oil is a volatile, poisonous, oily mixture consisting largely of amyl alcohols.

Table 6.97: Physical Properties of Refined Fusel Oil (31)

| Acidity as acetic acid | 0.01% max. | | | | | | | | | | | | | | |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------|---|-----|----|------|----|------|----|-------|----|-------|----|-------|
| Coefficient of expansion per 1°C 1°F | 0.00051-0.0006 0.00092-0.0011 | | | | | | | | | | | | | | |
| Color, APHA | No. 10 max. | | | | | | | | | | | | | | |
| Distillation range (ASTM) below 110°C below 120°C below 130°C above 135°C | None Not more than 15% Not less than 60% None | | | | | | | | | | | | | | |
| Dryness | A 5 ml. sample is clearly miscible with at least 19 parts of 60° Bé gas- oline at 60°F | | | | | | | | | | | | | | |
| Evaporation rate at 95°F | <table> <thead> <tr> <th>%</th> <th>Minutes</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>3.5</td> </tr> <tr> <td>25</td> <td>17.0</td> </tr> <tr> <td>50</td> <td>36.5</td> </tr> <tr> <td>75</td> <td>64.75</td> </tr> <tr> <td>90</td> <td>90.25</td> </tr> <tr> <td>95</td> <td>103.5</td> </tr> </tbody> </table> | % | Minutes | 5 | 3.5 | 25 | 17.0 | 50 | 36.5 | 75 | 64.75 | 90 | 90.25 | 95 | 103.5 |
| % | Minutes | | | | | | | | | | | | | | |
| 5 | 3.5 | | | | | | | | | | | | | | |
| 25 | 17.0 | | | | | | | | | | | | | | |
| 50 | 36.5 | | | | | | | | | | | | | | |
| 75 | 64.75 | | | | | | | | | | | | | | |
| 90 | 90.25 | | | | | | | | | | | | | | |
| 95 | 103.5 | | | | | | | | | | | | | | |
| Fire hazard | Moderate | | | | | | | | | | | | | | |
| Flash point, Open cup Closed cup | 123°F, approx. 106°F, approx. | | | | | | | | | | | | | | |
| Specific gravity at 20/20°C | 0.810-0.815 | | | | | | | | | | | | | | |
| Toxicity | Highly toxic by ingestion and inhalation | | | | | | | | | | | | | | |
| Water solubility at 25°C, 100 cc solvent dissolves | 9.9 cc water | | | | | | | | | | | | | | |
| Weight per gallon at 20°C | 6.76 - 6.77 lbs. | | | | | | | | | | | | | | |

METHYLAMYL ALCOHOL

Methyl Isobutyl Carbinol, 4-Methylpentanol-2, MIBC



Methylamyl alcohol is a secondary alcohol.

Table 6.98: Physical Properties of Methylamyl Alcohol (31)

| | | | |
|------------------------------------------------|---------------------------------|------------------------------------------|----------------------|
| Acidity as acetic acid | 0.005% by wt. max. | Heat of vaporization at 1 atm. | 98.6 g cal/g |
| Azeotrope with water: | | MAC | 25 ppm in air |
| boiling point, 760 mm, °C | 94.3 | Molecular weight | 102.17 |
| methyl amyl alcohol, %w | 55.6 | Non-volatile matter | 0.005 g/100 ml max. |
| Boiling point at 760 mm | 131.63 - 131.8°C | Odor | Mild and nonresidual |
| Coefficient of cubical expansion at 20°C/°C | 0.00103 | Purity, minimum | 97.5% by wt |
| Color, Pt-Co scale | 10 max. | Refractive index at 20°C, n _D | 1.4081 - 1.4113 |
| Critical pressure, atm. | 42.4 | Solubility in water at 20°C | 1.7 - 1.8% by wt |
| Critical temperature | 312°C | Solubility of water in, at 20°C | 5.8 - 6.2% by wt |
| Distillation range, 760 mm | 130.0 - 133.0°C | Specific gravity at 20/20°C | 0.8079 - 0.8080 |
| Fire hazard | Moderate | Specific heat at 20°C | 0.52 g cal/g-°C |
| Flash point, Tag open cup | 131°F | Surface tension at 20°C | 22.8 dynes/cm |
| Tag closed cup | 106°F | Suspended matter | Substantially free |
| Freezing point | -90°C, sets to a glass below | | |

2-ETHYLBUTYL ALCOHOL
Table 6.99: Physical Properties of 2-Ethylbutyl Alcohol (31)

| | | | |
|------------------------------------|------------------------------------------------|------------------------------------|----------------|
| Acidity as acetic acid | 0.02% max. | Solubility in water at 20°C | 0.43% by wt |
| Boiling point at 760 mm | 147.0°C | Solubility of water in, at 20°C | 4.6% by wt |
| Boiling range at 760 mm | | Specific gravity at 20/20°C | 0.8328 |
| below 140°C | None | Specific heat at 25°C | 0.586 cal/g |
| below 145°C | Not more than 5% | Surface tension at 28°C | 28.05 dynes/cm |
| below 155°C | Not less than 95% | Vapor pressure at 20°C | 1.2 mm |
| above 160°C | None | Viscosity at 20°C | 5.63 cps. |
| Coefficient of expansion per °C | 0.000892 to 20°C 0.000921 to 55°C | Weight per gallon at 20°C | 6.93 lbs |
| Dryness at 20°C | Miscible with 19 vol. of 60° Bé gasoline | | |
| Flash point (ASTM open cup) | 58°C (137°F) | | |
| Heat of vaporization, 1 atm. | 196 Btu/lb | | |
| Molecular weight | 102.17 | | |
| Non-volatile matter | 0.005% max. | | |
| Refractive index at 20°C | 1.4229 | | |

n-HEXYL ALCOHOL

n-Hexanol, Hexanol-1, Amyl Carbinol




Table 6.100: Physical Properties of n-Hexyl Alcohol (31)

| | | | |
|--------------------------------|--------------|------------------------------------------|---------------------------------------------------------------------|
| Acidity as acetic acid | 0.01% by wt | Refractive index at 20°C, n _D | 1.4181 |
| Boiling point at 760 mm | 157.1°C | Solubility in water at 20°C | 0.58% by wt |
| 50 mm | 89°C | Solubility of water in, at 20°C | 7.2% by wt |
| 10 mm | 60°C | Specific gravity at 20/20°C | 0.8203 - 0.8208 |
| Boiling range at 760 mm | 153 to 160°C | Specific heat at 16.9°C | 0.544 Cal/gm/°C |
| Color (Pt-Co Scale) | 15 max. | at 13°C | 0.500 Cal/gm/°C |
| Fire hazard | Moderate | Surface tension at 30°C | 23.6 dynes/cm |
| Flash point (Open cup) | 165°F | Suspended matter | Substantially free |
| Freezing point | -44.6°C | Vapor pressure at 20°C | 0.43 mm |
| Heat of vaporization at 1 atm. | 213 Btu/lb | Viscosity (absolute) at 20°C | 5.4 cps |
| Hydroxyl number | 530 min. | Water content | Miscible without turbidity with 19 vol. of 60° API gasoline at 20°C |
| Iodine number | 1.2 min. | Weight per gallon at 20°C | 6.83 lbs |
| Molecular weight | 102.17 | | |
| Odor | Mild | | |

Table 6.101: Solubility of Water in n-Hexyl Alcohol (31)

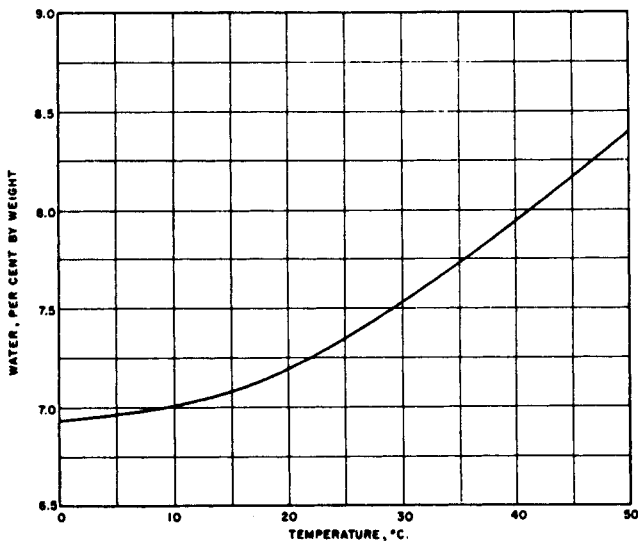


Table 6.102: Azeotropes of Hexyl Alcohol (31)

| HEXYL ALCOHOL FORMS BINARY AZEOTROPES WITH: | | |
|---------------------------------------------|---------------------|----------------------|
| % | | B.P. of Azeotrope °C |
| 63.5 | Anisole | 151.0 |
| 27 | Benzyl methyl ether | 156.7 |
| 52 | Camphene | 150.8 |
| 56 | o-Chlorotoluene | 153.5 |
| 46 | p-Chlorotoluene | 154.0 |
| 65 | Cumene | 149.5 |
| 53 | 2, 7-Dimethyloctane | 152.5 |
| 11 | Isoamyl ether | 157.0 |
| 40 | Isoamyl propionate | 156.7 |
| 50 | Isobutyl butyrate | 155.0 |
| 45 | Mesitylene | 153.5 |
| 19 | Phenetole | 157.7 |
| 60 | α-Pinene | 150.8 |
| 55 | Propylbenzene | 152.5 |
| 32 | Pseudocumene | 156.3 |
| 77 | Styrene | 144.0 |
| 85 | m-Xylene | 138.3 |
| 82 | o-Xylene | 143.6 |
| 87 | p-Xylene | 137.0 |

CYCLOHEXYL ALCOHOL

Table 6.103: Physical Properties of Cyclohexyl Alcohol (31)

| | | | |
|------------------------------------------|-----------------|----------------------------------|--------------------------------------|
| Boiling point at 760 mm | 161.1°C (322°F) | Toxicity | Moderate by ingestion and inhalation |
| Boiling range at 760 mm, 5-95% | 156-163°C | Vapor density (air = 1.00) | 3.45 |
| Color, APHA | 10 max. | Vapor pressure at 20 °C | 0.8 mm |
| Crystallization point | -10°C min. | 70 | 15 |
| Dielectric constant at 25°C | 15.0 | 80 | 27 |
| Evaporation rate at 45°C (toluene = 100) | 8 approx. | 100 | 78 |
| Fire hazard | Moderate | 120 | 187 |
| Flash point (Closed cup) | 145°F | 140 | 398 |
| Flash point (Open cup) | 154°F | 150 | 554 |
| Freezing point | 18-25.15°C | 161.1 | 760 |
| Heat of combustion, liquid | 8893 cal/g | Viscosity at 25 °C | 49.8 centipoises |
| Heat of fusion | 4.9 cal/g | 39.1°C | 20.3 cps. |
| Heat of vaporization | 108 cal/g | 65.9°C | 5.8 cps. |
| Ketone as cyclohexanone | 0.5% max. | 90 °C | 2.45 cps. |
| Phenol | 0.05% max. | Water | 0.5% max. |
| Refractive index at 20°C | 1.4656 | Weight per gallon at 20°C (68°F) | 7.91 lbs. |
| Solubility in water at 20°C | 3.6% by wt. | | |
| Solubility of water in at 20°C | 20% by wt. | | |
| Specific gravity at 20/4°C | 0.9493 | | |
| Specific heat at 15-18°C | 0.417 cal/gm | | |
| Surface tension at 16.2°C | 34.23 dynes/cm | | |


Table 6.104: Azeotropes of Cyclohexyl Alcohol (31)

CYCLOHEXYL ALCOHOL FORMS BINARY AZEOTROPES WITH

| % | | B. P. of Azeotrope °C |
|----|---------------------|-----------------------|
| 70 | Anisole | 152.5 |
| 38 | Benzyl methyl ether | 159.0 |
| 59 | Camphene | 151.9 |
| 85 | Chloroacetal | 155.6 |
| 62 | o-Chlorotoluene | 155.5 |
| 45 | p-Chlorotoluene | 156.5 |
| 8 | Cineole | 160.55 |
| 72 | Cumene | 150.0 |
| 28 | Cymene | 159.5 |
| 25 | Indene | 160.0 |
| 22 | Isoamyl ether | 158.8 |
| 37 | Isoamyl propionate | 157.7 |
| 80 | Isobutyl butyrate | 156.0 |
| 35 | α-Phellandrene | 158.0 |
| 60 | Propylbenzene | 153.8 |
| 83 | Propyl isovalerate | 155.1 |
| 40 | Pseudocumene | 158.0 |
| 35 | α-Terpene | 158.3 |
| 22 | Thymene | 159.8 |
| 95 | m-Xylene | 138.9 |
| 86 | o-Xylene | 143.0 |

HEPTYL ALCOHOL

Heptanol-1, Alcohol C-7

**Table 6.105: Physical Properties of Heptyl Alcohol (31)**

| | |
|---------------------------------|---------|
| Boiling point at 765 mm | 175°C |
| Freezing point | -34.6°C |
| Refractive index at 20°C, n_D | 1.4233 |
| Specific gravity at 20/4°C | 0.824 |


Table 6.106: Azeotropes of Heptyl Alcohol (31)

HEPTYL ALCOHOL FORMS BINARY AZEOTROPES WITH:

| % | | B.P. of Azeotrope °C |
|----|----------------------|----------------------|
| 80 | Benzyl methyl ether | 167.0 |
| 90 | Camphene | 159.3 |
| 53 | Cymene | 172.5 |
| 50 | Dipentene | 171.7 |
| 63 | Isoamyl ether | 170.4 |
| 92 | Isobutyl isovalerate | 171.0 |
| 48 | p-Methylanisole | 173.0 |
| 72 | Phenetole | 169.0 |
| 60 | α -Terpinene | 169.7 |

2-HEPTYL ALCOHOL

Heptanol-2, Methylamyl Carbinol




2-Heptyl alcohol is a secondary alcohol.

Table 6.107: Physical Properties of 2-Heptyl Alcohol (31)

| | |
|--------------------------------------|-------------------------------------------|
| Acidity as acetic acid | 0.03% by wt., max. |
| Boiling point at 760 mm | 160.4°C |
| Boiling range at 760 mm, below 155°C | None |
| below 158°C | Not more than 5% |
| below 162°C | Not less than 95% |
| above 165°C | None |
| Color (Pt-Co scale) | 15, max. |
| Dryness at 20°C | Miscible with 19 vols. 60° Bé gasoline |
| Fire hazard | Moderate |
| Flash point (Open cup) | 160°F |
| Solubility in water at 20°C | 0.35% by wt. |
| Solubility of water in at 20°C | 5.80% by wt. |
| Specific gravity at 20/20°C | 0.8187 |
| Vapor pressure at 20°C | 1.0 mm |
| Weight per gallon at 20°C | 6.81 lbs. |

3-HEPTYL ALCOHOL


Heptanol-3


Table 6.108: Physical Properties of 3-Heptyl Alcohol (31)

| | |
|-----------------------------|---------------------------|
| Acidity as acetic acid | 0.02% by wt. |
| Boiling point at 760 mm | 156.2°C |
| Boiling range | 153-158°C |
| Color, APHA (Pt-Co scale) | 5 |
| Fire hazard | Moderate |
| Flash point | 140°F |
| Freezing point | -70°C sets to glass below |
| Specific gravity at 20/20°C | 0.8224 |
| Vapor pressure at 20°C | 0.58 mm |
| Weight per gallon at 20°C | 6.84 lbs. |

2-ETHYLHEXYL ALCOHOL


2-Ethylhexanol, Octyl Alcohol


Table 6.109: Physical Properties of 2-Ethylhexyl Alcohol (31)

| | | | |
|-------------------------------------------------------|------------------------------|---------------------------------|-----------------|
| Acidity as acetic acid | 0.01% max. | Heat of vaporization, 1 atm. | 167 Btu/lb |
| Aldehydes | None | Molecular weight | 130.22 |
| Boiling point at 760 mm | 184.8°C | Refractive index at 20°C, n_D | 1.4316 |
| Boiling range, below 180°C above 192°C | None | Solubility in water at 20°C | 0.10% by wt |
| Coefficient of expansion per °C | 0.000875 to 20°C | Solubility of water in, at 20°C | 2.6% by wt |
| | 0.000902 to 55°C | Specific gravity at 20/20°C | 0.8339 |
| Color, APHA | 5 max. | Specific heat at 25°C | 0.564 cal/gm/°C |
| Constant-boiling mixture, solvent 20% water 80% | b.p. 99.1°C | Surface tension at 22°C | 30.0 dynes/cm |
| Fire hazard | Slight | Unsaturation, as ethyl hexanol | 0.2% max. |
| Flash point, Open cup | 185°F | Vapor pressure at 20°C | 0.05 mm |
| Freezing point | -70°C sets to glass below | Viscosity at 20°C | 9.8 cps. |
| | | Weight per gallon at 20°C | 6.94 lbs |

n-OCTYL ALCOHOL

n-Octanol, Octanol-1


Table 6.110: Physical Properties of n-Octyl Alcohol (31)

| | | | |
|-------------------------|---------------|---------------------------------|----------------------------|
| Acid number | 0.2 max. | Molecular weight | 130.22 |
| Boiling point at 760 mm | 195°C (383°F) | Refractive index at 20°C, n_D | 1.42920 |
| Boiling range at 760 mm | 194 - 197°C | Solubility in water at 25°C | 0.059 g per 100 g water |
| Color, dichromate | 0.002 max. | Specific gravity at 20/4°C | 0.827 |
| Ester number | 1.3 max. | Viscosity at 20°C | 8.925 centipoise |
| Fire hazard | Slight | Water | 0.25% max. |
| Flash point (Open cup) | 195°F | | |
| Freezing point | -15°C (5°F) | | |
| Heat of combustion | 9690 cal/g | | |
| Hydroxyl number | 415 - 440 | | |
| Iodine number | 1.3 max. | | |

Table 6.111: Azeotropes of n-Octyl Alcohol (31)

OCTYL ALCOHOL FORMS BINARY AZEOTROPES WITH:

| % | | B. P. of Azeotrope °C |
|----|---------------------------|-----------------------|
| 80 | N, N-Dimethyl-o-toluidine | 184.8 |
| 88 | Indene | 182.4 |
| 85 | Isoamyl isovalerate | 192.6 |
| 70 | Isobornyl methyl ether | 191.9 |
| 80 | Isobutyl carbonate | 189.5 |
| 92 | d-Limonene | 177.5 |
| 20 | Phorone | 193.5 |
| 90 | γ-Terpinene | 182.5 |
| 93 | Thymene | 179.6 |

sec-OCTYL ALCOHOL**Table 6.112: Physical Properties of sec-Octyl Alcohol (31)**

| | 85% Grade | 95% Grade |
|-----------------------------|-----------------|-----------------|
| Boiling range | | |
| first 5% | | 173 - 178°C |
| 90% | 174 - 181.5°C | 178 - 182.5°C |
| Density, lbs per gallon | 6.8 | 6.8 |
| Fire hazard | Moderate | Slight |
| Flash point | 164°F | 185°F |
| Hydroxyl number | 376 - 388 | 408 - 414 |
| Melting point | | -38°C |
| Methyl hexyl ketone content | 10 - 15% | Less than 5% |
| Molecular weight | 130.23 | 130.23 |
| Refractive index at 20°C | 1.4244 - 1.4252 | 1.4258 - 1.4262 |
| Specific gravity at 20°C | 0.814 - 0.820 | 0.818 at 25°C |
| Water content | 1.0 - 1.2% | 0.3 - 0.5% |

Table 6.113: Azeotropes of sec-Octyl Alcohol (31)

sec-OCTYL ALCOHOL FORMS BINARY AZEOTROPES WITH:

| % | | B. P. of Azeotrope °C |
|------|-------------------|-----------------------|
| 14 | Amyl ether | 179.8 |
| 50 | Butylbenzene | 178.2 |
| 89 | Butyl isovalerate | 177.4 |
| 73.5 | Cineole | 175.9 |
| 56 | Cymene | 174.0 |
| 40 | Indene | 176.0 |
| 28 | Isoamyl butyrate | 180.3 |
| 83 | Isoamyl ether | 172.7 |
| 55 | d-Limonene | 174.5 |
| 73 | α-Terpinene | 171.8 |
| 43 | Terpinolene | 179.0 |
| 48 | Thymene | 176.0 |

ISOCTYL ALCOHOL

Table 6.114: Physical Properties of Isooctyl Alcohol (31)

| | | | |
|------------------------------------------|---------------|---------------------------|-------------------|
| Acidity as acetic acid | 0.001% by wt | Surface tension at 20°C | 29.5 dynes/cm |
| Carbonyl number | 0.10 mg KOH/g | Vapor pressure, °C °F | mm |
| Coefficient of expansion per °C | 0.000814 | 50 122 | 1.95 |
| Color (Hazen, Pt-Co) | 5 | 75 167 | 8.4 |
| Fire hazard | Slight | 100 212 | 30 |
| Flash point (Tag open cup) | 180°F | 125 257 | 94 |
| Pour point | -95°F | 150 302 | 250 |
| Purity | 99.5% by wt | 175 347 | 600 |
| Refractive index at 20°C, n _D | 1.4308 | 180 356 | 700 |
| Solubility in water at 25°C | 0.06 g/100g | Viscosity, °C °F | Centistokes |
| at 50°C | 0.08 g/100g | 37.8 100 | 6.4 |
| Solubility of water in, at 5°C | 3.4 g/100g | 20.0 68 | 12.7 |
| 20°C | 3.8 g/100g | -9.4 15 | 51.3 |
| 40°C | 4.1 g/100g | -17.8 0 | 84.4 |
| Specific gravity at 20/20°C | 0.832 | -31.7 -25 | 224.2 |
| 60/60°F | 0.834 | Water | 0.02% by wt |
| Specific heat, 50 - 150°C | 0.79 cal/g/°C | Weight per gallon at 60°F | 6.95 lbs, approx. |

NONYL ALCOHOL

Table 6.115: Physical Properties of Nonyl Alcohol (31)

| | |
|------------------------------------------|--------------------|
| Aldehyde content | 0.30% by wt |
| Boiling point at 760 mm | 173.3°C |
| Color, Saybolt | 30 |
| Distillation (ASTM), initial | 193°C |
| 5% | 196°C |
| 50% | 198°C |
| 95% | 201°C |
| max. | 206°C |
| Fire hazard | Moderate |
| Flash point (Open cup) | 80°C (176°F) |
| Freezing point | -65°C |
| Heat of vaporization (Lv), | |
| 100°F | 22,000 Btu/lb mole |
| 300°F | 19,000 Btu/lb mole |
| 400°F | 17,400 Btu/lb mole |
| Mixed aniline point | -15°C |
| Neutralization number | 0.02 mg KOH/g |
| Refractive index at 20°C, n _D | 1.4390 |
| Solubility in water at 20°C | 0.06% by wt |
| Solubility of water in, at 20°C | 0.99% by wt |
| Specific gravity at 20/20°C | 0.8121 |
| Vapor pressure at 20°C | 0.3 mm |
| Viscosity at 0°C | 56.0 cps. |
| at 20°C | 14.3 cps. |
| Weight per gallon at 20°C | 6.75 lbs |

3,5,5-TRIMETHYLHEXYL ALCOHOL

Table 6.116: Physical Properties of 3,5,5-Trimethylhexyl Alcohol (31)

| | |
|------------------------------------------|-------------------------------|
| Boiling point at 10 mm 760 mm | 83°C (181°F) 194°C (381°F) |
| Boiling range at 760 mm, first drop | 190°C |
| 90% dry | 194 ± 1°C 195.5°C |
| Color (APHA) | 25 max. |
| Flash point (Open cup) | 200°F |
| Freezing point | Below -70°C |
| Molecular weight | 144.25 |
| Purity (by hydroxyl number) | 97.5% min. |
| Refractive index at 25°C, n _D | 1.4300 |
| Specific gravity at 25/4°C | 0.8236 |
| Viscosity at 25°C | 11.06 centipoises |
| Water content | 0.15% max. |
| Weight per gallon at 25°C | 6.86 lbs |

DECYL ALCOHOL

Table 6.117: Physical Properties of Decyl Alcohol (31)

| | <u>Oxo Process</u> | <u>Fatty acid Process</u> | | <u>Oxo Process</u> | <u>Fatty Acid Process</u> |
|---------------------------------------------|--------------------------------|---------------------------|-----------------------------------|--------------------------------|---------------------------|
| Acidity | 0.0015% by wt. | | Solubility in water at 20°C | Less than 0.01% by wt. | |
| Acid number | | 0.2 max. | Solubility of water in at 20°C | 2.3% by wt. | |
| Aldehydes, as decanal | 0.20%, max. | | Specific gravity at 20/20°C | 0.837-0.840 | 0.829 at 20/4°C |
| Boiling point at 760 mm | 217.3°C | 231°C (448°F) | Sulfur | 4 ppm, max. | |
| Boiling range at 760 mm | 219-221.5°C | 90% between 229-233°C | Suspended matter | Substantially free | |
| Coefficient of expansion at 55°C | 0.00086 | | Vapor pressure, °C °F | mm | |
| Color, Hazen Pt-Co | 5 | 0.003 max., Dichromate | 75 167 | 2.1 | |
| Ester, as decyl formate | Less than 0.1% | | 100 212 | 8.4 | |
| Ester number | | 1.3 max. | 125 257 | 28.2 | |
| Fire hazard | Slight | Slight | 150 302 | 82 | |
| Flash point (Open cup) | 225°F | 220°F | 175 347 | 225 | |
| Freezing point | Sets to a glass below -60°C | 6.9°C (44°F) | 200 392 | 500 | |
| Heat of combustion | | 9963 cal/g | Viscosity, °C °F | Centistokes | |
| Hydroxyl number | | 345-365 | 99 210 | 1.76 | |
| Iodine number | | 0.5 max. | 20 68 | 21 | 13.83 centipoises |
| Molecular weight | 158.28 | 158.28 | - 9.4 15 | 115 | |
| Pour point | -95°F | | -17.8 0 | 209 | |
| Purity | 99.7%-99.9% by wt. | | -31.7 -25 | 701 | |
| Refractive index at 20°C, n _D | 1.4388-1.4390 | 1.43682 | -40.0 -40 | 1649 | |
| | | | -53.9 -65 | 8826 | |
| | | | Water content | 0.03-0.07% by wt. | 0.25% |
| | | | Weight per gallon at 20°C 60°F | 7.03 lbs. 6.96 lbs. approx. | |

ISODECYL ALCOHOL
Table 6.118: Physical Properties of Isodecyl Alcohol (31)

| | |
|------------------------------------------|-------------------------------|
| Acidity as acetic acid | 0.002% by wt., max. |
| Aldehydes, as decanal | 0.05% by wt., max. |
| Boiling point at 760 mm | 220.1°C |
| Boiling range at 760 mm, Ibp Dp | 215°C, min. 225°C, max. |
| Coefficient of expansion at 55°C | 0.00083 |
| Color, (Pt-Co scale) | 10, max. |
| Fire hazard | Slight |
| Flash point (Open cup) | 220°F |
| Freezing point | Sets to a glass below -60°C |
| Molecular weight | 158.29 |
| Odor | Characteristic, non-petroleum |
| Purity, as decanol | 98.5% by wt., min. |
| Refractive index at 20°C, n _D | 1.4408 |
| Solubility in water at 20°C | Less than 0.01% by wt. |
| Solubility of water in at 20°C | 2.4% by wt. |
| Specific gravity at 20/20 | 0.8423 |
| Sulfuric acid test (Pt-Co scale) | 50, max. |
| Suspended matter | Substantially free |
| Vapor pressure at 20°C | Less than 0.01 mm |
| Viscosity at 20°C | 18.9 cps. |
| Water content | 0.10% by wt., max. |
| Weight per gallon at 20°C | 7.01 lbs. |

TRIDECYL ALCOHOL
Table 6.119: Physical Properties of Tridecyl Alcohol (31)

| | | | | | |
|------------------------------------------|----------------------------------|---------------------------|-------|-----|--------------|
| Acidity as acetic acid | 0.002% by wt | Viscosity, | °C | °F | Centipoises |
| Carbonyl number | 0.7 mg KOH/g | | 99 | 210 | 2.61 |
| Color, Hazen, Pt-Co | 5 | | 20 | 68 | 47.5 |
| Distillation: initial dry point | 252°C | | - 9.4 | 15 | 382.2 |
| | 269°C | | -17.8 | 0 | 808.3 |
| Fire hazard | Slight | | -31.7 | -25 | 3,692 |
| | | | -40.0 | -40 | 11,081 |
| Flash point (Tag open cup) | 180°F | | -53.9 | -65 | 95,433 |
| Hydroxyl number | 278 mg KOH/g | Water | | | 0.10% by wt. |
| Odor | Characteristic, non-petroleum | Weight per gallon at 60°F | | | 7.0 lbs. |
| Pour point | -95°F | | | | |
| Purity | 99.6% by wt | | | | |
| Refractive index at 20°C, n _D | 1.4475 | | | | |
| Specific gravity at 20°C | 0.8454 | | | | |
| Sulfur | 2 ppm | | | | |
| Vapor pressure, | °C °F | mm | | | |
| | | | 90 | 194 | 1.3 |
| | | | 100 | 212 | 2.2 |
| | | | 125 | 257 | 7.8 |
| | | | 150 | 311 | 24 |
| | | | 175 | 347 | 64 |
| | | | 200 | 401 | 155 |
| 225 | 437 | 340 | | | |
| 250 | 491 | 685 | | | |

OTHER ALCOHOLS AND ALCOHOL BLENDS

Table 6.120: ALFOL Alcohol Low Range Blends C₆—C₁₀ (40)

| Typical Properties | 610 | 610 AFC | 610 ADE | 810 | 810 A1 | 810 EE |
|----------------------------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Total alcohol, Wt. % | 99.8 | 99.8 | 99.6 | 99.8 | 99.7 | 99.6 |
| Molecular weight distribution (100% alcohol basis) | | | | | | |
| C4 | | | | | | |
| C6 | 4.8 | 4.8 | 9.0 | 0.6 | 0.1 | 0.6 |
| C8 | 43.2 | 54.4 | 42.7 | 45.7 | 10.5 | 49.4 |
| C10 | 51.3 | 40.1 | 47.8 | 53.2 | 89.1 | 49.5 |
| C12 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.5 |
| C14 | trace | — | — | — | trace | — |
| Average alcohol MW | 140 | 135 | 138 | 145 | 153 | 141 |
| Color, APHA | 0 | 0 | 0 | 0 | 0 | 0 |
| Water, Wt. % | 0.03 | 0.03 | 0.02 | 0.02 | 0.02 | 0.03 |
| Iodine number | 0.05 | 0.05 | 0.05 | 0.02 | 0.02 | 0.02 |
| Hydroxyl number | 401 | 415 | 407 | 387 | 367 | 397 |
| Carbonyl, as ppm C=O | 30 | 30 | 30 | 30 | 30 | 30 |
| Acidity, as acetic acid, % | 0.002 | 0.002 | 0.002 | 0.003 | 0.003 | 0.003 |
| Acid Heat Color, APHA | 10 | — | 10 | — | — | — |
| Specific gravity at ° F/° F | 0.824 77/77 | 0.830 60/60 | 0.829 60/60 | 0.831 60/60 | 0.831 60/60 | 0.831 60/60 |
| Flash point, (PM) ° F | 175 | 175 | 167 | 188 | 203 | 200 |
| Melting range, ° F | 1–5 | 1–5 | 1–5 | 3–7 | 3–7 | 3–7 |
| Boiling range, ° F | 351–459 | 350–460 | 350–460 | 401–459 | 400–460 | 400–460 |
| Saponification number | 0.19 | 0.27 | 0.19 | 0.4 | — | — |
| Viscosity, cSt 70° F | 11 | 11 | 11 | 13.4 | 16.3 | 13.5 |
| 100° F | 6.4 | 6.6 | 7.7 | 7.4 | 8.7 | 7.2 |
| Coefficient of thermal expansion lb/gal/° F | 0.00334 | 0.00334 | 0.00334 | 0.00325 | 0.00334 | 0.00317 |

Table 6.121: ALFOL Alcohol Pure Homologs C₆—C₁₈ (40)

| Typical Properties | 6 | 8 | 10 |
|----------------------------------------------------|-----------------|-----------------|-----------------|
| Total alcohol, Wt.% | 99.4 | 99.9 | 99.8 |
| Molecular weight distribution (100% alcohol basis) | | | |
| C6 | 99.4 | trace | — |
| C8 | 0.6 | 99.9 | 0.5 |
| C10 | trace | 0.1 | 99.3 |
| C12 | trace | — | 0.2 |
| C14 | — | — | — |
| C16 | — | — | — |
| C18 | — | — | — |
| C20 | — | — | — |
| Average Molecular Weight | 102 | 130 | 158 |
| Color, APHA | 0 | 0 | 0 |
| Water, Wt.% | 0.04 | 0.03 | 0.02 |
| Iodine number | 0.05 | 0.03 | 0.05 |
| Hydroxyl number | 545 | 430 | 351 |
| Carbonyl, as ppm C=O | 28 | 12 | 7 |
| Acidity, as acetic acid, % | 0.001 | 0.001 | 0.001 |
| Specific gravity, at ° F/° F | 0.8232 60/60 | 0.8293 60/60 | 0.8335 60/60 |
| Flash point, (PM) ° F | 130 | 180 | 235 |
| Melting range, ° F | –49 | 1–3 | 43–45 |
| Boiling range, ° F | 313–316 | 381–385 | 448–453 |
| Saponification number | <0.04 | <0.04 | <0.04 |
| Viscosity, cSt 70° F | 5.5 | 10.5 | 14.5 |
| 100° F | 3.5 | 6 | 9 |
| Coefficient of thermal expansion lb/gal/F | 0.00376 | 0.00351 | 0.00334 |

(continued)

Table 6.121: (continued)

| Typical Properties | 12 | 14 | 16 | 16NF | 18 | 18NF |
|-------------------------------------------------------|---------|---------|---------|---------|-----------|-----------|
| Total alcohol, Wt. % | 99.8 | 99.8 | 99.8 | 99.8 | 99.6 | 99.6 |
| Molecular weight distribution (100% alcohol basis) | | | | | | |
| C6 | — | — | — | — | — | — |
| C8 | — | — | — | — | — | — |
| C10 | 0.1 | trace | — | — | — | — |
| C12 | 99.6 | 0.4 | trace | trace | — | — |
| C14 | 0.3 | 99.4 | 0.3 | 0.3 | 0.1 | 0.1 |
| C16 | — | 0.3 | 98.7 | 98.7 | 0.3 | 0.3 |
| C18 | — | — | 0.7 | 0.7 | 98.4 | 98.4 |
| C20 | — | — | — | — | 0.9 | 0.9 |
| Average Molecular Weight | 187 | 214 | 242 | 242 | 271 | 271 |
| Color, APHA | 5 | 5 | 5 | 5 | 5 | 5 |
| Water, Wt. % | 0.01 | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 |
| Iodine number | 0.05 | 0.03 | 0.18 | 0.18 | 0.33 | 0.33 |
| Hydroxyl number | 299 | 258 | 227 | 227 | 207 | 207 |
| Carbonyl, as ppm C=O | 8 | 29 | 64 | 64 | 241 | 241 |
| Acidity, as acetic acid, % | 0.005 | 0.003 | 0.011 | 0.011 | 0.008 | 0.008 |
| Specific gravity, at ° F/° F | 0.83 | 0.815 | 0.813 | 0.813 | 0.811 | 0.811 |
| Flash point, (PM) ° F | 60/60 | 120/120 | 125/125 | 125/125 | 140/140 | 140/140 |
| Melting range, ° F | 73–76 | 98–102 | 118–121 | 113–122 | 132–136 | 131–140 |
| Boiling range, ° F | 490–498 | 567–573 | 626–631 | 626–631 | 662–670 | 662–670 |
| Saponification number | 0.04 | 0.07 | 0.06 | 0.06 | 0.1 | 0.1 |
| Viscosity, cSt 70° F | 80F/19 | — | — | — | — | — |
| 100° F | 12.3 | 15 | 120F/18 | 120F/18 | 160F/13.5 | 160F/13.5 |
| Coefficient of thermal expansion lb/gal/F | 0.00325 | 0.00317 | 0.00317 | 0.00317 | 0.00309 | 0.00309 |

Table 6.122: ALFOL Alcohol High Range Blends C₁₀—C₂₀₊ (40)

| Typical Properties | 1012 HA | 1014 CDC | 1214 | 1214 GC | 1216 | 1216 CO |
|-----------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| Total Alcohol, Wt. % | 99.8 | 99 | 99.5 | 99 | 99 | 99.7 |
| Homolog Distribution, Wt. % | | | | | | |
| C8 | 0.6 | — | 0.1 | trace | — | 0.1 |
| C10 | 87.5 | 31 | 0.6 | 0.8 | 0.3 | 0.4 |
| C12 | 6.8 | 36.6 | 56.5 | 68.2 | 64.3 | 67.2 |
| C14 | 5 | 31.2 | 42.2 | 30.3 | 24 | 25.3 |
| C16 | 0.1 | — | 0.6 | 0.7 | 11.4 | 6.8 |
| C18 | — | — | — | — | trace | 0.2 |
| C20 | — | — | — | — | — | — |
| C22 | — | — | — | — | — | — |
| C24 | — | — | — | — | — | — |
| C26 | — | — | — | — | — | — |
| C28 | — | — | — | — | — | — |
| C30 | — | — | — | — | — | — |
| Avg. Molecular Weight | 164 | 186 | 198 | 195 | 203 | 198 |
| Color, APHA | 0 | 0 | 0 | 0 | 5 | 5 |
| Water, Wt. % | 0.02 | 0.05 | 0.08 | 0.06 | 0.05 | 0.04 |
| Iodine number | 0.04 | 0.07 | 0.05 | 0.05 | 0.1 | 0.08 |
| Hydroxyl number | 343 | 302 | 284 | 287 | 276 | 284 |
| Carbonyl, ppm C=O | 31 | 123 | 45 | 21 | 40 | 47 |
| Specific Gravity | 0.834 | 0.836 | 0.838 | 0.838 | 0.84 | 0.84 |
| ° F/° F | 72/72 | 72/72 | 72/72 | 72/72 | 72/72 | 72/72 |
| Flash Point (PM) ° F | 237 | 250 | 265 | 265 | 265 | 265 |
| Melting Range, ° F | 35–40 | 41–45 | 70–75 | 70–75 | 63–70 | 63–70 |
| Boiling Range, ° F | 425–525 | 450–545 | 518–575 | 518–575 | 514–592 | 529–590 |
| Viscosity, cSt | 10.4 | 12.5 | 14.3 | 14.3 | 14.5 | 14.5 |
| Temperature, ° F | 100 | 100 | 100 | 100 | 100 | 100 |
| Coefficient of Thermal Expansion, lb/gal/F | 0.00321 | 0.003 | 0.00316 | 0.00316 | 0.00316 | 0.00316 |
| Saponification number | 0.1 | 0.1 | 0.1 | 0.18 | 0.5 | 0.18 |
| Appearance | clear color- less liquid | clear color- less liquid | clear color- less liquid | clear color- less liquid | clear color- less liquid | clear color- less liquid |

(continued)

Table 6.122: (continued)

| Typical Properties | 1218 DCBA | 1412 | 1416 GC | 1418 DDB | 1418 GBA | 1618 | 1618 CG | 1618 GC | 20+ |
|--------------------------------------------|------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----------------|
| Total Alcohol, Wt. % | 99.6 | 99.7 | 99.8 | 99.9 | 99.8 | 99.6 | 99.6 | 98.5 | 88.5 |
| Homolog Distribution, Wt. % | | | | | | | | | |
| C8 | trace | trace | - | - | - | - | - | - | - |
| C10 | 0.5 | 0.5 | 0.1 | - | trace | - | - | - | - |
| C12 | 38.3 | 37.7 | 6.3 | 0.7 | 0.6 | trace | trace | - | - |
| C14 | 30 | 60.6 | 63.4 | 39.5 | 66.4 | 1.3 | 0.6 | 0.6 | - |
| C16 | 19.8 | 1.2 | 29.8 | 38.7 | 25.6 | 61 | 31.9 | 66.2 | trace |
| C18 | 10.8 | - | 0.4 | 19.6 | 7 | 35.7 | 66.1 | 31.4 | 1.2 |
| C20 | 0.6 | - | - | 1.5/>C20 | 0.4 | 2 | 1.4 | 1.6/>C20 | 54.3 |
| C22 | - | - | - | - | - | - | - | - | 25.8 |
| C24 | - | - | - | - | - | - | - | - | 11.1 |
| C26 | - | - | - | - | - | - | - | - | 4.6 |
| C28 | - | - | - | - | - | - | - | - | 2.1 |
| C30 | - | - | - | - | - | - | - | - | 1 |
| Avg. Molecular Weight | 214 | 205 | 222 | 243 | 227 | 256 | 266 | 263 | 431 |
| Color, APHA | 5 | 5 | 10 | 10 | 5 | 5 | 5 | 5 | 848 |
| Water, Wt. % | 0.06 | 0.06 | 0.03 | 0.03 | 0.05 | 0.04 | 0.03 | 0.04 | 0.03 |
| Iodine number | 0.11 | 0.1 | <0.4 | 0.6 | <0.7 | 0.15 | 0.15 | 0.8 | 8.7 |
| Hydroxyl number | 262 | 274 | 253 | 231 | 247 | 219 | 211 | 213 | 157 |
| Carbonyl, ppm C=O | 48 | 48 | 110 | - | 77 | 180 | 155 | 150 | 1930 |
| Specific Gravity | 0.84 | 0.839 | 0.822 | 0.819 | 0.835 | 0.840 | 0.820 | 0.820 | 0.817 |
| ° F/° F | 72/72 | 72/72 | 100/100 | 110/110 | 100/100 | 60/60 | 120/120 | 140/140 | 140/140 |
| Flash Point (PM) ° F | 275 | 270 | 305 | 290 | 305 | 325 | 340 | 325 | 390 |
| Melting Range, ° F | 68-73 | 72-75 | 95-99 | 97-102 | 97-102 | 110-120 | 110-120 | 110-120 | 113-129 |
| Boiling Range, ° F | 525-660 | 525-585 | 582-638 | 598-659 | 598-660 | 628-662 | 630-670 | 630-670 | >650 |
| Viscosity, cSt | 15.0 | 14.4 | 11.5 | 14.6 | - | 15.0 | 13.7 | - | 5.3 |
| Temperature, ° F | 100 | 100 | 100 | 110 | - | 122 | 140 | - | 210 |
| Coefficient of Thermal Expansion, lb/gal/F | 0.00313 | 0.00314 | 0.0028 | 0.0028 | 0.0028 | 0.00303 | 0.00310 | 0.003 | 0.00313 |
| Saponification number | 0.18 | <1 | <1 | 0.5 | <1.0 | 0.07 | 0.07 | 0.5 | 5.7 |
| Appearance | clear colorless liquid | white solid | white solid | white solid | white solid | white solid | white solid | white solid | off-white solid |

Table 6.123: ALFOL Typical Properties (40)

| Typical Properties | ALFOL® 6 | ALFOL® 8 | ALFOL® 10 | ALFOL® 610 | ALFOL® 810 | ISO FOL® 12 |
|----------------------------------------------------|----------|----------|-----------|------------|------------|----------------|
| Total Alcohol, wt % | 99.4 | 99.9 | 99.8 | 99.6 | 99.8 | min. 95 |
| Molecular Weight Distribution (100% alcohol basis) | | | | | | |
| C4 | | | | | | |
| C6 | 99.4 | trace | - | 9 | 0.6 | |
| C8 | 0.8 | 99.9 | 0.5 | 42.7 | 45.7 | |
| C10 | trace | 0.1 | 99.3 | 47.8 | 53.2 | |
| C12 | trace | - | 0.2 | 0.5 | 0.5 | |
| 2-Butyloctanol | | | | | | min. 95 |
| Average Molecule weight | 102 | 130 | 158 | 138 | 145 | 186 approx. |
| Color, ALPHA | 0 | 0 | 0 | 0 | 0 | 20 max |
| Water, wt% | 0.04 | 0.03 | 0.02 | 0.02 | 0.02 | 0.1 max |
| Iodine Number | 0.05 | 0.03 | 0.05 | 0.05 | 0.02 | 1.0 max |
| Hydroxyl Number | 545 | 430 | 351 | 407 | 387 | 286-305 |
| Carbonyl, as C=O ppm | 28 | 12 | 7 | 30 | 30 | 150 |
| Specific gravity at F°/F | 0.8232 | 0.8293 | 0.8335 | 0.829 | 0.831 | |
| | 60/60 | 60/60 | 60/60 | 60/60 | 60/60 | |
| Flash point, (PM)° F | 130 | 180 | 235 | 167 | 188 | 248 (ISO 2592) |
| Melting Range, °F | -49 | 3-Jan | 43-45 | 1-5 | 3-7 | <22 |
| Boiling Range, °F | 313-316 | 381-385 | 448-453 | 350-460 | 401-460 | 291-300 |
| Saponification Number | <0.04 | <0.04 | <0.04 | 0.19 | 0.4 | 1.0 max. |
| Viscosity, cSt at 70° F | 5.5 | 10.5 | 14.5 | 11 | 13.4 | |
| at 100° F | 3.5 | 6 | 9 | 7.7 | 7.4 | |
| Coefficient of thermal expansion lb/gal/°F | 0.00376 | 0.00351 | 0.00334 | 0.00334 | 0.00325 | |

COMPARATIVE DATA

Table 6.124: Ashland Alcohols (69)

| PRODUCT | LB./GAL | SP. GR. | BOILING RANGE | | FL PT. | EVAP. RATE ¹ |
|------------------------|---------|--------------------|---------------|---------|------------------|-------------------------|
| | 20° C | 20°/20° C | °C | °F | °F TCC | |
| Methanol | 6.60 | 0.791 | 64-65 | 147-149 | 54 | 2.1 |
| Ethanol, Anhydrous | 6.58 | 0.790 | 74-80 | 165-176 | 53 | 1.7 |
| Ethanol, 95% | 6.76 | 0.811 | 75-80 | 167-176 | 55 | 1.7 |
| Isopropanol 91% | 6.81 | 0.816 | 80-81 | 176-178 | 63 | 1.3 |
| Isopropanol, Anhydrous | 6.55 | 0.786 | 82-83 | 180-182 | 53 | 1.6 |
| n-Propanol | 6.71 | 0.806 | 96-98 | 205-208 | 74 | 1.3 |
| 2-Butanol | 6.72 | 0.808 | 98-101 | 208-214 | 72 | 1.2 |
| Isobutanol | 6.68 | 0.803 | 107-109 | 225-228 | 86 | 0.6 |
| n-Butanol | 6.75 | 0.811 | 116-119 | 241-246 | 97 | 0.42 |
| Amyl Alcohol (primary) | 6.79 | 0.815 | 127-139 | 261-282 | 113 | 0.27 |
| Methyl Amyl Alcohol | 6.72 | 0.808 | 130-133 | 266-271 | 103 | 0.27 |
| Cyclohexanol | 7.91 | 0.946 ⁴ | 160-163 | 320-325 | 140 ³ | 0.05 |
| 2-Ethylhexanol | 6.94 | 0.834 | 182-186 | 360-367 | 164 | < 0.01 |

¹n-Butyl Acetate = 1 ³COC ⁴At 30°C

Table 6.125: Chemcentral Alcohols (67)

| ALCOHOLS | CAS | Mole Weight | % Purity Comm. Prod. | Spec. Grv. @ 20/20°C | Lbs./Gal. @ 20°C | Coeff. of Expan. Per °C | ΔSp. Gr. Per °C | Refractive Index @ 20°C | Distillation Range @ 760 mm Hg | |
|--------------------------------|------------|-------------|----------------------|----------------------|------------------|-------------------------|-----------------|-------------------------|--------------------------------|---------|
| | | | | | | | | | °C | °F |
| | | | | | | | | | AMYL ALCOHOL (Mixed Isomers) | |
| iso BUTYL ALCOHOL | 78-83-1 | 74.13 | 99 | 0.803 | 6.69 | 0.00099 | 0.0060 | 1.396 | 106-108 | 223-229 |
| n BUTYL ALCOHOL | 71-36-3 | 74.12 | 99.8 | 0.811 | 6.75 | 0.00093 | 0.0056 | 1.3992 | 117-118 | 243-245 |
| sec BUTYL ALCOHOL | 78-92-2 | 74.12 | 99.7 | 0.808 | 6.73 | 0.00091 | 0.0054 | 1.3971 | 98-101 | 208-214 |
| CYCLOHEXANOL | 108-93-1 | 100.18 | 99 | 0.846 | 7.91 | 0.00077 | 0.0050 | 1.4626 | 160-161.2 | 320-322 |
| ETHANOL, ANHYDROUS PROPRIETARY | 64-17-5 | 46.07 | 99 | 0.792 | 6.62 | 0.00120 | 0.0076 | 1.3638 | 74-80 | 165-176 |
| ETHANOL, 95% PROPRIETARY | 64-17-5 | 46.07 | 95 | 0.812 | 6.74 | 0.00118 | 0.0076 | | 74-80 | 165-176 |
| FURFURAL ALCOHOL | 98-00-0 | 98.1 | 98.0 | 1.135 | 9.44 | | | 1.4866 | 170-BP | 338-BP |
| METHYL ALCOHOL (Methanol) | 67-56-1 | 32.04 | 99.98 | 0.793 | 6.60 | 0.00120 | 0.0080 | 1.3284 | 64-65 | 147-149 |
| METHYL AMYL ALCOHOL (MIBC) | 108-11-2 | 102.17 | 98 | 0.806 | 6.73 | 0.00103 | 0.0064 | 1.4113 | 130-133 | 266-271 |
| iso PROPYL ALCOHOL, ANHYDROUS | 67-63-0 | 60.09 | 99.9 | 0.787 | 6.57 | 0.00111 | 0.0068 | 1.3766 | 82-83 | 180-181 |
| iso PROPYL ALCOHOL, 91% | 67-63-0 | 60.09 | 91.3 | 0.818 | 6.84 | 0.00111 | 0.0072 | | 79.7-80.7 | 175-177 |
| n PROPYL ALCOHOL | 71-23-8 | 60.09 | 99.8 | 0.805 | 6.70 | 0.00095 | 0.0058 | 1.3854 | 96-98 | 204-208 |
| TETRAHYDROFURFURAL ALCOHOL | 102-13 | 102.13 | 98.0 | 1.054 | 8.79 | 0.00074 | 0.0075 | 1.4520 | 178-BP | 353-BP |
| TEXANOL* | 25285-77-4 | 216.3 | | 0.850 | 7.90 | | | | 244-247 | |
| TRIDECYL ALCOHOL | 112-70-9 | | 99.0 | 0.845 | 7.04 | | | | 252-263 | 485-506 |

| ALCOHOLS | Vapor Press. @ 20°C mm Hg | Evap. Rate vs. B. Acet. = 1 | Visc. cps @ 20°C | Solubility % by Wt. @ 20°C | | Dilution Ratio Tol. Lac. | Freeze Point °C | Flash Point T.C.C. °F | Explosive Limits % by Vol. in Air | | Solubility Parameter |
|--------------------------------|---------------------------|-----------------------------|------------------|------------------------------|----------------------|--------------------------|-----------------|-----------------------|-----------------------------------|-------------------|----------------------|
| | | | | In H ₂ O | Oil H ₂ O | | | | Lower | Upper | |
| | | | | AMYL ALCOHOL (Mixed Isomers) | 2.0 | | | | 0.3 | 4.6 | |
| iso BUTYL ALCOHOL | 8.8 | 0.63 | 3.9 | 9.5 | 16.9 | Latent | -108 | 85 | 1.45 | 11.25 | 11.6 |
| n BUTYL ALCOHOL | 4.39 | 0.46 | 2.95 | 7.9 | 20.1 | Latent | -89.8 | 97 | 1.2 ^c | 10.9 ^a | 11.2 |
| sec BUTYL ALCOHOL | 12.7 | 0.9 | 3.65 | 22.5 | 60.0 | Latent | -114.7 | 74 | 1.7 | 9.8 ^a | 11.1 |
| CYCLOHEXANOL | 1.0 | 0.08 | | 4.2 | 11.2 | Latent | 25.3 | 138 | | | 11.4 |
| ETHANOL, ANHYDROUS PROPRIETARY | 44.0 | 1.9 | 1.19 | (^b) | (^b) | Latent | -114.4 | 54 | 3.3 | 19.0 | 12.8 |
| ETHANOL, 95% PROPRIETARY | | 1.7 | | (^b) | (^b) | Latent | | 58 | 3.3 | 19.0 | 12.8 |
| FURFURAL ALCOHOL | 1 | | 4.5 | (^b) | (^b) | | | 167 ^a | 1.8 | 16.3 | 12.5 |
| METHYL ALCOHOL (Methanol) | 96.0 | 3.5 | 2.0 | (^b) | (^b) | 2.2:0.5 | -97 | 54 | 6.7 | 36.0 | 14.5 |
| METHYL AMYL ALCOHOL (MIBC) | 2.2 | 0.3 | | 1.64 | 6.35 | Latent | -80 | 106 | 1.0 | 5.6 | 10.0 |
| iso PROPYL ALCOHOL, ANHYDROUS | 31.2 | 1.7 | | (^b) | (^b) | Latent | -89.5 | 53 | 2.0 | 12.0 | 11.4 |
| iso PROPYL ALCOHOL, 91% | | 1.6 | | (^b) | (^b) | Latent | | 61 | 2.0 | 12.0 | 10.0 |
| n PROPYL ALCOHOL | 14.5 | 0.89 | | (^b) | (^b) | Latent | -127 | 71 | 1.5 | 13.5 | 11.9 |
| TETRAHYDROFURFURAL ALCOHOL | 2.0 | 0.07 | | (^b) | (^b) | | -80 | 183 ^a | 2.6 | 9.7 | 10.8 |
| TEXANOL* | | < 0.01 | 6.2 | 0.0 | 0.9 | | | 248 ^a | | | 8.2 |
| TRIDECYL ALCOHOL | | | | | | | | 259 | | | |

*Trade Mark Eastman Chemical Products Inc.

^a@ 15.6°C

^bOpen Cup

^c@ 100°C

Table 6.126: CPS Chemical Alcohol 99% (15)

| TYPICAL PROPERTIES | | | | | | | |
|-------------------------------|---------------|------------|--------------|------------|--------------------|------------------|---------------------------|
| TRADE NAME | CHEMICAL NAME | CAS NUMBER | PURITY WT. % | COLOR APHA | MOISTURE KF, WT. % | MOLECULAR WEIGHT | SPECIFIC GRAVITY 20/20 °C |
| ALCOHOLS | | | | | | | |
| Isoamyl Alcohol 99% (Natural) | Same | 123-51-3 | 99.0 | 20 | 0.2 | 88 | 0.811 |
| Isoamyl Alcohol 95% (Natural) | Same | 123-51-3 | 95.0 | 50 | 0.5 | 88 | 0.811 |

Kosher available upon request

CPS SALES SPECIFICATIONS

ISOAMYL ALCOHOL 95%

| | TEST | SPECIFICATION |
|--------|------------------------------|---------------|
| 1071 | PURITY, WT%, GC | 95.0 min. |
| 1013 | MOISTURE, KF, WT% | 0.50 max. |
| 1011 | COLOR, APHA | 50 max. |
| 1082 | ACIDITY AS ACETIC ACID, WT% | 0.01 max. |
| 1097 | SPECIFIC GRAVITY @20/20C | 0.810 - 0.813 |
| 1096-B | DISTILLATION RANGE, IBP, C | 126.0 - 500 |
| 1096-A | DISTILLATION RANGE, DP, C | 132.0 max. |
| 1017 | APPEARANCE-CLEAR LIQUID/FFSM | |

Table 6.127: Eastman Latent Solvents (41)

| LATENT SOLVENTS | Evaporation Rate | | Formula | Viscosity, cP 8% RS 1/2-s NC @25°C | Viscosity, cP 8% CAB-381-05 @ 25°C | Heat Viscosity | | Dilution Ratio ^b | | Blush Resistance % RH @ 80°F | Specific Gravity @ 20°/20°C | Weight/Volume @ 20°C | | Flash Point TCC, °F | Freezing Point, °F |
|-----------------------------------------------------|------------------|-----------|------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------|----------------|----|-----------------------------|---------|------------------------------------|-----------------------------------|-------------------------|-------------------|---------------------------|-----------------------|
| | nBuOAc = 1 | Ether = 1 | | | | °C | °F | Toluene | Naphtha | | | Lb/Gal | Kg/L | | |
| METHYL ALCOHOL | 3.5 | 3.5 | CH ₃ OH | 20 | | 0.60 | 20 | 2.2 | 0.5 | | 0.792 | 6.60 | 0.79 | 50 | — |
| TECSOL INDUS. AND PROPRIETARY SOLVENTS ^a | 1.7-1.9 | — | C ₂ H ₅ OH | | | 1.2-1.5 | 20 | | | | 0.789-0.820 | 6.57-6.83 | 0.79-0.82 | 50 | -173 |
| ISOPROPYL ALCOHOL, 99% | 1.7 | — | (CH ₃) ₂ CHOH | | | 2.40 | 26 | | | | 0.786 | 6.54 | 0.78 | 55 | 127 |
| n-PROPYL ALCOHOL | 1.0 | — | C ₃ H ₇ OH | | | 2.00 | 25 | | | | 0.804 | 6.71 | 0.80 | 74 | -193 |
| SECONDARY BUTYL ALCOHOL | 0.9 | — | CH ₃ CH ₂ CHOHCH ₃ | | | 2.90 | 25 | | | | 0.810 | 6.73 | 0.81 | 72 | — |
| ISOBUTYL ALCOHOL | 0.6 | — | CH ₃ CH(CH ₃)CH ₂ OH | | | 4.00 | 20 | | | | 0.803 | 6.68 | 0.80 | 85 | -162 |
| n-BUTYL ALCOHOL | 0.5 | — | C ₄ H ₉ OH | | | 3.00 | 20 | | | | 0.811 | 6.75 | 0.81 | 97 | -129 |
| METHYL ISOBUTYL CARBINOL | — | — | (CH ₃) ₂ CHCH ₂ CH ₂ OH | | | 3.00 | — | | | | 0.805 ^d | 6.69 | 0.80 | — | — |
| AMYL ALCOHOL (MIXED PRIMARY ISOMERS) | 0.3 | — | C ₅ H ₁₁ OH | | | 4.30 | 20 | | | | 0.814 ^b | 6.77 ^d | 0.81 ^d | — | -130 |
| CYCLOHEXANOL | 0.05 | — | CH ₂ (CH ₂) ₄ CHOH | | | 52.70 | 25 | | | | 0.947 ^b | 7.87 ^d | 0.94 ^d | — | — |
| 2-ETHYLHEXANOL | 0.01 | — | C ₄ H ₉ CH(C ₂ H ₅)CH ₂ OH | | | 7.70 | 25 | | | | 0.833 | 6.94 | 0.83 | 164 | -94 |

| LATENT SOLVENTS | Vapor Pressure | | | Surface Tension Dyne/Cm | Boiling Range @ 760 Torr, °C | Solubility @ 20°C Wt % | | Azeotrope | | Autoignition Temperature, °C | Refractive Index °C | Electrical Resistance, ^a Megohms | Hansen Solubility Parameters ¹ | | | Gram Molecular Weight | TLV PPM 1992 | | | |
|-----------------------------------------------------|----------------|------|-------------------------|----------------------------|------------------------------------|---------------------------|-----------------------|-----------------------|-------------------|------------------------------------|---------------------------|---------------------------------------------------|-------------------------------------------|----------|-------|-----------------------------|--------------------|---------------------|--------|-----|
| | Torr | °C | KPa @ 55°C ⁴ | | | In Water | Water In | BP, °C | Wt % ^d | | | | Total | Nonpolar | Polar | | | Hydrogen Bonding | | |
| METHYL ALCOHOL | 100.0 | 21.2 | 69.0 | 22.6 | 20 | 64-65 | Complete | Complete | None | — | 463 | 1.3286 | 20 | <0.1 | 14.5 | 7.4 | 6.0 | 10.9 | 32.04 | 200 |
| TECSOL INDUS. AND PROPRIETARY SOLVENTS ^a | — | — | 37.6 ^P | 22.4 | 20 | 74-82 | Complete ⁹ | Complete ⁹ | 78.1 | 4.0 | 419 | 1.3614 | 20 | <0.1 | 13.0 | 7.7 | 4.3 | 9.5 | 46.07 | — |
| ISOPROPYL ALCOHOL, 99% | 12.8 | 20 | 30.0 | 21.3 | 20 | 80.8-83.5 | Complete | Complete | 86.3 | 12.6 | 360 | 1.3776 | 20 | <0.1 | 11.5 | 7.7 | 3.0 | 8.0 | 66.10 | 400 |
| n-PROPYL ALCOHOL | 14.5 | 26 | 15.7 | 23.8 | 20 | 96-98 | Complete | Complete | 87.0 | 28.3 | 413 | 1.3856 | 20 | <0.1 | 12.0 | 7.8 | 3.3 | 8.5 | 60.10 | 200 |
| SECONDARY BUTYL ALCOHOL | 12.0 | 20 | — | 24.0 | 20 | 98-101 | 20.6 | 30.7 | 87.0 | 26.8 | 406 | 1.3972 | 20 | <0.1 | 10.8 | 7.7 | 2.8 | 7.1 | 74.12 | 100 |
| ISOBUTYL ALCOHOL | 9.0 | 20 | 9.5 | 22.8 | 20 | 106-109 | 9.5 | 14.3 | 89.8 | 33.0 | 416 | 1.3955 | 20 | <0.2 | 11.1 | 7.4 | 2.8 | 7.8 | 74.12 | 50 |
| n-BUTYL ALCOHOL | 5.5 | 20 | 6.4 | 24.6 | 20 | 116-119 | 7.0 | 24.8 | 92.7 | 42.5 | 355 | 1.3993 | 20 | <0.1 | 11.3 | 7.6 | 2.8 | 7.7 | 74.12 | 50 |
| METHYL ISOBUTYL CARBINOL | — | — | — | 22.0 | 20 | 118-119 | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| AMYL ALCOHOL (MIXED PRIMARY ISOMERS) | 2.9 | 20 | — | 23.8 | 20 | 127-131 | 1.7 | 9.2 | 95.8 | 54.4 | — | 1.4014 | 20 | 0.2 | — | — | — | — | 88.15 | — |
| CYCLOHEXANOL | 0.9 | 20 | — | 35.1 | 20 | 160-162 | 0.1 | 11.8 | 97.8 | 80.0 | 300 | 1.4656 | 20 | 0.4 | 11.0 | 8.5 | 2.0 | 6.6 | 100.16 | 50 |
| 2-ETHYLHEXANOL | 0.05 | 20 | 0.26 | 28.7 | 20 | 182-184 | 0.1 | 2.6 | 99.1 | 80.0 | 288 | 1.4316 | 20 | <0.1 | 9.9 | 7.8 | 1.6 | 5.8 | 130.20 | — |

Denatured Alcohols Marketed by Eastman (41)

| Composition | Tecsol Special Industrial Solvents ^a | | | | | | Tecsol/ Proprietary Solvents ^a | | Completely Denatured Alcohol ^b | |
|-------------------|----------------------------------------------------|-----|-----|-----|-----|-----|-------------------------------------------------|-----|-------------------------------------------------|-----|
| | A | A-2 | B | C | D | D-2 | H | 1 | | 3 |
| SDA-3A | 100 | 100 | 100 | 100 | 100 | 100 | 100 | — | — | — |
| SDA-1 | — | — | — | — | — | — | — | 100 | 100 | — |
| Ethyl alcohol | — | — | — | — | — | — | — | — | — | 100 |
| MIBK | 1 | 1 | 1 | 1 | 1 | 1 | — | — | — | 1 |
| Isopropyl alcohol | 10 | — | 5 | — | 15 | — | 100 | — | — | — |
| Methyl alcohol | — | 10 | 5 | — | — | 15 | — | — | — | — |
| Ethyl acetate | — | — | — | 5 | — | — | — | 5 | 1 | — |
| Heptane | — | — | — | — | — | — | — | 1 | 1 | — |

Base for special industrial alcohol and proprietary alcohol
 SDA-3A—100 gallons ethyl alcohol with 5 gallons synthetic methanol
 SDA-1—100 gallons ethyl alcohol with 4 gallons synthetic methanol and 1 gallon MIBK

^a Available as 95% (190 proof) or anhydrous (200 proof); n gallons

(continued)

Table 6.127: (continued)**Denatured Alcohol Nomenclature (41)**

| Eastman | Union Carbide | Quantum | Grain Processing |
|--------------------------------------------------------|----------------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------|
| <i>Tecsol 1, 95%</i> <i>Tecsol 1, Anhydrous</i> | <i>Synasol PM 41</i> <i>Synasol PM 100</i> | <i>Solox-1</i> <i>Solox-1, Anhydrous</i> | GPC 190 Gov't Form I (1-1) Anhydrous GPC Gov't Form I (1-1) |
| <i>Tecsol 3, 95%</i> <i>Tecsol 3, Anhydrous</i> | <i>Synasol PM 3224</i> <i>Synasol PM 509</i> | <i>Solox</i> <i>Solox, Anhydrous</i> | GPC 190 Gov't Form III (1-1) Anhydrous GPC Gov't Form III (1-1) |
| <i>Tecsol A, 95%</i> <i>Tecsol A, Anhydrous</i> | <i>Anhydrol PM 4081</i> <i>Anhydrol PM 4082</i> | <i>Filmex A-1</i> <i>Filmex A-1, Anhydrous</i> | GPC 190 Gov't Form A (3A) Anhydrous GPC Gov't Form A (3A) |
| <i>Tecsol A-2, 95%</i> <i>Tecsol A-2, Anhydrous</i> | <i>Anhydrol PM 4079</i> <i>Anhydrol PM 4083</i> | <i>Filmex A-2</i> <i>Filmex A-2, Anhydrous</i> | GPC 190 Gov't Form A2 (3A) Anhydrous GPC Gov't Form A2 (3A) |
| <i>Tecsol B, 95%</i> <i>Tecsol B, Anhydrous</i> | <i>Anhydrol PM 4157</i> <i>Anhydrol PM 4135</i> | <i>Filmex B</i> <i>Filmex B, Anhydrous</i> | GPC 190 Gov't Form B (3A) Anhydrous GPC Gov't Form B (3A) |
| <i>Tecsol C, 95%</i> <i>Tecsol C, Anhydrous</i> | <i>Anhydrol PM 4085</i> <i>Anhydrol PM 4084</i> | <i>Filmex C</i> <i>Filmex C, Anhydrous</i> | GPC 190 Gov't Form C (3A) Anhydrous GPC Gov't Form C (3A) |
| <i>Tecsol D, 95%</i> <i>Tecsol D, Anhydrous</i> | <i>Anhydrol PM 4080</i> <i>Anhydrol PM 4176</i> | <i>Filmex D-1</i> <i>Filmex D-1, Anhydrous</i> | GPC 190 Gov't Form D (3A) Anhydrous GPC Gov't Form D (3A) |
| <i>Tecsol D-2, 95%</i> <i>Tecsol D-2, Anhydrous</i> | <i>Anhydrol PM 4078</i> <i>Anhydrol PM 4217</i> | <i>Filmex D-2</i> <i>Filmex D-2, Anhydrous</i> | GPC 190 Gov't Form D2 (3A) Anhydrous GPC Gov't Form D2 (3A) |
| <i>Tecsol H</i> | — | — | — |

Table 6.129: Proctor and Gamble Fatty Alcohols (39)

| Chemical Properties | CO-1214 | CO-1270 | CO-1695 | CO-1895 | CO-1897 | CO-1898 | TA-1618 |
|-------------------------------------------------------------------|------------------------------|------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Hydroxyl Value | 280-290 (285) | 285-295 (289) | 220-235 (228) | 200-215 (204) | 200-215 (206) | 200-215 (207) | 208-218 (211) |
| Acid Value | 0.1 max (0.0) | 0.10 max (0.0) | 0.5 max (0.19) | 0.5 max (0.1) | 0.5 max (0.1) | 0.5 max (0.1) | 1.0 max (0.8) |
| Saponification Value | 0.5 max (0.1) | 0.5 max (0.1) | 1.0 max (0.4) | 2.0 max (0.6) | 1.0 max (0.3) | 1.0 max (0.3) | 2.0 max (1.0) |
| Iodine Value | 0.3 max (0.1) | 0.2 max (0.04) | 2.0 max (0.8) | 2.0 max (0.8) | 2.0 max (0.4) | 2.0 max (0.25) | 1.0 max (0.3) |
| Moisture (%) | 0.10 max (0.04) | 0.10 max (0.04) | 0.10 max (0.05) | 0.10 max (0.04) | 0.10 max (0.03) | 0.10 max (0.02) | 0.10 max (0.03) |
| P&G Acid Heat Stability (% Transmittance @ 450 nm) | 90 min (97) | 90 min (99) | | | | | |
| Physical Properties | | | | | | | |
| Color-APHA | 10 max (4) | 10 max (3) | 25 max (3-6) | 25 max (8) | 25 max (9) | 25 max (10) | 25 max (11) |
| Melting Point, (C) | (22) | | 47-50 (49) | 56-60 (57) | 56-60 (58) | 56-60 (58) | (50) |
| Appearance | water white mobile liquid | water white mobile liquid | waxy white solid | waxy white solid | waxy white solid | waxy white solid | waxy white solid |
| Composition (% by GC) | | | | | | | |
| C8 | 0.3 max (0.1) | | | | | | |
| C10 | 1.0 max (0.5) | 1.5 max (0.7) | | | | | |
| C12 | 65.0 min (68.0) | 68.0-74.0 (71.2) | | | | | (0.1) |
| C14 | 21.0-28.0 (26) | 24.0-30.0 (27) | 2.5 max (0.3) | (0.1) | | (0.1) | 1.5 max (0.6) |
| C16 | 4.0-8.0 (5.6) | 1.5 max (0.6) | 95.0 min (96.5) | 2.5 max (0.8) | (0.5) | 1.5 max (0.6) | 23.0-33.0 (30) |
| C18 | 0.5 max (0.0) | | (2.5) | 95.0-98.0 (96.6) | 97.5 min (98.2) | 98.0-99.0 (98.6) | 65.0 min (69) |
| C20 | | | | 0.2-1.4 (0.6) | 2.0 max (0.3) | 0.5 max (0.1) | 1.5 max (0.1) |
| Hydrocarbon | 1.0 max (0.3) | 1.0 max (0.4) | 1.5 max (0.2) | 1.5 max (0.3) | 1.5 max (0.2) | 1.5 max (0.1) | 1.5 max (0.1) |
| CAS No. | 67762-41-8 | 67762-41-8 | 36653-82-4 | 112-92-5 | 112-92-5 | 112-92-5 | 67762-30-5 |

Table 6.130: Shell Chemical Alcohols (14)

| Typical Properties of the Alcohols | | | | | | | |
|------------------------------------------------|-------------------|------------------|----------------------|-------------------------|--------------------------|-------------------|-----------------|
| | Isopropyl Alcohol | Isobutyl Alcohol | Normal Butyl Alcohol | Secondary Butyl Alcohol | Methyl Isobutyl Carbinol | Diacetone Alcohol | 2-Ethyl Hexanol |
| Molecular Weight | 60.096 | 74.124 | 74.124 | 74.124 | 102.178 | 116.162 | 130.231 |
| Specific Gravity (Apparent) | | | | | | | |
| 60/60 °F | 0.7893 | 0.8060 | 0.8135 | 0.8109 | 0.8107 | 0.9441 | 0.8362 |
| 20/20 °C | 0.7864 | 0.8033 | 0.8109 | 0.8080 | 0.8078 | 0.9409 | 0.8338 |
| 25/25 °C | 0.7832 | 0.8006 | 0.8082 | 0.8050 | 0.8048 | 0.9374 | 0.8312 |
| Wt. per U.S. Gallon (in air) | | | | | | | |
| 60 °F | 6.574 | 6.712 | 6.775 | 6.753 | 6.751 | 7.863 | 6.964 |
| 20 °C | 6.544 | 6.685 | 6.748 | 6.724 | 6.722 | 7.830 | 6.938 |
| 25 °C (VOC content) | 6.510 | 6.654 | 6.718 | 6.691 | 6.689 | 7.792 | 6.909 |
| Boiling Point at 760 mm | | | | | | | |
| °C | 82.33 | 107.89 | 117.73 | 99.50 | 131.8 | 169.2 | 184.8 |
| °F | 180.19 | 226.20 | 243.91 | 211.10 | 269.24 | 336.6 | 364.64 |
| Boiling Point Change | | | | | | | |
| °C/mm at 760 mm | 0.0325 | 0.0360 | 0.0370 | 0.0349 | 0.0407 | 0.075 | 0.049 |
| Vapor Pressure at 20 °C, mm | 32.8 | 8.77 | 4.3 | 12.5 | 2.2 | 0.81 | 0.20 |
| Freezing Point at 760 mm, °C | -88.43 | -108 | -89.3 | -114.7 | -90 | -44 | < -75 |
| Refractive Index, n_D^{20} | 1.37720 | 1.3959 | 1.3993 | 1.3969 | 1.4110 | 1.4234 | 1.4328 |
| Heat of Vaporization | | | | | | | |
| cal/g at 760 mm | 159.23 | 139 | 141.5 | 134.41 | 99.87 | 90 | 93 |
| Heat of Fusion at Melting Pt. | | | | | | | |
| cal/g | 21.37 | — | — | — | — | — | — |
| Specific Heat (liquid) | | | | | | | |
| cal/g °C | 0.541 | 0.581 | 0.564 | 0.540 | 0.52 | 0.62 | 0.564 |
| Flash Point, Tag Open Cup | | | | | | | |
| °F, Approx. | 60 | 100 | 110 | 80 | 131 | 135 | 185 |
| Flash Point, Tag Closed Cup | | | | | | | |
| °F, Approx. | 53 | 86 | 98 | 72 | 103 | 126 | 166 |
| Autoignition Temp. | | | | | | | |
| °F, Approx. | 750 | 800 | 650 | 761 | — | — | — |
| Flammable Limits in Air | | | | | | | |
| %v of Compound | | | | | | | |
| Upper | 12 | 10.9 | 11.2 | 9.0 | 5.5 | — | — |
| Lower | 2.0 | 1.7 | 1.4 | 1.7 | 1.0 | — | — |
| Solubility, %wt | | | | | | | |
| in water at 20 °C | complete | 8.7 | 7.7 | 15.4 | 1.6 | complete | 0.07 |
| water in at 20 °C | complete | 15 | 20.1 | 65.1 | 6.3 | complete | 2.6 |
| Azeotrope with Water | | | | | | | |
| % w compound | 87.70 | 67 | 57.5 | 72.7 | 55.6 | 12.7 | 20 |
| Boil Pt. at 760 mm, °C | 80.16 | 89.8 | 92.7 | 87.5 | 94.3 | 98.8 | 99.1 |
| Viscosity, cps | | | | | | | |
| at 15 °C | 2.859 | — | — | — | — | — | — |
| at 20 °C | — | 3.98 | 2.96 | 3.78 | — | — | 8.14 |
| at 25 °C | 2.4 | 3.4 | 2.6 | 2.9 | 3.8 | 2.9 | 7.7 |
| at 30 °C | — | — | — | — | — | — | — |
| Surface Tension, | | | | | | | |
| dyne/cm at 20 °C | 21.35 | 22.8 | 24.6 | 23.0 | 22.8 | 28.9 | — |

Table 6.131: Union Carbide Alcohols (19)

| Product | Formula | Molecular Weight | Relative Evaporation Rate nBuAc = 1 | Vapor Pressure at 20°C, mm Hg | Density at 20°C, lb/gal | Gravity at 20/20°C | Specific Hov Solubility Parameters | | | |
|----------------------------|-------------------------------------------------------------------------------------|------------------|----------------------------------------|----------------------------------|----------------------------|--------------------|------------------------------------|------------------|-------|-----------|
| | | | | | | | Total | Hydrogen Bonding | Polar | Non-Polar |
| Alcohols | | | | | | | | | | |
| Amyl Alcohol, Primary | C ₅ H ₁₁ OH (Mixed Isomers) | 88.15 | 0.18 | 1.6 | 6.79 | 0.816 | 11.1 | 7.2 | 4.4 | 7.3 |
| n-Butanol | C ₄ H ₉ OH | 74.12 | 0.44 | 4.2 | 6.75 | 0.811 | 11.6 | 7.6 | 4.9 | 7.3 |
| Diisobutyl Carbinol | C ₉ H ₁₉ OH (Mixed Isomers) | 144.26 | 0.02 | 0.1 | 6.76 | 0.812 | 9.0 | 4.5 | 3.3 | 7.0 |
| Ethanol, 95% ^{td} | C ₂ H ₅ OH | 46.07 | 3.00 | 41.4 | 6.75 | 0.811 | 12.8 | 9.8 | 5.5 | 6.2 |
| 2-Ethylhexanol | C ₄ H ₉ CH(CH ₂ H ₅)CH ₂ OH | 130.23 | 0.10 | 0.1 | 6.94 | 0.834 | 10.2 | 5.9 | 3.8 | 7.4 |
| Isobutanol | CH ₃ CH(CH ₃)CH ₂ OH | 74.12 | 0.74 | 7.2 | 6.68 | 0.803 | 11.2 | 7.3 | 4.8 | 7.1 |
| Isopropanol, Anhydrous | CH ₃ CH(CH ₃)OH | 60.10 | 2.90 | 33.0 | 6.55 | 0.786 | 11.5 | 7.8 | 4.8 | 6.9 |
| Methyl Amyl Alcohol | CH ₃ CH(CH ₃)CH ₂ CH(CH ₃)OH | 102.18 | 0.43 | 3.7 | 6.72 | 0.808 | 9.0 | 5.1 | 3.7 | 6.4 |
| 2-Methyl Butanol | CH ₃ CH ₂ CH(CH ₃)CH ₂ OH | 88.15 | 0.24 | 2.0 | 6.81 | 0.816 | 11.1 | 5.9 | 4.5 | 7.4 |
| n-Pentanol | C ₅ H ₁₁ OH | 88.15 | 0.18 | 1.6 | 6.79 | 0.816 | 10.8 | 7.0 | 4.4 | 7.0 |
| n-Propanol | C ₃ H ₇ OH | 60.10 | 1.30 | 14.9 | 6.71 | 0.805 | 12.2 | 8.6 | 5.2 | 6.9 |

| Alcohols | Viscosity at 20°C, cP | Surface Tension at 20°C, dynes/cm | Boiling Point at 760 mm Hg, °C | Solubility at 20°C, Percent by Wt | | Flash Point, Tag Closed Cup, °F | Electrical Resistance ^(a) , Megohms | Odor Detection Threshold ^(b) , ED50, ppm | Title III Listed Hazardous Air Pollutant ^(c) | CAS Registration Number |
|----------------------------|--------------------------|--------------------------------------|-----------------------------------|--------------------------------------|----------|---------------------------------|------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------|-------------------------|
| | | | | In Water | Water In | | | | | |
| Amyl Alcohol, Primary | 4.0 | 25.7 | 137.9 | 1.7 | 9.2 | 113 | | | No | Mixture |
| n-Butanol | 2.9 | 24.8 | 117.7 | 7.7 | 20.0 | 95 | 0.18 | 2.28 | No | 71-36-3 |
| Diisobutyl Carbinol | 13.9 | 26.0 | 178.0 | 0.06 | 1 | 149 | | | No | Mixture |
| Ethanol, 95% ^{td} | 1.2 | 22.5 | 80.0 | Complete | | 62 | | | No | 64-17-5 |
| 2-Ethylhexanol | 9.0 | 26.8 | 184.6 | 0.07 | 2.6 | 162 | | | No | 104-76-7 |
| Isobutanol | 3.9 | 23.0 | 107.9 | 8.5 | 15.0 | 82 | 0.18 | | No | 78-83-1 |
| Isopropanol, Anhydrous | 2.4 | 21.4 | 82.3 | Complete | | 53 | | | No | 67-63-0 |
| Methyl Amyl Alcohol | 5.1 | 23.1 | 131.7 | 1.7 | 5.8 | 102 | | | No | 108-11-2 |
| 2-Methyl Butanol | 5.0 | 25.5 | 128.7 | 2.2 | 8.3 | 110 | | | No | 137-32-6 |
| n-Pentanol | 4.0 | 25.7 | 137.9 | 2.6 | 9.5 | 119 | | | No | 71-41-0 |
| n-Propanol | 2.2 | 23.8 | 97.2 | Complete | | 76 | 0.18 | | No | 71-23-8 |

ALLYL ALCOHOL

Table 6.132: Physical Properties of Allyl Alcohol (31)

| | | | |
|------------------------------------------|-----------------------------------------|------------------------------------------|------------------------------------------|
| Boiling point at 760 mm | 96.90°C | Specific heat, C_p for liquid, 20-95°C | 0.665 g cal/g·°C |
| Coefficient of expansion at 20°C | 0.00101 per °C | Surface tension at 20°C | 25.68 dynes/cm |
| Color (Pt-Co, Hazen) | 15 max. | Toxicity | Highly toxic by inhalation and ingestion |
| Critical temperature | 271.9°C | Vapor pressure at 20°C | 17.3 mm |
| Distillation range, IBP DP | 95°C, min. 98°C, min. | Viscosity at 30°C | 0.01072 poises |
| Fire hazard | Dangerous when exposed to heat or flame | Water | 0.3% by wt., max. |
| Flash point (Open cup) (Closed cup) | 90°F 72°F | Weight per gallon at 20°C | 7.11 lbs. |
| Freezing point | Becomes a glass at -190°C | | |
| Heat of combustion (vapor) | 442.4 kg cal/gm mole | | |
| Ignition temperature in air in oxygen | 443°C 348°C | | |
| Latent heat of vaporization at 760 mm | 9550 cal/mole (295 BTU/lb) | | |
| MAC | 5 ppm in air | | |
| Melting point | -129°C | | |
| Molecular weight | 58.078 | | |
| Purity | 98.0% by wt., min. | | |
| Refractive index at 20°C, n_D | 1.4134 | | |
| Specific gravity at 25/25°C | 0.8501 | | |

Table 6.133: Azeotropes of Alkyl Alcohol (31)

| ALLYL ALCOHOL FORMS BINARY AZEOTROPES WITH | | |
|--------------------------------------------|--------------------------|-----------------------|
| % | | B. P. of Azeotrope °C |
| 70 | Allyl ether | 89.8 |
| 82.6 | Benzene | 76.8 |
| 70 | 1-Bromobutane | 89.5 |
| 91 | 1-Bromopropane | 69.4 |
| 17.5 | Chlorobenzene | 96.5 |
| 85 | 1-Chlorobutane | 74.5 |
| 71 | 1-Chloro-3-methylbutane | 88.3 |
| 93 | 1-Chloro-2-methylpropane | 67.0 |
| 80 | Cyclohexane | 74.0 |
| 78.3 | Cyclohexene | 76.3 |
| 89 | Diethoxymethane | 87.0 |
| 46 | Ethyl propionate | 93.2 |
| 55 | Ethyl sulfide | 85.1 |
| 63 | Heptane | 84.5 |
| 95.5 | Hexane | 65.5 |
| 48 | Isobutyl formate | 93.0 |
| 64 | 3-Methyl-2-butanone | 93.5 |
| 49 | Methyl butyrate | 94.7 |
| 77 | Methyl carbonate | 86.4 |
| 58 | Methylcyclohexane | 85.0 |
| 72 | Methyl isobutyrate | 89.8 |
| 32 | Octane | 93.4 |
| 30 | 2-Pentanone | 96.0 |
| 28 | 3-Pentanone | 96.0 |
| 48 | Propyl acetate | 94.6 |
| 26 | Propyl alcohol | 96.7 |
| 70 | Propyl ether | 85.7 |
| 50 | Toluene | 91.5 |

CROTYL ALCOHOL

Crotyl alcohol is a clear, stable liquid with a straight-chain, bifunctional molecular structure, $\text{CH}_3\text{-CH=CH-CH}_2\text{OH}$. A highly reactive compound, crotyl alcohol should find use in the manufacture of agricultural chemicals, plastics and polymer additives, varnish ingredients, and pharmaceuticals.

The bifunctionality or two reactive points — hydroxy group and point of unsaturation — account for the high degree of chemical reactivity of crotyl alcohol. The hydroxy group undergoes such reactions as esterification and etherification; whereas the double bond enters into polymerization and addition reactions.

Table 6.134: Physical Properties of Crotyl Alcohol (41)

| | |
|------------------------------------|--------------------------------|
| Empirical formula | $\text{C}_4\text{H}_8\text{O}$ |
| Molecular weight (theoretical) | 72.10 |
| Physical form | Clear liquid |
| Color, APHA, ppm. | 15 |
| Purity, by gas chromatography, % | 97-98 |
| Acidity, as crotonic acid, % | 0.049 |
| Boiling range, 760 mm., °C. | |
| Initial boiling point | 121 |
| Dry point | 126 |
| Specific gravity, 20°/20° C. | 0.8550 |
| Bulk density, lb./gal., 20° C. | 7.12 |
| Flash point, Tag Open Cup, ° F. | 113 (45° C.) |
| Fire point, Tag Open Cup, ° F. | 113 (45° C.) |
| Isomer concentration (approximate) | 3:1 trans:cis |
| Viscosity, 75° F. (23.9° C.), cs. | 32.7 |
| Solubility, 25° C., wt. % | |
| in water | Completely miscible |
| water in | with water in all |
| | proportions |
| ethyl alcohol | miscible |
| acetone | miscible |

METHYLBUTYNYL ALCOHOL

Methylbutynol, 2-Methyl-3-Butyn-2-ol

 $\text{HCCCOH}(\text{CH}_3)_2$

Methylbutynyl alcohol is a tertiary acetylenic alcohol with an isoprenoid structure.

Table 6.135: Physical Properties of Methylbutynyl Alcohol (31)

| | |
|---------------------------------|--------------------------------------------------------|
| Boiling point | 104 - 105°C |
| Fire hazard | Dangerous when exposed to heat or flame |
| Flash point, Tag open cup | 87.4°F |
| Freezing point | 2.6°C |
| Refractive index at 20°C, n_D | 1.4211 |
| Specific gravity, 20/20°C | 0.8672 |
| Surface tension at 25°C | 23.8 dynes/cm (pure) 41.7 dynes/cm (5% in water) |
| Vapor pressure at 20°C | 12 mm |
| at 52°C | 80 mm |
| Weight per gallon | 7.24 lbs |

METHYLPENTYNYL ALCOHOL
Table 6.136: Physical Properties of Methylpentynyl Alcohol (31)

| | |
|---------------------------------|--------------------------------------------------------|
| Boiling point | 121 - 122°C |
| Fire hazard | Moderate |
| Flash point, Tag open cup | 101.3°F |
| Freezing point | -30.6°C |
| Refractive index at 20°C, n_D | 1.4318 |
| Solubility in water at 25°C | 12.8 g (100 g) |
| Specific gravity at 20/20°C | 0.8721 |
| Surface tension at 25°C | 23.8 dynes/cm (pure) 34.1 dynes/cm (5% in water) |
| Vapor pressure at 20°C | 4 mm |
| at 68°C | 90 mm |
| Weight per gallon | 7.28 lbs |

HIGHER UNSATURATED ALCOHOLS
Table 6.137: Unsaturated Aliphatic Alcohols (69)

| Systematic Name | Common Name | Empirical Formula | Mol. Wt. | Double Bonds | * Boiling Pt. o.C. |
|----------------------------------------------|--------------|----------------------|----------|--------------|--------------------|
| 9:10-Dodecenol | Lauroleyl | $C_{12}H_{23}OH$ | 184.31 | 1 | 157/15 mm |
| 9:10-Tetradecenol | Myristoleyl | $C_{14}H_{27}OH$ | 212.36 | 1 | |
| 9:10-Hexadecenol | Palmitoleyl | $C_{16}H_{31}OH$ | 240.41 | 1 | |
| 9:10-Octadecenol | Oleyl | $C_{18}H_{35}OH$ | 268.46 | 1 | 208-209/15 mm |
| 9:10-Eiscosenol | Gadoleyl | $C_{20}H_{39}OH$ | 296.51 | 1 | |
| 13:14-Docosenol | Erucyl | $C_{22}H_{43}OH$ | 324.57 | 1 | 240.5-241.5/10 mm |
| 9:10, 12:13-Octadecadienol | Linoleyl | $C_{18}H_{33}OH$ | 266.45 | 2 | 148-150/1 mm |
| 9:10, 12:13, 15:16-Octadecatrienol | Linolenyl | $C_{18}H_{31}OH$ | 264.43 | 3 | |
| 9:10, 11:12, 13:14-Octadecatrienol | Elaeostearyl | $C_{18}H_{31}OH$ | 264.43 | 3 | |
| 9:10-Octadecen-1,12-diol | Ricinoleyl | $C_{18}H_{34}(OH)_2$ | 284.47 | 1 | |
| 5:6, 8:9, 11:12, 14:15-Eicosatetraenol | Arachidonyl | $C_{20}H_{33}OH$ | 290.31 | 4 | |
| 4:5, 8:9, 12:13, 15:16, 19:20-Docosapentenol | Clupanodonyl | $C_{22}H_{35}OH$ | 316.0 | 5 | |

* Ralston, A. W., "Fatty Acids and Their Derivatives", p. 733.

* Hilditch, T. A., "The Chemical Constitution of Natural Fats".

* Brockelsby, H. P., "The Chemistry and Technology of Marine Oils with Particular Reference to Those of Canada". p. 90.

DIACETONE ALCOHOL
Table 6.138: Physical Properties of Diacetone Alcohol (31)

| | | | |
|------------------------------|-------------------|---------------------------------|------------------------------------------------------------|
| Acidity as acetic acid | 0.01% by wt. max. | Molecular weight | 116.16 |
| Azeotrope with water: | | Refractive index at 20°C, n_D | 1.4232 |
| boiling point, 760 mm | 98.8°C | Relative evaporation rate | |
| diacetone | 12.7% by wt | (n-butyl acetate = 100) | 14 |
| Boiling point, 760 mm | 169.2°C | Specific gravity at 20°C | 0.9406 |
| Coefficient of expansion | | Specific heat at 15°C | 0.500 cal/gm/°C |
| at 55°C | 0.00100 | Toxicity | Slight |
| Fire hazard | Moderate | Vapor pressure at 20°C | 0.97 mm |
| Flash point, Open cup | 155°F | Viscosity at 20°C | 3.2 cps |
| Freezing point | -42.8°C | Water at 20°C | Miscible without turbidity with 19 vol. of 60° Bé gasoline |
| Heat of vaporization, 1 atm. | 162 Btu/lb | | |
| Hydrocarbon solubility | Complete | | |
| MAC | 50 ppm in air | Weight per gallon at 20°C | 7.82 lbs |

2-MERCAPTOETHYL ALCOHOL**Table 6.139: Physical Properties of 2-Mercaptoethyl Alcohol (31)**

| | |
|---------------------------------------------------|------------------------|
| Boiling point at 760 mm | 156.9°C |
| 50 mm | 83°C |
| 10 mm | 53°C |
| Coefficient of expansion at 55°C | 0.00080 |
| Fire hazard | Moderate |
| Flash point, Open cup | 170°F |
| Heat of vaporization | 257 Btu/lb |
| Molecular weight | 78.13 |
| Refractive index at 20°C, n_D | 1.5011 |
| Relative evaporation rate (n-butyl acetate = 100) | 13 |
| Solubility in water at 20°C | Complete |
| Solubility of water in, at 20°C | Complete |
| Specific gravity at 20/20°C | 1.1168 |
| Vapor pressure at 20°C | 1.2 mm |
| Viscosity (absolute) at 20°C | 3.4 cps. |
| Toxicity | Moderate (acute local) |
| Weight per gallon at 20°C | 9.30 lbs |

2-ETHYLSULFONYLETHYL ALCOHOL**Table 6.140: Physical Properties of 2-Ethylsulfonylethyl Alcohol (37)**

| | |
|---------------------------------|---------------------|
| Acidity as acetic acid | 0.25% max. |
| Boiling range at 2.5 mm | 155 to 156°C |
| Fire hazard | Slight |
| Fire point | 406°F |
| Flash point, Tag open cup | 370°F |
| Moisture content | 1.5% max. |
| Molecular weight | 138.19 |
| Refractive index at 26°C, n_D | 1.4679 |
| Set point | 40.5 to 42.5°C |
| Specific gravity at 45/20°C | 1.252 to 1.258 g/ml |
| Toxicity | Slight |
| Viscosity at 60°C | 12.8 cps. |

1,1,1-TRIFLUOROETHYL ALCOHOL**Table 6.141: Trifluoroethanol Physical Properties (25)**

| | | | |
|-----------------------------------------------------------------|--------|----------------------------------------------------------------------------|-----------------------------------|
| Molecular Weight (CF ₃ CH ₂ OH) | 100.04 | Heat of Vaporization, Btu/lb. | 149 |
| Boiling Point, °C | 73.6 | Heat of combustion ¹⁸ , kcal/mol | - 211.9 |
| Melting Point, °C | - 45.0 | Vapor Pressure vs. Temperature, | $\log P = -\frac{1910}{T} + 8.39$ |
| Flash Point (Open Cup), °F | 105 | (mm. Hg., °K) | |
| (Closed Cup), °F | 92 | Thermal Conductivity, Btu/hr. ft. | |
| Fire Point | None | @ 104 °F | 0.071 |
| Density, 25 °C/4 °C | 1.3823 | Viscosity, centistokes, 100 °F | 0.90 |
| Refractive Index, n_D^{20} | 1.2907 | Ionization Constant K_a^{25} | 4.3×10^{-11} |
| Critical Temperature, °C | 227 | Dipole Moment ¹⁷ , $\mu(D)$ 25 °C | 2.03 |
| Critical Pressure, psia | 715 | Dielectric Constant ¹⁸ , $\epsilon(25^\circ\text{C})$ | 26.14 |

Table 6.142: Polymer Solubilities in Trifluoroethanol (25)

| POLYMER SOLUBILITIES IN TRIFLUOROETHANOL | | | | |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------|------------|------------------------|
| solubility | nylon 6/6 | nylon 6 | nylon 6/10 | Zytel [®] 61* |
| g./100 g. solution at b.p. (ca 80 °C) | 13 | >20 | 14 | >26 |
| g./100 g. solution at 24 °C | 3 | 11 | 3 | >26 |
| Insoluble Polymers at b.p.: | Delrin [®] , Lexan [®] , Mylar [®] , Polyethylene (high and low density), Polypropylene, Orlon [®] | | | |
| Other Soluble Polymers: | Polymethacrylate (>27 wt. % at 24 °C); Cellulose Acetate (>28 wt. % at 24 °C); Polyvinyl Acetate (>24 wt. % at 24 °C). | | | |
| Slightly soluble: | Nylon 11 (0.2 wt. %) | | | |
| * a duPont "soluble" nylon | | | | |

Table 6.143: Salt Solubility (wt. %) in Trifluoroethanol at 25 °C (25)

Salts

Inorganic salts are slightly soluble trifluoroethanol containing 0.2% water. The same salts are about 2 to 3 times more soluble in the alcohol containing 5% water. This combination of alcohol and water is convenient for conductometric titrations and organic ionic reactions.

| SOLUBILITY (WT.%) IN TRIFLUOROETHANOL AT 25 °C | | | | | | |
|------------------------------------------------|------|------|-------|-----|-----|-------------------|
| Water Content | LiCl | NaCl | NaF | KI | KBr | CaCl ₂ |
| 0.2% | 2.3 | 0.03 | 0.007 | 0.9 | 0.3 | 0.04 |
| 5.0% | 4.2 | 0.08 | 0.02 | 2.1 | 0.6 | 0.12 |

Table 6.144: Solubility of Gases in Trifluoroethanol at 27 °C (25)

Gases

The simple gases have solubilities in trifluoroethanol which are similar to their solubilities in water.

| SOLUBILITY OF GASES IN TRIFLUOROETHANOL AT 27 °C (ml. of gas/ml. of liquid) | | |
|-----------------------------------------------------------------------------------|----------------|-----------------|
| N ₂ | O ₂ | CO ₂ |
| 0.06 | 0.13 | 1.8 |

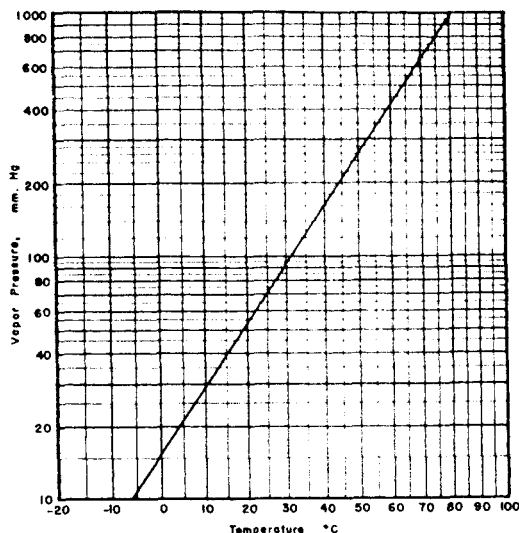
Table 6.145: Vapor Pressure vs. Temperature (25)


Table 6.146: Freezing Point: Trifluoroethanol-Water (25)


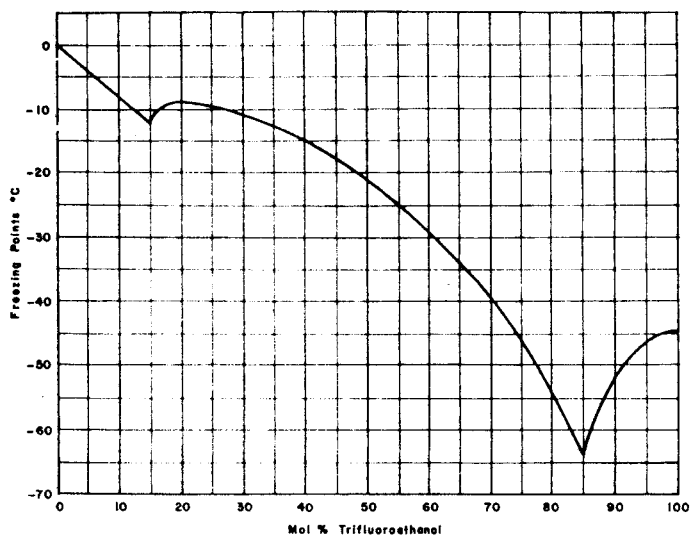


Table 6.147: Infrared Spectrum (25)

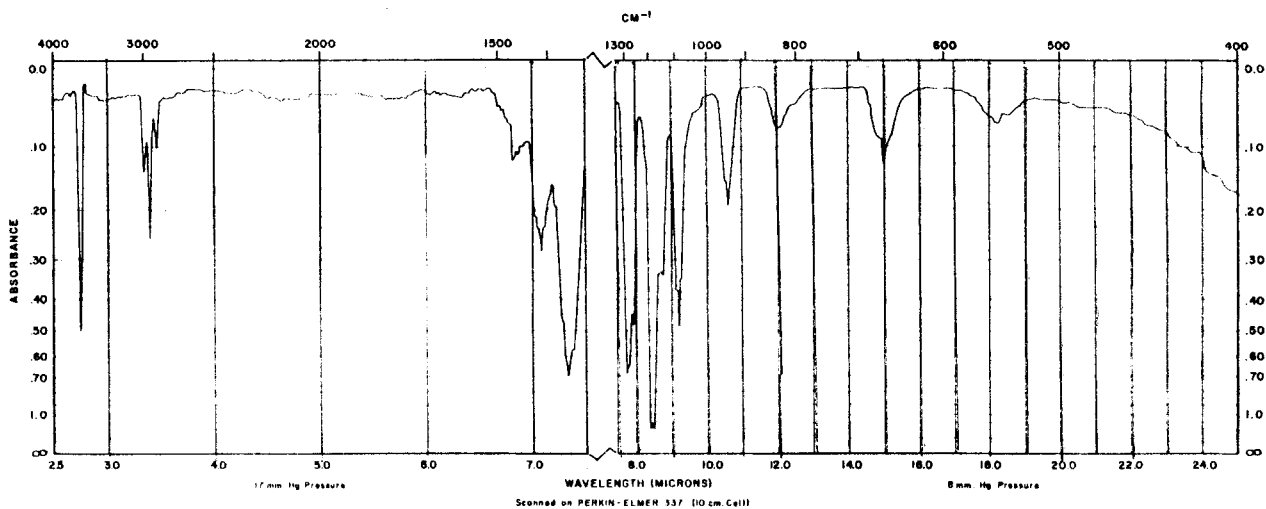

1H,1H,3H-TETRAFLUORO-1-PROPYL ALCOHOL

Table 6.148: Physical Properties of 1H,1H,3H-Tetrafluoro-1-Propyl Alcohol (31)

| | |
|---------------------------------|----------------------------------|
| Acid number | 0.82 |
| Boiling point at 760 mm | 109 - 110°C |
| Density at 20°C | 1.4853 g/ml |
| Distillation range at 760 mm | 90% between 99.5° and 108.5°C |
| Fluorine content | 57.5% |
| Formula weight | 132.06 |
| Hydroxyl number | 398 |
| Melting point | -15°C |
| Moisture content | 0.40% |
| Purity | > 95% |
| Refractive index at 20°C, n_D | 1.3197 |
| Surface tension at 20°C | 27.6 dynes/cm |

1H,1H,5H-OCTAFLUORO-1-PENTYL ALCOHOL

Table 6.149: Physical Properties of 1H,1H,5H-Octafluoro-1-Pentyl Alcohol (31)

| | |
|------------------------------------------|--------------------------------|
| Acid number | 0.70 |
| Boiling point at 760 mm | 140 - 141°C |
| Density at 20°C | 1.6647 g/ml |
| Distillation range, ASTM, at 760 mm | 90% between 133.0° and 141.0°C |
| Fluorine content | 65.5% |
| Formula weight | 232.08 |
| Hydroxyl number | 224 |
| Moisture content | 0.08% |
| Purity | > 95% |
| Refractive index at 20°C, n _D | 1.3190 |
| Surface tension at 20°C | 24.5 dynes/cm |

BENZYL ALCOHOL

Table 6.150: Physical Properties of Benzyl Alcohol (31)

| | | | |
|---------------------------------|------------------------------------|------------------------------------------|-----------------------------|
| Acidity as benzoic acid | 0.15% max. | Latent heat of evaporation at 204.25°C | 111.58 gm cal/gm |
| Aldehyde as benzaldehyde | 0.50% max. | Molecular weight | 108.13 |
| Boiling point | 205.3°C | Refractive index at 20°C, n _D | 1.5334-1.5397 |
| Chlorine as benzyl chloride | 0.15% max. | Solubility in water | 1 part in 30 parts of water |
| Dielectric constant | 1.66 | Specific gravity at 25/25°C | 1.044-1.058 |
| Distillation range, Ibp | 195°C min. | Specific heat at 15-20°C | 0.5402 cal/gm |
| 5% | 204°C | Surface tension (c. g. s. units) | 39.71 |
| 90% | 207°C | Toxicity | Slight |
| 95% | 210°C max. | Vapor pressure at 30°C | 0.100 mm |
| Electrical conductivity at 25°C | 18 x 10 ⁻⁷ recip. chms. | Viscosity at 20°C | 0.05582 cps. |
| Fire hazard | Slight | Weight per gallon at 20°C | 9.78 lbs. |
| Flash point (Open cup) | 213°F | | |
| Freezing point | -15.3°C | | |
| Heat of combustion | 893 kg cal/mole | | |

Table 6.151: VELSICOL Benzyl Alcohol (59)

Benzyl Alcohol, Reagent Grade

Benzyl Alcohol is a clear, colorless liquid with a mild, pleasant aromatic odor. It is a primary alcohol with reactive methylene and nuclear hydrogen. The reagent grade is a high purity material with analytical utility.

SPECIFICATIONS

| | | |
|------------------------------------------------------|-------|----------|
| Assay, (G.C.), % minimum | _____ | 99.0 |
| Solubility, in 25 ml water at 25°C, g | _____ | 1 |
| Benzaldehyde content (U.V. determination), % maximum | _____ | 0.03 |
| Halogen (Beilstein Test) | _____ | Negative |

TYPICAL PROPERTIES

| | | |
|----------------------------|-------|-----------------|
| Boiling Point, | | |
| 5 mm Hg, °F/°C | _____ | 177.8°/81° |
| 760 mm Hg, °F/°C | _____ | 401°/205° |
| Vapor Pressure, mm Hg | | |
| at 86°F/30°C | _____ | 0.1 |
| at 212°F/100°C | _____ | 13.3 |
| Melting Point, °F/°C | _____ | -5°/-15° |
| Specific Gravity, 25°/25°C | _____ | 1.042 - 1.047 |
| Refractive Index, 25°C | _____ | 1.5390 - 1.5410 |
| Vapor Density (air=1) | _____ | 3.72 |

FURFURYL ALCOHOL

Table 6.152: Physical Properties of Furfuryl Alcohol (46)

PHYSICAL PROPERTIES

| General Properties | | Other Properties | |
|-----------------------------------------------------------------------------------------------------------|-----------------------------|------------------------------------------------------------------------------------------------|-------------------------|
| Molecular Weight | 98.10 | Physical State | Liquid |
| Boiling Point (at 760 mm Hg) | | Color | Colorless to Yellow |
| °C | 170 | Odor | Mild & Characteristic |
| °F | 338 | Chemical Oxygen Demand, lb/lb FA | 1.75 |
| Freezing Point, metastable crystalline form | | Biochemical Oxygen Demand (5 days, 20°C), lb/lb FA | 0.81 |
| °C | -29 | Dipole Moment, e.s.u. | 1.92 x 10 ¹⁸ |
| °F | -20.2 | Solubility Parameter, (cal/cm ³) ^{1/2} | 12.5 |
| Freezing Point, stable crystalline form | | Solubility in | |
| °C | -14.63 | Water | ∞ |
| °F | 5.7 | Alcohol | ∞ |
| Density (at 20°C, 68°F), g/cm ³ | 1.1285 | Ether | ∞ |
| Specific Gravity, 20/20°C | 1.1351 | Flammability Properties of Commercial QO® FA® Furfuryl Alcohol | |
| Refractive Index | | Flash Point | |
| n _D ²⁰ | 1.4868-1.4870 | Tagliabue, closed cup | |
| n _D ²⁵ | 1.4843-1.4845 | °C | 77 |
| Vapor Density (air = 1) | 3.38 | °F | 170 |
| Vapor Pressure (at 31.8°C, 89.2°F), mm Hg | 1 | Pensky-Martens, closed cup | |
| | Also see Table I & Figure B | °C | 83 |
| | | °F | 182 |
| Thermodynamic Properties | | (Based on flash point, furfuryl alcohol is classified as a Combustible Liquid Class IIIA. *) | |
| Heat of Vaporization, cal/g | 122 | Flammability Limits (in dry air at 72.5–122°C) | |
| Heat Capacity, cal/g·°C | | % by volume | |
| liquid at -20°C | 0.450 | Lower limit | 1.8 |
| liquid at 0°C | 0.472 | Upper limit | 16.3 |
| liquid at 25°C | 0.502 | Ignition Temperature | |
| stable crystalline form at -40°C | 0.256 | In air | |
| stable crystalline form at -20°C | 0.278 | °C | 391 |
| Thermal Conductivity, kcal/m·hr·°C | 0.154 | °F | 736 |
| Heat of Combustion, kcal/gmole | | In oxygen | |
| at constant volume | 608.9 | °C | 364 |
| at constant pressure | 609.2 | °F | 687 |
| Heat of Formation, liquid, kcal/gmole | -66.06 | DOT Label Required | |
| Heat of Fusion, stable crystalline form, cal/g | 31.8 | U.S. | none** |
| Thermal Expansion Coefficient* | | International | See IMCO regulations |
| β/°C (-17.8 to 37.8°C) | 8.52 x 10 ⁻⁴ | | |
| β/°F (0 to 100°F) | 4.53 x 10 ⁻⁴ | | |
| *β = $\frac{\rho_1^2 - \rho_2^2}{2(t_2 - t_1)\rho_1\rho_2}$ (Note: ρ = specific gravity, t = temperature) | | | |
| Fluid Properties | | *Refers to Code 29 CFR 1910.106 of Federal Regulations. | |
| Viscosity (at 25°C, 77°F), cps | 5 | **When shipping via UPS, consult their <i>Guide For Shipping Hazardous Materials via UPS</i> . | |
| Surface Tension (at 25°C, 77°F), dynes/cm | 38.2 | | |
| Furfuryl Alcohol-Water Azeotrope (at 760 mm Hg) | | QO® FA® Furfuryl Alcohol Specifications* | |
| Boiling Point of Vapor | | Furfuryl Alcohol, Assay, wt %, Minimum | 98.0 |
| °C | 99 | Moisture, wt %, Maximum | 0.3 |
| °F | 210.2 | Furfural, wt %, Maximum | 0.7 |
| Composition, wt % | | Cloud Point, °C, Maximum** | 10.0 |
| Furfuryl Alcohol | ca 9 | | |
| Water | ca 91 | | |

*Methods available upon request.

**The cloud point of furfuryl alcohol is determined by diluting 15 ml of the alcohol with 30 ml of water and cooling the clear solution until it becomes definitely cloudy. The solution is then allowed to warm up with stirring until it is just clear. At this point, cooling produces an immediate cloudiness; this temperature is recorded as the cloud point (9).

Table 6.153: Vapor Pressure of Furfuryl Alcohol (46)

| Temperature | | Pressure mm Hg | |
|-------------|-------|-------------------|---|
| °C | °F | | |
| 31.8 | 89.2 | 1 | △ |
| 40 | 104 | 1.8 | ○ |
| 55.5 | 131.9 | 5.5 | □ |
| 56.0 | 132.8 | 5 | △ |
| 60 | 140 | 6.3 | ○ |
| 68.0 | 154.4 | 10 | △ |
| 75.5 | 167.9 | 16 | □ |
| 80 | 176 | 20.3 | ○ |
| 81.0 | 177.8 | 20 | △ |
| 95.5 | 203.9 | 44 | □ |
| 95.7 | 204.3 | 40 | △ |
| 100 | 212 | 53.5 | ○ |
| 104.0 | 219.2 | 60 | △ |
| 108.5 | 227.3 | 78 | □ |
| 115.9 | 240.6 | 100 | △ |
| 120 | 248 | 127.4 | ○ |
| 129.5 | 265.1 | 194 | □ |
| 133.1 | 271.6 | 200 | △ |
| 140 | 284 | 271.0 | ○ |
| 144.0 | 291.2 | 343 | □ |
| 151.8 | 305.3 | 400 | △ |
| 157.0 | 314.6 | 522 | □ |
| 170.0 | 338 | 760 | △ |

- Quaker Oats Chemicals, Inc., Research Laboratory, unpublished data.
- △ D.R. Stull, *Ind. & Eng. Chem.*, 39, 517, 1947
- G.S. Parks, private communication

Table 6.154: Pounds per Gallon of Furfuryl Alcohol at Various Temperatures (46)

| T, °F | T, °C | lbs/gal | T, °F | T, °C | lbs/gal |
|-------|--------|---------|-------|-------|---------|
| 0 | -17.78 | 9.7380 | 51 | 10.56 | 9.5182 |
| 1 | -17.22 | 9.7337 | 52 | 11.11 | 9.5139 |
| 2 | -16.67 | 9.7294 | 53 | 11.67 | 9.5096 |
| 3 | -16.11 | 9.7251 | 54 | 12.22 | 9.5053 |
| 4 | -15.56 | 9.7208 | 55 | 12.78 | 9.5010 |
| 5 | -15 | 9.7165 | 56 | 13.33 | 9.4967 |
| 6 | -14.44 | 9.7122 | 57 | 13.89 | 9.4924 |
| 7 | -13.89 | 9.7079 | 58 | 14.44 | 9.4881 |
| 8 | -13.33 | 9.7036 | 59 | 15 | 9.4838 |
| 9 | -12.78 | 9.6992 | 60 | 15.56 | 9.4795 |
| 10 | -12.22 | 9.6949 | 61 | 16.11 | 9.4752 |
| 11 | -11.67 | 9.6906 | 62 | 16.67 | 9.4708 |
| 12 | -11.11 | 9.6863 | 63 | 17.22 | 9.4665 |
| 13 | -10.56 | 9.6820 | 64 | 17.78 | 9.4622 |
| 14 | -10 | 9.6777 | 65 | 18.33 | 9.4579 |
| 15 | -9.44 | 9.6734 | 66 | 18.89 | 9.4536 |
| 16 | -8.89 | 9.6691 | 67 | 19.44 | 9.4493 |
| 17 | -8.33 | 9.6648 | 68 | 20 | 9.4450 |
| 18 | -7.78 | 9.6605 | 69 | 20.56 | 9.4407 |
| 19 | -7.22 | 9.6562 | 70 | 21.11 | 9.4364 |
| 20 | -6.67 | 9.6518 | 71 | 21.67 | 9.4321 |
| 21 | -6.11 | 9.6475 | 72 | 22.22 | 9.4278 |
| 22 | -5.56 | 9.6432 | 73 | 22.78 | 9.4234 |
| 23 | -5 | 9.6389 | 74 | 23.33 | 9.4191 |
| 24 | -4.44 | 9.6346 | 75 | 23.89 | 9.4148 |
| 25 | -3.89 | 9.6303 | 76 | 24.44 | 9.4105 |
| 26 | -3.33 | 9.6260 | 77 | 25 | 9.4062 |
| 27 | -2.78 | 9.6217 | 78 | 25.56 | 9.4019 |
| 28 | -2.22 | 9.6174 | 79 | 26.11 | 9.3976 |
| 29 | -1.67 | 9.6131 | 80 | 26.67 | 9.3933 |
| 30 | -1.11 | 9.6087 | 81 | 27.22 | 9.3890 |
| 31 | -0.56 | 9.6044 | 82 | 27.78 | 9.3847 |
| 32 | 0 | 9.6001 | 83 | 28.33 | 9.3803 |
| 33 | 0.56 | 9.5958 | 84 | 28.89 | 9.3760 |
| 34 | 1.11 | 9.5915 | 85 | 29.44 | 9.3717 |
| 35 | 1.67 | 9.5872 | 86 | 30 | 9.3674 |
| 36 | 2.22 | 9.5829 | 87 | 30.56 | 9.3631 |
| 37 | 2.78 | 9.5786 | 88 | 31.11 | 9.3588 |
| 38 | 3.33 | 9.5743 | 89 | 31.67 | 9.3545 |
| 39 | 3.89 | 9.5700 | 90 | 32.22 | 9.3502 |
| 40 | 4.44 | 9.5657 | 91 | 32.78 | 9.3459 |
| 41 | 5 | 9.5613 | 92 | 33.33 | 9.3416 |
| 42 | 5.56 | 9.5570 | 93 | 33.89 | 9.3373 |
| 43 | 6.11 | 9.5527 | 94 | 34.44 | 9.3329 |
| 44 | 6.67 | 9.5484 | 95 | 35 | 9.3286 |
| 45 | 7.22 | 9.5441 | 96 | 35.56 | 9.3243 |
| 46 | 7.78 | 9.5398 | 97 | 36.11 | 9.3200 |
| 47 | 8.33 | 9.5355 | 98 | 36.67 | 9.3157 |
| 48 | 8.89 | 9.5312 | 99 | 37.22 | 9.3114 |
| 49 | 9.44 | 9.5269 | 100 | 37.78 | 9.3071 |
| 50 | 10 | 9.5226 | | | |

Table 6.155: Density of Furfuryl Alcohol–Water Solutions as a Function of Composition (at 25°C, 77°F) (46)

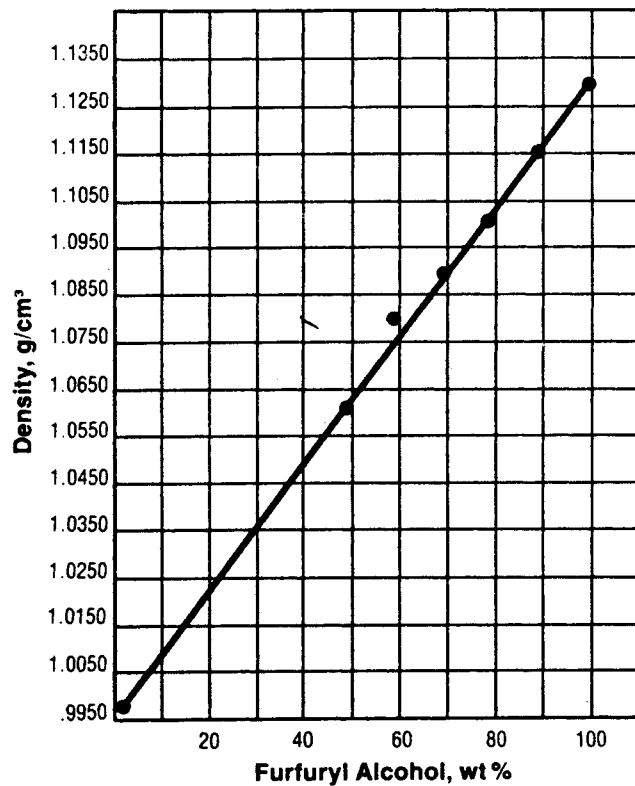


Table 6.156: Vapor Pressure of Furfuryl Alcohol as a Function of Temperature (46)

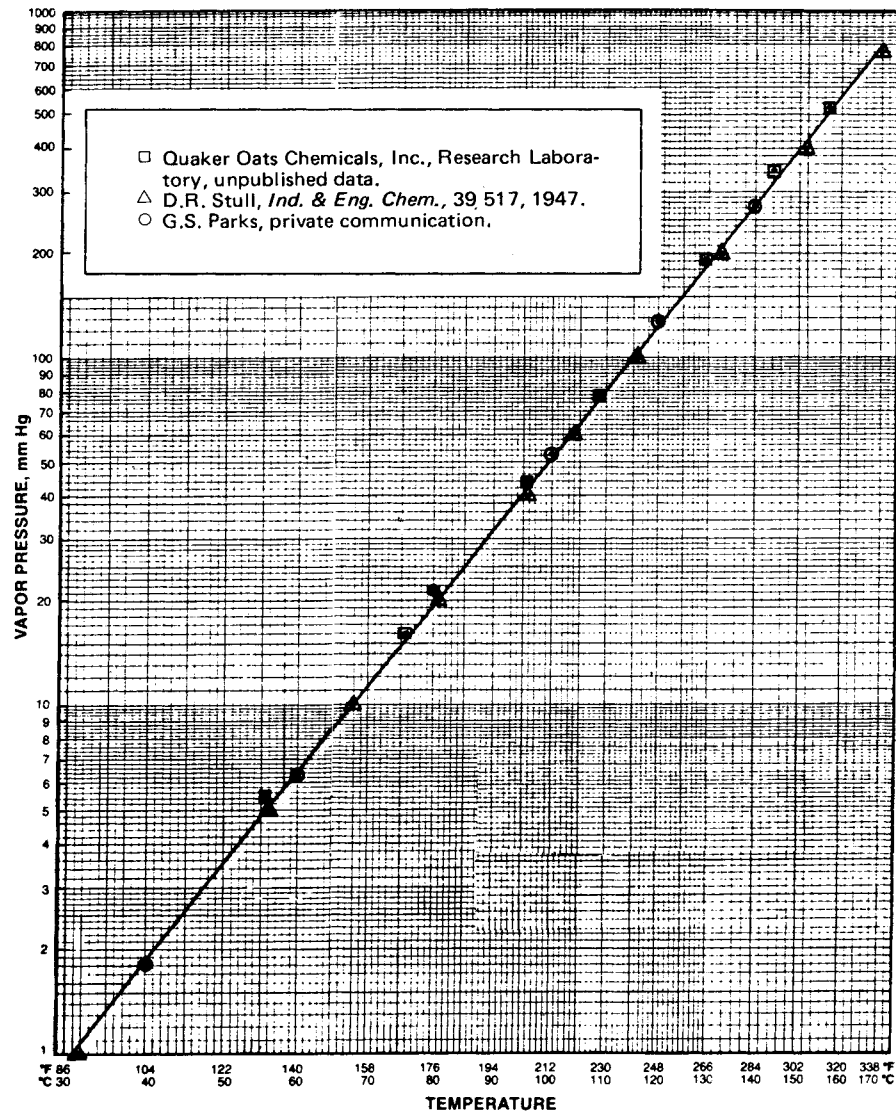


Table 6.157: Solubility of Liquid Organic Compounds in Furfuryl Alcohol (at 25°C, 77°F) (46)

| Compound | 5 cc/5 cc Furfuryl Alcohol | 5 cc/10 cc Furfuryl Alcohol |
|------------------------------------------|----------------------------|-----------------------------|
| Acid, dichloroacetic, C.P. | R | |
| Acid, lactic, U.S.P. | S | |
| Acid, valeric | S | |
| Alcohol, amyl | S | |
| Alcohol, benzyl, tech. | S | |
| Alcohol, ethyl | S | |
| Alcohol, isoamyl, tech. | S | |
| Alcohol, isobutyl, C.P. | S | |
| Alcohol, isopropyl, tech. | S | |
| Alcohol, propyl | S | |
| Aniline | S | |
| 1,2-Butanediol | S | |
| Chloroform, U.S.P. | S | |
| Crotonaldehyde, tech. | S | |
| o-Dichlorobenzene | S | |
| Dichloroethyl ether, tech. | S | |
| Diethylaniline, tech. | S | |
| Diethyl carbonate | S | |
| Diethylene glycol | S | |
| Diethylene glycol dioleate | S | |
| Diethylene glycol monobutyl ether, tech. | S | |
| Diethyl phthalate, C.P. | S | |
| Diethyl sulfate, tech. | R | |
| N,N-Dimethylaniline, tech. | S | |
| Dimethyl sulfate | R | |
| Ether, ethyl | S | |
| Ether, isopropyl | S | |
| Ethyl acetate, tech. | S | |
| Ethyl acetoacetate | S | |
| N-Ethyl-N-benzylaniline | SS | S |
| Ethyl bromide | S | |
| Ethylchlorocarbonate | R | |
| Ethylene chlorohydrin | SS | SS |
| Ethylene dichloride | S | |
| Ethylene glycol monobutyl ether, tech. | S | |
| Glycerol, U.S.P. | S | |
| Methyl acetate, tech. | S | |
| Methyl ethyl ketone | S | |
| Nitrobenzene | S | |
| o-Nitrotoluene, tech. | S | |
| Oil, lard | I | I (S at 125°C) |
| Oil, linseed | SS | SS (S at 120°C) |
| Oil, neatsfoot | I | I (S at 120°C) |
| Oil, peanut | I | I (S at 125°C) |
| Oil, rapeseed | I | I (S at 120°C) |
| Oil, Turkey red | S | |
| Oil, whale | I | I (S at 125°C) |
| Paraldehyde, U.S.P. | S | |
| Pyridine, tech. | S | |
| 1,1,2,2-Tetrachloroethane, tech. | S | |
| o-Toluidine, tech. | S | |
| Xylene | S | |

Table 6.158: Solubility of Solid Organic Compounds in Furfuryl Alcohol (at 25°C, 77°F) (46)

| Compound | 1 g/5 cc Furfuryl Alcohol | 1 g/10 cc Furfuryl Alcohol |
|-----------------------------------|---------------------------|----------------------------|
| Acid, acetylsalicylic, U.S.P. | S | |
| Acid, anthranilic | S | |
| Acid, benzoic, U.S.P. | S | |
| Acid, citric, U.S.P. | SS | S |
| Acid, monochloroacetic | S | |
| Acid, naphthionic, tech. | I | I (R at 115°C) |
| Acid, oxalic, tech. | I | R |
| Acid, stearic | SS | SS (S at 95°C) |
| Acid, sulfanilic | I | I (R at 115°C) |
| Acid, tannic | SS | SS (SS at 125°C) |
| Acid, tartaric, U.S.P. | I | I (SS at 125°C) |
| Acid, trichloroacetic | R | |
| Anthracene, tech. | I | SS (S at 110°C) |
| Anthraquinone | I | I (S at 130°C) |
| Benzidine | SS | S-R |
| 3-Bromo-d-camphor | S | |
| Carbazole | | I (S at 120°C) |
| Casein | I | I (I at 125°C) |
| Chloral hydrate, U.S.P. | S | |
| o-Chloronitrobenzene, tech. | S | |
| Dextrose | I | I (SS at 125°C) |
| Dianisidine, tech. | S | |
| p-Dichlorobenzene | S | |
| Diglycol stearate | SS | I (S at 100°C) |
| N,N-Dimethyl-para-nitrosoaniline | S | |
| Dinitrochlorobenzene, tech. | S | |
| Dinitronaphthalene | I | I (S at 120°C) |
| Dinitrophenol | S | |
| Diphenyl | S | |
| Diphenylamine | S | |
| Diphenylguanidine | S | |
| Hexamethylenetetramine, U.S.P. | S | |
| Iodoform, U.S.P. | I | I (S at 92°C) |
| Naphthalene | I | I (S at 92°C) |
| alpha-Naphthol, tech. | S | |
| beta-Naphthol, tech. | S | |
| beta-Naphthylamine, tech. | I | I (S at 92°C) |
| alpha-Naphthylamine hydrochloride | R (violent reaction) | |
| m-Nitroaniline | S | |
| p-Nitroaniline | S | |
| p-Nitrophenol, tech. | S | |
| p-Nitrotoluene | S | |
| m-Phenylenediamine | S | |
| Resorcinol, white, U.S.P. | S | |
| Saccharin, U.S.P. | I | I (SS at 125°C) |
| Sodium acetate | I | I (S at 115°C) |
| Sodium benzoate, U.S.P. | I | I (I at 125°C) |
| Sodium naphthionate, tech. | I | I (R at 112°C) |
| Sodium picramate, tech. | I | |
| Thiocarbaniide | I | I (S at 92°C) |
| 2,4,6-Tribromophenol, tech. | S | |
| Triphenylguanidine, tech. | S | |

S = Soluble SS = Slightly soluble I = Insoluble R = Reacts*

*Reactions of furfuryl alcohol in the presence of acid or acid generators may be violent; use caution.


Table 6.159: Solubility of Thermoplastic Resins in Furfuryl Alcohol (at Room Temperature) (46)

| Resin Type | Tradename (Manufacturer) | Solubility |
|----------------------------|-------------------------------------|------------|
| Cellulose acetate butyrate | CAB-500-1 (Tennessee Eastman) | VS |
| Cellulose nitrate | RS (Hercules) | VS |
| Ethylcellulose | N-50 (Hercules) | VS |
| Methyl methacrylate | Plexiglass® V(052)100 (Rohm & Haas) | S* |
| Methyl methacrylate | Plexiglass® VM100 (Rohm & Haas) | S* |
| Nylon | Elvamide® 8023 (DuPont) | VS |
| Nylon | Elvamide® 8061 (DuPont) | S* |
| Nylon | Elvamide® 8061M (DuPont) | VS* |
| Nylon | Elvamide® 8064 (DuPont) | S* |
| Nylon | Elvamide® 80625 (DuPont) | S |
| Nylon | Elvamide® PB8066 (DuPont) | S |
| Nylon | Rilsan® BMNO (Rilsan Corp.) | I |
| Polyethylene | Dowlex® 2045 (Dow Chemical) | I |
| Polyethylene | Dowlex® 2598TB (Dow Chemical) | I |
| Vinyl acetate | Bakelite® AYAT (Union Carbide) | VS |
| Vinyl acetate-chloride | Bakelite® VYHH (Union Carbide) | I |
| Vinyl butyral | Bakelite® XYHL (Union Carbide) | VS |
| Vinylidene chloride | Saran F-310 (Dow Chemical) | I |


S = Soluble from 1 g to 10 g per 100 g solvent
 VS = Soluble 10 g or more per 100 g solvent
 I = Less than 1 g per 100 g solvent
 * = Slowly

Table 6.160: Effect of Time at Elevated Temperature on Certain Characteristics of Furfuryl Alcohol (Under Neutral Conditions) (46)

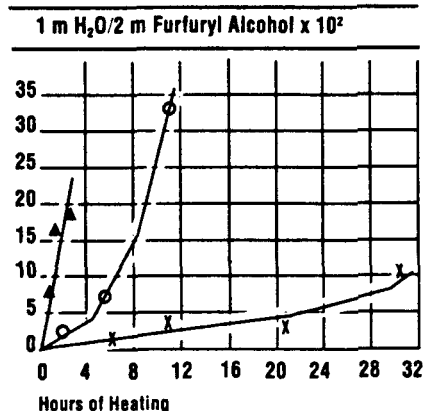
Rate of Water Formation



Rate of Change of Specific Gravity

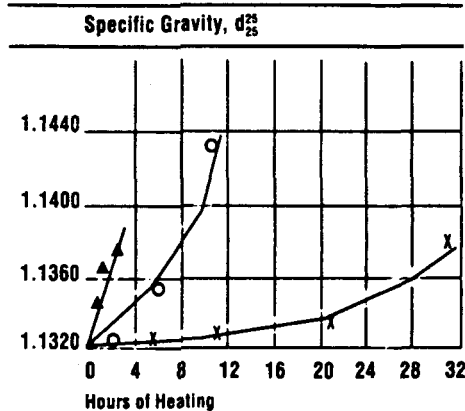

Rate of Change of Refractive Index

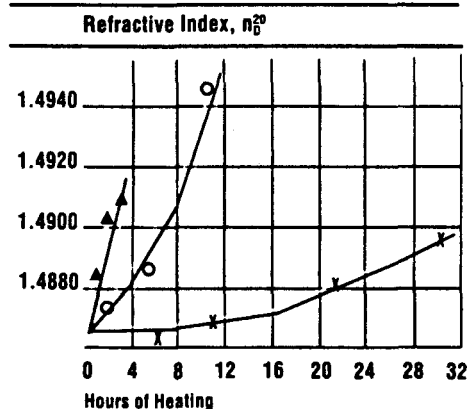

Legend:
 x — At 100°C
 o — At 150°C
 Δ — At 200°C

Table 6.161: Stabilization of Furfuryl Alcohol With an Amine (at 150°C in Glass) (46)

Stabilization of Furfuryl Alcohol with an Amine (at 150°C in glass)

| Stabilizer | Time, Hours | Refractive Index, n _D /D | Density, d ₂₅ /25 | Cloud Point, °C | Water, % |
|---------------------|-------------|-------------------------------------|------------------------------|-----------------|----------|
| None | 0.0 | 1.4870 | 1.1322 | 5.5 | 0.03 |
| | 1.5 | 1.4875 | 1.1333 | 13.5 | 0.18 |
| | 5.5 | 1.4890 | 1.1356 | 36.0 | 0.67 |
| | 10.5 | 1.4944 | 1.1428 | insol. @ 100°C | 3.05 |
| n-butyl amine, 0.3% | 0.0 | 1.4868 | 1.1308 | 8.5 | 0.09 |
| | 1.5 | 1.4870 | 1.1309 | 8.5 | 0.06 |
| | 5.5 | 1.4869 | 1.1310 | 8.5 | 0.16 |
| | 10.5 | 1.4871 | 1.1311 | 9.0 | 0.19 |

A.P. Dunlop and F.N. Peters, Jr., *Ind. Eng. Chem.*, 34, 814 (1942).

Table 6.162: Antoxidation of Furfuryl Alcohol (46)

Oxygen Absorption, Moles O₂/Liter Furfuryl Alcohol (Under Accelerated Laboratory Conditions)

| Time, Hours | Furfuryl Alcohol | Furfuryl Alcohol plus 0.5% H ₂ O | Furfuryl Alcohol plus 0.5% Tripropylamine | Furfuryl Alcohol plus 0.5% Hydroquinone |
|---------------------------------------|------------------|---------------------------------------------|-------------------------------------------|-----------------------------------------|
| 42 | 0.075 | 0.139 | — | — |
| 74 | 0.250 | 0.377 | — | — |
| 127 | 0.636 | 0.672 | — | — |
| 162 | 0.840 | 0.852 | — | — |
| 215 | 0.972 | — | — | — |
| 264 | 1.084 | — | — | 0.074 |
| 330 | 1.229 | — | 0.019 | 0.117 |
| Acidity, equiv/liter Furfuryl Alcohol | | | | |
| 0 (initial) | 0.004 | 0.004 | 0.012 | 0.005 |
| 330 (final) | 0.365 | 0.395 | 0.003 | 0.041 |

TETRAHYDROFURFURYL ALCOHOL (46)

Table 6.163: Physical Properties of Tetrahydrofurfuryl Alcohol (46)

| Physical Properties of THFA® | | | |
|-----------------------------------|------------------|---------------------------------------------------|-------|
| Molecular weight | 102.13 | Specific heat, liquid at 20°C, cal/g°C | 0.424 |
| Appearance | colorless liquid | Heat of vaporization, cal/g | 120.6 |
| | | Heat of combustion, kcal/mol at constant pressure | 709.5 |
| Boiling point at 760 mm, °C | 178 | Flash point (Tag closed-cup), °C | 74 |
| Vapor pressure | see pg. 6 | Flash point (Tag closed-cup), °F | 165 |
| Freezing point, °C | below -80 | Auto-ignition temperature, °C | 282 |
| Specific gravity at 20/20°C | 1.054 | Flammability limits in air lower, vol % | 1.5 |
| Pounds per gal. at 20°C | 8.79 | Flammability limits in air upper, vol % | 9.7 |
| Refractive index n_D^{20} | 1.452 | Dielectric constant at 23°C | 13.6 |
| Surface tension at 25°C, dynes/cm | 37 | Solubility parameter (est.) | 12-13 |
| Viscosity at 20°C, cps absolute | 6.24 | Relative evaporation rate (n-butyl acetate=1.00) | .03 |

| GO® THFA® Specifications | |
|------------------------------|-------|
| THFA*, Assay, wt. % min. | 98.0 |
| Furfuryl alcohol, wt. % max. | 0.1 |
| 1,2-Pentanediol, wt. % max. | 1.6 |
| Moisture, wt. % max. | 0.3 |
| Color, APHA, max. | 50 |
| Inhibitor | |
| Polygard, wt. % | 0.025 |
| Sodium borohydride, wt. % | 0.005 |

Table 6.164: Solubility of Various Substances in Tetrahydrofurfuryl Alcohol (46)

| | 20 wt. % solute | 10 wt. % solute | | 20 wt. % solute | 10 wt. % solute |
|------------------------|--------------------|--------------------|---------------------------------|--------------------|---------------------|
| Acids: | | | Esters: | | |
| Acetylsalicylic | S | | Amyl acetate | S | |
| Anthranilic | S | | Butyl acetate | S | |
| Benzoic | S | | Cellulose acetate | S | |
| Butyric | S | | Diethyl acetate | S | |
| Citric | SS | S | Diethyl phthalate | S | |
| Cresylic | S | | Ethyl acetate | S | |
| Lactic | SS (S at 120°) | S | Ethyl acetoacetate | S | |
| Naphthionic | SS | S | Methyl acetate | S | |
| Oxalic | SS | S | | | |
| Stearic | I | I (S at 100°) | Ethers: | | |
| Sulfanilic | I | I (S at 130°) | Dichloroethyl | S | |
| Tannic | I | I (SS at 130°) | Diethylene glycol monobutyl | S | |
| Tartaric | SS | | Diethylene glycol monoethyl | S | |
| Trichloroacetic | S | | Ethyl | S | |
| Valeric | S | | Ethylene glycol monobutyl | S | |
| | | | Ethylene glycol monoethyl | S | |
| Alcohols: | | | Halides: | | |
| Benzyl alcohol | S | | Benzyl chloride | S | |
| Chloral hydrate | S | | Bromobenzene | S | |
| Dinitrophenol | S | | Bromoform | S | |
| Ethanol | S | | Chloroform | S | |
| Ethylene glycol | S | | o-Dichlorobenzene | S | |
| Glycerol | S | | p-Dichlorobenzene | SS | S |
| Isobutanol | S | | Dinitrochlorobenzene | SS | S |
| Isopropanol | S | | Ethyl bromide | S | |
| α-Naphthol | S | | Ethylene chloride | S | |
| β-Naphthol | S | | Iodoform | S | |
| Pentanol | S | | o-Nitrochlorobenzene | SS | S |
| Propanol | S | | Tetrachloroethane | S | |
| Aldehydes: | | | Ketones: | | |
| Benzaldehyde | S | | Acetone | S | |
| Crotonaldehyde | S | | Antraquinone | I | I (S at 130°) |
| Paraldehyde | S | | Methyl ethyl ketone | S | |
| Amines: | | | Oils: | | |
| Aniline | S | | Aniline | S | |
| Benzidine | S | | Castor | I | |
| Dianisidine | SS | S | Chinawood | I | |
| Diethyl aniline | S | | Coconut | I | |
| Dimethyl aniline | S | | Cottonseed | I | |
| Diphenylamine | S | | Lard | I | (S at 120°) |
| Hexamethylenetetramine | I | I (SS at 130°) | Linseed | I | (S at 120°) |
| β-Naphthylamine | SS | S | Menhaden | I | (S at 120°) |
| m-Phenylenediamine | S | | Neat's-foot | I | (S at 120°) |
| Pyridine | S | | Peanut | I | (S at 120°) |
| o-Toluidine | S | | Rape-seed | I | (S at 120°) |
| Triphenylguanidine | SS | S | Sperm | I | (S at 120°) |
| Xylidine | S | | Turkey Red | S | |
| | | | Whale | I | (S at 120°) |
| Aromatics: | | | Miscellaneous Compounds: | | |
| Anthracene | I | I (S at 100°) | Caffeine | I | |
| Benzene | S | | Camphor, monobromo | I | |
| Dinitronaphthalene | I | I (S at 120°) | Casein | I | |
| Diphenyl | SS | S | Chloramine | I | I (SS at 130°) |
| Naphthalene | S | | Dextrose | I | I (S at 100°) |
| p-Nitrophenol | S | | Sodium acetate | SS | S |
| o-Nitrotoluene | S | | Sodium benzoate | I | SS (S at 135°) |
| p-Nitrotoluene | I | S | | | |
| Xylol | S | | | | |
| | | | Key: | | |
| | | | S=Soluble | | SS=Slightly Soluble |
| | | | I=Insoluble | | temp= Fahrenheit |

Table 6.165: Vapor-Liquid Equilibria in the Tetrahydrofurfuryl Alcohol-Water System (46)

| Liquid Phase | | | Vapor Phase | | | Boiling Point | |
|--------------|---------------|--------|-------------|---------------|--------|----------------|----------------|
| Weight % | Mole Fraction | | Weight % | Mole Fraction | | Temperature °C | Pressure mm HG |
| | THFA | Water | | THFA | Water | | |
| 1.0 | 0.0018 | 0.9982 | 1.0 | 0.0018 | 0.9982 | 100.0 | 749.5 |
| 2.6 | 0.0048 | 0.9952 | 2.0 | 0.0036 | 0.9964 | 100.4 | 749.5 |
| 5.7 | 0.0106 | 0.9894 | 2.0 | 0.0036 | 0.9964 | 100.5 | 747.8 |
| 6.1 | 0.0113 | 0.9887 | 2.3 | 0.0041 | 0.9959 | 100.6 | 747.8 |
| 9.7 | 0.0186 | 0.9814 | 3.4 | 0.0062 | 0.9938 | 100.6 | 749.5 |
| 13.5 | 0.0267 | 0.9733 | 4.3 | 0.0079 | 0.9921 | 101.0 | 749.2 |
| 17.2 | 0.0354 | 0.9646 | 4.9 | 0.0090 | 0.9910 | 101.0 | 747.8 |
| 20.3 | 0.0430 | 0.9570 | 5.7 | 0.0106 | 0.9894 | 101.0 | 749.0 |
| 24.6 | 0.0544 | 0.9456 | 6.2 | 0.0115 | 0.9885 | 101.0 | 747.8 |
| 30.2 | 0.0709 | 0.9291 | 7.2 | 0.0135 | 0.9865 | 102.0 | 749.5 |
| 30.8 | 0.0728 | 0.9272 | 7.3 | 0.0137 | 0.9863 | 101.0 | 749.0 |
| 36.9 | 0.0936 | 0.9064 | 8.0 | 0.0151 | 0.9849 | 101.0 | 748.9 |
| 44.8 | 0.125 | 0.875 | 9.6 | 0.0185 | 0.9815 | 102.0 | 752.5 |
| 44.9 | 0.126 | 0.874 | 9.7 | 0.0186 | 0.9814 | 102.0 | 753.7 |
| 49.3 | 0.146 | 0.854 | 10.5 | 0.0202 | 0.9798 | 102.1 | 755.9 |
| 53.4 | 0.168 | 0.832 | 11.3 | 0.0220 | 0.9780 | 102.5 | 754.1 |
| 58.9 | 0.202 | 0.798 | 11.8 | 0.0231 | 0.9769 | 103.0 | 754.6 |
| 63.6 | 0.234 | 0.766 | 13.3 | 0.0262 | 0.9738 | 103.0 | 754.9 |
| 70.4 | 0.296 | 0.704 | 14.5 | 0.0290 | 0.9710 | 104.0 | 755.2 |
| 77.3 | 0.375 | 0.625 | 18.5 | 0.0384 | 0.9616 | 105.5 | 755.2 |
| 79.3 | 0.403 | 0.597 | 18.5 | 0.0384 | 0.9616 | 106.0 | 747.8 |
| 81.1 | 0.431 | 0.569 | 18.9 | 0.0394 | 0.9606 | 106.0 | 748.4 |
| 82.3 | 0.451 | 0.549 | 20.4 | 0.0432 | 0.9568 | 107.0 | 741.1 |
| 84.9 | 0.496 | 0.504 | 20.3 | 0.0430 | 0.9570 | 107.0 | 748.4 |
| 86.1 | 0.522 | 0.478 | 24.7 | 0.0547 | 0.9453 | 108.0 | 745.9 |
| 87.1 | 0.546 | 0.454 | 27.4 | 0.0625 | 0.9375 | 107.0 | 741.9 |
| 92.6 | 0.688 | 0.312 | 40.1 | 0.106 | 0.894 | 119.0 | 745.6 |
| 95.4 | 0.785 | 0.215 | 65.3 | 0.249 | 0.751 | 139.5 | 745.8 |
| 98.0 | 0.896 | 0.104 | 87.5 | 0.553 | 0.447 | 148.0 | 750.9 |

Table 6.167: Vapor Pressure of Tetrahydrofurfuryl Alcohol(46)

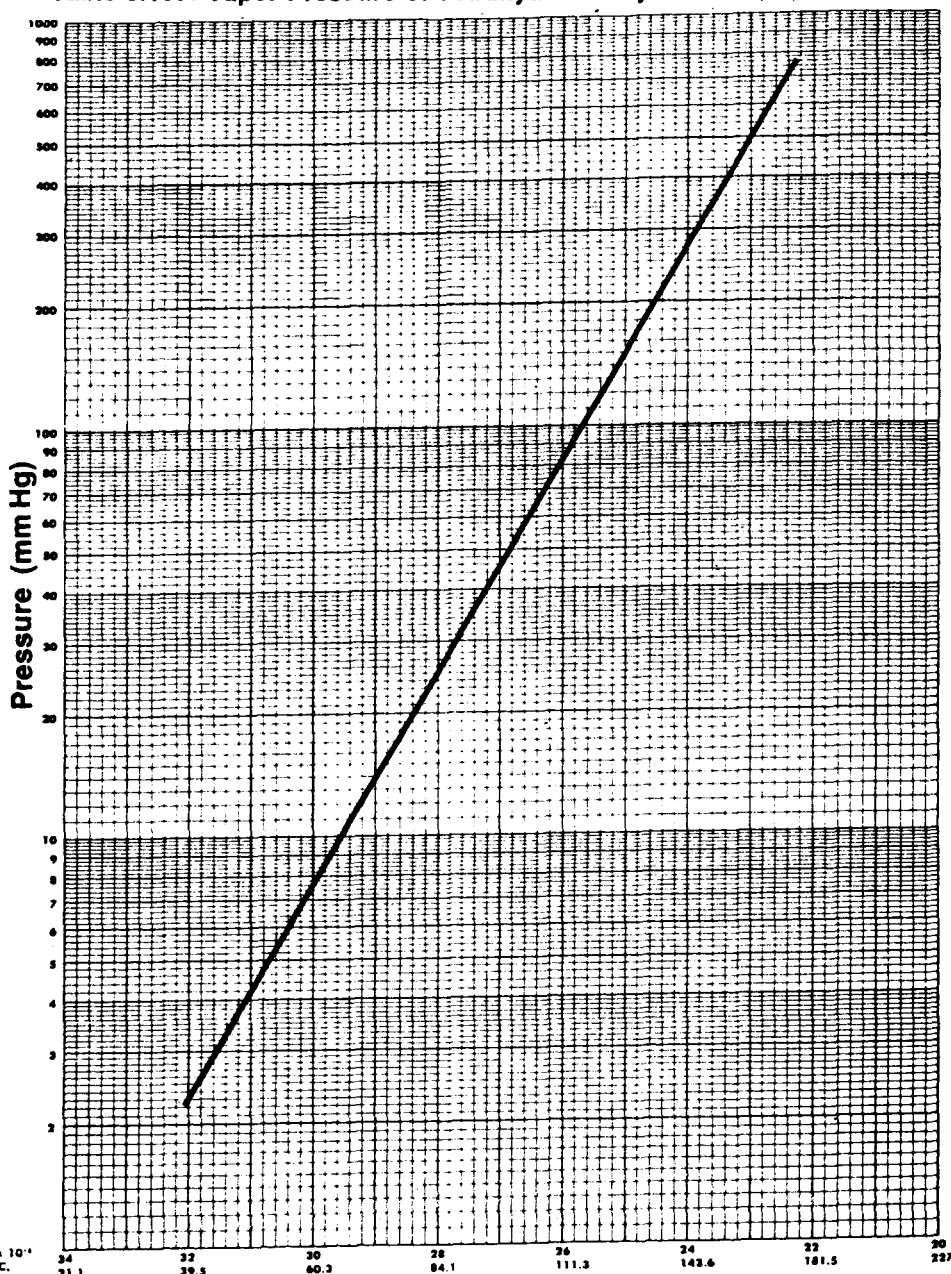


Table 6.166: Specific Gravity and Pounds per Gallon of Tetrahydrofurfuryl Alcohol at Various Temperatures (46)

| °C | °F | Specific Gravity | Density (lb/gal) |
|----|-------|------------------|------------------|
| 50 | 122.0 | 1.026 | 8.566 |
| 48 | 118.4 | 1.028 | 8.581 |
| 46 | 114.8 | 1.030 | 8.596 |
| 44 | 111.2 | 1.032 | 8.610 |
| 42 | 107.6 | 1.034 | 8.624 |
| 40 | 104.0 | 1.035 | 8.641 |
| 38 | 100.4 | 1.037 | 8.656 |
| 36 | 96.8 | 1.039 | 8.671 |
| 34 | 93.2 | 1.041 | 8.686 |
| 32 | 89.6 | 1.043 | 8.701 |
| 30 | 86.0 | 1.044 | 8.716 |
| 28 | 82.4 | 1.046 | 8.731 |
| 26 | 78.8 | 1.048 | 8.746 |
| 24 | 75.2 | 1.049 | 8.761 |
| 22 | 71.6 | 1.052 | 8.776 |
| 20 | 68.0 | 1.053 | 8.791 |
| 18 | 64.4 | 1.055 | 8.806 |
| 16 | 60.8 | 1.057 | 8.821 |
| 14 | 57.2 | 1.059 | 8.836 |
| 12 | 53.6 | 1.061 | 8.851 |
| 10 | 50.0 | 1.062 | 8.866 |
| 8 | 46.4 | 1.064 | 8.881 |
| 6 | 42.8 | 1.066 | 8.896 |
| 4 | 39.2 | 1.068 | 8.911 |
| 2 | 35.6 | 1.070 | 8.926 |
| 0 | 32.0 | 1.071 | 8.931 |

Change per °C: Sp. Gr. -0.0009
Lbs./Gal. -0.00751

Table 6.168: Vapor-Liquid Equilibria Curve of the THFA-Water System at the Boiling Point (46)

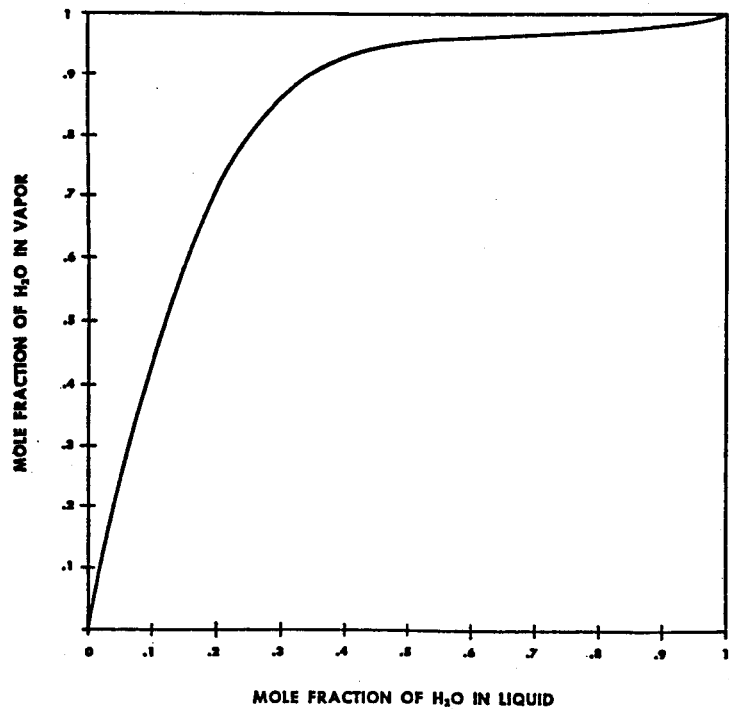


Table 6.169: The System THFA-Water Composition Curve (46)

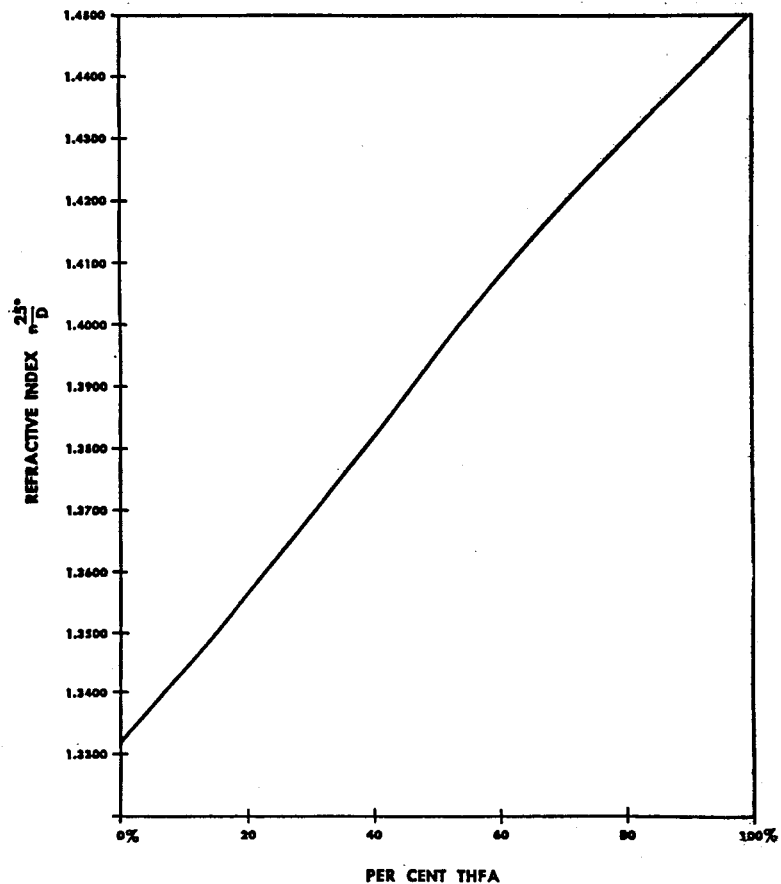


Table 6.170: Specific Gravity and Pounds per Gallon (46)

| Temperature | | Sp. Gr.* | Lbs./Gal. |
|-------------|-------|----------|-----------|
| °C | °F | | |
| 50 | 122.0 | 1.031 | 8.588 |
| 40 | 104.0 | 1.039 | 8.656 |
| 30 | 86.0 | 1.047 | 8.724 |
| 20 | 68.0 | 1.055 | 8.792 |
| 10 | 50.0 | 1.064 | 8.859 |
| 0 | 32.0 | 1.072 | 8.927 |

Change per °C: Sp. Gr.—0.000815 Lbs./Gal.—0.00679
 *Referred to water at 20°C

Table 6.171: Vapor Pressure (Boiling Point Method) (46)

| Pressure (mm) | °C | °K | 1/°K |
|---------------|-------|-------|---------|
| 2.3 | 41.6 | 314.6 | 0.00318 |
| 5.2 | 53.6 | 326.6 | 0.00306 |
| 45.5 | 96.5 | 369.5 | 0.00271 |
| 73.3 | 108.5 | 381.5 | 0.00262 |
| 83.3 | 111.3 | 384.3 | 0.00260 |
| 120.0 | 120.5 | 393.5 | 0.00254 |
| 196.0 | 137.5 | 410.5 | 0.00244 |
| 303.0 | 146.0 | 419.0 | 0.00239 |
| 400.0 | 155.0 | 428.0 | 0.00234 |
| 495.9 | 162.5 | 435.5 | 0.00230 |
| 598.0 | 168.2 | 441.2 | 0.00227 |
| 747.0 | 177.8 | 450.8 | 0.00222 |

Table 6.172: HERCO and YARMOR Pine Oil (28)

HERCO® PINE OIL

A High-Quality, General-Purpose-Grade Pine Oil

HERCO® pine oil^(a) is a clear, pale yellow to near-water-white, oily liquid with a distinct pinelike odor. Derived from terpene oils of pinewood origin, it is a blend of related compounds, largely terpene alcohols. Herco pine oil meets requirements of Federal Specification LLL-P-400a for Type 1 pine oil. It is especially indicated for manufacture of high-performance cleaners and disinfectants, and for all other uses where a pine oil of uniform, high-terpene-alcohol content is required.

(a) Herco pine oil is registered with the Office of Pesticide Program of the U.S. Environmental Protection Agency under EPA Registration Number 891-175.

General Sales Specifications

Herco's Test Methods are available on request

| | |
|---------------------------------|-------------|
| Specific gravity at 15.6/15.6°C | 0.930-0.938 |
| Total terpene alcohols, % min | 80 |
| Moisture, % max | 0.5 |
| Color, APHA, max | 70 |

Typical Properties

| | |
|------------------------------------------|------------|
| Specific gravity at 15.6/15.6°C | 0.933 |
| Total terpene alcohols, % | 85 |
| Moisture, % | 0.4 |
| Distillation range, °C, (5% to 95%) | 206 - 220 |
| Refractive index at 20°C | 1.481 |
| Color, APHA | 25 |
| Kauri-butanol value | > 500 |
| Flashpoint, TCC °F (°C) | 150 (66) |
| Density at 60°F (15.6°C), lbs/gal (kg,l) | 7.78 (.93) |
| Freezing point, °F (°C) | 39 (4) |

Outstanding Characteristics

Clear, pale color; high terpene alcohol content; piney odor; high solvent activity; excellent wetting, penetrating, and dispersing properties, high bactericidal activity when properly formulated; uniform

(continued)

Table 6.172: (continued)

YARMOR® F PINE OIL

Flotation-Grade Pine Oil

YARMOR® F pine oil is a frothing agent designed for flotation processes, particularly for beneficiation of metallic sulfide ores. Derived chiefly from oils extracted from pinewood, it is a mixture of terpenes, predominantly alcohols with lesser amounts of related terpenes.

Yarmor F produces a strong froth of good volume, satisfactory texture, and excellent cell life stability. Although normally used as a frother, it is also an effective collector for certain minerals.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|----------------------------------|-------------|
| Specific gravity at 15.6/15.6 °C | 0.930-0.950 |
| Total alcohols, % min | 70 |
| Moisture, % max | 1.8 |

Typical Properties

| | |
|---------------------------------------------|----------|
| Specific gravity at 15.6/15.6 °C | 0.938 |
| Total alcohols, % | 75 |
| Moisture, % | 1.1 |
| Refractive index at 20 °C | 1.484 |
| Color, Gardner | 3 |
| Distillation range, °C | |
| 5% | 205 |
| 95% | 227 |
| Flashpoint, COC, °F(°C) | 169(76) |
| Weight/gal, lbs (kg/l), 60 °F (15.6 °C) | 7.8(.94) |
| Viscosity, Ubbelohde, at 77 °F (25 °C), cps | 10 |
| Freezing point, ^(a) °F (°C) | 32(0) |

(a)Yarmor F will supecool and can be handled satisfactorily at lower temperatures

Outstanding Characteristics

Strong froth; excellent cell life stability; excellent wetting properties; low freezing point; low volatility

YARMOR® 60 PINE OIL

Terpene Alcohol

YARMOR® 60 pine oil^(a) is a clear, pale yellow to near water-white oily liquid with a distinct pinelike odor. Derived from terpene oils of pinewood origin, it is a blend of related compounds, principally terpene alcohols. It is intended for manufacture of cleaners and disinfectants, and for other uses where a good-quality pine oil is required.

(a)Yarmor 60 pine oil is registered with the Office of Pesticide Programs of the U. S. Environmental Protection Agency under EPA Registration Number 891-181.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|----------------------------------|-------------|
| Specific gravity at 15.6/15.6 °C | 0.909-0.919 |
| Total terpene alcohols, % min | 60 |
| Moisture, % max | 0.5 |
| Color APHA, max | 70 |

Typical Properties

| | |
|------------------------------------------|-----------|
| Total terpene alcohols, % | 62.7 |
| Moisture, % | 0.3 |
| Distillation range, °C | |
| 5% | 196.6 |
| 95% | 224.9 |
| Color, Hazen | 20 |
| Color, (Hercules terpene) | 0.2 |
| Kauri-butanol value | 500 |
| Flashpoint, TOC, °C (°F) | 60(140) |
| Weight, lbs/gal (kg/l), 60 °F, (15.6 °C) | 7.75(.91) |
| Specific gravity at 15.6/15.6 °C | 0.91 |

Outstanding Characteristics

Clear, pale color; high terpene alcohol content; piney odor; high solvent activity; excellent wetting, penetrating, and dispersing properties

(continued)

Table 6.172: (continued)

YARMOR® 302 PINE OIL**Highest Quality, All Purpose-Grade Pine Oil**

YARMOR® 302 pine oil^(a) is a clear, pale yellow to near-water-white, oily liquid with a distinct pinelike odor. Derived from terpene oils of pinewood origin, it is a blend of related compounds, mainly terpene alcohols. Yarmor 302 meets requirements of Federal Specification LLL-P-400a for Type 1 pine oil.

(a)Yarmor 302 pine oil is registered with the Office of Pesticide Programs of the U.S. Environmental Protection Agency under EPA Registration Number 891-174

General Sales Specifications

Hercules Test Methods are available on request

| | |
|----------------------------------|-------------|
| Specific gravity at 15.6/15.6 °C | 0.938-0.946 |
| Total terpene alcohols, % min | 85 |
| Moisture, % max | 0.5 |
| Color, APHA, max | 70 |

Typical Properties

| | |
|---------------------------------------|-------------|
| Specific gravity at 15.6/15.6 °C | 0.941 |
| Secondary alcohols, % | 16 |
| Tertiary alcohols, % | 76 |
| Total terpene alcohols, % | 92 |
| Moisture, % | 0.35 |
| Refractive index at 20 °C | 1.481 |
| Color, APHA | 25 |
| Kauri-butanol value | > 500 |
| Flashpoint, TCC, °F (°C) | 172(78) |
| Freezing Point, °F (°C) | 41 (5) |
| Weight/gal, lbs (kg/l), 60°F (15.6°C) | 7.85 (0.94) |

Outstanding Characteristics

Clear, pale color; high terpene alcohol content; piney odor; high solvent activity; excellent wetting, penetrating, and dispersing properties; high bactericidal activity when properly formulated.

YARMOR® 302W PINE OIL**A General-Purpose-Grade Pine Oil**

YARMOR® 302W pine oil^(a) is a clear, pale yellow to near-white-water, oily liquid with a distinct pinelike odor. Derived from terpene oils of pinewood origin, it is a blend of related compounds, predominantly terpene alcohols with minor amounts of terpene hydrocarbons. It is suitable for all uses where a general-purpose grade of pine oil is required.

(a)Yarmor 302W pine oil is registered with the Office of Pesticide Programs of the U.S. Environmental Protection Agency under EPA Registration Number 891-176

General Sales Specifications

Hercules Test Methods are available on request

| | |
|----------------------------------|-------------|
| Specific gravity at 15.6/15.6 °C | 0.920-0.930 |
| Total alcohols, % min | 70 |
| Moisture, % max | 0.5 |
| Color, APHA, max | 70 |

Typical Properties

| | |
|-----------------------------------------|-----------|
| Specific gravity at 15.6/15.6 °C | 0.923 |
| Secondary alcohols, % | 8 |
| Tertiary alcohols, % | 65 |
| Total terpene alcohols, % | 73 |
| Monocyclic terpenes, % | 27 |
| Moisture, % | 0.35 |
| Refractive index at 20 °C | 1.480 |
| Color, APHA | 25 |
| Kauri-butanol value | > 500 |
| Flashpoint, TCC, °F(°C) | 130(54) |
| Weight/gal, lbs (kg/l), 60 °F (15.6 °C) | 7.67(.92) |

Outstanding Characteristics

Clear, pale color; piney odor; high solvent activity; excellent wetting, penetrating, and dispersing properties; high bactericidal activity when properly formulated; uniform.

(continued)

Table 6.173: Hercules TERPINEOL (28)

TERPINEOL™ 101

Natural Tertiary Terpene Alcohol

TERPINEOL™ 101 is a natural, high-purity grade of the tertiary terpene alcohol *alpha*-terpineol. Derived by fractional distillation of oils extracted from pinewood, it is a water-white, oily liquid at normal temperatures with an odor suggestive of lilacs. Its chemical nature, pleasant floral odor, and surface-active properties account for its usefulness to the essential-oil industry and to manufacturers of disinfectants, household and industrial soaps, detergents, cleaners, and other chemical specialties.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|--------------------------------------|-------------------|
| Specific gravity at 15.6/15.6°C, min | 0.935 |
| Tertiary alcohols, min, % | 94 |
| Moisture, max, % | 0.6 |
| Color, Hazen (APHA), max | 70 |
| Appearance | EFFM [™] |

(a) Essentially Free of Foreign Matter

Typical Properties

| | |
|---------------------------------|-------------|
| Specific gravity at 15.6/15.6°C | 0.9410 |
| Tertiary alcohols, % | 96 |
| Moisture, % | 0.2 |
| Distillation range, °C (°F) | |
| 5% | 219 (426) |
| 95% | 220 (428) |
| Color, Hazen (APHA) | 20 |
| Flashpoint, COC, °C (°F) | 90 (194) |
| Freezing point, °C (°F) | <25 (<77) |
| Weight/gal, lbs (kg/l) | 7.85 (0.94) |

Outstanding Characteristics

High purity; natural origin; light color; pleasant floral odor; strong masking agent; excellent solvent; promotes surface activity; antibacterial activity when properly formulated.

TERPINEOL™ 200

Synthetic Tertiary Terpene Alcohol

TERPINEOL™ 200 is a high-purity grade of the tertiary terpene alcohol *alpha*-terpineol. Derived synthetically by hydrating *alpha*-pinene, it is a water-white, oily liquid at normal temperatures. Its chemical nature, pleasant floral odor, and surface-active properties account for its usefulness to the essential-oil industry and to manufacturers of disinfectants, household and industrial soaps, detergents, cleaners, and other chemical specialties.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|---------------------------------------|-------|
| Specific gravity at 15.6/15.6°C, min | 0.935 |
| Tertiary alcohols, %, min | 95 |
| <i>alpha/gamma</i> -Terpineol, %, min | 93.5 |
| Moisture, max, % | 0.6 |
| Color, Hazen (APHA), max | 70 |

Typical Properties

| | |
|----------------------------------|-------------|
| Specific gravity at 15.6/15.6°C | 0.941 |
| Tertiary alcohols, % | 97 |
| Moisture, % | 0.2 |
| <i>alpha/gamma</i> -Terpineol, % | 96.2 |
| Distillation range, °C (°F) | |
| 5% | 217 (422) |
| 95% | 220 (428) |
| Color, Hazen (APHA) | 20 |
| Flashpoint, COC, °C (°F) | 88 (190) |
| Freezing point, °C (°F) | <25 (<77) |
| Weight/gal, lbs (kg/l) | 7.85 (0.94) |

Outstanding Characteristics

High purity; light color; pleasant floral odor; strong masking agent; excellent solvent; promotes surface activity; antibacterial activity when properly formulated.

(continued)

Table 6.173: (continued)

TERPINEOL™ 318 PRIME**Mixed Tertiary Terpene Alcohols**

TERPINEOL™ 318 Prime is a mixture of isomeric terpineols obtained by dehydration of terpine hydrate. It is composed predominantly of *alpha*-terpineol, with lesser amounts of beta and gamma-terpineols. At normal temperatures, Terpineol 318 Prime is a water-white, oily liquid with a hyacinth-like odor. Terpineol 318 Prime is used by chemical specialties manufacturers for its odor, and by the essential-oils industry to produce perfume ingredients, particularly for soaps.

General Sales Specifications

Hercules Test Methods are available on request

| | |
|---------------------------------------|----------|
| Color, Hazen (APHA), max | 70 |
| Specific gravity, at 15.6/15.6°C, min | 0.935 |
| Moisture, max % | 0.6 |
| <i>beta/delta</i> -Terpineol, % | 8 to 20 |
| <i>alpha/gamma</i> -Terpineol, % | 80 to 90 |
| Tertiary alcohols, min, % | 98 |

Typical Properties

| | |
|---------------------------------|------------|
| Color, Hazen (APHA) | 30 |
| Specific gravity at 15.6/15.6°C | 0.938 |
| Moisture, % | 0.2 |
| Freezing point, °C (°F) | <-10 (+14) |
| Flashpoint, COC, °C (°F) | 88 (190) |
| Weight/gal, lbs (kg/l) | 7.8 (0.94) |

Outstanding Characteristics

High purity; light color; pleasant floral odor; excellent solvent; promotes surface activity; resistant to alkalis.

OTHER DATA

Table 6.174: Solubility Data for Alcohols (57)

| | Cellulose Acetate Butyrate | | Cellulose Acetate Propionate | | Bakelite* Vinyl Resins | | | Polystyrene | Methyl Methacrylate | VYHH | AYAF | XYHL | Hydrocarbons | Linseed Oil (Raw) | Rosin | Ester Gum | Shellac | Unvulcanized Rubber | Relative Evap. Rate (n-Butyl Acetate = 100) | Density (lb gal) at 20°C |
|----------------------------|----------------------------|-------------|------------------------------|------------------|--------------------------------|-----------------|----|-------------|---------------------|------|------|------|--------------|-------------------|-------|-----------|---------|---------------------|---------------------------------------------|--------------------------|
| | Cellulose Acetate (LL-1) | 17% Butyryl | 37% Butyryl | 13-15% Propionyl | 31% Propionyl | Ethyl Cellulose | | | | | | | | | | | | | | |
| Methanol | | | | | | S | | | | | S | S | PS | SS | PS | | S | | 610 | 6.60 |
| Ethanol | | | | | | S | | | | | S | S | S | SS | S | | S | | 340 | 6.76 |
| Isopropanol | | | | | | PS** | | | | | SS | S** | S | SS | S | | S | | 300 | 6.55 |
| n-Propanol | | | | | | S | | | | | SS | S** | S | S | S | | S | | — | — |
| n-Butyl alcohol | | | | | | S | | | | | SS | S** | S | S | S | | S | | 45 | 6.75 |
| Isobutanol | | | | | | S | | | | | SS | S** | S | S | S | PS | S | | 80 | 6.68 |
| Mixed amyl alcohols | | | | | | S | | | | | | S** | S | S | S | S | S | | — | — |
| 3-Methoxy butanol | | | S | | | S | | | | | S | S | S | S | S | S | S | | 12 | 7.68 |
| Pentanol-3 | | | | | | S | | | | | SS | S | S | S | S | S | S | | 54 | 6.84 |
| Methyl amyl alcohol | | | | | | S** | | | | | SW | S** | S | S | S | S | SS | | 33 | 6.72 |
| 2-Ethylbutanol | | | | | | S** | | | | | SW | S** | S | S | S | S | S | | 8 | 6.92 |
| n-Hexanol | | | | | | S** | | | | | | S** | S | S | S | S | S | | 5 | 6.83 |
| Heptanol-3 | | | | | | S** | | | | | SW | S** | S | S | S | S | SS | | 6 | 6.84 |
| 2-Ethylhexanol | | | | | | S** | | | | | | S** | S | S | S | S | S | | <1 | 6.94 |
| Diisobutyl carbinol | | | | | | PS** | | | | | | SW | S | S | S | | | | 2 | 6.75 |
| Trimethyl nonyl alcohol | | | | | | PS** | | | | | | SW | S | S | S | | | | <1 | 6.83 |
| Undecanol | | | | | | S** | | | | | SW | G | S | S | S | S | PS | PS | <1 | 6.97 |
| Tetradecanol | | | | | | SS** | | | | | | | S | S | S | | | PS | <1 | 6.95 |
| Heptadecanol | | | | | | | | | | | | | S | S | S | | | PS | <1 | 7.05 |
| Trimethyl cyclohexanol | | | SS | | | S | | | | | | S-G | S | S | S | | | SW | <1 | 8.21*** |
| Tetrahydropyran-2-methanol | | | S | | S | S | S | | S | S | S | S | S | S | S | S | S | | 3 | — |
| 2-Mercaptoethanol | S | S** | S | S | S | S | SS | S | SS | S | S | PS† | Imm | S | S | S | | | 13 | 9.30 |
| Phenyl methyl carbinol | SW | SW | S | SW | S | S | S | SS | | S | S | S | S | S | S | S | | | <1 | 8.45 |
| Diacetone alcohol | S | PS | S | S | S | S | | S | S | S | S | S | S | S | S | S | PS | | 14 | 7.82 |

*UCC trademark.

**0.5 g resin to 9.5 ml solvent.

***At 55°C.

†Miscible with toluene and xylene, immiscible with Apcothinner.

Legend:

| | | | |
|-----|--------------------------|-----|------------|
| S | Soluble | G | Gel |
| PS | Partly soluble | I | Insoluble |
| SS | Slightly soluble | SW | Swelling |
| S-G | Soluble, tendency to gel | Imm | Immiscible |

Table 6.175: Melting Points of Saturated Monohydric Alcohols (69)

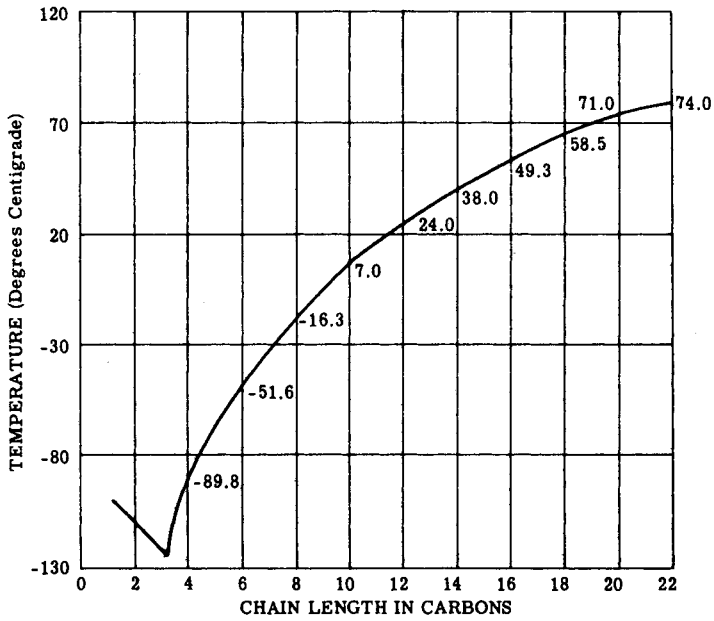


Table 6.176: Rate of Evaporation of Various Solvents at Room Temperature (19)

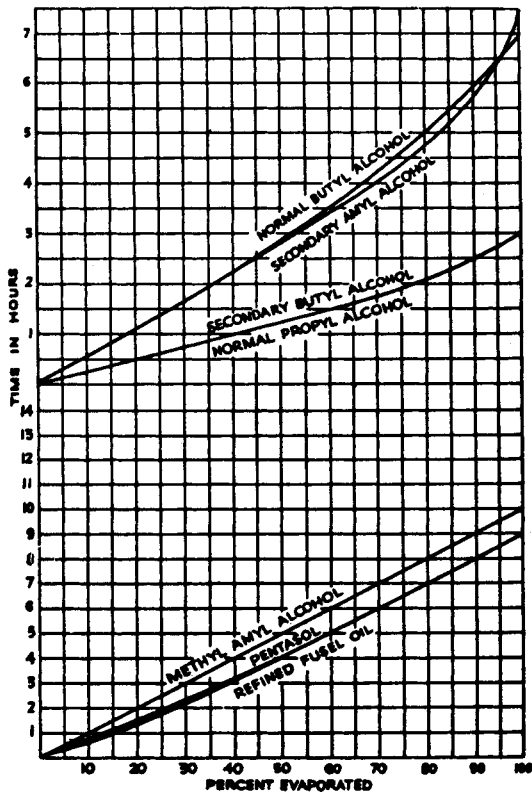


Table 6.177: Comparative Evaporation Rates of Alcohols (19)

(Relative Values on 5 cc Samples at 21°C. and 734.4 mm. Hg)

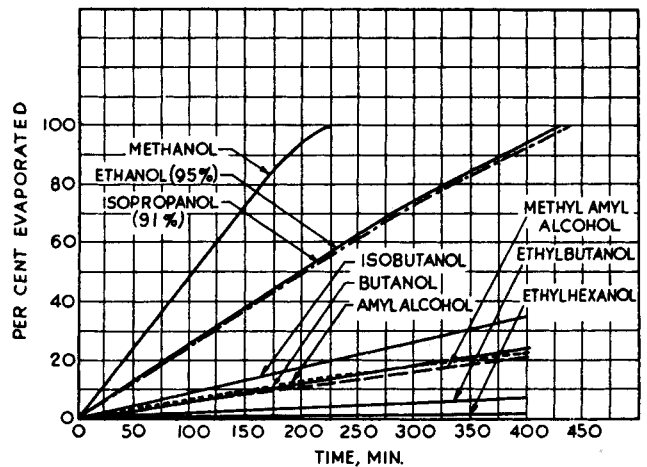


Table 6.178: Vapor Pressure of Alcohols at Various Temperatures (19)

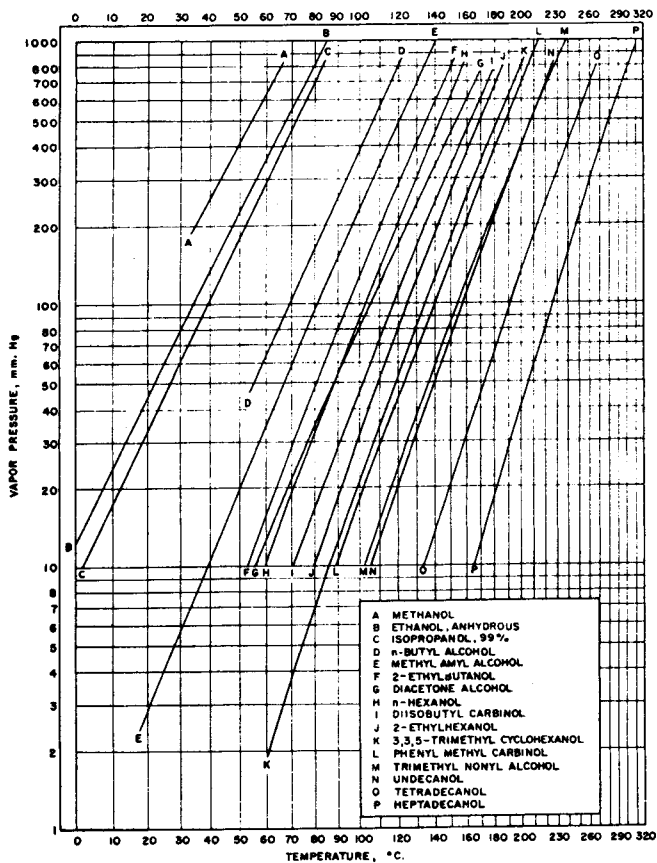


Table 6.179: Freezing Points (Initial Crystallization) of Aqueous Solution of Alcohols (19)

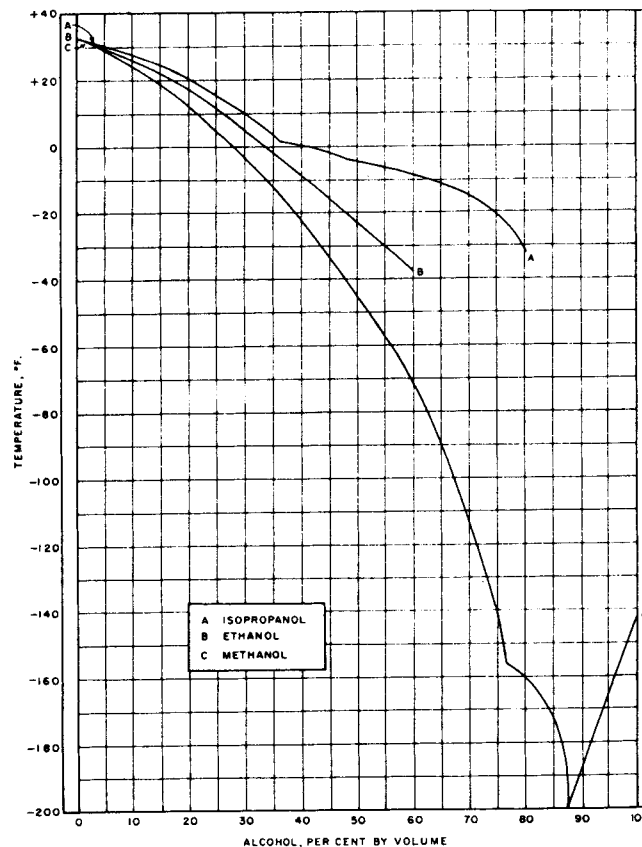


Table 6.180: Specific Gravity of Aqueous Solution of Alcohols at 20°C (19)

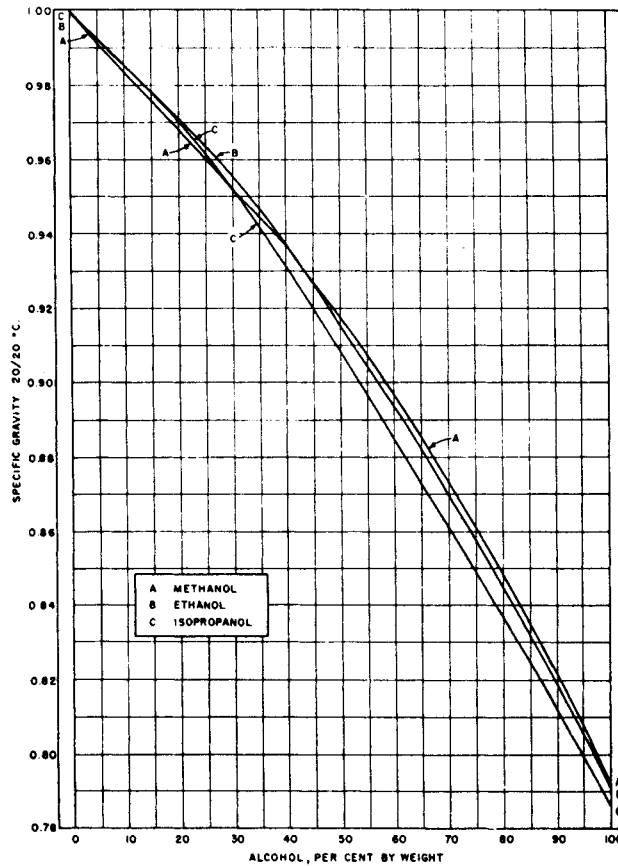


Table 6.181: Viscosity of Ethyl Cellulose in Alcohol-Hydrocarbon Mixtures (14)

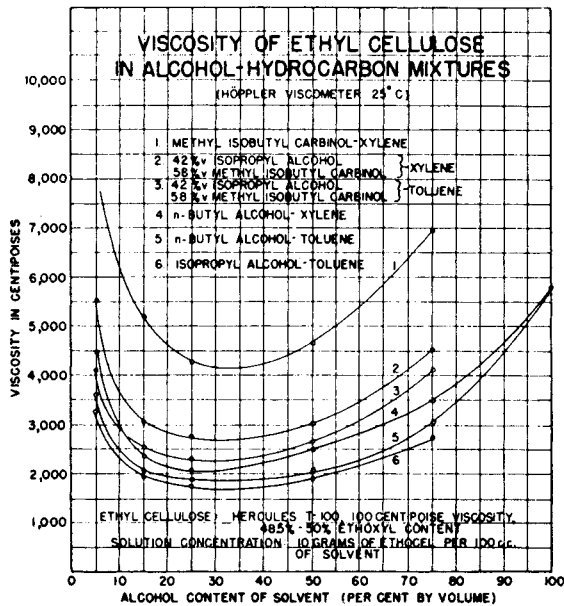


Table 6.182: Evaporation Data for Various Solvents (14)

| Active Solvents | Rate of Evaporation (Normal Butyl Acetate—1.00) |
|--------------------------------------------------------------------------|------------------------------------------------------------|
| Acetone | 7.7 |
| Methyl Ethyl Ketone | 4.6 |
| Ethyl Acetate (85–90%) | 4.6 |
| Isopropyl Acetate 95% | 3.9 |
| Secondary Butyl Acetate | 1.8 |
| Methyl Isobutyl Ketone | 1.6 |
| Methyl Isobutyl Ketone (82.5% w)— Methyl Isobutyl Carbinol (17.5% w) | 1.0 |
| Normal Butyl Acetate | 1.0 |
| Mesityl Oxide | 0.9 |
| Secondary Amyl Acetate | 0.8 |
| Amyl Acetate (mixed isomers) | 0.6 |
| Methyl Amyl Acetate | 0.5 |
| CELLOSOLVE Acetate | 0.2 |
| Diacetone Alcohol | 0.2 |
| Butyl CELLOSOLVE | 0.1 |
| Latent Solvents | |
| Ethyl Alcohol (anhydrous) | 1.9 |
| Isopropyl Alcohol (anhydrous) | 1.7 |
| Ethyl* Alcohol (190 proof) | 1.7 |
| Normal Butyl Alcohol (50% v)— Anhydrous Ethyl* Alcohol (50% v) | 0.7 |
| Methyl Isobutyl Carbinol (30% v)— Anhydrous Ethyl* Alcohol (70% v) | 0.7 |
| Methyl Isobutyl Carbinol (30% v)— Anhydrous Isopropyl Alcohol (70% v) | 0.7 |
| Normal Propyl Alcohol | 1.1 |
| Secondary Butyl Alcohol | 1.0 |
| Normal Butyl Alcohol | 0.5 |
| Methyl Isobutyl Carbinol (60% v)— Anhydrous Isopropyl Alcohol (40% v) | 0.5 |
| Secondary Amyl Alcohol | 0.5 |
| Amyl Alcohol (mixed isomers) | 0.3 |
| Methyl Isobutyl Carbinol | 0.3 |
| *Proprietary grade. | |
| Diluents | |
| Toluene | 2.1 |
| Xylene | 0.8 |

Polyhydric Alcohols

ETHYLENE GLYCOL

Glycol
1,2-Ethanediol




Table 7.1: Physical Properties and Specifications of Ethylene Glycol (32)

| | | | |
|---------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------|
| Acidity as acetic acid | 0.01% by wt., max. | Fire point, Cleveland, tag ASTM, open cup | 250° F 245° F |
| Ash | 0.005 g./100 ml., max. | Flash point (open cup) ASTM, open cup | 245° F 240° F |
| Boiling point at 760 mm. Hg | 197.2-197.6° C | Free energy of formation at 25° C | -80.2 kcal./mole |
| Coefficient of expansion at 20° C | 0.00062/°C 0.0006375/°C | Heat of combustion (const. pressure) at 20° C | -283.3 kcal./mole |
| Color, APHA | 10-15 max. | Heat of dilution [C ₂ H ₄ (OH) ₂ x 2 H ₂ O] | 0.06 cal./g. |
| Density (true) at 20° C | 1.1134 g./ml. | Heat of formation at 20° C | -108.1 kcal./mole |
| Dielectric constant, 20° C | 38.66 esu | Heat of fusion | 44.7 cal./g. |
| Distillation at 760 mm. Hg | 193° C, min. | Heat of vaporization at 760 mm. Hg | 191 cal./g. 344 Btu/lb. |
| Ibp | | Inorganic chlorides, as Cl | 0.1 ppm, max. |
| 5 ml. | 194° C, min. | Iron | 0.15 ppm, max. |
| 95 ml. | 200° C, min. | | |
| Dp | 205-208° C | | |
| Electric conductivity at 25° C | 1.07 x 10 ⁶ recip. ohms (mhos) cm. | Viscosity at 10° C (50° F) | 33.6 cp. |
| Molecular weight | 62.07 | 25° C (77° F) | 17.4 cp. |
| Odor | Mild | 35° C (95° F) | 12.3 cp. |
| Pour point | -75° F | 60° C (140° F) | 5.2 cp. |
| Refractive index n _D 25° C | 1.4306 | Water content | 0.3% by wt., max. |
| n _D 20° C | 1.4316 | Weight per gallon at 20° C | 9.28 lb. |
| Specific gravity (apparent), 25/25° C | 1.1133 | | |
| 20/20° C | 1.1155 | | |
| Specific heat at 20° C | 0.561 | Ethylene Glycol | |
| at 0° C | 0.544 | Glycol % by Wt. | % by Vol. |
| Spontaneous ignition temperature | 398.9° C | 100 | 100 |
| | 412.8° C | 95 | 94.7 |
| | | 90 | 89.4 |
| Sulfates | Not detectable | Flash Point °F Cleveland, Tag | 245 260 270 |
| Surface tension at 20° C | 48.4 dynes/cm. | Fire Point °F Cleveland | 250 270 280 |
| Suspended matter | Substantially free | | |
| Vapor at 20° C (68° F) | 0.06 mm. Hg | | |
| 25° C (77° F) | 0.12 mm. Hg | | |
| 93° C (200° F) | 11.0 mm. Hg | | |
| 132.2° C (270° F) | 75.0 mm. Hg | | |

Table 7.2: Boiling Points of Aqueous Ethylene Glycol Solutions (32)

| Glycol, % by Wt. | % by Vol. | Boiling Point °F | Glycol, % by Wt. | % by Vol. | Boiling Point °F | Glycol, % by Wt. | % by Vol. | Boiling Point °F |
|---------------------|--------------|---------------------|---------------------|--------------|---------------------|---------------------|--------------|---------------------|
| 0 | 0.0 | 212 | 70 | 68.4 | 238 | 90 | 89.4 | 279 |
| 10 | 9.1 | 214 | 72 | 70.5 | 240 | 91 | 90.5 | 284 |
| 20 | 18.4 | 216 | 74 | 72.6 | 243 | 92 | 91.5 | 289 |
| 25 | 23.2 | 217 | 76 | 74.7 | 245 | 93 | 92.6 | 294 |
| 30 | 28.0 | 218 | 78 | 76.8 | 248 | 94 | 93.6 | 301 |
| 35 | 32.8 | 219 | 80 | 78.9 | 252 | 95 | 94.7 | 309 |
| 40 | 37.8 | 221 | 81 | 79.9 | 254 | 96 | 95.8 | 319 |
| 45 | 42.8 | 223 | 82 | 81.0 | 256 | 97 | 96.8 | 330 |
| 50 | 47.8 | 225 | 83 | 82.0 | 258 | 98 | 97.9 | 345 |
| 55 | 52.9 | 227 | 84 | 83.1 | 260 | 99 | 98.9 | 363 |
| 60 | 58.0 | 230 | 85 | 84.1 | 262 | 100 | 100 | 388 |
| 62 | 60.1 | 232 | 86 | 85.2 | 265 | | | |
| 64 | 62.2 | 233 | 87 | 86.2 | 268 | | | |
| 66 | 64.2 | 235 | 88 | 87.3 | 271 | | | |
| 68 | 66.3 | 236 | 89 | 88.4 | 275 | | | |

Table 7.3: Density of Aqueous Ethylene Glycol Solutions (32)

| By Wt. By Vol. | Ethylene Glycol Percentage | | | | | | | | | | | |
|-------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | 0 | 10 | 20 | 30 | 46 | 50 | 60 | 70 | 80 | 90 | 100 | |
| | 0 | 9.1 | 18.4 | 28.0 | 37.8 | 47.8 | 58.0 | 68.4 | 78.9 | 89.4 | 100 | |
| Temp. °F | Density in g./ml. | | | | | | | | | | | |
| -50 | | | | | | | 1.110 | 1.125 | 1.137 | | | |
| -40 | | | | | | | 1.108 | 1.122 | 1.134 | | | |
| -30 | | | | | | 1.087 | 1.105 | 1.120 | 1.131 | | | |
| -20 | | | | | | 1.086 | 1.103 | 1.117 | 1.128 | 1.138 | | |
| -10 | | | | | 1.068 | 1.084 | 1.100 | 1.114 | 1.125 | 1.135 | | |
| 0 | | | | | 1.066 | 1.082 | 1.097 | 1.111 | 1.122 | 1.131 | | |
| 10 | | | | 1.048 | 1.064 | 1.080 | 1.095 | 1.107 | 1.118 | 1.128 | 1.136 | |
| 20 | | | 1.031 | 1.147 | 1.063 | 1.077 | 1.092 | 1.104 | 1.115 | 1.124 | 1.132 | |
| 30 | | 1.015 | 1.030 | 1.045 | 1.061 | 1.075 | 1.089 | 1.101 | 1.111 | 1.121 | 1.128 | |
| 40 | 1.000 | 1.014 | 1.029 | 1.044 | 1.059 | 1.073 | 1.086 | 1.098 | 1.108 | 1.117 | 1.124 | |
| 50 | 1.000 | 1.013 | 1.027 | 1.042 | 1.056 | 1.070 | 1.083 | 1.094 | 1.105 | 1.113 | 1.120 | |
| 60 | 0.999 | 1.012 | 1.026 | 1.040 | 1.054 | 1.067 | 1.080 | 1.091 | 1.101 | 1.109 | 1.116 | |
| 70 | 0.998 | 1.011 | 1.024 | 1.038 | 1.051 | 1.064 | 1.076 | 1.087 | 1.097 | 1.105 | 1.113 | |
| 80 | 0.997 | 1.009 | 1.022 | 1.035 | 1.049 | 1.061 | 1.073 | 1.084 | 1.093 | 1.101 | 1.109 | |
| 90 | 0.995 | 1.007 | 1.020 | 1.033 | 1.046 | 1.058 | 1.069 | 1.080 | 1.088 | 1.097 | 1.105 | |
| 100 | 0.993 | 1.005 | 1.018 | 1.030 | 1.043 | 1.054 | 1.066 | 1.076 | 1.085 | 1.094 | 1.101 | |
| 110 | 0.991 | 1.003 | 1.015 | 1.027 | 1.039 | 1.051 | 1.062 | 1.072 | 1.082 | 1.090 | 1.097 | |
| 120 | 0.989 | 1.000 | 1.012 | 1.024 | 1.036 | 1.047 | 1.058 | 1.068 | 1.078 | 1.086 | 1.093 | |
| 130 | 0.986 | 0.997 | 1.009 | 1.021 | 1.033 | 1.044 | 1.055 | 1.064 | 1.074 | 1.082 | 1.089 | |
| 140 | 0.983 | 0.994 | 1.006 | 1.018 | 1.029 | 1.040 | 1.051 | 1.060 | 1.069 | 1.078 | 1.085 | |
| 150 | 0.980 | 0.991 | 1.003 | 1.014 | 1.026 | 1.036 | 1.047 | 1.056 | 1.065 | 1.074 | 1.081 | |
| 160 | 0.977 | 0.988 | 0.999 | 1.011 | 1.022 | 1.032 | 1.043 | 1.052 | 1.061 | 1.069 | 1.077 | |
| 170 | 0.974 | 0.985 | 0.996 | 1.007 | 1.018 | 1.028 | 1.039 | 1.048 | 1.057 | 1.065 | 1.073 | |
| 180 | 0.970 | 0.981 | 0.992 | 1.003 | 1.014 | 1.024 | 1.034 | 1.044 | 1.053 | 1.061 | 1.068 | |
| 190 | 0.967 | 0.977 | 0.988 | 0.999 | 1.009 | 1.020 | 1.030 | 1.040 | 1.048 | 1.057 | 1.064 | |
| 200 | 0.963 | 0.974 | 0.984 | 0.995 | 1.006 | 1.016 | 1.026 | 1.035 | 1.044 | 1.052 | 1.060 | |
| 210 | 0.959 | 0.970 | 0.980 | 0.991 | 1.001 | 1.011 | 1.021 | 1.031 | 1.040 | 1.048 | 1.056 | |
| 220 | 0.955 | 0.965 | 0.976 | 0.987 | 0.997 | 1.007 | 1.017 | 1.026 | 1.035 | 1.044 | 1.051 | |
| 230 | 0.951 | 0.961 | 0.972 | 0.982 | 0.992 | 1.003 | 1.012 | 1.022 | 1.031 | 1.039 | 1.047 | |
| 240 | 0.947 | 0.957 | 0.967 | 0.978 | 0.988 | 0.998 | 1.008 | 1.017 | 1.026 | 1.034 | 1.042 | |
| 250 | 0.942 | 0.952 | 0.963 | 0.973 | 0.983 | 0.993 | 1.003 | 1.012 | 1.021 | 1.030 | 1.038 | |
| 260 | 0.938 | 0.948 | 0.958 | 0.968 | 0.978 | 0.988 | 0.998 | 1.008 | 1.017 | 1.025 | 1.033 | |
| 270 | 0.933 | 0.943 | 0.953 | 0.963 | 0.973 | 0.983 | 0.993 | 1.003 | 1.012 | 1.020 | 1.029 | |
| 280 | 0.928 | 0.938 | 0.948 | 0.958 | 0.968 | 0.978 | 0.988 | 0.998 | 1.007 | 1.016 | 1.024 | |
| 290 | 0.923 | 0.933 | 0.943 | 0.953 | 0.963 | 0.973 | 0.983 | 0.993 | 1.002 | 1.011 | 1.019 | |
| 300 | 0.918 | 0.928 | 0.938 | 0.948 | 0.958 | 0.968 | 0.978 | 0.988 | 0.997 | 1.006 | 1.014 | |
| 310 | 0.913 | 0.923 | 0.933 | 0.943 | 0.953 | 0.963 | 0.973 | 0.983 | 0.992 | 1.001 | 1.010 | |
| 320 | 0.907 | 0.917 | 0.928 | 0.938 | 0.948 | 0.958 | 0.968 | 0.977 | 0.987 | 0.996 | 1.005 | |
| 330 | 0.902 | 0.912 | 0.922 | 0.932 | 0.942 | 0.952 | 0.962 | 0.972 | 0.982 | 0.991 | 1.000 | |
| 340 | 0.896 | 0.906 | 0.917 | 0.927 | 0.937 | 0.947 | 0.957 | 0.967 | 0.976 | 0.985 | 0.994 | |
| 350 | 0.890 | 0.900 | 0.911 | 0.921 | 0.931 | 0.941 | 0.951 | 0.961 | 0.971 | 0.980 | 0.989 | |

Table 7.4: Specific Gravity at 60°F of Aqueous Ethylene Glycol Solution vs Composition (19)

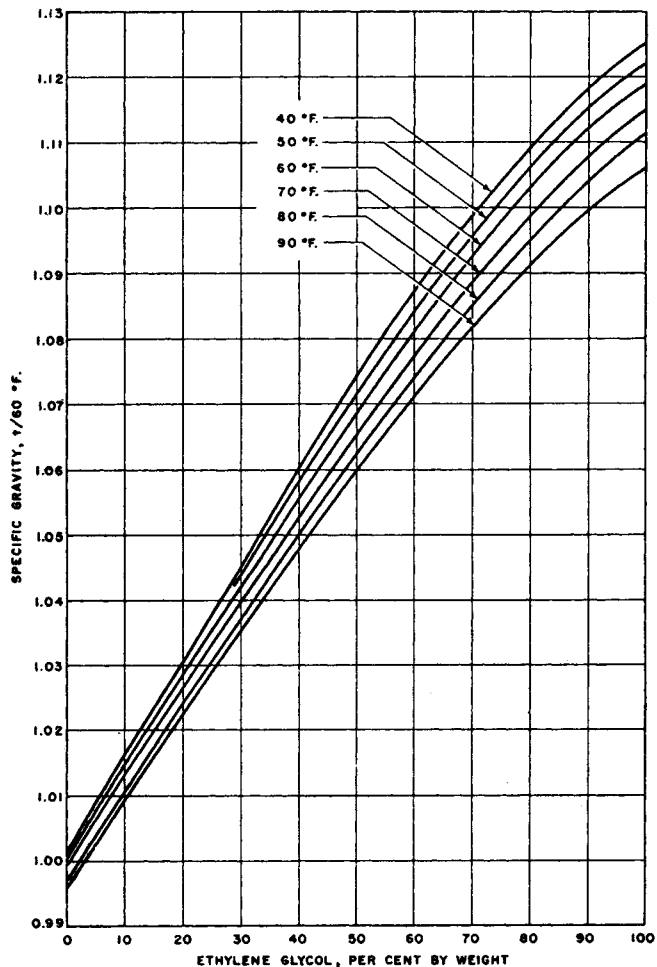


Table 7.5: Freezing Points of Aqueous Ethylene Glycol Solutions (11)

| Ethylene Glycol | | Freezing Point | | Ethylene Glycol | | Freezing Point | |
|-----------------|--------|----------------|------|-----------------|--------|----------------|-----|
| Wt. % | Vol. % | °C | °F | Wt. % | Vol. % | °C | °F |
| 0 | 0.0 | 0.0 | 32.0 | 40 | 37.8 | -24 | -11 |
| 2 | 1.8 | -0.6 | 30.9 | 42 | 39.8 | -26 | -15 |
| 4 | 3.6 | -1.3 | 29.7 | 44 | 41.8 | -28 | -18 |
| 6 | 5.4 | -2.0 | 28.4 | 46 | 43.8 | -31 | -23 |
| 8 | 7.2 | -2.7 | 27.0 | 48 | 45.8 | -33 | -27 |
| 10 | 9.1 | -3.5 | 25.6 | 50 | 47.8 | -36 | -32 |
| 12 | 10.9 | -4.4 | 24.0 | 52 | 49.8 | -38 | -37 |
| 14 | 12.8 | -5.3 | 22.4 | 54 | 51.9 | -41 | -42 |
| 16 | 14.6 | -6.3 | 20.6 | 56 | 53.9 | -44 | -48 |
| 18 | 16.5 | -7.3 | 18.8 | 58 | 56.0 | -48 | -54 |
| 20 | 18.4 | -8 | 17 | 80 | 78.9 | -47 | -52 |
| 22 | 20.3 | -9 | 15 | 82 | 81.0 | -43 | -46 |
| 24 | 22.2 | -11 | 12 | 84 | 83.1 | -40 | -40 |
| 26 | 24.1 | -12 | 10 | 86 | 85.2 | -36 | -33 |
| 28 | 26.0 | -13 | 8 | 88 | 87.3 | -33 | -27 |
| 30 | 28.0 | -15 | 5 | 90 | 89.4 | -29 | -21 |
| 32 | 29.9 | -17 | 2 | 92 | 91.5 | -26 | -15 |
| 34 | 31.9 | -18 | -1 | 94 | 93.6 | -23 | -9 |
| 36 | 33.8 | -20 | -4 | 96 | 95.8 | -19 | -3 |
| 38 | 35.8 | -22 | -7 | 98 | 97.9 | -16 | +3 |
| | | | | 100 | 100.0 | -13 | +9 |

Table 7.6: Specific Heat of Aqueous Ethylene Glycol Solutions (32)

| By Wt. By Vol. | Ethylene Glycol Percentage | | | | | | | | | | |
|-------------------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| Temp. °F | Specific Heat in Btu/lb. °F | | | | | | | | | | |
| 60 | 0.9996 | 0.968 | 0.928 | 0.882 | 0.835 | 0.785 | 0.734 | 0.687 | 0.642 | 0.599 | 0.556 |
| 70 | 0.9987 | 0.968 | 0.930 | 0.887 | 0.841 | 0.792 | 0.742 | 0.695 | 0.650 | 0.606 | 0.563 |
| 80 | 0.9982 | 0.969 | 0.933 | 0.892 | 0.847 | 0.799 | 0.750 | 0.703 | 0.658 | 0.613 | 0.570 |
| 90 | 0.9980 | 0.970 | 0.935 | 0.896 | 0.852 | 0.822 | 0.758 | 0.711 | 0.665 | 0.620 | 0.575 |
| 100 | 0.9980 | 0.971 | 0.938 | 0.900 | 0.858 | 0.813 | 0.766 | 0.719 | 0.672 | 0.627 | 0.581 |
| 110 | 0.9982 | 0.972 | 0.940 | 0.904 | 0.863 | 0.819 | 0.773 | 0.727 | 0.680 | 0.634 | 0.588 |
| 120 | 0.9985 | 0.973 | 0.942 | 0.907 | 0.868 | 0.825 | 0.780 | 0.734 | 0.687 | 0.640 | 0.594 |
| 130 | 0.9989 | 0.974 | 0.944 | 0.910 | 0.872 | 0.851 | 0.787 | 0.740 | 0.694 | 0.647 | 0.600 |
| 140 | 0.9994 | 0.975 | 0.947 | 0.914 | 0.877 | 0.837 | 0.794 | 0.747 | 0.700 | 0.653 | 0.606 |
| 150 | 1.0001 | 0.977 | 0.949 | 0.917 | 0.881 | 0.842 | 0.800 | 0.753 | 0.707 | 0.659 | 0.612 |
| 160 | 1.0008 | 0.978 | 0.951 | 0.921 | 0.886 | 0.847 | 0.805 | 0.759 | 0.713 | 0.666 | 0.619 |
| 170 | 1.0017 | 0.980 | 0.954 | 0.924 | 0.890 | 0.852 | 0.810 | 0.765 | 0.720 | 0.673 | 0.625 |
| 180 | 1.0027 | 0.981 | 0.956 | 0.927 | 0.894 | 0.857 | 0.816 | 0.771 | 0.726 | 0.679 | 0.631 |
| 190 | 1.0039 | 0.983 | 0.959 | 0.931 | 0.898 | 0.861 | 0.821 | 0.777 | 0.733 | 0.686 | 0.637 |
| 200 | 1.0052 | 0.985 | 0.961 | 0.934 | 0.902 | 0.866 | 0.826 | 0.783 | 0.739 | 0.692 | 0.644 |
| 210 | 1.0067 | 0.987 | 0.964 | 0.937 | 0.905 | 0.870 | 0.831 | 0.789 | 0.745 | 0.698 | 0.650 |
| 220 | 1.008 | 0.989 | 0.966 | 0.940 | 0.909 | 0.875 | 0.836 | 0.794 | 0.750 | 0.704 | 0.656 |
| 230 | 1.010 | 0.992 | 0.969 | 0.943 | 0.913 | 0.879 | 0.841 | 0.799 | 0.756 | 0.710 | 0.662 |
| 240 | 1.013 | 0.994 | 0.972 | 0.947 | 0.917 | 0.884 | 0.846 | 0.805 | 0.762 | 0.716 | 0.668 |
| 250 | 1.015 | 0.997 | 0.976 | 0.951 | 0.922 | 0.889 | 0.852 | 0.811 | 0.768 | 0.723 | 0.675 |
| 260 | 1.018 | 1.000 | 0.979 | 0.954 | 0.926 | 0.893 | 0.857 | 0.817 | 0.774 | 0.729 | 0.681 |
| 270 | 1.021 | 1.003 | 0.983 | 0.958 | 0.930 | 0.898 | 0.862 | 0.822 | 0.780 | 0.735 | 0.687 |
| 280 | 1.024 | 1.006 | 0.986 | 0.962 | 0.935 | 0.903 | 0.867 | 0.828 | 0.786 | 0.741 | 0.693 |
| 290 | 1.027 | 1.010 | 0.990 | 0.966 | 0.939 | 0.908 | 0.873 | 0.834 | 0.792 | 0.747 | 0.700 |
| 300 | 1.030 | 1.014 | 0.994 | 0.970 | 0.943 | 0.913 | 0.878 | 0.840 | 0.798 | 0.754 | 0.706 |
| 310 | 1.034 | 1.018 | 0.998 | 0.975 | 0.948 | 0.918 | 0.883 | 0.845 | 0.804 | 0.760 | 0.712 |
| 320 | 1.039 | 1.023 | 1.003 | 0.980 | 0.953 | 0.923 | 0.889 | 0.851 | 0.810 | 0.766 | 0.718 |
| 330 | 1.044 | 1.028 | 1.008 | 0.985 | 0.958 | 0.928 | 0.894 | 0.857 | 0.816 | 0.772 | 0.724 |
| 340 | 1.050 | 1.033 | 1.013 | 0.990 | 0.963 | 0.933 | 0.900 | 0.863 | 0.822 | 0.778 | 0.731 |
| 350 | 1.056 | 1.038 | 1.018 | 0.995 | 0.968 | 0.939 | 0.906 | 0.869 | 0.828 | 0.784 | 0.737 |

Table 7.7: Vapor-Liquid Composition Curves for Aqueous Ethylene Glycol Solutions (23)

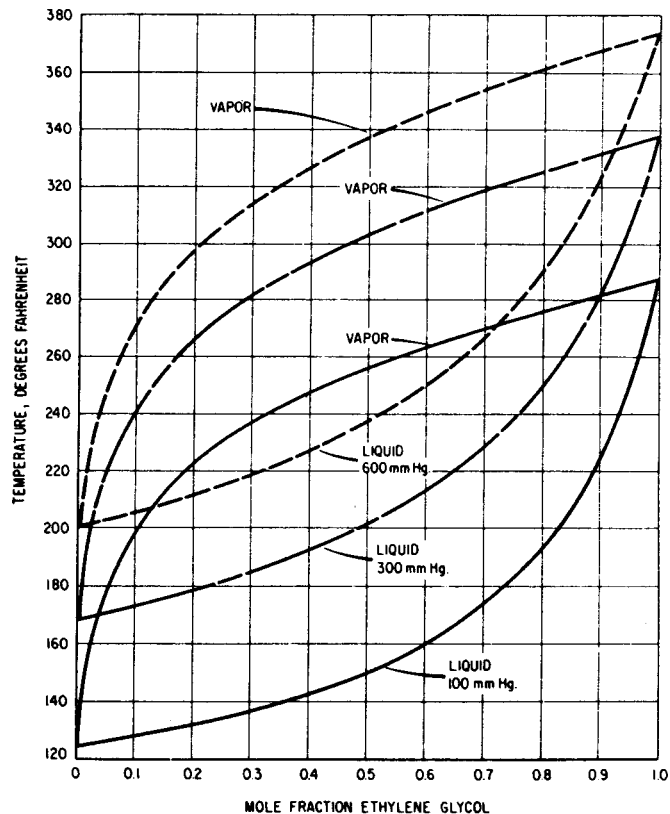


Table 7.8: Vapor Pressure of Aqueous Ethylene Glycol Solutions (11)

| Temp. °F | Ethylene Glycol Percentage | | | | | | | |
|--------------------------|----------------------------|------|------|------|------|------|------|------|
| | 70 | 75 | 80 | 85 | 90 | 95 | 97 | 100 |
| By Wt. | 70 | 75 | 80 | 85 | 90 | 95 | 97 | 100 |
| By Vol. | 68.4 | 73.6 | 78.9 | 84.1 | 89.4 | 94.7 | 96.8 | 100 |
| Absolute Pressure in psi | | | | | | | | |
| 150 | 2.2 | 2.0 | 1.7 | 1.4 | 1.1 | 0.6 | 0.4 | 0.04 |
| 160 | 2.9 | 2.6 | 2.2 | 1.8 | 1.4 | 0.8 | .5 | .06 |
| 170 | 3.6 | 3.2 | 2.8 | 2.3 | 1.7 | 1.0 | .7 | .08 |
| 180 | 4.5 | 4.1 | 3.5 | 2.9 | 2.2 | 1.3 | .8 | .12 |
| 190 | 5.6 | 5.1 | 4.4 | 3.6 | 2.7 | 1.6 | 1.0 | .16 |
| 200 | 7.0 | 6.3 | 5.5 | 4.5 | 3.4 | 2.0 | 1.3 | 0.2 |
| 210 | 8.5 | 7.7 | 6.7 | 5.5 | 4.1 | 2.4 | 1.6 | .3 |
| 220 | 10.4 | 9.4 | 8.2 | 6.7 | 5.0 | 3.0 | 2.0 | .4 |
| 230 | 12.6 | 11.4 | 9.9 | 8.2 | 6.1 | 3.6 | 2.5 | .5 |
| 240 | 15.2 | 13.7 | 11.9 | 9.9 | 7.4 | 4.4 | 3.0 | .7 |
| 250 | 18.1 | 16.4 | 14.3 | 11.8 | 8.9 | 5.3 | 3.7 | 0.9 |
| 260 | 21.6 | 19.5 | 17.0 | 14.1 | 10.6 | 6.4 | 4.4 | 1.1 |
| 270 | 25.5 | 23.0 | 20.1 | 16.7 | 12.6 | 7.6 | 5.3 | 1.4 |
| 280 | 30.1 | 27.1 | 23.7 | 19.7 | 14.9 | 9.1 | 6.4 | 1.8 |
| 290 | 35.2 | 31.8 | 27.9 | 23.2 | 17.6 | 10.8 | 7.6 | 2.3 |
| 300 | 41.1 | 37.1 | 32.5 | 27.1 | 20.6 | 12.7 | 9.0 | 2.8 |
| 310 | 47.7 | 43.1 | 37.8 | 31.5 | 24.0 | 14.9 | 10.6 | 3.5 |
| 320 | 55.2 | 49.9 | 43.8 | 36.6 | 27.9 | 17.4 | 12.5 | 4.3 |
| 330 | 63.5 | 57.5 | 50.5 | 42.2 | 32.3 | 20.2 | 14.6 | 5.2 |
| 340 | 72.9 | 66.0 | 58.0 | 48.5 | 37.2 | 23.5 | 17.1 | 6.3 |
| 350 | 83.3 | 75.5 | 66.4 | 55.6 | 42.7 | 27.1 | 19.8 | 7.6 |

Table 7.9: Viscosity of Aqueous Ethylene Glycol Solutions (19)

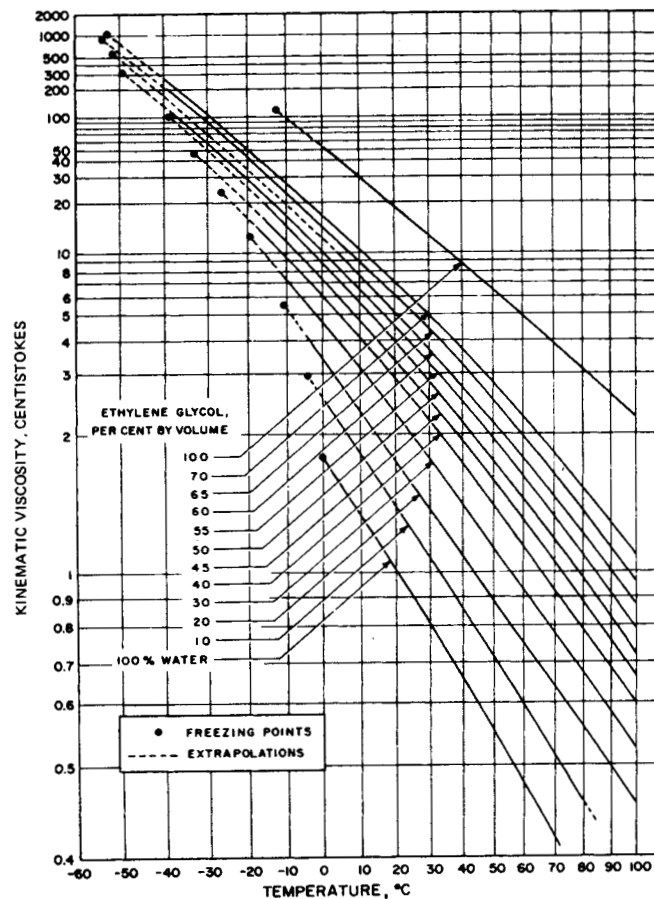


Table 7.10: Relative Humectant Values of Aqueous Solutions of Ethylene Glycol (17)

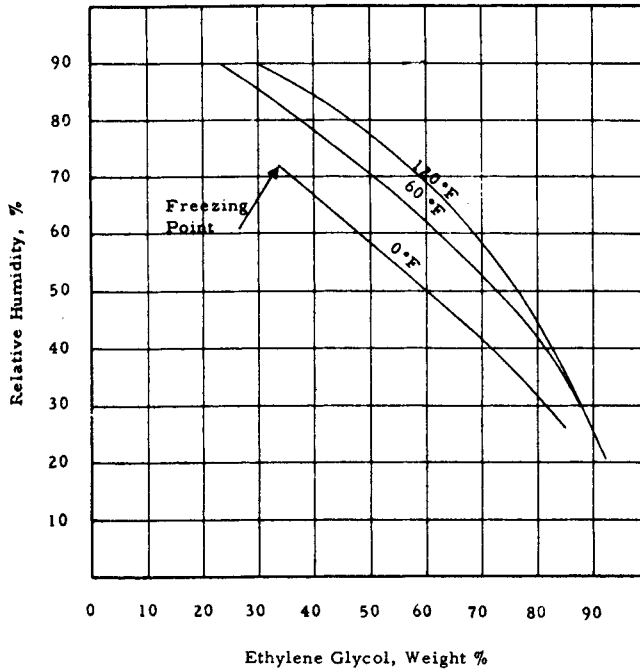


Table 7.11: Water Vapor Dew Points Over Aqueous Ethylene Glycol Solutions (23)



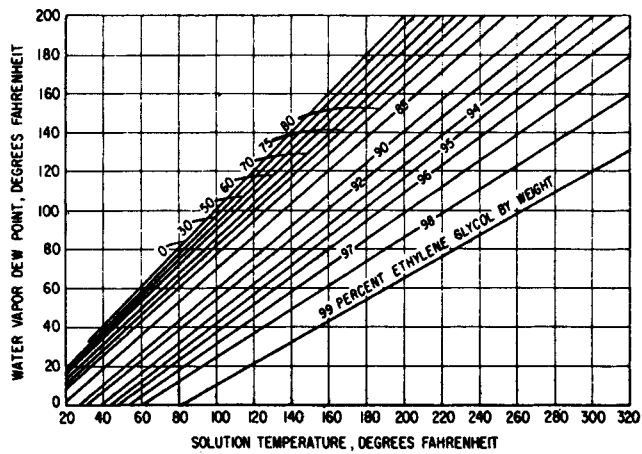


Table 7.12: Key Hygroscopicity Curve for Ethylene Glycol (55)

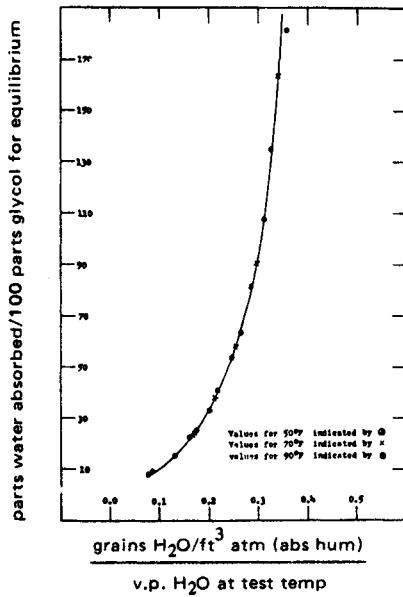


Key hygroscopicity curve for ethylene glycol showing influence of vapor pressure of water at test temperature on amounts of moisture absorbed by ethylene glycol for system equilibrium at various temperatures and various absolute humidities.

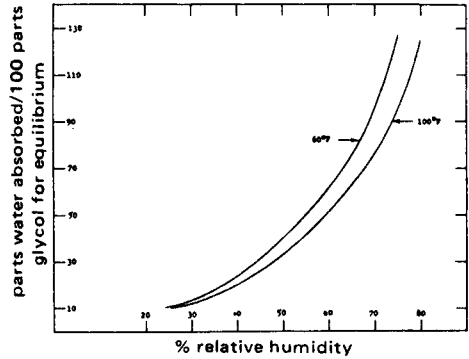Table 7.13: Moisture Absorption of Ethylene Glycol at Various Relative Humidities (55)




The effect of temperature on the moisture absorption of ethylene glycol for system equilibrium at various relative humidities. Values plotted were calculated from those of the key hygroscopicity curve for ethylene glycol.

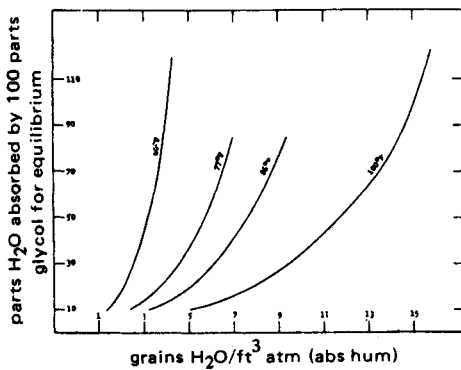Table 7.14: Moisture Absorption of Ethylene Glycol at Various Absolute Humidities (55)



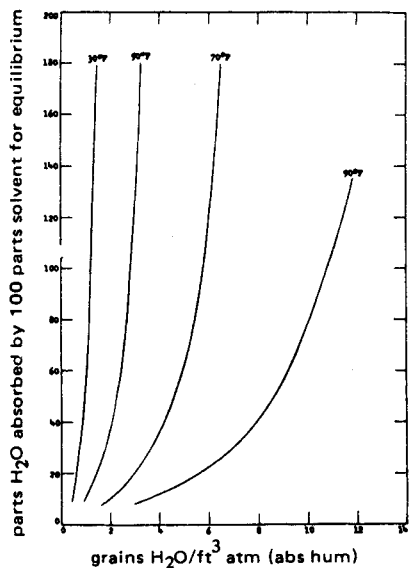The effect of temperature on the moisture absorption of ethylene glycol for system equilibrium at various absolute humidities. Values used were calculated from those in key hygroscopicity curve for ethylene glycol.



The effect of temperature on the moisture absorption of ethylene glycol for system equilibrium of various absolute humidities. Values plotted were from experimentally obtained data.

Table 7.15: Kinematic Viscosity of Anhydrous Ethylene Glycol and Trimethylene Glycol Solutions (32)

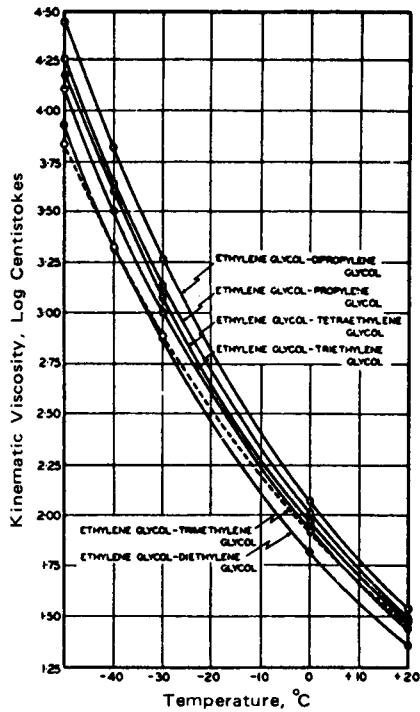


Table 7.16: Freezing Points of Anhydrous Ethylene Glycol and Trimethylene Glycol Solutions (32)

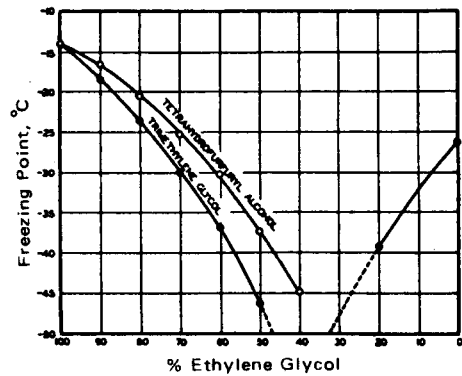


Table 7.17: Azeotropes of Ethylene Glycol (19)

| Compound | Components | | Boiling Point, °C at 760 mm. | Azeotrope | | | Relative Volume of Layers at 20° C | Sp. Gr. of Azeotrope or Layers |
|--------------------------------------------|------------------------------|------------------------------|------------------------------|---------------|----------------|----------------|------------------------------------|--------------------------------|
| | Specific Gravity at 20/20° C | Boiling Point, °C at 760 mm. | | In Azeo-trope | In Upper Layer | In Lower Layer | | |
| Ethylene Glycol Butyl Carbitol | 1.1155 0.9536 | 197.5 230.6 | 196.2 | 72.5 27.5 | | | 1.074 | |
| Ethylene Glycol Dibutyl Ether | 1.1155 0.7694 | 197.5 142.1 | 139.5 | 6.4 93.6 | 2 98 | 99 1 | U 0.777 L 1.114 | |
| Ethylene Glycol Dichlorethyl Ether | 1.1155 1.2220 | 123† 96† | 92.7† | | | | U 9.9 L 90.1 | |
| Ethylene Glycol Diethyl Carbitol | 1.1155 0.9082 | 197.5 188.4 | 178.0 | 26.1 73.9 | | | 0.959 | |
| Ethylene Glycol Di(2-ethylhexyl) Ether) | 1.1155 0.8121 | 91‡ 135‡ | 87‡ | | | | U 50 L 50 | |
| Ethylene Glycol Di-N-hexyl Ether | 1.1155 0.7942 | 123† 137† | 112.8† | 35.6 64.4 | 0.1 99.9 | 99.9 0.1 | U 71.8 L 28.2 | U 0.795 L 1.115 |
| Ethylene Glycol Diphenyl Ether | 1.1155 1.0677# | 123† 161† | 120.4† | 62.3 37.7 | 0.2 99.8 | 98.5 1.5 | U 37.6 L 62.4 | U 1.076 L 1.114 |
| Ethylene Glycol Diphenyl Ether | 1.1155 1.0677# | 197.5 257.4 | 192.3 | 64.5 35.5 | 0.22 99.78 | 98.28 1.72 | U 35.3# L 64.7# | U 1.068# L 1.108# |

(continued)

Table 7.17: (continued)

| Components | | | Azeotrope | | | | | |
|-----------------|------------------------------|------------------------------|------------------------------|-----------------------|----------------|----------------|------------------------------------|-----------------------------------------|
| Compound | Specific Gravity at 20/20° C | Boiling Point, °C at 760 mm. | Boiling Point, °C at 760 mm. | Composition, % by wt. | | | Relative Volume of Layers at 20° C | Sp. Gr. 20/20° C of Azeotrope or Layers |
| | | | | In Azeo-trope | In Upper Layer | In Lower Layer | | |
| Ethylene Glycol | 1.1155 | 197.5 | 192 | 45.5 | | | | 1.050 |
| Exthoxydiglycol | 0.9898 | 208.8 | | 54.5 | | | | |
| Ethylene Glycol | 1.1155 | 123† | 114 | 4 | | | | 1.025 |
| Methyl Carbitol | 1.0211 | 115† | | 96 | | | | |
| Ethylene Glycol | 1.1155 | 157.1▲ | 149▲ | 12 | | | | 1.033 |
| Methyl Carbitol | 1.0211 | 151.2▲ | | 88 | | | | |
| Ethylene Glycol | 1.1155 | 197.5 | 192 | 30 | | | | 1.051 |
| Methyl Carbitol | 1.0211 | 193.6 | | 70 | | | | |

†At 50 mm. Hg

‡At 10 mm. Hg

Heterogeneous at 20° C

#At 30/20° C

●At 30° C

▲At 200 mm. Hg

PROPYLENE GLYCOL

1,2-Propanediol

CH₃CHOHCH₂OH

Table 7.18: Physical Properties of Propylene Glycol (32)

| | |
|-------------------------------------------------|--------------------------------------------|
| Boiling point at 10 mm. Hg | 85° C |
| 50 mm. Hg | 116° C |
| 760 mm. Hg | 187.4° C |
| ΔBoiling point/Δpressure | 0.042° C/mm.Hg |
| Coefficient of expansion to 20° C | 0.695 x 10 ⁻³ |
| to 55° C | 0.743 x 10 ⁻³ |
| Evaporation rate (n-butyl acetate—1.0) | 0.01 |
| Fire point, ASTM open cup | 225° F |
| Flash point, Cleveland open cup | 210° F |
| Freezing point | -60 (sets to glass below this temperature) |
| Heat of combustion at 25° C | 5728 cal./g. 10,312 Btu/lb. |
| Heat of vaporization at boiling point at 1 atm. | 168.9 cal./g. 304 Btu/lb. |
| Ignition temperature | 421° C |
| Molecular weight, calculated | 76.094 |
| Pour point | -59.5° C |
| Refractive index, n _D 20° C | 1.4326 |
| Specific heat at 20° C | 0.593 cal./g./°C |
| Specific gravity, 20/20° C | 1.0381 |
| Δ Specific gravity/Δtemperature, 0 to 40° C | 0.00073/°C |
| Vapor density (air—1.0) | 2.52 |
| Vapor pressure at 20° C | 0.05 mm. Hg 0.08 mm. Hg |
| Viscosity at 0° C | 243 cp. |
| 20° C | 56 cp. |
| 40° C | 18 cp. |
| Weight per gallon at 25° C | 8.64 lb. |

Table 7.19: Propylene Glycol Specifications (19)

| | Standard Grade | U. S. P. Grade | Air-Treatment Grade | Special Grade |
|-------------------------------------------------|--------------------------------------------------------------|--------------------|---------------------|--------------------|
| Specific gravity at 20/20° C | 1.0370 to 1.0390 | 1.0375 to 1.0400 | 1.0375 to 1.0400 | 1.0380 to 1.0390 |
| Distillation at 760 mm. Hg | Lbp, 185° C, max. 95 ml. 109° C, max. Dp, 194° C, max. | † | † | ‡ |
| Propylene glycol, min. | — | 97.5% by wt. | 97.5% by wt. | 99.0% by wt. |
| Acidity, max. | 0.005% by wt. § | 0.005% by wt. § | 0.005% by wt. § | 0.005% by wt. # |
| Refractive Index at 20° C, n _D | — | — | 1.4316 to 1.4335 | — |
| Solubility | — | • | ▲ | — |
| Chlorides, max. (as Cl) | 0.001% by wt. | 0.001% by wt. | 0.001% by wt. | 0.001% by wt. |
| Oxidizing substances | — | — | — | none |
| Carbonyl groups | — | — | — | shall pass test |
| Sulfates | — | none | — | — |
| Heavy metals, max. (as Pb) | — | 5 ppm | — | — |
| Lead, max. (as Pb) | — | — | — | 0.0003% by wt. ** |
| Arsenic, max. (As ₂ O ₃) | — | 1 ppm | — | 0.001% by wt. †† |
| Water, max. | 0.5% by wt. | 0.2% by wt. | 0.5% by wt. | — |
| Ash, max. | 0.005% by wt. | 0.005% by wt. | 0.007% by wt. | — |
| Color, max. (Pt-Co Scale) | 10 | 10 | 15 | 15 |
| Odor | — | mild | — | mild |
| Suspended matter | substantially free | substantially free | substantially free | substantially free |

† Shall entirely distill within a 5° C range which shall include 187.3° C.

‡ Shall entirely distill within a 5° C range, and 90 ml. shall distill within a 2.2° C range.

§ Calculated as acetic acid. This is equivalent to 0.047 mg. KOH per g. sample.

Calculated as hydrochloric acid. This is equivalent to 0.077 mg. KOH per g. sample.

• Miscible in all proportions with water, acetone, and chloroform at 25° C.

▲ Completely miscible in all proportions with water at 20° C.

** This is equivalent to 3 ppm.

†† This is equivalent to 10 ppm.

Table 7.20: Boiling Points of Aqueous Propylene Glycol Solutions (19)

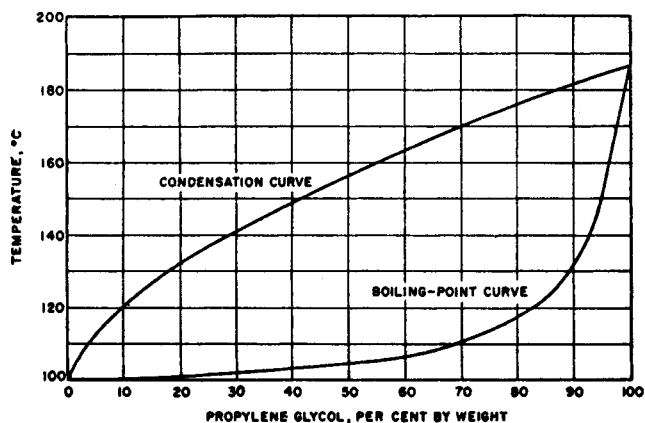


Table 7.21: Conversion Chart for Aqueous Propylene Glycol Solutions (23)

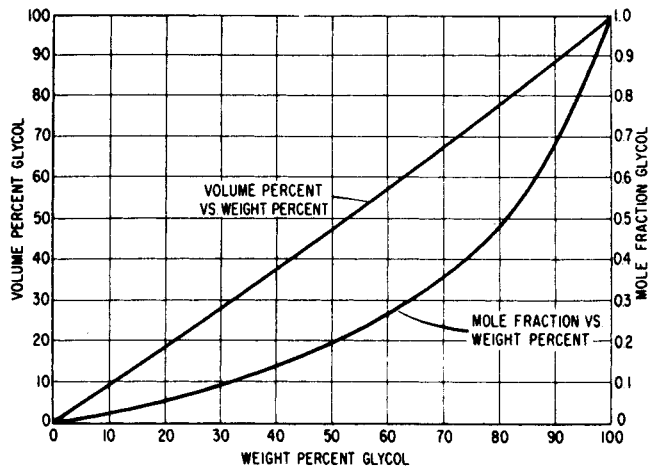


Table 7.22: Density of Aqueous Propylene Glycol Solutions (Percent by Weight) (23)

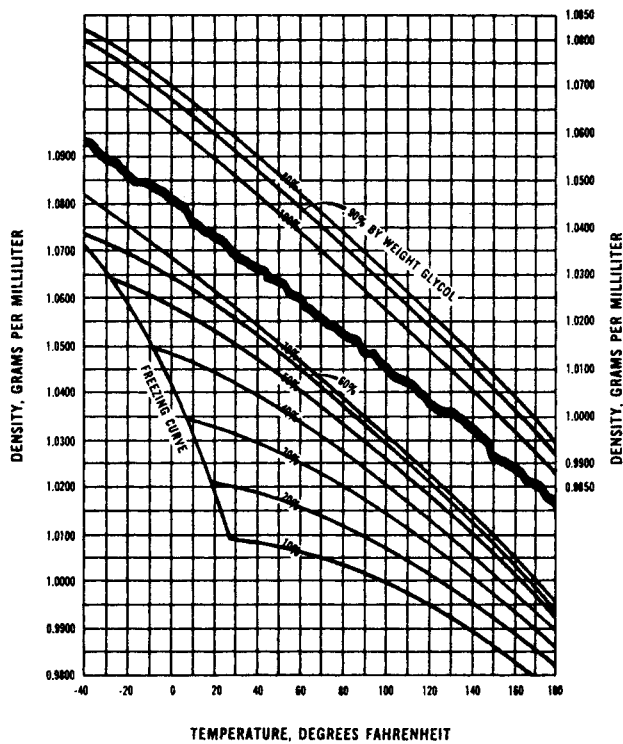


Table 7.23: Effect of Aqueous Propylene Glycol Solutions on Dew Points at Various Contact Temperatures (19)


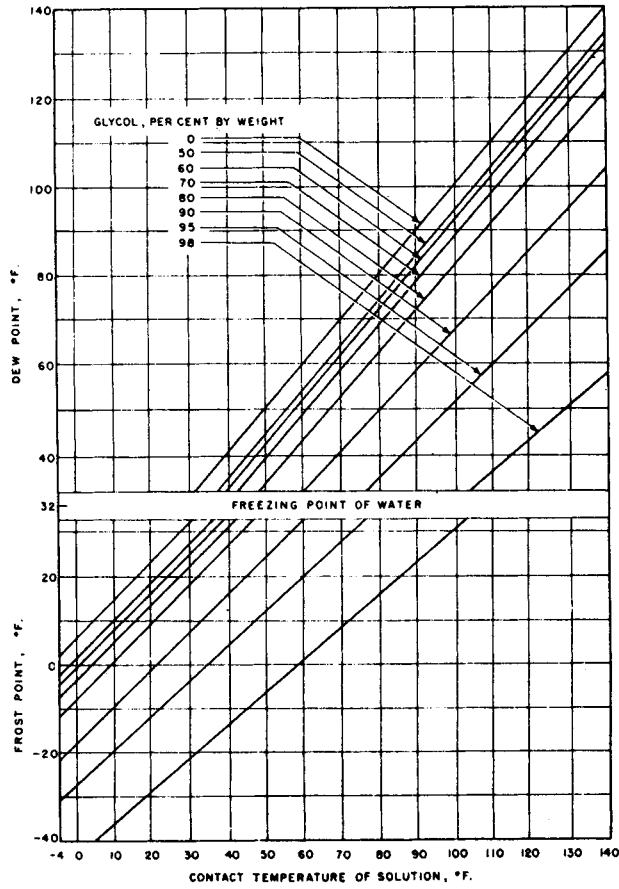


Table 7.24: Freezing Points of Aqueous Propylene Glycol Solutions (2)

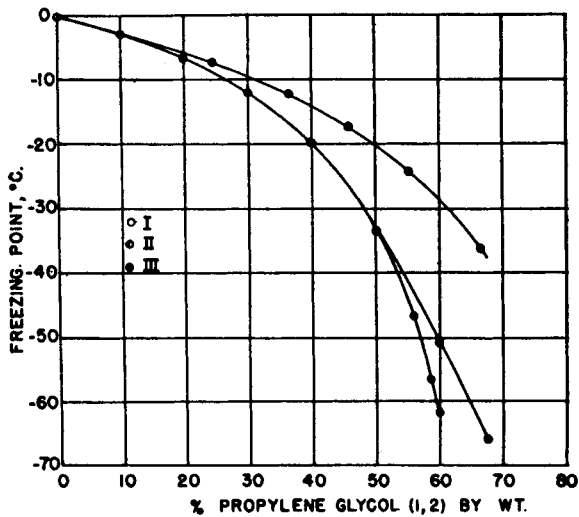

- (I) Observed;
- (II) Theoretical, without hydration;
- (III) Theoretical, with complete hydration.

Table 7.25: Heat of Vaporization of Propylene Glycol at Various Temperatures (19)

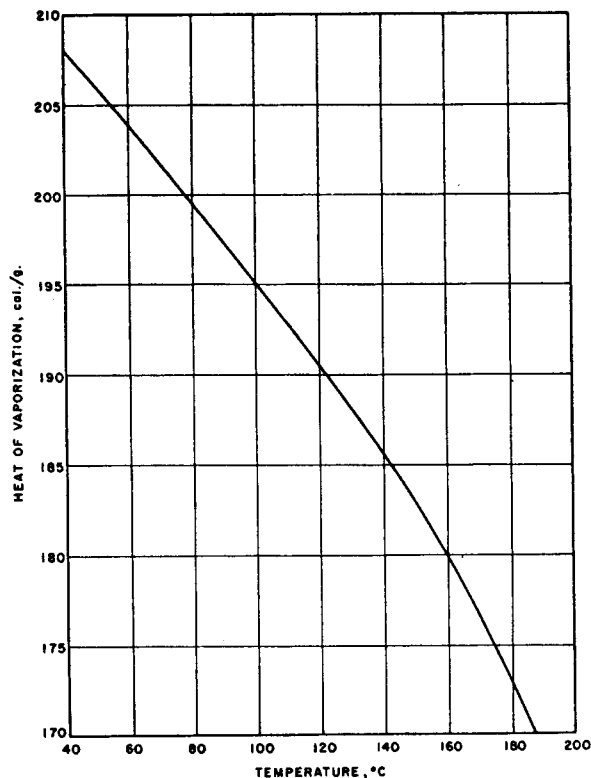


Table 7.26: Refractive Indices of Aqueous Propanediol Solutions at 20°, 30°, and 40°C (32)

| Glycol, % | 1,2-Propanediol | | | Glycol, % | 1,3-Propanediol | | |
|--------------|-----------------|------------|------------|--------------|-----------------|------------|------------|
| | n_D^{20} | n_D^{30} | n_D^{40} | | n_D^{20} | n_D^{30} | n_D^{40} |
| 9.94 | 1.3435 | 1.3422 | 1.3411 | 10.98 | 1.3433 | 1.3430 | 1.3410 |
| 20.03 | 1.3552 | 1.3540 | 1.3522 | 19.96 | 1.3540 | 1.3528 | 1.3511 |
| 30.23 | 1.3670 | 1.3650 | 1.3630 | 30.21 | 1.3654 | 1.3640 | 1.3623 |
| 40.01 | 1.3780 | 1.3758 | 1.3732 | 40.34 | 1.3770 | 1.3755 | 1.3735 |
| 49.41 | 1.3887 | 1.3863 | 1.3833 | 49.94 | 1.3880 | 1.3861 | 1.3839 |
| 60.04 | 1.3995 | 1.3970 | 1.3940 | 60.32 | 1.3997 | 1.3975 | 1.3951 |
| 69.50 | 1.4082 | 1.4055 | 1.4028 | 70.24 | 1.4103 | 1.4080 | 1.4065 |
| 79.43 | 1.4174 | 1.4144 | 1.4111 | 79.87 | 1.4205 | 1.4183 | 1.4155 |
| 89.74 | 1.4252 | 1.4221 | 1.4190 | 89.68 | 1.4300 | 1.4276 | 1.4250 |
| 100 | 1.4324 | 1.4295 | 1.4255 | 100 | 1.4389 | 1.4364 | 1.4332 |

Table 7.27: Relative Humectant Values of Propylene Glycol, N.F. (23)

values are given as the per cent by weight of glycol in water solutions that will be in equilibrium with air of various temperatures and humidities

| Temperature of Air | RELATIVE HUMIDITIES | | | | | | | |
|--------------------|---------------------|-------|------|------|------|------|------|------|
| | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% |
| 0° F | 93.0 | 88.0 | 78.0 | 73.7 | 70.0 | 62.5 | 45.0 | |
| 10° F | 93.5 | 87.5 | 78.0 | 73.7 | 70.5 | 63.0 | 46.0 | 30.0 |
| 20° F | 93.0 | 87.5 | 78.5 | 73.7 | 71.0 | 63.0 | 47.0 | 30.0 |
| 30° F | 92.7 | 88.0 | 79.5 | 74.0 | 71.0 | 62.0 | 48.0 | 30.0 |
| 40° F | 93.0 | 89.5 | 81.0 | 76.0 | 71.5 | 64.0 | 50.0 | 30.0 |
| 50° F | 93.5 | 90.5 | 83.0 | 77.5 | 72.0 | 66.0 | 51.0 | 31.0 |
| 60° F | 93.7 | 90.8 | 84.0 | 78.0 | 72.0 | 66.0 | 52.0 | 32.0 |
| 70° F | 94.0 | 91.0 | 85.0 | 78.5 | 73.0 | 66.5 | 52.5 | 33.0 |
| 80° F | 94.3 | 91.2 | 85.0 | 79.0 | 73.0 | 66.0 | 52.5 | 34.0 |
| 90° F | 94.4 | 91.2 | 85.5 | 79.5 | 73.5 | 67.0 | 53.0 | 35.0 |
| 100° F | 94.4 | 91.25 | 85.8 | 80.5 | 74.0 | 67.0 | 53.0 | 35.0 |
| 110° F | 94.4 | 91.26 | 86.0 | 81.0 | 75.0 | 67.5 | 53.0 | 33.0 |
| 120° F | 94.4 | 91.27 | 86.5 | 81.3 | 75.0 | 68.0 | 54.0 | 33.0 |

Table 7.28: Specific Gravity of Aqueous Propylene Glycol Solutions at Various Temperatures (19)

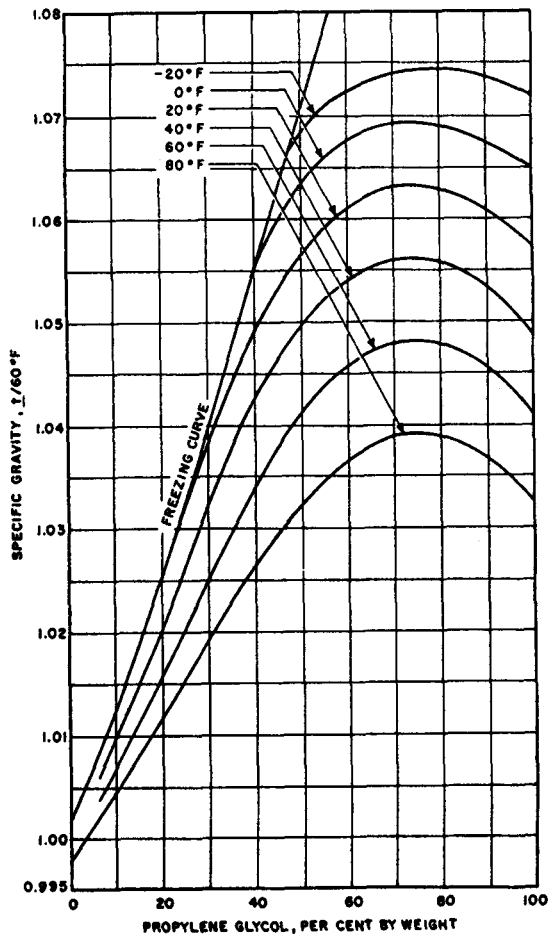


Table 7.29: Specific Heat of Aqueous Propylene Glycol Solutions (19)

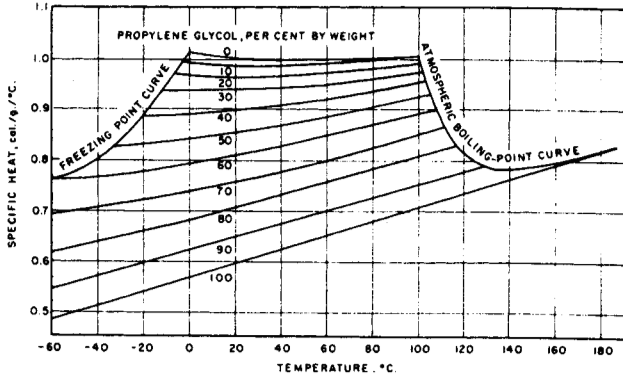


Table 7.30: Thermal Conductivity of Aqueous Propylene Glycol Solutions at Various Temperatures (19)

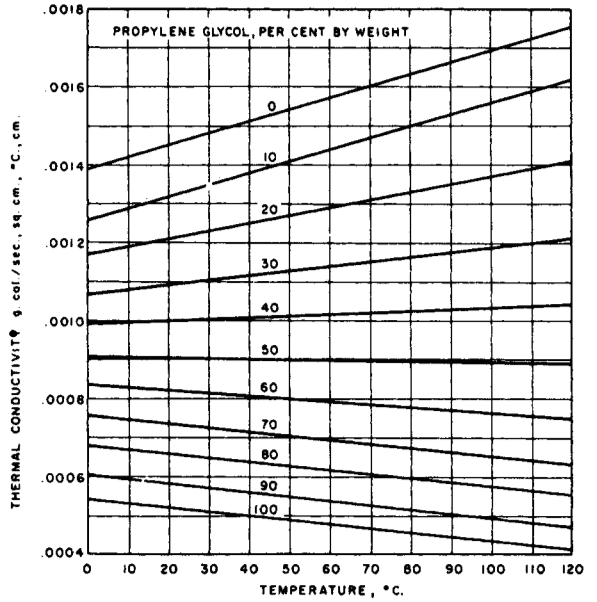


Table 7.31: Total Pressure over Aqueous Propylene Glycol Solutions Versus Temperatures (23)

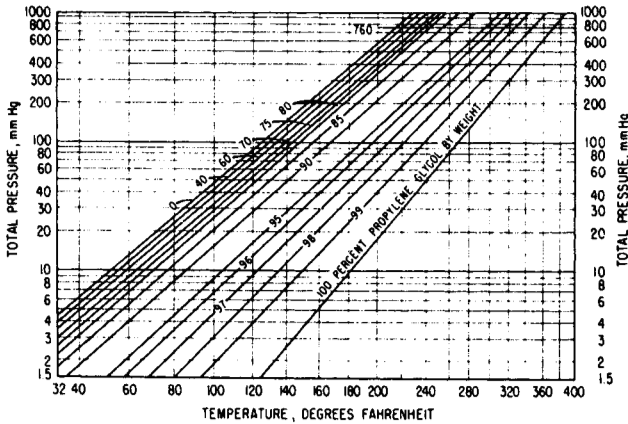


Table 7.32: Vapor-Liquid Composition Curves for Aqueous Propylene Glycol Solutions (23)

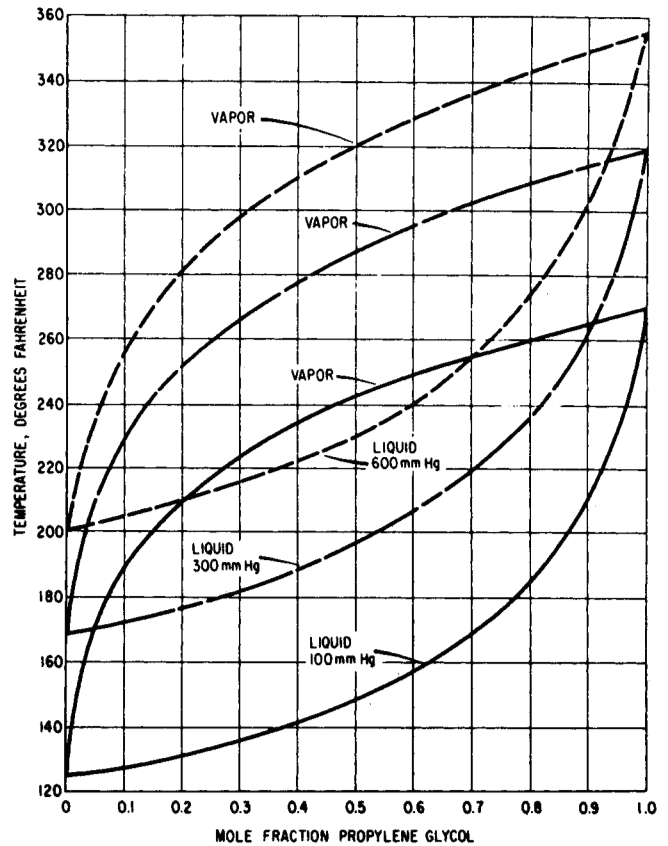


Table 7.33: Vapor Pressures of Aqueous Propylene Glycol Solutions (19)

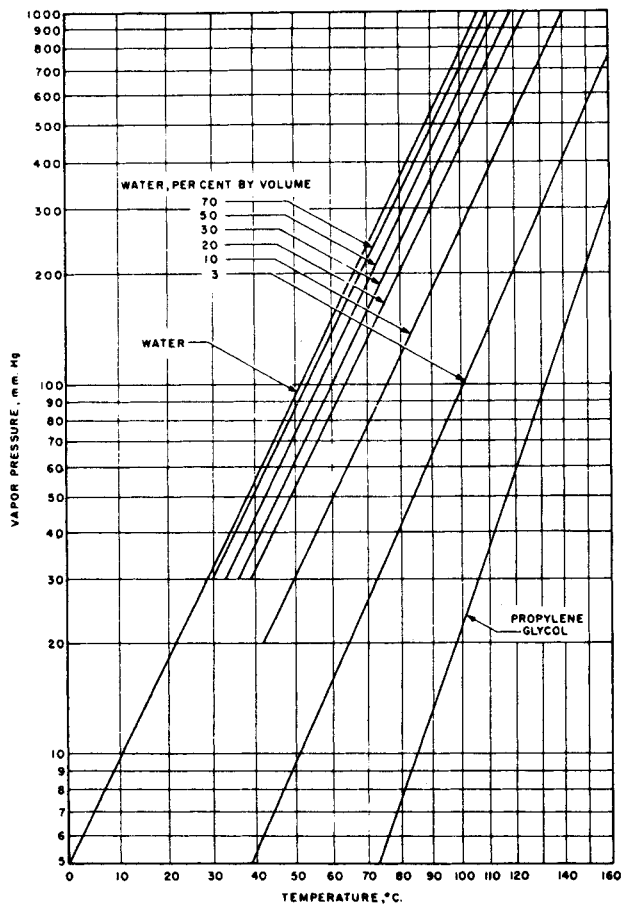


Table 7.34: Viscosities of Aqueous Propylene Glycol Solutions (23)

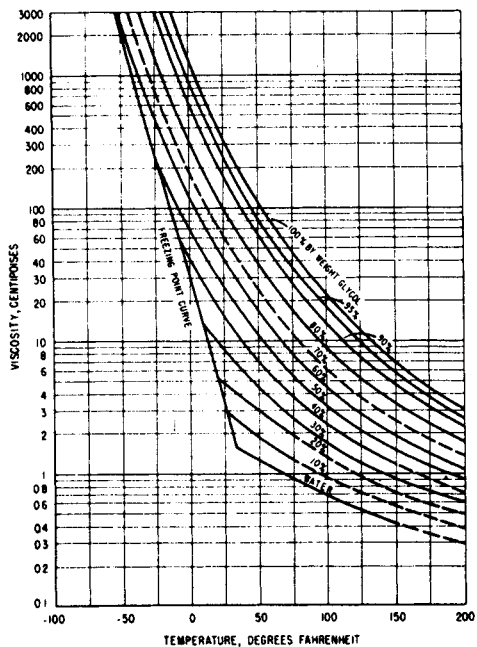


Table 7.35: Azeotropes of Propylene Glycol (19)

| Components | | | Azeotrope | | |
|-----------------------------------------|------------------------------|---------------------------------|----------------------------------|------------------------------------|------------------------------|
| Compound | Specific Gravity at 20/20° C | Boiling Point, °C at 760 mm. Hg | Boiling Point, °C at 760 mm. Hg. | Relative Volume of Layers at 20° C | Specific Gravity at 20/20° C |
| Propylene glycol dibutyl ether | 1.0381 0.7694 | 187.4 142.1 | 136 | Upper layer 93 Lower layer 7 | |
| Propylene glycol di-(2-ethylhexy) ether | 1.0381 0.8121 | 85† 135† | 84† | | |
| Propylene glycol toluene | 1.0381 0.8683 | 187.4 110.6 | 108 | Upper layer 98 Lower layer 2 | |

†At 10 mm. Hg.
‡Heterogeneous at 20° C.

1,3-PROPANEDIOL

Trimethylene Glycol
1,3-Dihydroxypropane
Beta-Propylene Glycol





Table 7.36: Physical Properties of 1,3-Propanediol (32)


| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|------------|
| Boiling point at 760 mm. Hg | 214° C (210-211° C) | | |
| Freezing points of aqueous solutions, °C | | | |
| 10% | -2.86 | | |
| 20% | -6.5 | | |
| 30% | -11.8 | | |
| 40% | -18.8 | | |
| 50% | -27.7 | | |
| 60% | -40.0 | | |
| Molecular weight | 78.1 | | |
| Refractive indices of aqueous solutions at 20, 30, and 40° C | n_D^{20} | n_D^{30} | n_D^{40} |
| 11.0% | 1.3433 | 1.3430 | 1.3410 |
| 20.0% | 1.3540 | 1.3528 | 1.3511 |
| 30.2% | 1.3654 | 1.3640 | 1.3623 |
| 40.3% | 1.3770 | 1.3755 | 1.3735 |
| 50.0% | 1.3880 | 1.3861 | 1.3839 |
| 60.3% | 1.3997 | 1.3975 | 1.3951 |
| 70.2% | 1.4103 | 1.4080 | 1.4065 |
| 79.9% | 1.4205 | 1.4183 | 1.4155 |
| 89.7% | 1.4300 | 1.4276 | 1.4250 |
| 100.0% | 1.4389 | 1.4364 | 1.4332 |
| Specific gravity at 20/20° C | 1.0554 | | |
| at 0° C | 1.0625 | | |
| at 214° C | 0.9028 | | |
| Thermal expansion of aqueous solutions between 20 and 40° C ($\alpha \times 10^3$) | | | |
| 20% | 0.39 | | |
| 40% | 0.47 | | |
| 60% | 0.55 | | |
| 80% | 0.60 | | |
| 100% | 0.61 | | |
| Isothermal contraction in volume on mixing with water between 20 and 40° C (ml. contraction per 100 ml. of initial volume) | 20° C | 40° C | |
| 20% | 0.37 | 0.29 | |
| 40% | 0.90 | 0.81 | |
| 60% | 1.19 | 1.07 | |
| 80% | 1.01 | 0.89 | |

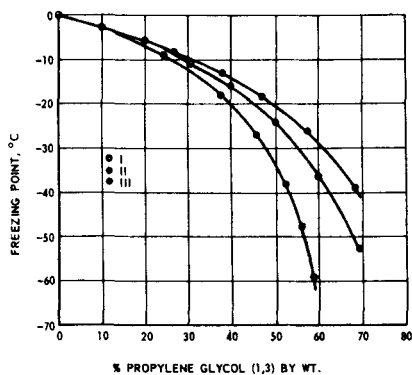Table 7.37: Freezing Points of Aqueous Solutions of 1,3-Propanediol (32)



Freezing Points of Propylene Glycol (1,3)-Water Mixtures. (I) Observed; (II) Theoretical, without hydration; (III) Theoretical, with complete hydration.

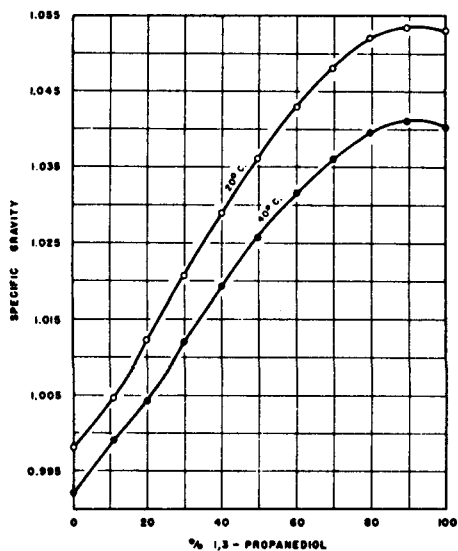Table 7.38: Specific Gravity of Aqueous Solutions of 1,3-Propanediol at 20° and 40°C (32)



1,2-BUTANEDIOL

Table 7.39: Physical Properties of 1,2-Butanediol (32)

Freezing points of aqueous solutions, °C

| | |
|-----|-------|
| 10% | -2.6 |
| 20% | -6.0 |
| 30% | -11.0 |
| 40% | -16.5 |
| 50% | -22.4 |
| 60% | -29.0 |

Refractive indices of aqueous solutions at 20, 30, and 40° C

| | n_D^{20} | n_D^{30} | n_D^{40} |
|--------|------------|------------|------------|
| 10.13% | 1.3452 | 1.3436 | 1.3420 |
| 19.69% | 1.3572 | 1.3553 | 1.3534 |
| 29.72% | 1.3693 | 1.3672 | 1.3650 |
| 39.79% | 1.3813 | 1.3788 | 1.3760 |
| 49.68% | 1.3920 | 1.3892 | 1.3865 |
| 59.88% | 1.4027 | 1.4000 | 1.3966 |
| 69.37% | 1.4120 | 1.4090 | 1.4058 |
| 79.73% | 1.4211 | 1.4185 | 1.4165 |
| 89.40% | 1.4297 | 1.4265 | 1.4230 |
| 100.0% | 1.4375 | 1.4347 | 1.4310 |

Thermal expansion of aqueous solutions between 20 and 40° C ($\alpha \times 10^3$)

| | |
|------|-------|
| 20% | 0.454 |
| 40% | 0.654 |
| 60% | 0.728 |
| 80% | 0.765 |
| 100% | 0.775 |

Isothermal concentration in volume on mixing with water between 20 and 40° C (ml. contraction per 100 ml. of initial volume)

| | 20° C | 40° C |
|-----|-------|-------|
| 20% | 1.12 | 1.01 |
| 40% | 1.96 | 1.67 |
| 60% | 1.92 | 1.65 |
| 80% | 1.27 | 1.10 |

Viscosity of aqueous solutions at 20 and 40° C, in centistokes

| | 20° C | 40° C |
|---------|-------|-------|
| 10.125% | 1.520 | 0.910 |
| 19.7% | 2.187 | 1.243 |
| 29.7% | 3.310 | 1.690 |
| 39.8% | 4.802 | 2.311 |
| 49.7% | 6.739 | 3.088 |
| 59.9% | 9.72 | 4.227 |
| 69.4% | 13.82 | 5.744 |
| 79.7% | 21.37 | 8.372 |
| 89.4% | 35.54 | 12.59 |
| 100.0% | 68.0 | 21.25 |

Table 7.40: Specific Gravity of Aqueous 1,2-Butanediol Solutions at 20° and 40°C (32)


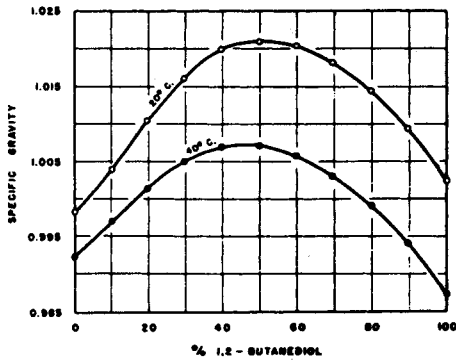


Table 7.41: Absolute Viscosity of Aqueous 1,2-Butanediol Solutions at 20° and 40°C (32)

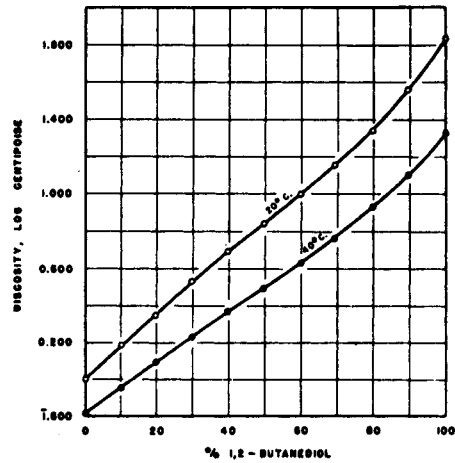

1,3-BUTANEDIOL

1,3-Butylene Glycol




Table 7.42: Physical Properties of 1,3-Butanediol (32)

| | | | |
|----------------------------------------------------------|---------------------|------------------------------|-------------------|
| Acid as acetic | 0.005% by wt., max. | Refractive index at 20° C/D | 1.4401 |
| Boiling point | 207.5° C | Solubility (% by weight) | |
| Color, APHA | 15, max. | in castor oil | 18% |
| Distillation range | 200-215° C | in ether | 7% |
| Flash point, tag open cup | 250° F | either in | 9% |
| Freezing point | Below -50° C | in ethyl acetate | 32% |
| Heat of vaporization | 155 cal./g. | ethyl acetate in | 41% |
| Hygroscopicity, weight % water absorbed in 144 hours at: | | in dibutyl phthalate | 2% |
| 25-28° C and 81% relative humidity | 38.5 | Specific gravity at 20/20° C | 1.0062 |
| 25-28° C and 47% relative humidity | 12.5 | Surface tension at 25° C | 37.8 dynes/cm. |
| 25-28° C and 20% relative humidity | 4.3 | Vapor pressure at 20° C | 0.06 mm. Hg |
| Molecular weight, calculated | 90.12 | Viscosity at 25° C | 104 cp. |
| Purity | 95% by wt., min. | at 35° C | 89 cp. |
| | | Water | 0.5% by wt., max. |
| | | Weight per gallon at 20° C | 8.38 lb. |

Table 7.43: Freezing Point of Aqueous Solutions of 1,3-Butanediol (32)

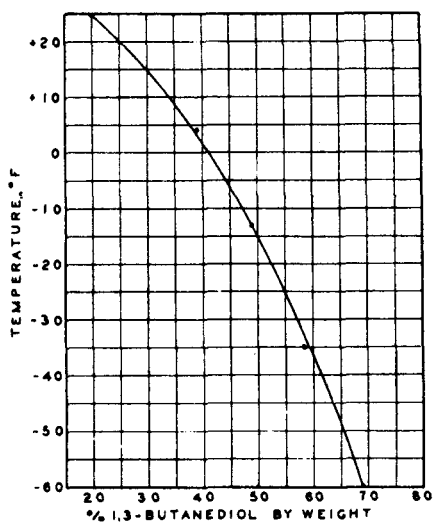


Table 7.44: Refractive Index and Freezing Point of Aqueous Solutions of 1,3-Butanediol (32)

| Content of 1,3-Butanediol, % by Weight | n 25° C D | Freezing Point | |
|----------------------------------------|-----------|----------------|-----|
| | | °C | °F |
| 19.4 | 1.3561 | -4 | +25 |
| 39.4 | 1.3806 | -15.5 | +4 |
| 49.3 | 1.3922 | -25 | -13 |
| 58.5 | 1.4032 | -37 | -35 |
| 64.5 | 1.4093 | -42 | -44 |
| 69.0 | 1.4138 | -51 | -60 |
| 79.5 | 1.4237 | Viscous liquid | |
| 89.0 | 1.4319 | | |

Table 7.45: Specific Gravity of Aqueous 1,3-Butanediol solutions at 20° and 40°C (32)


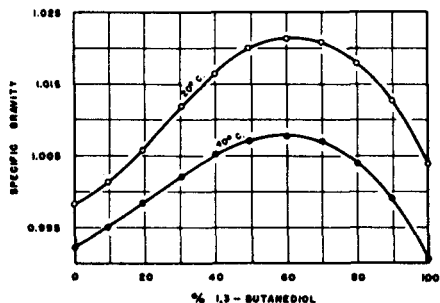


Table 7.46: Viscosity of Aqueous Solutions of 1,3-Butanediol (32)

| Content of 1,3-Butanediol, % by Weight | Viscosity, centipoises | | |
|----------------------------------------|------------------------|-----------|------------|
| | 25.0° C | -171° ± C | -37 ± 1° C |
| 19.4 | 2.1 | | |
| 39.4 | 4.7 | | |
| 49.3 | 6.7 | 95 | |
| 58.5 | 10.2 | 172 | |
| 69.0 | 16.7 | 304 | |
| 79.5 | 27.7 | 620 | 7,000 |
| 89.0 | 50.8 | 1,360 | 18,500 |
| 100.0 | 98.3 | 3,150 | 35,000 |

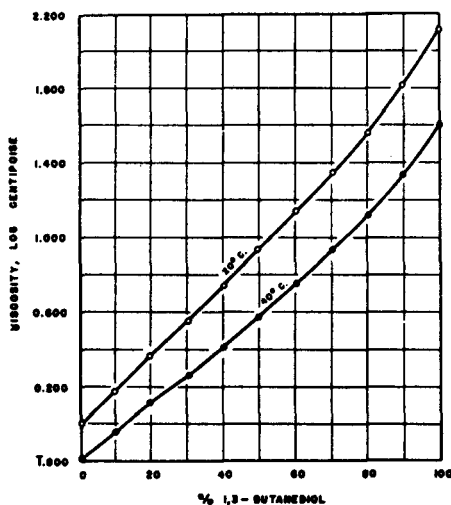Table 7.47: Absolute Viscosity of Aqueous 1,3-Butanediol Solutions at 20° and 40°C (32)



1,4-BUTANEDIOL

Tetramethylene Glycol




Table 7.48: Physical Properties of 1,4-Butanediol (32)

| | | | |
|------------------------------------------------|------------------|------------------------------------------------|----------|
| Acetals (as CH ₂ O) | Less than 0.8% | Freezing point | 20.9° C |
| Acidity (as HCO ₂ H) | Less than 1% | Refractive index, n _D ²⁵ | 1.4446 |
| Ash | 0% | Solubility at 25° C (g./100 ml. solvent) | |
| Boiling range | 221-231° C | in water | Infinite |
| 1-Butanol | Less than 0.5% | in methanol | Infinite |
| Flash point (ASTM open cup) | More than 250° F | in ethanol | Infinite |
| Free aldehyde as CH ₂ O | Less than 0.1% | in acetone | Infinite |
| Freezing point range | 18-19.5° C | benzene | 0.3 |
| Purity | Over 96% | carbon tetrachloride | 0.4 |
| Refractive index, n _D ²⁵ | 1.4435-1.4445 | chlorobenzene | 0.4 |
| Specific gravity, d ₄ ²⁵ | 1.012-1.016 | ethyl acetate | 14.1 |
| Unsaturation (as butenediol) | Less than 1% | ethyl ether | 3.1 |
| Viscosity, 25° C | 65-70 cp. | petroleum ether (35-60° C) | 0.9 |
| Water content | Less than 0.8% | Specific gravity, d ₄ ²⁵ | 1.0154 |

| | | | | |
|----------------------------|--------|----------------|----------------|----------------|
| Pure 1,4-Butanediol | | % Water in | Freezing Point | Viscosity |
| Boiling point at 10 mm. Hg | 118° C | 1,4-Butanediol | (°C) | (cp. at 25° C) |
| 20 mm. Hg | 133° C | 0.0 | 20.0 | 71.5 |
| 100 mm. Hg | 170° C | 0.1 | 19.8 | 71.3 |
| 200 mm. Hg | 187° C | 0.5 | 19.0 | 70.2 |
| 760 mm. Hg | 228° C | 1.0 | 18.1 | 68.9 |

Table 7.49: Absolute Viscosity of Aqueous 1,4-Butanediol Solutions at 20° and 40°C (32)


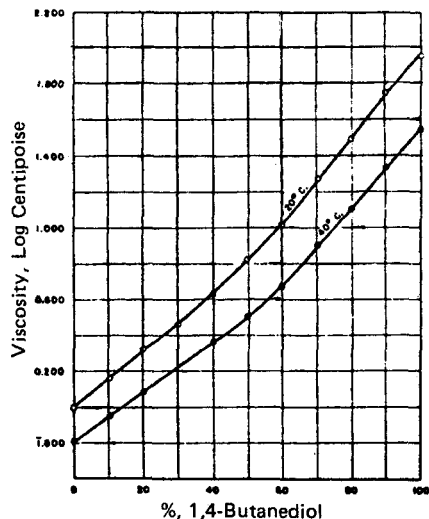
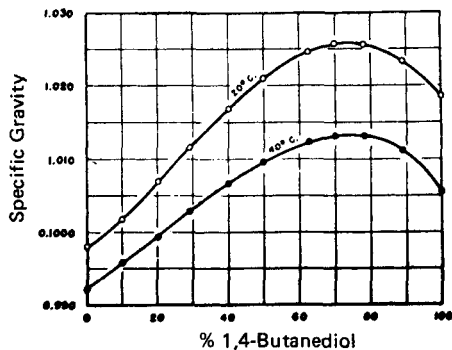


Table 7.50: Specific Gravity of Aqueous 1,4-Butanediol Solutions at 20° and 40°C (32)



2,3-BUTANEDIOL

2,3-Butylene Glycol
2,3-Dihydroxybutane

**Table 7.51: Physical Properties of 2,3-Butanediol (32)**

| | |
|------------------------------------------|-----------------------------------------|
| Acidity as acetic | 0.005% by wt., max. |
| Boiling point at 760 mm. Hg | 182.5° C |
| Color, APHA | 15 max. |
| Density of liquid | 1.048 |
| Distillation range | 175-195° C |
| Flash point, tag open cup | 185° F |
| Freezing point | 19° C (5% water lowers F. P. to +10° C) |
| Hygroscopicity (% water pickup-400 hrs.) | |
| 25° C and 50% rel. hum. | 24 |
| 25° C and 75% rel. hum. | 33 |
| Molecular weight | 90.12 |
| Purity | 95% by wt., min. |
| Refractive index, n_D^{20} | 1.4377 |
| Solubility (1% by weight) | |
| in castor oil | 78% |
| in ether | 5% |
| ether in | 5% |
| in ethyl acetate | 14% |
| ethyl acetate in | 9% |
| in dibutyl phthalate | 2% |
| Specific gravity at 20/20° C | 1.0093 |
| Specific heat at 30° C | 0.60 cal./g. |
| Specific tension at 25° C | 36 dynes/cm. |
| Vapor pressure at 20° C | 17 mm. Hg |
| Viscosity at 25° C | 121 cp. |
| at 35° C | 90 cp. |
| Water content | 0.5% by wt., max. |
| Weight per gallon | 8.41 lb. |

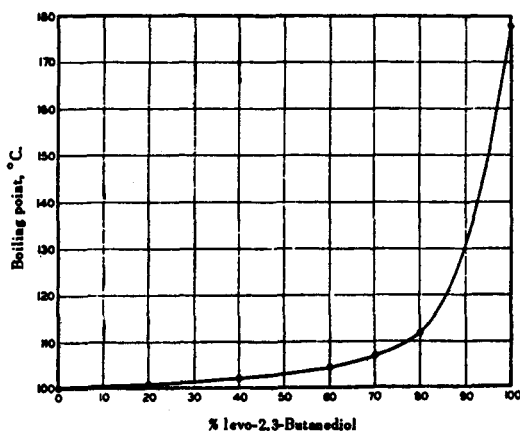
Table 7.52: Boiling Points of Aqueous levo-2,3-Butanediol Solutions at Atmospheric Pressure (32)

Table 7.53: Boiling Points of Aqueous levo-2,3-Butanediol-Ethanol Solutions (32)

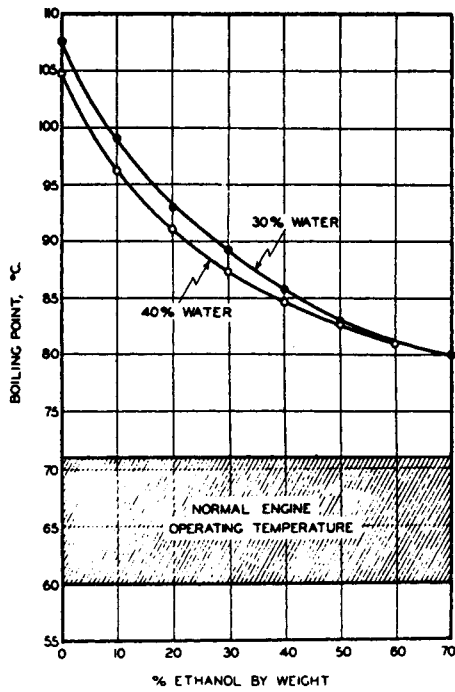


Table 7.54: Boiling Points of Aqueous levo-2,3-Butanediol-Methanol Solutions (32)

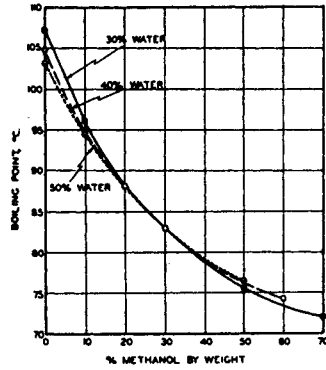


Table 7.55: Freezing Points of Aqueous levo-2,3-Butanediol Solutions (32)

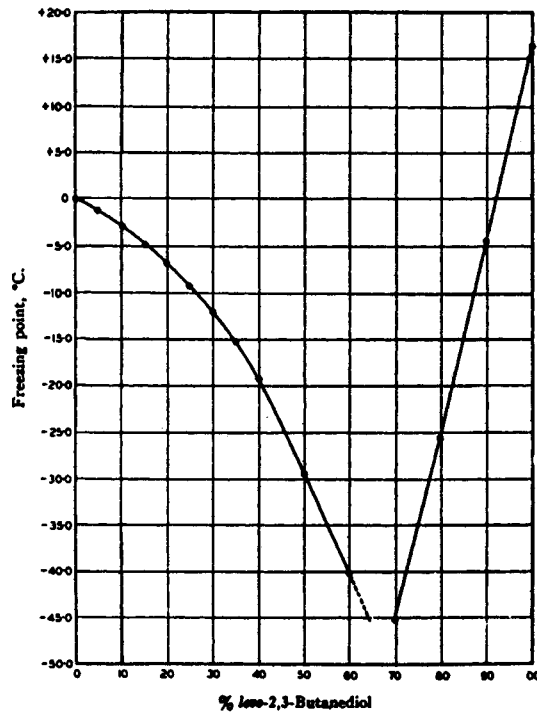


Table 7.56: Freezing Points of Aqueous meso-dextro-2,3-Butanediol Solutions (32)

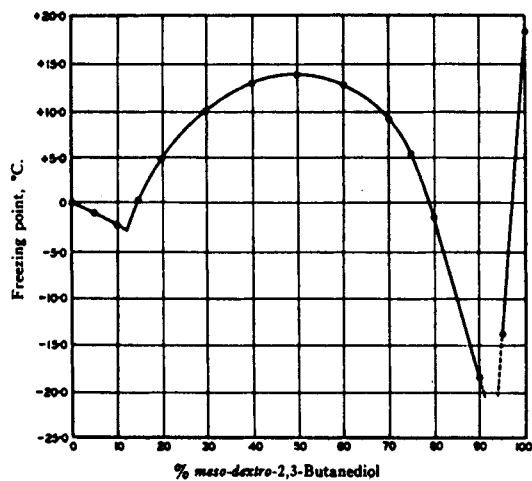


Table 7.57: Effect of meso-2,3-Butanediol on the Freezing Point of Aqueous levo-2,3-Butanediol Solutions (32)

| Composition of Diol | 40% Water | 60% Water |
|----------------------|-----------|-----------|
| 100% levo | -40.4° C | -19.4° C |
| 95% levo 5% meso | -37.0 | -21.0 |
| 90% levo 10% meso | -28.2 | -21.0 |
| 85% levo 15% meso | -18.6 | -17.2 |
| 80% levo 20% meso | -14.0 | -12.4 |
| 50% levo 50% meso | +1.55 | +1.55 |

Table 7.58: Freezing Points of Aqueous levo-2,3-Butanediol-Ethanol Solutions (32)

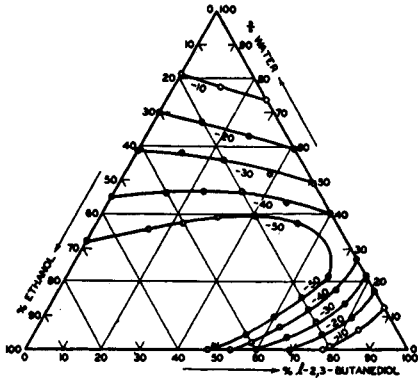


Table 7.59: Freezing Points of Aqueous levo-2,3-Butanediol-Ethylene Glycol Solutions (32)

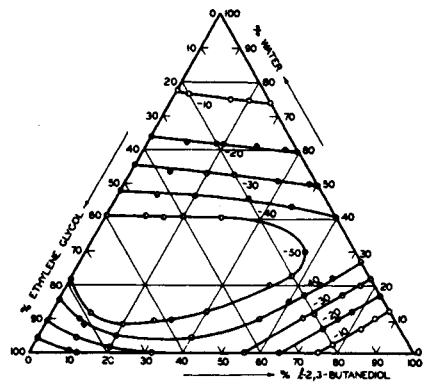


Table 7.60: Freezing Points of Aqueous levo-2,3-Butanediol-Methanol Solutions (32)

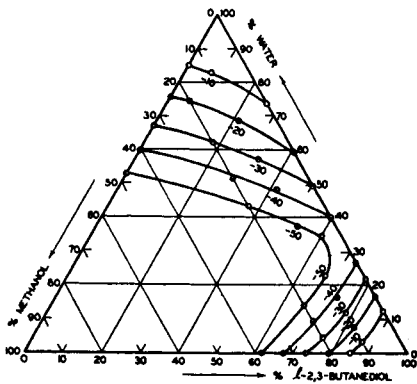


Table 7.61: Freezing Points of Aqueous levo-2,3-Butanediol-Tetrahydrofurfuryl Alcohol Solutions (32)

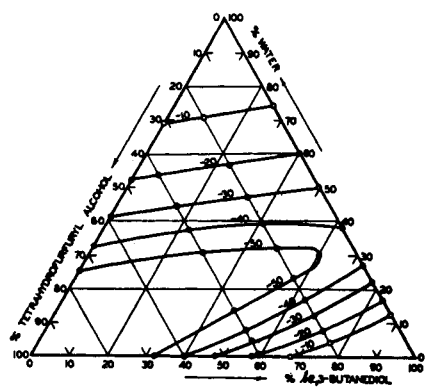


Table 7.62: Kinematic Viscosity of Aqueous levo-2,3-Butanediol Solutions, Expressed Logarithmically, as a Function of Concentration and Temperature (32)

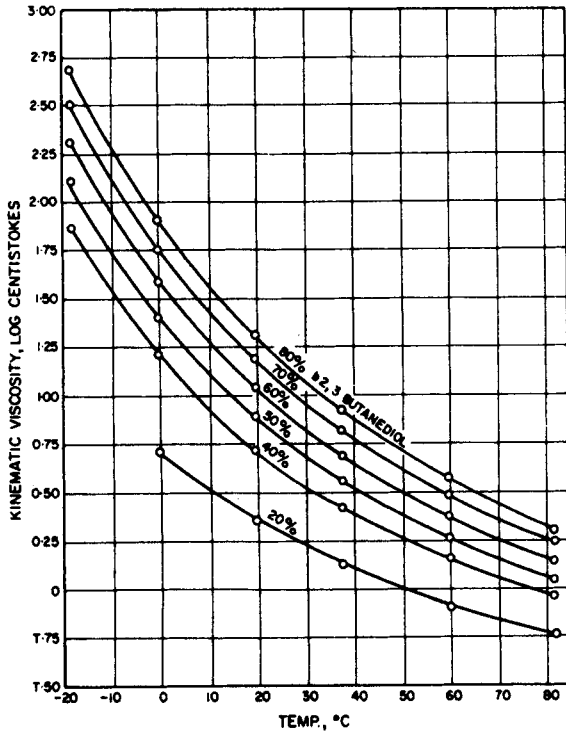


Table 7.63: Kinematic Viscosity of Aqueous levo-2,3-Butanediol Solutions in Relation to Concentration and Temperature (32)

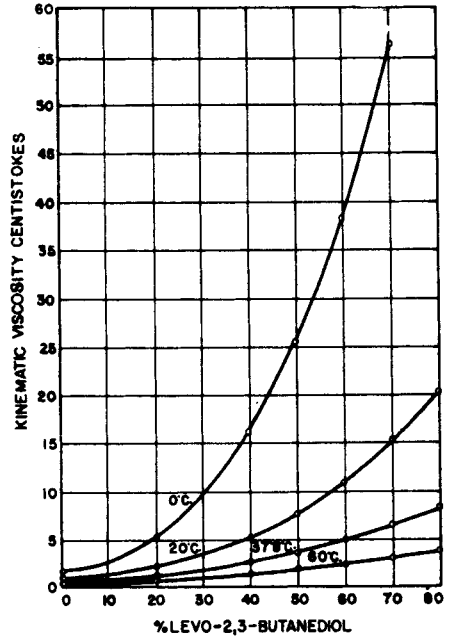


Table 7.64: Kinematic Viscosity of 60% levo-2,3-Butanediol, Glycerol and Ethylene Glycol Solutions at Low Temperatures (32)

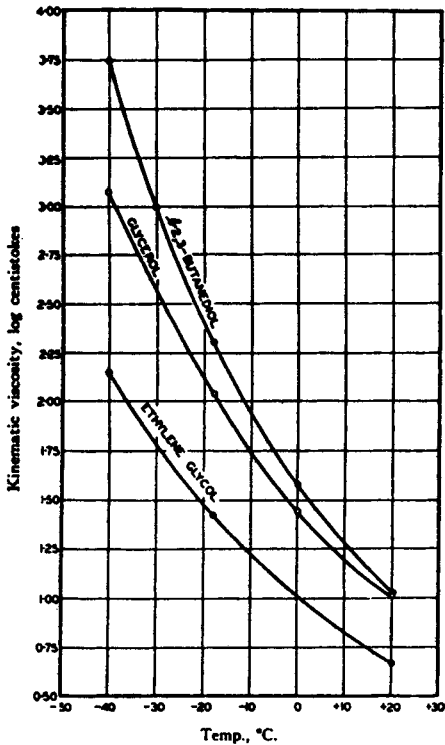


Table 7.65: Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Ethanol Solutions at 20°C, Expressed in Centistokes (32)

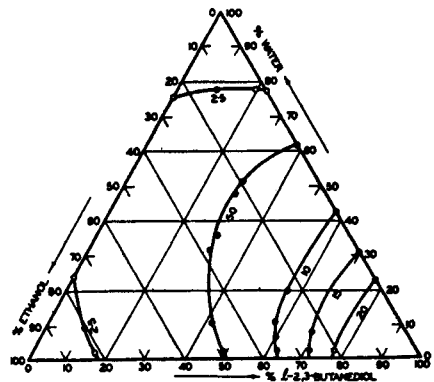


Table 7.66: Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Methanol Solutions at 20°C, Expressed in Centistokes (32)

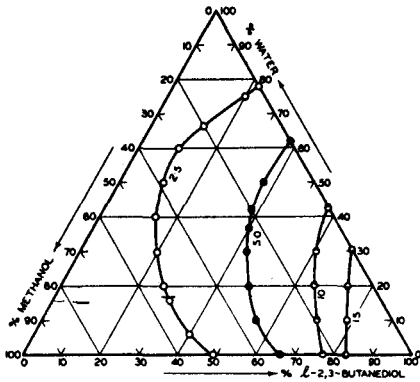


Table 7.67: Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Ethylene Glycol Solutions in 20°C, Expressed in Centistokes (32)

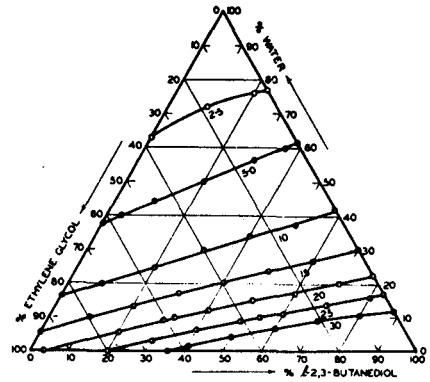


Table 7.68: Kinematic Viscosity of Aqueous levo-2,3-Butanediol-Tetrahydrofuryl Alcohol Solutions at 20°C, Expressed in Centistokes (32)

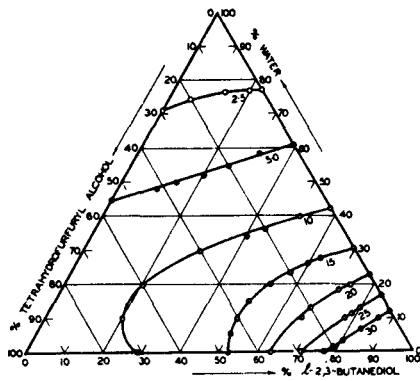


Table 7.69: Absolute Viscosity of Aqueous Solutions of Ethylene Glycol, levo-2,3-Butanediol, meso-dextro-2,3-Butanediol and Glycerol at 20°C (32)

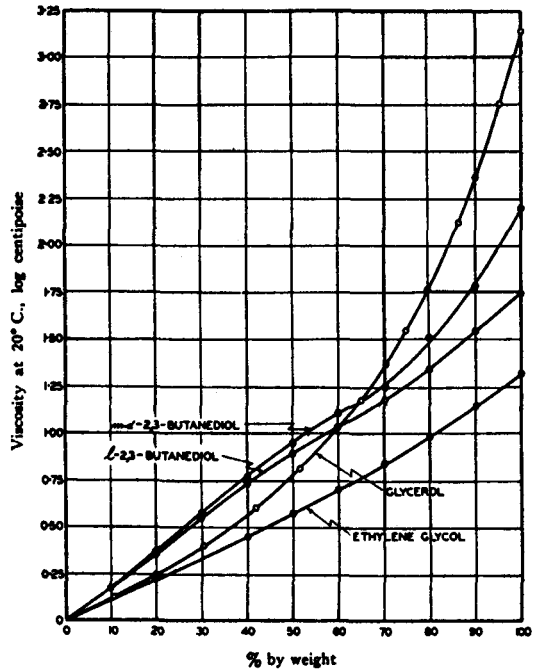


Table 7.70: Optical Rotatory Power of Aqueous *levo*-2,3-Butanediol Solutions at 20°C (32)

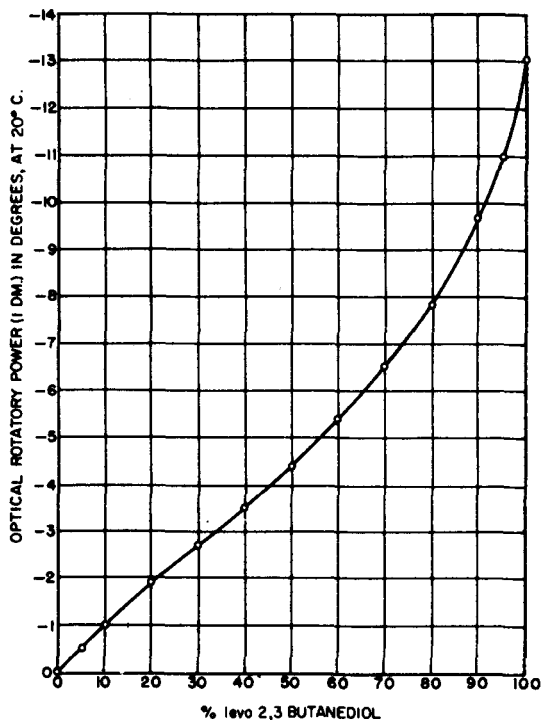


Table 7.71: Effects of Concentration and Temperature on the Specific Rotatory Power of Aqueous *levo*-2,3-Butanediol Solutions (32)

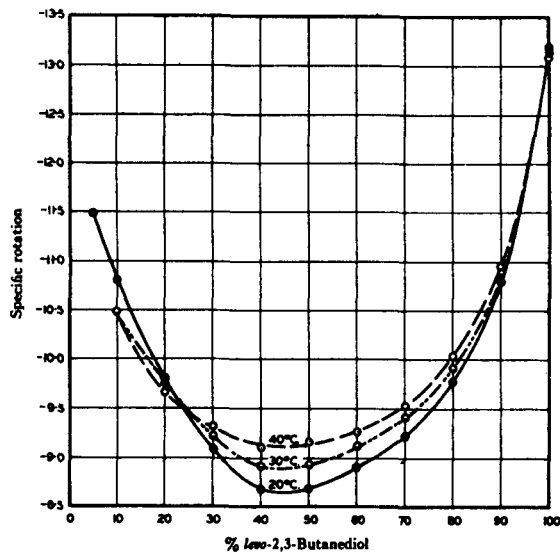


Table 7.72: Refractive Indices of Aqueous *levo*-2,3-Butanediol Solutions at Different Temperatures (32)

| Diol, % | Temperature, °C | | | |
|---------|-----------------|--------|--------|--------|
| | 20 | 25 | 30 | 35 |
| 0 | 1.3330 | 1.3325 | 1.3319 | 1.3312 |
| 10.0 | 1.3450 | 1.3445 | 1.3437 | 1.3429 |
| 19.9 | 1.3574 | 1.3566 | 1.3557 | 1.3549 |
| 29.9 | 1.3700 | 1.3689 | 1.3677 | 1.3666 |
| 39.9 | 1.3820 | 1.3807 | 1.3793 | 1.3779 |
| 49.9 | 1.3930 | 1.3915 | 1.3900 | 1.3885 |
| 59.6 | 1.4027 | 1.4012 | 1.3997 | 1.3982 |
| 70.0 | 1.4115 | 1.4098 | 1.4082 | 1.4065 |
| 79.7 | 1.4197 | 1.4180 | 1.4162 | 1.4146 |
| 89.7 | 1.4264 | 1.4247 | 1.4229 | 1.4212 |
| 99.5 | 1.4322 | 1.4302 | 1.4283 | 1.4264 |

Table 7.73: Refractive Indices of Aqueous Solutions of *meso*- and *levo*-2,3-Butanediol at 25°C (32)

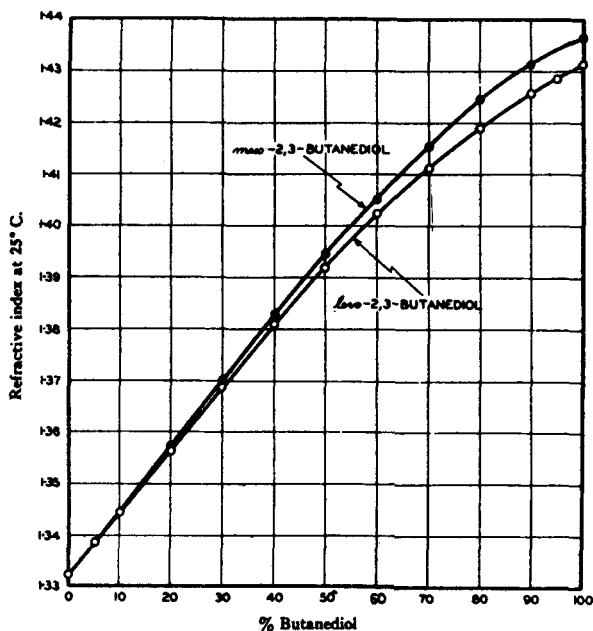


Table 7.74: Specific Gravity of Aqueous *levo*-2,3-Butanediol Solutions at 20°, 30°, and 40°C (32)

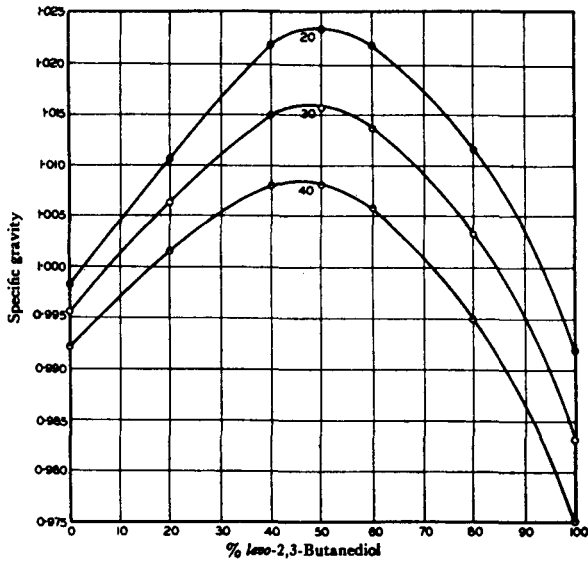


Table 7.75: Specific Gravity of Aqueous *meso*-2,3-Butanediol Solutions at 20°, 30°, and 40°C (32)


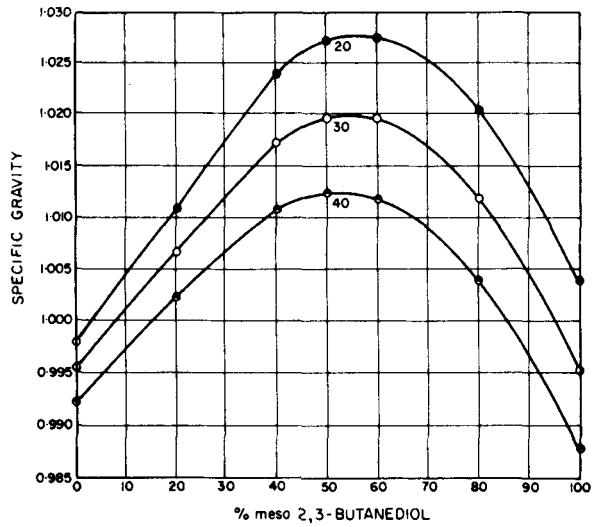


Table 7.76: Surface Tension of Aqueous Solutions of *levo*-2,3-Butanediol and Ethylene Glycol (32)

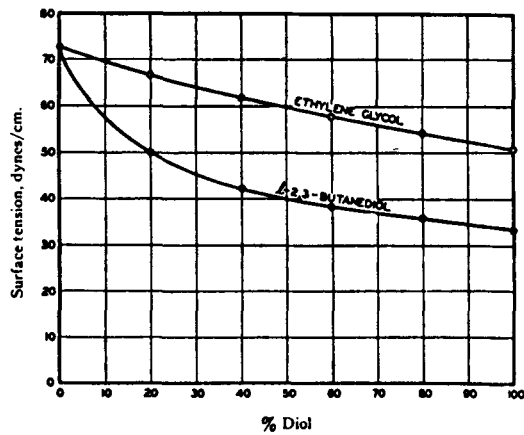

BUTANEDIOLS

Table 7.77: Refractive Indices of Aqueous Butanediol Solutions at 20°, 30°, and 40°C (32)

| 1,2-Butanediol | | | | 1,3-Butanediol | | | | 1,4-Butanediol | | | |
|----------------|------------------------------|------------------------------|------------------------------|----------------|------------------------------|------------------------------|------------------------------|----------------|------------------------------|------------------------------|------------------------------|
| Glycol, % | n _D ²⁰ | n _D ³⁰ | n _D ⁴⁰ | Glycol, % | n _D ²⁰ | n _D ³⁰ | n _D ⁴⁰ | Glycol, % | n _D ²⁰ | n _D ³⁰ | n _D ⁴⁰ |
| 10.13 | 1.3452 | 1.3436 | 1.3420 | 9.51 | 1.3442 | 1.3430 | 1.3417 | 10.51 | 1.3444 | 1.3432 | 1.3420 |
| 19.69 | 1.3572 | 1.3553 | 1.3534 | 19.18 | 1.3552 | 1.3548 | 1.3520 | 20.01 | 1.3563 | 1.3550 | 1.3532 |
| 29.72 | 1.3693 | 1.3672 | 1.3650 | 30.20 | 1.3688 | 1.3670 | 1.3649 | 30.02 | 1.3682 | 1.3671 | 1.3659 |
| 39.79 | 1.3813 | 1.3788 | 1.3760 | 39.94 | 1.3800 | 1.3778 | 1.3755 | 39.86 | 1.3802 | 1.3790 | 1.3768 |
| 49.68 | 1.3920 | 1.3892 | 1.3865 | 49.45 | 1.3920 | 1.3895 | 1.3870 | 49.70 | 1.3935 | 1.3918 | 1.3898 |
| 59.88 | 1.4027 | 1.4000 | 1.3966 | 60.02 | 1.4040 | 1.4012 | 1.3983 | 59.95 | 1.4052 | 1.4042 | 1.4020 |
| 69.37 | 1.4120 | 1.4090 | 1.4058 | 70.10 | 1.4145 | 1.4118 | 1.4090 | 70.15 | 1.4183 | 1.4167 | 1.4140 |
| 79.73 | 1.4212 | 1.4185 | 1.4165 | 80.20 | 1.4242 | 1.4215 | 1.4185 | 79.85 | 1.4283 | 1.4258 | 1.4236 |
| 89.40 | 1.4297 | 1.4265 | 1.4230 | 89.67 | 1.4323 | 1.4295 | 1.4264 | 90.10 | 1.4370 | 1.4349 | 1.4318 |
| 100 | 1.4375 | 1.4347 | 1.4310 | 100 | 1.4398 | 1.4370 | 1.4331 | 100 | 1.4451 | 1.4425 | 1.4395 |

Table 7.78: Kinematic Viscosity of Aqueous Butanediol Solutions at 20° and 40°C, in Centistokes (32)

| 1,2-Butanediol | | | 1,3-Butanediol | | | 1,4-Butanediol | | |
|----------------|-----------|-------|----------------|-----------|-------|----------------|-----------|--------|
| Glycol, % | Viscosity | | Glycol, % | Viscosity | | Glycol, % | Viscosity | |
| | 20°C | 40°C | | 20°C | 40°C | | 20°C | 40°C |
| 10.125 | 1.520 | 0.910 | 9.505 | 1.51 | 0.91 | 10.51 | 1.446 | 0.89 |
| 19.69 | 2.187 | 1.243 | 19.175 | 2.295 | 1.291 | 20.01 | 2.109 | 1.218 |
| 29.72 | 3.310 | 1.690 | 30.20 | 3.529 | 1.818 | 30.02 | 2.867 | 1.6602 |
| 39.79 | 4.802 | 2.311 | 39.94 | 5.419 | 2.593 | 39.86 | 4.258 | 2.382 |
| 49.685 | 6.739 | 3.088 | 49.45 | 8.313 | 3.695 | 49.70 | 6.57 | 3.202 |
| 59.88 | 9.72 | 4.227 | 60.02 | 13.44 | 5.600 | 59.95 | 10.20 | 4.707 |
| 69.37 | 13.82 | 5.744 | 70.1 | 21.57 | 8.413 | 70.15 | 18.48 | 7.982 |
| 79.73 | 21.37 | 8.372 | 80.20 | 35.36 | 12.88 | 79.85 | 30.63 | 12.62 |
| 89.40 | 35.54 | 12.57 | 89.67 | 63.43 | 21.21 | 90.1 | 54.35 | 21.40 |
| 100 | 68.0 | 21.25 | 100 | 129.8 | 39.70 | 100 | 87.62 | 33.8 |

2-BUTENE-1,4-DIOL




Table 7.79: Physical Properties of 2-Butene-1,4-diol (32)

| Physical Properties of Technical Cis-2-Butene-1,4-Diol | Purified Cis-2-Butene-1,4-Diol |
|--------------------------------------------------------|-------------------------------------------------------------------|
| Boiling point range | 232-235° C Boiling point at 760 mm. Hg 234° C |
| Fire point (Cleveland open cup) | 270° F 100 mm. Hg 177° C |
| Flash point (Cleveland open cup) | 263° F 20 mm. Hg 140° C |
| | 10 mm. Hg 122° C |
| | 5 mm. Hg 109° C |
| Freezing point range | 4.0-7.0° C Freezing point 12.5° C |
| Molecular weight | 88.1 Refractive index, n _D ²⁵ 1.4768-1.4773 |
| Refractive index, n _D ²⁵ | 1.476-1.478 Specific gravity at 25/15° C 1.070 |
| Specific gravity at 25/15° C | 1.067-1.074 |
| Viscosity at 68° F | 22 cp. |
| 100° F | 10.8 cp. |
| 210° F | 2.5 cp. |

2-BUTYNE-1,4-DIOL




Table 7.80: Physical Properties of 2-Butyne-1,4-Diol (32)

| Physical Properties of Commercial 2-Butyne-1,4-Diol | |
|-----------------------------------------------------|------------------------------------------------------------------------------------|
| Acetals (as CH ₂ O) | Less than 0.6% |
| Aldehydes (as CH ₂ O) | Less than 0.5% |
| Butynediol content | 35 ± 1% |
| Freezing point | Less than -7° C |
| Methanol (by distillation) | 0.0% |
| pH | 4 to 6 |
| Propargyl alcohol | Less than 0.5% |
| Saponification No. (as mg. KOH/g. product) | Less than 6 |
| Specific gravity, d ₄ ²⁵ | 1.04 to 1.1 |
| Weight per gallon | 8.7 lb. |
| Purified 2-Butyne-1,4-Diol | |
| Boiling point at 10 mm. Hg | 140° C |
| 100 mm. Hg | 194° C |
| Crystal structure system | Orthorhombic |
| principal forms | Basal pinacoids and prisms with crystals flattened parallel to the basal pinacoids |
| Melting point | 57.5° C |
| Refractive indices n _D ²⁵ | α ± 1.450 - 0.002 β ± 1.528 - 0.002 |
| Solubility (g./100 ml. solvent) | |
| in water at 0° C | 121 |
| in water at 25° C | 374 |
| in ethyl alcohol at 25° C | 83 |
| in acetone at 25° C | 70 |
| in ethyl ether at 25° C | 2.6 |
| in benzene at 25° C | 0.04 |

1,5-PENTANEDIOL

Pentamethylene Glycol


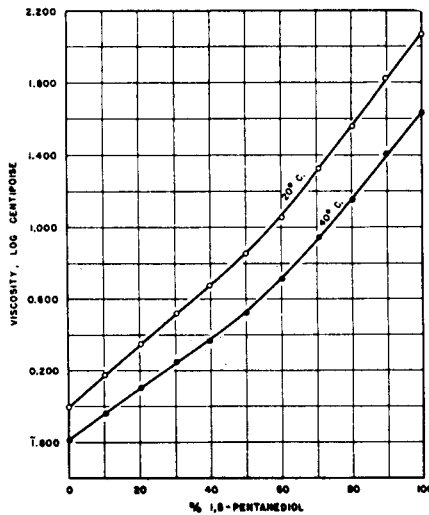
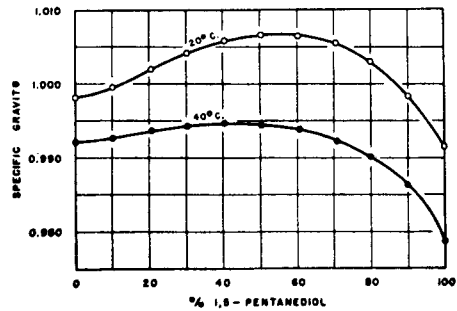


Table 7.81: Physical Properties of 1,5-Pentanediol (32)

| | |
|--------------------------------------|----------------|
| Boiling point at 760 mm. Hg | 242.5° C |
| 50 mm. Hg | 166° C |
| 10 mm. Hg | 134° C |
| Coefficient of expansion at 55° C | 0.00061/°C |
| Flash point (open cup) | 265° F |
| Freezing point | -15.6° C |
| Molecular weight | 104.16 |
| Refractive index at 20° C | 1.4489 |
| Specific gravity at 20/20° C | 0.9921 |
| Surface tension at 20° C | 43.2 dynes/cm. |
| Vapor pressure at 20° C | Less than 0.01 |
| Viscosity at 0° C (absolute) | 415 cp. |
| 20° C | 128 cp. |
| 40° C | 48 cp. |
| Weight per gallon at 20° C (average) | 8.23 lb. |

Table 7.82: Absolute Viscosity of Aqueous 1,5-Pentanediol Solutions at 20° and 40°C (32)**Table 7.83: Specific Gravity of Aqueous 1,5-Pentanediol Solutions at 20° and 40°C (32)****2,4-PENTANEDIOL**


Amylene Glycol

CH3CHOHCH2CHOHCH3**Table 7.84: Physical Properties of 2,4-Pentanediol (32)**

| | |
|---------------------------------------|----------------------------|
| Boiling point at 760 mm. Hg | 199° C |
| Flash point, Cleveland open cup | 210° F |
| Melting point | 45° C |
| Molecular weight | 104.15 |
| Specific gravity (apparent), 20/20° C | 0.964 (supercooled liquid) |

NEOPENTYL GLYCOL

"NPG" Glycol
2,2-Dimethyl-1,3-Propanediol

**Table 7.85: Physical Properties of Neopentyl Glycol (41)**

| | | | |
|-----------------------------------------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------|
| Empirical Formula | $\text{C}_5\text{H}_{12}\text{O}_2$ | Bulk Density, 21°C., g./cc. | 1.06 |
| Molecular Weight (calcd.) | 104.15 | lb./cu. ft. | 66.4 |
| Equivalent Weight (theor.) | 52.08 | Color, APHA, ppm., max. | 25* |
| Acid Number | 0.01 | Critical Pressure, atm. (estd.) | 36 |
| Hydroxyl Number (average) | 1075 | Critical Temp., °K. (estd.) | 653 |
| Saponification Number | 0.14 | Critical Volume, cu. ft./lb. (estd.) | 0.059 |
| Acid, as acetic acid, wt. % | 0.05 max. | cc./g. (estd.) | 3.683 |
| Aldehyde, as hydroxypivaldehyde, wt. % | 0.70 max. | Crystal Density, 25°C., g./cc. | 1.11 |
| Ester, as neopentyl hydroxypivaldehyde, wt. % | 1.50 max. | lb./cu. ft. | 69.3 |
| Water, wt. % | 1.00 max. | Crystallization Point, °C. | 128 (same as m.p.) |
| Appearance | White, crystalline solid | Effect on Metals: No corrosive effect on mild steel, galvanized steel or tinplate. Slightly corrosive to aluminum. | |
| Autoignition Temp. (ASTM D286-30), °F. | 750 | Fire Point (Cleveland Open Cup), °F. | 305 |
| | 399 | °C. | 151.6 |
| Boiling Range, °C., at 3.35 mm. Hg | 93-94 | Flash Point (Cleveland Open Cup), °F. | 305 |
| | 25 mm. Hg | °C. | 151.6 |
| | 760 mm. Hg | | |
| | 210 | | |

(continued)

Table 7.85: (continued)

| | |
|----------------------------------------------|------------|
| Heat Capacity, Solid, B.t.u./lb./°F. (estd.) | 0.383 |
| cal., g./g./°C. (estd.) | 0.383 |
| Heat of Combustion, B.t.u./lb. (estd.) | -12,917 |
| cal., g./g. (estd.) | -7,176 |
| B.t.u./lb. mole | -1,345,306 |
| cal., g./g. mole | -747,391 |
| Heat of Fusion, B.t.u./lb. (estd.) | 90 |
| cal., g./g. (estd.) | 50 |

*Molten

Solubility

| Solvent | Solubility, g./100 g. of Solvent, at | | |
|----------------------------|--------------------------------------|-------|-------|
| | 5°C. | 15°C. | 60°C. |
| Water | 173 | 181 | 400 |
| Acetone | 23 | 60 | 439 |
| Benzene | 0.6 | 12 | 199 |
| Cyclohexane | 0.0 | <1 | 0.4 |
| Hexane | 0.5 | — | 1.8 |
| Isobutyl alcohol | 87.5 | — | — |
| Methyl ethyl ketone | 25 | 41 | >309 |
| Methyl isobutyl ketone | 7.9 | 14 | 76 |
| Toluene | 0 | <1 | 39 |
| Trichloroethylene | 0.2 | <1 | 117 |
| Specific Gravity, 25°/4°C. | 1.066 | | |

PENTANEDIOLS

Table 7.86: Kinematic Viscosity of Aqueous Pentanediol Solutions at 20° and 40°C, in Centistokes (32)

| 1, 2-Pentanediol | | | 1, 5-Pentanediol | | |
|------------------|-----------|--------|------------------|-----------|--------|
| Glycol, % | Viscosity | | Glycol, % | Viscosity | |
| | 20° C | 40° C | | 20° C | 40° C |
| 10.36 | 1.5475 | 0.9275 | 10.17 | 1.516 | 0.9210 |
| 19.97 | 2.264 | 1.258 | 20.09 | 2.246 | 1.277 |
| 30.18 | 2.88 | 1.538 | 30.42 | 3.300 | 1.795 |
| 40.13 | 4.06 | 2.08 | 39.82 | 4.735 | 2.331 |
| 50.02 | 5.73 | 2.82 | 50.04 | 7.08 | 3.350 |
| 59.96 | 8.02 | 3.742 | 60.12 | 11.30 | 5.250 |
| 69.97 | 13.03 | 5.725 | 70.45 | 20.9 | 8.842 |
| 79.85 | 19.85 | 8.138 | 80.20 | 36.22 | 14.46 |
| 90.05 | 38.20 | 13.62 | 89.75 | 66.25 | 25.70 |
| 100 | 68.55 | 20.82 | 100 | 115.65 | 43.58 |

Table 7.87: Refractive Indices of Aqueous Pentanediol Solutions at 20° and 40°C (32)

| 1, 2-Pentanediol | | | 1, 5-Pentanediol | | |
|------------------|------------|------------|------------------|------------|------------|
| Glycol, % | n_D^{20} | n_D^{40} | Glycol, % | n_D^{20} | n_D^{40} |
| | 10.36 | 1.3452 | | 1.3430 | 10.17 |
| 19.97 | 1.3585 | | 20.29 | | 1.3543 |
| 20.64 | | 1.3500 | 20.59 | 1.3572 | |
| 30.94 | 1.3705 | 1.3682 | 30.42 | 1.3700 | 1.3682 |
| 41.26 | 1.3830 | 1.3800 | 40.43 | 1.3833 | 1.3800 |
| 51.05 | 1.3930 | 1.3895 | 50.45 | 1.3960 | 1.3910 |
| 61.28 | 1.4050 | 1.3990 | 60.51 | 1.4080 | 1.4033 |
| 70.00 | 1.4120 | 1.4068 | 70.73 | 1.4198 | 1.4159 |
| 80.04 | 1.4223 | 1.4182 | 80.08 | 1.4304 | 1.4260 |
| 90.05 | 1.4320 | 1.4254 | 90.15 | 1.4417 | 1.4367 |
| 100 | 1.4390 | 1.4326 | 100 | 1.4500 | 1.4448 |

1,6-HEXANEDIOL




Table 7.88: Physical Properties of 1,6-Hexanediol (32)

This glycol is very soluble in water.

| | |
|---------------------------------|--------|
| Boiling point at 760 mm. Hg | 243° C |
| Flash point, Cleveland open cup | 265° F |
| Melting point | 42° C |
| Molecular weight | 118.17 |
| Specific gravity (apparent) | 0.958 |

2,5-HEXANEDIOL




Table 7.89: Physical Properties of 2,5-Hexanediol (32)

This six-carbon glycol is the most viscous of the family. It is completely miscible with water.

| | |
|-------------------------------------------|------------------------------|
| Boiling point at 760 mm. Hg | 220.8° C |
| Flash point, Cleveland open cup | 220° F |
| Freezing point | Sets to a glass below -50° C |
| Molecular weight | 118.17 |
| Refractive index at 20° C, n_D | 1.4474 |
| Specific gravity (apparent) at 45/15.6° C | 0.9617 |
| Viscosity at 20° C | 37 cp. |

HEXYLENE GLYCOL

2-Methyl-2,4-Pentanediol
Methyl Amylene Glycol
Diacetone Glycol




Table 7.90: Physical Properties and Specifications of Hexylene Glycol (32)


| | | | |
|------------------------------------------------------------|---------------------------------------|----------------------------------------------|-------------------------------|
| Acidity as acetic acid | 0.005% by wt., max. | Density (in vacuo) at 0° C | 0.9366 g./cc. |
| Boiling point at 760 mm. Hg | 198.27° C | 20° C | 0.0216 g./cc. |
| | 197.1° C | 30° C | 0.9145 g./cc. |
| at 50 mm. Hg | 125° C | dt/dp at the boiling point | 0.045° C/mm. |
| at 10 mm. Hg | 94° C | Flash point, Cleveland open cup | 210° F |
| Color, Pt-Co (Hazen) standard | 15, max. | | 215° F |
| Critical properties, P_c | 499 psia | Freezing point | Becomes semisolid at -40° C |
| T_c | 1221° R | | without crystalline formation |
| V_c | 6.78 ft./mole | | Sets to glass below -50° C |
| Density (in air) at 760 mm. Hg | 0.928 g./cc. | Distillation range (ASTM D-1078) | 195 to 200° C |
| Density in air at any temp. may be obtained from equation: | $D_t = 0.952 - 4.02 \times 10^{-4} t$ | (95% will distill between 196° C and 199° C) | |

(continued)

Table 7.90: (continued)


| | |
|-----------------------------------------------------------------------------|------------------------------------------------------------------------|
| Latent heat of vaporization | 12.3 x 10 ³ cal./g.-mole 104.1 g.-cal./g. 208 Btu/lb. |
| Molecular weight | 118.17 |
| Pour point | -37.2° C (35° F) |
| Refractive dispersion, (N _F - N _C) x 10 ⁴ | 72.5 |
| Refractive index, n _D ²⁰ | 1.4276 |
| n _D ³⁰ | 1.4243 |
| Specific gravity at 20/4° C | 0.9216 |
| 20/20° C | 0.9234 |
| Δ Sp. Gr./Δ t, 0 to 55° C | 0.00097 |
| Surface tension, 20° C | 33.1 dynes/cm. |
| Vapor pressure, 20° C | 0.05 mm. Hg |
| Viscosity (absolute), 20° C | 34.4 cp. |
| Water at 20° C | Miscible without turbidity with 19 vols. of n-heptane |
| Weight per gallon at 20° C | 7.69 lb. |

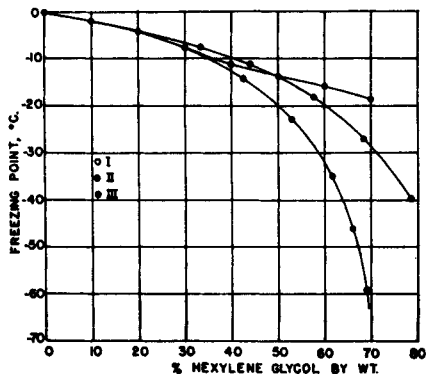Table 7.91: Freezing Points of Hexylene Glycol-Water Mixtures (32)



Freezing Points of Hexylene Glycol (2-Methyl-2,4-pentanediol)-Water Mixtures. (I) Observed; (II) Theoretical, without hydration; (III) Theoretical, with complete hydration.

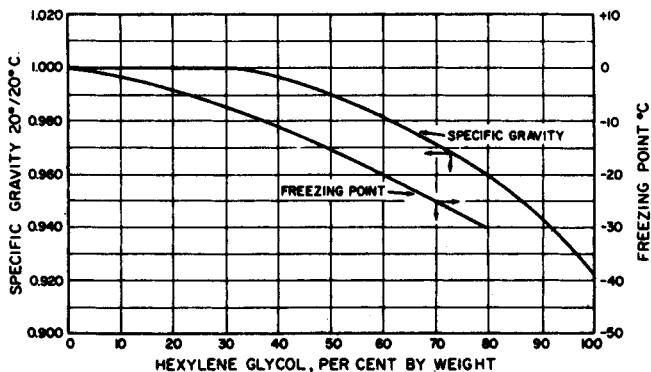Table 7.92: Specific Gravity and Freezing Point of Hexylene Glycol-Water Mixtures (14)




PINACOL


Pinacone

2,3-Dimethyl-2,3-Butanediol

Tetramethylethylene Glycol

**Table 7.93: Physical Properties of Pinacol (32)**

| | |
|-----------------------------------|----------------------------|
| Boiling point at 760 mm. Hg | 174.4° C |
| Melting point | 41.1° C |
| Molecular weight | 118.17 |
| The Hexahydrate | |
| Melting point | 45.4° C |
| Specific gravity, d ¹⁵ | 0.967 (supercooled liquid) |


2,2-DIETHYL-1,3-PROPANEDIOL**Table 7.94: Physical Properties of 2,2-Diethyl-1,3-Propanediol (32)**

| | |
|--------------------------------------|------------|
| Boiling point at 10 mm. Hg | 125° C |
| Freezing point | 61.3° C |
| Molecular weight | 132.20 |
| Solubility in water at 20° C | 25% by wt. |
| Specific gravity (apparent) at 20° C | 1.052 |

2-ETHYL-1,3-HEXANEDIOL

Ethohexadiol

Octanediol

**Table 7.95: Physical Properties of 2-Ethyl-1,3-Hexanediol (32)**

| | |
|-----------------------------------------|----------------------------|
| Acidity as acetic acid | 0.01% by wt., max. |
| Boiling point at 760 mm. Hg | 243.1° C |
| Color, Pt-Co | 15, max. |
| Distillation range | 241 to 249° C |
| Flash point, open cup | 265° F |
| Freezing point | Sets to glass below -40° C |
| Molecular weight | 146.22 |
| Refractive index, 20° C, n _D | 1.4511 |
| Solubility in water, 20° C | 4.2% by wt. |
| Solubility of water in, 20° C | 11.7% by wt. |
| Specific gravity, 20/20° C | 0.9422 |
| Suspended matter | Substantially free |
| Vapor pressure, 20° C | Less than 0.01 mm. Hg |
| Viscosity, 20° C | 323 cp. |
| Weight per gallon (average), 20° C | 7.83 lb. |

2,5-DIMETHYL-3-HEXYNE-2,5-DIOL

Dimethyl Hexynediol




Table 7.96: Physical Properties of 2,5-Dimethyl-3-Hexyne-2,5-diol (32)

| | |
|--------------------------|----------------|
| Boiling point | 205-6° C |
| Freezing point | 94-5° C |
| Surface tension at 25° C | |
| 5% in water | 41.2 dynes/cm. |
| 0.1% in water | 60.9 dynes/cm. |
| 0.01% in water | 66.9 dynes/cm. |

1,4-CYCLOHEXANEDIMETHANOL




Table 7.97: Properties of 1,4-Cyclohexanedimethanol


(approx. 70% trans-, 30% cis-isomers)

| | | | |
|--------------------------------|-------------------------------------|---------------------------|-------|
| Empirical formula | $\text{C}_8\text{H}_{16}\text{O}_2$ | Specific gravity | |
| Molecular weight (calcd.) | 144.21 | Liquid: | |
| Equivalent weight | 72.1 | 25°/4°C. (super-cooled) | 1.026 |
| Crystallization point, °C. | 35 | 50°/4°C. (super-cooled) | 1.010 |
| Pour point, °C. (super-cooled) | 10 | 100°/4°C. (molten) | 0.978 |
| Melting point, °C. | 41-61 | 150°/4°C. | 0.946 |
| cis isomer | 43 | 200°/4°C. | 0.914 |
| trans isomer | 70 | Solid: | |
| Boiling point, °C. | | 27°/4°C. | 1.069 |
| 760 mm. | 285 | Density | |
| 100 mm. | 216 | Liquid, lb./gal.: | |
| 10 mm. | 160 | 70°F. (super-cooled) | 8.59 |
| 1 mm. | 118 | 100°F. (super-cooled) | 8.49 |
| cis isomer | 288 | 200°F. | 8.20 |
| trans isomer | 284 | 300°F. | 7.90 |
| | | 400°F. | 7.60 |
| | | Solid, 70°F., lb./cu. ft. | 66.74 |


(continued)

Table 7.97: (continued)

| | | | |
|----------------------------------------------|----------------------------------|----------------------------|--------------------------|
| Acid number | <0.03 | | |
| Hydroxyl number | 22.89 | | |
| Saponification number | 0.91 | | |
| Refractive index, n_D^{20} (super-cooled) | 1.4893 | | |
| Flash point, Cleveland Open Cup, °F. | 165 | | |
| Fire point, Cleveland Open Cup, °F. | 255 | | |
| Solubility, 25°C., wt. % | | | |
| in water | miscible | | |
| water in | miscible | | |
| in methanol | miscible | | |
| in ethanol | miscible | | |
| in diethyl ether | 2.5 | | |
| in VM & P naphtha | <1 | | |
| in benzene | <1 | | |
| in acetone | 56.4 | | |
| Heat capacity, (estd.) | | | |
| Liquid: | Temp., °C. | C_v , B. t. u./lb. °F. | C_p , B. t. u./lb. °F. |
| | 50 | 0.505 | 0.648 |
| | 100 | 0.553 | 0.716 |
| | 150 | 0.609 | 0.794 |
| | 200 | 0.669 | 0.877 |
| Solid: | C_p , B. t. u./lb. °F. (estd.) | | 0.410 |
| Thermal Conductivity (estd.) | | | |
| Vapor: | Temp., °C. | k , B. t. u./hr. ft. °F. | |
| | 50 | 0.00602 | |
| | 100 | 0.00772 | |
| | 150 | 0.00960 | |
| | 200 | 0.01229 | |
| Liquid: | Temp., °C. | k , B. t. u./hr. ft. °F. | |
| | 50 | 0.1118 | |
| | 100 | 0.1229 | |
| | 150 | 0.1280 | |
| | 200 | 0.1311 | |
| Critical temperature, T_c , °C. (estd.) | | | |
| cis isomer | 457 | | |
| trans isomer | 451 | | |
| Critical pressure, P_c , atm. (estd.) | 34.85 | | |
| Critical volume, V_c , cu. ft./lb. (estd.) | 0.0506 | | |
| Viscosity: | Temp., °F. | cs. | S. U. S. |
| | 75 | 1421.6 | 6568 |
| | 100 | 478.1 | 2209 |
| | 125 | 183.4 | 847 |

p-XYLYLENE GLYCOL ω, ω' -Dihydroxy-p-Xylene**Table 7.98: Physical Properties of p-Xylylene Glycol (32)**


| | |
|----------------------------------|--------------|
| Chlorine (total) | 0.6% max. |
| Flash point (Cleveland open cup) | 370° F |
| Molecular weight | 138.16 |
| Purity | 95% min. |
| Set point | 115-117.6° C |
| Specific gravity at 117° C | 1.100 |
| Toluene insolubles | 0.5% max. |

2-ETHYL-2-BUTYL-1,3-PROPANEDIOL**Table 7.99: Physical Properties of 2-Ethyl-2-Butyl-1,3-Propanediol (32)**

| | |
|-----------------------------------------|-------------|
| Boiling point at 100 mm. Hg | 195° C |
| Melting point | 41.4° C |
| Molecular weight | 160.25 |
| Solubility in water at 20° C | 0.8% by wt. |
| Specific gravity (apparent) at 50/20° C | 0.931 |

3,6-DIMETHYL-4-OCTYNE-3,6-DIOL

Dimethyl Octynediol

**Table 7.100: Physical Properties of 3,6-Dimethyl-4-Octyne-3,6-diol (32)**

| | |
|----------------------------|----------------|
| Boiling point at 20 mm. Hg | 135° C |
| Freezing point | 55.6° C |
| Surface tension at 25° C | |
| 5% in water | 30.7 dynes/cm. |
| 0.1% in water | 55.3 dynes/cm. |
| 0.01% in water | 63.9 dynes/cm. |

THIODIGLYCOL

Thiodiethylene Glycol
 β, β' -Dihydroxyethyl Sulfide





Table 7.101: Physical Properties of Thiodiglycol (32)

| | | | |
|------------------------------------|-----------------------------|---------------------------------|-----------------------|
| Acidity | 1.0 mg. KOH/g. sample, max. | Heat of vaporization at 1 atm. | 235 Btu/lb. |
| Boiling point at 760 mm. Hg | 283° C | Molecular weight | 122.19 |
| 50 mm. Hg | 194° C | Refractive index at 20° C n_D | 1.5217 |
| Δ Boiling point/ Δ p | 0.055° C/mm. Hg | Specific gravity | 1.1847 |
| Color (Pt-Co) | 200 max. | Δ Sp. Gr./ Δ t | 0.00072 |
| Coefficient of expansion at 55° C | 0.00061/° C | Vapor pressure at 20° C | Less than 0.01 mm. Hg |
| Flash point (open cup) | 320° F | Viscosity at 20° C | 65.2 cp. |
| Freezing point | -10° C | Weight per gallon at 20° C | 9.85 lb. |
| | | at 15.56° C | 9.88 lb. |

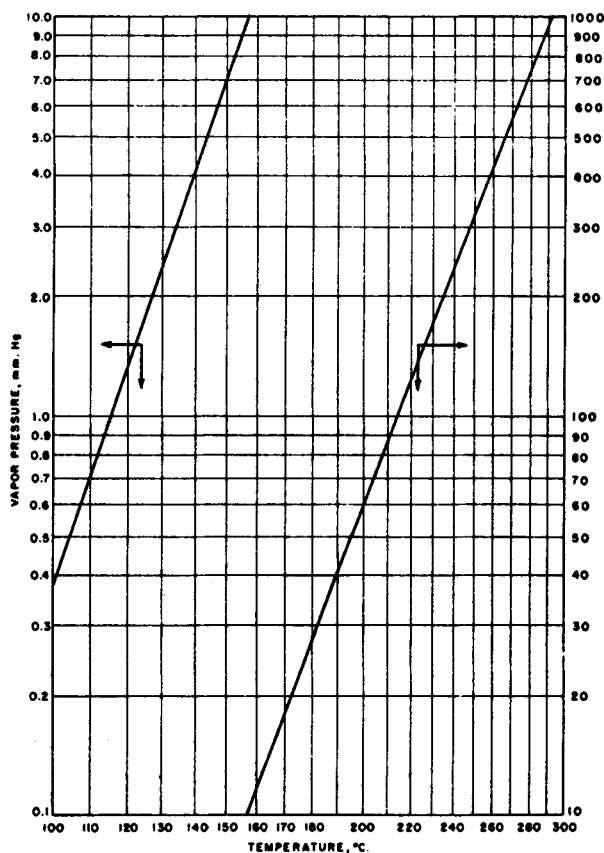Table 7.102: Vapor Pressure of Thiodiglycol at Various Temperatures (19)



MISCELLANEOUS GLYCOLS

Table 7.103: Hydrates of Aliphatic Glycols (32)

| Glycol | | | | Hydrate | |
|-------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------|---------------------------------------------|
| Number of C Atoms | Name | Skeletal Structural Formula | M.p. (°C) | M.p. (°C) | n in R(OH) ₂ × nH ₂ O |
| 2 | Ethylene glycol | HO-C-C-OH | -12.9 | -49.6 (cong.) | 2 |
| 2 | Ethylene glycol | HO-C-C-OH | -12.9 | -40.7 | 0.67 |
| 4 | meso-2,3-Butanediol | $\begin{array}{c} \text{HO} \quad \text{OH} \\ \quad \\ \text{C}-\text{C}-\text{C}-\text{C} \end{array}$ | 34.4 | 16.8 | 6(5)† |
| 4 | ±2,3-Butanediol | $\begin{array}{c} \text{HO} \quad \text{OH} \\ \quad \\ \text{C}-\text{C}-\text{C}-\text{C} \end{array}$ | 7.6 | --- | 0 |
| 5 | 2-Methyl-2,3-butanediol | $\begin{array}{c} \text{HO} \quad \text{OH} \\ \quad \\ \text{C}-\text{C}-\text{C}-\text{C} \\ \\ \text{C} \end{array}$ | liq. | 23.5-4 | 6 |
| 6 | Pinacol | $\begin{array}{c} \text{HO} \quad \text{OH} \\ \quad \\ \text{C}-\text{C}-\text{C}-\text{C} \\ \quad \\ \text{C} \quad \text{C} \end{array}$ | 41.4 | 41.25 | 1 |
| 6 | Pinacol | $\begin{array}{c} \text{HO} \quad \text{OH} \\ \quad \\ \text{C}-\text{C}-\text{C}-\text{C} \\ \quad \\ \text{C} \quad \text{C} \end{array}$ | 41.4 | 46.5 | 6 |
| 8 | 2,5-Dimethyl-2,5-hexanediol | $\begin{array}{c} \text{HO} \quad \quad \quad \text{OH} \\ \quad \quad \quad \\ \text{C}-\text{C}-\text{C}-\text{C}-\text{C}-\text{C} \\ \quad \quad \quad \\ \text{C} \quad \quad \quad \text{C} \end{array}$ | 92 | 41-2 | 6 |
| 9 | 2,6-Dimethyl-2,6-heptanediol | $\begin{array}{c} \text{HO} \quad \quad \quad \text{OH} \\ \quad \quad \quad \\ \text{C}-\text{C}-\text{C}-\text{C}-\text{C}-\text{C}-\text{C} \\ \quad \quad \quad \\ \text{C} \quad \quad \quad \text{C} \end{array}$ | 76-77 | 60-61 | 1 |
| 10 | 2,7-Dimethyl-2,7-octanediol | $\begin{array}{c} \text{HO} \quad \quad \quad \text{OH} \\ \quad \quad \quad \\ \text{C}-\text{C}-\text{C}-\text{C}-\text{C}-\text{C}-\text{C}-\text{C} \\ \quad \quad \quad \\ \text{C} \quad \quad \quad \text{C} \end{array}$ | 92 | 59 | 2 |
| 13 | 2,10-Dimethyl-2,10-undecanediol | $\begin{array}{c} \text{HO} \quad \quad \quad \text{OH} \\ \quad \quad \quad \\ \text{C}-\text{C}-\text{CCCCCCC}-\text{C}-\text{C} \\ \quad \quad \quad \\ \text{C} \quad \quad \quad \text{C} \end{array}$ | 61 | --- | ? |
| 14 | 2,11-Dimethyl-2,11-dodecanediol | $\begin{array}{c} \text{HO} \quad \quad \quad \text{OH} \\ \quad \quad \quad \\ \text{C}-\text{C}-\text{CCCCCCCC}-\text{C}-\text{C} \\ \quad \quad \quad \\ \text{C} \quad \quad \quad \text{C} \end{array}$ | 67.5 | --- | ? |

†5H₂O (50% H₂O) has been assigned. The maximum of the very flat freezing point curve has been found at 55% H₂O, no formula being assigned. This composition agrees excellently with 6H₂O which requires 54.5% H₂O.

Table 7.104: Hydrates of Cyclic Glycols (32)

| Glycol | | | | Hydrate | |
|-------------------|----------------------------------------------------|-----------------------------|-----------|-----------|---------------------------------------------|
| Number of C Atoms | Name | Skeletal Structural Formula | M.p. (°C) | M.p. (°C) | n in R(OH) ₂ × nH ₂ O |
| 9 | trans-Octa-hydroindan-8,9-diol | | 73-4 | --- | 0.5 to 1.0 |
| 10 | trans-Decahydro-naphthalene-9,10-diol | | 96 | 80-5 | 1.0? |
| 10 | cis-Decahydro-naphthalene-9,10-diol | | 89.5 | --- | Unknown |
| 10 | trans-p-Menth-8(9)-ene-1,2-diol | | 73 | 60 | 3 |
| 10 | cis-p-Menth-8(9)-ene-1,2-diol | | 71-2 | --- | 0 |
| 10 | cis(?) -p-Menth-1(2)-ene-3,6-diol | | 53-4 | 27 | 3? |
| 10 | cis-Terpin† | | 105 | 121 | 1 |
| 10 | trans-Terpin† | | 156-8 | --- | 0 |
| 10 | p-Menthane-2,5-diol | | 88-9 | 58-9 | 3 |
| 10 | p-Menthane-1,2-diol | | 89 | 52 | 3 & 1 |
| 10 | p-Menthane-2,8-diol (neoisodihydrocarveol hydrate) | | 93-4 | 65-75 | Unknown |

†Subject of crystallographic studies.

‡Stelzner's Literatur Register 1919-21 reports the formation of a hydrate and cites O. Aschan, "Bidrag till kännedon af Finlands natur ochfolk," 77, No. 1 (1918). The report appears to be without foundation.

(continued)

Table 7.104: (continued)






| Glycol | | | | Hydrate | |
|-------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------|-----------|---------------------------------------------|
| Number of C Atoms | Name | Skeletal Structural Formula | M.p. (°C) | M.p. (°C) | n in R(OH) ₂ × nH ₂ O |
| 10 | (+)-Carene-β-glycol or 3,4-Carane-diol (<i>trans</i> -2,3-dihydroxy-3,7,7-trimethyl-bicyclo-0,1,4-heptane) |  | 90-91 | 75 | 1 |
| 11 | Homoterpin |  | 75-6 | --- | 1 |
| 14 | iso (±)-Hydrobenzoin | PhCHOHCHOHPh | 121 | 96 | Unknown |
| 20 | Dihydrodi-carveol | C ₂₀ H ₂₆ O ₂ | 166 | 100 | 2 |
| 29 | 3,3'-Dihydroxy-3,3'-diphenyl-2,2'- <i>spiro</i> -biindan |  | 164 | 125-30 | 1 & 3 |
| 31 | 3,3'-Dihydroxy-3,3'-dibenzyl-2,2'- <i>spiro</i> -biindan |  | 169 | 134 | 3 |
| 38 | α-s-2,2'-Diphenylbenzopinacol |  | 175 | --- | 1 |
| 38 | β-s-2,2'-Diphenylbenzopinacol | | 152-8 | --- | 1 |

Table 7.105: Freezing Points of Aqueous Ethylene Glycol and Propylene Glycol Solutions (42)

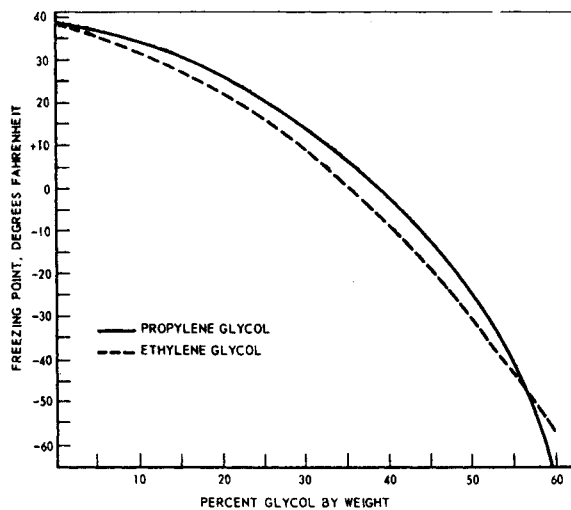


Table 7.106: Freezing Points of Various Aqueous Glycol Solutions, °C (32)

| Glycol, % | 1,2-Propane-diol | 1,3-Propane-diol | 1,2-Butane-diol | 1,3-Butane-diol | levo-2,3-Butane-diol | 1,4-Butane-diol | 1,2-Pentane-diol | 1,5-Pentane-diol |
|-----------|------------------|------------------|-----------------|-----------------|----------------------|-----------------|------------------|------------------|
| 10 | -3.12 | -2.86 | -2.60 | -2.34 | -3.1 | -2.30 | -2.3 | -2.3 |
| 20 | -7.6 | -6.5 | -6.0 | -5.2 | -7.1 | -5.48 | -4.8 | -4.9 |
| 30 | -14.0 | -11.8 | -11.0 | -10.5 | -12.4 | -10.0 | -6.8 | -8.4 |
| 40 | -22.7 | -18.8 | -16.5 | -16.8 | -19.4 | -14.8 | -8.4 | -11.3 |
| 50 | -34.5 | -27.7 | -22.4 | -25.2 | -29.6 | -22.0 | -10.2 | -15.3 |
| 60 | -48.2 | -40.0 | -29.0 | -35.3 | -40.4 | -31.3 | -12.6 | -21.0 |

Table 7.107: Freezing Points of Various Aqueous Alcohols, Glycols and Glycerol (32)

| Solute by Weight, % | Methanol | | Ethanol | | Ethylene Glycol | | Glycerol | | levo-2,3-Butanediol | |
|---------------------|-------------------|---------------------|-------------------|---------------------|-------------------|---------------------|-------------------|---------------------|---------------------|---------------------|
| | F.p. Observed, °C | F.p. Calculated, °C | F.p. Observed, °C | F.p. Calculated, °C | F.p. Observed, °C | F.p. Calculated, °C | F.p. Observed, °C | F.p. Calculated, °C | F.p. Observed, °C | F.p. Calculated, °C |
| 10 | -6.3 | -6.46 | -4.5 | -4.49 | -3.6 | -3.33 | -2.0 | -2.25 | -3.1 | -2.30 |
| 20 | -15.3 | -14.5 | -10.5 | -10.1 | -8.3 | -8.27 | -5.2 | -5.05 | -7.1 | -5.17 |
| 30 | -26.3 | -24.9 | -20.0 | -17.3 | -14.7 | -12.9 | -9.9 | -8.67 | -12.4 | -8.85 |
| 40 | -39.7 | -38.8 | -29.4 | -27.0 | -23.5 | -20.0 | -15.9 | -12.0 | -19.4 | -14.3 |
| 50 | -55.2 | -58.1 | -37.0 | -40.4 | -35.0 | -30.0 | -24.6 | -20.2 | -29.6 | -20.7 |
| 60 | | | -43.8 | -60.7 | -50 | -45.0 | -37.9 | -30.3 | -40.4 | -31.0 |

Table 7.108: Compatibility of Coupling Solvents with Carbon Tetrachloride and Water (14)


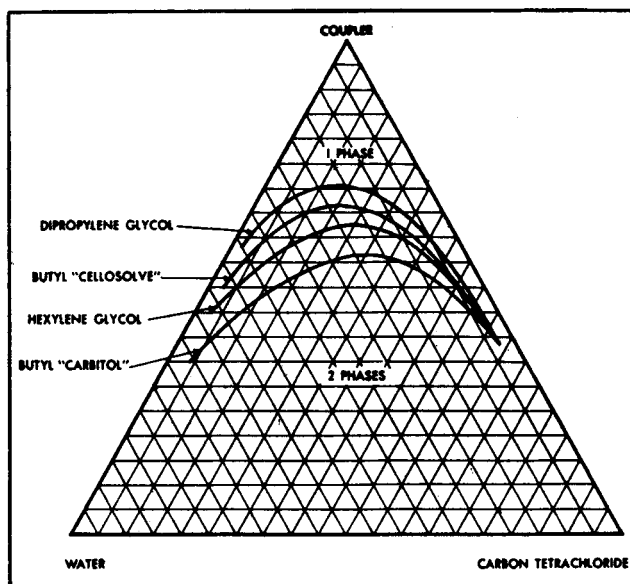


Table 7.109: Key Hygroscopicity Curve (55)

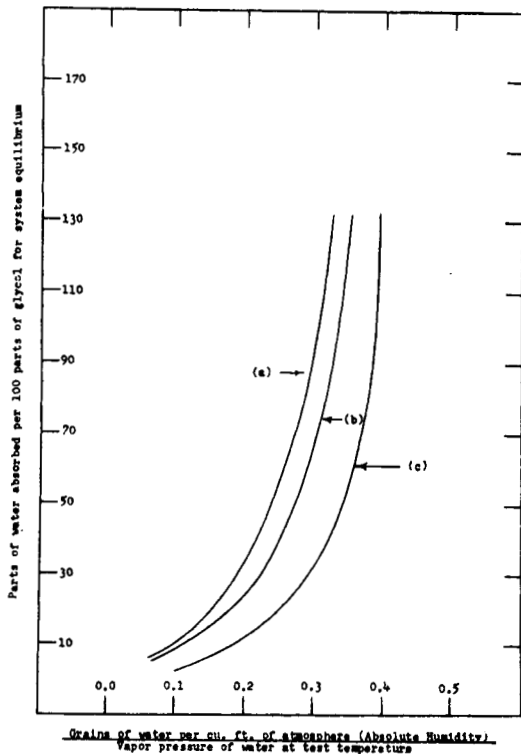

Key hygroscopicity curves for the various glycols: (a) ethylene glycol; (b) diethylene glycol; and (c) dipropylene glycol.

Table 7.110: Surface Tension of Glycol-Water Systems (14)

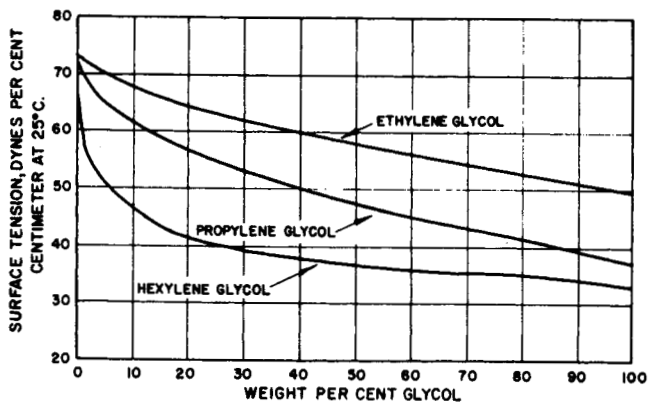


Table 7.111: Vapor Pressure of Glycols (14)

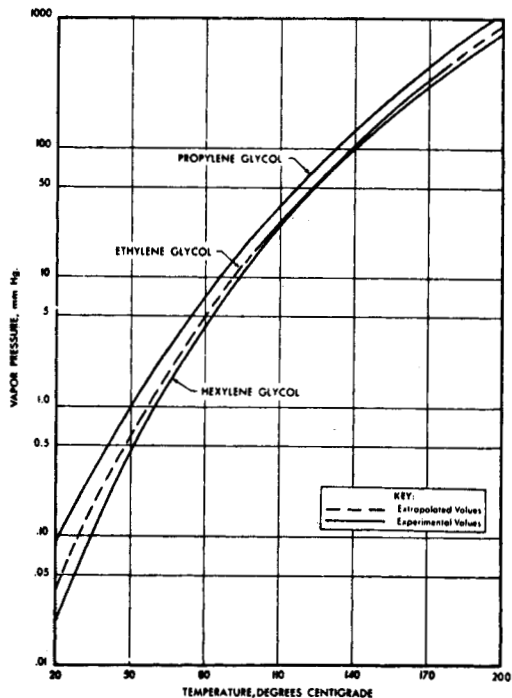


Table 7.112: Viscosity of Glycols (32)

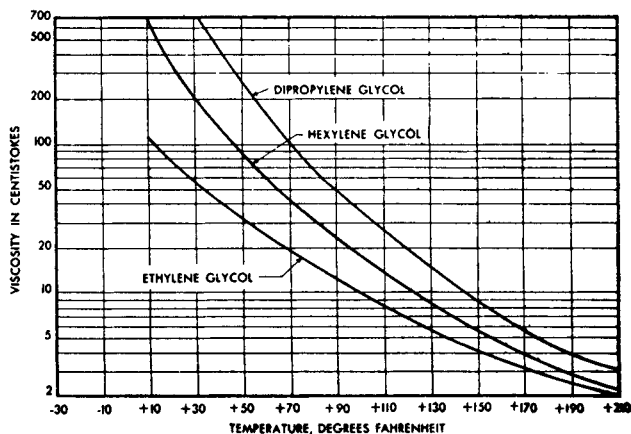


Table 7.113: Water Absorption by Glycols as a Function of Time (14)

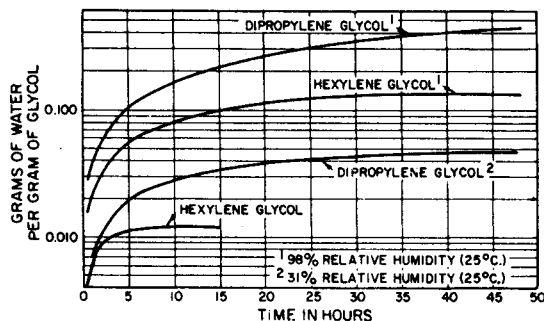


Table 7.114: Water Absorption by Glycols as a Function of Relative Humidity (14)

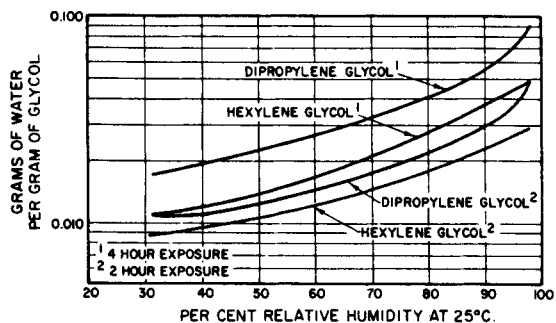


Table 7.115: Refractive Index, Specific Gravity, and Boiling Point Measurements of Various Glycols (32)

| Compound | Refractive Index | Specific Gravity, d_4^t | Boiling Point, °C., 760 mm. |
|-----------------|---------------------------|---------------------------|-----------------------------|
| 1,2-Propanediol | 25°C. 1.4316 (17) | 23°C. 1.0354 (17) | 187 (17) |
| | 1.4313 [†] | | |
| | 20°C. 1.4331 (14) | 20°C. 1.0364 (14) | 186 [†] |
| | 1.4324 [†] | 1.0361 [†] | |
| 1,3-Propanediol | 25°C. 1.4385 (17) | 20°C. 1.0538 (17) | 215 (17) |
| | 1.4380 [†] | 1.0529 [†] | |
| | 21°C. 1.4394 (17) | | 213.5 [†] |
| | 20°C. 1.4389 [†] | | |
| 1,2-Butanediol | 20°C. 1.4378 [†] | 20°C. 1.0024 [†] | 190.5 [†] |
| 1,3-Butanediol | 25°C. 1.4410 (17) | 20°C. 1.0053 (17) | 207.5 (17) |
| | 1.4391 (12) | 1.0035 (12) | 208 (2) |
| | 1.4388 [†] | 1.002 (2) | 207 [†] |
| | 20°C. 1.4404 (2) | 1.0037 [†] | |
| | 1.4398 [†] | | |
| 1,4-Butanediol | 20°C. 1.4467 (10) | 20°C. 1.0171 (10) | 230 (2) |
| | 1.4459 (2) | 1.0160 (2) | |
| | 1.4460 [†] | 1.0185 [†] | 228 [†] |
| 1,2-Pentanediol | 24°C. 1.4390 (16) | 24°C. 0.9691 (16) | 210 (16) |
| | 25°C. 1.4380 [†] | | |
| | 20°C. 1.4390 [†] | 20°C. 0.9723 [†] | 206 [†] |
| 1,5-Pentanediol | 26°C. 1.4480 (16) | 26°C. 0.9890 | 239 (16) |
| | 25°C. 1.4484 [†] | | |
| | 20°C. 1.4500 [†] | 20°C. 0.9914 [†] | 238 [†] |

[†] Authors' observations.

[‡] As cited in the fifth and earlier editions of Getman and Daniels' Outlines of Physical Chemistry, John Wiley and Sons Inc., New York, 1931.

Table 7.116: Relative Solvent Properties of Glycols (23)

| | Ethylene Glycol | Diethylene Glycol | Triethylene Glycol | Tetraethylene Glycol | Propylene Glycol | Di-propylene Glycol | Tri-propylene Glycol |
|----------------------------------------|-----------------|-------------------|--------------------|----------------------|------------------|---------------------|----------------------|
| Benzene | 5.7 | 31.3 | S | S | 19.2 | S | S |
| Carbon Tetrachloride ¹ | 6.2 | 26.2 | 33.6 | S | 23.4 | S | S |
| Dibutyl Phthalate | 0.5 | 10.6 | 16.5 | S | 8.1 | S | S |
| Dichloroethyl Ether ¹ | 10.6 | S | S | S | 37.1 | S | S |
| Diethanolamine ¹ | S | S | S | S | S | S | S |
| DOWANOL* PM Glycol Ether ¹ | S | S | S | S | S | S | S |
| DOWANOL* DPM Glycol Ether ¹ | S | S | S | S | S | S | S |
| Ethyl Alcohol | S | S | S | S | S | S | S |
| Ethyl Ether | 8.2 | 16.3 | 16.9 | 20 | S | S | S |
| Methyl Alcohol | S | S | S | S | S | S | S |
| Methyl Isobutyl Carbinol | S | S | S | S | S | S | S |
| Methyl Isobutyl Ketone | 12 | S | S | S | S | S | S |
| Monochlorobenzene ¹ | 5.7 | S | S | S | 22.5 | S | S |
| Monoethanolamine ¹ | S | S | S | S | S | S | S |
| ortho-Dichlorobenzene ¹ | 4.5 | 48.4 | S | S | 19.4 | S | S |
| Perchloroethylene ¹ | 0.7 | 10.7 | 15.0 | 19.0 | 14.5 | S | S |
| Phenol ¹ | S | S | S | S | S | S | S |
| Styrene ¹ | 3.4 | 36 | S | S | 15 | S | S |
| Toluene | 2.9 | 17.2 | 24.8 | 89 | 12.3 | S | S |
| Urea | 48 | 30 | 37 | 28 | 29 | 12 | 10 |
| Castor Oil | 1 | <0.5 | <0.5 | <1 | 0.8 | S | S |
| Coconut Oil | 1 | 1 | 1 | <1 | 1 | 1 | 3 |
| Cottonseed Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 |
| Hydrous Wool Fat | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 |
| Lard Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 |
| Linseed Oil | 1 | 1 | 1 | <1 | 1 | 1.4 | 2.5 |
| Oiticica Oil | <1 | <1 | <1 | <1 | <1 | <1 | <1 |
| Olive Oil | 1 | 1 | 1 | <1 | 1 | 0.7 | 1.5 |
| Pine Oil | S | S | S | S | S | S | S |
| Soya Bean Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 |
| Sperm Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 |
| Tall Oil | <1 | <1 | <1 | <1 | <1 | S | S |
| Tung Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 |
| Turkey Red Oil | <1 | <1 ² | 1 ² | 1 ² | <1 ² | 3 ² | 4 ² |
| Paraffin Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 |
| SAE No. 10 Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 |
| VMP Naphtha | <1 | <1 | <1 | 1 | 1 | 10 | 14 |
| Animal Glue (Dry) | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 |
| Dextrin | <1 | <1 | <1 | <1 | <1 | <1 | <1 |
| Gum Damar | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 |
| Kauri Gum | <0.5 | <0.5 | <0.5 | >16 ³ | <5 | <5 | >16 ³ |
| Sudan III | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 |
| Shellac | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 |

¹Product of The Dow Chemical Company
²Forms stable emulsion from this concentration to 100%.
³Becomes too viscous to stir beyond 16%.
 *Trademark of The Dow Chemical Company

Table 7.117: Effect of Various Glycols on Synthetic Rubber Samples—Results Reported as % Volume and % Weight Increase (23)

| Glycol | GN-427T1 | | GRS-53115T | | FA-Thiokol | | Gum Rubber | |
|--------------------------|----------|------|------------|------|------------|------|------------|------|
| | % Vol | % Wt | % Vol | % Wt | % Vol | % Wt | % Vol | % Wt |
| 3 Days Immersion | | | | | | | | |
| Ethylene | -2 | -2 | -1 | -5 | .5 | .2 | .2 | .2 |
| Diethylene | -12 | -2 | -1 | -5 | .3 | .0 | .1 | .0 |
| Triethylene | -1 | -1 | -1 | -5 | .5 | .1 | .3 | .1 |
| Propylene | -2 | -2 | .1 | -3 | .3 | .0 | .2 | .0 |
| Dipropylene | -1 | -2 | .0 | -5 | .3 | -.1 | .1 | .1 |
| 10 Days Immersion | | | | | | | | |
| Ethylene | -2 | -2 | -3 | -7 | .3 | .2 | .3 | .5 |
| Diethylene | -3 | -3 | -2 | -8 | .3 | .0 | -.2 | .0 |
| Triethylene | .0 | -1 | -1 | -6 | .6 | .3 | .0 | .1 |
| Propylene | -1 | -1 | -3 | -7 | .0 | -.1 | -.1 | .0 |
| Dipropylene | .1 | -2 | -1 | -6 | .1 | -.2 | .0 | .1 |

Table 7.118: Solubility of Cellulose Derivatives in Glycols (23)

| Glycol | 50 CPS. ST. E/C | ½ Second Cellulose Nitrate | | Cellulose Acetate FM 3 |
|-------------------|-----------------|----------------------------|--------------|------------------------|
| | | Swelled | >20% Soluble | Insoluble |
| Ethylene | Insoluble | Swelled | | Insoluble |
| Diethylene | Insoluble | >20% Soluble | | Insoluble |
| Triethylene | Insoluble | >20% Soluble | | Insoluble |
| Propylene | Insoluble | Swelled | | Insoluble |
| Dipropylene | Insoluble | >20% Soluble | | Insoluble |

Table 7.119: Compatibility of Film Cast from 80/20 Toluene/Alcohol (23)

| Glycol | 50 CPS. ST. E/C | | | ½ Second Cellulose Nitrate | | | Cellulose Acetate FM 3 | | |
|-------------------|-----------------|------|--------|----------------------------|------|--------|------------------------|------|--------|
| | Clear | Haze | Opaque | Clear | Haze | Opaque | Clear | Haze | Opaque |
| Ethylene | 1% | 3% | 10% | 3% | 5% | 10% | >10 | 20 | — |
| Diethylene | 1% | 3% | 10% | 1% | 5% | 10% | >20 | 30 | — |
| Triethylene | — | 1% | 3% | 1% | 3% | 15% | >20 | 30 | — |
| Propylene | 1% | 3% | 10% | 1% | 3% | 10% | >10 | 20 | — |
| Dipropylene | 20% | 25% | 30% | >50% | — | — | >40 | 50 | — |

Note: Table shows % glycol in film with the properties shown.

Table 7.120: Relative Humectant Values (23)

| Temperature of Air °F | Glycol | Relative Humidities | | | | | | | | |
|-----------------------|-------------|---------------------|------|------|------|-----|-----|-----|-----|-----|
| | | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% |
| 20 (-6.7°C) | Ethylene | 97.5 | 93.4 | 89.3 | 85.7 | 82 | 78 | 72 | 63 | 48 |
| | Diethylene | 97.8 | 95.1 | 92.0 | 89.0 | 86 | 83 | 78 | 68 | 52 |
| | Triethylene | 98.5 | 96.8 | 94.0 | 91.1 | 89 | 83 | 78 | 66 | 51 |
| | Propylene | 96.8 | 91.4 | 90.0 | 84.6 | 77 | 73 | 68 | 55 | 40 |
| | Dipropylene | 98.5 | 97.0 | 95.1 | 92.6 | 89 | 85 | 79 | 67 | 51 |
| 40 (4.4°C) | Ethylene | 97.3 | 93.2 | 89.1 | 85.4 | 82 | 76 | 69 | 60 | 42 |
| | Diethylene | 97.7 | 95.0 | 92.0 | 89.0 | 86 | 82 | 77 | 67 | 50 |
| | Triethylene | 98.4 | 96.5 | 93.8 | 91.0 | 88 | 83 | 77 | 65 | 51 |
| | Propylene | 97.0 | 92.3 | 90.2 | 85.2 | 78 | 74 | 68 | 55 | 40 |
| | Dipropylene | 98.4 | 96.9 | 95.0 | 92.5 | 89 | 85 | 79 | 67 | 51 |
| 60 (15.6°C) | Ethylene | 97.1 | 93.0 | 88.9 | 85.0 | 81 | 75 | 66 | 57 | 37 |
| | Diethylene | 97.7 | 95.0 | 92.0 | 89.0 | 86 | 82 | 76 | 66 | 48 |
| | Triethylene | 98.2 | 96.2 | 93.6 | 90.8 | 86 | 82 | 77 | 65 | 50 |
| | Propylene | 97.1 | 92.9 | 90.4 | 85.8 | 80 | 74 | 68 | 55 | 40 |
| | Dipropylene | 98.4 | 96.8 | 94.8 | 92.4 | 89 | 85 | 79 | 67 | 51 |
| 80 (26.7°C) | Ethylene | 96.8 | 92.8 | 88.6 | 84.7 | 80 | 73 | 64 | 55 | 36 |
| | Diethylene | 97.6 | 94.9 | 92.0 | 89.0 | 85 | 81 | 75 | 65 | 47 |
| | Triethylene | 98.1 | 96.0 | 93.4 | 90.7 | 85 | 82 | 76 | 64 | 50 |
| | Propylene | 97.1 | 93.5 | 90.5 | 86.3 | 81 | 75 | 68 | 55 | 40 |
| | Dipropylene | 98.3 | 96.7 | 94.7 | 92.3 | 89 | 85 | 79 | 67 | 51 |
| 100 (37.8°C) | Ethylene | 96.6 | 92.7 | 88.4 | 84.3 | 79 | 72 | 63 | 53 | 35 |
| | Diethylene | 97.6 | 94.8 | 92.0 | 89.0 | 85 | 81 | 74 | 64 | 46 |
| | Triethylene | 98.0 | 95.7 | 93.2 | 90.6 | 84 | 82 | 76 | 64 | 49 |
| | Propylene | 97.2 | 93.9 | 90.6 | 86.6 | 82 | 75 | 68 | 55 | 40 |
| | Dipropylene | 98.3 | 96.6 | 94.6 | 92.1 | 89 | 85 | 79 | 67 | 51 |
| 120 (48.9°C) | Ethylene | 96.4 | 92.5 | 88.2 | 84.0 | 78 | 71 | 62 | 51 | 34 |
| | Diethylene | 97.6 | 94.8 | 92.0 | 89.0 | 85 | 80 | 73 | 63 | 45 |
| | Triethylene | 97.8 | 95.4 | 93.0 | 90.5 | 83 | 82 | 75 | 63 | 49 |
| | Propylene | 97.2 | 94.3 | 90.7 | 86.7 | 83 | 76 | 68 | 55 | 40 |
| | Dipropylene | 98.2 | 96.5 | 94.5 | 92.0 | 89 | 85 | 79 | 67 | 51 |

Note: Values are given as the percent by weight of glycol in water solution required to maintain equilibrium in contact with air of various temperatures and humidities.

Table 7.121: Water Vapor Dew Points Over Aqueous Ethylene Glycol Solutions (23)

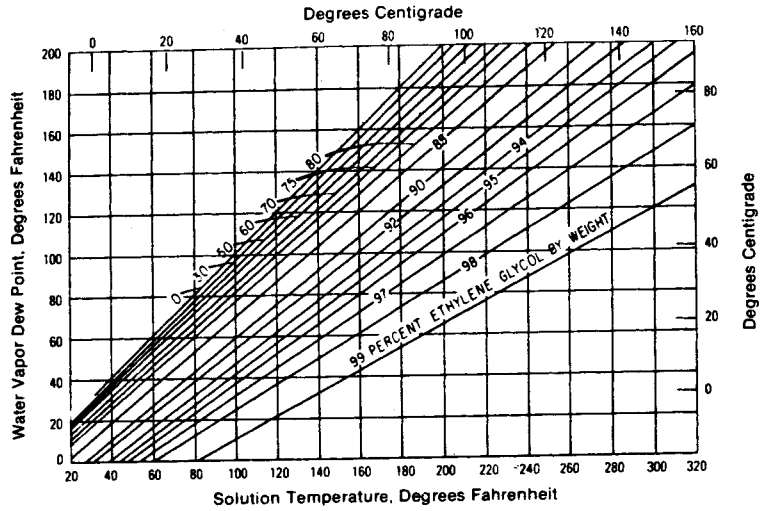


Table 7.122: Water Vapor Dew Points Over Aqueous Diethylene Glycol Solutions (23)

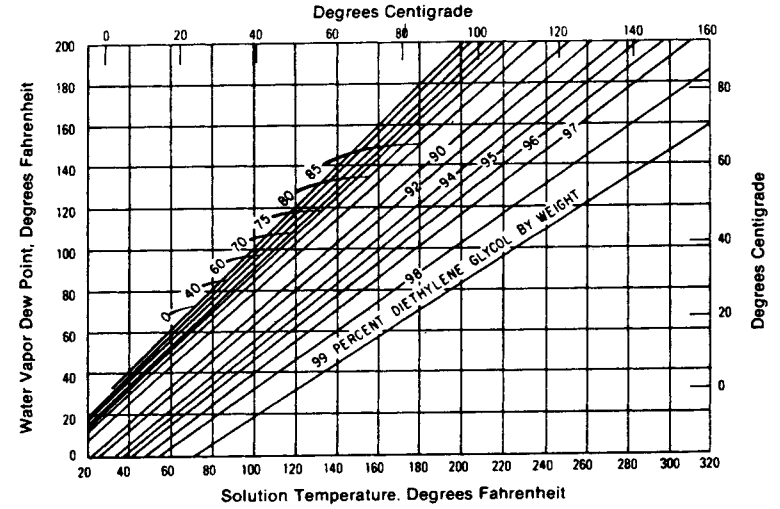


Table 7.123: Water Vapor Dew Points Over Aqueous Triethylene Glycol Solutions (23)

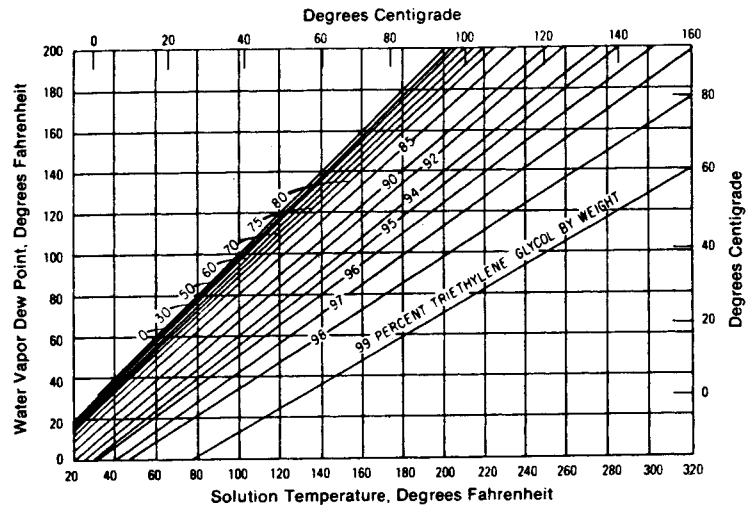


Table 7.124: Water Vapor Dew Points Over Aqueous Propylene Glycol Solutions (23)

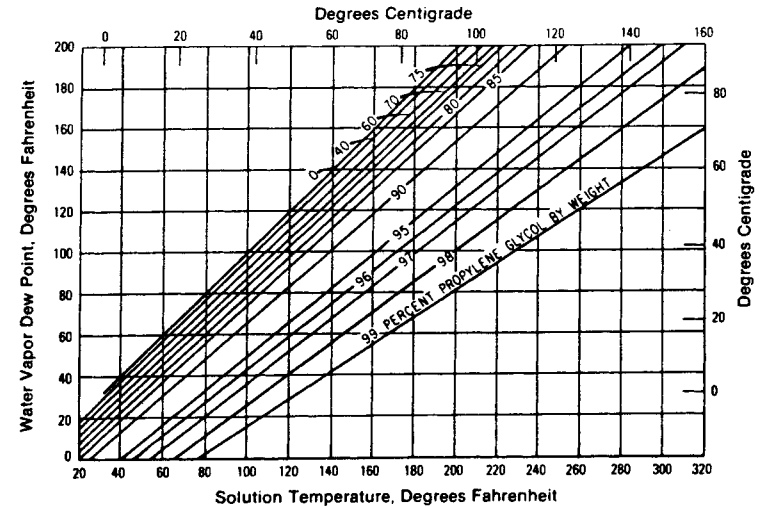


Table 7.125: Water Vapor Dew Points Over Aqueous Dipropylene Glycol Solutions (23)

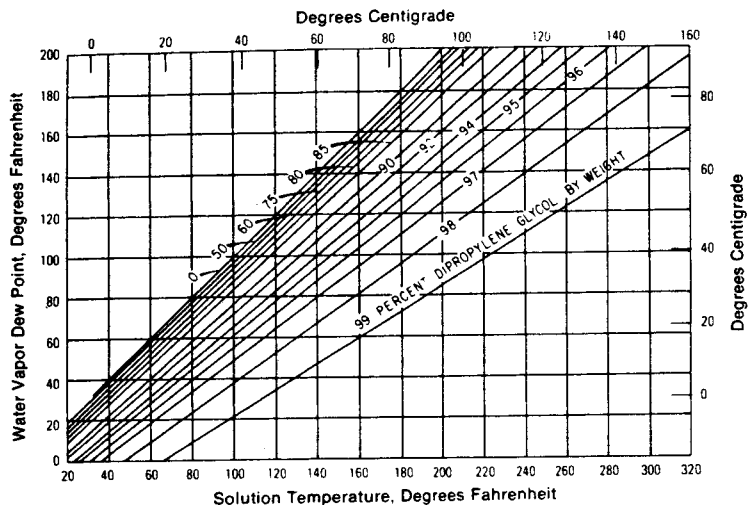


Table 7.126: Boiling Points of Glycols at 50 mm Hg (23)

| | |
|----------------------|-------------------|
| Water | 100° F (37.8° C) |
| Ethylene Glycol | 258° F (125.5° C) |
| Diethylene Glycol | 338° F (170° C) |
| Triethylene Glycol | 387° F (197.2° C) |
| Tetraethylene Glycol | 453° F (233.9° C) |
| Propylene Glycol | 240° F (115.6° C) |
| Dipropylene Glycol | 307° F (152.8° C) |
| Tripropylene Glycol | 356° F (180° C) |

Table 7.127: Total Pressure Over Aqueous Ethylene Glycol Solutions vs Temperature (23)

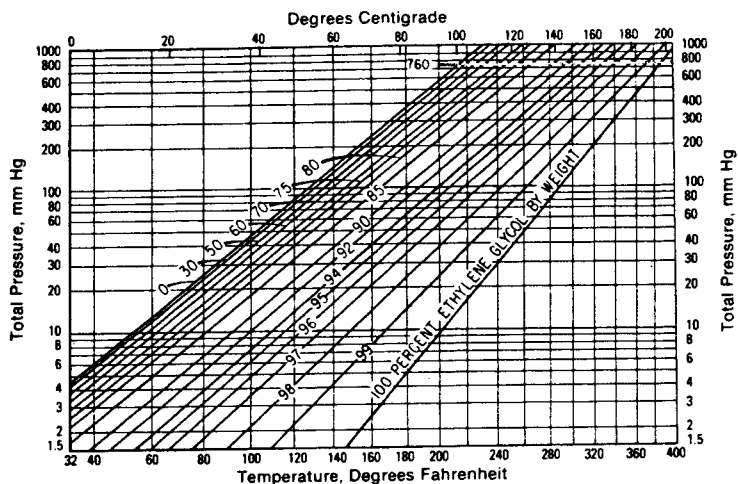


Table 7.128: Total Pressure Over Aqueous Diethylene Glycol Solutions vs Temperature (23)

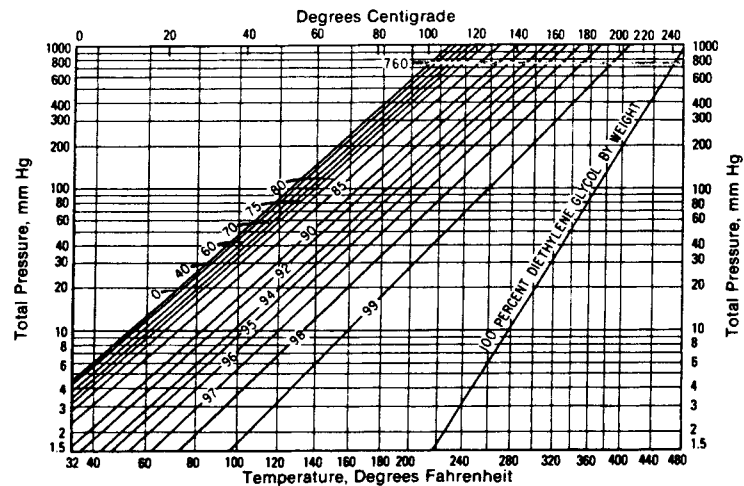


Table 7.129: Total Pressure Over Aqueous Triethylene Glycol Solutions vs Temperature (23)

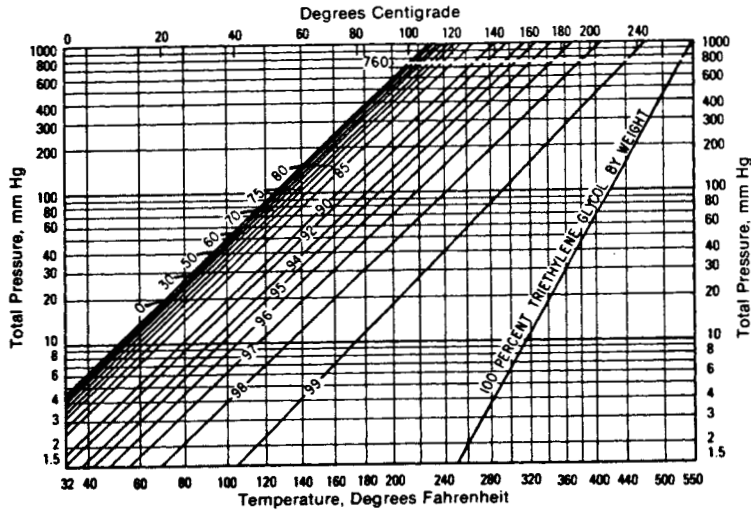


Table 7.130: Total Pressure Over Aqueous Propylene Glycol Solutions vs Temperature (23)

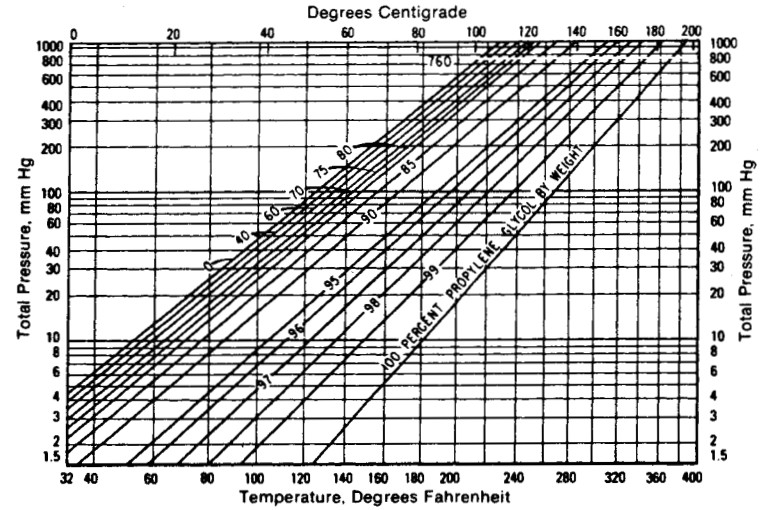


Table 7.131: Total Pressure Over Aqueous Dipropylene Glycol Solutions vs Temperature (23)

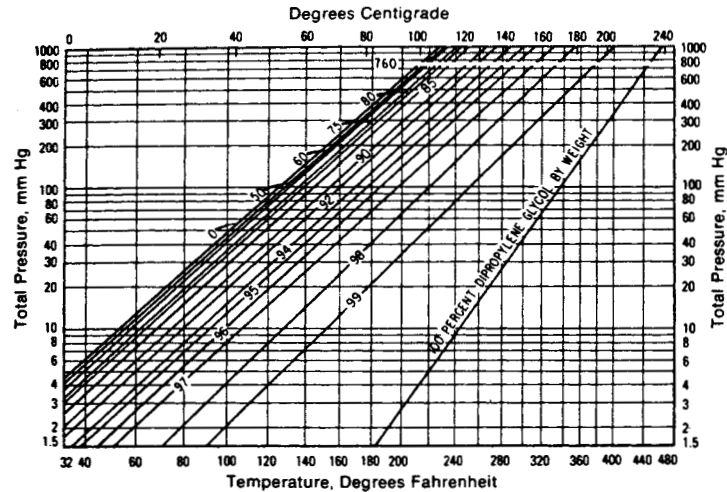


Table 7.132: Vapor-Liquid Composition Curves for Aqueous Ethylene Glycol Solutions (23)

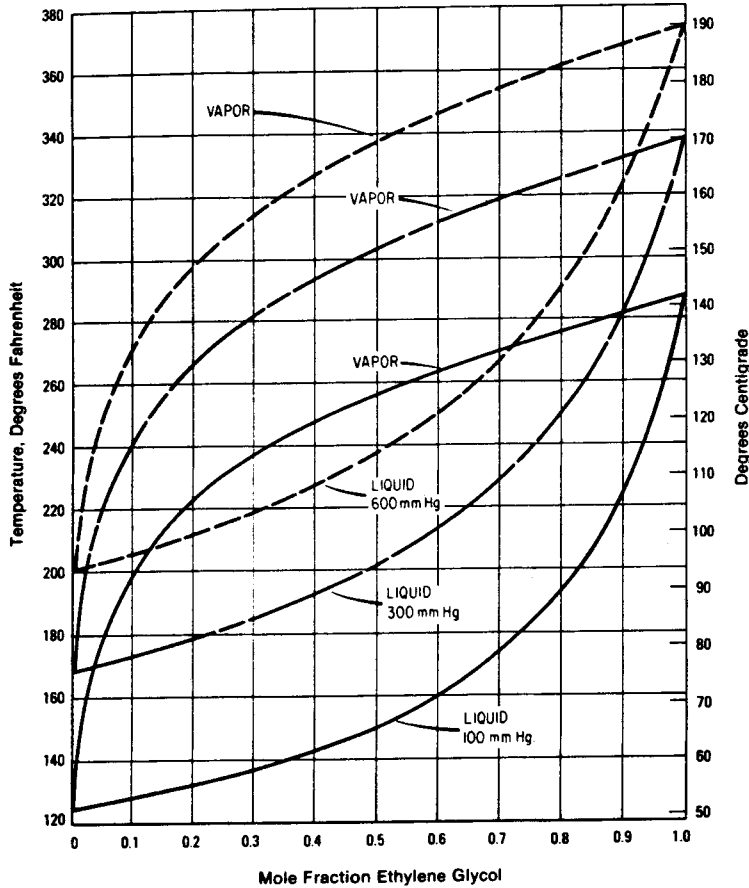


Table 7.133: Vapor-Liquid Composition Curves for Aqueous Diethylene Glycol Solutions (23)

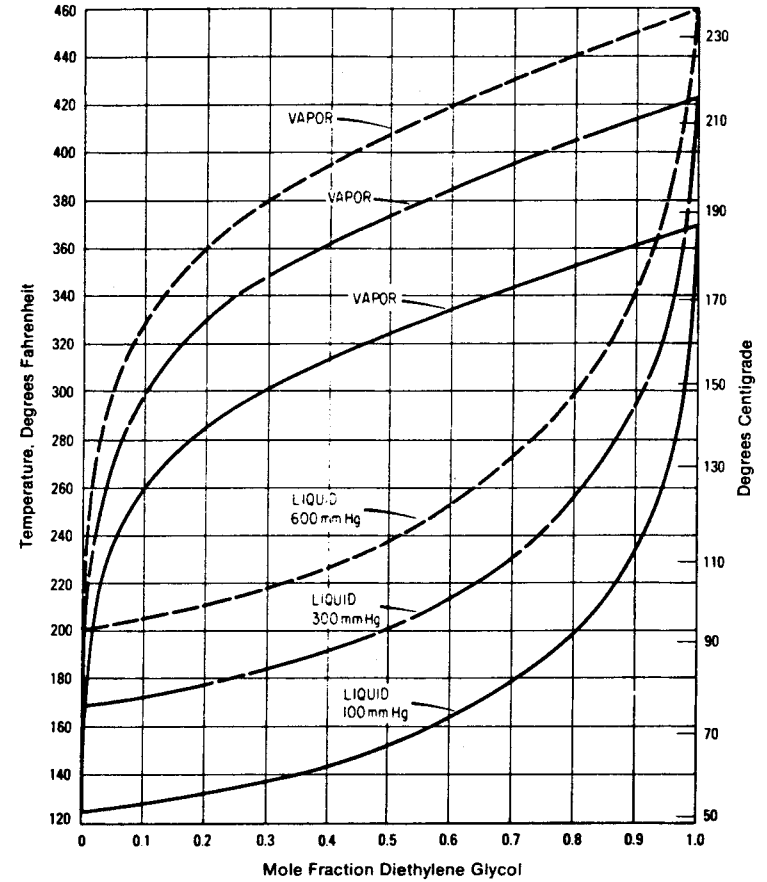


Table 7.134: Vapor-Liquid Composition Curves for Aqueous Triethylene Glycol Solutions (23)

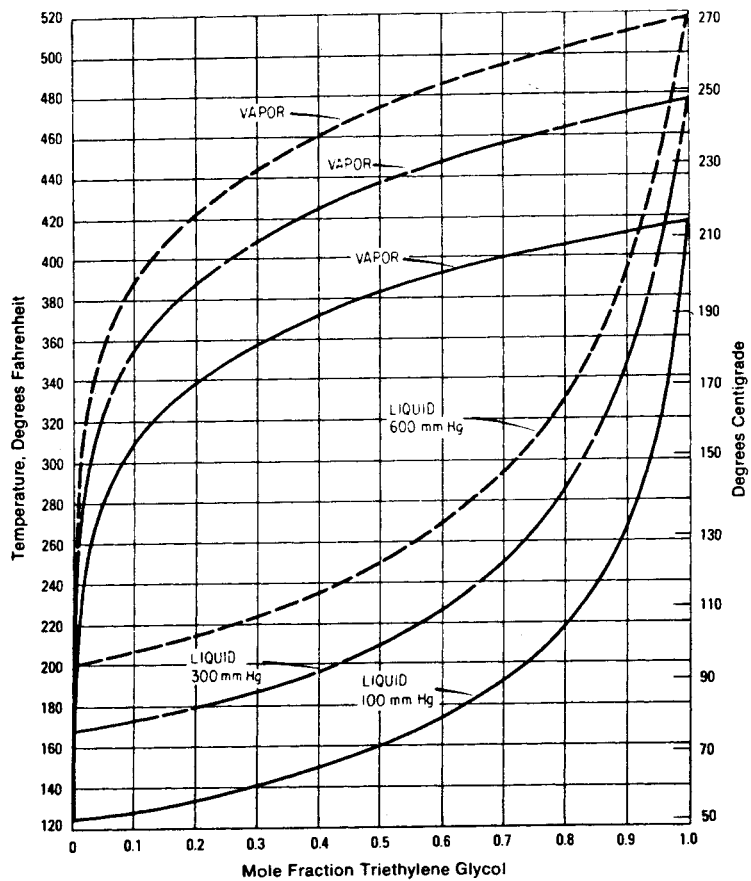


Table 7.135: Vapor-Liquid Composition Curves for Aqueous Propylene Glycol Solutions (23)

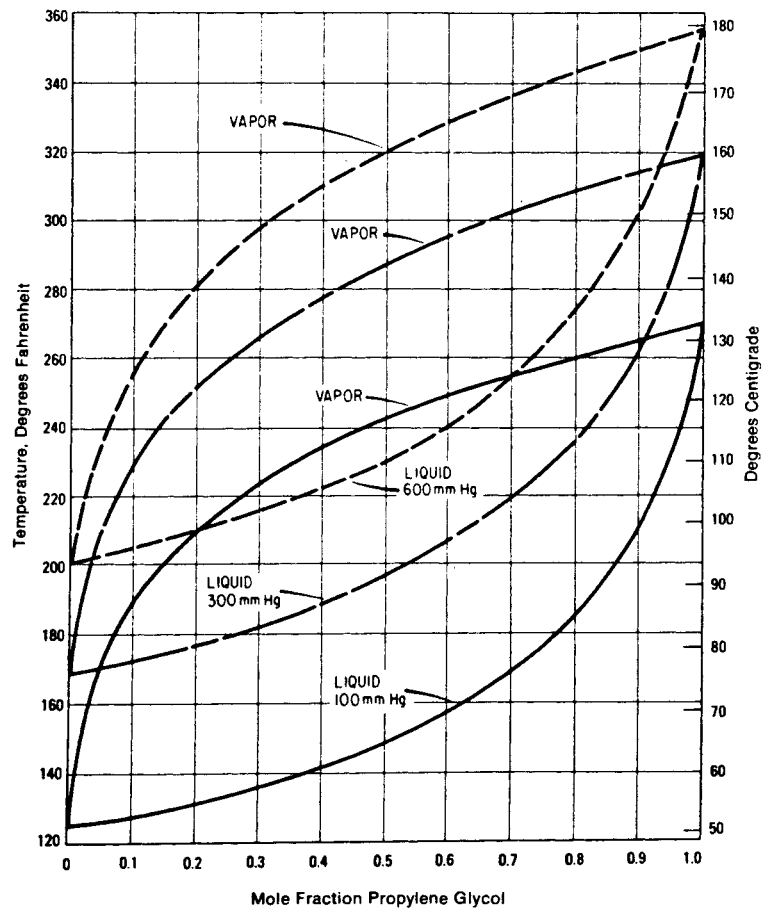


Table 7.136: Vapor-Liquid Composition Curves for Aqueous Dipropylene Glycol Solutions (23)

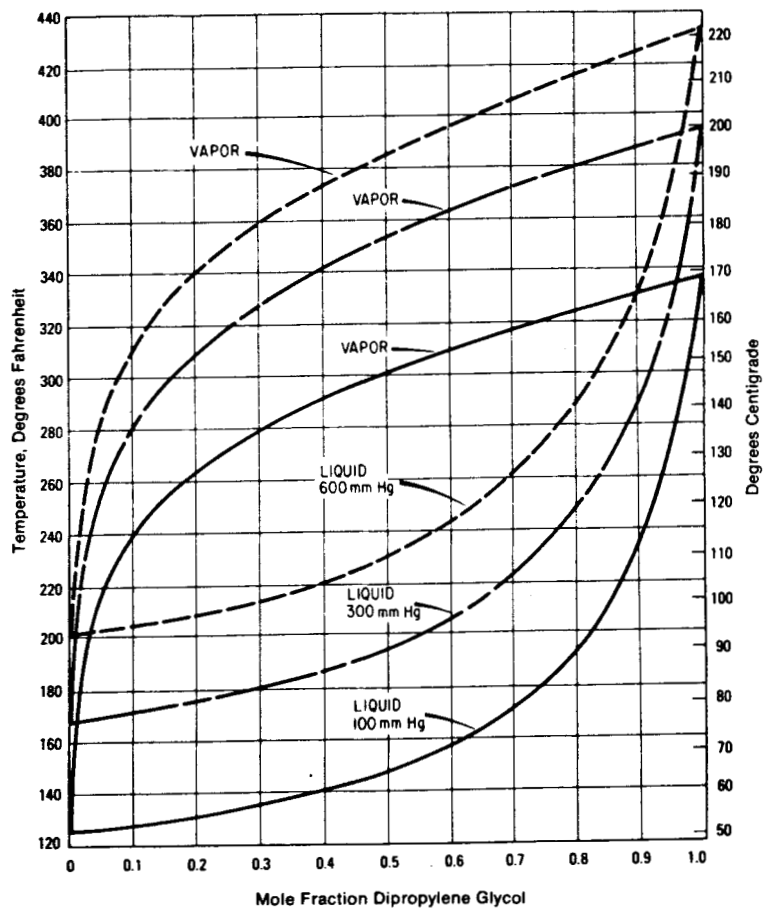


Table 7.137: Pour Points of Glycols (23)

| | |
|----------------------|-------------------|
| Ethylene Glycol | < -75° F (-59° C) |
| Diethylene Glycol | -65° F (-54° C) |
| Triethylene Glycol | -73° F (-58° C) |
| Tetraethylene Glycol | -42° F (-41° C) |
| Propylene Glycol | -71° F (-57° C) |
| Dipropylene Glycol | -38° F (-39° C) |
| Tripropylene Glycol | -42° F (-41° C) |

Table 7.138: Viscosities of Anhydrous Glycols (23)

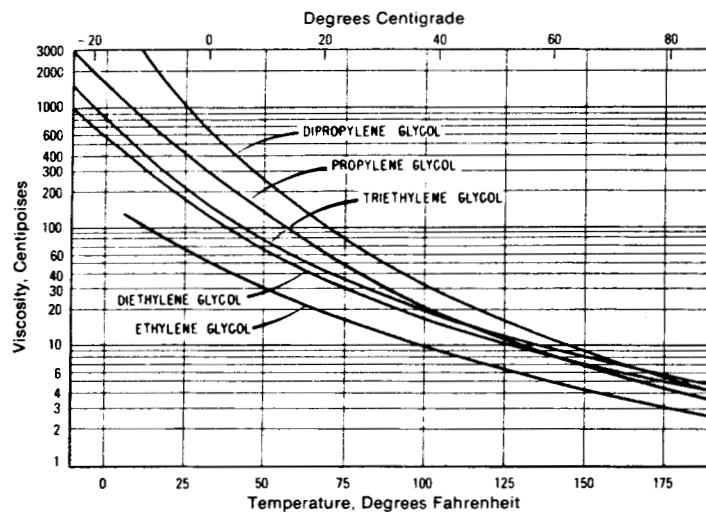


Table 7.139: Viscosities of Aqueous Ethylene Glycol Solutions (23)

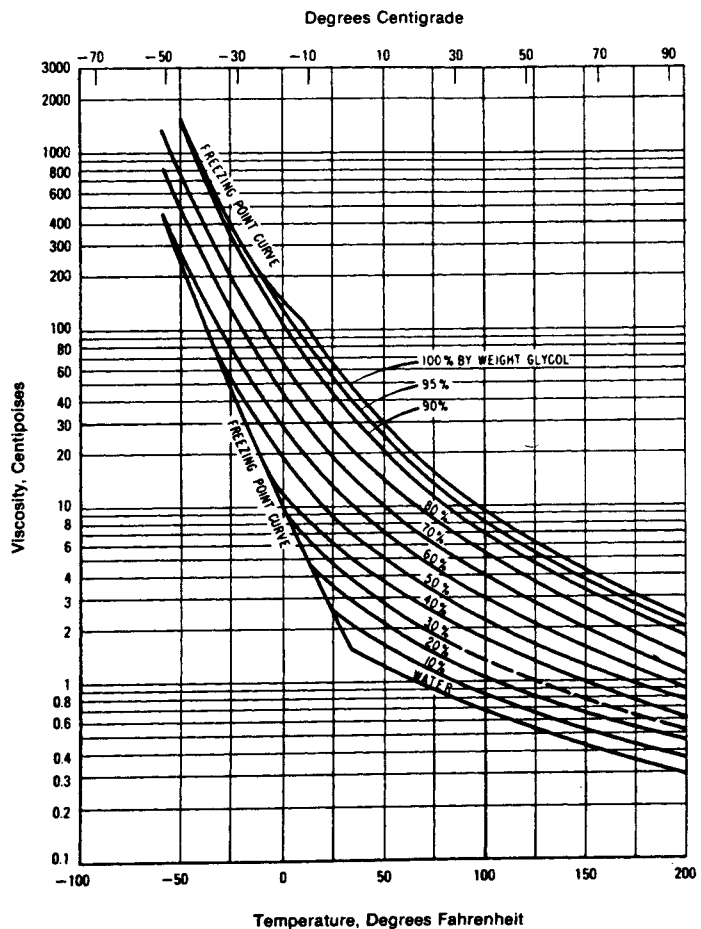


Table 7.140: Viscosities of Aqueous Diethylene Glycol Solutions (23)

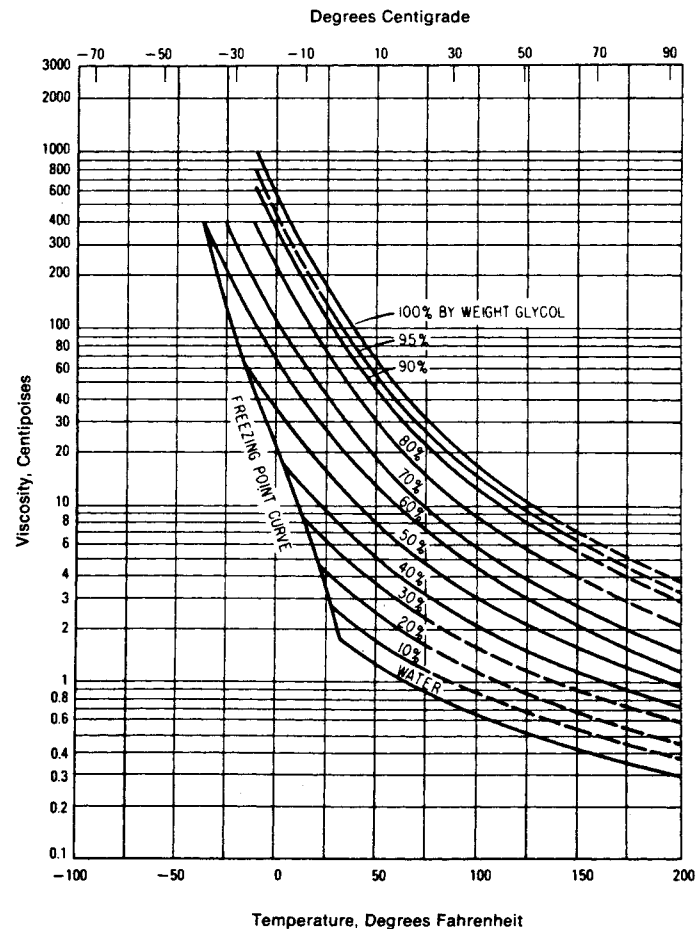


Table 7.141: Viscosities of Aqueous Triethylene Glycol Solutions (23)

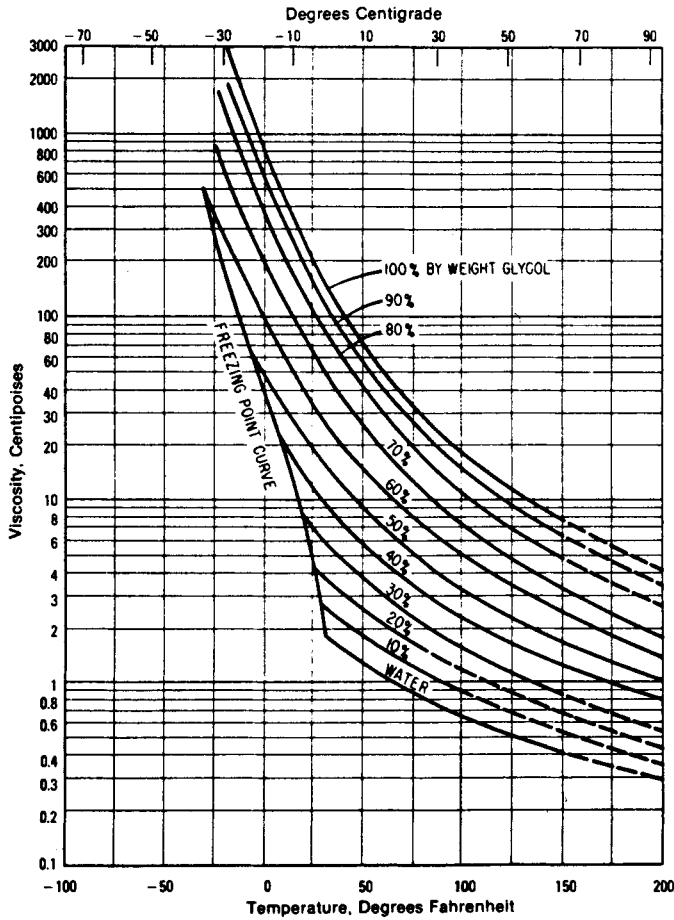


Table 7.142: Viscosities of Aqueous Tetraethylene Glycol Solutions (23)

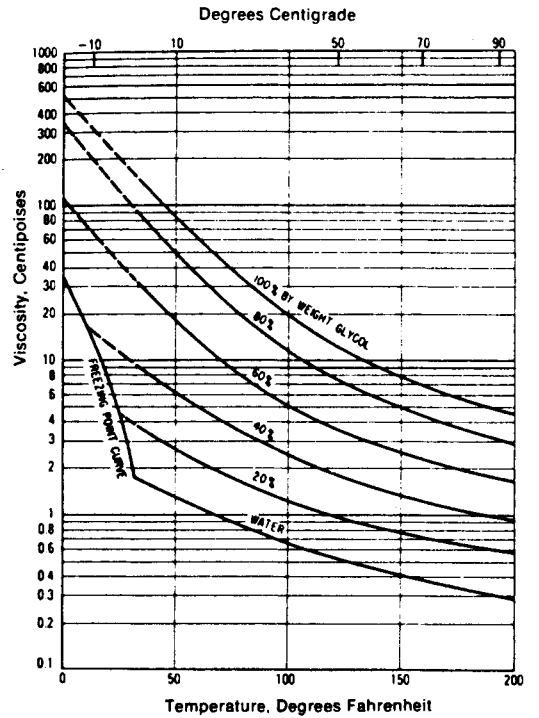


Table 7.143: Viscosities of Aqueous Propylene Glycol Solutions (23)

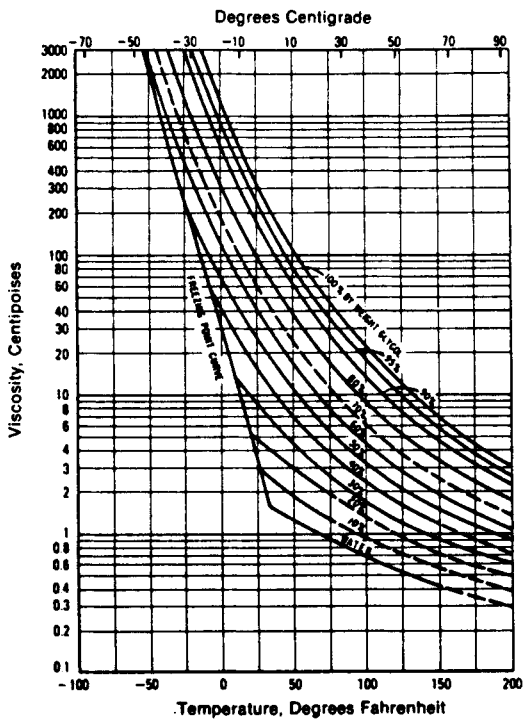


Table 7.144: Viscosities of Aqueous Dipropylene Glycol Solutions (23)

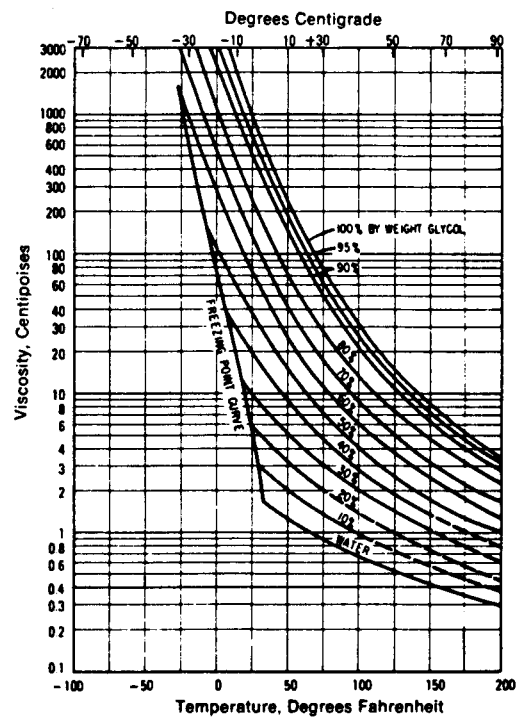


Table 7.145: Viscosities of Aqueous Tripropylene Glycol Solutions (23)

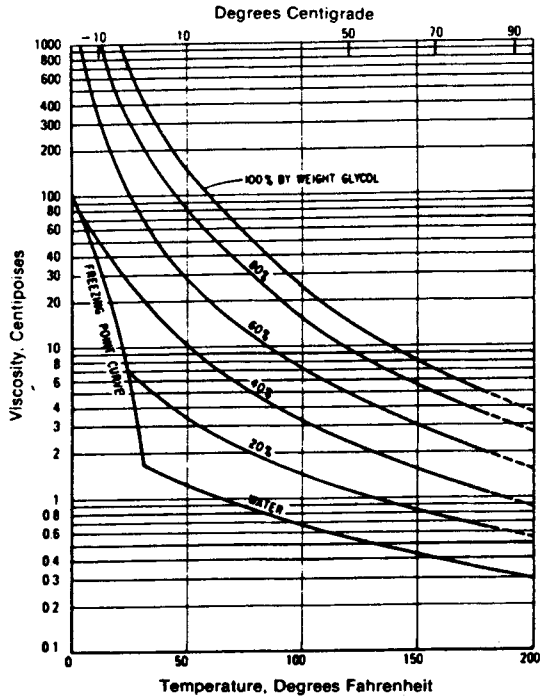


Table 7.146: Freezing Points of Aqueous Glycol Solutions (23)

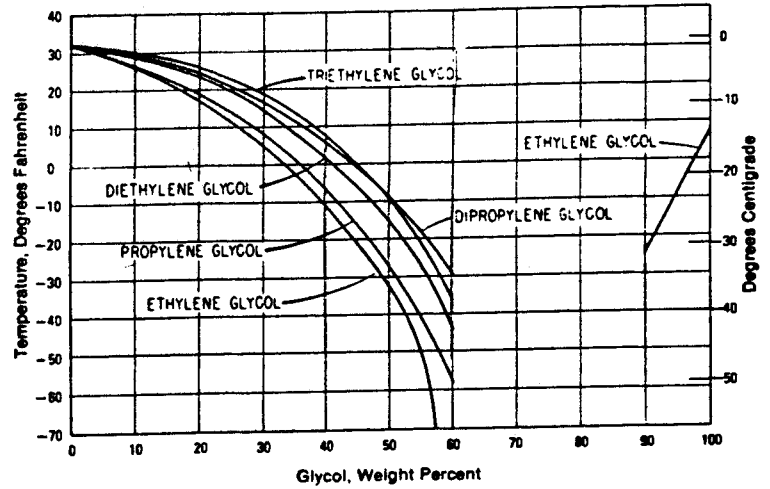


Table 7.147: Specific Heat of Anhydrous Glycols (23)

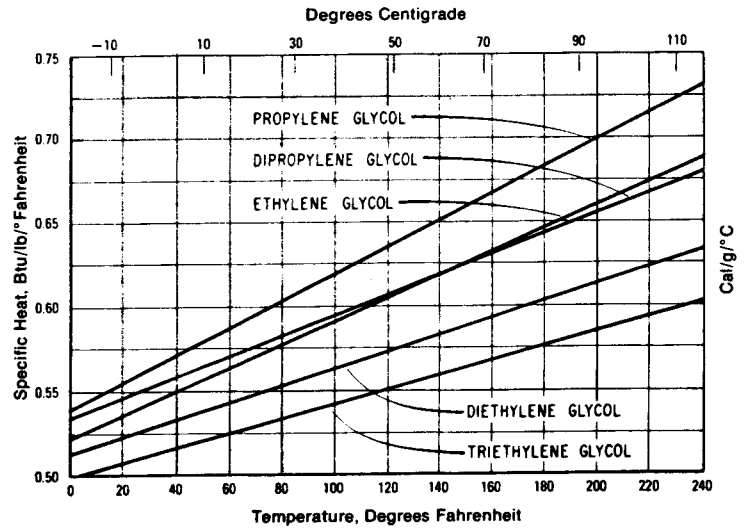


Table 7.148: Specific Heats of Aqueous Glycol Solutions (Btu/lb°F) (23)

| Temp. °F | Glycol, % by Weight | | | | | | Temp. °C |
|---------------------------|---------------------|------|------|------|------|------|----------|
| | 100 | 80 | 60 | 40 | 20 | 10 | |
| ETHYLENE GLYCOL | | | | | | | |
| 60 | .563 | .660 | .757 | .855 | .940 | .976 | 15.6 |
| 80 | .576 | .673 | .769 | .864 | .942 | .977 | 26.7 |
| 100 | .590 | .685 | .780 | .872 | .944 | .978 | 37.8 |
| 120 | .604 | .697 | .792 | .880 | .946 | .979 | 48.9 |
| 140 | .618 | .710 | .803 | .888 | .948 | .980 | 60.0 |
| 160 | .632 | .722 | .814 | .896 | .950 | .981 | 71.1 |
| 180 | .646 | .735 | .825 | .905 | .952 | .982 | 82.2 |
| 200 | .660 | .748 | .837 | .914 | .954 | .982 | 93.3 |
| 220 | .674 | .761 | .849 | .922 | .956 | .983 | 104.4 |
| 240 | .688 | .774 | .861 | .930 | .958 | .984 | 115.5 |
| DIETHYLENE GLYCOL | | | | | | | |
| 60 | .543 | .631 | .736 | .849 | .922 | .949 | 15.6 |
| 80 | .555 | .645 | .749 | .855 | .927 | .954 | 26.7 |
| 100 | .565 | .659 | .762 | .861 | .932 | .960 | 37.8 |
| 120 | .575 | .672 | .774 | .868 | .937 | .965 | 48.9 |
| 140 | .583 | .686 | .787 | .874 | .943 | .970 | 60.0 |
| 160 | .593 | .700 | .800 | .880 | .948 | .975 | 71.1 |
| 180 | .603 | .714 | .813 | .886 | .954 | .980 | 82.2 |
| 200 | .613 | .728 | .826 | .893 | .960 | .985 | 93.3 |
| 220 | .623 | .742 | .839 | .900 | .965 | .990 | 104.4 |
| 240 | .634 | .756 | .852 | .907 | .971 | .995 | 115.5 |
| TRIETHYLENE GLYCOL | | | | | | | |
| 60 | .525 | .637 | .749 | .866 | .935 | .979 | 15.6 |
| 80 | .534 | .648 | .758 | .872 | .938 | .980 | 26.7 |
| 100 | .540 | .659 | .768 | .878 | .941 | .981 | 37.8 |
| 120 | .550 | .669 | .777 | .884 | .944 | .981 | 48.9 |
| 140 | .562 | .680 | .787 | .890 | .946 | .982 | 60.0 |
| 160 | .569 | .690 | .796 | .895 | .949 | .983 | 71.1 |
| 180 | .577 | .701 | .806 | .901 | .952 | .984 | 82.2 |
| 200 | .586 | .711 | .815 | .907 | .955 | .985 | 93.3 |
| 220 | .595 | .722 | .825 | .913 | .957 | .985 | 104.4 |
| 240 | .605 | .782 | .834 | .919 | .960 | .986 | 115.5 |
| PROPYLENE GLYCOL | | | | | | | |
| 60 | .587 | .687 | .795 | .900 | .970 | .985 | 15.6 |
| 80 | .603 | .702 | .808 | .907 | .972 | .986 | 26.7 |
| 100 | .619 | .717 | .821 | .913 | .975 | .988 | 37.8 |
| 120 | .635 | .733 | .833 | .919 | .977 | .990 | 48.9 |
| 140 | .651 | .748 | .846 | .925 | .980 | .991 | 60.0 |
| 160 | .667 | .763 | .857 | .930 | .983 | .992 | 71.1 |
| 180 | .683 | .778 | .871 | .936 | .984 | .994 | 82.2 |
| 200 | .699 | .794 | .882 | .944 | .987 | .995 | 93.3 |
| 220 | .715 | .809 | .895 | .949 | .990 | .996 | 104.4 |
| 240 | .731 | .824 | .907 | .954 | .993 | .998 | 115.5 |
| DIPROPYLENE GLYCOL | | | | | | | |
| 60 | .570 | .687 | .801 | .900 | .967 | .985 | 15.6 |
| 80 | .582 | .698 | .810 | .905 | .970 | .986 | 26.7 |
| 100 | .594 | .708 | .819 | .910 | .972 | .988 | 37.8 |
| 120 | .606 | .718 | .828 | .915 | .974 | .990 | 48.9 |
| 140 | .618 | .728 | .836 | .920 | .976 | .991 | 60.0 |
| 160 | .631 | .739 | .845 | .924 | .978 | .993 | 71.1 |
| 180 | .644 | .749 | .854 | .929 | .980 | .995 | 82.2 |
| 200 | .656 | .760 | .863 | .934 | .983 | .997 | 93.3 |
| 220 | .668 | .770 | .872 | .939 | .985 | .998 | 104.4 |
| 240 | .680 | .781 | .881 | .944 | .988 | .999 | 115.5 |

Table 7.149: Densities of Aqueous Ethylene Glycol Solutions (% by wt) (23)

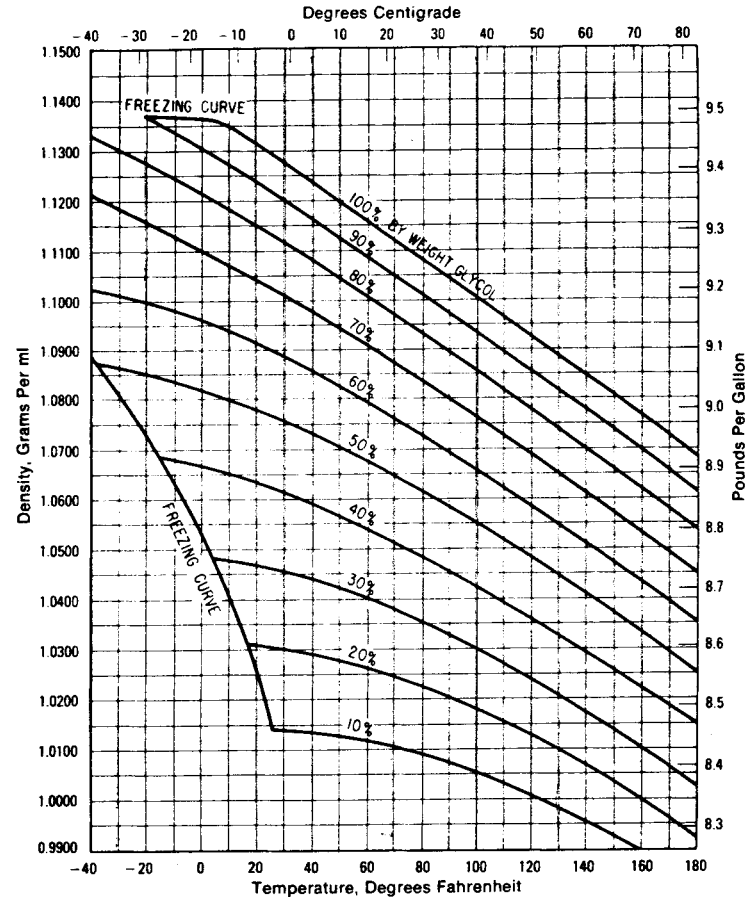


Table 7.150: Densities of Aqueous Diethylene Glycol Solutions (% by wt) (23)

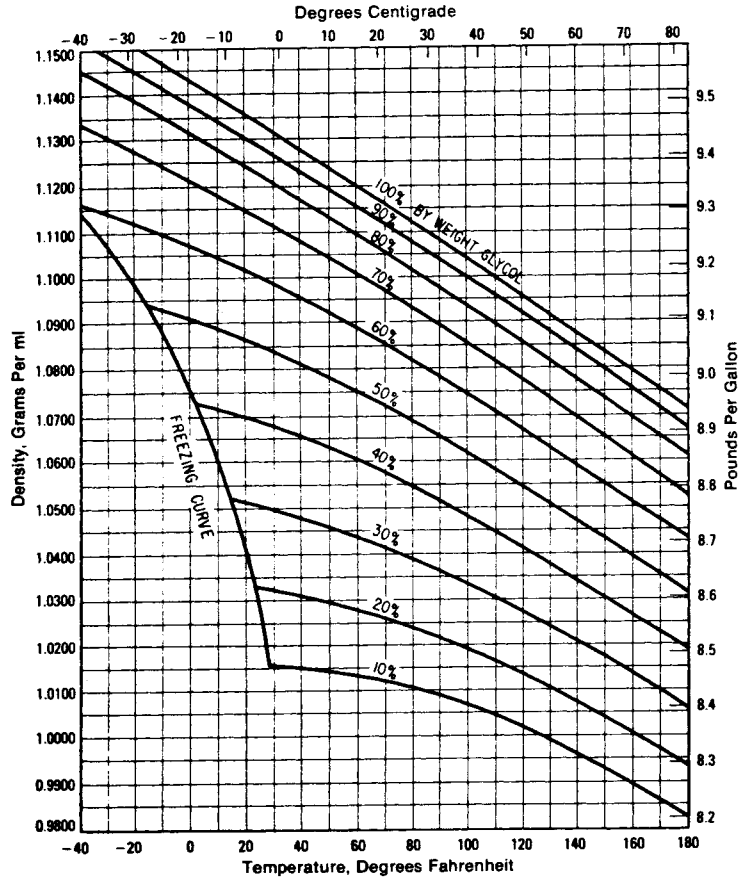


Table 7.151: Densities of Aqueous Triethylene Glycol Solutions (% by wt) (23)

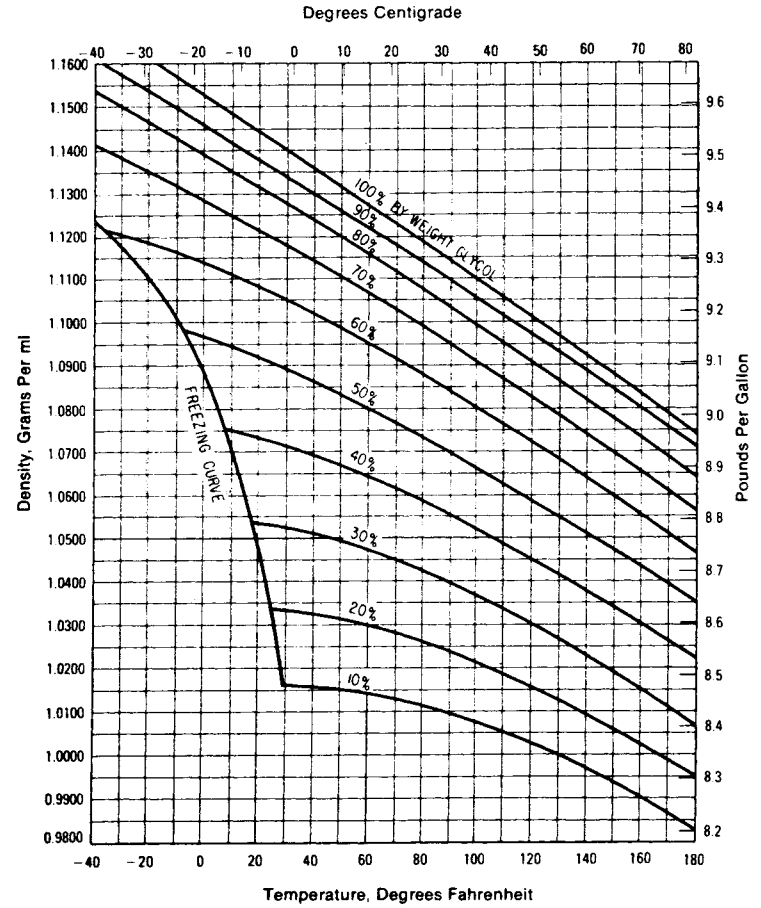


Table 7.152: Densities of Aqueous Tetraethylene Glycol Solutions (% by wt) (23)

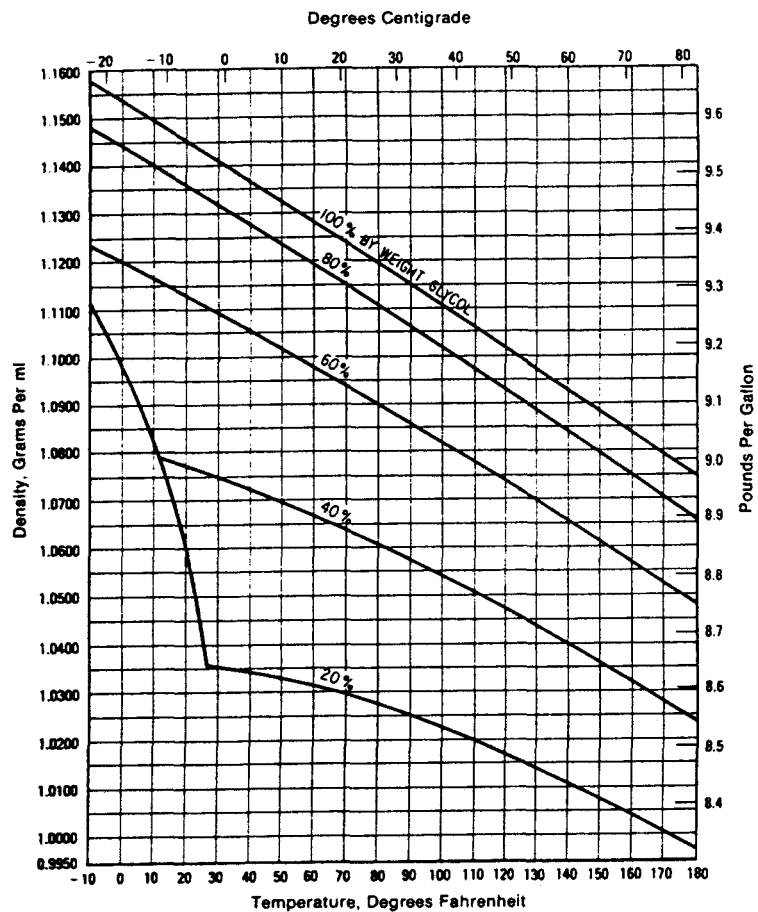


Table 7.153: Densities of Aqueous Propylene Glycol Solutions (% by wt) (23)

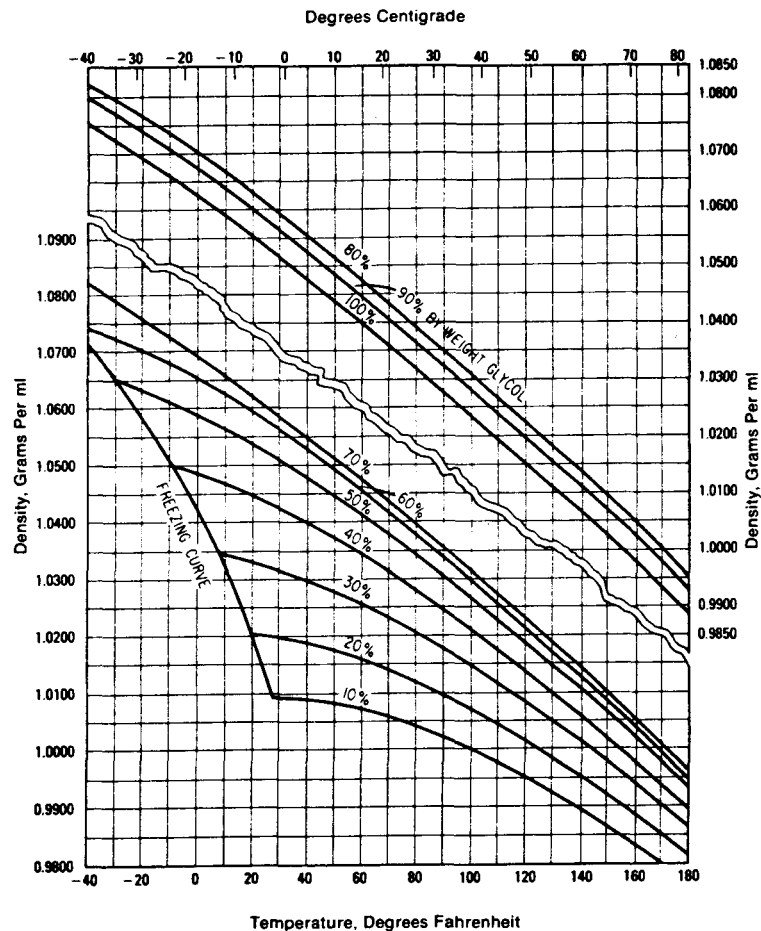


Table 7.154: Densities of Aqueous Dipropylene Glycol Solutions (% by wt) (23)

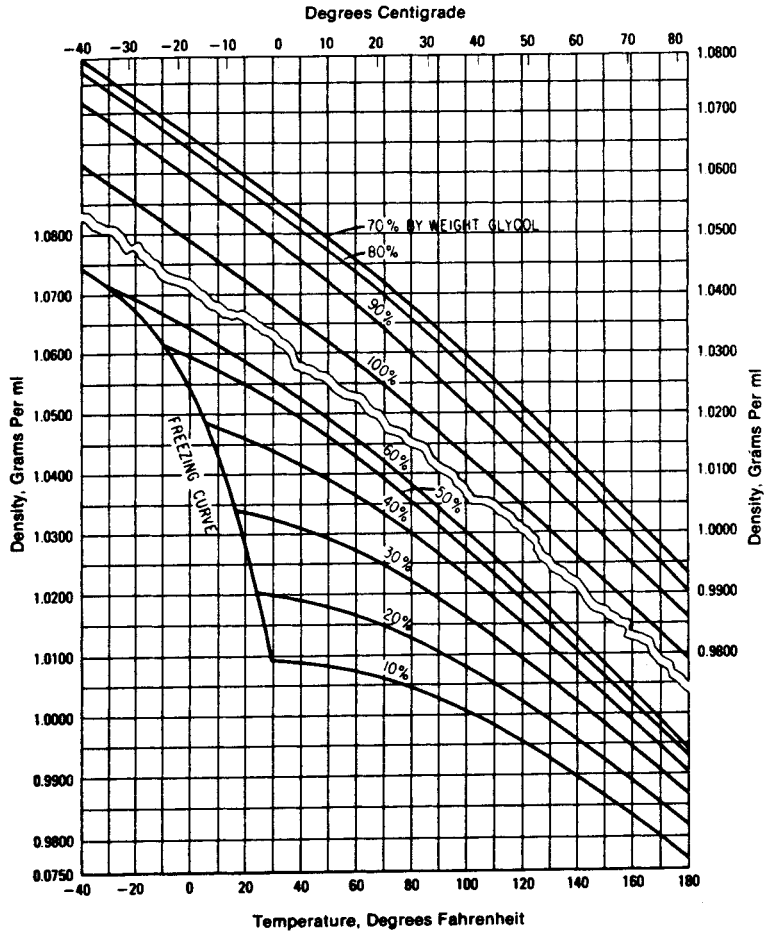


Table 7.155: Densities of Aqueous Tripropylene Glycol Solutions (% by wt) (23)

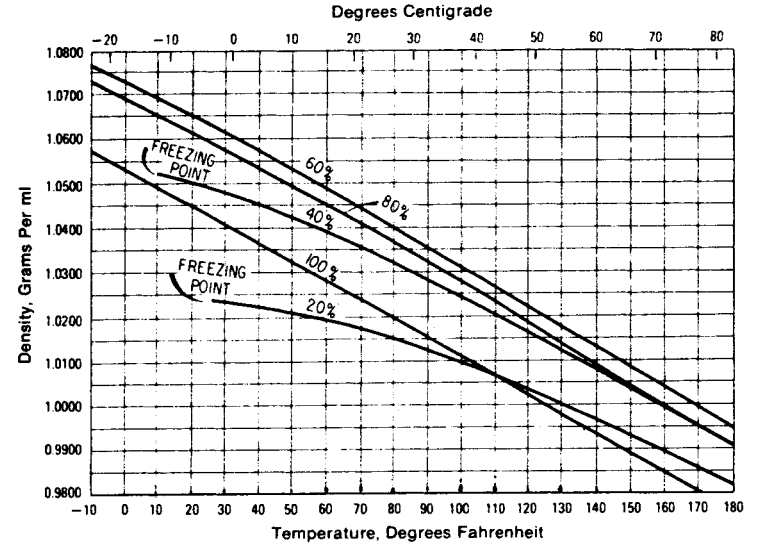


Table 7.156: Surface Tensions of Aqueous Solutions of Glycols at 77°F (23)

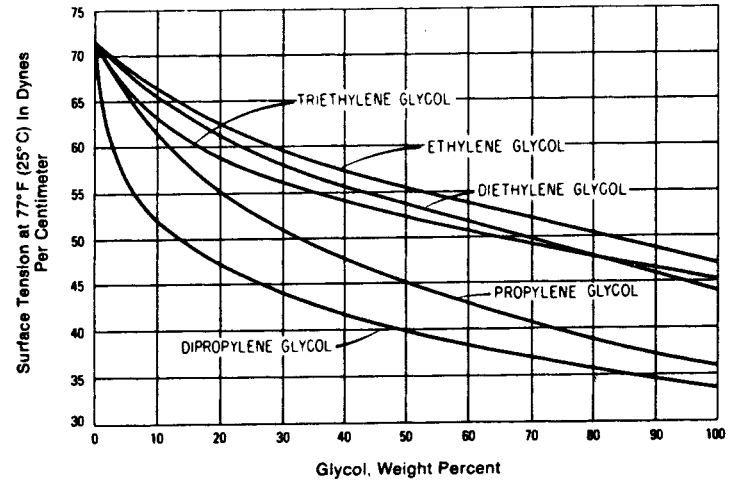


Table 7.157: Flammability of Glycols (23)

| Glycol | Flash Point | | Fire Point | |
|----------------------------|-------------|-----|------------|-----|
| | °F | °C | °F | °C |
| Ethylene Glycol | 240 | 116 | 245 | 119 |
| Diethylene Glycol | 255 | 124 | 290 | 142 |
| Triethylene Glycol | 350 | 177 | 330 | 166 |
| Tetraethylene Glycol | 400 | 204 | 375 | 191 |
| Propylene Glycol | 220 | 104 | 220 | 104 |
| Dipropylene Glycol | 260 | 127 | 260 | 127 |
| Tripropylene Glycol | 285 | 141 | 310 | 154 |

Note: Flash points are determined by the ASTM Pensky-Martens Closed Cup Method and fire points by the ASTM Cleveland Open Cup Method.

Table 7.158: Refractive Indices of Aqueous Glycol Solutions at 77°F (25°C) (23)

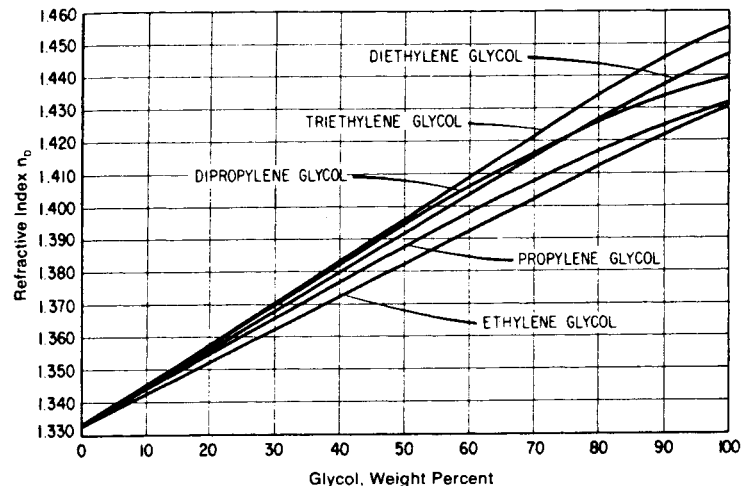


Table 7.159: Conversion Chart for Aqueous Ethylene Glycol Solutions (23)

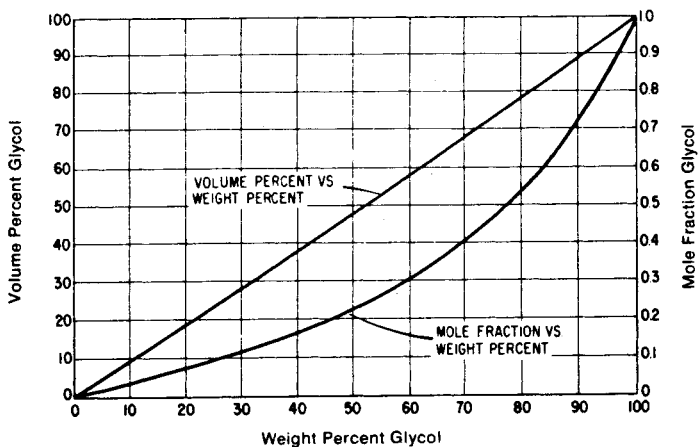


Table 7.160: Conversion Chart for Aqueous Diethylene Glycol Solutions (23)

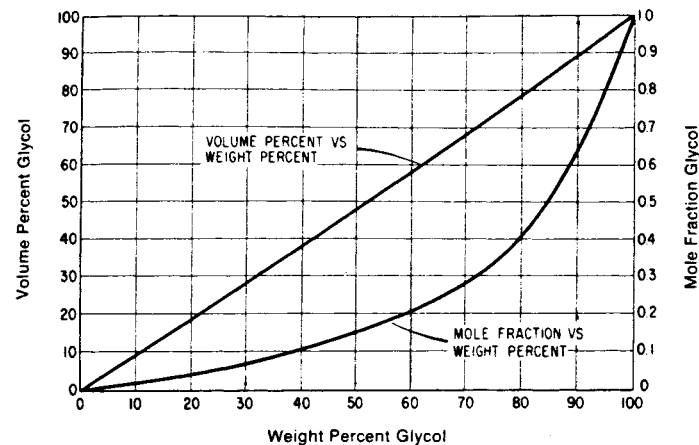


Table 7.161: Conversion Chart for Aqueous Triethylene Glycol Solutions (23)

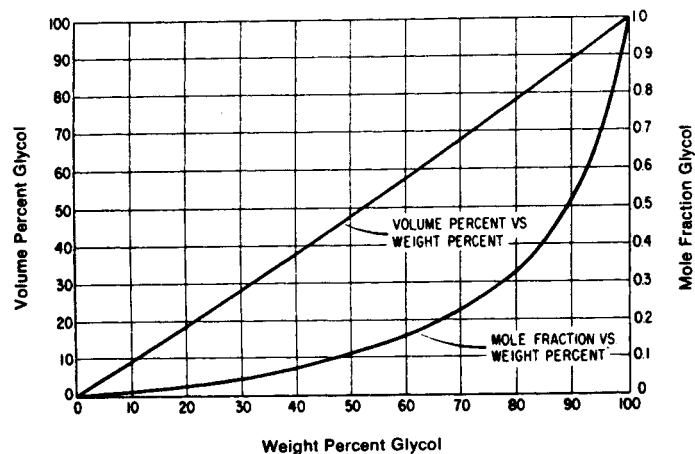


Table 7.162: Conversion Chart for Aqueous Tetraethylene Glycol Solutions (23)

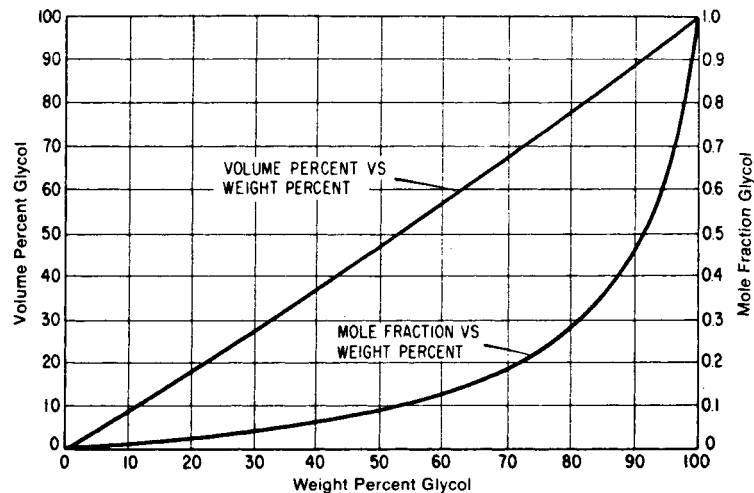


Table 7.163: Conversion Chart for Aqueous Propylene Glycol Solutions (23)

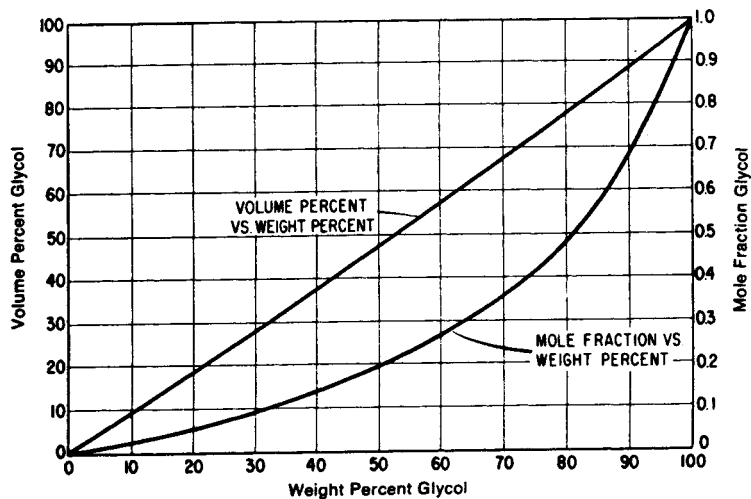


Table 7.164: Conversion Chart for Aqueous Dipropylene Glycol Solutions (23)

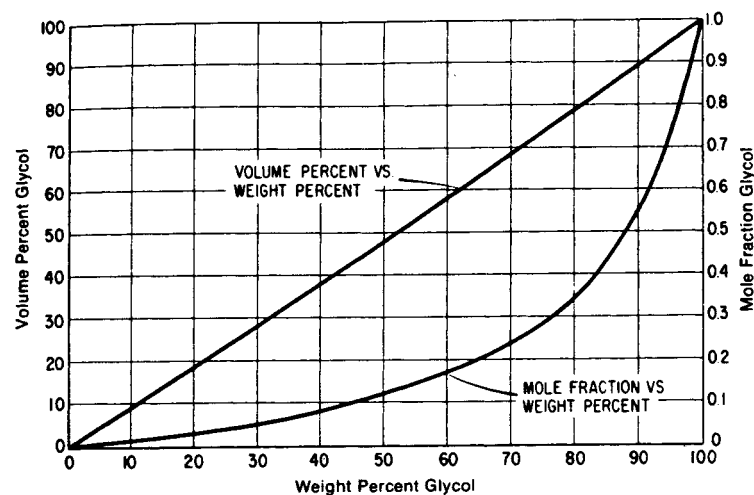


Table 7.165: Conversion Chart for Aqueous Tripropylene Glycol Solutions (23)


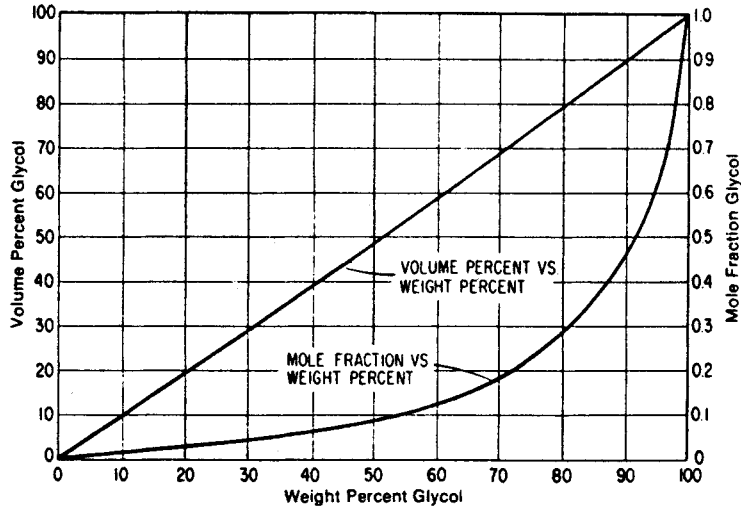


Table 7.166: Freeze Points and Burst Points of Aqueous Solutions (23)

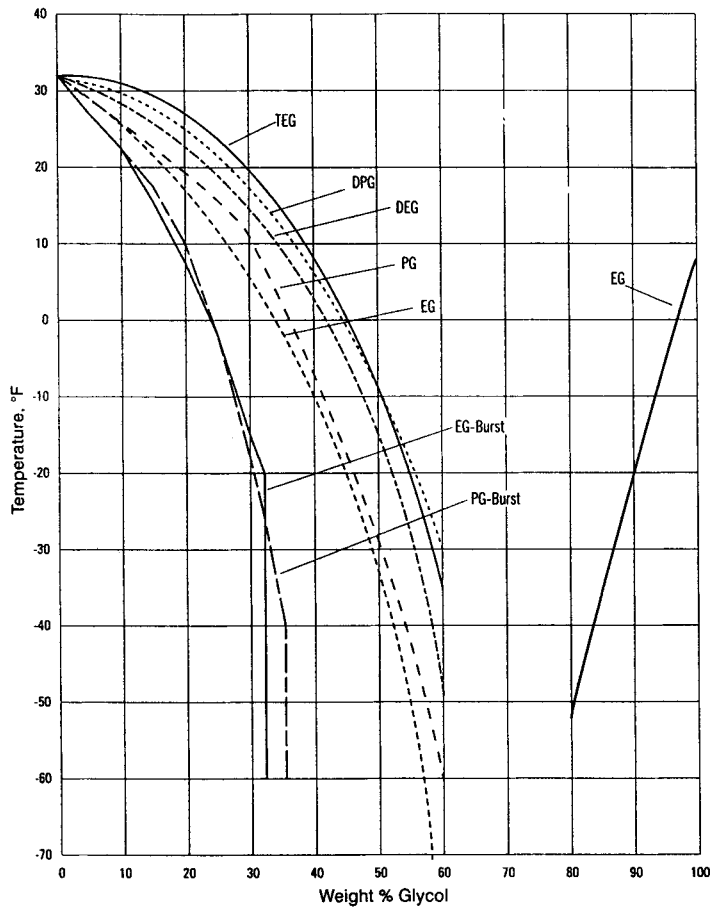

Note: It should be remembered that the freezing points are the temperatures at which the first crystals form, and that even below these temperatures, a slushy solution exists which will still flow.

Table 7.167: Solubility of Various Compounds in Glycols (23)

| S = Completely Soluble I = Insoluble < = Less Than > = Greater Than | Ethylene Glycol | Diethylene Glycol | Triethylene Glycol | Tetraethylene Glycol | Propylene Glycol | Di- propylene Glycol | | Tri- propylene Glycol |
|------------------------------------------------------------------------------|-----------------|-------------------|--------------------|----------------------|------------------|-------------------------|--------------------------|--------------------------|
| | | | | | | Di- propylene Glycol | Tri- propylene Glycol | |
| Benzene | 5.7 | 31.3 | S | S | 19.2 | S | S | |
| Carbon Tetrachloride ¹ | 6.2 | 26.2 | 33.6 | 62 | 23.4 | S | S | |
| Dibutyl Phthalate | 0.5 | 10.6 | 16.5 | S | 8.1 | S | S | |
| Dichloroethyl Ether | 10.6 | S | S | S | 37.1 | S | S | |
| Diethanolamine ¹ | S | S | S | S | S | S | S | |
| DOWANOL* PM Glycol Ether ¹ | S | S | S | S | S | S | S | |
| DOWANOL* DPM Glycol Ether ¹ | S | S | S | S | S | S | S | |
| Ethyl Alcohol | S | S | S | S | S | S | S | |
| Ethyl Ether | 8.2 | 16.3 | 16.9 | 20 | S | S | S | |
| Methyl Alcohol | S | S | S | S | S | S | S | |
| Methyl Isobutyl Carbinol | S | S | S | S | S | S | S | |
| Methyl Isobutyl Ketone | 12 | S | S | S | S | S | S | |
| Monochlorobenzene | 5.7 | S | S | S | 22.5 | S | S | |
| Monoethanolamine ¹ | S | S | S | S | S | S | S | |
| ortho-Dichlorobenzene | 4.5 | 48.4 | S | S | 19.4 | S | S | |
| Perchloroethylene ¹ | 0.7 | 10.7 | 15.0 | 19.0 | 14.5 | S | S | |
| Phenol ¹ | S | S | S | S | S | S | S | |
| Styrene ¹ | 3.4 | 36 | S | S | 15 | S | S | |
| Toluene | 2.9 | 17.2 | 24.8 | 89 | 12.3 | S | S | |
| Urea | 48 | 30 | 37 | 28 | 29 | 12 | 10 | |
| Castor Oil | 1 | <0.5 | <0.5 | <1 | 0.8 | S | S | |
| Coconut Oil | 1 | 1 | 1 | <1 | 1 | 1 | 3 | |
| Cottonseed Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 | |
| Hydrous Wool Fat | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 | |
| Lard Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 | |
| Linseed Oil | 1 | 1 | 1 | <1 | 1 | 1.4 | 2.5 | |
| Oiticica Oil | <1 | <1 | <1 | <1 | <1 | <1 | <1 | |
| Olive Oil | 1 | 1 | 1 | <1 | 1 | 0.7 | 1.5 | |
| Pine Oil | S | S | S | S | S | S | S | |
| Soya Bean Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 | |
| Sperm Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 | |
| Tall Oil | <1 | <1 | <1 | <1 | <1 | S | S | |
| Tung Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 | |
| Turkey Red Oil | <1 | <1 ² | 1 ² | 1 ² | <1 ² | 3 ² | 4 ² | |
| Paraffin Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 | |
| SAE No. 10 Oil | 1 | 1 | 1 | <1 | 1 | 1 | <1 | |
| VMP Naphtha | <1 | <1 | <1 | 1 | 1 | 10 | 14 | |
| Animal Glue (Dry) | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 | |
| Dextrin | <1 | <1 | <1 | <1 | <1 | <1 | <1 | |
| Gum Damar | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 | |
| Kauri Gum | <0.5 | <0.5 | <0.5 | >16 ³ | <5 | <5 | >16 ³ | |
| Sudan III | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 | |
| Shellac | <0.5 | <0.5 | <0.5 | <1 | <0.5 | <0.5 | <1 | |

¹ Product of The Dow Chemical Company² Forms stable emulsion from this concentration to 100%³ Becomes too viscous to stir beyond 16%.

Table 7.168: Viscosity of Anhydrous Glycols (23)

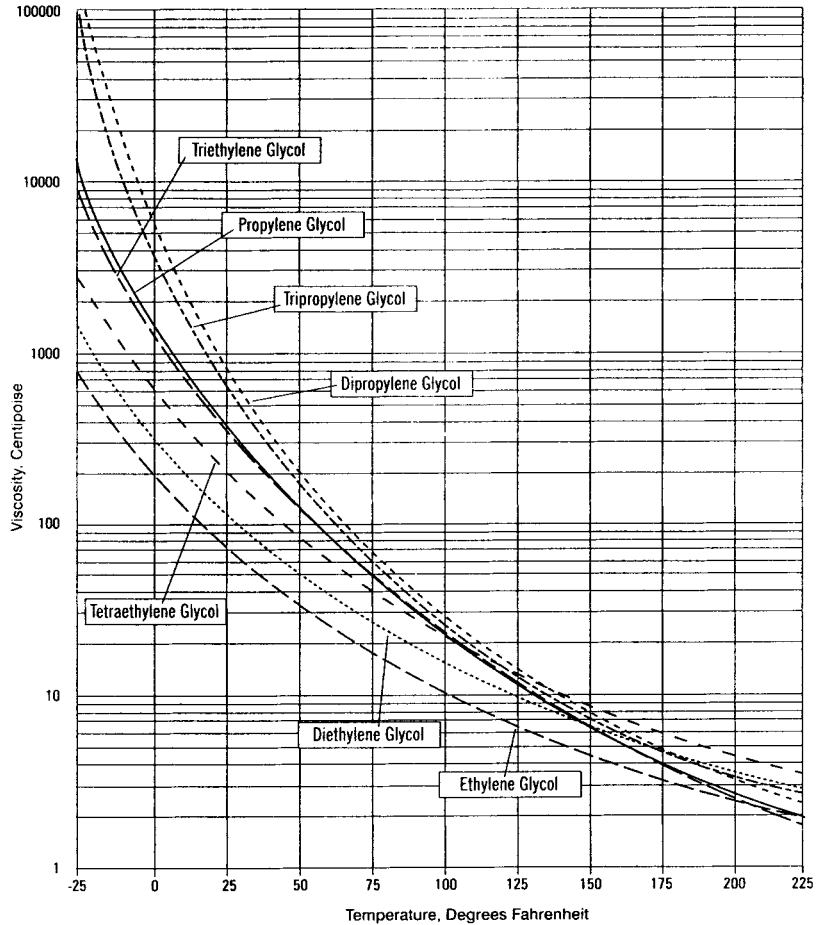


Table 7.169: Specific Heat of Anhydrous Glycols (23)

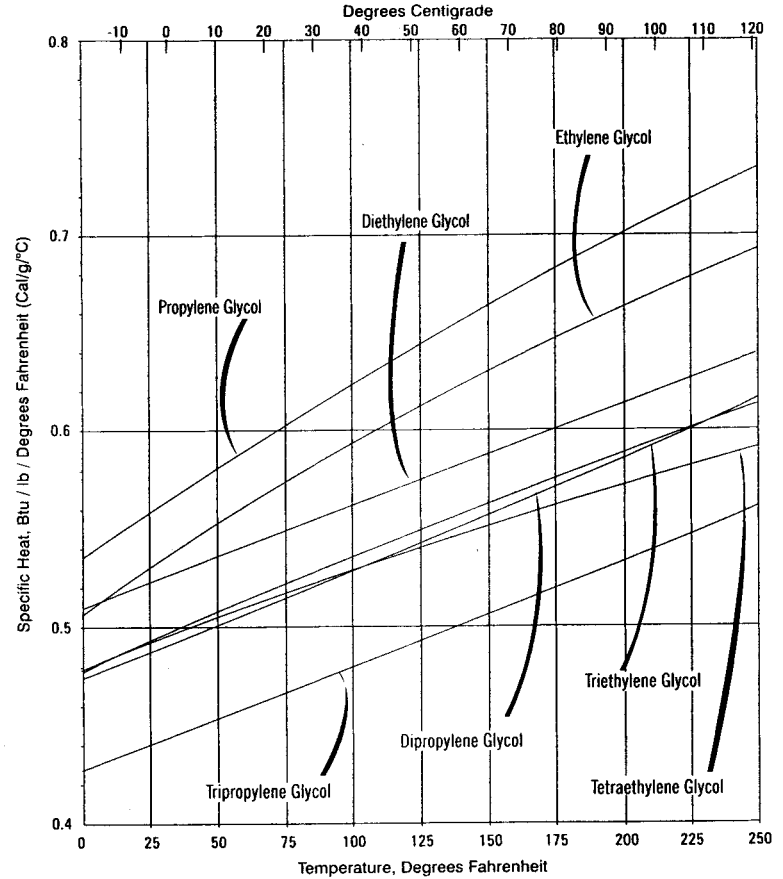


Table 7.170: Technical Data: Ethylene Glycol Products (27)

| Parameters | MEG | DEG | TEG |
|-----------------------------------------------|----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
| Chemical formula | C ₂ H ₆ O ₂ | C ₄ H ₁₀ O ₃ | C ₆ H ₁₄ O ₄ |
| CAS # | 107-21-1 | 111-46-6 | 112-27-6 |
| HMIS rating: Health hazard | 1* | 1 | 1 |
| Fire hazard | 1 | 1 | 1 |
| Reactivity | 0 | 0 | 0 |
| Molecular weight | 62.07 | 106.1 | 150.17 |
| Specific gravity at 20/20°C | 1.1154 | 1.118 | 1.125 |
| Weight/gal (US) in lbs at 20°C | 9.28 | 9.31 | 9.36 |
| Refractive index at 20°C | 1.4316 | 1.447 | 1.4559 |
| Viscosity at 20°C, cP | 21 | 54 | 64 |
| Flash point (PMCC), °F (°C) | 244 (118) | 280 (138) | 340 (171) |
| Boiling point, °C (°F) | 197.6 (387.1) | 245 (473) | 287.4 (549.5) |
| Freezing point, °C (°F) | -13 (8.6) | -8 (17.6) | -7.2 (19) |
| Vapor density | 2.1 | 2.14 | 5.2 |
| Explosive limits: Lower (%) | 3.2 | 1.6 | 0.9 |
| Upper (%) | 15.3 | 10.8 | 9.2 |
| Autoignition temperature, °F (°C) | 752 (399) | 442 (227) | 699 (370) |
| Vapor pressure at 20°C, mm Hg | 0.06 | < 0.01 | < 0.01 |
| Surface tension at 20°C, dyne/cm | 48.4 | 44.7 | 45.2 |
| Specific heat at 20°C, cal/g/°C | 0.56 | 0.50 | 0.53 |
| Coefficient of expansion, per °C (10° - 40°C) | 0.00062 | 0.00064 | 0.00068 |

Table 7.171: Ethylene Glycol Compatibility (27)

| Acceptable Metals | Acceptable Non-Metals |
|--------------------------|---------------------------------------------------------------------------------------------|
| Aluminum (to 100°F) | Butyl GR-1 (IIR) |
| Brass (to 80°F) | Carbon graphite resin impregnated |
| Bronze | Chlorinated Polyether |
| Carbon steel (to 100°F) | CPVC |
| Hastelloy B [®] | Ethylene Propylene Diene (EPDM) |
| Hastelloy C [®] | Epoxy Compounds |
| High silicon iron | Ethylene-Tetrafluoroethylene (ETFE, Tefzel [®]) |
| Inconel [®] | Fluorinated Ethylene Propylene (FEP) |
| Lead (to 90°F) | Fluoroelastomers (FKM, Viton A [®] , Fluorel [®]) |
| Monel [®] | Furfural Alcohol (Furans) |
| Nickel | Modified Phenylene oxide (Noryl [®]) |
| Nickel resist | Natural Rubber |
| 304/347 Stainless steel | Perfluoroalkoxy (PFA) |
| 316 Stainless steel | Perfluoroelastomers (FPM, Kalrez [®] , Chemraz [®] , Kel-F [®]) |
| 20Cb3 Stainless steel | Phenolics |
| Tantalum (to 90°F) | Polyamides (Nylon [®] 12, Nylon [®] 66) |
| Titanium | Polybutadiene (Isoprene) |
| Zirconium | Polychloroprene (Neoprene [®]) |
| | Polyester Terephthalate (PET) |
| | Polyethylene |
| | Polypropylene |
| | Polystyrenes |
| | Polysulfones |
| | Polyphenylene Sulfides (Ryton [®]) |
| | Polyvinylidene fluoride (PVDF, Kynar [®]) |
| | Silicone Rubbers |
| | Vinyl Ester |

Registered Trademarks

| | |
|--------------------------------------------------------------------|---------------------------------------------------|
| Teflon [®] , Kalrez [®] , Nylon [®] | Registered trademark of E. I. du Pont de Nemours |
| Neoprene [®] , Tefzel [®] , Viton A [®] | Registered trademark of E. I. du Pont de Nemours |
| Chemraz [®] | Registered trademark of Green, Tweed & Co., Inc. |
| Buna-N [®] | Registered trademark of Mobay Corporation |
| Hastelloy B [®] , Hastelloy C [®] | Registered trademark of Cabot Corporation |
| Inconel [®] , Monel [®] | Registered trademark of Inco Alloys International |
| Fluorel [®] , Kel-F [®] | Registered trademark of 3-M Corporation |
| Noryl [®] | Registered trademark of General Electric Co. |
| Ryton [®] | Registered trademark of Phillips Petroleum Corp. |
| Kynar [®] | Registered trademark of Pennwalt Corporation |

Table 7.172: Weight per Gallon at Various Temperatures (lb) (27)

| Temperature, °F | MEG | DEG | TEG |
|-----------------|-------|-------|-------|
| 40 | 9.383 | 9.410 | 9.480 |
| 45 | 9.366 | 9.394 | 9.461 |
| 50 | 9.349 | 9.379 | 9.444 |
| 55 | 9.334 | 9.361 | 9.424 |
| 60 | 9.318 | 9.344 | 9.405 |
| 65 | 9.301 | 9.328 | 9.389 |
| 70 | 9.286 | 9.312 | 9.370 |
| 75 | 9.268 | 9.294 | 9.352 |
| 80 | 9.253 | 9.278 | 9.334 |
| 85 | 9.235 | 9.261 | 9.315 |
| 90 | 9.218 | 9.245 | 9.297 |
| 95 | 9.202 | 9.228 | 9.278 |
| 100 | 9.185 | 9.211 | 9.261 |

Table 7.173: Weight Percent vs Volume Percent Aq. Monoethylene Glycol Solutions, 20°C (27)

| Wt. % | Vol. % | Wt. % | Vol. % | Wt. % | Vol. % |
|-------|--------|-------|--------|-------|--------|
| 0 | 0 | 34 | 31.6 | 68 | 65.6 |
| 2 | 1.8 | 36 | 33.5 | 70 | 67.7 |
| 4 | 3.6 | 38 | 35.5 | 72 | 69.7 |
| 6 | 5.4 | 40 | 37.4 | 74 | 71.8 |
| 8 | 7.2 | 42 | 39.4 | 76 | 74.0 |
| 10 | 9.1 | 44 | 41.3 | 78 | 76.1 |
| 12 | 10.9 | 46 | 43.3 | 80 | 78.2 |
| 14 | 12.7 | 48 | 45.3 | 82 | 80.3 |
| 16 | 14.6 | 50 | 47.3 | 84 | 82.5 |
| 18 | 16.4 | 52 | 49.3 | 86 | 84.6 |
| 20 | 18.3 | 54 | 51.3 | 88 | 86.8 |
| 22 | 20.2 | 56 | 53.3 | 90 | 89.0 |
| 24 | 22.1 | 58 | 55.3 | 92 | 91.2 |
| 26 | 24.0 | 60 | 57.4 | 94 | 93.4 |
| 28 | 25.9 | 62 | 59.4 | 96 | 95.6 |
| 30 | 27.8 | 64 | 61.4 | 98 | 97.8 |
| 32 | 29.7 | 66 | 63.5 | 100 | 100 |

Table 7.174: Specific Gravity vs Composition @ Various Temperatures of Aqueous MEG Solutions (27)

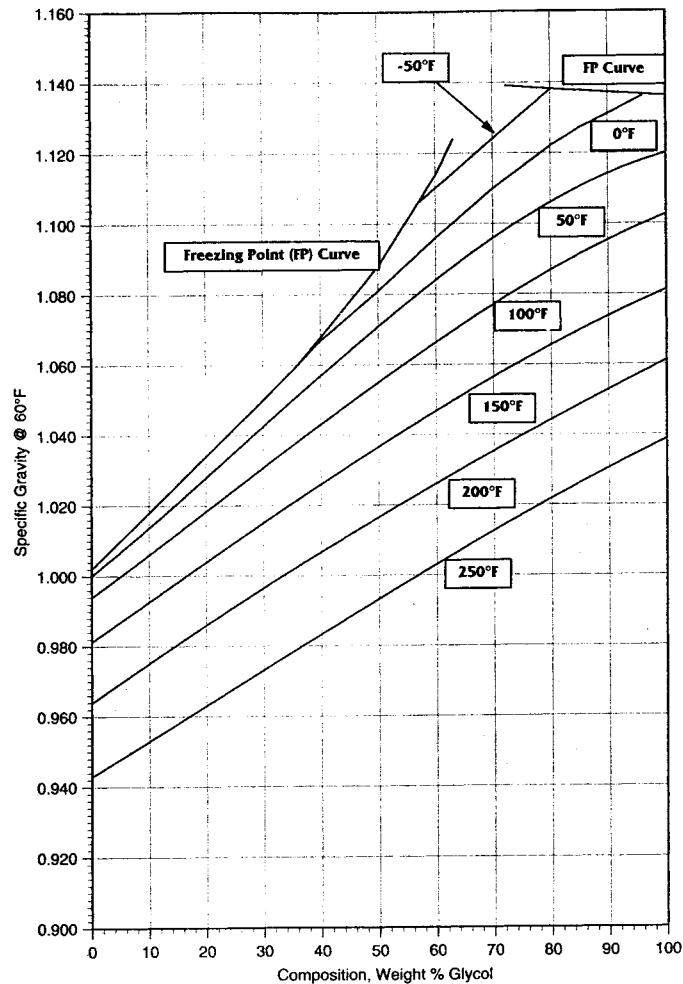


Table 7.175: Specific Gravity vs Composition @ Various Temperatures of Aqueous DEG Solutions (27)

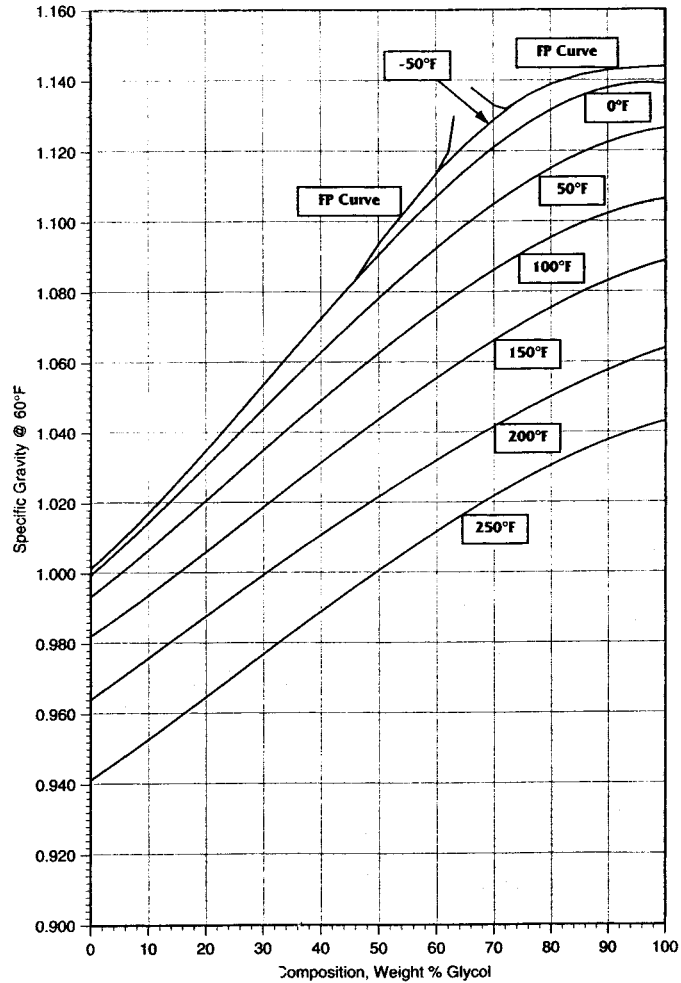


Table 7.176: Specific Gravity vs Composition @ Various Temperatures of Aqueous TEG Solutions (27)

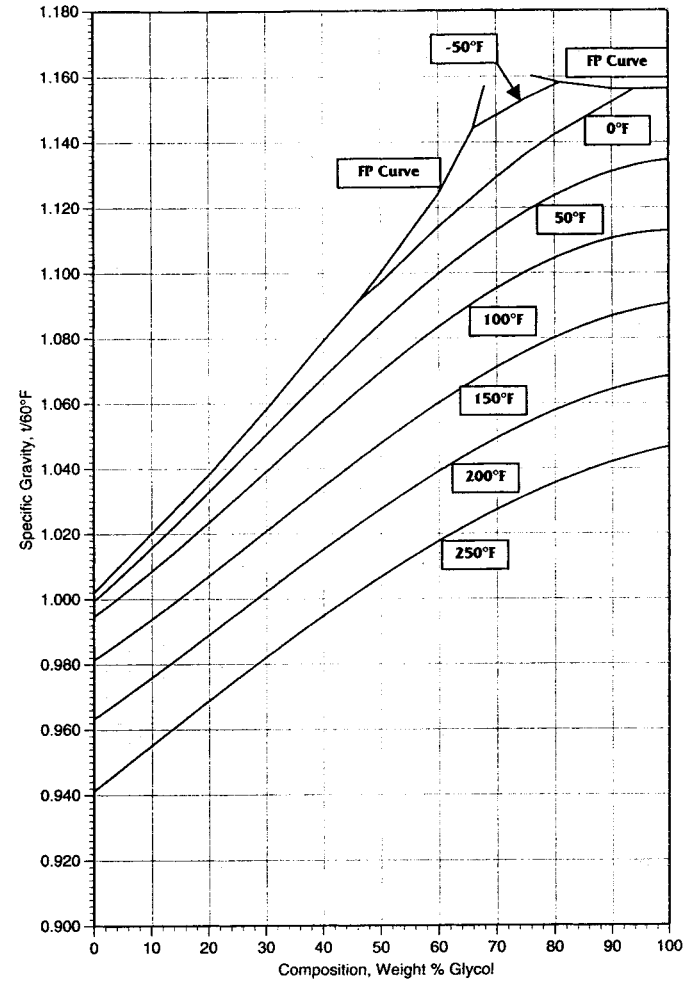


Table 7.177: Boiling Point @ 760 mm Hg vs Composition of Aqueous Glycol Solutions (27)

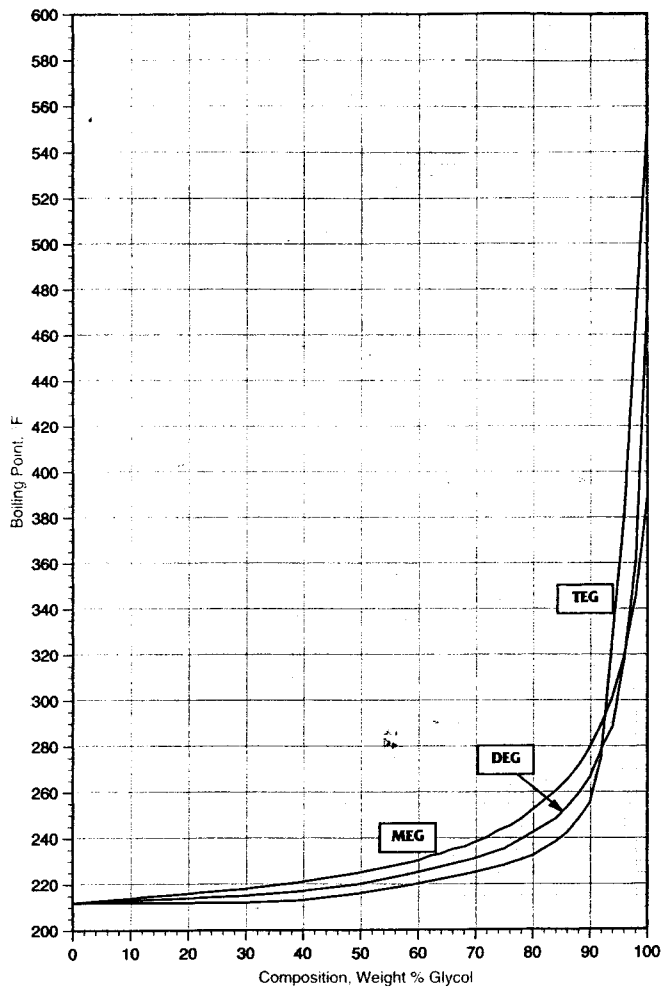


Table 7.178: Freezing Point vs Composition of Aqueous Glycol Solutions (27)

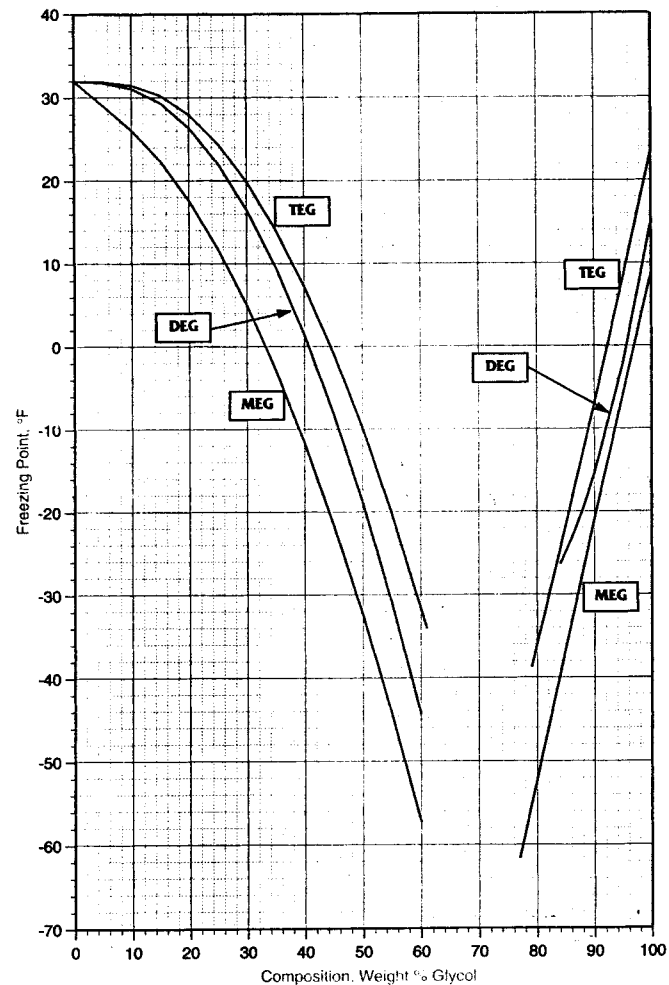


Table 7.179: Vapor Pressure vs Temperature of the Glycols (27)

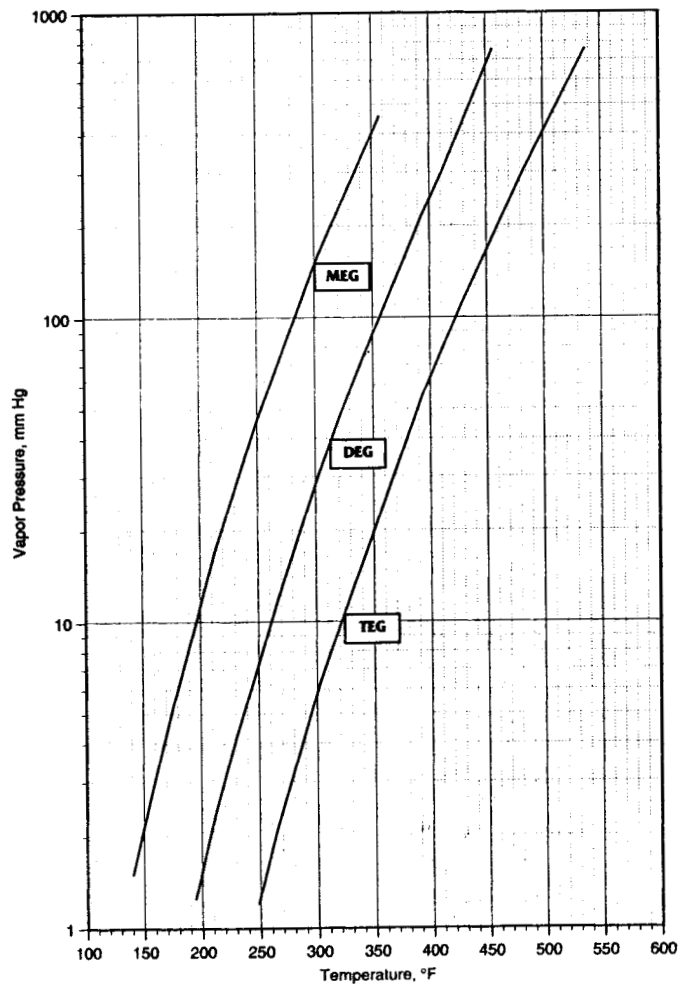


Table 7.180: Viscosity vs Temperature of the Glycols (27)

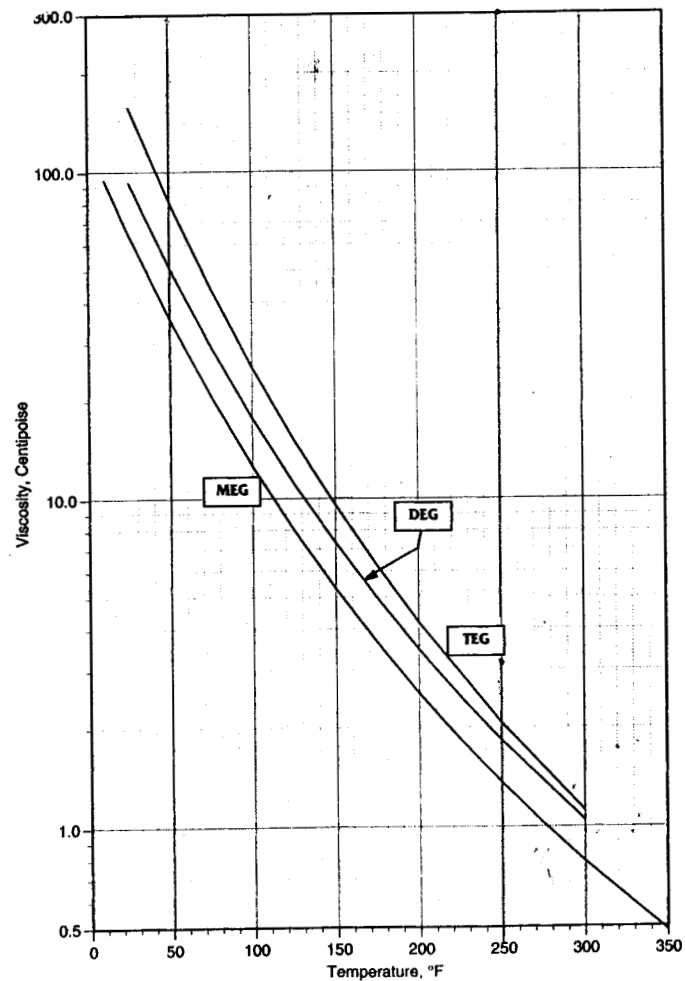


Table 7.181: Fire Hazard Information (23)

| Glycol | Flammable Limits Vol % | | Auto- Ignition Temp °F ¹ | NFPA ² Hazard Identification | | | Flash Point | |
|----------------------|---------------------------|-------|-------------------------------------------|-----------------------------------------|-------|------------|-------------|-----|
| | Lower | Upper | | Health | Flam. | Reactivity | F° | C° |
| Ethylene Glycol | 3.2 | - | 748 | 1 | 1 | 0 | 247 | 119 |
| Diethylene Glycol | - | - | 435 | 1 | 1 | 0 | 281 | 138 |
| Triethylene Glycol | 0.9 | 9.2 | 700 | 1 | 1 | 0 | 325 | 163 |
| Tetraethylene Glycol | - | - | - | 1 | 1 | 0 | 400 | 204 |
| Propylene Glycol | 2.6 | 12.5 | 700 | 0 | 1 | 0 | 218 | 103 |
| Dipropylene Glycol | - | - | - | 0 | 1 | 0 | 250 | 121 |
| Tripropylene Glycol | - | - | - | 0 | 1 | 0 | 285 | 141 |

¹In presence of air
²NFPA – National Fire Protection Association

Table 7.182: Acute Oral Toxicity (23)

**LD₅₀ Values for Various Glycols
Single Doses to Rats**

| Glycol | LD ₅₀ gm/kg |
|--------------------|---------------------------|
| Ethylene..... | 6.1 |
| Diethylene..... | 16.6 |
| Triethylene..... | 22.0 |
| Tetraethylene..... | 32.8 |
| Propylene..... | 33.7 |
| Dipropylene..... | 14.8 |
| Tripropylene..... | 3.0† |

†Largest dose survived by all rats tested: 10.0 gm/kg resulted in the death of all the rats tested.

Table 7.183: Environmental Considerations, Biodegradation (23)

| Glycol | Biodegradation | |
|----------------------|----------------------|---------------------------|
| | ThOD ² | BOD ³ - 20 Day |
| Ethylene Glycol | 1.29p/p ¹ | 1.15p/p |
| Diethylene Glycol | 1.51 | 0.88 |
| Triethylene Glycol | 1.60 | 0.27 |
| Tetraethylene Glycol | 1.65 | 0.71 |
| Propylene Glycol | 1.68 | 1.45 |
| Dipropylene Glycol | 1.91 | 0.71 |
| Tripropylene Glycol | 1.38 | — |

Table 7.184: Ethylene Glycols: Products, Grades and Specifications (27)

| Specification | MEG High Purity | MEG Fiber | MEG Industrial | MEG Antifreeze |
|-----------------------------------|--------------------|--------------|-------------------|-------------------|
| MEG, wt % min | 99.9 | 99.9 | 99.0 | 95.0 |
| DEG, wt % max | 0.05 | 0.05 | 0.5 | 5.0 |
| Other glycols, wt % max | | | 0.1 | |
| Color, APHA max | 5 | 5 | 10 | 15 |
| Acidity, wt % as Acetic Acid, max | 0.003 | 0.003 | 0.005 | 0.005 |
| Ash, wt % max | 0.003 | 0.003 | 0.005 | 0.005 |
| Chlorides (as Cl), ppm max | 0.1 | 0.1 | | |
| Iron, ppm max | 0.07 | 0.07 | | |
| Water, wt % max | 0.05 | 0.05 | 0.2 | 0.5 |
| Specific resistivity, ohm-cm, min | 3 x10 ⁶ | | | |
| UV transmittance, 1/cm | | | | |
| 350 mu %T min | 98 | 98 | | |
| 275 mu %T min | 93 | 93 | | |
| 220 mu %T min | 70 | 70 | | |
| Distillation range, °C(°F) | | | | |
| Initial boiling point | | | 193(379) | 190(374) |
| Dry point | | | 201(394) | 250(482) |

| Specifications | DEG Polyester | DEG Industrial | TEG Industrial | TEG Gas Treat. |
|-----------------------------------|------------------|-------------------|-------------------|-------------------|
| MEG, wt % | 0.2 max | 0.5 max | | 5.0 max |
| DEG, wt % | 99.3 min | 99.0 min | | 1.0 max |
| TEG, wt % | 0.3 max | 0.5 max | 99.0 min | 95.0 min |
| Other glycols | | | 1.0 | |
| Color, APHA max | 10 | 15 | 25 | 25 |
| Color, sulfuric test APHA | 30 | | | |
| Acidity, wt % as Acetic Acid, max | 0.003 | 0.005 | 0.005 | 0.01 |
| Ash, wt % max | 0.003 | 0.005 | 0.005 | 0.005 |
| Water, wt % max | 0.1 | 0.2 | 0.1 | 0.1 |
| Distillation range, °C(°F) | | | | |
| Initial boiling point | | 242(468) | 278(532) | |
| Dry point | | 250(482) | 300(572) | |

Specifications are subject to change. This section is intended for comparison use only. Please contact your sales representative or Technical Service for the current sales specification.

Table 7.185: Ashland Glycols (69)

| PRODUCT | LB./GAL. | | BOILING RANGE | | FL. PT. °F COC |
|---------------------|----------|----------------------|---------------|---------|-------------------|
| | 20° C | SP. GR. 20°/20° C | °C | °F | |
| Propylene Glycol | 8.64 | 1.038 | 186-190 | 367-374 | 225 |
| Ethylene Glycol | 9.28 | 1.115 | 193-204 | 379-399 | 240 |
| Hexylene Glycol | 7.68 | 0.923 | 196-199 | 385-390 | 215 |
| Dipropylene Glycol | 8.51 | 1.023 | 228-236 | 442-457 | 280 |
| Diethylene Glycol | 9.31 | 1.119 | 240-250 | 464-482 | 290 |
| Tripropylene Glycol | 8.52 | 1.023 | 263-280 | 505-536 | 310 |
| Triethylene Glycol | 9.36 | 1.125 | 278-300 | 532-572 | 330 |

Table 7.186: Chemcentral Polyols (67)

| POLYOLS | CAS | Mole Weight | % Purity Comm Prod. | Spec. Grav. @ 25/25°C | Lbs./Gal. @ 25°C | Coeff of Expan. Per °C | Sp. Gr Per °C | Retrac tive Index @ 25°C | Distillation Range @ 760 mm Hg | |
|-----------------------------|------------|-------------|---------------------|-----------------------|-------------------|------------------------|---------------|--------------------------|--------------------------------|---------|
| | | | | | | | | | °C | °F |
| ETHYLENE GLYCOL | 107-21-1 | 62.1 | | 1.110 | 9.26 | .00064 | .00046 | 1.430 | 197-204 | 387-399 |
| DIETHYLENE GLYCOL | 111-46-6 | 106.1 | | 1.113 | 9.29 | .00065 | .00046 | 1.446 | 245-255 | 473-491 |
| TRIETHYLENE GLYCOL | 112-27-6 | 150.2 | | 1.119 | 9.34 | .00071 | .00052 | 1.454 | 286-300 | 546-572 |
| PROPYLENE GLYCOL | 57-55-6 | 76.1 | | 1.033 | 8.62 | .00072 | .00050 | 1.431 | 187-190 | 369-374 |
| DIPROPYLENE GLYCOL | 25265-71-8 | 134.2 | | 1.023 | 8.54 | .00075 | .00052 | 1.439 | 231-238 | 448-480 |
| TRIPROPYLENE GLYCOL | 1638-16-0 | 192.3 | | 1.016 | 8.51 | .00070 | .00046 | 1.442 | 268-275 | 514-527 |
| 1-3 BUTYLENE GLYCOL | 107-88-00 | 90.12 | 95 | 1.006 ¹ | 8.38 ¹ | | | 1.440 | 200-215 | 392-419 |
| HEXYLENE GLYCOL | 107-41-5 | 118.18 | | 923 | 7.68 | .00078 | .00052 | 1.4263 ¹ | 196-199 | 385-390 |
| GLYCERINE SYNTHETIC | 56-81-5 | 92.1 | 99.5 | 1.262 | 10.50 | .000612 | .000615 | 1.472 | 296 | 554 |
| GLYCERINE SYNTHETIC U.S.P. | 56-81-5 | 92.1 | 96.0 | 1.2517 | 10.41 | .000612 | .000615 | 1.468 | 175 | 347 |
| GLYCERINE SYN. 99.5% U.S.P. | 56-81-5 | 92.1 | 99.5 | 1.266 | 10.50 | .000612 | .000615 | 1.472 | 290 | 554 |
| POLYGLYCOL E200 | | 200 | | 1.124 | 9.35 | | | 1.459 | | |
| POLYGLYCOL E300 | | 300 | | 1.125 | 9.36 | | | 1.463 | | |
| POLYGLYCOL E400 & E400 NF | | 400 | | 1.125 | 9.36 | | | 1.465 | | |
| POLYGLYCOL E600 | | 600 | | 1.126 | 9.37 | | | 1.466 | | |
| POLYGLYCOL E1000 | | 1000 | | 1.117 | Solid | | | Solid | | |
| POLYGLYCOL E1450 | | 1450 | | 1.210 | Solid | | | Solid | | |
| POLYGLYCOL E4500 | | 4500 | | 1.212 | Solid | .00072 | | Solid | | |
| POLYGLYCOL P-425 | | 425 | | 1.007 | 8.38 | | | 1.445 | | |
| POLYGLYCOL P-1200 | | 1200 | | 1.003 | 8.35 | | | 1.448 | | |
| POLYGLYCOL P-2000 | | 2000 | | 1.002 | 8.34 | | | 1.450 | | |
| POLYGLYCOL P-4000 | | 4000 | | 1.001 | 8.33 | | | 1.449 | | |
| POLYGLYCOL 15-200 | | 2600 | | 1.053 | 8.76 | | | 1.459 | | |
| POLYGLYCOL 112-2 | | | | 1.023 | 8.51 | | | 1.454 | | |

NON-DISTILLABLE

| POLYOLS | Vapor Press. @ 25°C mm Hg | Visc. cs @ 25°C | Solubility % by Wt. @ 25°C | | Spec. Heat @ 25°C B.T.U./lb./°F | Freeze Point °F | Flash Point O. Cup °F | Explosive Limits % by Vol. In Air | | Solubility Parameter |
|-----------------------------|---------------------------|-----------------|----------------------------|---------------------|---------------------------------|-----------------|-----------------------|-----------------------------------|-------|----------------------|
| | | | In H ₂ O | Of H ₂ O | | | | Lower | Upper | |
| | | | | | | | | | | |
| DIETHYLENE GLYCOL | 0.01 | 25.3 | ∞ | ∞ | 0.55 | -8 | 290 | 1.7 | 10.6 | 14.2 |
| TRIETHYLENE GLYCOL | 0.01 | 33.3 | ∞ | ∞ | 0.53 | -7 | 320 | 0.9 | 9.2 | 10.7 |
| PROPYLENE GLYCOL | 0.22 | 42.6 | ∞ | ∞ | 0.60 | Supercools | 215 | 2.6 | 12.5 | 15.0 |
| DIPROPYLENE GLYCOL | 0.03 | 72.5 | ∞ | ∞ | 0.58 | Supercools | 260 | 1.3 | 8.5 | 11.5 |
| TRIPROPYLENE GLYCOL | 0.01 | 55.1 | ∞ | ∞ | 0.51 | Supercools | 285 | | | 9.2 |
| 1-3 BUTYLENE GLYCOL | 0.96 | | ∞ | ∞ | | -50 | 250 | 1.2 | 8.1 | 11.6 |
| HEXYLENE GLYCOL | 0.05 | | ∞ | ∞ | | 50 | 215 | 1.2 | 8.1 | 11.6 |
| GLYCERINE SYNTHETIC | 0.01 | | ∞ | ∞ | 0.577 | 17.9 | 350 | | | 17.7 |
| GLYCERINE SYNTHETIC U.S.P. | | 435 | ∞ | ∞ | | 9.5 | 375 | | | 17.7 |
| GLYCERINE SYN. 99.5% U.S.P. | 0.01 | | ∞ | ∞ | 0.577 | 17.9 | 350 | | | 17.7 |
| POLYGLYCOL E200 | 0.01 | 39.9 | ∞ | ∞ | 0.52 | Supercools | 360 | | | |
| POLYGLYCOL E300 | 0.01 | 68.8 | ∞ | ∞ | 0.51 | | 415 | | | |
| POLYGLYCOL E400 & E400 NF | 0.01 | 90.0 | ∞ | ∞ | 0.50 | 43 | 460 | | | |
| POLYGLYCOL E600 | < 0.01 | 131 | ∞ | ∞ | 0.49 | 73 | 480 | | | |
| POLYGLYCOL E1000 | 0.01 | Solid | ∞ | ∞ | | 100 | 490 | | | |
| POLYGLYCOL E1450 | 0.01 | Solid | ∞ | ∞ | | 113 | 490 | | | |
| POLYGLYCOL E4500 | 0.01 | Solid | ∞ | ∞ | 0.37 | 133 | 515 | | | |
| POLYGLYCOL P-425 | 0.01 | 70 | ∞ | ∞ | 0.476 | 56 | 390 | | | |
| POLYGLYCOL P-1200 | < 0.01 | 160 | 2 | 6 | 0.449 | -40 | 460 | | | |
| POLYGLYCOL P-2000 | 0.01 | 230 | < 0.1 | 4 | 0.432 | 24 | 445 | | | |
| POLYGLYCOL P-4000 | 0.01 | 1114 | < 0.1 | | | 26 | 445 | | | |
| POLYGLYCOL 15-200 | 0.01 | 360 | ∞ | ∞ | | 40 | 345 ¹ | | | |
| POLYGLYCOL 112-2 | 0.01 | 659 | < 0.1 | | | 18 | 520 | | | |

¹20/20°C

²120°C

³Pensky-Martens

Table 7.187: Hoechst Celanese 1,3-Butylene Glycol (42)

| Physical Properties | |
|------------------------------------------------------|----------|
| Autoignition Temperature, °C | 393.9 |
| Boiling Point at 760 mm Hg, °C | 207.5 |
| Boiling Point at 760 mm Hg, °F | 405.5 |
| Critical Pressure, atmospheres | 49.4 |
| Critical Temperature, °C | 370.0 |
| Evaporation Rate (BuAc = 1) | Nil |
| Flash Point, Tag Open Cup, °F | 250 |
| Tag Closed Cup, °F | 228 |
| Freezing Point, °C | -50 |
| Heat of Combustion, kcal/mole at constant volume | 594.7 |
| Heat of Vaporization, btu/lb at normal boiling point | 279 |
| Hygroscopicity, water absorbed in 144 hours, 25-28°C | |
| at 81 percent relative humidity, wt% | 38.5 |
| at 47 percent relative humidity, wt% | 12.5 |
| at 20 percent relative humidity, wt% | 4.3 |
| Molecular Weight | 90.12 |
| Refractive Index n_D^{20} | 1.4412 |
| Solubility at 20°C, wt % in alcohol, ether, water | Complete |
| Specific Gravity, 20/20°C | 1.005 |
| Specific Heat of Liquid, btu/lb°F at 68°F | 0.505 |
| Surface Tension in Air at 25°C, dynes/cm | 37.80 |
| Vapor Density (air = 1) | 3.20 |
| Vapor Pressure, 20°C, mm Hg | 0.06 |
| Viscosity at 25°C, centipoise | 103.9 |
| Weight, pounds per gallon at 20°C (68°F) | 8.37 |

Table 7.188: Occidental Ethylene Glycol

• **Monoethylene Glycol (MEG or EG)**

Synonyms for monoethylene glycol include: ethylene glycol, 1,2-ethanediol, dihydroxyethane, ethylene alcohol, glycol alcohol, ethylene dihydrate, and glycol.

• **Diethylene Glycol (DEG)**

Synonyms for diethylene glycol include: 2,2'-oxybisethanol, 2,2'-oxydiethanol, bis(2-hydroxyethyl ether, diglycol, and 2,2'-dihydroxydiethyl ether.

• **Triethylene Glycol (TEG)**

Synonyms for triethylene glycol include: 1,2-bis (hydroxyethoxy) ethane, 3,6-dioxaoctane-1,8-diol, triglycol, and 2,2'-ethylenedioxydiethanol.

GLYCEROL (GLYCERINE)

1, 2, 3-Propanetriol



Table 7.189: Physical Properties and Specifications of Glycerol (32)

| | | | |
|----------------------------------|-------------------------------------------------------|--------------------------------------|-------------------|
| Acidity | Neutral to litmus | Heat of fusion | 47.5 cal./g. |
| Ash | 0.01% by wt., max. | Latent heat of vaporization at 55° C | 228.7 g.-cal./g. |
| Auto ignition point (on glass) | 804° F† | at 195° C | 197.3 g.-cal./g. |
| Boiling point at 760 mm. Hg | 290° C* | Melting point | 17.9° C* |
| Boiling points at low pressures: | | Molecular weight | 92.094 |
| at 1 mm. | 125.0° C | Refractive index at 25° F | 1.4722† |
| 5 mm. | 153.8° C | Specific gravity at 25/25° C | 1.262† |
| 10 mm. | 167.2° C | Specific heat at 25° C | 0.577 cal./g. °C† |
| 20 mm. | 182.2° C | Surface tension at 20° C | 63.3 dynes/cm. |
| 40 mm. | 198.0° C | 90° C | 58.6 dynes/cm. |
| Chlorine | 0.0005% by wt., max. | 150° C | 51.9 dynes/cm. |
| Color, Pt-Co (Hazen) standards | 20 max. | Vapor pressure at 20° C | 0.0016 mm. Hg |
| Fatty acids, mez/100 g. | 1 max. | 200° C | 42 mm. Hg |
| Fire point | 400° F† | Viscosity at 25° C | 945 cp.† |
| Flash point, tag open cup | 350° F† | Weight per gallon at 25° C | 10.50 lb. |
| tag closed cup | 320° F† | | |
| Freezing point | 17.9° C* | | |
| Glycerol | 99.5% by wt., min. (sp. gr. at 20° C, in air 1.2626)* | | |

*D. R. Stull, *Ind. Eng. Chem.*, 39, 517 (1947).

†ACS Monograph, No. 117.

Table 7.190: Boiling Points and Specific Gravities of Aqueous Glycerol Solutions (23)

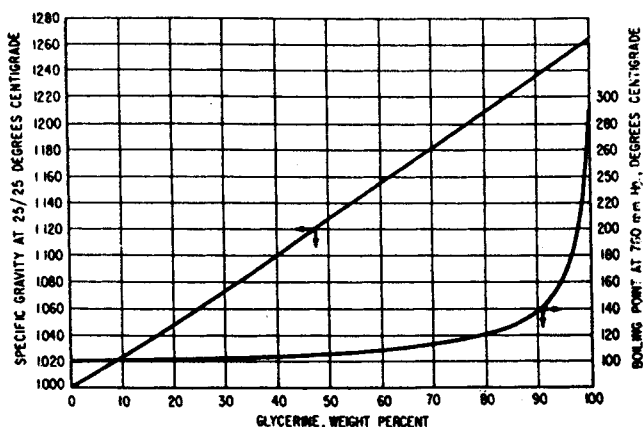


Table 7.191: Conversion Chart for Aqueous Glycerol Solutions (25°C) (23)

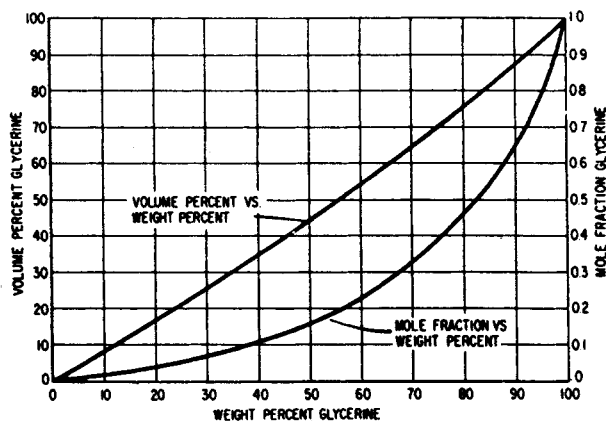


Table 7.192: Density of Glycerol–Water (23)

| Glycerol (%) | Density at | | | | | Glycerol (%) | Density at | | | | |
|--------------|------------|---------|---------|---------|---------|--------------|------------|---------|---------|---------|---------|
| | 15°C | 15.5°C | 20°C | 25°C | 30°C | | 15°C | 15.5°C | 20°C | 25°C | 30°C |
| 100 | 1.26415 | 1.26381 | 1.26108 | 1.25802 | 1.25495 | 50 | 1.12870 | 1.12845 | 1.12630 | 1.12375 | 1.12110 |
| 99 | 1.26160 | 1.26125 | 1.25850 | 1.25545 | 1.25235 | 49 | 1.12600 | 1.12575 | 1.12360 | 1.12110 | 1.11845 |
| 98 | 1.25900 | 1.25865 | 1.25590 | 1.25290 | 1.24975 | 48 | 1.12325 | 1.12305 | 1.12090 | 1.11840 | 1.11580 |
| 97 | 1.25645 | 1.25610 | 1.25335 | 1.25030 | 1.24710 | 47 | 1.12055 | 1.12030 | 1.11820 | 1.11575 | 1.11320 |
| 96 | 1.25385 | 1.25350 | 1.25080 | 1.24770 | 1.24450 | 46 | 1.11780 | 1.11760 | 1.11550 | 1.11310 | 1.11055 |
| 95 | 1.25130 | 1.25095 | 1.24825 | 1.24515 | 1.24190 | 45 | 1.11510 | 1.11490 | 1.11280 | 1.11040 | 1.10795 |
| 94 | 1.24865 | 1.24830 | 1.24560 | 1.24250 | 1.23930 | 44 | 1.11235 | 1.11215 | 1.11010 | 1.10775 | 1.10530 |
| 93 | 1.24600 | 1.24565 | 1.24300 | 1.23985 | 1.23670 | 43 | 1.10960 | 1.10945 | 1.10740 | 1.10510 | 1.10265 |
| 92 | 1.24340 | 1.24305 | 1.24035 | 1.23725 | 1.23410 | 42 | 1.10690 | 1.10670 | 1.10470 | 1.10240 | 1.10005 |
| 91 | 1.24075 | 1.24040 | 1.23770 | 1.23460 | 1.23150 | 41 | 1.10415 | 1.10400 | 1.10200 | 1.09975 | 1.09740 |
| 90 | 1.23810 | 1.23775 | 1.23510 | 1.23200 | 1.22890 | 40 | 1.10145 | 1.10130 | 1.09930 | 1.09710 | 1.09475 |
| 89 | 1.23545 | 1.23510 | 1.23245 | 1.22935 | 1.22625 | 39 | 1.09875 | 1.09860 | 1.09665 | 1.09445 | 1.09215 |
| 88 | 1.23280 | 1.23245 | 1.22975 | 1.22665 | 1.22360 | 38 | 1.09605 | 1.09590 | 1.09400 | 1.09180 | 1.08955 |
| 87 | 1.23015 | 1.22980 | 1.22710 | 1.22400 | 1.22095 | 37 | 1.09340 | 1.09320 | 1.09135 | 1.08915 | 1.08690 |
| 86 | 1.22750 | 1.22710 | 1.22445 | 1.22135 | 1.21830 | 36 | 1.09070 | 1.09050 | 1.08865 | 1.08655 | 1.08430 |
| 85 | 1.22485 | 1.22445 | 1.22180 | 1.21870 | 1.21565 | 35 | 1.08800 | 1.08780 | 1.08600 | 1.08390 | 1.08165 |
| 84 | 1.22220 | 1.22180 | 1.21915 | 1.21605 | 1.21300 | 34 | 1.08530 | 1.08515 | 1.08335 | 1.08125 | 1.07905 |
| 83 | 1.21955 | 1.21915 | 1.21650 | 1.21340 | 1.21035 | 33 | 1.08265 | 1.08245 | 1.08070 | 1.07860 | 1.07645 |
| 82 | 1.21690 | 1.21650 | 1.21380 | 1.21075 | 1.20770 | 32 | 1.07995 | 1.07975 | 1.07800 | 1.07600 | 1.07380 |
| 81 | 1.21425 | 1.21385 | 1.21115 | 1.20810 | 1.20505 | 31 | 1.07725 | 1.07705 | 1.07535 | 1.07335 | 1.07120 |
| 80 | 1.21160 | 1.21120 | 1.20850 | 1.20545 | 1.20240 | 30 | 1.07455 | 1.07435 | 1.07270 | 1.07070 | 1.06855 |
| 79 | 1.20885 | 1.20845 | 1.20575 | 1.20275 | 1.19970 | 29 | 1.07195 | 1.07175 | 1.07010 | 1.06815 | 1.06605 |
| 78 | 1.20610 | 1.20570 | 1.20305 | 1.20005 | 1.19705 | 28 | 1.06935 | 1.06915 | 1.06755 | 1.06560 | 1.06355 |
| 77 | 1.20335 | 1.20300 | 1.20030 | 1.19735 | 1.19435 | 27 | 1.06670 | 1.06655 | 1.06495 | 1.06305 | 1.06105 |
| 76 | 1.20060 | 1.20025 | 1.19760 | 1.19465 | 1.19170 | 26 | 1.06410 | 1.06390 | 1.06240 | 1.06055 | 1.05855 |
| 75 | 1.19785 | 1.19750 | 1.19485 | 1.19195 | 1.18900 | 25 | 1.06150 | 1.06130 | 1.05980 | 1.05800 | 1.05605 |
| 74 | 1.19510 | 1.19480 | 1.19215 | 1.18925 | 1.18635 | 24 | 1.05885 | 1.05870 | 1.05720 | 1.05545 | 1.05350 |
| 73 | 1.19235 | 1.19205 | 1.18940 | 1.18650 | 1.18365 | 23 | 1.05625 | 1.05610 | 1.05465 | 1.05290 | 1.05100 |
| 72 | 1.18965 | 1.18930 | 1.18670 | 1.18380 | 1.18100 | 22 | 1.05365 | 1.05350 | 1.05205 | 1.05035 | 1.04850 |
| 71 | 1.18690 | 1.18655 | 1.18395 | 1.18110 | 1.17830 | 21 | 1.05100 | 1.05090 | 1.04950 | 1.04780 | 1.04600 |
| 70 | 1.18415 | 1.18385 | 1.18125 | 1.17840 | 1.17565 | 20 | 1.04840 | 1.04825 | 1.04690 | 1.04525 | 1.04350 |
| 69 | 1.18135 | 1.18105 | 1.17850 | 1.17565 | 1.17290 | 19 | 1.04590 | 1.04575 | 1.04440 | 1.04280 | 1.04105 |
| 68 | 1.17860 | 1.17830 | 1.17575 | 1.17295 | 1.17020 | 18 | 1.04335 | 1.04325 | 1.04195 | 1.04035 | 1.03860 |
| 67 | 1.17585 | 1.17555 | 1.17300 | 1.17020 | 1.16745 | 17 | 1.04085 | 1.04075 | 1.03945 | 1.03790 | 1.03615 |
| 66 | 1.17305 | 1.17275 | 1.17025 | 1.16745 | 1.16470 | 16 | 1.03835 | 1.03825 | 1.03695 | 1.03545 | 1.03370 |
| 65 | 1.17030 | 1.17000 | 1.16750 | 1.16475 | 1.16195 | 15 | 1.03580 | 1.03570 | 1.03450 | 1.03300 | 1.03130 |
| 64 | 1.16755 | 1.16725 | 1.16475 | 1.16200 | 1.15925 | 14 | 1.03330 | 1.03320 | 1.03200 | 1.03055 | 1.02885 |
| 63 | 1.16480 | 1.16445 | 1.16205 | 1.15925 | 1.15650 | 13 | 1.03080 | 1.03070 | 1.02955 | 1.02805 | 1.02640 |
| 62 | 1.16200 | 1.16170 | 1.15930 | 1.15655 | 1.15375 | 12 | 1.02830 | 1.02820 | 1.02705 | 1.02560 | 1.02395 |
| 61 | 1.15925 | 1.15895 | 1.15655 | 1.15380 | 1.15100 | 11 | 1.02575 | 1.02565 | 1.02455 | 1.02315 | 1.02150 |
| 60 | 1.15650 | 1.15615 | 1.15380 | 1.15105 | 1.14830 | 10 | 1.02325 | 1.02315 | 1.02210 | 1.02070 | 1.01905 |
| 59 | 1.15370 | 1.15340 | 1.15105 | 1.14835 | 1.14555 | 9 | 1.02085 | 1.02075 | 1.01970 | 1.01835 | 1.01670 |
| 58 | 1.15095 | 1.15065 | 1.14830 | 1.14560 | 1.14285 | 8 | 1.01840 | 1.01835 | 1.01730 | 1.01600 | 1.01440 |
| 57 | 1.14815 | 1.14785 | 1.14555 | 1.14285 | 1.14010 | 7 | 1.01600 | 1.01590 | 1.01495 | 1.01360 | 1.01205 |
| 56 | 1.14535 | 1.14510 | 1.14280 | 1.14015 | 1.13740 | 6 | 1.01360 | 1.01350 | 1.01255 | 1.01125 | 1.00970 |
| 55 | 1.14260 | 1.14230 | 1.14005 | 1.13740 | 1.13470 | 5 | 1.01120 | 1.01110 | 1.01015 | 1.00890 | 1.00735 |
| 54 | 1.13980 | 1.13955 | 1.13730 | 1.13465 | 1.13195 | 4 | 1.00875 | 1.00870 | 1.00780 | 1.00655 | 1.00505 |
| 53 | 1.13705 | 1.13680 | 1.13455 | 1.13195 | 1.12925 | 3 | 1.00635 | 1.00630 | 1.00540 | 1.00415 | 1.00270 |
| 52 | 1.13425 | 1.13400 | 1.13180 | 1.12920 | 1.12650 | 2 | 1.00395 | 1.00385 | 1.00300 | 1.00180 | 1.00035 |
| 51 | 1.13150 | 1.13125 | 1.12905 | 1.12650 | 1.12380 | 1 | 1.00155 | 1.00145 | 1.00060 | 0.99945 | 0.99800 |
| | | | | | | 0 | 0.99913 | 0.99905 | 0.99823 | 0.99708 | 0.99568 |

Table 7.193: Freezing Points of Glycerol-Water Solutions (23)

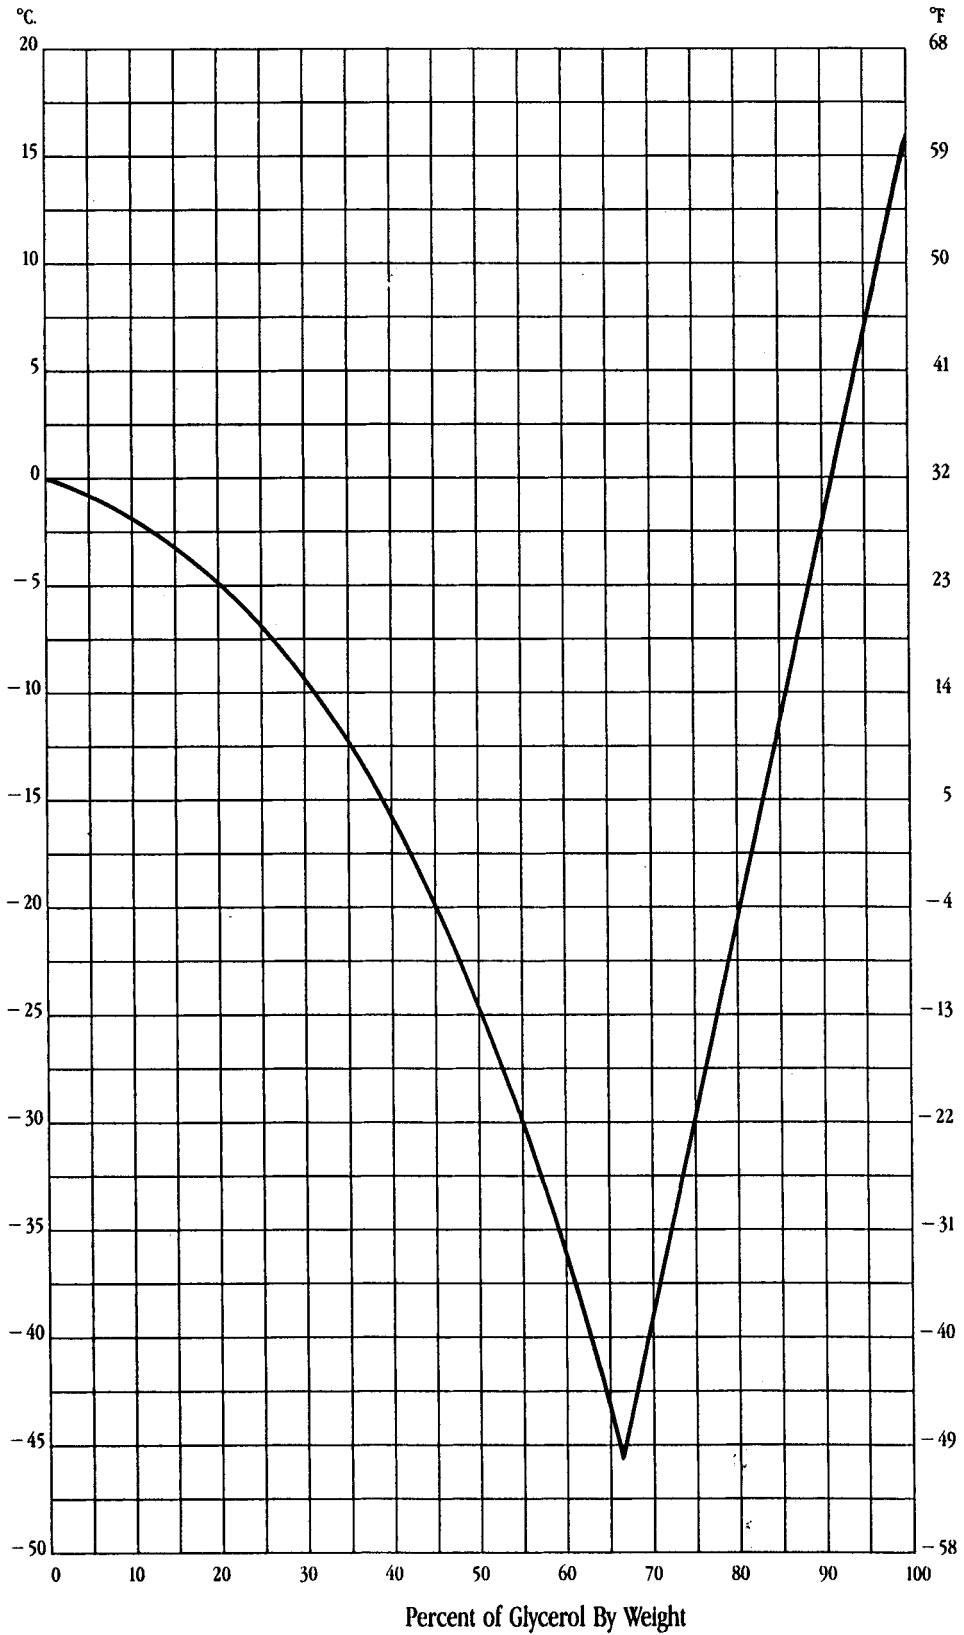


Table 7.194: Freezing Points of Glycerol-Water Solutions (23)

| Glycerol by Wt. (%) | Water (%) | Freezing Points (°C) | Glycerol by Wt. (%) | Water (%) | Freezing Points (°C) |
|---------------------|-----------|----------------------|---------------------|-----------|----------------------|
| 0.0 ^a | 100.0 | 0 | 65.0 | 35.0 | -43.0 |
| 5.0 | 95.0 | -0.6 | 65.6 ^b | 34.4 | -44.5 |
| 10.0 | 90.0 | -1.6 | 66.0 ^b | 34.0 | -44.7 |
| 11.5 ^b | 88.5 | -2.0 | 66.7 ^b | 33.3 | -46.5 |
| 15.0 | 85.0 | -3.1 | 67.1 ^b | 32.9 | -45.5 |
| 20.0 | 80.0 | -4.8 | 67.3 ^b | 32.7 | -44.5 |
| 22.6 ^b | 77.4 | -6.0 | 68.0 ^b | 32.0 | -44.0 |
| 25.0 | 75.0 | -7.0 | 70.0 | 30.0 | -38.9 |
| 30.0 | 70.0 | -9.5 | 70.9 ^b | 29.1 | -37.5 |
| 33.3 ^b | 67.0 | -11.0 | 75.0 | 25.0 | -29.8 |
| 35.0 | 65.0 | -12.2 | 75.4 ^b | 24.6 | -28.5 |
| 40.0 | 60.0 | -15.4 | 79.0 ^b | 21.0 | -22.0 |
| 44.5 ^b | 55.5 | -18.5 | 80 | 20.0 | -20.3 |
| 45.0 | 55.0 | -18.8 | 84.8 ^b | 15.2 | -10.5 |
| 50.0 | 50.0 | -23.0 | 85.0 | 15.0 | -10.9 |
| 53.0 ^b | 47.0 | -26.0 | 90.0 | 10.0 | -1.6 |
| 55.0 | 45.0 | -28.2 | 90.3 ^b | 9.7 | -1.0 |
| 60.0 | 40.0 | -34.7 | 95.0 | 5.0 | 7.7 |
| 60.4 ^b | 39.6 | -35.0 | 95.3 ^b | 4.7 | 7.5 |
| 64.0 ^b | 36.0 | -41.5 | 98.2 ^b | 1.8 | 13.5 |
| 64.7 ^b | 35.3 | -42.5 | 100.0 ^a | 0.0 | 17.0 |

^aTaken from literature.^bActual determination.

Remaining values were interpolated from curve.

Table 7.195: Viscosity of Aqueous Glycerol Solutions Centipoises (23)

| Glycerol % Wt. | Temperature (°C) | | | | | | | | | | |
|----------------|------------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| 0* | 1.792 | 1.308 | 1.005 | 0.8007 | 0.6560 | 0.5494 | 0.4688 | 0.4061 | 0.3565 | 0.3165 | 0.2838 |
| 10 | 2.44 | 1.74 | 1.31 | 1.03 | 0.826 | 0.680 | 0.575 | 0.500 | - | - | - |
| 20 | 3.44 | 2.41 | 1.76 | 1.35 | 1.07 | 0.879 | 0.731 | 0.635 | - | - | - |
| 30 | 5.14 | 3.49 | 2.50 | 1.87 | 1.46 | 1.16 | 0.956 | 0.816 | 0.690 | - | - |
| 40 | 8.25 | 5.37 | 3.72 | 2.72 | 2.07 | 1.62 | 1.30 | 1.09 | 0.918 | 0.763 | 0.668 |
| 50 | 14.6 | 9.01 | 6.00 | 4.21 | 3.10 | 2.37 | 1.86 | 1.53 | 1.25 | 1.05 | 0.910 |
| 60 | 29.9 | 17.4 | 10.8 | 7.19 | 5.08 | 3.76 | 2.85 | 2.29 | 1.84 | 1.52 | 1.28 |
| 65 | 45.7 | 25.3 | 15.2 | 9.85 | 6.80 | 4.89 | 3.66 | 2.91 | 2.28 | 1.86 | 1.55 |
| 67 | 55.5 | 29.9 | 17.7 | 11.3 | 7.73 | 5.50 | 4.09 | 3.23 | 2.50 | 2.03 | 1.68 |
| 70 | 76 | 38.8 | 22.5 | 14.1 | 9.40 | 6.61 | 4.86 | 3.78 | 2.90 | 2.34 | 1.93 |
| 75 | 132 | 65.2 | 35.5 | 21.2 | 13.6 | 9.25 | 6.61 | 5.01 | 3.80 | 3.00 | 2.43 |
| 80 | 255 | 116 | 60.1 | 33.9 | 20.8 | 13.6 | 9.42 | 6.94 | 5.13 | 4.03 | 3.18 |
| 85 | 540 | 223 | 109 | 58 | 33.5 | 21.2 | 14.2 | 10.0 | 7.28 | 5.52 | 4.24 |
| 90 | 1310 | 498 | 219 | 109 | 60.0 | 35.5 | 22.5 | 15.5 | 11.0 | 7.93 | 6.00 |
| 91 | 1590 | 592 | 259 | 127 | 68.1 | 39.8 | 25.1 | 17.1 | 11.9 | 8.62 | 6.40 |
| 92 | 1950 | 729 | 310 | 147 | 78.3 | 44.8 | 28.0 | 19.0 | 13.1 | 9.46 | 6.82 |
| 93 | 2400 | 860 | 367 | 172 | 89 | 51.5 | 31.6 | 21.2 | 14.4 | 10.3 | 7.54 |
| 94 | 2930 | 1040 | 437 | 202 | 105 | 58.4 | 35.4 | 23.6 | 15.8 | 11.2 | 8.19 |
| 95 | 3690 | 1270 | 523 | 237 | 121 | 67.0 | 39.9 | 26.4 | 17.5 | 12.4 | 9.08 |
| 96 | 4600 | 1580 | 624 | 281 | 142 | 77.8 | 45.4 | 29.7 | 19.6 | 13.6 | 10.1 |
| 97 | 5770 | 1950 | 765 | 340 | 166 | 88.9 | 51.9 | 33.6 | 21.9 | 15.1 | 10.9 |
| 98 | 7370 | 2460 | 939 | 409 | 196 | 104 | 59.8 | 38.5 | 24.8 | 17.0 | 12.2 |
| 99 | 9420 | 3090 | 1150 | 500 | 235 | 122 | 69.1 | 43.6 | 27.8 | 19.0 | 13.3 |
| 100 | 12070 | 3900 | 1410 | 612 | 284 | 142 | 81.3 | 50.6 | 31.9 | 21.3 | 14.8 |

*Viscosity of water taken from "Properties of Ordinary Water-Substance," N.E. Dorsey, p. 184. New York (1940)

Table 7.196: Hygroscopicity Curves for Glycerol and 1,3-Butylene Glycol (42)

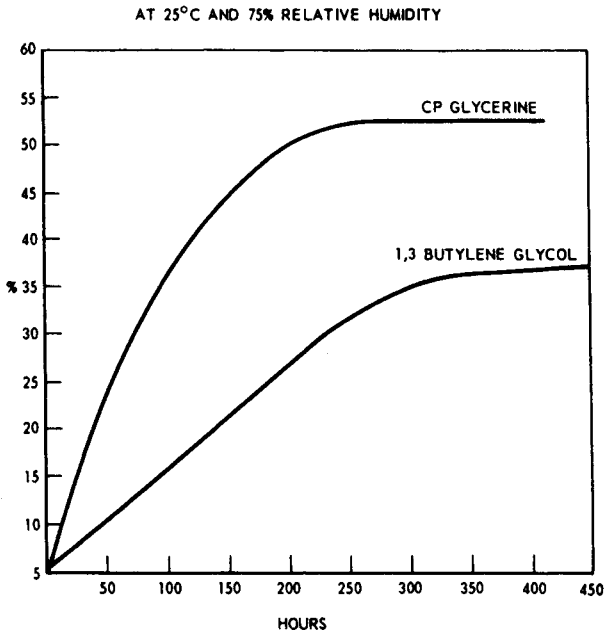


Table 7.197: Hygroscopicity Curves for Glycerol and 2,3-Butylene Glycol (42)

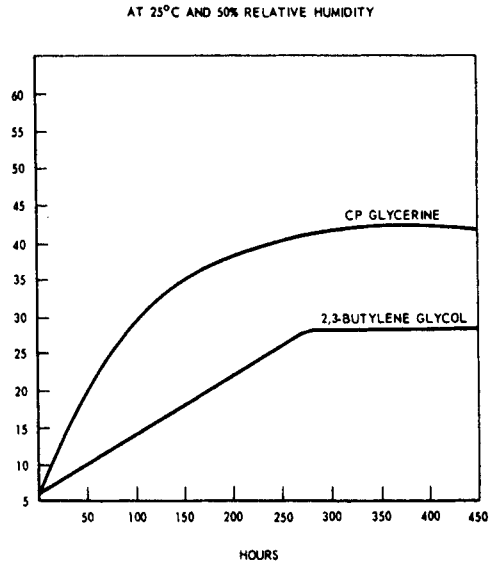


Table 7.198: Relative Humidities Over Aqueous Glycerol Solutions, 20° to 100°C (23)

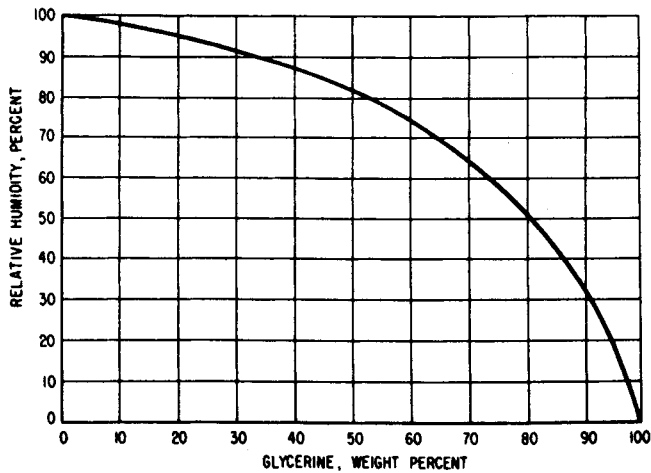


Table 7.199: Solubility of Sucrose and Dextrose in Aqueous Glycerol at 15°, 24°, and 35°C (32)

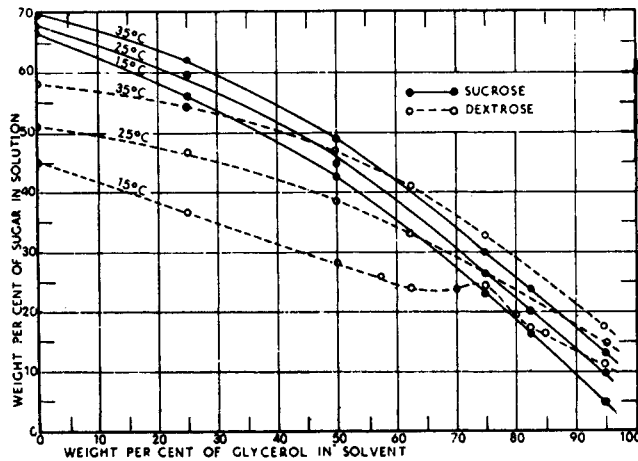


Table 7.200: Solubility of Various Compounds in Glycerol (32)

| Substance | Glycerol Concentration % Weight | Temperature °C | Solubility in Parts per 100 Parts of Solvent |
|-----------------------------|---------------------------------|----------------|----------------------------------------------|
| Alum | † | 15 | 40 |
| Ammonium carbonate | † | 15 | 20 |
| Ammonium chloride | † | 15 | 20.06 |
| Atropine | † | 15 | 3 |
| Benzoic acid | 98.5 | -- | 2 |
| Boric acid | 98.5 | 20 | 24.80 |
| Calcium hydroxide | 35 | 25 | 1.3 |
| Calcium hypophosphite | 99.04 | 20 | 2.5 |
| Calcium sulfate | † | 15 | 5.17 |
| Codeine hydrochloride | 99.04 | 20 | 11.1 |
| Ethyl ether | 99.04 | 20 | 0.65 |
| Ferrous sulfate | † | 15 | 25 |
| Guaiacol | 99.04 | 20 | 13.1 |
| Iodine | † | 15 | 2 |
| Iodoform | 95 | 15 | 0.12 |
| Iron and potassium tartrate | † | 15 | 8 |
| Iron lactate | † | 15 | 16 |
| Morphine acetate | † | 15 | 20 |
| Novocaine | 99.04 | 20 | 11.2 |
| Phenacetin | 99.04 | 20 | 0.47 |
| Phenol | 99.04 | 20 | 276.4 |
| Potassium iodide | † | 15 | 39.72 |
| Quinine sulfate | 98.5 | -- | 1.32 |
| Salicin | † | 15 | 12.5 |
| Sodium bicarbonate | † | 15 | 8.06 |
| Sodium carbonate (crystals) | † | 15 | 98.3 |
| Sodium tetraborate (borax) | † | 15 | 60 |
| Tannic acid | † | 15 | 48.8 |
| Tartar emetic | † | 15 | 5.5 |
| Urea | † | 15 | 50 |
| Zinc chloride | † | 15 | 49.87 |
| Zinc iodide | † | 15 | 39.78 |

†Glycerol concentration not specified, probably 95 to 100 per cent.

Table 7.201: Specific Gravity and Percent Glycerol (32)

| Glycerol | | Apparent Specific Gravity | | | | Glycerol | | Apparent Specific Gravity | | | |
|----------|---------|---------------------------|--------------|----------|----------|----------|---------|---------------------------|--------------|----------|----------|
| | | 15/15° C | 15.5/15.5° C | 20/20° C | 25/25° C | | | 15/15° C | 15.5/15.5° C | 20/20° C | 25/25° C |
| Per Cent | | | | | | Per Cent | | | | | |
| 100 | 1.26557 | 1.26532 | 1.26362 | 1.26201 | 50 | 1.12985 | 1.12970 | 1.12845 | 1.12720 | | |
| 99 | 1.26300 | 1.26275 | 1.26105 | 1.25945 | 49 | 1.12710 | 1.12695 | 1.12570 | 1.12450 | | |
| 98 | 1.26045 | 1.26020 | 1.25845 | 1.25685 | 48 | 1.12440 | 1.12425 | 1.12300 | 1.12185 | | |
| 97 | 1.25785 | 1.25760 | 1.25585 | 1.25425 | 47 | 1.12165 | 1.12150 | 1.12030 | 1.11915 | | |
| 96 | 1.25525 | 1.25500 | 1.25330 | 1.25165 | 46 | 1.11890 | 1.11880 | 1.11760 | 1.11650 | | |
| 95 | 1.25270 | 1.25245 | 1.25075 | 1.24910 | 45 | 1.11620 | 1.11605 | 1.11490 | 1.11380 | | |
| 94 | 1.25005 | 1.24980 | 1.24810 | 1.24645 | 44 | 1.11345 | 1.11335 | 1.11220 | 1.11115 | | |
| 93 | 1.24740 | 1.24715 | 1.24545 | 1.24380 | 43 | 1.11075 | 1.11060 | 1.10950 | 1.10845 | | |
| 92 | 1.24475 | 1.24450 | 1.24280 | 1.24115 | 42 | 1.10800 | 1.10790 | 1.10680 | 1.10575 | | |
| 91 | 1.24210 | 1.24185 | 1.24020 | 1.23855 | 41 | 1.10525 | 1.10515 | 1.10410 | 1.10310 | | |
| 90 | 1.23950 | 1.23920 | 1.23755 | 1.23585 | 40 | 1.10255 | 1.10245 | 1.10135 | 1.10040 | | |
| 89 | 1.23680 | 1.23655 | 1.23490 | 1.23320 | 39 | 1.09985 | 1.09975 | 1.09870 | 1.09775 | | |
| 88 | 1.23415 | 1.23390 | 1.23220 | 1.23055 | 38 | 1.09715 | 1.09705 | 1.09605 | 1.09510 | | |
| 87 | 1.23150 | 1.23120 | 1.22955 | 1.22790 | 37 | 1.09445 | 1.09435 | 1.09335 | 1.09245 | | |
| 86 | 1.22885 | 1.22855 | 1.22690 | 1.22520 | 36 | 1.09175 | 1.09165 | 1.09070 | 1.08980 | | |
| 85 | 1.22620 | 1.22590 | 1.22420 | 1.22255 | 35 | 1.08905 | 1.08895 | 1.08805 | 1.08715 | | |
| 84 | 1.22355 | 1.22325 | 1.22155 | 1.21990 | 34 | 1.08635 | 1.08625 | 1.08535 | 1.08445 | | |
| 83 | 1.22090 | 1.22055 | 1.21890 | 1.21720 | 33 | 1.08365 | 1.08355 | 1.08270 | 1.08190 | | |
| 82 | 1.21820 | 1.21790 | 1.21620 | 1.21455 | 32 | 1.08100 | 1.08085 | 1.08005 | 1.07925 | | |
| 81 | 1.21555 | 1.21525 | 1.21355 | 1.21190 | 31 | 1.07830 | 1.07815 | 1.07735 | 1.07660 | | |
| 80 | 1.21290 | 1.21260 | 1.21090 | 1.20925 | 30 | 1.07560 | 1.07545 | 1.07470 | 1.07395 | | |
| 79 | 1.21015 | 1.20985 | 1.20815 | 1.20655 | 29 | 1.07295 | 1.07285 | 1.07210 | 1.07135 | | |
| 78 | 1.20740 | 1.20710 | 1.20540 | 1.20380 | 28 | 1.07035 | 1.07025 | 1.06950 | 1.06880 | | |
| 77 | 1.20465 | 1.20440 | 1.20270 | 1.20110 | 27 | 1.06770 | 1.06760 | 1.06690 | 1.06625 | | |
| 76 | 1.20190 | 1.20165 | 1.19995 | 1.19840 | 26 | 1.06510 | 1.06500 | 1.06435 | 1.06370 | | |
| 75 | 1.19915 | 1.19890 | 1.19720 | 1.19565 | 25 | 1.06250 | 1.06240 | 1.06175 | 1.06115 | | |
| 74 | 1.19640 | 1.19615 | 1.19450 | 1.19295 | 24 | 1.05985 | 1.05980 | 1.05915 | 1.05860 | | |
| 73 | 1.19365 | 1.19340 | 1.19175 | 1.19025 | 23 | 1.05725 | 1.05715 | 1.05655 | 1.05605 | | |
| 72 | 1.19090 | 1.19070 | 1.18900 | 1.18755 | 22 | 1.05460 | 1.05455 | 1.05400 | 1.05350 | | |
| 71 | 1.18815 | 1.18795 | 1.18630 | 1.18480 | 21 | 1.05200 | 1.05195 | 1.05140 | 1.05095 | | |
| 70 | 1.18540 | 1.18520 | 1.18355 | 1.18210 | 20 | 1.04935 | 1.04935 | 1.04880 | 1.04840 | | |
| 69 | 1.18260 | 1.18240 | 1.18080 | 1.17935 | 19 | 1.04685 | 1.04680 | 1.04630 | 1.04590 | | |
| 68 | 1.17985 | 1.17965 | 1.17805 | 1.17660 | 18 | 1.04435 | 1.04430 | 1.04380 | 1.04345 | | |
| 67 | 1.17705 | 1.17685 | 1.17530 | 1.17385 | 17 | 1.04180 | 1.04180 | 1.04135 | 1.04100 | | |
| 66 | 1.17430 | 1.17410 | 1.17255 | 1.17110 | 16 | 1.03930 | 1.03925 | 1.03885 | 1.03850 | | |
| 65 | 1.17155 | 1.17130 | 1.16980 | 1.16835 | 15 | 1.03675 | 1.03675 | 1.03635 | 1.03605 | | |
| 64 | 1.16875 | 1.16855 | 1.16705 | 1.16560 | 14 | 1.03425 | 1.03420 | 1.03390 | 1.03360 | | |
| 63 | 1.16600 | 1.16575 | 1.16430 | 1.16285 | 13 | 1.03175 | 1.03170 | 1.03140 | 1.03110 | | |
| 62 | 1.16320 | 1.16300 | 1.16155 | 1.16010 | 12 | 1.02920 | 1.02920 | 1.02890 | 1.02865 | | |
| 61 | 1.16045 | 1.16020 | 1.15875 | 1.15735 | 11 | 1.02670 | 1.02665 | 1.02640 | 1.02620 | | |
| 60 | 1.15770 | 1.15745 | 1.15605 | 1.15460 | 10 | 1.02415 | 1.02415 | 1.02395 | 1.02370 | | |
| 59 | 1.15490 | 1.15465 | 1.15325 | 1.15185 | 9 | 1.02175 | 1.02175 | 1.02155 | 1.02135 | | |
| 58 | 1.15210 | 1.15190 | 1.15050 | 1.14915 | 8 | 1.01935 | 1.01930 | 1.01915 | 1.01900 | | |
| 57 | 1.14935 | 1.14910 | 1.14775 | 1.14640 | 7 | 1.01690 | 1.01690 | 1.01675 | 1.01660 | | |
| 56 | 1.14655 | 1.14635 | 1.14500 | 1.14365 | 6 | 1.01450 | 1.01450 | 1.01435 | 1.01425 | | |
| 55 | 1.14375 | 1.14355 | 1.14220 | 1.14090 | 5 | 1.01210 | 1.01205 | 1.01195 | 1.01185 | | |
| 54 | 1.14100 | 1.14080 | 1.13945 | 1.13815 | 4 | 1.00965 | 1.00965 | 1.00955 | 1.00950 | | |
| 53 | 1.13820 | 1.13800 | 1.13670 | 1.13540 | 3 | 1.00725 | 1.00725 | 1.00720 | 1.00710 | | |
| 52 | 1.13540 | 1.13525 | 1.13395 | 1.13265 | 2 | 1.00485 | 1.00485 | 1.00480 | 1.00475 | | |
| 51 | 1.13265 | 1.13245 | 1.13120 | 1.12995 | 1 | 1.00240 | 1.00240 | 1.00240 | 1.00235 | | |

Table 7.202: Specific Gravities of Glycerol and Glycol Mixtures (23)

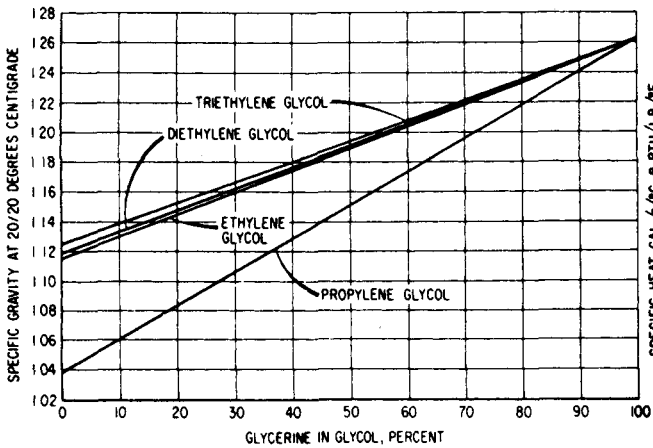


Table 7.203: Specific Heat of Glycerol (23)

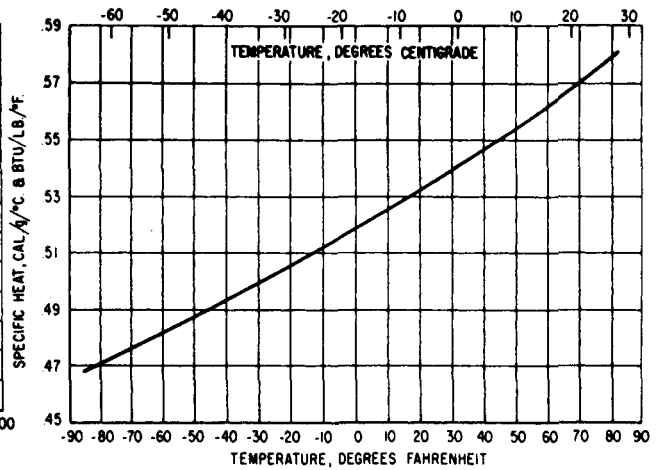


Table 7.204: Vapor Pressure of Glycerol (23)

| Temperature, °C | V. P. mm. Hg. | Temperature, °C | V. P. mm. Hg. |
|-----------------|---------------|-----------------|---------------|
| 120 | -- | 210 | 63.8 |
| 130 | 1.47 | 220 | 91.9 |
| 140 | 2.61 | 230 | 130 |
| 150 | 4.48 | 240 | 181 |
| 160 | 7.44 | 250 | 248 |
| 170 | 12.0 | 260 | 334 |
| 180 | 18.9 | 270 | 445 |
| 190 | 29.0 | 280 | 586 |
| 200 | 43.4 | 290 | 760 |

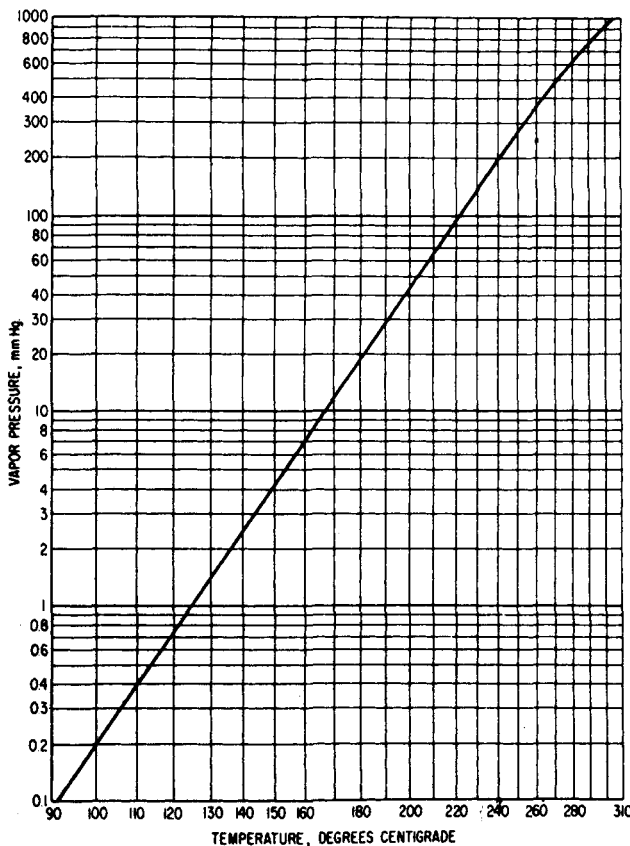


Table 7.205: Vapor Pressure of Glycerol-Water Solutions (23)


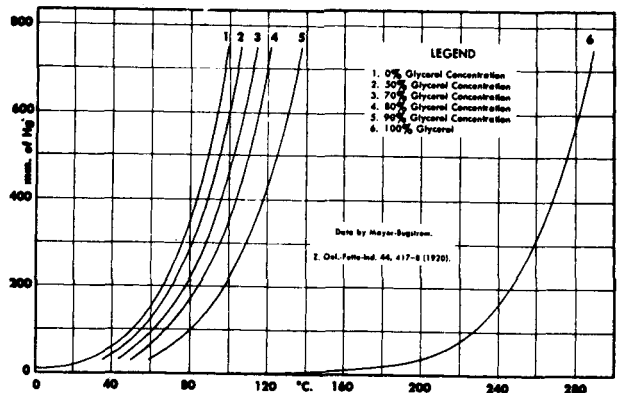


Table 7.206: Viscosity of Glycerol Solutions in Centipoises (23)(32)

| Temperature | | -5° | -10° | -20° | -30° | -40° |
|-------------|--------|-------|-------|--------|--------|--------|
| Glycerol % | F.p. | | | | | |
| 10 | -1.6° | --- | --- | --- | --- | --- |
| 20 | -4.8° | --- | --- | --- | --- | --- |
| 30 | -9.5° | 6.5 | --- | --- | --- | --- |
| 40 | -15.4° | 10.3 | 14.4 | --- | --- | --- |
| 50 | -23.0° | 18.8 | 24.4 | 48.1 | --- | --- |
| 60 | -34.7° | 41.6 | 59.1 | 108.0 | 244.0 | --- |
| 66.7 | -46.5° | 74.7 | 113.0 | 289.0 | 631.0 | 1398.0 |
| 70 | -38.5° | 110.0 | 151.0 | 394.0 | 1046.0 | --- |
| 80 | -20.3° | 419.0 | 683.0 | 1600.0 | --- | --- |
| 90 | -1.6° | --- | --- | --- | --- | --- |

| Glycerol % Wt. | Temperature °C. | | | | | | | | | | |
|----------------|-----------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| 0† | 1.792 | 1.308 | 1.005 | 0.8007 | 0.6560 | 0.5494 | 0.4688 | 0.4061 | 0.3565 | 0.3165 | 0.2838 |
| 10 | 2.44 | 1.74 | 1.31 | 1.03 | 0.826 | 0.680 | 0.575 | 0.500 | --- | --- | --- |
| 20 | 3.44 | 2.41 | 1.76 | 1.35 | 1.07 | 0.879 | 0.731 | 0.635 | --- | --- | --- |
| 30 | 5.14 | 3.49 | 2.50 | 1.87 | 1.46 | 1.16 | 0.956 | 0.816 | 0.690 | --- | --- |
| 40 | 8.25 | 5.37 | 3.72 | 2.72 | 2.07 | 1.62 | 1.30 | 1.09 | 0.918 | 0.763 | 0.668 |
| 50 | 14.6 | 9.01 | 6.00 | 4.21 | 3.10 | 2.37 | 1.86 | 1.53 | 1.25 | 1.05 | 0.910 |
| 60 | 29.9 | 17.4 | 10.8 | 7.19 | 5.08 | 3.76 | 2.85 | 2.29 | 1.84 | 1.52 | 1.28 |
| 65 | 45.7 | 25.3 | 15.2 | 9.85 | 6.80 | 4.89 | 3.66 | 2.91 | 2.28 | 1.86 | 1.55 |
| 67 | 55.5 | 29.9 | 17.7 | 11.3 | 7.73 | 5.50 | 4.09 | 3.23 | 2.50 | 2.03 | 1.68 |
| 70 | 76.0 | 38.8 | 22.5 | 14.1 | 9.40 | 6.61 | 4.86 | 3.78 | 2.90 | 2.34 | 1.93 |
| 75 | 132. | 65.2 | 35.5 | 21.2 | 13.6 | 9.25 | 6.61 | 5.01 | 3.80 | 3.00 | 2.43 |
| 80 | 255. | 116. | 60.1 | 33.9 | 20.8 | 13.6 | 9.42 | 6.94 | 5.13 | 4.03 | 3.18 |
| 85 | 540. | 223. | 109. | 58.0 | 33.5 | 21.2 | 14.2 | 10.0 | 7.28 | 5.52 | 4.24 |
| 90 | 1310. | 498. | 219. | 109. | 60.0 | 35.5 | 22.5 | 15.5 | 11.0 | 7.93 | 6.00 |
| 91 | 1590. | 592. | 259. | 127. | 68.1 | 39.8 | 25.1 | 17.1 | 11.9 | 8.62 | 6.40 |
| 92 | 1950. | 729. | 310. | 147. | 78.3 | 44.8 | 28.0 | 19.0 | 13.1 | 9.46 | 6.82 |
| 93 | 2400. | 860. | 367. | 172. | 89.0 | 51.5 | 31.6 | 21.2 | 14.4 | 10.3 | 7.54 |
| 94 | 2930. | 1040. | 437. | 202. | 105. | 58.4 | 35.4 | 23.6 | 15.8 | 11.2 | 8.19 |
| 95 | 3690. | 1270. | 523. | 237. | 121. | 67.0 | 39.9 | 26.4 | 17.5 | 12.4 | 9.08 |
| 96 | 4600. | 1580. | 624. | 281. | 142. | 77.8 | 45.4 | 29.7 | 19.6 | 13.6 | 10.1 |
| 97 | 5770. | 1950. | 765. | 340. | 166. | 88.9 | 51.9 | 33.6 | 21.9 | 15.1 | 10.9 |
| 98 | 7370. | 2460. | 939. | 409. | 196. | 104. | 59.8 | 38.5 | 24.8 | 17.0 | 12.2 |
| 99 | 9420. | 3090. | 1150. | 500. | 235. | 122. | 69.1 | 43.6 | 27.8 | 19.0 | 13.3 |
| 100 | 12070. | 3900. | 1410. | 612. | 284. | 142. | 81.3 | 50.6 | 31.9 | 21.3 | 14.8 |

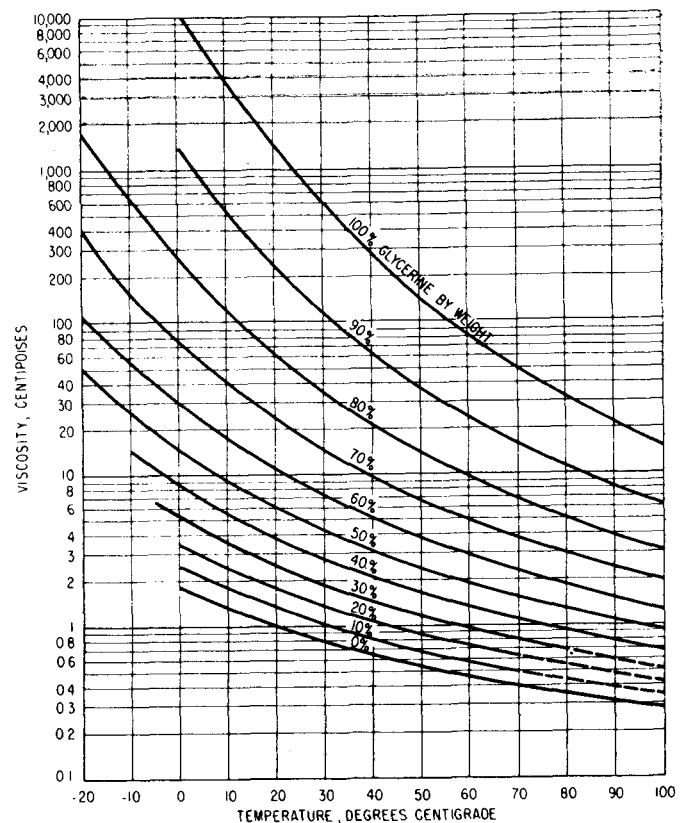

†Viscosity of water taken from Properties of Ordinary Water-Substances by N. E. Dorsey, New York, publisher 1940, p. 184.

COMPARATIVE DATA

Table 7.207: Emery CP/USP Glycerines (63)

| | SPECIFICATIONS | | | | | | | | | | |
|---------------------------------------------|---------------------|----------------------------------------|-----------------------|----------------------------------------|-------------------------|------------------------|------------------------|--------------------------------|-----------------------------------------|----------------------------------------------|------------------------------|
| | Glycerol %, min. | Specific Gravity 25/25°C min. | Color APHA max. | Residue on Ignition PPM, max. | Chloride PPM max. | Sulfate PPM max. | Arsenic PPM max. | Heavy Metals PPM max. | Chlorinated Compounds PPM max. | Fatty Acids and Esters ² | Readily Carbon- izable |
| EMERY® 912 96% CP/USP Glycerine | 96.0 | 1.2517 | 20 ¹ | 100 | 10 | 20 | 1.5 | 5 | 30 | 1.0 | — ³ |
| EMERY® 916 99.7% CP/USP Glycerine | 99.7 | 1.2612 | 10 ¹ | 100 | 10 | 20 | 1.5 | 5 | 30 | 1.0 | — ³ |
| EMERY® 917 99.7% CP/USP Kosher Glycerine | 99.7 | 1.2612 | 10 ¹ | 100 | 10 | 20 | 1.5 | 5 | 30 | 1.0 | — ³ |
| EMERY® 918 99.8% CP/USP Ultra Glycerine | 99.8 | 1.2615 | 10 | 100 | 5 | 20 | 1.5 | 5 | 30 | 0.18 | — ³ |

¹ Meets USP specification which is equivalent to 20 APHA.² Ml 0.5N NaOH per 50 g of glycerine.³ Lighter than matching H fluid

Table 7.208: Proctor & Gamble Glycerine (39)

Glycerine
(Ivorydale Production)

| | Superal™ Glycerine-U.S.P. Food Grade | Star™ Glycerine-U.S.P. Food Grade |
|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Glycerol (Bosart & Snoddy tables) | 99.7% minimum (99.9) | 96% minimum (96.3) |
| Specific Gravity, by density meter: at 25°/25°C (77°/77°F) | 1.2613 minimum (1.2618) | 1.2517 minimum (1.2524) |
| Color, APHA Pt-Co (Hazen) scale | 10 maximum (6) | 10 maximum (5) |
| Residue on ignition | 0.007% or 70 ppm max | 0.007% or 70 ppm max |
| Chlorides (as chlorine) | 0.001% or 10 ppm max | 0.001% or 10 ppm max |
| Sulfates | 0.002% or 20 ppm max | 0.002% or 20 ppm max |
| Arsenic (as As ₁) | 0.00015% or 1.5 ppm max | 0.00015% or 1.5 ppm max |
| Heavy Metals (as Pb) | 0.0005% or 5 ppm max | 0.0005% or 5 ppm max |
| Chlorinated Compounds (as Cl) | 0.003% or 30 ppm max | 0.003% or 30 ppm max |
| Fatty Acids and Esters | Not more than 0.3 ml. N/2 NaOH is absorbed by 50 g of glycerine, which is equivalent to 0.009% as Na ₂ O, (0.13) maximum | Not more than 0.3 ml. N/2 NaOH is absorbed by 50 g of glycerine, which is equivalent to 0.009% as Na ₂ O, (0.12) maximum |

Superal is also available in Kosher grade.
CAS No. 56-81-5, for both brands.

Table 7.209: Witco Refined Glycerine (26)

| HYDROGENATED TRIGLYCERIDES | | | | | | | | | | | | | | |
|----------------------------|------------------------------------------------------------------------------------------------|-----------------|---------------|--------------|-------------------|-----------------------|----------------------------------|----------------------------------|-----|-----|-------------|-------|--------|---|
| PRODUCT | DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | MELTING POINT °C (TYPICAL) | TYPICAL CARBON CHAIN COMPOSITION | | | | | | |
| | | IODINE VALUE | ACID VALUE | SAP VALUE | % UNSAT MAX | COLOR MAX | | SATURATED | | | UNSATURATED | | OTHERS | |
| | | | | | | | C14 | C16 | C18 | C20 | C22 | C18:1 | | |
| Neustrene 045 | Hydrogenated Marine Triglycerides (Hydrogenated Menhaden Oil) 68424-59-9 | 18-30 | 6 | 188-201 | 1 | 3 Gardner | 47 | 8 | 34 | 18 | 11 | 5 | 17 | 7 |
| Neustrene 053 | Hydrogenated Marine Triglycerides (Hydrogenated Menhaden Oil) 68002-72-2 | 5 | 5 | 186-201 | 1 | 3 Gardner | 55 | 9 | 38 | 20 | 17 | 10 | | 6 |
| Neustrene 059 | Hydrogenated Tallow Triglycerides (Hydrogenated Tallow Glycerides) 67701-27-3 | 5 | 10 | 193-205 | 1 | 5 Gardner | 61 | 2 | 28 | 67 | | | | 3 |
| Neustrene 060 | Refined Hydrogenated Tallow Triglycerides (Hydrogenated Tallow Glycerides) 67701-27-3 | 1 | 2.5 | 193-205 | 1 | 5.0Y-0.5R Lovibond | 62 | 2 | 28 | 67 | | | | 3 |
| Neustrene 064* | Hydrogenated Soya Triglycerides (Hydrogenated Soybean Oil) 68002-71-1 | 2 | 4 | 188-200 | 1 | 3 Gardner | 66 | | 11 | 88 | | | | 1 |

* Also available in powder form.
Typical moisture levels are below 0.3%.

| REFINED GLYCERINE | | | | | | | | | | | |
|----------------------------|------------------------------------------------------------|-------------------------------------|--------------|--------------------------------------|---------------------------|--------------------------|---------------------------|---------------------------------|-------------------------------------------|----------------------------|---------------------------------|
| PRODUCT** | GLYCERINE DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS** | | | | | | | | | |
| | | SPECIFIC GRAVITY 25/25°C, MIN | COLOR MAX | RESIDUE ON IGNITION ppm MAX | CHLORIDE 10 ppm MAX | SULFATE 20 ppm MAX | ARSENIC 1.5 ppm MAX | HEAVY METALS 5 ppm MAX | CHLORINATED COMPOUNDS 30 ppm MAX | % SAP EQUIVALENT MAX | FATTY ACIDS AND ESTERS*** |
| Kemstrene 99.7% USP | 99.7% USP (Glycerine) 56-81-5 | 1.2612 | 10 APHA | 70 | Pass | Pass | Pass | Pass | Pass | | Pass |
| Kemstrene 96.0% USP | 96.0% USP (Glycerine) 56-81-5 | 1.25165 | | 70 | Pass | Pass | Pass | Pass | Pass | | Pass |
| Kemstrene High Gravity* | High Gravity (Glycerine) 56-81-5 | 1.2587 | | 700 | 100 ppm | | | | | 0.05 | Pass |

* USP glycerine meets USP standard for volatile organic compounds.
* Witco only provides USP glycerine. Witco does not offer CP.
* As per Federal Specification O-G-491c.
** All tests run per U.S. Pharmacopoeia 23, 1995 edition.
*** 1.0 ml of 0.5N NaOH maximum is required to neutralize 50 grams of glycerine.

1,2,4-BUTANETRIOL




Table 7.210: Physical Properties of 1,2,4-Butanetriol (32)

| | | Purified 1,2,4-Butanetriol | |
|-------------------------------------------|--------------------------------------------|---------------------------------|---------------------------------------------------|
| Boiling point at 760 mm. Hg | 312° C* | | |
| 0.17 mm. Hg | 116° C | | |
| Fire point, Cleveland open cup | 393° F | Fire point, Cleveland open | 387° F |
| Flash point | 343° F | Flash point, Cleveland open cup | 332° F |
| Freezing point | Supercools (resistance to crystallization) | Heat of combustion | 555 kcal./mole |
| Refractive index at 25° C, n _D | 1.473 | Heat of formation | 165.1 kcal./mole (liquid) 157 kcal./mole (gas) |
| Specific gravity, d/4 | 1.182 | Heat of vaporization | 14.0 kcal./mole |
| Viscosity at 25° C | 1038 cs. (kinematic) 1227 cp. | Specific gravity, d/4 | 1.184 |
| Weight per gallon at 25° C | 9.86 lb. | | |

*Decomposes before reaching boiling point at atmospheric pressure. This is an extrapolated value.

1,2,6-HEXANETRIOL




Table 7.211: Physical Properties of 1,2,6-Hexanetriol (32)

| | | | |
|-----------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------|-----------------------|
| Boiling point at 5 mm. Hg | 178° C | Specific gravity at 20/20° C | 1.1063 |
| Coefficient of expansion at 20° C | 0.00054/° C | Δ Sp. Gr./ Δ t at 10 to 40° C | 0.00059/° C |
| Flash point, open cup | 375° F | Vapor pressure at 20° C | Less than 0.01 mm. Hg |
| Freezing point | -32.8° C (freezes under controlled conditions; usually sets to glass at below -20° C) | Viscosity at 20° C | 2584 cp. |
| Molecular weight | 134.17 | Weight per gallon at 20° C | 9.19 lb. |
| Refractive index | 1.4771 | Δ lb./gal./ Δ t | 0.00499° C |

Table 7.212: Freezing Points of 1,2,6-Hexanetriol-Water Mixtures (32)

- (I) Observed
- (II) Theoretical, without hydration
- (III) Theoretical, with complete hydration

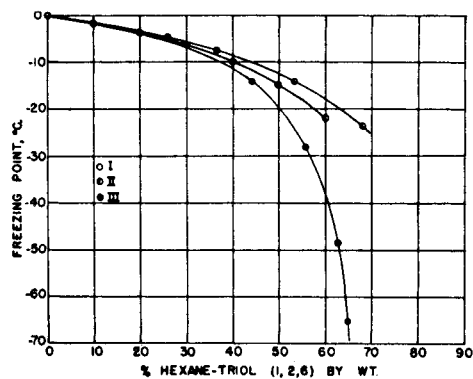


Table 7.213: Vapor Pressure of 1,2,6-Hexanetriol (19)

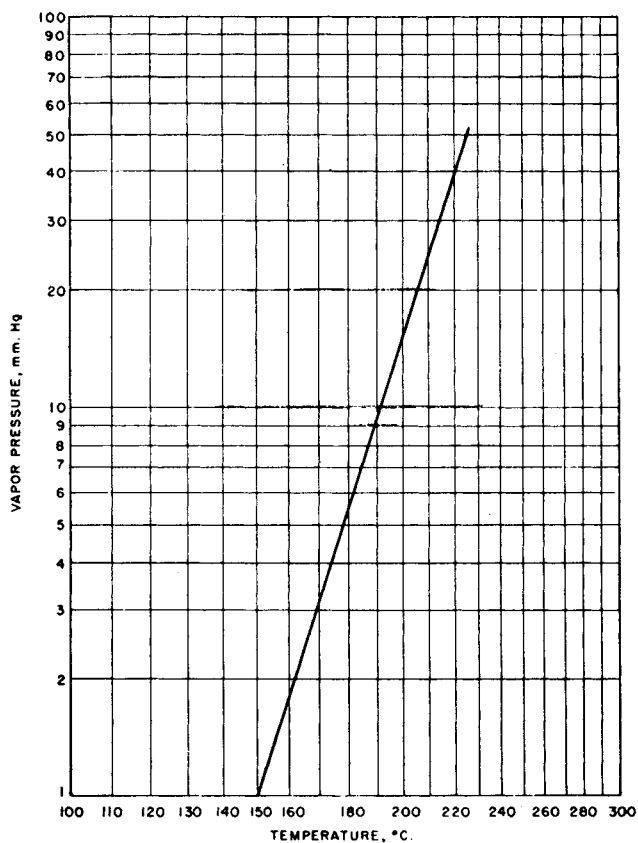


Table 7.214: Solubility of 1,2,6-Hexanetriol in Organic Solvents (32)

4cc. solvent and 1cc. triol at 20°C.

| | | | |
|--------------------------|---|--------------------------------|---|
| Acetone | M | Ethyl Acetate | I |
| Benzene | I | Ethyl Alcohol (Absolute) | M |
| Butanol | M | Ethyl Ether | I |
| Butyl Acetate | I | Heptane | I |
| Butyl CELLOSOLVE | M | Isophorone | M |
| Castor Oil | I | Methyl Isobutyl Ketone | I |
| CELLOSOLVE Acetate | I | Mineral Oil | I |
| CELLOSOLVE Solvent | M | Pine Oil | M |
| Diacetone Alcohol | M | Toluene | I |
| Dibutyl Phthalate | I | Trichlorethylene | I |
| Dichlorethyl Ether | I | | |

M = Miscible I = Immiscible

Table 7.215: Compatibility of 1,2,6-Hexanetriol (32)

4 parts material to 1 part triol

| | | | |
|--------------------------|---|----------------------|----|
| Animal Glue | C | Gelatin | PC |
| Beeswax | I | Nitrocellulose | I |
| Carnauba Wax No. 3 | I | Paraffin Wax | I |
| Casein | C | Rosin | I |
| Ester Gum C | I | Shellac | PC |
| Ethyl Cellulose | I | Zein | C |

C = Compatible I = Incompatible PC = Partly Compatible


Table 7.216: Viscosities and Freezing Points of 1,2,6-Hexanetriol (32)

| <u>1,2,6-Hexanetriol, % by wt. in H₂O</u> | <u>Viscosity, in cps. at 100°F.</u> | <u>Freezing Point, °C.</u> |
|----------------------------------------------------------|-----------------------------------------|--------------------------------|
| 10 | 0.977 | -2.5 |
| 20 | 1.37 | -4.5 |
| 30 | 2.01 | -7.0 |
| 50 | 5.06 | -15.5 |

TRIMETHYLOLPROPANE

2,2-Dihydroxymethyl-1-Butanol

Ethyl Trimethylolmethane



TMP

Table 7.217: Physical Properties of Trimethylolpropane (32)

| | |
|---------------------------------------------|-------------------------|
| Acidity as formic acid | 0.002% by wt., max. |
| Ash | 0.01% by wt., min. |
| Boiling point at 5 mm. Hg abs. | 160° C |
| 50 mm. Hg abs. | 210° C |
| 760 mm. Hg (extrapolated) | 295° C |
| Bulk density (free-flowing) | 35.5 lb/ft ³ |
| Color of 10% aqueous solution | 5 Pt-Co units, max. |
| Combining weight | 44.72 |
| Fire point, Cleveland open cup | 380° F |
| Flash point, Cleveland open cup | 355° F |
| Freezing point | 59° C |
| Hydroxyl content | 37.5% by wt., min. |
| Hygroscopicity (water absorbed in 68 hrs.): | |
| at 27° C and 18 to 26% RH | 0.00% by wt. |
| at 25° C and 29 to 44% RH | 0.06% by wt. |
| at 27° C and 70 to 80% RH | 0.23% by wt. |
| Melting point range | 57 to 59° C |
| Molecular weight | 134.18 |
| Phthalic color, Gardner | 1 max. |
| Water content as packaged | 0.05% by wt., max. |

PENTAERYTHRITOL

Tetramethylolmethane

PE




Table 7.218: Physical Properties of Pentaerythritol (32)

| | |
|---------------------------------|--------------------------|
| Ash | 0.01% by wt., max. |
| Bulk density | 40 lb./ft. ³ |
| Dipentaerythritol (combined) | 0.3% |
| Hydroxyl content | 47.0% min. (technical) |
| | 49.5% (pure) |
| Melting point (capillary final) | 240° C |
| | 250° C initial (pure) |
| Melting point range | 185-245° C (technical) |
| Moisture | 0.40% by wt. (technical) |
| | 0.10% by wt. (pure) |
| Molecular weight | 136.1 |
| Monopentaerythritol | 88.0% by wt. (technical) |
| | 97.0% by wt. (pure) |
| Nonvolatile | 99.50% min. |
| Specific gravity at 25/4° C | 1.38 |

Table 7.221: Hydrogenolysis of Sorbitol and Glycerol at a Hydrogen Pressure of 2,000 psi (32)

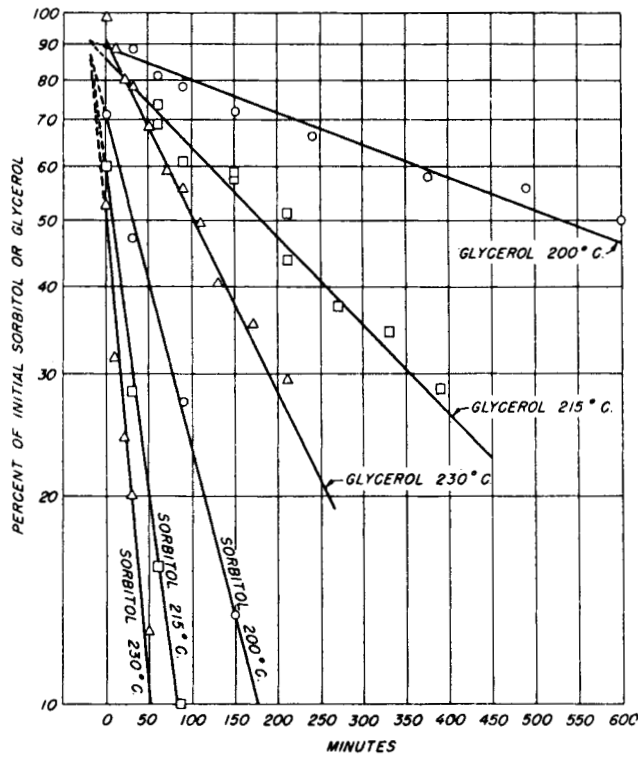


Table 7.222: Hydrogenolysis of Sorbitol at 215°C and a Hydrogen Pressure of 2,000 psi (32)

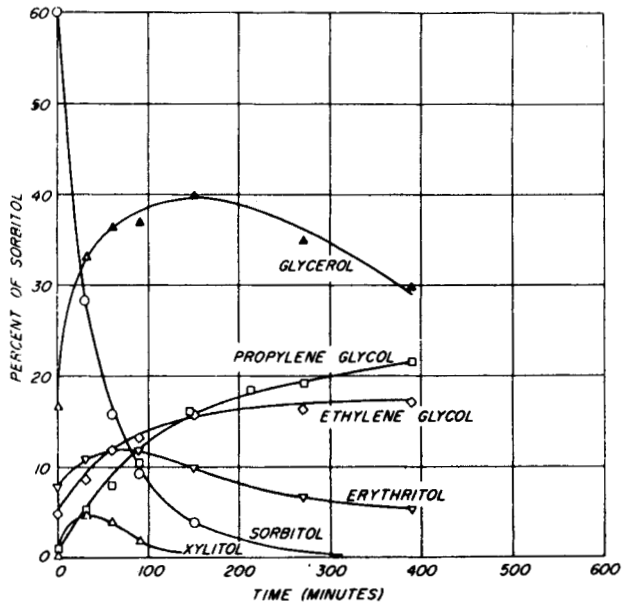


Table 7.223: Phase Diagram of Sorbitol Solubility In Hydroalcoholic Liquids at 25°C (38)

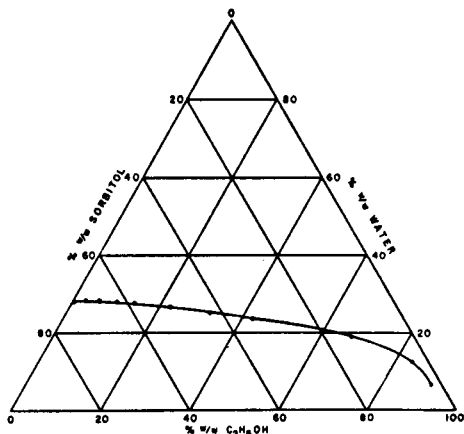


Table 7.224: Solubility of Sorbitol in Hydroalcoholic Liquids at 25°C (38)


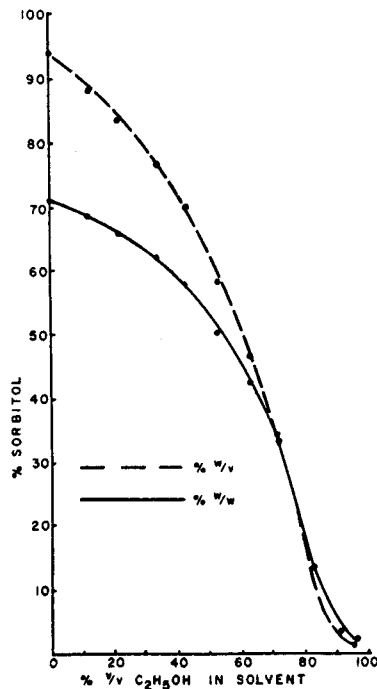


Table 7.225: Viscosity Curve for Pure d-Sorbitol Solutions of Various Concentrations (38)

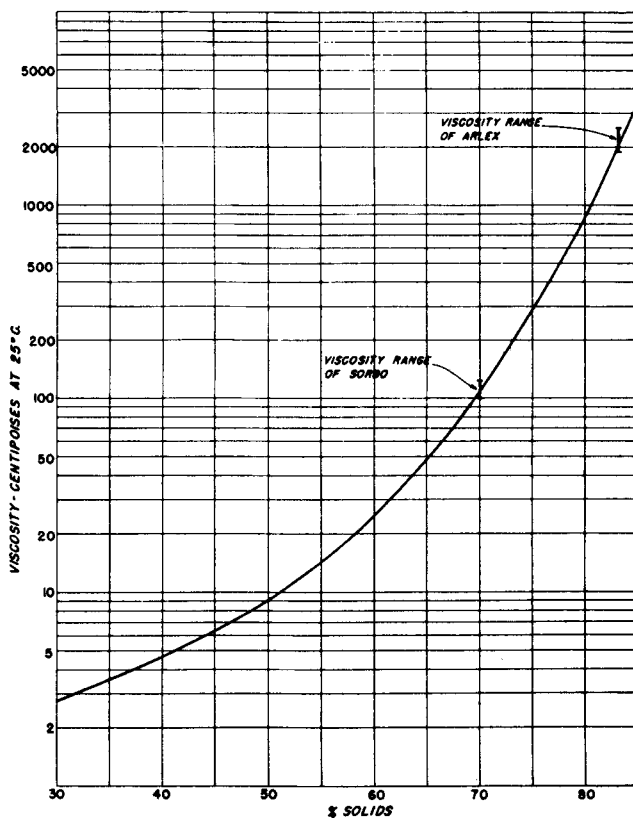

SUGAR ALCOHOLS

Table 7.226: Physical Properties of the Sugar Alcohols (38)

| Sugar alcohol | Melting point, °C | Optical activity in H ₂ O, [α] _D ²⁰⁻²⁵ | Solubility, g/100 g H ₂ O ^c | Heat of combustion, constant volume, kcal/mole |
|-----------------------------|-----------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------|------------------------------------------------|
| tetritols | | | | |
| erythritol | 120 | meso | 61.5 | 499.9 (94) |
| D-threitol | 88.5-90 | +4.3 | very soluble | |
| L-threitol | 88.5-90 | -4.3 | | |
| D,L-threitol | 69-70 | | | |
| pentitols | | | | |
| ribitol | 102 | meso | very soluble | |
| xylylitol | 61-61.5 (meta-stable) 93-94.5 (stable) | meso | 179 | |
| D-arabitol | 103 | +131 ^a | very soluble | |
| L-arabitol | 102-103 | -130 ^a | | 611.7 (124) |
| hexitols | | | | |
| allitol | 155 | meso | very soluble | |
| dulcitol | 189 | meso | 3.2 (15° C) | 720.3 (94) |
| sorbitol (D-glucitol) | 90.4-91.8 (meta-stable) 96.7-97.7 (stable) | -1.98 | 235 | 723.5 (6) |
| L-glucitol | 89-91 | +1.7 | | |
| D,L-glucitol | 135-137 | | | |
| D-mannitol | 166 | -0.2 | 21.3 | 722.1 (6) |
| L-mannitol | 162-163 | | | |
| D,L-mannitol | 168 | | | |
| D-talitol | 88-89 | +3.2 | very soluble | |
| L-talitol | 87-88 | -2.9 | | |
| D,L-talitol | 95-96 | | | |
| D-identol | 73.5 | +3.5 | | |
| L-identol | 75.7-76.7 | -3.5 | | |
| heptitols | | | | |
| glycero-gulo-heptitol | 129 | meso | very soluble | |
| D-glycero-D-ido-heptitol | 129 | +0.7 | very soluble | |
| perseitol | 187 | -1.1 | 7.4 (18° C) | 835.8 (124) |
| volemitol | 153 | +2.15 | 22.2 (14° C) | |
| octitol | | | | |
| D-erythro-D-galacto-octitol | 169-170 | -11 ^b | | |









^a In aqueous molybdic acid (46).

^b In 5% aqueous ammonium molybdate (27).

^c At 25°C unless otherwise indicated.

MISCELLANEOUS POLYHYDRIC ALCOHOLS

Table 7.227: Hydrates of Polyhydric Alcohols (32)

| Alcohol | | | | Hydrate | |
|--------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------|------------|------------|----------------------------|
| Number of C Atoms | Name | Skeletal Structural Formula | M. p. (°C) | M. p. (°C) | n in $K(OH)_n \cdot nH_2O$ |
| A. Trihydric Alcohols | | | | | |
| 6 | α (or cis)-Phloroglucitol |  | 185 | 115 | 2 |
| 9 | 4(1,2-Dihydroxy-n-propyl)-cyclohexanol |  | 63 | 31 | 3 |
| 10 | p-Menthane-1,4,8-triol |  | 110-112 | 96 | 1 |
| 10 | p-Menthane-1,2,4-triol |  | 129 | 115 | --- |
| 10 | Glycol (a dihydroxyether?) | $C_{10}H_{18}O_3$ | 103-105 | --- | 1 |
| 13 | 2(2,3-Dihydroxy-n-propyl)-2-hydroxy camphane |  | --- | --- | --- |
| B. Tetrahydric Alcohols | | | | | |
| 6 | cycloHexane-1,2,4,5-tetrol |  | --- | 195 | 1 |
| 6 | cycloHexane-1,2,4,5-tetrol |  | 242 | --- | 2 |
| 8 | A dimethylether of an inositol | $C_8H_{16}(OH)_4(OCH_3)_2$ | 230 | -- | 3 |
| 10 | trans(?) -p-Menthane-1,2,6,8-tetrol |  | 156 | 100-105 | 2 |

(continued)

Table 7.227: (continued)

| Alcohol | | | | Hydrate | |
|--------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------|------------|------------|--------------------------------------------|
| Number of C Atoms | Name | Skeletal Structural Formula | M. p. (°C) | M. p. (°C) | n in R(OH) _n ·nH ₂ O |
| 10 | <i>p</i> -Menthane-1,2,4,8-tetrol | | 149 | 100 | 1 |
| 10 | <i>p</i> -Menthane-1,2,3,4-tetrol | | 130 | --- | 1 |
| 38 | 2,2'-Dihydroxy-6,6'-bis(α-hydroxybenzhydryl)-diphenyl | | 308 | 141-145 | 2 |
| C. Pentahydric Alcohols | | | | | |
| 6 | Viburnitol (cyclohexane-2,3,5/4,6-pentol) | | 181 | --- | 1 |
| 6 | Inositol bromohydrin | C ₆ H ₆ (OH) ₅ Br | 170-5 | --- | 1 |
| 6 | Inositol chlorohydrin | C ₆ H ₆ (OH) ₅ Cl | 180-5 | --- | 2 |
| 6 | Scyllitol chlorohydrin | C ₆ H ₆ (OH) ₅ Cl | --- | --- | 2 |
| 7 | 1-Methylene-cyclohexane-2,4,6/3,5-pentol | | 205 | --- | 2 |
| D. Hexahydric Alcohols | | | | | |
| 6 | (+)-Sorbitol | HOH ₂ C (CHOH) ₄ CH ₂ OH | 111 | 55 75 | 1 0.5 |
| 6 | <i>meso</i> -Inositol (1,2,3,5/4,6-cyclohexane-hexol) | | 225 | --- | 2 |
| 6 | <i>d</i> - and <i>l</i> -Inositols (active) (1,3,4/2,5,6-cyclohexane-hexol) | | 248 | --- | 2 |

Phenols

Table 8.1: Phenol (2)

Carbolic Acid

C_6H_5OH

PHYSICAL PROPERTIES OF PHENOL

| | |
|-----------------------------------------|--------------------------------------|
| Boiling point | 181.6°C |
| Distillation range | 95% distills within a range of 1.5°C |
| Flash point (Open cup) | 175°F |
| Freezing point | Not less than 40°C |
| MAC | 5 ppm in air |
| Odor | Characteristic |
| Purity | 98%, min. |
| Solidifying point | Not less than 40.7°C |
| Solubility in water, above 68°C at 20°C | In all proportions 8.3% |
| Specific gravity at 41/4°C | 1.058 |
| Toxicity | Highly toxic |

PHENOL FORMS BINARY AZEOTROPES WITH

| % | | B.P. of Azeotrope °C. | % | | B.P. of Azeotrope °C. |
|------|-------------------|-----------------------|----|----------------------|-----------------------|
| 92.2 | Acetophenone | 202.0 | 28 | Heptyl alcohol | 185.0 |
| 22 | Amyl ether | 180.2 | 55 | Indene | 173.2 |
| 58 | Aniline | 186.2 | 85 | Isoamyl ether | 172.2 |
| 49 | Benzaldehyde | 185.5 | 74 | Isobutyl carbonate | 192.5 |
| 55 | Benzylamine | 196.8 | 17 | Isopropyl lactate | 184.8 |
| 57 | m-Bromotoluene | 175.7 | 79 | Mesitylene | 163.5 |
| 60 | o-Bromotoluene | 174.4 | 20 | 2-Methylcyclohexanol | 183.1 |
| 37 | 2-Butoxyethanol | 186.4 | 77 | Methyl fumarate | 194.9 |
| 54 | Butylbenzene | 175.0 | 33 | Methylheptenone | 184.6 |
| 30 | Butyl isovalerate | 184.0 | 32 | 2-Octanone | 184.5 |
| 78 | Camphene | 156.1 | 87 | n-Octyl alcohol | 195.4 |
| 97 | o-Chlorotoluene | 159.0 | 50 | sec-Octyl alcohol | 184.5 |
| 28 | Cineole | 182.9 | 65 | α-Phellandrene | 165.0 |
| 13 | Cyclohexanol | 183.0 | 82 | Phorone | 198.8 |
| 28 | Cyclohexanone | 184.5 | 29 | Pinacol | 185.5 |
| 65 | Decane | 168.0 | 81 | α-Pinene | 152.8 |
| 59 | Ethyl oxalate | 189.5 | 75 | Pseudocumene | 166.0 |
| 75 | Fenchone | 196.2 | 55 | Terpinene | 171.5 |
| 60 | Glycol diacetate | 189.9 | 60 | Thymene | 172.3 |

Aldehydes

FURFURAL

Furfuraldehyde
Furof
Pyromucic Aldehyde




Table 9.1: Properties of Pure Furfural (46)

Furfural (2-furaldehyde), C_4H_3OCHO , is a liquid aldehyde with a pungent almond-like odor. Colorless when freshly distilled, it darkens on contact with air. Industrial furfural is light yellow to brown in color.

General

| | |
|------------------------------------|----------------|
| Molecular weight | 96.08 |
| Boiling point (at 760 mm), °C (°F) | 161.7 (323.06) |
| Freezing point, °C (°F) | -36.5 (-33.7) |
| Refractive index (n _D) | |
| at 20° C (68° F) | 1.5261 |
| at 25° C (77° F) | 1.5235 |
| Density (d _{t/4}) | |
| at 20° C (68° F) | 1.1598 |
| at 25° C (77° F) | 1.1545 |
| Vapor pressure | See Table 9.7 |
| Vapor density (air=1) | 3.3 |

Thermodynamic properties

| | |
|-----------------------------------------------------------|----------------------|
| Heat of vaporization, ΔH_v , g cal/g mole | 11,614.6 |
| Specific heat (liquid), cal/g/deg | |
| 14 to 80° C (57.2 to 176° F) | 0.401 |
| 20 to 100° C (68 to 212° F) | 0.416 |
| Thermal conductivity, | |
| Btu/(hr) (ft ²) (°F/ft) at 100° F | 0.1525 |
| cal/(sec) (cm ²) (°C/cm) at 38° C | 6.3×10^{-4} |
| Heat of combustion (liquid), $\Delta H_{298.2}$ kcal/mole | -560.3 |

Fluid properties

| | |
|---------------------------------------------------|-------|
| Viscosity, cps, at 0° C (32° F) | 2.48 |
| at 25° C (77° F) | 1.49 |
| at 38° C (100.4° F) | 1.35 |
| at 54° C (129.2° F) | 1.09 |
| at 99° C (210.2° F) | 0.68 |
| Surface tension, dynes/cm | |
| at 0° C (32° F) | 43.5 |
| at 29.9° C (85.9° F) | 40.7 |
| at 30.0° C (86° F) | 41.1 |
| Vapor diffusion coefficient, cm ² /sec | |
| at 17° C (62.6° F) | 0.076 |
| at 25° C (77° F) | 0.087 |
| at 50° C (122° F) | 0.107 |

(continued)

Table 9.1: (continued)**Electrical properties**

| | |
|----------------------------|-----------------------|
| Dielectric constant | |
| at 1° C (33.8° F) | 46.9 |
| at 20° C (68° F) | 41.9 |
| at 25° C (77° F) | 38 |
| at 50° C (122° F) | 34.9 |
| Specific conductivity, mho | |
| Minimum | 0.26×10^{-5} |
| Maximum | 0.37×10^{-5} |

Other properties

| | |
|-------------------------------|-------------|
| Critical pressure, psia | 798 |
| kg/cm ² | 56.1 |
| Critical temperature, °C (°F) | 397 (746.6) |
| Molar volume, 25° C, ml/mole | 83.19 |
| Molecular association | 1.11 |
| Solubility in | |
| water, wt. % at 20° C (68° F) | 8.3 |
| alcohol | ∞ |
| ether | ∞ |

Note: Furfural is miscible with most common organic solvents except saturated aliphatic hydrocarbons.

Flammability properties

| | |
|-----------------------------------------------------------------|------------|
| Explosive limits (% by vol.) | |
| Lower limit (at 125° C [257° F] and 740 mm Hg) | 2.1 |
| Flash point | |
| Tag closed cup, °C (°F) | 61.7 (143) |
| Pensky-Martens, °C (°F) | 61.7 (143) |
| (Based on flash point, furfural is classified as Class III A.)* | |
| Ignition temperature, °C (°F) | 393 (739) |

Note:

Furfural has a high order of thermal stability in the absence of oxygen. At temperatures as high as 230° C (446° F), exposure for many hours is required to produce detectable changes in the physical properties of furfural, with the exception of color (29).

*Refers to Code of Federal Regulations: 29CFR 1910.106.

Table 9.2: Typical Properties and Specifications of Furfural (2)

| | | | |
|----------------------------------|--------------------|-----------------------------|-------------------------|
| Acidity, as acetic | Technical 0.3% | Refractive index at 68°F | 1.5261 |
| | Refined 0.1% | Solubility in water at 20°C | 8.3% |
| Boiling point | 158–162°C | Specific gravity at 20/20°C | 1.161 |
| Density at 60°F | 1.164 | | 1.158–1.160 Technical |
| 100° | 1.140 | | 1.59–1.161 Refined |
| 150° | 1.110 | Surface tension | 49 dynes/cm. |
| 175° | 1.095 | Vapor pressure at 60°F | 0.035 lbs./sq. in. abs. |
| 200° | 1.080 | 100° | 0.130 lbs./sq. in. abs. |
| 250° | 1.049 | 150° | 0.540 lbs./sq. in. abs. |
| 300° | 1.019 | 175° | 0.950 lbs./sq. in. abs. |
| Distillation range (Engler) | | 200° | 1.650 lbs./sq. in. abs. |
| 1%, °F (min.) | 300 | 250° | 4.40 lbs./sq. in. abs. |
| End point, °F (max.) | 335 | 300° | 11.50 lbs./sq. in. abs. |
| Recovery, % (min.) | 98.5 | 350° | 22.50 lbs./sq. in. abs. |
| Residue, % (max.) | 0.9 | 400° | 43.5 lbs./sq. in. abs. |
| Loss, % (max.) | 0.9 | 450° | 77.0 lbs./sq. in. abs. |
| Explosive limit, lower | 2.1% at 257°F | Viscosity at 100°F | 1.35 centipoises |
| Flash Point (Cleveland Open Cup) | 131–5°F | 130° | 1.09 centipoises |
| Freezing point | –34°F | 210° | 0.68 centipoises |
| Heat of Vaporization | 107.51 cal./g | Weight per gallon (20°C) | 9 lbs. |
| Purity | 98.5% Technical | | |
| | 99.0–99.5% Refined | | |

Table 9.3: Solubility of Various Substances in Furfural (46)

| | | | |
|---------------------------------------------|---------|-----------------------------------|------|
| Acetone | S | Isobutyl | S |
| Acids: | | n-Octyl | S |
| Abietic (technical) | 9.4 | Amyl acetate | M |
| Acetic | S | Benzene | S |
| Benzoic | 14.8 | Butyl acetate | M |
| Butyric (technical) | S | Carbon tetrachloride | S |
| Cinnamic | 4.1 | Castor oil | M |
| Citric | 3.6 | Chinawood oil | M |
| Formic | S | Chloroform | S |
| Lactic | S | Diethylene glycol monobutyl ether | M |
| Maleic | R | Diethylene glycol monoethyl ether | M |
| Naphthenic acids (practical) | S | Diethyl phthalate | M |
| Oleic (U.S.P.) | S | Ethyl acetate | S |
| Oxalic | 4.8 | Ethylene glycol | S |
| Oxalic (anhydrous) | 3.6 | Ethylene glycol monobutyl ether | M |
| Palmitic (technical) | 1.6 | Ethylene glycol monoethyl ether | M |
| Phthalic | 17.6 | Ferric chloride | 0.55 |
| Propionic (technical) | S | Ferric chloride hexahydrate | 20.0 |
| Salicylic | 11.0 | Hydrogen cyanide | M |
| Sebacic (mp 132-133° C [269.6-271.4° F]) | 0.8 | Linseed oil | M |
| Stearic (U.S.P.) | 2.1 | Nitrobenzene | M |
| Succinic | 3.0 | Nitrotoluene | M |
| Tartaric | 10.9 | Paraldehyde | M |
| Alcohols: | | Pyridine | S |
| Amyl | M | Quinoline | S |
| n-Butyl | S | Toluene | S |
| Ethylene glycol | S | Xylo | M |
| Glycerol | 2.1-2.8 | Zinc chloride | 20.6 |

S=ininitely soluble

M=miscible in equal volume at room temperature

R=reaction

Table 9.4: Solubility of Selected Thermoplastic Resins in Furfural (46)

(At 23°C [73.4° F])

| RESIN TYPE | MANUFACTURER | SOLVENT ACTION | RESIN TYPE | MANUFACTURER | SOLVENT ACTION |
|----------------------------|----------------------------|----------------|--------------|-----------------------|----------------|
| Nitrocellulose | Hercules (RS) | VS | PVC | Goodrich (Geon® 222) | SH |
| Ethylcellulose | Hercules (N-50) | VS | Nylon | Du Pont (Zyte® 31) | 1 (B) |
| Cellulose acetate butyrate | Eastman | VS | Nylon | Du Pont (Elvamide) | 1 (B) |
| Polyvinyl butyral | Union Carbide (Bakelite®) | S;VSH | Polyethylene | Du Pont (Alathon®) | 1 (B) |
| Vinyl acetate | Union Carbide (Bakelite®) | SH (B) | Acrylic | Du Pont (Lucite® 140) | SH (B) |
| Vinyl acetate chloride | Union Carbide (Bakelite®) | SH (B) | Acrylic | Du Pont (Lucite® 130) | VS |
| PVC | Uniroyal (Marvinol® VR-10) | 1 | Polystyrene | Dow (PS-3) | SH |

S=Soluble from 1 g to 10 g per 100 g solvent

VS=Soluble 10 g or more per 100 g solvent

H=Temperature, 70-75° C (158-167° F); time one hour

B=Cloudy

1=Less than 1 g per 100 g solvent

Table 9.5: Specific Gravity and Pounds per Gallon of Furfural (46)

(Change per °C: Sp. Gr. - 0.00110; lbs./gal. - 0.00917)

| TEMPERATURE | | SP. GR. ¹ | LBS./GAL. | TEMPERATURE | | SP. GR. ¹ | LBS./GAL. |
|-------------|----|----------------------|-----------|-------------|-----|----------------------|-----------|
| °F | °C | | | °F | °C | | |
| 122.0 | 50 | 1.127 | 9.403 | 57.2 | 14 | 1.167 | 9.733 |
| 118.4 | 48 | 1.129 | 9.421 | 53.6 | 12 | 1.169 | 9.752 |
| 114.8 | 46 | 1.131 | 9.440 | 50.0 | 10 | 1.171 | 9.770 |
| 111.2 | 44 | 1.134 | 9.458 | 46.4 | 8 | 1.173 | 9.788 |
| 107.6 | 42 | 1.136 | 9.476 | 42.8 | 6 | 1.175 | 9.807 |
| 104.0 | 40 | 1.138 | 9.494 | 39.2 | 4 | 1.178 | 9.825 |
| 100.4 | 38 | 1.140 | 9.502 | 35.6 | 2 | 1.180 | 9.833 |
| 96.8 | 36 | 1.142 | 9.531 | 32.0 | 0 | 1.182 | 9.861 |
| 93.2 | 34 | 1.145 | 9.549 | 28.4 | - 2 | 1.184 | 9.879 |
| 89.6 | 32 | 1.147 | 9.568 | 24.8 | - 4 | 1.186 | 9.898 |
| 86.0 | 30 | 1.149 | 9.586 | 21.2 | - 6 | 1.189 | 9.916 |
| 82.4 | 28 | 1.151 | 9.604 | 17.6 | - 8 | 1.191 | 9.935 |
| 78.8 | 26 | 1.153 | 9.623 | 14.0 | -10 | 1.193 | 9.953 |
| 75.2 | 24 | 1.156 | 9.631 | 10.4 | -12 | 1.195 | 9.971 |
| 71.6 | 22 | 1.158 | 9.660 | 6.8 | -14 | 1.197 | 9.990 |
| 68.0 | 20 | 1.160 | 9.678 | 3.2 | -16 | 1.200 | 10.008 |
| 64.4 | 18 | 1.162 | 9.696 | -1.6 | -18 | 1.202 | 10.027 |
| 60.8 | 16 | 1.164 | 9.715 | -4.0 | -20 | 1.204 | 10.045 |

¹ Referred to water at 4°C.Table 9.6: Composition/Density of Furfural-Water Solutions¹ (46)

| FURFURAL (% BY WEIGHT) | DENSITY $\frac{t^{\circ}}{4}$ | | FURFURAL (% BY WEIGHT) | DENSITY $\frac{t^{\circ}}{4}$ | |
|---------------------------|-------------------------------|--------|---------------------------|-------------------------------|--------|
| | 20° C | 25° C | | 20° C | 25° C |
| 0 | 0.9982 | 0.9971 | 4.6 | 1.0068 | 1.0054 |
| 0.2 | 0.9986 | 0.9974 | 4.8 | 1.0072 | 1.0058 |
| 0.4 | 0.9990 | 0.9978 | 5.0 | 1.0075 | 1.0062 |
| 0.6 | 0.9993 | 0.9982 | 5.2 | 1.0079 | 1.0065 |
| 0.8 | 0.9997 | 0.9985 | 5.4 | 1.0083 | 1.0069 |
| 1.0 | 1.0001 | 0.9989 | 5.6 | 1.0086 | 1.0073 |
| 1.2 | 1.0005 | 0.9993 | 5.8 | 1.0090 | 1.0076 |
| 1.4 | 1.0008 | 0.9996 | 6.0 | 1.0094 | 1.0080 |
| 1.6 | 1.0012 | 1.0000 | 6.2 | 1.0098 | 1.0084 |
| 1.8 | 1.0016 | 1.0003 | 6.4 | 1.0101 | 1.0087 |
| 2.0 | 1.0020 | 1.0007 | 6.6 | 1.0105 | 1.0091 |
| 2.2 | 1.0023 | 1.0011 | 6.8 | 1.0109 | 1.0094 |
| 2.4 | 1.0027 | 1.0014 | 7.0 | 1.0113 | 1.0098 |
| 2.6 | 1.0031 | 1.0018 | 7.2 | 1.0116 | 1.0102 |
| 2.8 | 1.0034 | 1.0022 | 7.4 | 1.0120 | 1.0105 |
| 3.0 | 1.0038 | 1.0025 | 7.6 | 1.0124 | 1.0109 |
| 3.2 | 1.0042 | 1.0029 | 7.8 | 1.0127 | 1.0113 |
| 3.4 | 1.0046 | 1.0033 | 8.0 | 1.0131 | 1.0116 |
| 3.6 | 1.0049 | 1.0036 | 8.2 | 1.0135 | 1.0120 |
| 3.8 | 1.0053 | 1.0040 | 8.3 ² | 1.0137 | 1.0122 |
| 4.0 | 1.0057 | 1.0044 | 8.4 | — | 1.0124 |
| 4.2 | 1.0060 | 1.0047 | 8.6 ³ | — | 1.0127 |
| 4.4 | 1.0064 | 1.0051 | | | |

¹ Mains, G.H., Chem. & Met. Eng., 26,779 (1922).² Saturated solution of furfural in water at 20°C (68°F).³ Saturated solution of furfural in water at 25°C (77°F).

Table 9.7: Vapor Pressure of Furfural (46)

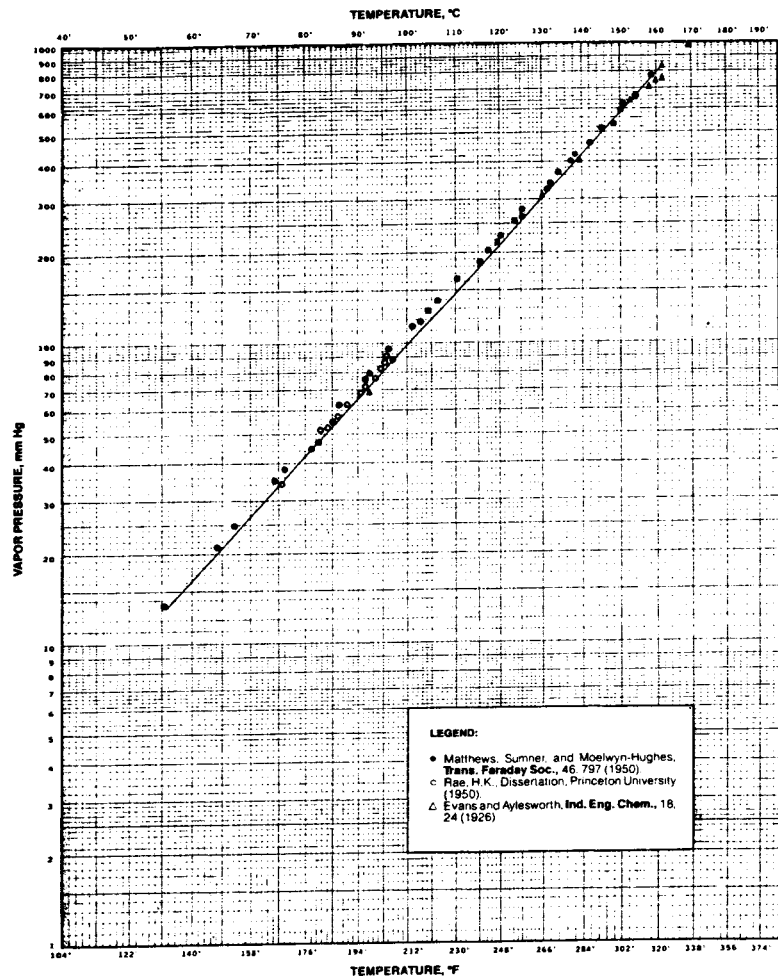


Table 9.8: Solution Temperature of Furfural-Water System (46)


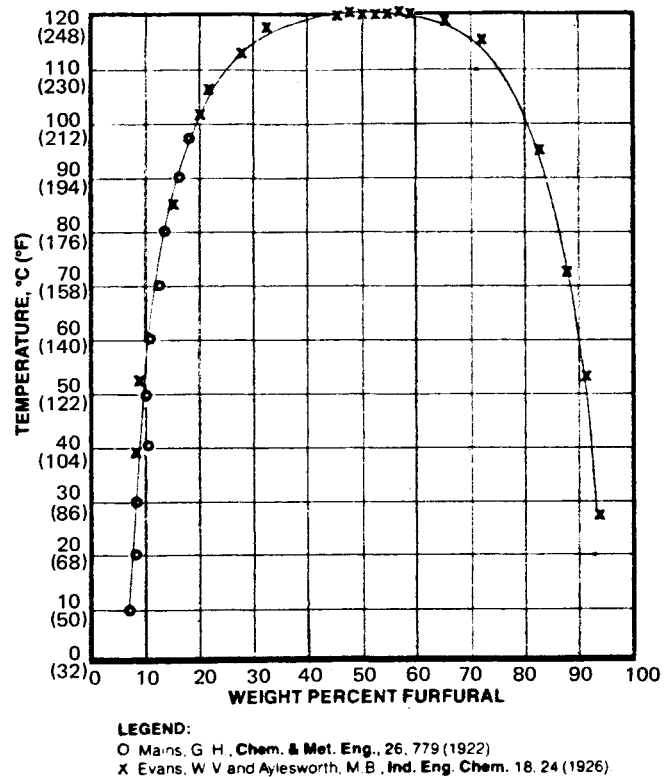


Table 9.9: Temperature-Composition Diagram of Furfural-Water System* (46)

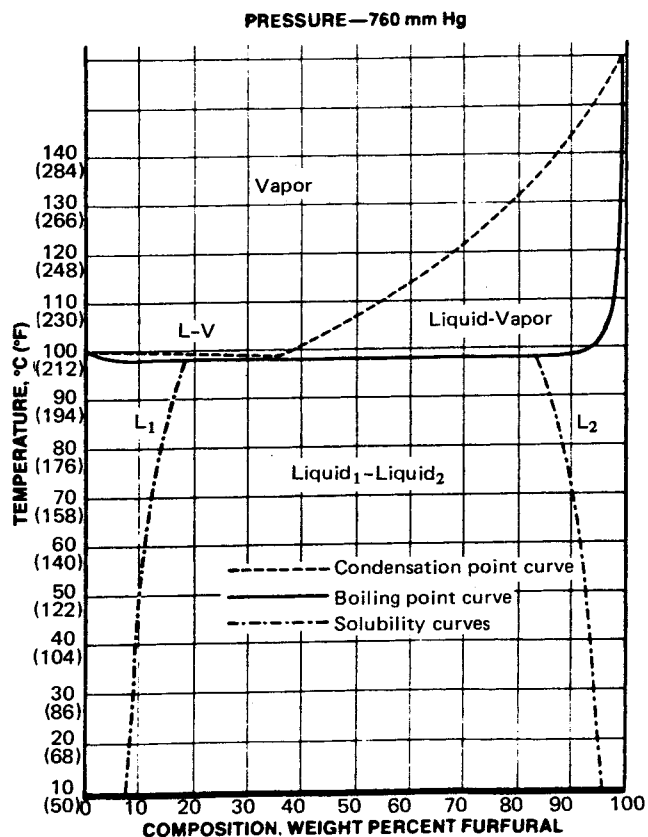


*Mains, G.H., Chem. & Met. Eng., 26, 779(1922)

Table 9.10: Vapor-Liquid Equilibrium in the Furfural-Water System¹ (46)

| (PRESSURE = 760 mm Hg) | | BOILING POINT | |
|------------------------|----------------------|---------------|--------|
| % FURFURAL BY WEIGHT | | °C | °F |
| COMPOSITION OF LIQUID | COMPOSITION OF VAPOR | | |
| 0.2 | 1.5 | 99.90 | 211.8 |
| 0.4 | 3.0 | 99.82 | 211.68 |
| 0.6 | 4.4 | 99.74 | 211.53 |
| 0.8 | 5.8 | 99.67 | 211.41 |
| 1.0 | 7.0 | 99.60 | 211.28 |
| 1.5 | 10.0 | 99.42 | 210.96 |
| 2.0 | 12.7 | 99.25 | 210.65 |
| 2.5 | 15.0 | 99.11 | 210.40 |
| 3.0 | 17.1 | 98.99 | 210.18 |
| 3.5 | 19.0 | 98.87 | 209.97 |
| 4.0 | 20.7 | 98.76 | 209.77 |
| 4.5 | 22.2 | 98.66 | 209.59 |
| 5.0 | 23.6 | 98.58 | 209.44 |
| 5.5 | 24.8 | 98.50 | 209.30 |
| 6.0 | 25.8 | 98.43 | 209.17 |
| 6.5 | 26.8 | 98.37 | 209.07 |
| 7.0 | 27.7 | 98.31 | 208.96 |
| 7.5 | 28.5 | 98.26 | 208.87 |
| 8.0 | 29.2 | 98.21 | 208.78 |
| 8.3 ² | 29.6 | 98.19 | 208.74 |
| 8.5 | 29.9 | 98.17 | 208.71 |
| 9.0 | 30.5 | 98.13 | 208.63 |
| 10.0 | 31.7 | 98.07 | 208.53 |
| 11.0 | 32.6 | 98.02 | 208.44 |
| 12.0 | 33.3 | 97.98 | 208.36 |
| 13.0 | 33.9 | 97.95 | 208.31 |
| 14.0 | 34.4 | 97.93 | 208.27 |
| 15.0 | 34.7 | 97.92 | 208.26 |
| 16.0 | 34.8 | 97.91 | 208.24 |
| 17.0 | 34.9 | 97.91 | 208.24 |
| 18.0 | 35.0 | 97.90 | 208.22 |
| 18.4 ³ | 35.0 | 97.90 | 208.22 |
| 18.4-84.1 ⁴ | 35.0 | 97.90 | 208.22 |

¹Mains, G.H., Chem. & Met. Eng., 26, 779 (1922).²Saturated solution of furfural in water at 20° C (68° F).³Saturated solution of furfural in water at the boiling point.⁴Range over which both furfural and water layers are present.

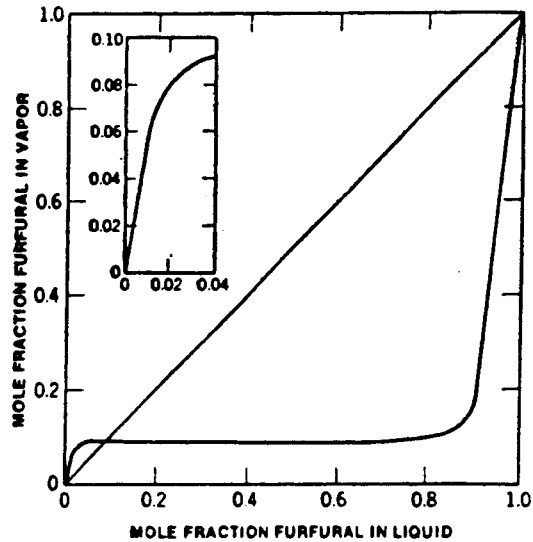Table 9.11: Vapor-Liquid Composition of Furfural-Water System (46)



OTHER ALDEHYDES

Table 9.12: Vapor Pressures of Various Aldehydes (19)

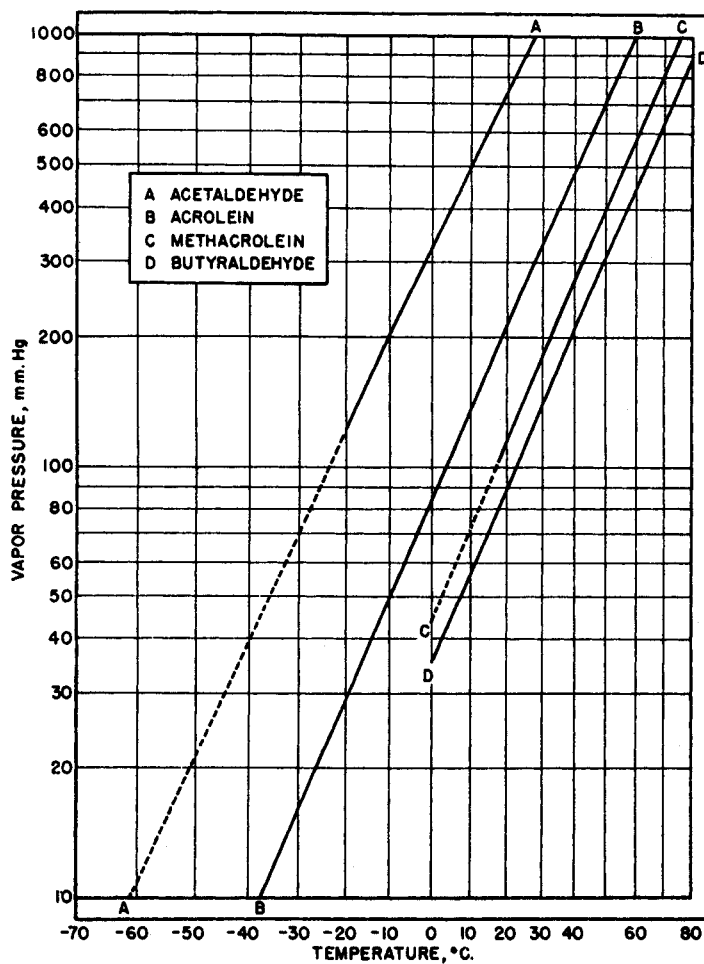


Table 9.13: Physical Properties of Various Aldehydes (19)

| Product | Formula | Formula Molecular Weight | Purity of Tested Sample, % by wt. | Apparent Specific Gravity, 20/20°C. | Boiling Point, °C., 760 mm. | Vapor Pressure, mm. Hg at 20°C. | Freezing Point, °C. | Solubility, % by weight at 20° C. | | Pounds Per Gal. at 20°C. | Flash Point, °F. (a) |
|---------------------------------|---------------------------------------------------------------------------|--------------------------|-----------------------------------|-------------------------------------|-----------------------------|---------------------------------|---------------------|-----------------------------------|----------------------|--------------------------|----------------------|
| | | | | | | | | In Water | Water In | | |
| Formaldehyde, 37% (uninhibited) | HCHO | 30.03 | (c) | 0.816(g) | -19.1 | 3284 | -117 | Complete | | 9.24(h) | None |
| Paraldehyde | [CH ₃ CHO] ₃ | 132.16 | (c) | 0.9961 | 124 | 26 | 12.6 | 10.5 | 1.1 | 8.27 | 96 |
| Propionaldehyde | C ₂ H ₅ CHO | 58.08 | (c) | 0.7982 | 48.0 | 258 | -80 | 22 | 35 | 6.72 | <0 |
| Butyraldehyde | C ₃ H ₇ CHO | 72.11 | (c) | 0.8028 | 74.8 | 88.5 | -96.4 | 7.1 _{25°c.} | 3.0 _{25°c.} | 6.69 | 15 |
| Isobutyraldehyde | CH ₃ CH(CH ₃)CHO | 72.11 | (c) | 0.7905 | 64.1 | 138 | | 6.5 | 2.9 | 6.58 | 13 |
| Valeraldehyde | C ₄ H ₉ CHO | 86.13 | (c) | 0.8109 | 103.0 | 26 | -91 | 1.35 | 1.35 | 6.75 | 54 |
| 2-Methylpentaldehyde | C ₃ H ₇ CH(CH ₃)CHO | 100.16 | (c) | 0.8102 | 118 | 14 | -100(d) | 0.42 | 0.83 | 6.74 | 72 |
| 2,3-Dimethyl Pentaldehyde | C ₂ H ₅ CH(CH ₃)CH(CH ₃)CHO | 114.19 | (c) | 0.8293 | 140.5 | 5 | -110 | 0.21 | 0.60 | 6.91 | 94 |
| Acrolein | CH ₂ =CHCHO | 56.06 | 99 | 0.8427 | 53 | 220 | -87.0 | 20.6 | 6.8 | 7.02(i) | <0(i) |
| Tetrahydrobenzaldehyde | CH ₂ CH:CHCH ₂ CH ₂ CHCHO | 110.16 | 99.8 | 0.9721 | 165 | 2 | -100(d) | 0.5 | 1.0 | 8.08 | 135 |
| UCAR Glyoxal 40 (aq. sol.) | OHCCCHO | 58.04 | (e) | 1.2798 | | | -15 | Complete | | 10.65 | None |
| UCAR Glyoxal LV | | | (e) | 1.2851 | | | -15 | Complete | | 10.69 | None |
| Glutaraldehyde, 25% aq. sol. | OHCC ₃ H ₆ CHO | 100.12 | (e) | 1.062 | | 17 | -7.0 | Complete | | 8.83 | None |
| Glutaraldehyde, 50% aq. sol. | OHCC ₃ H ₆ CHO | 100.12 | (e) | 1.124 | | 17 | -14.0 | Complete | | 9.38 | None |

(a) All flash points were determined by either ASTM method D 1310 using Tag open cup or ASTM method D 92 using Cleveland open cup.

(c) 99+ mol per cent material.

(d) Sets to glass below this temperature.

(e) Typical commercial material.

(f) Made from anhydrous isopropanol diluted with demineralized water.

(g) True density at -19°C.


(h) 37% Solution.

(i) Inhibited material.

Ethers

Table 10.1: Dimethyl Ether (34)

Methyl Ether



Physical Properties

| | | | |
|-------------------------------------------|-------------------|-------------------------------------------------------|---------------------|
| Molecular weight (calc.) | 46.07 | Viscosity of gas at 0°C, $\eta \times 10^3$ | 825 |
| Boiling point at 760 mm | -24.9°C | 20 | 855 |
| Vapor pressure at 20°C | 5.24 atm | Dielectric constant at 25°C | 5.02 e.s.u. |
| Freezing point | -141.5°C | Flash point, Tag closed cup | -42°F |
| Density at 20°C | 0.661 g/ml | Autoignition temperature | 662°F |
| Vapor density (air = 1.0) | 1.59 | Explosive limits, % by vol. in air | 3.45-26.7% |
| Critical pressure | 52.5 atm | Solubility* in water at 24°C | 35.3% by wt. |
| temperature | 128.8°C | Solubility* of water in methyl ether | |
| density | 0.2714 g/ml | at 24°C | 7.0% by wt. |
| Heat of combustion, gas | 347.6 kcal/mole | Solubility in gasoline (unleaded) | |
| Heat of formation, gas | -44.3 kcal/mole | at -40°C | 64% by wt. |
| Heat of melting | 25.621 cal/g | 0 | 19 |
| Heat of vaporization at -24.8°C | 111.64 cal/g | 25 | 7 |
| Free energy of formation, 25°C | -27.3 kcal/mole | Solubility at 25°C in: | |
| Entropy at 25°C | 63.72 cal/°C—mole | carbon tetrachloride at 782 mm | 16.33 mole % |
| Specific heat at -27.68°C | 0.5351 cal/g | acetone | 762 11.83 |
| Surface tension, liquid-vapor interface, | | benzene | 761 15.29 |
| at -40°C | 21 dynes/cm | chlorobenzene | 795 18.55 |
| -20 | 18 | methyl acetate | 704 11.17 |
| -10 | 16 | | |

* At about 5 atm.

SOME PHYSICAL AND THERMODYNAMIC PROPERTIES OF DIMETHYL ETHER AT VARIOUS TEMPERATURES

| Tem- perature °C | Vapor pressure atm. | Density | | Dielec- tric constant | Heat of vapori- zation kcal/kg | Enthalpy | | Entropy | |
|------------------------|---------------------------|----------------|---------------|-----------------------------|-----------------------------------------|-------------------|------------------|-----------------------|----------------------|
| | | liquid g/ml | vapor g/ml | | | liquid kcal/kg | vapor kcal/kg | liquid cal/(g)(°K) | vapor cal/(g)(°K) |
| -40 | 0.392 | — | — | — | 116.13 | 77.58 | 193.71 | 0.9109 | 1.4090 |
| -30 | 0.741 | — | — | — | 113.17 | 83.08 | 196.25 | 0.9342 | 1.3996 |
| -20 | 1.35 | 0.7174 | 0.0027 | — | 110.12 | 88.64 | 198.76 | 0.9568 | 1.3918 |
| -10 | 1.97 | .7040 | .0039 | — | 106.95 | 94.23 | 201.23 | 0.9787 | 1.3851 |
| 0 | 2.80 | .6905 | .0055 | — | 103.64 | 100.00 | 203.64 | 1.0000 | 1.3794 |
| 10 | 3.86 | .6759 | .0076 | — | 100.17 | 105.79 | 205.96 | 1.0206 | 1.3744 |
| 20 | 5.24 | .6610 | .0104 | 5.15 | 96.44 | 111.75 | 208.19 | 1.0410 | 1.3700 |
| 30 | 7.00 | .6455 | .0142 | 4.90 | 92.64 | 117.60 | 210.24 | 1.0604 | 1.3660 |
| 40 | 9.06 | .6292 | .0188 | 4.67 | 88.48 | 123.63 | 212.11 | 1.0795 | 1.3620 |
| 50 | 11.6 | .6116 | .0241 | 4.41 | — | — | — | — | — |
| 60 | 14.7 | .5932 | .0306 | 4.18 | — | — | — | — | — |
| 70 | 18.4 | .5735 | .0385 | 3.93 | — | — | — | — | — |
| 80 | 22.7 | .5517 | .0484 | 3.70 | — | — | — | — | — |
| 90 | 27.4 | .5257 | .0623 | 3.48 | — | — | — | — | — |
| 100 | 33.0 | .4950 | .0810 | 3.25 | — | — | — | — | — |
| 110 | 39.5 | .4575 | .1060 | 3.00 | — | — | — | — | — |
| 120 | 46.6 | .4040 | .1465 | — | — | — | — | — | — |

(continued)

Table 10.1: (continued)

Some Properties of $(\text{CH}_3)_2\text{O}\cdot\text{BF}_3$

| | |
|--------------------------------|------------------------------------|
| Molecular weight (calc.) . . . | 113.89 |
| Melting point | -12°C |
| Boiling point | 128°C |
| Density at 20°C | 1.241 g/ml |
| Vapor pressure at 30°C . . . | 6.1 torr |
| at 70°C . . . | 52.7 torr |
| Surface tension at 20.5°C . . | 33.03 dynes/cm |
| Dissociation constant | $\log K = (-2983)/$ $T + 7.228$ |


Binary Azeotropes Containing Dimethyl Ether

| Component A | Azeotrope | |
|---------------------------------|-------------------|----------------------|
| | Boiling point, °C | Component A, % by wt |
| Boron trifluoride | 127 | 60 |
| Hydrogen chloride | -2 | 38 |
| Ammonia at 1 atm | -37 | 42.5 |
| at 11 atm | 25 | 56 |
| Sulfur dioxide at 1 atm | 0 | 65 |
| at 56.1 atm | 6.6 | 60 |
| at 77.1 atm | 12.1 | 60 |
| at 108.7 atm | 26.7 | 60 |
| Dichlorodifluoromethane | | |
| at 3 atm | 0 | 90 |

Solubility of Methyl Ether at Various Pressures
Temperature = 25°C

| Carbon tetrachloride | | Acetone | | Benzene | | Chlorobenzene | | Methyl acetate | |
|----------------------|----------------------|---------|----------------------|---------|----------------------|---------------|----------------------|----------------|----------------------|
| p, mm | Methyl ether, Mole % | p, mm | Methyl ether, Mole % | p, mm | Methyl ether, Mole % | p, mm | Methyl ether, Mole % | p, mm | Methyl ether, Mole % |
| 112.4 | 0.000 | 229.2 | 0.0 | 93.7 | 0.0 | 11.6 | 0.0 | 213.4 | 0.0 |
| 237.6 | 3.0 | 311.7 | 1.79 | 196.9 | 2.30 | 120.4 | 6.21 | 293.2 | 1.75 |
| 360.1 | 5.96 | 403.1 | 3.78 | 372.6 | 6.32 | 310.5 | 7.20 | 440.6 | 5.08 |
| 464.8 | 8.52 | 548.2 | 7.01 | 503.0 | 9.32 | 423.3 | 9.74 | 576.0 | 8.17 |
| 612.8 | 12.17 | 650.8 | 9.33 | 634.8 | 12.29 | 550.8 | 12.78 | 704.4 | 11.17 |
| 782.4 | 16.33 | 762.3 | 11.83 | 761.4 | 15.29 | 795.3 | 18.55 | 812.3 | 13.65 |
| 932.7 | 19.93 | 939.1 | 15.77 | 913.0 | 18.84 | 957.9 | 22.14 | 923.5 | 16.27 |
| 1072.9 | 23.30 | 1075.0 | 18.93 | 1006.7 | 21.00 | 1072.1 | 24.71 | 1039.7 | 19.50 |


Table 10.2: Chlorodimethyl Ether (2)



Chlorodimethyl ether is a colorless liquid which decomposes in water and in hot ethyl alcohol. It is soluble in acetone, carbon disulfide and concentrated hydrochloric acid.

Physical Properties

| | |
|---------------------------------|-------------|
| Boiling Point (760 mm. Hg), °C. | 59 |
| Dipole Moment | |
| In Carbon Tetrachloride D | 1.88 |
| In Benzene D | 1.82 - 1.85 |
| Melting Point, °C. | -103.5 |
| Molecular Weight | 80.52 |
| Purity | 90% min. |
| Refractive Index n_D^{20} | 1.39737 |
| Specific Gravity D_4^{20} | 1.0703 |

Table 10.3: Chloromethyl Ethyl Ether (2)

This ether is a colorless liquid which is an irritant to the mucous membranes. It is used as a raw material in organic syntheses.

Physical Properties

| | |
|--------------------------------|-------------|
| Assay (chlorine) | App. 98% |
| Boiling Range, 760 mm. Hg, °C. | 79 - 83 |
| Density D_4^{20} | 1.03 - 1.05 |
| Refractive Index n_D^{20} | 1.40 - 1.41 |

Table 10.4: Ethyl Ether (1)(19)(23)(49)

| | |
|----------------|-----------------------------------------------|
| Ether | |
| Ethyl oxide | $\text{C}_2\text{H}_5\text{—O—C}_2\text{H}_5$ |
| Sulfuric ether | |

Typical Properties and Specifications

| | |
|-----------------------------------------|--------------------------------|
| Apparent ignition temperature in air | 190°C. |
| Boiling point at 760 mm. | 34.5°C. |
| Coefficient of expansion | 0.00164 per 1°C. |
| Constant-boiling mixtures (% by wt.) | |
| Ethyl ether 99% Carbon disulfide 1.0% | B.P. at 760 mm. 34.5°C. |
| Ethyl ether 44.5% Methyl formate 55.5% | B.P. at 760 mm. 28.2°C. |
| Ethyl ether 98.9% Water 1.1% | B.P. at 760 mm. 34.1°C. |
| Electrical conductivity at 25°C. | 4×10^{-13} recip. ohm |
| Explosive limits | 2.34 - 6.15% |
| Flash point | -40°F. |
| Freezing point | -116.2°C. |
| Heat of combustion | 651 Cal./mol |
| Heat of vaporization | 83.96 cal./g at B.P. |
| Refractive index at 17°C. | 1.3542 |
| Specific gravity at 20/20°C. | 0.7146 |
| Specific heat at 30°C. | 0.5476 cal./g. |
| Surface tension at 20°C. | 17.0 dynes/sq. cm. |
| Solubility in water at 20°C. | 6.9% by wt. |
| Solubility of water in solvent at 20°C. | 1.3% by wt. |
| Viscosity at 20°C. | 0.00233 poise |
| Vapor pressure at 20°C. | 442.0 mm. Hg |
| Weight per gallon at 20°C. | 5.95 lbs. |
| Weight per gallon at 17°C. | 5.3542 lbs. |
| Acidity (as acetic) | 0.002% by wt., max. |

Table 10.5: Flammability of Ethyl Ether-Oxygen-Hellum Mixture (1)


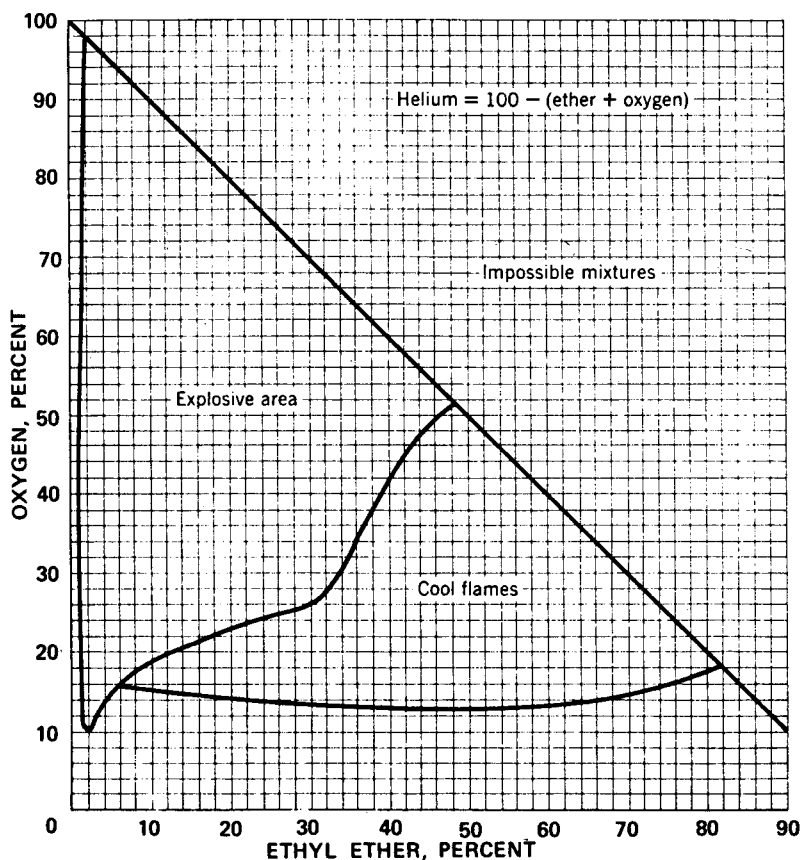


Table 10.6: Dichloroethyl Ether (2)

2,2'-Dichlorethyl Ether
 β,β' -Dichlorodiethyl Ether



| | | | |
|--------------------------------------|--------------------|----------------------------------------------------|--------------------|
| Acidity (as hydrochloric) | 0.005% by wt. max. | Heat of vaporization at 178°C. | 64.1 cal./g. |
| Apparent ignition temperature in air | 396°C. | Refractive index at 20°C. | 1.457 |
| Boiling point at 760 mm. | 178.5°C. | Specific gravity at 20/20°C. | 1.2220 |
| Boiling range at 760 mm. | 170-180°C. | Specific heat (at 20-30°C.) | 0.369 cal. |
| Coefficient of expansion at 20°C. | 0.00097 (per °C.) | Surface tension at 25°C. | 41.8 dynes/sq. cm. |
| Coefficient of expansion at 55°C. | 0.00100 (per °C.) | Solubility in water at 20°C. | 1.1% by wt. |
| Constant boiling mixture (% by wt.) | | Solubility of water in dichlorethyl ether at 20°C. | 0.28% by wt. |
| Dichlorethyl ether | 34.4 | Viscosity at 25°C. | 2.0653 centipoises |
| Water | 65.6 | Vapor pressure at 20°C. | 0.7 mm. Hg |
| B.P. at 760 mm. | 97.7°C. | Water content | 0.10% by wt. max. |
| Flash Point (ASTM, open cup) | 79°C. | Weight per gal. at 20°C. | 10.17 lbs. |
| Flash Point (ASTM, closed cup) | 55°C. | | |

ISOPROPYL ETHER

Table 10.7: Properties of Pure Isopropyl Ether (14)

| | | | |
|------------------------------------------------------------|----------------------------------|---------------------------------------------------------------------------------------------------|-----------|
| Molecular Formula | C ₆ H ₁₄ O | Specific Heat (Liquid), cal/g°C (at 20°C) | 0.506 |
| Molecular Weight | 102.172 | Thermal Conductivity (Vapor at 100°C) | |
| Boiling Point, °C | 68.5 | cal/(sec) (cm ²) (°C/cm) | 0.0000483 |
| Boiling Point Change, °C/mm at 760 mm | 0.042 | Viscosity, cps at -20°C | 0.545 |
| Freezing Point, °C | -85.5 | 0°C | 0.419 |
| Density at 20°C, g/ml (in vacuo) | 0.7235 | 20°C | 0.333 |
| at 60°F, lb/US gal (in air) | 6.07 | 50°C | 0.255 |
| Specific Gravity, 20/20°C (in air) | 0.7244 | Surface Tension (6), 25°C, dynes/cm | 17.28 |
| Coefficient of Expansion (1) at 20°C, per °C | 0.00143 | Dielectric Constant (7), 85.8 kHz, 25°C | 4.449 |
| Refractive Index, n _D /D | 1.3784 | Other Properties of Commercial IPE | |
| n ₂₀ /D | 1.36820 | Autoignition Temp., °F | 830 |
| n ₃₀ /D | 1.36301 | Flash Point (8), Tag Open Cup, °F (approx.)+15 | |
| Critical Temperature, °C | 288 | Tag Closed Cup, °F (approx.) | -18 |
| Critical Pressure, atm | 27.5 | Flammable Limits of Vapor with Air | |
| Critical Volume, cc/g | 3.80 | % vol. of Compound, Upper | 21 |
| Heat of Vaporization (2,3), 760mm, cal/g | 68.16 | Lower | 1.4 |
| Heat of Fusion at Melting Point (4), cal/g | 25.79 | Relative Evaporation Rate at 25°C and 0% R.H.; Shell Thin Film Evaporometer (n-BuOAc = 1.0) | 8.04 |
| Heat of Formation (5) (vapor at 25°C) k-cal/mole | -77 | | |
| Free Energy of Formation (4) (vapor at 25°C) k-cal/mole | -31 | | |

References

1. Calculated from density measurements as $\frac{7242 - 7139}{7190 \times 10}$
2. Calculated via Clapeyron Equation $Z = 0.95$
3. Fife & Reid, Ind. Eng. Chem. 22, 513 (1930)
4. Parks, et al., J. Am. Chem. Soc. 55, 2735 (1933)
5. Kharasch, M. S., J. Research, Nat'l Bur. Stds. 2, 359 (1929)
6. Vogel, A. I., J. Chem. Soc. Part I, 616 (1948)
7. Kirk-Othmer, "Ency. of Chem. Tech." 5, 870 (1950)
8. Petroleum Engineer, June 1945, 219

Table 10.8: Vapor Pressure of Isopropyl Ether¹ (14)

| t°C | mm Hg | t°C | mm Hg | t°C | mm Hg |
|-----|-------|-----|-------|-----|--------|
| -20 | 13.4 | 15 | 94.4 | 50 | 406.6 |
| -15 | 18.4 | 20 | 119.4 | 55 | 485.8 |
| -10 | 24.9 | 25 | 149.5 | 60 | 576.7 |
| -5 | 33.3 | 30 | 185.6 | 65 | 680.3 |
| 0 | 44.0 | 35 | 228.4 | 70 | 797.8 |
| 5 | 57.3 | 40 | 278.9 | 75 | 930.1 |
| 10 | 74.0 | 45 | 338.0 | 80 | 1078.7 |

$$\log VP \text{ mm Hg} = 23.16817 - 2382.7/T - 5.2545 \log T$$

$$T = 273.15 + t^\circ\text{C}$$

Table 10.9: Isopropyl Ether-Water Solubility (14)

| t°C | %wt | | t°C | %wt | |
|-----|-------------------------|-------------------------|-----|-------------------------|-------------------------|
| | IPE in H ₂ O | H ₂ O in IPE | | IPE in H ₂ O | H ₂ O in IPE |
| -10 | — | 0.41 | 50 | 0.73 | 0.82 |
| 0 | — | 0.43 | 60 | 0.73 | 0.93 |
| 10 | 1.43 | 0.47 | 70 | 0.76 | 1.06 |
| 20 | 1.07 | 0.53 | 80 | 0.83 | 1.20 |
| 30 | 0.88 | 0.62 | 90 | 0.92 | 1.34 |
| 40 | 0.78 | 0.72 | 100 | 1.04 | 1.49 |

Table 10.10: Mutual Solubility for the System: Isopropyl Ether–Isopropyl Alcohol–Water at 25°C, % wt (14)

| IPE | H ₂ O | IPA | Sp. Gr.25/4° C |
|------|------------------|------|----------------|
| 99.5 | 0.5 | | 0.7210 |
| 93.4 | 1.1 | 5.5 | 0.7274 |
| 89.0 | 1.5 | 9.5 | 0.7326 |
| 84.4 | 2.2 | 13.4 | 0.7380 |
| 79.9 | 3.2 | 16.9 | 0.7427 |
| 74.4 | 4.6 | 21.0 | 0.7490 |
| 72.8 | 4.7 | 22.5 | 0.7509 |
| 70.3 | 5.2 | 24.5 | 0.7547 |
| 68.7 | 5.8 | 25.5 | 0.7564 |
| 65.3 | 6.7 | 28.0 | 0.7605 |
| 64.0 | 7.1 | 28.9 | 0.7620 |
| 61.5 | 7.8 | 30.7 | 0.7641 |
| 58.3 | 8.9 | 32.8 | 0.7698 |
| 56.4 | 9.6 | 34.0 | 0.7726 |
| 50.8 | 11.6 | 37.6 | 0.7812 |
| 47.6 | 13.0 | 39.4 | 0.7864 |
| 42.6 | 15.5 | 41.9 | 0.7958 |
| 38.6 | 17.8 | 43.6 | 0.8029 |
| 35.7 | 19.7 | 44.6 | 0.8091 |
| 31.5 | 23.0 | 45.5 | 0.8189 |
| 28.3 | 26.0 | 45.7 | 0.8275 |
| 24.8 | 29.7 | 45.5 | 0.8379 |
| 22.6 | 32.4 | 45.0 | 0.8450 |
| 18.9 | 37.6 | 43.5 | 0.8590 |
| 16.3 | 41.9 | 41.8 | 0.8707 |
| 14.5 | 45.0 | 40.5 | 0.8789 |
| 12.6 | 48.4 | 39.0 | 0.8884 |
| 12.2 | 49.0 | 38.8 | 0.8897 |
| 10.6 | 52.1 | 37.3 | 0.8982 |
| 8.6 | 55.6 | 35.8 | 0.9084 |
| 6.6 | 60.2 | 33.2 | 0.9200 |
| 5.9 | 61.8 | 32.3 | 0.9245 |
| 5.2 | 63.6 | 31.2 | 0.9293 |
| 4.7 | 65.0 | 30.3 | 0.9334 |
| 3.4 | 69.6 | 27.0 | 0.9437 |
| 2.2 | 74.8 | 23.0 | 0.9568 |
| 1.6 | 78.3 | 20.1 | 0.9634 |
| 1.3 | 83.3 | 15.4 | 0.9716 |
| 1.2 | 89.4 | 9.4 | 0.9796 |
| 1.0 | 93.8 | 5.2 | 0.9864 |
| 0.9 | 99.1 | | 0.9928 |

Reference: Frere, F. J., *Ind. Eng. Chem.* 41, 2365 (1949)

Table 10.11: Conjugate Solutions In the System: Isopropyl Ether–Isopropyl Alcohol–Water at 25°C, % wt (14)

| Upper Layer | | | Tie Line ¹ | Lower Layer | | |
|-------------|------------------------------------|------|--------------------------|-------------|------------------|------|
| IPE | H ₂ O | IPA | | IPE | H ₂ O | IPA |
| 96.4 | 0.8 | 2.8 | 1 | 1.0 | 92.1 | 6.9 |
| 93.0 | 1.2 | 5.8 | 2 | 1.2 | 89.0 | 9.8 |
| 90.1 | 1.5 | 8.4 | 3 | 1.2 | 86.9 | 11.9 |
| 86.1 | 2.0 | 11.9 | 4 | 1.2 | 85.4 | 13.4 |
| 82.8 | 2.7 | 14.5 | 5 | 1.2 | 83.8 | 15.0 |
| 76.3 | 4.0 | 19.7 | 6 | 1.3 | 82.4 | 16.3 |
| 72.1 | 5.0 | 22.9 | 7 | 1.4 | 81.6 | 17.0 |
| 64.2 | 7.0 | 28.8 | 8 | 1.4 | 80.3 | 18.3 |
| 54.2 | 10.2 | 35.6 | 9 | 1.7 | 77.8 | 20.5 |
| 45.4 | 14.0 | 40.6 | 10 | 2.3 | 74.1 | 23.6 |
| 36.9 | 18.7 | 44.4 | 11 | 2.9 | 71.2 | 25.9 |
| 31.5 | 23.0 | 45.5 | 12 | 3.7 | 68.3 | 28.0 |
| 25.3 | 29.0 | 45.7 | 13 | 4.7 | 64.6 | 30.7 |
| | Estimated plait point ² | | | 9.8 | 53.3 | 36.9 |

¹ See Table 10.12² Point at which two layers converge into one phase.Reference: Frere, F.J., *Ind. Eng. Chem.* 41, 2365 (1949).

Table 10.12: Miscibility of Isopropyl Ether–Isopropyl Alcohol–Water at 25°C (14)

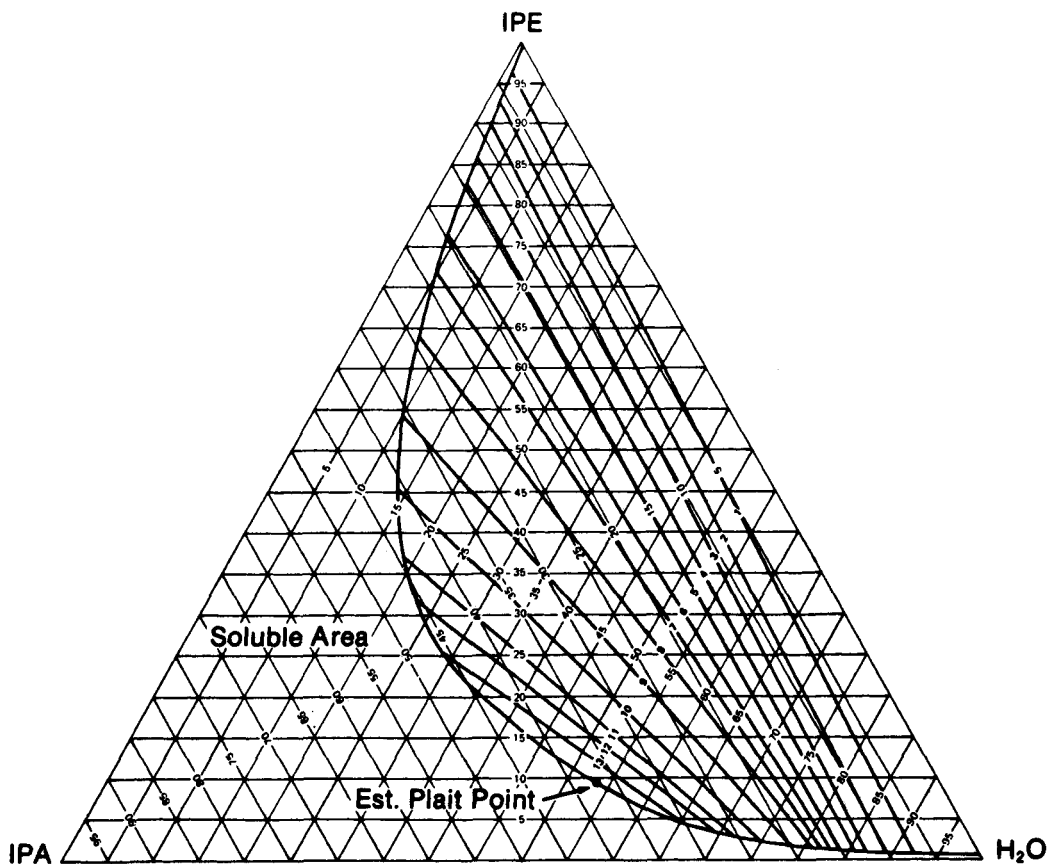


Table 10.13: Azeotropic Information—Isopropyl Ether (14)

| Ternary Azeotrope: IPA — IPE — Water (Boiling Point 61.7° C) | | | |
|-------------------------------------------------------------------------|-----------|-------------|-------------|
| Component | Azeotrope | Upper Layer | Lower Layer |
| IPA (Isopropyl Alc.) | 6.0 | 5.8 | 10.0 |
| IPE | 89.0 | 93.1 | 1.0 |
| Water | 5.0 | 1.1 | 89.0 |
| %w | 100 | 95.6 | 4.4 |

Other Azeotropic Information

Binary Azeotropes

| B.P. °C | Other Components | %wt Other Component |
|---------|--------------------------|---------------------|
| 61. | Boron Trifluoride | 40 |
| 62.2 | Water | 4.5 |
| 70.5 | Chloroform | 36 |
| <67.5 | Propionitrile | > 4 |
| 74.0 | 2, 2-Dichloropropane | 60 |
| 54.2 | Acetone | 61 |
| 66.2 | Isopropyl Alcohol | 16.3 |
| 66.0 | 1-Propanethiol | 65 |
| >69.0 | 1-chloro-2-methylpropane | — |
| <68.0 | Methylocyclopentane | < 20 |
| 67.5 | Hexane | 47 |

Ternary Azeotropes

| B.P. °C | Components and %wt |
|--------------|--------------------------------------------------------|
| 66 | H ₂ O, 7.0%; Ethyl alcohol 14.7%; IPE 78.3% |
| Min B.P. | H ₂ O — %; Acetone — %; IPE — % |
| Nonazeotrope | H ₂ O — Sec. Butyl alcohol — IPE |

IPE does not form azeotropes with

| | |
|--------------------|-------------------------|
| Trichloroethylene | 2-Bromo-2-methylpropane |
| 1,1-Dichloroethane | 1-Chlorobutane |
| 1,2-Dichloroethane | Ethyl sulfide |
| 2-Chloroethanol | Diethoxymethane |
| Iodoethane | Benzene |
| 2-Bromopropane | Hexyl Alcohol |
| Thiophene | |

Table 10.14: Vapor Pressure of Isopropyl Ether at Various Temperatures (8)

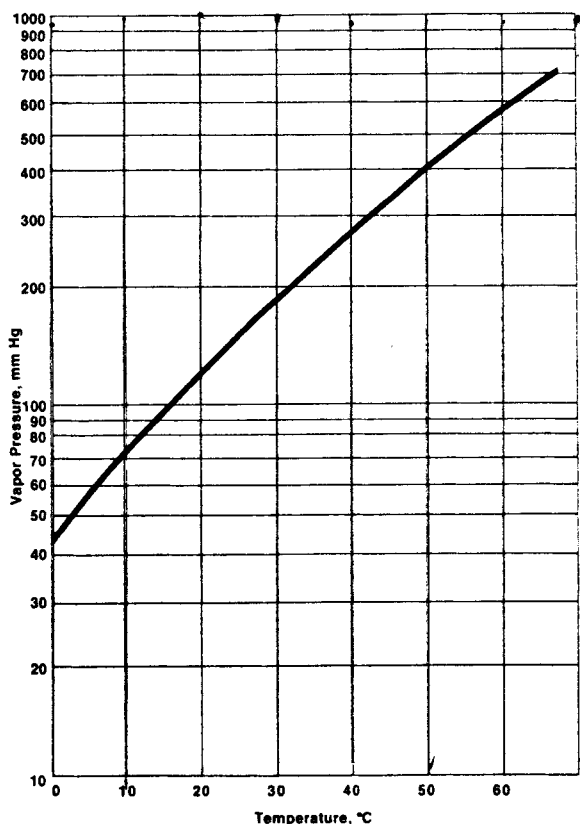


Table 10.15: Specific Gravity of Isopropyl Ether vs Temperature (8)

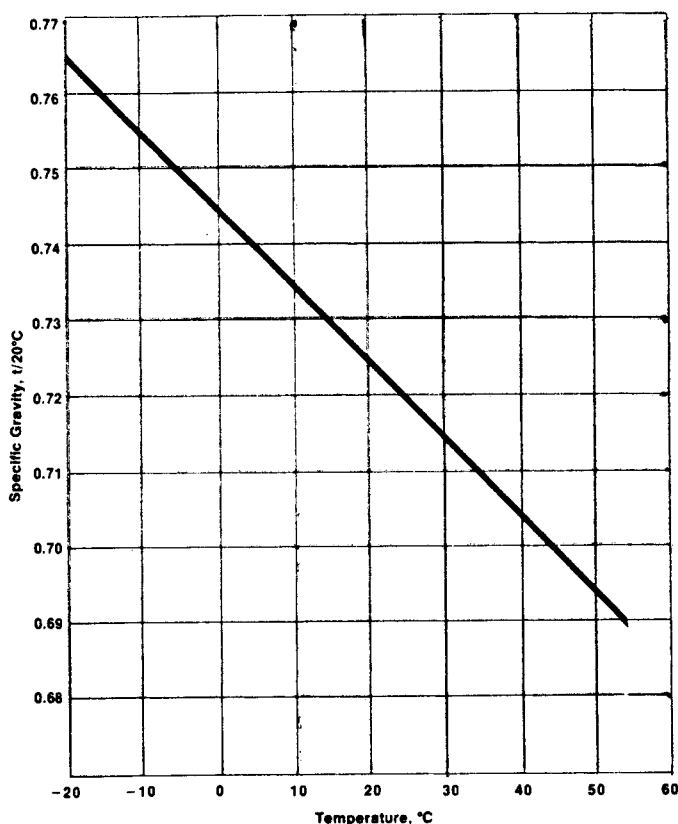


Table 10.16: Mutual Solubility and Specific Gravity of Isopropyl Ether, Water and Isopropyl Alcohol at 25°C (2)


| Isopropyl Ether | Water | Isopropyl Alcohol | $SG_{d_4}^{25^\circ C}$ |
|-----------------|-------|-------------------|-------------------------|
| 99.5 | 0.5 | -- | 0.7210 |
| 93.4 | 1.1 | 5.5 | 0.7274 |
| 89.0 | 1.5 | 9.5 | 0.7326 |
| 84.4 | 2.2 | 13.4 | 0.7380 |
| 79.9 | 3.2 | 16.9 | 0.7427 |
| 74.4 | 4.6 | 21.0 | 0.7490 |
| 72.8 | 4.7 | 22.5 | 0.7509 |
| 70.3 | 5.2 | 24.5 | 0.7547 |
| 68.7 | 5.8 | 25.5 | 0.7564 |
| 65.3 | 6.7 | 28.0 | 0.7605 |
| 64.0 | 7.1 | 28.9 | 0.7620 |
| 61.5 | 7.8 | 30.7 | 0.7641 |
| 58.3 | 8.9 | 32.8 | 0.7698 |

(continued)

Table 10.16: (continued)

| Isopropyl Ether | Water | Isopropyl Alcohol | SG d ^{25°C.} ₄ |
|-----------------|-------|-------------------|------------------------------------|
| 56.4 | 9.6 | 34.0 | 0.7726 |
| 50.8 | 11.6 | 37.6 | 0.7812 |
| 47.6 | 13.0 | 39.4 | 0.7864 |
| 42.6 | 15.5 | 41.9 | 0.7958 |
| 38.6 | 17.8 | 43.6 | 0.8029 |
| 35.7 | 19.7 | 44.6 | 0.8091 |
| 31.5 | 23.0 | 45.5 | 0.8189 |
| 28.3 | 26.0 | 45.7 | 0.8275 |
| 24.8 | 29.7 | 45.5 | 0.8379 |
| 22.6 | 32.4 | 45.0 | 0.8450 |
| 18.9 | 37.6 | 43.5 | 0.8590 |
| 16.3 | 41.9 | 41.8 | 0.8707 |
| 14.5 | 45.0 | 40.5 | 0.8789 |
| 12.6 | 48.4 | 39.0 | 0.8884 |
| 12.2 | 49.0 | 38.8 | 0.8897 |
| 10.6 | 52.1 | 37.3 | 0.8982 |
| 8.6 | 55.6 | 35.8 | 0.9084 |
| 6.6 | 60.2 | 33.2 | 0.9200 |
| 5.9 | 61.8 | 32.3 | 0.9245 |
| 5.2 | 63.6 | 31.2 | 0.9293 |
| 4.7 | 65.0 | 30.3 | 0.9334 |
| 3.4 | 69.6 | 27.0 | 0.9437 |
| 2.2 | 74.8 | 23.0 | 0.9568 |
| 1.6 | 78.3 | 20.1 | 0.9634 |
| 1.3 | 83.3 | 15.4 | 0.9716 |
| 1.2 | 89.4 | 9.4 | 0.9796 |
| 1.0 | 93.8 | 5.2 | 0.9864 |
| 0.9 | 99.1 | - | 0.9928 |

Table 10.17: n-Butyl Ether (2)




n-Butyl ether is a colorless, stable liquid, soluble in water. Having two butyl groups, this ether is an excellent solvent for many natural and synthetic resins, gums, oils, fats, organic acids, esters, and alkaloids. Beeswax and carnauba wax have limited solubility in butyl ether at room temperature, but become quite soluble at higher temperatures. n-Butyl ether will not dissolve cellulose acetate, benzyl cellulose, or cellulose nitrate, but when it is mixed with ethyl or butyl alcohol it becomes a solvent for ethylcellulose. Butyl ether is used as a reaction medium in organic synthesis and in the extraction and purification of essential oils, organic acids, waxes and resins.

Typical Properties and Specifications

| | |
|----------------------------------------|----------------------|
| Boiling point at 760 mm | 142.4°C |
| 50 | 63 |
| 10 | 28 |
| Color | Water-white |
| Flash point | 30.6°C |
| Heat of vaporization | 68.8 cal./g |
| Freezing point | Approx. -96°C |
| Specific gravity at 20/20°C | 0.760-0.771 |
| Refractive index at 20°C | 1.3992 |
| Surface tension at 20°C | 22.9 dynes per sq cm |
| Solubility in water at 20°C | 0.03% |
| Solubility of water in solvent at 20°C | 0.19% |
| Vapor pressure at 20°C | 4.8 mm Hg |
| Weight per gallon at 20°C | 6.4 lbs |
| Acidity (as butyric) | 0.05% by wt., max. |
| Distillation range | 137-143°C |
| Water content | 0.10% by wt., max. |

Table 10.18: Diamyl Ether (2)




Commercial diamyl ether consists principally of di-n-amyl ether and di-isoamyl ether, with small percentages of isomeric amyl ethers and diamylene. It is a colorless to light yellow liquid which is quite stable. It is insoluble in water but soluble in methanol, ethyl ether, ethyl acetate, acetone, aliphatic and aromatic hydrocarbons, fixed oils, oleic and hot stearic acids, hot paraffin and carnauba waxes, the latter two solidifying when cooled. Unlike the lower aliphatic ethers, it will not dissolve nitrocellulose when admixed with ethanol. However, a mixture of diamyl ether and 20% ethanol will dissolve ethylcellulose.

Typical Properties and Specifications

| | |
|-----------------------------|--------------------------|
| Dielectric constant | 3.14 |
| Flash point (open cup) | 146°F |
| Heat of vaporization | 65.9 cal./g (calc'd) |
| Specific gravity at 20/20°C | 0.78-0.80 |
| Specific heat | 0.513 cal/g |
| Refractive index at 20°C | 1.4198 |
| Surface tension at 20°C | 24.8 dynes/sq cm |
| Freezing point | Below -75°C |
| Vapor pressure at 20°C | 0.67 mm |
| Water azeotrope at 96-98°C | 41% amyl ether (approx.) |
| Weight per gallon at 20°C | 6.61 lbs |
| Acidity (mg. KOH per g) | 0.4, max. |
| Distillation | |
| Initial boiling point | Not below 170°C |
| Not less than 95% | Below 200 |
| Final boiling point | Not above 210 |
| Water content | 0.2% by wt., max. |

Table 10.19: n-Hexyl Ether (2)



n-Hexyl ether is a colorless, stable liquid with a mild odor. It is less volatile than the lower members of the aliphatic ether group and its solubility in water is very slight. It is miscible with most organic solvents and can replace butyl ether for many similar applications. It is used as a solvent medium in chemical reactions and is a foam breaker for certain processes.

| | |
|-----------------------------------------|--------------------|
| Boiling point at 760 mm. | 226.2°C. |
| Boiling point at 50 mm. | 136°C. |
| Boiling point at 10 mm. | 100°C. |
| Flash Point | 170°F. |
| Specific gravity at 20/20°C. | 0.7942 |
| Solubility in water at 20°C. | 0.01% by wt. |
| Solubility of water in solvent at 20°C. | 0.12% by wt. |
| Vapor pressure at 20°C. | 0.07 mm. Hg |
| Weight per gallon at 20°C. | 6.61 lbs. |
| Acidity (as acetic) | 0.01% by wt., max. |
| Distillation range at 760 mm. | 205 - 235°C. |
| Color (A.P.H.A.) | 15 max. |
| Water content | 0.10% by wt. |

Table 10.22: Specific Gravities of Various Ethers (19)


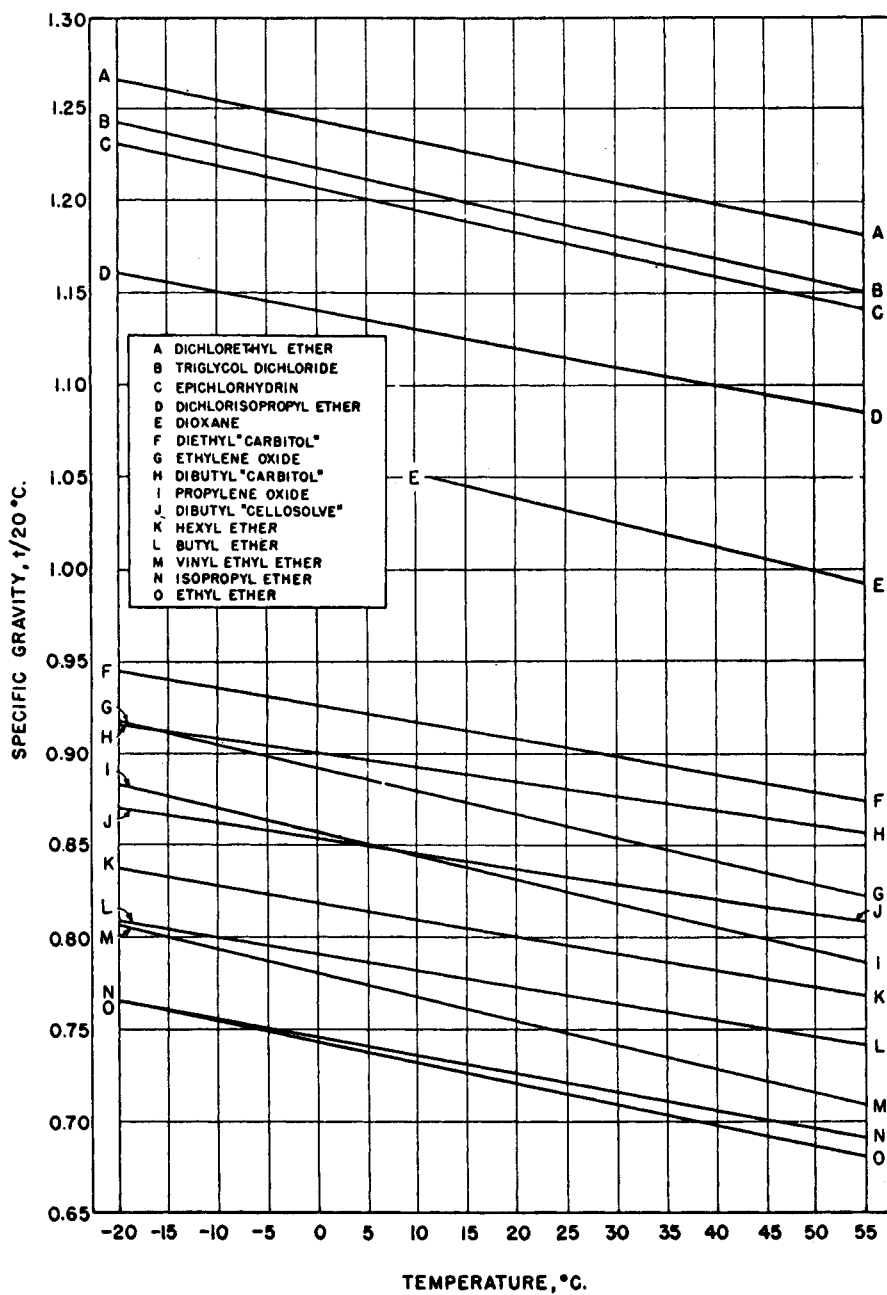


Table 10.23: Vapor Pressure of Various Ethers (19)

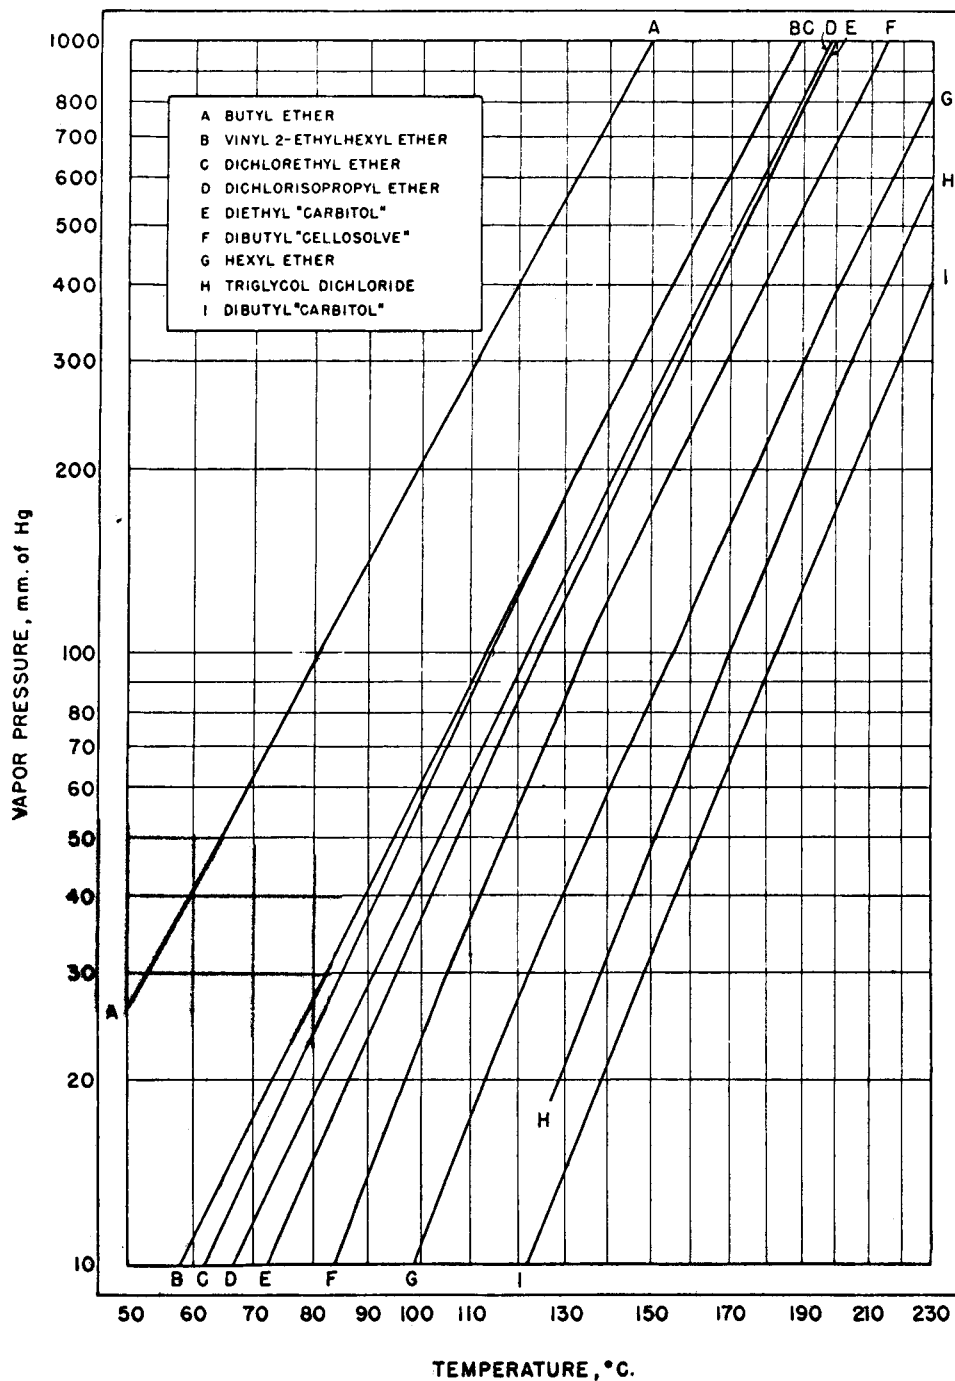

(continued)

Table 10.23: (continued)


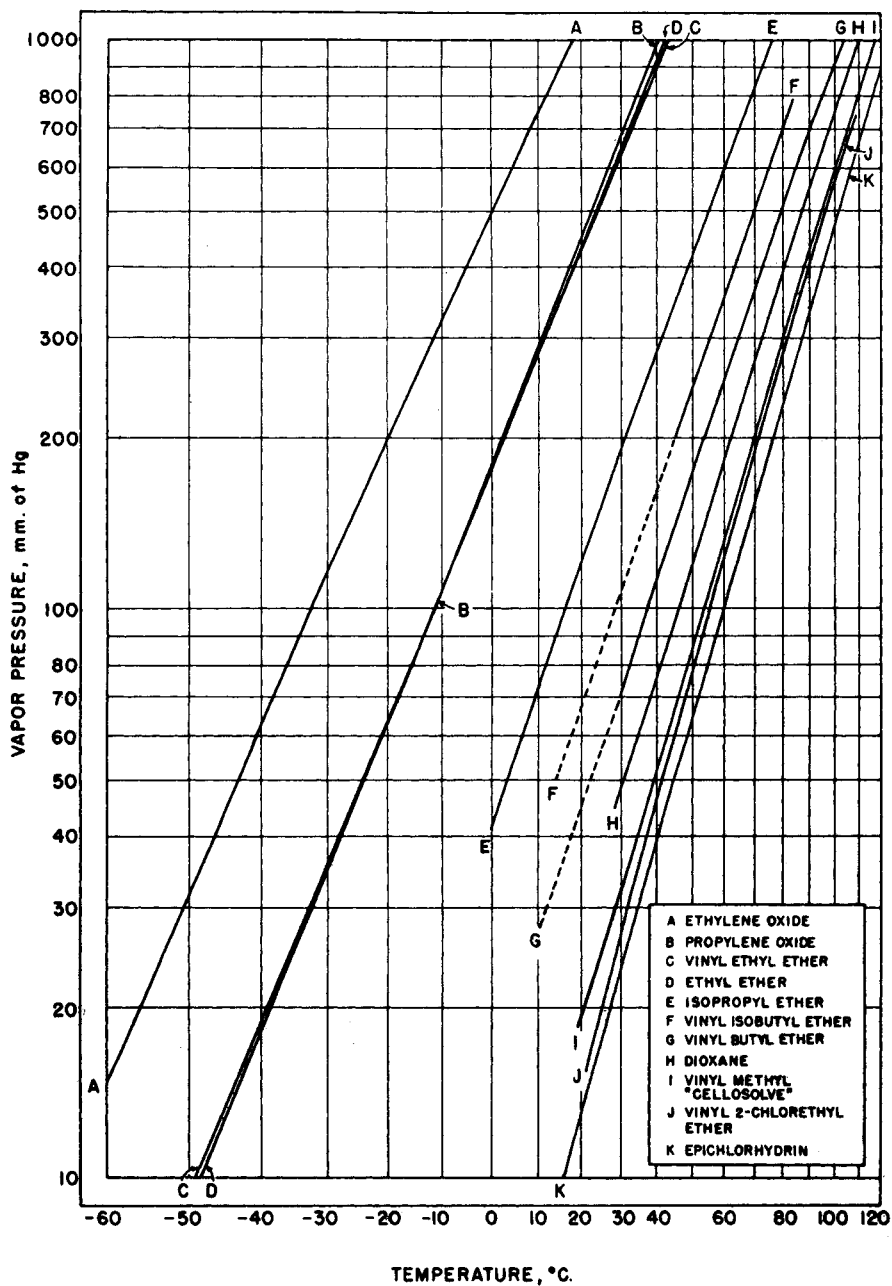


Table 10.24: Ethylene Oxide (2)

Epoxyethane
Dimethylene Oxide



| | |
|-------------------------------------------|--------------|
| Acidity (as acetic acid), % by wt. | 0.005 (max.) |
| Boiling point, °C. | |
| 760 mm. | 10.4 |
| 50 mm. | -44 |
| 10 mm. | -66 |
| Δ bp/ Δ p, °C./mm. Hg | 0.033 |
| Coefficient of expansion at 55°C. | 0.00177 |
| Flash point (open cup), °F. | below 0 |
| Freezing point, °C. | -112.5 |
| Heat of vaporization (Btu/lb. at 1 atm.) | 245 |
| Molecular weight | 44.05 |
| Refractive index (n _D at 7°C.) | 1.3597 |
| Solubility, % by wt. at 20°C. | |
| in water | infinite |
| water in | infinite |
| Specific gravity, 20/20°C. | 0.8711 |
| ΔSG/ΔT | 0.00140 |
| Specific heat at 20°C. | 0.8763 |
| lb./gal. at 60°F. | 7.30 |
| Vapor pressure, mm. Hg at 20°C. | 1120 |
| Viscosity (absolute) in centipoises, 0°C. | 0.3 |

Table 10.25: Enthalpy and Entropy of Ethylene Oxide (19)


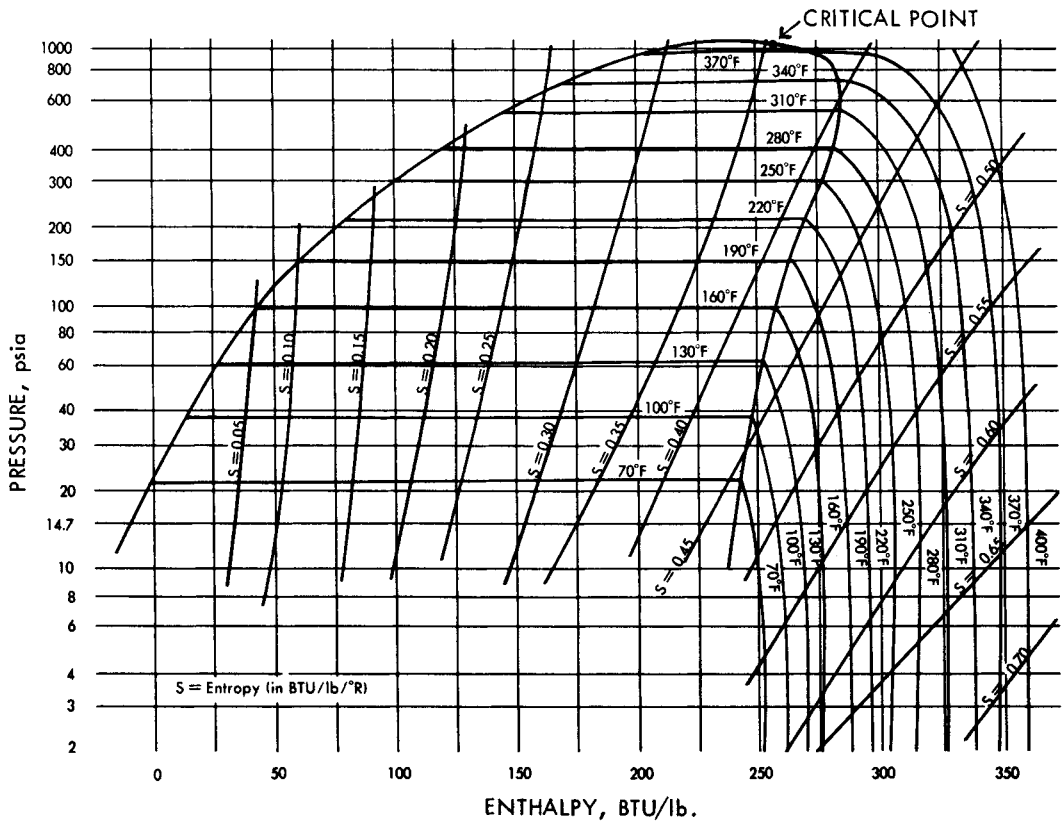


Table 10.26: Propylene Oxide (2)

1,2-Epoxypropane



Propylene oxide is soluble in water and miscible with most organic solvents. It is found to be an excellent low-boiling solvent for cellulose acetate, nitrocellulose, adhesive compositions and vinyl chloride-acetate resins. It is also a solvent for hydrocarbons, gums and shellac. Some of its uses are as a solvent and stabilizer in DDT aerosol-type insecticides, and as a fumigant and food preservative. Since it is an acid acceptor, it is also used as a stabilizer for vinyl chloride resins and other chlorinated systems.

| | |
|--------------------------------------------|---------|
| Acidity (as acetic acid), % by wt. (max.) | 0.01 |
| Boiling point, °C.: | |
| 760 mm. Hg | 34.0 |
| 50 mm. Hg | -26 |
| 10 mm. Hg | -52 |
| Δ BP/Δ P., °C./mm. Hg | 0.037 |
| Coefficient of expansion at 55°C. | 0.00157 |
| Distillation at 760 mm., °C.: | |
| Initial BP/min. | 33.0 |
| DP, max. | 37.0 |
| Flash point (open cup), °F. | -35 |
| Freezing point, °C. | -104.4 |
| Heat of vaporization (Btu/lb. at 1 atm.) | 160 |
| Molecular weight | 58.08 |
| Refractive index (n _D at 20°C.) | 1.3657 |
| Solubility, % by wt. at 20°C.: | |
| in water | 40.5 |
| water in | 12.8 |
| Specific gravity, 20/20°C. | 0.8304 |
| SG/T. | 0.00125 |
| Specific heat at 15°C. | 0.465 |
| lb./gal. at 60°F. | 6.96 |
| Vapor pressure, mm. Hg at 20°C. | 449 |
| Viscosity (absolute) in centipoises, 20°C. | 0.4 |


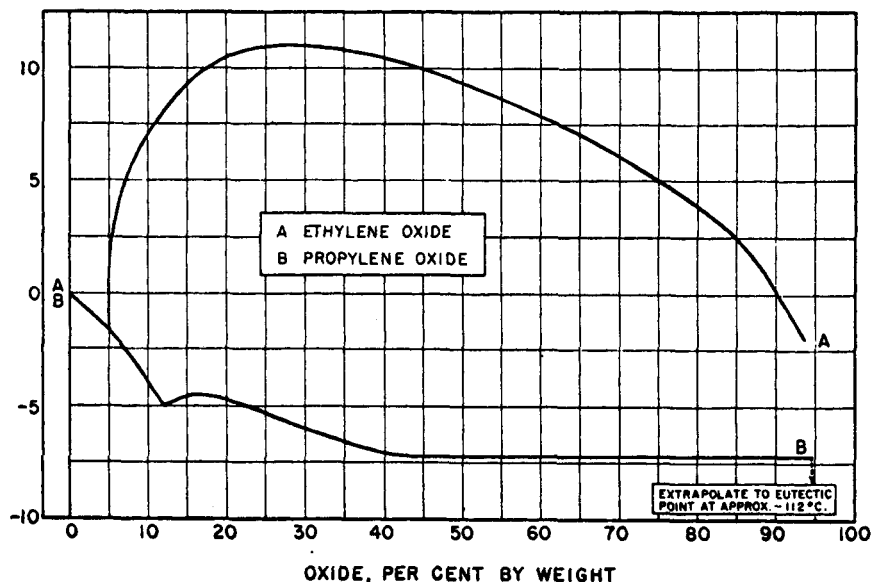
Table 10.27: Freezing Points of Solutions of Ethylene Oxide and Propylene Oxide (19)

Table 10.28: 1,2-Butylene Oxide (2)

1,2-Epoxybutane




1,2-Butylene oxide is a colorless mobile liquid. This low boiling liquid has but limited water solubility, yet is miscible with most common organic solvents. It undergoes the usual reactions of epoxides with compounds having labile hydrogen atoms. Some of these are acids, amines, ammonia, alcohols, phenols, polyols, thiols, etc. Butylene oxide can be polymerized or copolymerized with other alkylene oxides to yield polyethers. The resulting polymers are less water soluble than the polymers made from ethylene and propylene oxide, of equivalent chain length.

| | | | |
|--------------------------------------------|---------|--------------------------------------|------|
| Boiling point, °C. at 760 mm. | 63.2 | Surface tension at 20°C., dynes/cm. | 23.9 |
| Coefficient of expansion at 20°C. | 0.00132 | Vapor pressure, mm. Hg at 20°C. | 141 |
| Freezing point, °C. | -150 | Viscosity (absolute) in centipoises: | |
| Heat of combustion (Btu/lb. at 25°C.) | 14,665 | 0°C. | 0.54 |
| Heat of vaporization (Btu/lb. at 1 atm.) | | 20°C. | 0.41 |
| and 63.2°C. | 181 | 40°C. | 0.33 |
| Molecular weight | 72.11 | | |
| Refractive index (n _D at 20°C.) | 1.3840 | | |
| Solubility, % by wt. at 20°C.: | | | |
| in water | 5.91 | | |
| water in | 2.65 | | |

Table 10.29: CARDOLITE NC-513: (71)**TYPICAL PROPERTIES:**

| | Typical value | Specification |
|--------------------------------------------------|-------------------------|---------------|
| Viscosity @ 25°C [cPs] | 50 | 40-70 |
| Epoxy equivalent weight [EEW] | 490 | 424-575 |
| Flash point (closed cup) | 400°F/205°C | - |
| Density @ 25 °C [lbs/gal (kg/l)] | 8.17 (0.97) | - |
| Color [Gardner] | <13 | - |
| Appearance | reddish brown liquid | - |
| Hydrolyzable Chlorine | - | < 2 % |
| Recommended PHR (liquid epoxy resins, EEW = 190) | 2-20 | - |

CHEMICAL STRUCTURE:**DESCRIPTION:**

Cardolite® NC-513 is a unique reactive epoxy flexibilizer and diluent. This low viscosity fluid has predominantly one reactive epoxy group per molecule which combines chemically into the epoxy system.

APPLICATIONS:

- Flexibilization of solvent free and high solids surface tolerant marine and industrial coatings.
- Industrial flooring requiring excellent chemical-, water- and abrasion resistance.
- Preparation of amine adducts.
- Coatings in contact with potable water (NSF approval)

ADVANTAGES:


- Excellent chemical and water resistance
- Increased thermal shock resistance
- Maintains electrical properties
- Low volatility
- Aids in Bis-Phenol F resin and Curing Agent compatibility

REGULATIONS :

- United States Department of Agriculture acceptance.
- National Sanitation Foundation (NSF), coatings for use with potable water; NC-513 is being used in coatings that have NSF approval.
- Ozone Depleting Chemicals-certification that products are not classified as / are not manufactured with Class I or Class II ozone depleting chemicals.

Table 10.30: 1,4-Dioxane (2)

1,4-Dioxan
1,4-Diethylene Oxide
Dioxyethylene Ether
Diethylene Ether
Diethylene Dioxide




1,4-Dioxane is a colorless, stable liquid with a faint, pleasant odor. Although it has been known as far back as 1863, it was not until 1929 that it became commercially available. It is chemically a di-ether obtained by the loss of water from two molecules of ethylene glycol. It is completely soluble in water, as well as most organic solvents. It is freely soluble in mineral, vegetable, blown and heat-bodied oils, and oil soluble dyes. Most waxes are more readily soluble in dioxane when heated and examples of these are beeswax, carnauba, montan, paraffin, gilsonite, and Japan wax.

| | |
|----------------------------------------|------------------------------------------------------------|
| Acidity (as acetic) | 0.010% by wt, max |
| Boiling point 760 mm | 101.3°C |
| Distillation range at 760 mm | 95-103°C |
| Coefficient of expansion | 0.001030 (per °C) to 20°C 0.001070 (per °C) to 55°C |
| Electrical conductivity at 25°C | 2×10^{-9} recip. ohms |
| Flash point | 65°F |
| Freezing point | 11.7°C |
| Heat of combustion | 581 kg cal/mol |
| Heat of fusion | 33.8 cal/g |
| Heat of vaporization | 98.6 cal/g |
| Refractive index at 20°C | 1.4221 |
| Specific gravity at 20/20°C | 1.0356 1.0353 |
| Specific heat at 20°C | 0.420 cal/g |
| Surface tension at 25°C | 36.9 dynes/cm |
| Solubility in water at 20°C | Complete |
| Solubility of water in dioxane at 20°C | Complete |
| Viscosity at 25°C | 0.0120 poise |
| Vapor pressure at 20°C | 29.0 mm Hg |
| Water content at 20°C | Miscible without turbidity with 19 vol. 60° Be gasoline |
| Weight per gal at 20°C | 8.61 lbs |


Table 10.31: Trioxane (2)

Cyclic Trimeric Polymer of Formaldehyde



Trioxane is a most unusual chemical. It is an excellent solvent for many classes of materials. Concentrated aqueous solutions of trioxane have solvent properties which are not possessed by trioxane itself. Molten trioxane dissolves numerous organic compounds, such as naphthalene, urea, camphor, dichlorobenzene, etc. It is stable in alkaline or neutral solutions, yet it is depolymerized to formaldehyde by small amounts of strong acid or acid-forming materials, and the rate of depolymerization can be readily controlled.

| | | Properties | |
|---------------------------------|----------------|--------------------------|------------------|
| Colorless, crystalline compound | | Solubility: | |
| Molecular weight | 90.05 | Water | Readily soluble |
| Odor | Mild, pleasant | Alcohols | Readily soluble |
| Melting point | 61°C | Ketones | Readily soluble |
| Boiling point | 115°C | Ethers | Readily soluble |
| Vapor Pressure: | | Esters | Readily soluble |
| 25°C | 13 mm | Chlorinated hydrocarbons | Readily soluble |
| 86°C | 283 mm | Aromatic hydrocarbons | Readily soluble |
| 114.5°C | 759 mm | Vegetable oils | Readily soluble |
| 129°C | 1212 mm | Naphthalene | Readily soluble |
| Flash point | 45°C | Phenol | Readily soluble |
| Density (molten) at 65°C | 1.170 | Petroleum ether | Slightly soluble |

Table 10.32: Vinyl Methyl Ether (2)

Vinyl methyl ether is a gas at ordinary temperature and pressure. When condensed it is a colorless, mobile liquid having a vapor pressure at 760 mm. at 5.5°C. It is miscible with most organic solvents, but only slightly soluble in water or polyhydroxy organic compounds such as glycols. In volatility and flammability it resembles liquefied petroleum gases.

| | | | |
|----------------------------------|-----------------|---------------------------------------|--------------|
| Boiling point, 760 mm. | 5.5°C. | Solubility of water in ether at 25°C. | 0.51% by wt. |
| Flash point (Cleveland open cup) | -69°F. (-56°C.) | Specific gravity at 5.7/4°C. | 0.7694 |
| Freezing point | -122°C. | Specific gravity at 20/4°C. | 0.7511 |
| Molecular weight | 58.08 | Vapor pressure at 25°C. | 1550 mm. Hg |
| Odor | Sweet, pleasant | Vapor pressure at 70°F. | 28 psi abs. |
| Refractive Index | 1.3947 | Weight per gallon at 25°C. | 6.17 lbs. |
| Solubility in water at 25°C. | 0.82% by wt. | | |

Table 10.33: Vinyl Ethyl Ether (2)

| | | | |
|--------------------------------------------------|---------|-------------------------------------------|---------|
| Boiling point, °C.: | | Molecular weight | 72.10 |
| 760 mm. | 35.5 | Refractive index (n_D at 20°C.) | 1.3774 |
| 50 mm. | -24 | Solubility, % by wt. at 20°C.: | |
| 10 mm. | -49 | in water | 0.9 |
| $\Delta \text{BP}/\Delta \text{P.}$, °C./mm. Hg | 0.038 | water in | 0.2 |
| Coefficient of expansion at 55°C. | 0.00165 | Specific gravity, 20/20°C. | 0.7541 |
| Flash point (open cup), °F. | below 0 | $\Delta \text{SG}/\Delta \text{T.}$ | 0.00117 |
| Freezing point, °C. | -115.3 | Vapor pressure, mm. Hg at 20°C. | 428 |
| Heat of vaporization (Btu/lb. at 1 atm.) | 161 | Viscosity (abs.) in centipoises, at 20°C. | 0.2 |

Table 10.34: Vinyl 2-Chloroethyl Ether (2)

| | | | |
|--------------------------------------------------|---------|-------------------------------------|---------|
| Boiling point, °C.: | | Solubility, % by wt. at 20°C.: | |
| 760 mm. | 109.1 | in water | 0.6 |
| 50 mm. | 39 | water in | 0.4 |
| 10 mm. | 10 | Specific gravity, 20/20°C. | 1.0498 |
| $\Delta \text{BP}/\Delta \text{P.}$, °C./mm. Hg | 0.044 | $\Delta \text{SG}/\Delta \text{T.}$ | 0.00123 |
| Coefficient of expansion at 55°C. | 0.00118 | Vapor pressure, mm. Hg at 20°C. | 18.6 |
| Flash point (open cup), °F. | 90 | Viscosity (abs.) in centipoises: | |
| Freezing point, °C. | -69.7 | 0°C. | 1.1 |
| Heat of vaporization (Btu/lb. at 1 atm.) | 154 | 20°C. | 0.8 |
| Molecular weight | 106.55 | 40°C. | 0.6 |
| Refractive index (n_D at 20°C.) | 1.4381 | | |

Table 10.35: Vinyl Butyl Ether (2)


| | | | |
|--------------------------------------------------|---------|----------------------------------------|---------|
| Boiling point, °C.: | | Molecular weight | 100.16 |
| 760 mm. | 94.2 | Refractive index (n_D at 20°C.) | 1.4007 |
| 50 mm. | 24 | Solubility, % by wt. at 20°C.: | |
| 10 mm. | -4 | in water | 0.30 |
| $\Delta \text{BP}/\Delta \text{P.}$, °C./mm. Hg | 0.044 | water in | 0.09 |
| Coefficient of expansion at 55°C. | 0.00133 | Specific gravity, 20/20°C. | 0.7803 |
| Flash point (open cup), °F. | 15 | $\Delta \text{SG}/\Delta \text{T.}$ | 0.00100 |
| Freezing point, °C. | -112.7 | Vapor pressure, mm. Hg at 20°C. | 40.4 |
| Heat of vaporization (Btu/lb. at 1 atm.) | 137 | Viscosity (abs.) in centipoises, 20°C. | 0.5 |

Table 10.36: Vinyl Isobutyl Ether (2)



| | | | |
|--------------------------------------------------|---------|-------------------------------------------|---------|
| Boiling point, °C.: | | Refractive index (n_D at 20°C.) | 1.3961 |
| 760 mm. | 83.4 | Solubility, % by wt. at 20°C.: | |
| 50 mm. | 17 | in water | 0.2 |
| 10 mm. | -7 | water in | 0.08 |
| $\Delta \text{BP}/\Delta \text{P.}$, °C./mm. Hg | 0.045 | Specific gravity, 20/20°C. | 0.7706 |
| Coefficient of expansion at 55°C. | 0.00140 | $\Delta \text{SG}/\Delta \text{T.}$ | 0.00104 |
| Flash point (open cup), °F. | 15 | Specific heat at 15°C. | 0.512 |
| Freezing point, °C. | -132.3 | Vapor pressure, mm. Hg at 20°C. | 59.5 |
| Heat of vaporization (Btu/lb. at 1 atm.) | 144 | Viscosity (abs.) in centipoises, at 20°C. | 0.4 |
| Molecular weight | 100.16 | | |

Table 10.37: Vinyl 2-Ethylhexyl Ether (2)



| | | | |
|--------------------------------------------------|---------|-------------------------------------|---------|
| Boiling point, °C.: | | Refractive index (n_D at 20°C.) | 1.4273 |
| 760 mm. | 177.7 | Solubility, % by wt. at 20°C.: | |
| 50 mm. | 95 | in water | 0.01 |
| 10 mm. | 62 | water in | 0.05 |
| $\Delta \text{BP}/\Delta \text{P.}$, °C./mm. Hg | 0.053 | Specific gravity, 20/20°C. | 0.8102 |
| Coefficient of expansion at 55°C. | 0.00107 | $\Delta \text{SG}/\Delta \text{T.}$ | 0.00084 |
| Flash point (open cup), °F. | 135 | Vapor pressure, mm. Hg at 20°C. | 0.60 |
| Freezing point, °C. | 100* | Viscosity (abs.) in centipoises: | |
| Heat of vaporization (Btu/lb. at 1 atm.) | 129 | 0°C. | 1.5 |
| Molecular weight | 156.26 | 20°C. | 1.0 |

*Sets to a glass below this temperature

Table 10.38: Typical Properties of the Vinyl Ethers (49)

| Vinyl Ether | Melting Point °C | Boiling Point | | Flammability °F |
|--------------------|---------------------|----------------------|-----------|--------------------|
| | | Temp. °C at mm Hg | Pressure | |
| Methyl | -122° | 5-6° | 760 | -69° (a) |
| Isopropyl | -140° | 55-56° | 760 | - |
| Isobutyl | -112° | 25° 83° | 77 760 | 20° (a) |
| 2-Ethylhexyl | -100° | 62-64° 178° | 18 760 | - |
| Isooctyl | -80° | 80° 175-6° | 25 760 | 140° (a) |
| Decyl | -41° | 60-98° | 5 | 185° (a) |
| Cetyl | 16° | 142° 173° | 1 5 | 325° (a) |
| Octadecyl | 28° | 124-168° 147-187° | 2 5 | 350° (a) |
| Dimethylaminoethyl | - | 42-44° | 30 | 110° (b) |

(a) Flash point - open cup method. (b) Fire point - ASTM D-92.


(continued)

Table 10.38: (continued)

| <u>Vinyl Ether</u> | <u>Refractive Index</u> | <u>Specific Gravity</u> | <u>Pounds per Gallon @ 25°C</u> | <u>Typical Vinyl Ether Content</u> |
|--------------------|-------------------------|------------------------------------------------|---------------------------------|------------------------------------|
| Methyl | 1.3947 $\frac{25}{D}$ | 0.7694 $\frac{5.7}{4}$ | 6.17 | 99% |
| Isopropyl | 1.3849 $\frac{20}{D}$ | 0.753 $\frac{20}{4}$ | 6.28 | 98% |
| Isobutyl | 1.3965 $\frac{20}{D}$ | 0.768 $\frac{20}{4}$ | 6.40 | 98% |
| 2-Ethylhexyl | 1.4273 $\frac{20}{D}$ | 0.810 $\frac{20}{20}$ | 6.74 | 95% |
| Isooctyl | 1.4256 $\frac{25}{D}$ | 0.802 $\frac{20}{4}$ | 6.66 | 98% |
| Decyl | 1.4278 $\frac{25}{D}$ | 0.812 $\frac{20}{4}$ | 6.75 | 98% |
| Cetyl | 1.4444 $\frac{25}{D}$ | 0.822 $\frac{27}{15}$ | 6.85 | 97% |
| Octadecyl | 1.4440 $\frac{30}{D}$ | 0.80 cast solid 0.821 $\frac{30}{4}$ liquid | 6.84 | 95% |
| Dimethylaminoethyl | 1.4225 $\frac{25}{D}$ | 0.830 $\frac{20}{20}$ | 6.85 | 99% |

Table 10.39: Phenyl Methyl Ether (2)


Anisole



Anisole is a high-boiling, mobile, straw-colored liquid with excellent thermal stability. It is immiscible in water and glycols but completely miscible with most common solvents. It is useful as a solvent for many organic compounds and it has unusual solvency for asphalts and pitches.

| | |
|----------------------------------------------------|--------|
| Boiling point at 760 mm. Hg, °C. | 153.8 |
| Flash point (Cleveland open cup), °F. | 125 |
| Heat of combustion, kcal./g. mol | 905.2 |
| Heat of vaporization at boiling point, cal./g. mol | 8.8 |
| Refractive index (n_D at 20°C.) | 1.5165 |
| Molecular weight | 108.13 |
| Specific gravity, 18°/4°C. | 0.996 |
| Specific heat: | |
| 24°C. | 0.422 |
| 31.6°C. | 0.462 |
| Vapor pressure, mm. Hg: | |
| 40°C. | 8.4 |
| 60°C. | 25 |
| 80°C. | 63 |
| 100°C. | 140 |
| 120°C. | 275 |

Table 10.40: Dibenzyl Ether (2)




Dibenzyl ether is a clear, almost colorless liquid. It is miscible with alcohols and ethers, but insoluble in water. Dibenzyl ether is used as special solvent and delustering agent for textiles.

| | | | |
|------------------------|------------|------------------------------|-------------|
| Boiling point, °C.: | | Flash point (open cup) °F. | 275 |
| 760 mm. | 298 | Melting point, °C. | 5 (approx.) |
| 15 mm. | 165-168 | Molecular weight | 198.3 |
| Distilling range, °C.: | | Specific gravity, 25°/25°C. | 1.041-1.045 |
| 5% | 220 (min.) | Solidifying temperature, °F. | below 45 |
| 50% | 300 | | |
| dry point | 308 | | |

Table 10.41: Diphenyl Oxide (77)

Diphenyl Ether



Diphenyl oxide is a practically colorless crystalline solid with a strong geranium-like odor. It is almost completely insoluble in water, but dissolves in most of the common organic solvents. Its high thermal stability at temperatures as high as 350° to 400°C. together with its noncorrosiveness and general chemical inertness make it eminently suitable as a component of high-boiling heat transfer media.

TYPICAL PROPERTIES

| | |
|------------------------------------------------|------------------|
| Molecular weight | 170 |
| Diphenyl oxide | >99% by weight |
| Crystallising point | 26°C |
| Distillation range at 760 mm Hg: | |
| initial boiling point | 253.0°C |
| 5% by volume | 254.0°C |
| 95% by volume | 256.0°C |
| final boiling point | 260.0°C |
| Flash point (Pensky Martens closed cup) | 240°F (115°C) |
| Ash | 0.001% by weight |
| Acidity (as hydrochloric acid) | 0.001% by weight |
| Water content | 0.02% by weight |
| Phenol content | 0.02% by weight |

PHYSICAL PROPERTIES

The following are values for pure diphenyl oxide :


| | |
|------------------------------------|------------|
| Density at 30/4°C | 1.066 g/ml |
| Latent heat of fusion | 22.9 cal/g |
| Specific heat at 30°C | 0.40 |
| Vapour pressure at 25°C | 0.02 mm Hg |
| Viscosity at 25°C | 3.86 cP |
| Refractive index n_D^{25} | 1.57870 |

Table 10.42: Miscellaneous Alkyl Aryl Ethers (2)

These ethers are generally high-boiling, water insoluble liquids of pleasant odor, miscible with a variety of organic solvents and commercial oils, fats, waxes and resins.

| Physical Properties | | | | | |
|--------------------------------|--------------------------------------------------------------------|------------------|----------------|-------------------|---------------|
| | Formula | Boiling Range °C | Flash Point °F | Sp. Gravity 20/20 | Molecular Wt. |
| Methyl Phenyl Ether (Anisole) | $\text{CH}_3\text{OC}_6\text{H}_5$ | 150-160 | 120 | 0.993 | |
| n-Butyl Phenyl Ether | $\text{C}_4\text{H}_9\text{OC}_6\text{H}_5$ | 202-212 | 180 | 0.929 | |
| Amyl Phenyl Ether | $\text{C}_5\text{H}_{11}\text{OC}_6\text{H}_5$ | 214-229 | 185 | 0.924 | 164.1 |
| p-tert-Amylphenyl Methyl Ether | $\text{C}_5\text{H}_{11}\text{C}_6\text{H}_4\text{OCH}_3$ | 239-243 | 210 | 0.942 | |
| p-tert-Amylphenyl-n-Amyl Ether | $\text{C}_5\text{H}_{11}\text{C}_6\text{H}_4\text{OC}_4\text{H}_9$ | 285-295 | 260 | 0.905 | 234.2 |
| Amyl Benzyl Ether | $\text{C}_5\text{H}_{11}\text{OCH}_2\text{C}_6\text{H}_5$ | 224-239 | 175 | 0.912 | |
| Amyl Toly Ether | $\text{C}_5\text{H}_{11}\text{OC}_6\text{H}_4\text{CH}_3$ | 240-264 | 195 | 0.916 | |
| Amyl beta Naphthyl Ether | $\text{C}_5\text{H}_{11}\text{OC}_{10}\text{H}_7$ | 320-350 | 310 | 1.01 | |
| Amyl Xylol Ether | $\text{C}_5\text{H}_{11}\text{OC}_6\text{H}_3(\text{CH}_3)_2$ | 250-263 | 205 | 0.907 | |

Table 10.43: Furan (11)




Furan is a cyclic dienic ether stabilized by benzene-like resonance. Because of its conjugated unsaturation and heterocyclic atom, furan will undergo many types of reactions. It is, therefore, of interest as a chemical intermediate for pharmaceuticals, insecticides and fine chemicals. The heterocyclic oxygen atom in a ring with conjugated unsaturation gives furan a combination of ether, aromatic and olefinic characteristics. This polyfunctionality permits it to undergo a variety of reactions. Compared to benzene, the furan ring has greater reactivity, and is more susceptible to cleavage, thus resembling the vinyl ethers. Like the vinyl ethers, the furan ring is cleaved by aqueous acids. This reaction is accompanied by resinification.

PHYSICAL PROPERTIES

| | |
|-------------------------------------|--------------------------|
| Physical State | Liquid |
| Color | Colorless |
| Odor | Characteristic ethereal |
| Specific Gravity at 20°/4°C. | 0.937 |
| Freezing Point | -85.61°C. (-122.10°F.) |
| Vapor Density | 0.170 lb./cu. ft. |
| Boiling Point (760 mm.) | 31.3°C. (88.45°F.) |
| Flash Point (Tag. closed cup) | -32°F. |
| Refractive Index n ₂₀ /D | 1.4214 |
| Molecular Weight | 68.07 |
| Flammability or Explosive Limits | 2.3-14.3 vol. % in air |
| Heat of Vaporization at 31.2°C. | 95.5 cal./gram |
| Heat of Combustion at constant vol. | 500.1 kg.-cal./gram-mole |
| Critical Temperature | 214°C. |
| Heat of Formation at 25°C. | -14.9 kcal./mole |
| Solubility in: | |
| | Water (wt. % at 25°C.) 1 |
| | Most organic solvents ∞ |

Table 10.44: 2-Methylfuran (2)

Sylvan



2-Methylfuran is a cyclic diene possessing ether-like properties. It is highly reactive with many inorganic and organic compounds yielding a variety of new derivatives which await exploration for the development of commercial applications.

(continued)

Table 10.44: (continued)

| | |
|-----------------------------------------|--------------------------|
| Appearance | Colorless, mobile liquid |
| Odor | Ether-like |
| Molecular weight | 82.098 |
| Boiling point at 760 mm | 62–64°C (144–147°F) |
| Freezing point | –88°C (–126.4°F) |
| Specific gravity, 20°C./4°C. | 0.915 |
| Index of refraction, N ₂₀ /D | 1.434 |
| Flash point | –30°C (–22°F) |
| Vapor pressure at 15°C. (59°F) | 110.5 mm |
| 20°C. (68°F) | 139 mm |
| 25°C. (77°F) | 174 mm |
| 30°C. (96°F) | 216 mm |
| Solubility in water at 25°C | Less than 0.3 gm/100 gm. |

Table 10.45: Tetrahydrofuran (11)(49)

Product Information

Tetrahydrofuran (THF, tetramethylene oxide, diethylene oxide, 1,4-epoxybutane, tetrahydrofurane, oxolane) is an industrial solvent widely recognized for its unique combination of useful properties. DuPont THF is better than 99.9% pure with a small (0.025–0.040 wt %) amount of butylated hydroxytoluene (BHT, 4-methyl-2,6-di-tert-butyl phenol) added as an antioxidant. Tetrahydrofuran is a cycloaliphatic ether and is not "photochemically reactive" as defined in Section k of Los Angeles County's Rule 66 (equivalent to Rule 442 of the Southern California Air Pollution Control District). THF has an ethereal odor.


Physical Properties of Tetrahydrofuran

| | | | |
|---------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------|--------------|
| Molecular Weight | 72.108 | Coefficient of Thermal Expansion, 10–20°C, av/°C | 0.00126 |
| Boiling Point (760 mmHg), °C (°F) | 66 (151) | 50–68°F, av/°F | 0.00070 |
| Freezing Point, °C (°F) | –108.5 (–163) | Flash Point (TCC), °C (°F) | –14.4 (6) |
| Vapor Pressure, 20°C (68°F), mm Hg (kPa) | 143 (19.1) | Autoignition Temperature, °C (°F) | 321 (610) |
| Density, Liquid, 20°C (68°F), g/mL (mg/m ³) lb/gal | 0.888 7.41 | Flammability Limits in Air, 25°C (77°F), lower upper | 2 11.8 |
| Vapor (air = 1) | 2.49 | Critical Temperature, °C (°F) | 268 (514) |
| Evaporation Rate (n-butyl acetate = 1) | 8.0 | Critical Pressure, atm (MPa) | 51.2 (5.19) |
| Viscosity, 20°C (68°F), cP (MPa·s) | 0.48 | Dielectric Constant, ε, 20°C (68°F) 30°C (86°F) | 7.54 7.25 |
| Surface Tension in Air, 25°C (77°F), dyn/cm (mN/m) | 26.4 | Conductivity, 25°C (77°F), μ mhos/cm μ S/m | 0.015 1.5 |
| Refractive Index, n _D ²⁰ | 1.4073 | Dipole Moment, μ, 25–50°C (77–122°F), Debye Units | 1.6 |
| Heat of Vaporization (at bp), cal/g Btu/lb kJ/kg | 95 171 398 | Solubility Parameter, δ | 9.1 |
| Heat of Combustion (–Δh _o ^o) at 25°C (77°F) liq | kcal/mol Btu/lb kJ/g | Hydrogen-Bonding Index, γ | 5.3 |
| | 598.4 14938 34.72 | Miscibility: water, esters, ketones, alcohols, diethyl ether; aliphatic, aromatic and chlorinated hydrocarbons | Infinite |
| Specific Heat, Liquid, 20°C (68°F), cal/g·C (Btu/lb·F) kJ/kg·K | 0.469 1.97 | | |
| 50°C (122°F), cal/g·C (Btu/lb·F) kJ/kg·K | 0.496 2.090 | | |
| Vapor, 66°C (151°F), cal/g·C (Btu/lb·F) kJ/kg·K | 0.37 1.55 | | |


(continued)

Table 10.45: (continued)

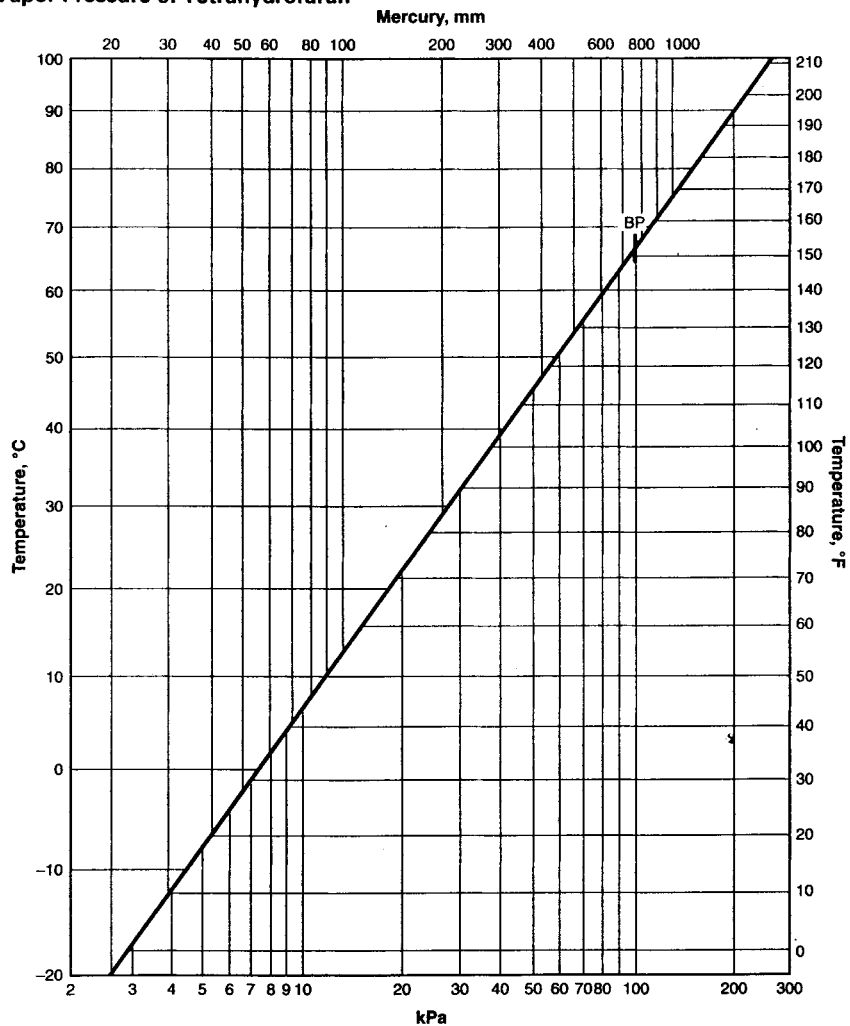Vapor Pressure of Tetrahydrofuran




Density of Tetrahydrofuran

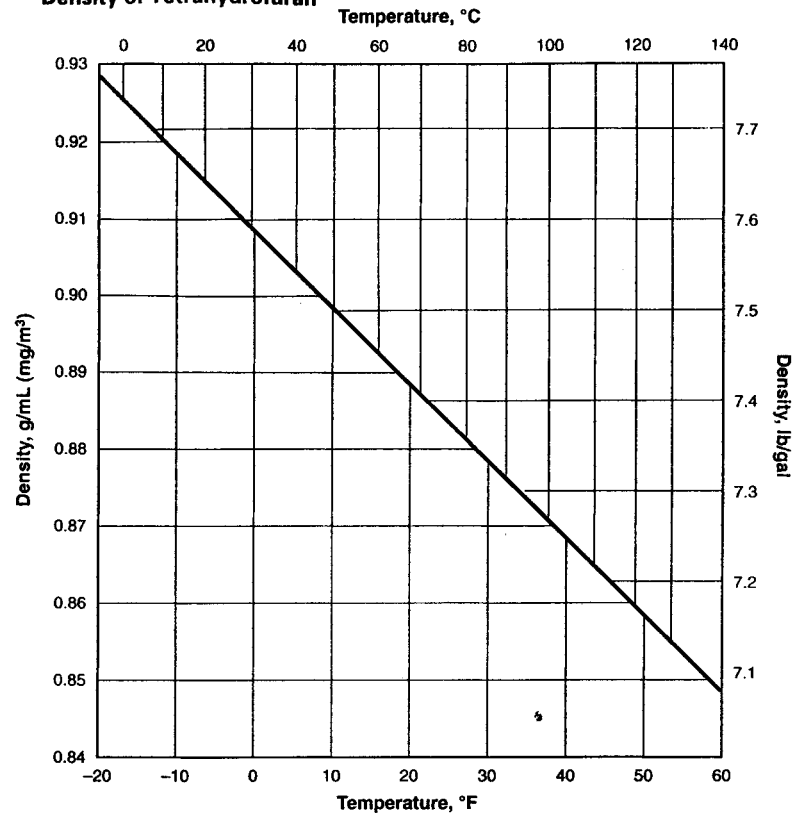

(continued)

Table 10.45: (continued)

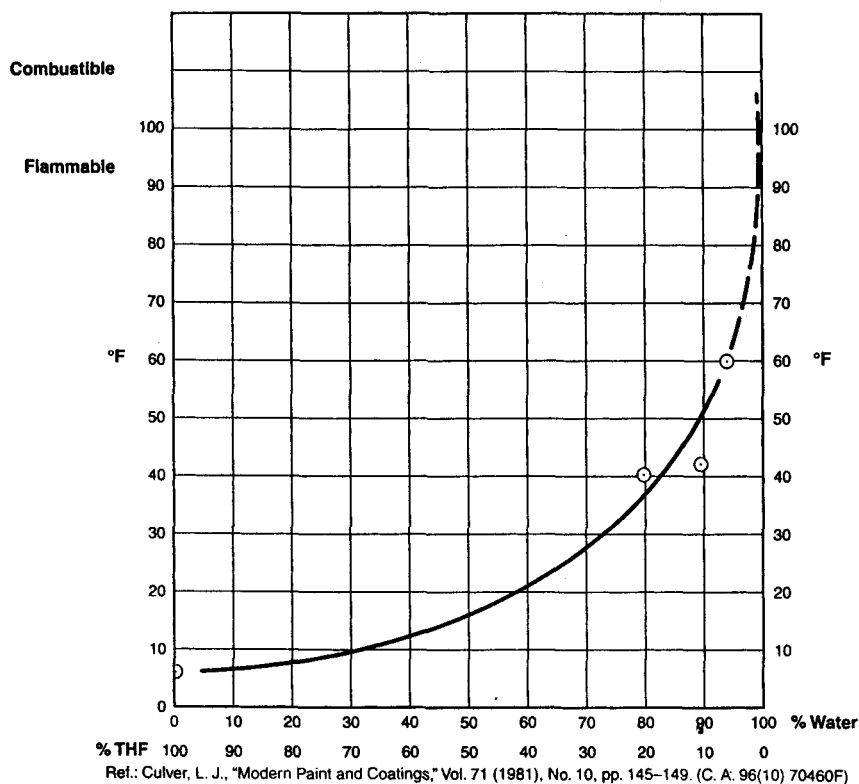Flash Points of Tetrahydrofuran-Water Solutions (by Setafash Closed Tester)



Tetrahydrofuran-Soluble Plastics, Resins, and Elastomers

Acrylic Resins

Methyl methacrylate polymers
Ethyl, butyl, and other methacrylate polymers
Acrylic polymers and copolymers

Alkyd and Amino Resins

Alkyd resins
Urea formaldehyde resins (uncured)
Phenol formaldehyde resins (uncured)

Cellulosics

Cellulose acetate
Cellulose acetate butyrate
Cellulose acetate stearate
Ethyl cellulose
Nitrocellulose

Miscellaneous Resins

Acrylonitrile-butadiene-styrene copolymers
Styrene-acrylonitrile copolymers
Chlorinated polyethylene
Polycarbonates
Polysulfones
Epoxy (uncured)
Silicones (uncured)
Polyesters (low molecular weight)
Polyamides (low molecular weight)
Polystyrene
Styrene-butadiene copolymers (some)

Elastomers

Butadiene-acrylonitrile copolymers (some)
Chlorinated rubbers
Chlorosulfonated polyethylenes
Polysulfides
Polyurethanes (uncured)
Rubber (natural, unvulcanized)
Chloroprene elastomers

Vinyl Resins

Polyvinyl acetate
Polyvinyl butyrate
Polyvinyl butyrals
Polyvinyl chloride
Vinyl chloride copolymers
Vinylidene chloride copolymers
Vinyl acetate/ethylene (some)


Natural Resins

Congo ester
Coumarone-indene
Raw dammar
Ester gum
Manila copal
Pentaerythritol ester gum
Rosin
Shellac (many)


(continued)

Table 10.45: (continued)

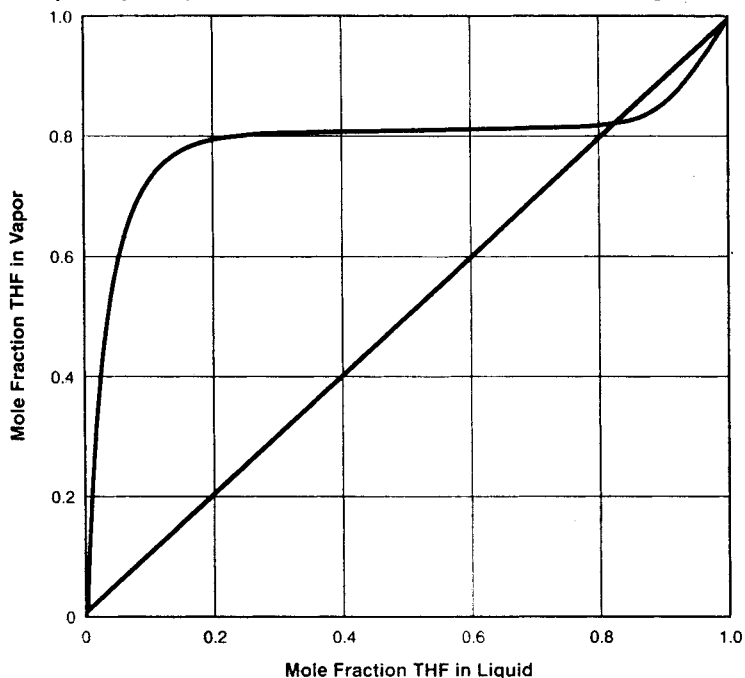Vapor-Liquid Equilibria of Tetrahydrofuran + Water (760 mmHg)



Chemical Structure (49)



Tetrahydrofuran (mol. wt. = 72.1)

C.A. No. 109999*

Other common names are:
 Diethylene Oxide
 1,4-Epoxybutane
 Oxacyclopentane
 Oxolane

The GAF product assays better than 99.8% and is stabilized with 0.025% of the antioxidant BHT (4-methyl-2,6-di-*tert.*-butyl phenol).

*SOCMA "Handbook Commercial Organic Chemical Names" Chemical Abstracts Registry Number (ACS publ.)

Typical Properties (49)

| | |
|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| Physical Form | liquid |
| Color (APHA) | 20 max |
| THF Assay (%) | 99.8 min |
| Total Impurities (wt%) | 0.135 max |
| Water Content (wt%) | 0.03 max |
| Peroxides (as THF-hydroperoxide, wt%) | 0.015 max |
| Stabilizer (wt%) | 0.025-0.04 |
| Other Impurities | 0.05 max |
| Boiling Point | 66°C _{min} (151°F) |
| Freezing Point | -108.5°C (-163°F) |
| Liquid Density (20°C) | 0.888 g/cc (7.41 lb/gal) |
| Vapor Density (air = 1) | 2.56 calc. |
| Specific Gravity (20/4°C) | 0.886-0.889 |
| Viscosity (20°C) | 0.53 cps |
| Surface Tension (25°C) | 26.4 dynes/cm |
| Refractive Index (n _D ²⁰) | 1.4073 |
| Coefficient of Cubical Expansion (10-20°C) | 0.00129 Av/°C (0.00070 Av/°F) |
| Flash Point (Tag closed cup) | -14.4°C (6°F) |
| Flammability Limits (%/vol in air, 25°C) | 2 (lower); 11.8 (upper) |
| Ignition Temperature | 321°C (610°F) |
| Specific Heat (cal/g/°C) for Liquid | 0.469 calc. at 20°C; 0.496 calc. at 50°C |
| Specific Heat (cal/g/°C) for Vapor | 0.37 calc. at 66°C |
| Latent Heat of Vaporization (cal/g, 66°C) | 98.1 calc. |
| Critical Temperature | 268°C (514°F) |
| Critical Pressure | 51.2 atm |
| Heat of Combustion (kg-cal/mole) | 597 calc. |
| Heat of Formation (kg-cal/mole) | 52.7 calc. |
| Dipole Moment (25-50°C) | 1.7 Debye |
| Dielectric Constant (20°C) | 7.58 |
| Conductivity (mhos/cm, 25°C) | 1.5 x 10 ⁻⁸ |
| Evaporation Rate (n-butyl acetate = 1) | 8.0 |
| Solubility Parameter | 9.1 calc. |
| Hydrogen-Bonding Index | 5.3 |
| Miscibility with water, alcohols, diethyl ether, esters, ketones, aliphatic, aromatic, and chlorinated hydrocarbons | infinite |

* These data are typical of current production but are not necessarily specifications.

(continued)

Table 10.45: (continued)

High Solvent Capacity for Resins

Many THF applications are based on its solvent capacity for resins, including high-molecular-weight vinyls. For example THF is the solvent-of-choice for:

- PVC pipe welding and bonding of other molded items
- Vinyl topcoating formulations, e.g. for automobile roofs and upholstery
- Magnetic tape binder systems
- Thermoplastic polyurethane coatings
- Printing inks for plastics
- Polyurethane adhesives for shoes
- Polyester laminating adhesives
- Polymer reactor cleaning

PVC, CPVC, polyvinylidene, and vinyl chloride copolymers dissolve readily in THF at room temperature. Solutions with high solids content and workable viscosities can be prepared. Many other resins, elastomers, and uncured polyurethanes and epoxies are soluble. The list includes:

Extraction Solvent

THF is an excellent extraction solvent for many natural products, including alkaloids, fats, waxes, rubbers, and resins. The following natural resins are soluble in THF:

congo ester
 coumarone-indene
 ester gum
 dammar
 manila copal
 pentaerythritol ester gum
 rosin
 shellac

A 66° boiling point allows refluxing in normal water-cooled systems without loss of THF; it also simplifies separation and recovery of the desired product.

Mixtures of THF and water are especially effective solvents for alkaloids, such as caffeine.

Typical Range of Resin Solubilities in THF vs MEK

| Resin Type | Wt% Resin for 2500 cps, 25° C | |
|--------------------------------------------------|---------------------------------------------------|-------|
| | THF | MEK |
| Polyvinyl Chloride ¹ | 13-20 | <3-5 |
| Chlorinated Polyvinyl Chloride ² | 16 | <5 |
| Poly (Vinyl Chloride/Vinyl Acetate) ³ | 27-40 | 17-22 |
| Polyurethane ⁴ | 17 | <3 |
| Polyvinylidene Chloride ⁵ | 44 | <3 |
| "Exon" 654 (Firestone) | Hi-Temp "Geon" (Goodrich) | |
| "Geon" 121, 101, 103EP (Goodrich) | "Vinylite" VYNS, VMCH, VYHH, VAGH (Union Carbide) | |
| PVC-71 Dispersion (Diamond Shamrock) | | |
| PVC Pearls 2200, 2250 (Escambia) | | |
| "Marvino" 10 (Uniroyal) | | |
| "Vinylite" QYNV (Union Carbide) | "Estane" 5701 F-1 (Goodrich) | |
| "Vygen" 110, 120 (General Tire) | "Saran" F-242 (Dow) | |

Table 10.45: (continued)**Rapid Evaporation and Diffusion Rates**

When used in topcoating, printing, or other continuous operations, THF has a distinct advantage over many other solvents due to its rapid evaporation and diffusion through plastic films. This can substantially reduce costs by permitting increased machine speeds.

| Solvent | Comparative Evaporation Rate |
|----------------|-------------------------------------|
| THF | 800 |
| DMF | 30 |
| 1,4-Dioxane | 310 |
| Ethyl Ether | 3300 |
| MEK | 570 |
| Toluene | 240 |
| Butyl Acetate | 100 |

The rate of diffusion of THF through PVC or polyvinylidene films is about twice that of MEK.

Typical Resin-Solvent Applications**Advantages of THF**


| | |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Welding PVC pipe and bonding molded plastic articles. | Gives rapid, uniform bite into substrate. Can be used uncompounded as primer coat for cement. Has short set time or can be used with cosolvent to control set time. Compatible with inorganic fillers. Contributes excellent bond strength. Can be used with highest molecular weight resins for toughness. Low viscosity solutions simplify application by machine or hand. Stabilizes adhesive solutions and minimizes gelling. Redisperses accidentally gelled formulation. Rapid evaporation increases production rates. |
| Topcoating formulations for vinyl fabric and sheeting | Exceptional capacity for high-molecular-weight resins. Coatings are dielectric heat sealable, resistant to plasticizer migration, have good strength and durability. Can be used in solvent mixtures to stabilize the cosolvent and reduce viscosity. |
| Magnetic tape manufacture | Promotes uniform coating thickness when used in the binder system or in prime coats on polyester or cellulose acetate. Rapid drying. Increases production rates. |
| Pigmented polyurethane coatings | No effect on colors. In solutions with coalescents, produces good films for transfer coating fabric laminates employing urethane-based adhesive tie coats. |
| Shrink and blister packaging | Produces films with strength, clarity and uniformity; more impermeable to moisture and air than many calendared or organosol-cast films. Requires minimum amount of solvent which is easily recovered for low cost. Rapid evaporation and diffusion reduce solvent retention and bubble formation. |

(continued)

Table 10.45: (continued)

| Typical Resin-Solvent Applications | Advantages of THF |
|---------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cellophane coating | Minimizes gelling of coating formulation. Gives high coating speeds. Improves clarity and functional properties of cast film. |
| Printing inks | Permits use of high-molecular-weight resins for ink toughness. Can be used in flexographic and gravure inks and for printing PVC wire insulation and vinyl sheeting or fabrics. Quick bite and rapid evaporation reduces smears. |
| Cleaning polymer reactors, engines, machinery; paint removers | Water flushable. Removes vinyl, polyurethane, ABS, polystyrene, and other resin deposits. Residues usually dissolve with mild agitation. Easily recovered. Can be used to improve formulations for paint removers based on nonflammable solvents. Has synergistic effect in cold cleaners. |

Table 10.46: 2,3-Dihydropyran (2)




Physical Properties

| | |
|-------------------------------------------------------|-------------------------------------------|
| | Colorless liquid with characteristic odor |
| Molecular weight | 84.11 |
| Boiling point | 85–86°C |
| Sp. g. $\frac{20^{\circ}\text{C}}{4^{\circ}\text{C}}$ | 0.923 |

Table 10.47: Tetrahydropyran (2)


Pentamethylene Oxide



Tetrahydropyran reacts with chlorine to form mono-, di-, tri- and tetrachlorotetrahydropyrans. Reaction with acid chlorides yields omega-haloamyl esters. Conversion to dihalides such as 1,5-dibromopentane and 1,5-dichloropentane can be effected. Ammonia and aliphatic and aromatic amines yield piperidine and substituted piperidines. It is used as a solvent for resins, plastics and rubbers. Lacquers can be made by dissolving certain organic film-forming substances in tetrahydropyran. Solutions of high solids content at a working viscosity can be obtained. A solution of nitrocellulose in tetrahydropyran gives clear, nonblushing films. Tetrahydropyran is miscible with water, drying oils and most common organic solvents. The ether-like structure and ability of tetrahydropyran to dissolve a wide range of nonresinous materials suggest its use as a reaction medium for chemical processes such as Grignard reactions.

| | |
|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Appearance | Colorless, mobile, liquid |
| Odor | Ether-like |
| Molecular weight | 88.13 |
| Boiling point | 88°C at 760 mm |
| Specific gravity, 20°C/4°C | 0.8814 |
| Index of refraction, N ₂₀ /D | 1.420 |
| Flash point | -4°F |
| Solubility—Miscible with water; less soluble in hot than cold water. Miscible with alcohol, ether, and most common organic solvents. | |

Table 10.48: Tetrahydropyran-2-Methanol (19)



| |
|----------------------------|
| PHYSICAL PROPERTIES |
|----------------------------|

Determined on specially purified sample


| | |
|---------------------------------------------------|----------------------|
| Molecular Weight | 116.16 |
| Apparent Specific Gravity at 20/20°C. | 1.0272 |
| Δ Sp.Gr./ Δ t., 10 to 40°C. | 0.00083 per °C. |
| True Density at 20°C. | 1.0254 g. per ml. |
| Boiling Point | |
| at 760 mm. Hg | 186.8°C. |
| at 300 mm. Hg | 154°C. |
| at 10 mm. Hg | 72°C. |
| Vapor Pressure at 20°C. | < 0.1 mm. Hg |
| Δ b.p./ Δ p., 750 to 770 mm. Hg | 0.051°C. per mm. Hg. |
| Absolute Viscosity | |
| at 0°C. | 29.3 cps. |
| at 20°C. | 11.0 cps. |
| at 40°C. | 5.4 cps. |
| Surface Tension at 25°C. | 34.1 dynes per cm. |
| Freezing Point | -70°C. (a) |
| Heat of Vaporization at 1 atm. | |
| at 300 mm. Hg | 164 Btu per lb. |
| at 300 mm. Hg | 173 Btu per lb. |
| Refractive Index, n_D 20°C. | 1.4581 |
| Δ n_D / Δ t., 20 to 40°C. | 0.00043 per °C. |
| Solubility | |
| In Water at 20°C. | Complete |
| Water In at 20°C. | Complete |
| Solubility in Organic Solvents at 25°C. | |
| acetone, benzene, ethyl ether, heptane, | |
| methanol, carbon tetrachloride | Complete |
| Flash Point, Cleveland open cup (ASTM Method D92) | 200°F. (b) |

(a) Sets to a glass below this temperature

(b) Commercial material

Table 10.49: Terpinyl Methyl Ether (2)

Terposol No. 3



This terpine ether known as terpinyl methyl ether is a light, colored liquid with a pleasant odor, which contains some impurities. It is a strong solvent for resins and is used in alkyd enamels to the extent of 2 per cent to which it imparts flow.

(continued)

Table 10.49: (continued)

| | |
|--------------------------------------------------|-----------------------------|
| Aniline point | Below -20°C |
| Color (Lovibond 500 Amber Series Glasses) | 1.0 |
| Distillation range (ASTM) | |
| 5% | 215.0 $^{\circ}\text{C}$ |
| 50% | 216.5 $^{\circ}\text{C}$ |
| 90% | 217.5 $^{\circ}\text{C}$ |
| 95% | 218.0 $^{\circ}\text{C}$ |
| Flash point (Cleveland open cup) | 178 $^{\circ}\text{F}$ |
| Freezing point | Below -10°C |
| Kauri-Butanol solvency value | Approx. 500 |
| Moisture | 0.10% |
| Refractive index at 20 $^{\circ}\text{C}$ | 1.4712 |
| Specific gravity at 15.5/15.5 $^{\circ}\text{C}$ | 0.9192 |
| Viscosity at 25 $^{\circ}\text{C}$ (Ubbelohde) | 31.8 cp |

Glycol Ethers

Table 11.1: ARCOSOLV Ethylene and Propylene Glycol Ethers (70)

Physical Properties

| | ARCO TRADENAME | CHEMICAL NAME | CHEMICAL STRUCTURE | CAS# | MOL. WT. | BOILING PT. °C 760mm | SPECIFIC GRAVITY 20/20 | LBS./GAL 20°C | RETA FLASH°F | EVAPORATION RATE (n-BuAc=100) |
|----------------------|-----------------------------------|--------------------------------------|--------------------------------------|-------------|-------------|----------------------------|------------------------------|-----------------------|----------------------|-------------------------------------|
| ARCOSOLV P-Series | PM | Propylene Glycol Methyl Ether | <chem>CH3OCH2CHOHCH3</chem> | 107-98-2 | 90.1 | 120 | 0.923 | 7.65 | 89 TCC ² | 66 |
| | PE | Propylene Glycol Ethyl Ether | <chem>CH3CH2OCH2CHOHCH3</chem> | 52125-53-8 | 104.1 | 133 | 0.902 | 7.50 | 95 | 47 |
| | PNP | Propylene Glycol n-Propyl Ether | <chem>CH3(CH2)2OCH2CHOHCH3</chem> | 1569-01-3 | 118.2 | 150 | 0.887 | 7.38 | 119 TCC ² | 21 |
| | PTB | Propylene Glycol t-Butyl Ether | <chem>(CH3)3COCH2CHOHCH3</chem> | 57018-52-7 | 132.2 | 153 | 0.870 | 7.25 | 113 | 25 |
| | PNB | Propylene Glycol n-Butyl Ether | <chem>CH3(CH2)3OCH2CHOHCH3</chem> | 5131-66-8 | 132.2 | 170 | 0.880 | 7.30 | 136 | 7 |
| | DPM | Dipropylene Glycol Methyl Ether | <chem>CH3(OCH2CHCH3)2OH</chem> | 34590-94-8 | 148.2 | 188 | 0.951 | 7.90 | 167 | 2 |
| | DPNP | Dipropylene Glycol n-Propyl Ether | <chem>CH3(CH2)2(OCH2CHCH3)2OH</chem> | 29911-27-1 | 176.3 | 212 | 0.922 | 7.70 | 190 CC ³ | 1.3 |
| | DPTB | Dipropylene Glycol t-Butyl Ether | <chem>(CH3)3C(OCH2CHCH3)2OH</chem> | 132739-31-2 | 190.3 | 212 | 0.907 | 7.54 | 188 | 1.5 |
| | DPNB | Dipropylene Glycol n-Butyl Ether | <chem>CH3(CH2)3(OCH2CHCH3)2OH</chem> | 29911-28-2 | 190.3 | 229 | 0.912 | 7.58 | 214 | 0.4 |
| | TPM | Tripropylene Glycol Methyl Ether | <chem>CH3(OCH2CHCH3)3OH</chem> | 25498-49-1 | 206.3 | 242 | 0.962 | 8.03 | 232 | 0.2 |
| TPNB | Tripropylene Glycol n-Butyl Ether | <chem>CH3(CH2)3(OCH2CHCH3)3OH</chem> | 55934-93-5 | 248.4 | 276 | 0.934 | 7.80 | 255 PMCC ⁴ | <.1 | |
| E-Series | EM | Ethylene Glycol Methyl Ether | <chem>CH3OC2H4OH</chem> | 109-86-4 | 76.10 | 124 | 0.966 | 8.04 | 105 TCC ² | 53 |
| | EE | Ethylene Glycol Ethyl Ether | <chem>C2H5OC2H4OH</chem> | 110-80-5 | 90.12 | 134 | 0.931 | 7.75 | 110 TCC ² | 35 |
| | EP | Ethylene Glycol Propyl Ether | <chem>C3H7OC2H4OH</chem> | 2807-30-9 | 104.15 | 149 | 0.913 | 7.59 | 120 TCC ² | 22 |
| | EB | Ethylene Glycol Butyl Ether | <chem>CH3(CH2)3OC2H4OH</chem> | 111-76-2 | 118.17 | 169 | 0.902 | 7.51 | 143 TCC ² | 6 |
| | EH | Ethylene Glycol Hexyl Ether | <chem>C6H13OC2H4OH</chem> | 112-25-4 | 146.23 | 208 | 0.889 | 7.40 | 179 TCC ² | 1 |
| | EEH | Ethylene Glycol Ethyl Hexyl Ether | <chem>C4H9CH(C2H5)CH2OC2H4OH</chem> | 1559-35-9 | 174.29 | 224 | 0.892 | 7.42 | 208 | 0.3 |
| | DM | Diethylene Glycol Methyl Ether | <chem>CH3(OC2H4)2OH</chem> | 111-77-3 | 120.15 | 191 | 1.023 | 8.51 | 191 TCC ² | 2 |
| | DE | Diethylene Glycol Ethyl Ether | <chem>C2H5(OC2H4)2OH</chem> | 111-90-0 | 134.17 | 198 | 0.990 | 8.25 | 195 TCC ² | 2 |
| | DP | Diethylene Glycol Propyl Ether | <chem>C3H7(OC2H4)2OH</chem> | 6881-94-3 | 148.20 | 202 | 0.963 | 8.04 | 200 TCC ² | 1 |
| | DB | Diethylene Glycol Butyl Ether | <chem>C4H9(OC2H4)2OH</chem> | 112-34-5 | 162.23 | 230 | 0.955 | 7.94 | 232 COC ⁵ | 0.3 |

1 Developmental Product
 2 Tag Closed Cup
 3 Closed Cup
 4 Pensky-Martens Closed Cup
 5 Cleveland Open Cup

(continued)

Table 11.1: (continued)

| | HANSEN SOLUBILITY PARAMETERS | | | | | | | | | | | HEAT OF VAPORIZ. CAL/°C | SPECIFIC HEAT Cal/g°C 25°C | HLB DAVIES |
|----------|------------------------------|---------------------------------|-----------------|----------------------------|------------------------|-----------------|--------------|--------------|--------------|------------------|-------|-------------------------|----------------------------|------------|
| | ARCO TRADENAME | % SOL. IN H ₂ O 20°C | REF. INDEX 25°C | SURF. TENSION DYNE/CM 25°C | VAPOR PRESS mm/Hg 20°C | Visc. cps. 25°C | CGS HANSEN D | CGS HANSEN F | CGS HANSEN H | CGS TOTAL HANSEN | | | | |
| P-Series | PM | 100 | 1.402 | 27.0 | 8.1 | 1.7 | 7.5 | 3.2 | 7.5 | 11.1 | 107 | 0.58 | 8.3 | |
| | PE | 100 | 1.405 | 29.7 | 4.4 | 1.8 | 7.4 | 2.7 | 6.9 | 10.5 | 98.5 | 0.55 | 7.8 | |
| | PNP | 100 | 1.410 | 27.0 | 1.8 | 2.3 | 7.6 | 2.4 | 6.5 | 10.3 | 93 | 0.55 | 7.4 | |
| | PTB | 17 | 1.410 | 24.4 | 1.9 | 3.4 | 7.3 | 2.1 | 6.0 | 9.7 | 81.0 | 0.55 | 6.9 | |
| | PNB | 6 | 1.416 | 26.3 | 0.62 | 3.1 | 7.5 | 2.1 | 6.0 | 9.8 | 78.5 | 0.63 | 6.9 | |
| | DPM | 100 | 1.420 | 29.0 | 0.17 | 3.4 | 7.4 | 3.0 | 6.3 | 10.2 | 73.4 | 0.53 | 8.2 | |
| | DPNP | 18 | 1.422 | 25.8 | 0.05 | 4.4 | 7.4 | 2.4 | 5.7 | 9.6 | 74.9 | 0.51 | 7.2 | |
| | DPTB | 12 | 1.421 | 26.0 | 0.04 | 4.9 | 7.3 | 2.2 | 5.4 | 9.3 | 67.7 | 0.59 | 6.8 | |
| | DPNB | 5 | 1.425 | 28.8 | 0.02 | 4.4 | 7.4 | 2.2 | 5.5 | 9.5 | 61.1 | 0.49 | 6.8 | |
| | TPM | 100 | 1.428 | 29.0 | 0.03 | 5.6 | 7.4 | 3.0 | 5.7 | 9.8 | 74.0 | 0.51 | 8.1 | |
| TPNB | 3 | 1.433 | 29.9 | <0.01 | 8.0 | 7.4 | 2.4 | 5.1 | 9.3 | 59.7 | 0.48 | 6.6 | | |
| E-Series | EM | 100 | 1.4021 | 30.8 | 6.2 | 1.5 | 7.9 | 4.5 | 8.0 | 12.1 | 123.9 | 0.53 | 8.8 | |
| | EE | 100 | 1.4076 | 29.3 | 3.8 | 2.1 | 7.9 | 4.5 | 7.0 | 11.5 | 107.5 | 0.56 | 8.3 | |
| | EP | 100 | 1.4136 | 27.9 | 1.3 | 2.4 | 7.9 | 4.2 | 6.6 | 11.1 | | | 7.8 | |
| | EB | 100 | 1.4193 | 26.6 | 0.6 | 6.4 | 7.8 | 2.5 | 6.0 | 10.2 | 88.4 | 0.56 | 7.4 | |
| | EH | 1 | 1.4290 | 30.3 | <1.0 | 5.2 | 9.0 | 2.4 | 7.2 | 11.7 | | | 6.4 | |
| | EEH | 0.2 | 1.4361 | 27.6 | 0.08 | 7.0 | 7.8 | 2.0 | 2.5 | 8.4 | | | 5.4 | |
| | DM | 100 | 1.4268 | 34.8 | 0.2 | 3.9 | 7.9 | 3.8 | 6.2 | 10.7 | 92.7 | 0.54 | 9.2 | |
| | DE | 100 | 1.4260 | 32.2 | 0.12 | 4.5 | 7.9 | 3.8 | 6.2 | 10.7 | 84.5 | 0.55 | 8.6 | |
| | DP | 100 | 1.4290 | 32.3 | 0.03 | 4.1 | 7.8 | 3.5 | 5.5 | 10.2 | | | 8.2 | |
| | DB | 100 | 1.4316 | 30.0 | 0.02 | 4.7 | 7.8 | 3.4 | 5.2 | 10.0 | 74.3 | 0.54 | 7.7 | |

- 1 Developmental Product
- 2 Tag Closed Cup
- 3 Closed Cup
- 4 Pensky-Martens Closed Cup
- 5 Cleveland Open Cup

Regulatory Information

| HMIS CODES | | | | NFPA CODES | | | 1990 CAAA HAP ¹ | SARA TITLE III SEC. 313 ² |
|------------|--------|--------|------------|------------|--------|--------|----------------------------|--------------------------------------|
| HEALTH | FLAMM. | REACT. | PIRB PROT. | HEALTH | FLAMM. | REACT. | | |
| 1 | 3 | 0 | B | 0 | 3 | 0 | no | no |
| 2 | 3 | 0 | X | 1 | 3 | 0 | no | no |
| 2 | 2 | 0 | X | 1 | 2 | 0 | no | no |
| 2 | 2 | 0 | B | 1 | 2 | 0 | no | no |
| 2 | 2 | 0 | X | 1 | 2 | 0 | no | no |
| 1 | 2 | 0 | B | 0 | 2 | 0 | no | no |
| 1 | 2 | 0 | X | 0 | 2 | 0 | no | no |
| 1 | 2 | 0 | X | 0 | 2 | 0 | no | no |
| 1 | 1 | 0 | X | 0 | 1 | 0 | no | no |
| 1 | 1 | 0 | B | 0 | 1 | 0 | no | no |
| 1 | 1 | 0 | X | 0 | 1 | 0 | no | no |
| | | | | 2 | 2 | 0 | yes | yes |
| | | | | 2 | 2 | 0 | yes | yes |
| | | | | | | | yes | yes |
| | | | | | | | yes | yes |
| | | | | | | | yes | no |
| | | | | 2 | 2 | 0 | yes | yes |
| | | | | 1 | 1 | 0 | yes | yes |
| | | | | | | | yes | yes |
| | | | | 1 | 1 | 0 | yes | yes |

Table 11.2: Ashland Glycol Ethers (69)

| PRODUCT | LB./GAL. | SP. GR. | BOILING RANGE | | FL. PT. | EVAP. |
|------------------|--------------------|---------------------|---------------|---------|-------------------|-------------------|
| | 20° C | 20°/20° C | °C | °F | °F TCC | RATE ¹ |
| Glycol Ether PM | 7.65 | 0.918 | 117-125 | 243-257 | 91 | 0.66 |
| Glycol Ether EP | 7.59 | 0.910 | 149-153 | 301-308 | 120 | 0.22 |
| Glycol Ether PP | 7.36 | 0.882 | 150- | 302- | 119 | 0.21 |
| Glycol Ether PTB | 7.30 | 0.870 | 151- | 304- | 113 | — |
| Glycol Ether EB | 7.51 | 0.903 | 169-173 | 336-343 | 150 | 0.06 |
| Glycol Ether PB | 7.32 | 0.880 | 170- | 338- | 138 | 0.08 |
| Glycol Ether DPM | 7.92 | 0.851 | 180-193 | 356-379 | 172 | 0.03 |
| Glycol Ether DM | 8.51 | 1.023 | 192-196 | 378-385 | 192 | 0.02 |
| Glycol Ether DE | 8.25 | 0.991 | 198-205 | 388-401 | 196 | < 0.01 |
| Glycol Ether DP | 8.04 | 0.969 | 202-216 | 396-421 | 200 | < 0.01 |
| Glycol Ether DPP | 7.67 | 0.922 | 212- | 414- | 190 | < 0.01 |
| Glycol Ether DB | 7.94 | 0.954 | 227-235 | 441-455 | 220 | < 0.01 |
| Glycol Ether DPB | 7.63 | 0.915 | 229- | 444- | 212 ¹² | < 0.01 |
| Glycol Ether TPM | 8.06 | 0.966 | 236-251 | 457-484 | 240 | 0.01 |
| Glycol Ether TPB | 7.78 ¹¹ | 0.935 ¹¹ | 276- | 529- | 277 ¹² | < 0.01 |

¹n-Butyl Acetate = 1 ¹¹25°C ¹²Setaflash

Table 11.3: Chemcentral Glycol Ethers (67)

| GLYCOL ETHERS | | CAS | Mole Weight | % Purity Comm. Prod. | Spec. Grav. @ 25/25°C | Lbs./Gal. @ 25°C | Coeff. of Expan. Per °C | ΔSp. Gr. Per °C | Refractive Index @ 25°C | Initial Boiling Point @ 760 mm Hg | | Vapor Press. @ 25°C mm Hg | Evap. Rate vs. B. Acet. = 1 |
|----------------------------------|-------|------------|-------------|----------------------|-----------------------|------------------|-------------------------|-----------------|-------------------------|-----------------------------------|-------|---------------------------|-----------------------------|
| | | | | | | | | | | °C | °F | | |
| ETHYLENE GLYCOL METHYL ETHER | EM | 109 86 4 | 76.1 | | 0.963 | 8.01 | 00100 | 00078 | 1.400 | 124.6 | 255.6 | 9.7 | 0.5 |
| ETHYLENE GLYCOL ETHYL ETHER | EE | 110 80 5 | 90.1 | 99 | 0.928 | 7.73 | 00099 | 00070 | 1.406 | 135.5 | 275.9 | 5.3 | 0.2 |
| ETHYLENE GLYCOL n-BUTYL ETHER | EB | 111 76 2 | 118.2 | 99 | 0.900 | 7.49 | 00097 | 00066 | 1.417 | 171.1 | 340.0 | 0.88 | 0.1 |
| DIETHYLENE GLYCOL METHYL ETHER | DM | 111 77 3 | 120.1 | | 1.018 | 8.47 | 00091 | 00068 | 1.424 | 194.1 | 351.4 | 0.18 | < 0.01 |
| DIETHYLENE GLYCOL ETHYL ETHER | DE | 111-90-0 | 134.2 | | 0.988 | 8.22 | 00088 | 00064 | 1.425 | 202.0 | 395.8 | 0.13 | < 0.01 |
| DIETHYLENE GLYCOL ETHYL ETHER | DE SG | | Mixt. | | 1.026 | 8.55 | | | 1.427 | 185.0 | 365.0 | 0.10 | < 0.01 |
| DIETHYLENE GLYCOL n-BUTYL ETHER | DB | 112 34 5 | 162.2 | 96 | 0.952 | 7.92 | 00086 | 00060 | 1.430 | 230.0 | 446.0 | 0.023 | < 0.01 |
| PROPYLENE GLYCOL METHYL ETHER | PM | 107 98 2 | 90.1 | | 0.919 | 7.65 | 00107 | 00076 | 1.402 | 120.1 | 248.2 | 10.9 | 0.66 |
| DIPROPYLENE GLYCOL METHYL ETHER | DPM | 3459-94-8 | 148.2 | | 0.951 | 7.91 | 00100 | 00072 | 1.419 | 188.3 | 370.9 | 0.36 | 0.02 |
| TRIPROPYLENE GLYCOL METHYL ETHER | TPM | 25498-48-1 | 208.3 | | 0.965 | 8.03 | 00090 | 00084 | 1.428 | 242.4 | 488.3 | 0.022 | < 0.01 |

*TCC

| GLYCOL ETHERS | | Solubility % by Wt. @ 20°C | | Dilution Ratio | | Blush Res. % Rel. Humid. @ 82°F | Visc. 8% RS % Sec. NC @ 25°C cps | Pour Point °F | Flash Point Open Cup °F | Solubility Parameter |
|----------------------------------|-------|----------------------------|---------------------|----------------|------------|---------------------------------|----------------------------------|---------------|-------------------------|----------------------|
| | | In H ₂ O | Of H ₂ O | Toluol | Lactol | | | | | |
| | | | | | | | | | | |
| ETHYLENE GLYCOL METHYL ETHER | EM | ∞ | ∞ | 5.3 | immiscible | 40 | 61.06 | -124 | 120 | 10.8 |
| ETHYLENE GLYCOL ETHYL ETHER | EE | ∞ | ∞ | 6.6 | 1.1 | 61 | 56.09 | -148 | 110 ^a | 9.9 |
| ETHYLENE GLYCOL n-BUTYL ETHER | EB | ∞ | ∞ | 5.2 | 2.2 | 90 | 105.96 | -103 | 165 | 8.9 |
| DIETHYLENE GLYCOL METHYL ETHER | DM | ∞ | ∞ | 4.6 | immiscible | 56 | 123.77 | -121 | 200 | 9.6 |
| DIETHYLENE GLYCOL ETHYL ETHER | DE | ∞ | ∞ | 6.4 | 0.6 | 75 | 144.40 | -130 | 205 | 9.6 |
| DIETHYLENE GLYCOL ETHYL ETHER | DE SG | ∞ | ∞ | 2.7 | immiscible | 76 | 167.17 | | 215 | 9.6 |
| DIETHYLENE GLYCOL n-BUTYL ETHER | DB | ∞ | ∞ | 6.5 | 1.9 | 95 | 242.35 | -105 | 230 | 8.9 |
| PROPYLENE GLYCOL METHYL ETHER | PM | ∞ | ∞ | 5.2 | 0.9 | 56 | 67.86 | -142 | 94 ^a | 9.5 |
| DIPROPYLENE GLYCOL METHYL ETHER | DPM | ∞ | ∞ | 4.2 | 0.8 | 85 | 168.38 | -117 | 185 | 8.7 |
| TRIPROPYLENE GLYCOL METHYL ETHER | TPM | ∞ | ∞ | 3.1 | 0.7 | 90 | 383.67 | -108 | 250 | 7.9 |

*TCC

Table 11.4: DOWANOL Glycol Ethers and Acetates (23)

Nomenclature of DOWANOL Products

| DOWANOL PRODUCT | CHEMICAL NAME | FORMULA | CA ¹ INDEX NAME | CAS ² NO. ³ |
|-----------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------|
| <i>P-Series</i> | | | | |
| PM | Propylene Glycol Methyl Ether | CH ₃ OC ₃ H ₆ OH | 2-Propanol, 1-methoxy- | 107-98-2 |
| DPM | Dipropylene Glycol Methyl Ether | CH ₃ O(C ₃ H ₆ O) ₂ H | Propanol, (2-methoxy-methylethoxy)- | 34590-94-8 |
| TPM | Tripropylene Glycol Methyl Ether | CH ₃ O(C ₃ H ₆ O) ₃ H | 2-Propanol, 1-[2-(methoxy-1-methylethoxy)-1-methylethoxy]- | 25498-49-1 |
| PMA | Propylene Glycol Methyl Ether Acetate | CH ₃ OC ₃ H ₆ OOCCH ₃ | 2-Propanol, 1-methoxy, -Acetate | 108-65-6 |
| DPMA | Dipropylene Glycol Methyl Ether Acetate | CH ₃ O(C ₃ H ₆ O) ₂ OOCCH ₃ | Propanol, (2-methoxy-methylethoxy), -Acetate | 88917-22-0 |
| PPh | Propylene Glycol Phenyl Ether | C ₆ H ₅ OC ₃ H ₆ OH | 2-Propanol, 1-phenoxy- | 770-35-4 |
| BC-100 | Propylene-based Glycol Ether Blend | | | 107-98-2 34590-94-8 |
| BC-200 | Propylene-based Glycol Ether Blend | | | 107-98-2 34590-94-8 |
| BC-300 | Propylene-based Glycol Ether Acetate Blend | | | 108-65-6 88917-22-0 |
| <i>E-Series</i> | | | | |
| EB | Ethylene Glycol n-Butyl Ether | C ₄ H ₉ OC ₂ H ₄ OH | Ethanol, 2-butoxy- | 111-76-2 |
| DB | Diethylene Glycol n-Butyl Ether | C ₄ H ₉ O(C ₂ H ₄ O) ₂ H | Ethanol, 2-(2-butoxy-ethoxy)- | 112-34-5 |
| TBH | Triethylene Glycol n-Butyl Ether and Higher Homologs | C ₄ H ₉ O(C ₂ H ₄ O) _n H (n = 3, 4, 5) | Ethanol, 2-[2-(2-butoxy-ethoxy) ethoxy]- | 143-22-6 |
| DM | Diethylene Glycol Methyl Ether | CH ₃ O(C ₂ H ₄ O) ₂ H | Ethanol, 2-(2-methoxy-ethoxy)- | 111-77-3 |
| TMH | Triethylene Glycol Methyl Ether and Higher Homologs | CH ₃ O(C ₂ H ₄ O) _n H (n = 3, 4, 5) | Ethanol, 2-[2-(2-methoxy-ethoxy) ethoxy]- | 112-35-6 |
| EPh | Ethylene Glycol Phenyl Ether | C ₆ H ₅ OC ₂ H ₄ OH | Ethanol, 2-phenoxy- | 122-99-6 |
| DALPAD A | Aromatic-Based Glycol Ether | C ₆ H ₅ OC ₂ H ₄ OH | Ethanol, 2-phenoxy- | 122-99-6 |

¹ Chemical Abstract Index (American Chemical Society).² Chemical Abstract Service (American Chemical Society).³ CAS No. for major component. Refer to MSDS for detailed CAS No. listing.

(continued)

Table 11.4: (continued)

Specification Limits and Analytical Methods for DOWANOL Products

| DOWANOL | Dow Method for Gas Chromatography (GC) | Assay, Wt. % (GC) | Glycol Ether, Wt. % (GC) | Distillation Range, °C at 760 mm Hg IBP-DP (ASTM D-1078) | Specific Gravity, 25/25°C (ASTM D-891) | Color, APHA, max. (ASTM D-1209) | Water, Wt. %, max. (ASTM D-1364) | % Acidity, (as Acetic Acid), max. (ASTM D-1613) |
|---------|----------------------------------------|-------------------|--------------------------|----------------------------------------------------------|----------------------------------------|---------------------------------|----------------------------------|-------------------------------------------------|
| PM | ML-AM-85-1 | Note 1 | | 117-125† | 0.918-0.921† | 10 | 0.1 | 0.01 |
| DPM | 22345A | 99 | | 184-193† | 0.945-0.957† | 15 | 0.15 | 0.01 |
| TPM | | | | 236-251 | 0.962-0.965 | 15 | | 0.01 |
| PMA | 22477A | 99 | 0.5 | 140-150† | | 15 | 0.05 | 0.02 |
| DPMA | ML-AM-83-55 | 98 | 0.5 | | | 15 | 0.05 | 0.05 |
| BC-100 | 22036 | 98.0 | | | | 15 | 0.15 | 0.01 |
| BC-200 | 22037 | 98.0 | | | | 15 | 0.15 | 0.01 |
| BC-300 | 09987A | 98.0 | 0.5 | | | 15 | 0.05 | 0.02 |
| EB | | | | 169-173 | 0.898-0.901 | 10 | 0.10 | 0.01 |
| DB | | | | 227-235 | 0.950-0.954 | 10 | 0.10 | 0.01 |
| DM | | | | 191-198 | 1.017-1.021 | 10 | 0.10 | 0.01 |

| | Dow Method (for GC) | Di-Adduct Wt. %, max. | Tri-Adduct Wt. %, min. | Tetra-Adduct Wt. %, max. | Penta-Adduct Wt. %, max. | Hexa-Adduct Wt. %, max. | Total Glycol Wt. %, max. | Water, Wt. %, max. |
|-----|---------------------|-----------------------|------------------------|--------------------------|--------------------------|-------------------------|--------------------------|--------------------|
| TMH | 22560A | 5.0 | 65.0 | 24.0 | 6.0 | 1.0 | 6.0 | 0.2 |
| TBH | 22523A | 10 | 53 | 32 | 8 | 1.5 | 5 | 0.2 |

| | Dow Method (for GC) | Assay, Wt. %, min. | Related Compounds, Wt. %, max. | Specific Gravity, 25/25°C | Color, APHA, max. | Phenol, Wt. %, max. (Note 2) |
|----------|---------------------|--------------------|--------------------------------|---------------------------|-------------------|------------------------------|
| PPh | 22484 | 93 | 7 | | 50 | 0.1 |
| EPh | 22399C | 90 | 10 | | 50 | 0.5 |
| DALPAD A | | | | 1.106-1.110 | 25 | |

† Typical Property

Note 1: DOWANOL PM assay includes 1-methoxy-2-propanol, 97%, minimum, and 2-methoxy-1-propanol, 3%, maximum.

Note 2: Dow Method 22399C is used to determine phenol using 4-aminoantipyrine reagent in DOWANOL EPh.

Dow Method 22484 is used to determine phenol in DOWANOL PPh.

(continued)

Table 11.4: (continued)

Physical Properties of DOWANOL Glycol Ethers and Acetates

| DOWANOL | CHEMICAL NAME | STRUCTURAL FORMULA | Molec- ular Wt. | Boiling Point (°C @ 760 mm Hg) | Flash Point (°F) | Evap- oration Rate (nBuAc = 1.00) | Specifc Gravity (25/25°C) | Lb/Gal (25°C) | Vis- cosity (Centi- stokes 25°C) | Vapor Pres- sure at 25°C (mm Hg) | Surface Tension (dynes/ cm) | SOLVENT CONSTANTS | | | | | Solvent In Water | Water In Solvent | |
|-----------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------|------------------------|-----------------------------------------------|---------------------------------|------------------|----------------------------------------------|----------------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------|---------------------------|----------------------------------------------|---------------------------|--------------------------|------------------------|------------------------|----------------|
| | | | | | | | | | | | | Hansen Solubility Parameters ¹ (MPa ^{1/2} ·cm ³ ·mol ⁻¹) | | | | Solubility (ml/100ml) | | | |
| | | | | | | | | | | | | δ _d (non- polar) | δ _p (polar) | δ _h (hydro- gen bonding) | δ _t (Total) | δ ₁ | | | δ ₂ |
| PM | Propylene Glycol Methyl Ether | CH ₃ OCH ₂ CHOHCH ₃ | 90.1 | 120.1 | 90 ² | 0.71 | 0.917 | 7.65 | 1.9 | 12.5 | 27.7 | 15.6 | 7.2 | 13.6 | 21.9 | ∞ | ∞ | | |
| DPM | Dipropylene Glycol Methyl Ether | CH ₃ O(CH ₂ CH ₂ CH(CH ₃)) ₂ H | 148.2 | 184.0 | 167 ² | 0.02 | 0.950 | 7.91 | 3.6 | 0.55 | 28.8 | 15.1 | 6.8 | 12.6 | 20.8 | ∞ | ∞ | | |
| TPM | Tripropylene Glycol Methyl Ether | CH ₃ O(CH ₂ CH ₂ CH(CH ₃)) ₃ H | 206.3 | 242.4 | 232 ² | <0.01 | 0.965 | 8.03 | 5.8 | 0.02 | 30.0 | 14.9 | 6.8 | 10.4 | 19.4 | ∞ | ∞ | | |
| PMA | Propylene Glycol Methyl Ether Acetate | CH ₃ OCH ₂ CH(CH ₃)OOCCH ₃ | 132.2 | 145.8 | 114 ² | 0.34 | 0.966 | 8.03 | 1.1 | 3.7 ³ | 26.4 | 16.1 | 6.1 | 6.6 | 18.4 | 19.8 | 3.2 | | |
| DPMA | Dipropylene Glycol Methyl Ether Acetate | CH ₃ O(CH ₂ CH ₂ CH(CH ₃)) ₂ OOCCH ₃ | 190.2 | 209.3 | 186 ⁴ | <0.01 | 0.976 | 8.12 | 3.0 | <1.0 ³ | 28.6 | 15.1 | 5.3 | 4.3 | 16.6 | 19.4 | 3.5 | | |
| PnB | Propylene Glycol n-Butyl Ether | C ₄ H ₉ OCH ₂ CH(CH ₃)OH | 132.2 | 170.0 | 138 ⁴ | 0.08 | 0.884 | 7.37 | 3.5 | 0.6 ³ | 26.3 | 15.6 | 5.8 | 11.2 | 20.1 | 6.4 | 16.0 | | |
| DPnB | Dipropylene Glycol n-Butyl Ether | C ₄ H ₉ O(CH ₂ CH ₂ CH(CH ₃)) ₂ H | 190.3 | 229.0 | 212 ² | 0.01 | 0.906 | 7.55 | 5.4 | 0.06 ³ | 28.8 | 15.4 | 5.6 | 9.0 | 18.7 | 5.0 | 12.5 | | |
| TPnB | Tripropylene Glycol n-Butyl Ether | C ₄ H ₉ O(CH ₂ CH ₂ CH(CH ₃)) ₃ H | 248.4 | 276.0 | 255 ⁵ | <<0.01 | 0.932 | 7.77 | 7.3 | <0.01 ³ | 29.9 ⁶ | 15.2 | 5.8 | 6.8 | 17.6 | 3.0 | 8.0 | | |
| PPh | Propylene Glycol Phenyl Ether | C ₆ H ₅ OC ₂ H ₄ OH | 152.2 | 242.7 | 240 ⁴ | <0.01 | 1.063 | 8.80 | 23.2 | <0.01 | 38.1 | 18.7 | 5.7 | 11.3 | 22.6 | 1.1 | 7.0 | | |
| PnP | Propylene Glycol n-Propyl Ether | C ₃ H ₇ OCH ₂ CH(CH ₃)OH | 118.2 | 149.8 | 119 ² | 0.21 | 0.885 | 7.38 | 2.2 | 1.7 | 25.9 | 15.5 | 6.2 | 12.4 | 20.8 | ∞ | ∞ | | |
| DPnP | Dipropylene Glycol n-Propyl Ether | C ₃ H ₇ O(CH ₂ CH(CH ₃)) ₂ H | 176.2 | 212.0 | 190 ² | 0.015 | 0.922 | 7.70 | 4.3 | 0.12 | 27.6 | 15.3 | 5.9 | 10.2 | 19.3 | 19 | 20.5 | | |
| EB | Ethylene Glycol n-Butyl Ether | C ₄ H ₉ OC ₂ H ₄ OH | 118.2 | 171.1 | 150 ⁴ | 0.07 | 0.897 | 7.49 | 3.2 | 0.88 | 27.4 | 16.0 | 6.2 | 11.4 | 20.6 | ∞ | ∞ | | |
| DB | Diethylene Glycol n-Butyl Ether | C ₄ H ₉ OC ₂ H ₄ OC ₂ H ₄ OH | 162.2 | 230.0 | 226 ⁵ | 0.003 | 0.952 | 7.94 | 5.2 | 0.06 | 30.0 | 16.0 | 7.0 | 10.6 | 20.4 | ∞ | ∞ | | |
| TBH | Triethylene Glycol Butyl Ether/Highers | C ₄ H ₉ O(C ₂ H ₄ O) _n H (n=3,4,5) | 231.2 Av | 283.0 | 285 ⁵ | <<0.01 | 0.996 | 8.30 | 9.2 | <0.01 | 31.4 | - | - | - | - | ∞ | - | | |
| DM | Diethylene Glycol Methyl Ether | CH ₃ OC ₂ H ₄ OC ₂ H ₄ OH | 120.1 | 194.1 | 197 ² | 0.02 | 1.021 | 8.47 | 3.4 | 0.25 | 34.8 | 16.2 | 7.8 | 12.6 | 22.0 | ∞ | ∞ | | |
| TMH | Triethylene Glycol Methyl Ether/Highers | CH ₃ O(C ₂ H ₄ O) _n H (n=3,4,5) | 173.0 Av | 232.0 | 255 ⁵ | <<0.01 | 1.054 | 8.80 | 7.0 | <0.01 | 39.1 | - | - | - | - | ∞ | - | | |
| EPh | Ethylene Glycol Phenyl Ether | C ₆ H ₅ OC ₂ H ₄ OH | 138.2 | 245.6 | 250 ² | <0.01 | 1.104 | 9.20 | 20.5 | 0.007 | 42.0 | 17.8 | 5.3 | 12.3 | 22.3 | 2.3 | 10.8 | | |
| DALPAD A | Aromatic-Based Glycol Ether | C ₆ H ₅ OC ₂ H ₄ OH | 138.2 | 245.6 | 250 ² | <0.01 | 1.104 | 9.20 | 20.5 | 0.007 | 42.0 | 17.8 | 5.3 | 12.3 | 22.3 | 2.3 | 10.8 | | |

¹ Trademark of The Dow Chemical Company

² Solubility Parameters are useful as a guide in determining the ability of a solvent or a solvent mixture to dissolve resins. A discussion of solubility parameters and the basis for these values are contained in an article by C.M. Hansen, I and EC Product Res. Devel., 8, No. 1, 2-11, March 1969. Another useful reference is a book by A.F.M. Barton entitled *Handbook of Solubility Parameters and Other Properties*. CRC Press, Boca Raton, Florida, 1991.

³ Setalash

⁴ Vapor pressure determined at 20°C

⁵ Tag Closed Cup (TCC)

⁶ Pensky-Martens Closed Cup (PMCC)

⁷ Surface tension determined at 20°C

Regulatory Information on Glycol Ethers as of August, 1993

| | E-Series | P-Series |
|---------------------------------------------------------------------------|----------|----------------|
| CERCLA ¹ spill reporting requirements | 1 lb | Not applicable |
| SARA ² Title III release reporting required | Yes | No |
| VOC ³ per Title I, Clean Air Act Amendments of 1990 | Yes | Yes |
| HAP ⁴ compound per Title III, Clean Air Act Amendments of 1990 | Yes | No |

¹ Comprehensive Environmental Response, Compensation, and Liability Act of 1980

² Superfund Amendment and Reauthorization Act

³ Volatile Organic Compound, per Federal Register, Vol. 57, No. 22, 1/3/92

⁴ Hazardous Air Pollutant

Table 11.5: Eastman Chemicals Glycol Ethers (41)

| | Evaporation Rate n-BuOAc = 1 | Lb/ Gal @ 20°C | Color Pt-Co Max | Specific Gravity @ 20°/20°C | Acidity, as Acetic Acid Max Wt % | Boiling Range °C | Freezing Point °C | Flash Point TCC °C (°F) | Assay Min Wt % |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------|-----------------------|-----------------------------------|----------------------------------------|------------------------|-------------------------|-------------------------------|----------------------|
| EE Solvent ^a (Ethylene Glycol Monoethyl Ether) C ₂ H ₅ OC ₂ H ₄ OH | 0.30 | 7.75 | 10 | 0.931 | 0.005 | 134-136 | -94 | 43 (110) | 99.9 |
| EKTASOLVE [®] EP Solvent (Ethylene Glycol Monopropyl Ether) C ₃ H ₇ OC ₂ H ₄ OH | 0.20 | 7.59 | 10 | 0.913 | 0.01 | 149-154 | <-90 | 49 (120) | 99.6 |
| EKTASOLVE EB Solvent (Ethylene Glycol Monobutyl Ether) C ₄ H ₉ OC ₂ H ₄ OH | 0.06 | 7.51 | 10 | 0.902 | 0.01 | 169-173 | -75 | 62 (143) | 99.6 |
| EKTASOLVE DM Solvent (Diethylene Glycol Monomethyl Ether) CH ₃ (OC ₂ H ₄) ₂ OH | 0.02 | 8.51 | 10 | 1.023 | 0.01 | 191-198 | -85 | 88 (191) | — |
| EKTASOLVE DE Solvent (Diethylene Glycol Monoethyl Ether) C ₂ H ₅ (OC ₂ H ₄) ₂ OH | 0.02 | 8.25 | 10 | 0.990 | 0.01 | 198-204 | -90 | 91 (195) | 99.3 |
| EKTASOLVE DE-HG Solvent ^b (Diethylene Glycol Monoethyl Ether/Ethylene Glycol) [C ₂ H ₅ (OC ₂ H ₄) ₂ OH][HOCH ₂ CH ₂ OH] | <0.01 | 8.56 | 10 | 1.027 | 0.01 | 190-205 | -70 | 96 (205) | — |
| EKTASOLVE DP Solvent (Diethylene Glycol Monopropyl Ether) C ₃ H ₇ (OC ₂ H ₄) ₂ OH | 0.01 | 8.04 | 10 | 0.963 | 0.01 | 202-216 | <-90 | 93 (200) | 99.4 |
| EKTASOLVE DB Solvent (Diethylene Glycol Monobutyl Ether) C ₄ H ₉ (OC ₂ H ₄) ₂ OH | 0.003 | 7.94 | 10 | 0.955 | 0.01 | 230-235 | -76 | 111 (232) COC | 99.6 |
| EKTASOLVE EEH Solvent (Ethylene/Diethylene Glycol 2-Ethylhexyl Ether) C ₄ H ₉ CH(C ₂ H ₅)CH ₂ OC ₂ H ₄ OH | 0.003 | 7.42 | 50 | 0.892 | 0.01 | 224-275 | <-60 | 98 (208) | — |

^aFor sale outside USA only^bHigh gravity solvent

NOMENCLATURE OF GLYCOL ETHERS AND GLYCOL ETHER ESTERS

| GLYCOL ETHERS | | | | | | | | |
|---------------------|----------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|----------------------------------|-----------------------------------|----------------------------------|---------------------------------|
| Company Name | Ethylene Glycol Propyl Ether | Ethylene Glycol Butyl Ether | Ethylene Glycol 2-Ethylhexyl Ether | Diethylene Glycol Methyl Ether | Diethylene Glycol Ethyl Ether | Diethylene Glycol Propyl Ether | Diethylene Glycol Butyl Ether | Propylene Glycol Butyl Ether |
| Eastman | Eastman EP | Eastman EB | Eastman EEH | Eastman DM | Eastman DE | Eastman DP | Eastman DB | Eastman PM |
| Union Carbide | Propyl Cellosolve | Butyl Cellosolve | — | Methyl Carbitol | Carbitol (low gravity) | Propyl Carbitol | Butyl Carbitol | Methyl Proposol |
| Dow | — | Dowanol EB | — | Dowanol DM | Dowanol DE | — | Dowanol DB | Dowanol PM |
| Shell | — | Butyl Oxitol | — | — | — | — | Butyl Dioxitol | — |
| Occidental | — | EB | — | — | DE | — | DB | — |
| Arco | — | — | — | — | — | — | — | Arcozol PM |
| GLYCOL ETHER ESTERS | | | | | | | | |
| Company Name | Ethylene Glycol Butyl Ether Acetate | Diethylene Glycol Ethyl Ether Acetate | Diethylene Glycol Butyl Ether Acetate | Propylene Glycol Methyl Ether Acetate | | | | |
| Eastman | Eastman EB acetate | Eastman DE acetate | Eastman DB acetate | Eastman PM acetate | | | | |
| Union Carbide | Butyl [®] Cellosolve acetate | — | Butyl Carbitol acetate | Methyl Proposol acetate | | | | |
| Arco | — | — | — | Arcozol PM acetate | | | | |
| Dow | — | — | — | Dowanol PM acetate | | | | |
| Occidental | EB acetate | — | DB acetate | PM acetate | | | | |

Table 11.6: Grant Chemical Glycol Diethers (GLYMES) (21)

| | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>POLYGLYME $\text{CH}_3\text{-O-(CH}_2\text{CH}_2\text{-O)}_n\text{-CH}_3$ Poly(ethylene glycol) dimethyl ether [24991-55-7]</p> | <p>B.P. ∞</p> | | <p>B.P. 275°C</p> | <p>TETRAGLYME $\text{CH}_3\text{-O-(CH}_2\text{CH}_2\text{-O)}_4\text{-CH}_3$ Tetraethylene glycol dimethyl ether Bis[2-(2-methoxyethoxy) ethyl] ether Dimethoxytetraethylene glycol 2,5,8,11,14-pentaioxapentadecane [143-24-8]</p> |
| <p>BUTYL DIGLYME $\text{CH}_3\text{CH}_2\text{CH}_2\text{CH}_2\text{-O-(CH}_2\text{CH}_2\text{-O)}_2\text{-CH}_2\text{CH}_2\text{CH}_2\text{CH}_3$ Diethylene glycol dibutyl ether Bis(2-butoxyethyl) ether Dibutoxydiethylene glycol Dibutyl Carbitol* 5,8,11-trioxapentadecane [112-73-2]</p> | <p>B.P. 256°C</p> | | <p>B.P. 216°C</p> | <p>TRIGLYME $\text{CH}_3\text{-O-(CH}_2\text{CH}_2\text{-O)}_3\text{-CH}_3$ Triethylene glycol dimethyl ether 1,2-Bis(2-methoxyethoxy) ethane Dimethoxytriethylene glycol 2,5,8,11-tetraoxadodecane [112-49-2]</p> |
| <p>ETHYL DIGLYME^a $\text{CH}_3\text{CH}_2\text{-O-(CH}_2\text{CH}_2\text{-O)}_2\text{-CH}_2\text{CH}_3$ Diethylene glycol diethyl ether Bis(2-ethoxyethyl) ether Diethoxydiethylene glycol Diethyl Carbitol* Ethane, 1,1'-oxybis[2-ethoxy- 3,6,9-trioxaundecane [112-36-7]</p> | <p>B.P. 189°C</p> | | <p>B.P. 162°C</p> | <p>DIGLYME $\text{CH}_3\text{-O-(CH}_2\text{CH}_2\text{-O)}_2\text{-CH}_3$ Diethylene glycol dimethyl ether Bis(2-methoxyethyl) ether Dimethoxydiethylene glycol Dimethyl Carbitol* Ethane, 1,1'-oxybis[2-methoxy- 2,5,8-trioxanonane [111-96-6]</p> |
| <p>ETHYL GLYME $\text{CH}_3\text{CH}_2\text{-O-CH}_2\text{CH}_2\text{-O-CH}_2\text{CH}_3$ Ethylene glycol diethyl ether 1,2-Diethoxyethane Diethoxyethylene glycol Diethyl Cellosolve* Ethane; 1,2-diethoxy 3,6-dioxaoctane [629-14-1]</p> | <p>B.P. 121°C</p> | | <p>B.P. 85.2°C</p> | <p>MONOGLYME $\text{CH}_3\text{-O-CH}_2\text{CH}_2\text{-O-CH}_3$ Ethylene glycol dimethyl ether 1,2-Dimethoxyethane Dimethoxyethylene glycol DME Ethane, 1,2-dimethoxy- 2,5-Dioxahehexane [110-71-4]</p> |

(continued)

Table 11.6: (continued)

Physical and Thermodynamic Properties

| | EMPIRICAL FORMULA | MOLECULAR WEIGHT | BOILING POINT °C / 760mm Hg | FREEZING POINT °C | SPECIFIC GRAVITY 20/20°C | WEIGHT PER GALLON lb 20°C | VAPOR PRESSURE mm Hg/20°C | VOLATILITY n-Butyl acetate=100 | VISCOSITY cP/20°C | SURFACE TENSION dynes/cm 20°C | SPECIFIC HEAT cal/gm°C | AUTO IGNITION temp °C | HEAT OF VAPORIZATION K cal/mole | HEAT OF COMBUSTION K cal/mole | FLASH POINT °C, closed cup °F at 20°C | REFRACTIVE INDEX | APPEARANCE | ODOR | SOLUBILITY at 25°C | | | |
|---------------|---------------------------------------------------|------------------|--------------------------------|-------------------|-----------------------------|------------------------------|------------------------------|-----------------------------------|----------------------|----------------------------------|---------------------------|--------------------------|------------------------------------|----------------------------------|---------------------------------------------|------------------|-----------------------------|-------------------------------|-------------------------------|----------|----------|-----------------------------------------------------------------------------------------------------------------------------------|
| | | | | | | | | | | | | | | | | | | | IN WATER | WATER IN | ORGANICS | |
| MONOGLYME | C ₄ H ₁₀ O ₂ | 90.12 | 85.2 | -69.0 | 0.8683 | 7.24 | 54 | 499 | 1.1 | 22.9 | 0.438 | 205 | 6.7 | 602 | 118 | -6 | 1.3792 | CLEAR COLORLESS | ETHEREAL NON-RESIDUAL | COMPLETE | COMPLETE | ALL GLYMES ARE MISCIBLE IN ALL PRO- PORTIONS IN ETHANOL, ACETONE, DIETHYL ETHER AND OCTANE |
| ETHYL GLYME | C ₆ H ₁₄ O ₂ | 118.18 | 121 | -74.0 | 0.8417 | 7.00 | 9 | 105 | 0.7 | | | | | | 27 | 1.3922 | CLEAR COLORLESS | MILD ETHEREAL NON-RESIDUAL | 20.4% | 3.3% | | |
| DIGLYME | C ₈ H ₁₈ O ₃ | 134.17 | 162 | -64.0 | 0.9451 | 7.88 | 2 | 36 | 2.0 | 27.0 | 0.403 | 190 | 10.0 | 902 | 143 | 57 | 1.4078 | CLEAR COLORLESS | MILD ETHEREAL NON-RESIDUAL | COMPLETE | COMPLETE | |
| ETHYL DIGLYME | C ₈ H ₁₈ O ₃ | 162.23 | 189 | -44.3 | 0.9082 | 7.56 | 0.5 | 4 | 1.4 | 27.2 | | | 10.5 | 1199 | 152 | 90 | 1.4115 | CLEAR COLORLESS | MILD NON-RESIDUAL | COMPLETE | COMPLETE | |
| TRIGLYME | C ₈ H ₁₈ O ₄ | 178.22 | 216 | -45.0 | 0.9862 | 8.23 | 0.02 | <0.1 | 3.8 | 29.4 | 0.424 | 195 | 14.3 | 1191 | 179 | 111 | 1.4224 | CLEAR COLORLESS | MILD NON-RESIDUAL | COMPLETE | COMPLETE | |
| BUTYL DIGLYME | C ₁₂ H ₂₆ O ₃ | 218.34 | 256 | -60.2 | 0.8814 | 7.36 | <0.01 | <0.1 | 2.4 | 27.0 | 0.495 | 190 | 12.0 | 1823 | 175 | 118 | 1.4235 | CLEAR COLORLESS | VERY MILD NON-RESIDUAL | 0.3% | 1.4% | |
| TETRAGLYME | C ₁₀ H ₂₀ O ₅ | 222.28 | 275 | -29.7 | 1.0132 | 8.45 | <0.01 | <0.1 | 4.1 | 33.8 | 0.427 | 215 | 18.7 | 1480 | 217 | 141 | 1.4330 | CLEAR COLORLESS | VERY MILD NON-RESIDUAL | COMPLETE | COMPLETE | |
| POLYGLYME* | C _n H _{2n+2} O _{n+2} | 275 | | | 1.04 | 8.6 | <0.01 | <0.1 | 12 | | | 215 | | | >130 | | CLEAR SLIGHTLY YELLOW | VERY MILD NON-RESIDUAL | COMPLETE | COMPLETE | | |

* Mixture of high molecular weight glymes.

Specifications

| | PURITY (by G.C.), wt % | | ACIDITY (as acetic acid) ppm | | WATER CONTENT ppm | | PEROXIDE CONTENT ppm | |
|---------------|------------------------------|---------|------------------------------------|---------|-------------------------|---------|----------------------------|---------|
| | MIN | TYPICAL | MAX | TYPICAL | MAX | TYPICAL | MAX | TYPICAL |
| MONOGLYME | 99.90 | 99.97 | 150 | 25 | 350 | 175 | 15 | 5 |
| ETHYL GLYME | 97.0 | 98.5 | 150 | 25 | 1000 | 300 | 15 | 5 |
| DIGLYME | 99.90 | 99.94 | 150 | 25 | 250 | 150 | 15 | 5 |
| ETHYL DIGLYME | 98.0 | 99.0 | 150 | 25 | 2000 | 500 | 15 | 5 |
| TRIGLYME | 98.0 | 99.0 | 150 | 25 | 500 | 100 | 15 | 5 |
| BUTYL DIGLYME | 98.5 | 99.0 | 100 | 25 | 500 | 250 | 15 | 5 |
| TETRAGLYME | 98.0 | 99.0 | 150 | 25 | 500 | 100 | 15 | 5 |

Table 11.7: Occidental Ethylene Glycol Ethers and Glycol Ether Acetates (27)

Products, Grades and Specifications: Glycol Ethers and Acetates

| SPECIFICATION* | EM | EM-J | DM | DM-J | TM | EE |
|-----------------------------------------|---------------|----------------|----------------|----------------|----------------|---------------|
| Purity, weight % min | 99.5 | | | | 98 | |
| Color, APHA max | 10 | 15 | 10 | 10 | 50 | 10 |
| Acidity (as acetic acid), wt% max | 0.01 | | 0.01 | | 0.01 | 0.005 |
| Specific gravity, 20/20°C | 0.964 - 0.967 | 0.963 - 0.967 | 1.021 - 1.027 | 1.020 - 1.025 | 1.038 - 1.058 | 0.929 - 0.932 |
| Distillation range, IBP, min DP, °C max | 123.5 125 | 123.5 125.5 | 191.0 198.0 | 191.0 198.0 | 235.0 255.0 | 134 136 |
| Water, weight % max | 0.10 | 0.15 | 0.10 | 0.10 | 0.2 | 0.10 |
| Acid no., mgKOH/gm, max | | 0.09 | | 0.09 | | |
| Ethylene glycol, wt % max | | 0.025 | | 0.5 | | |
| pH, 25% solution at 25°C | | 5.0 - 7.0 | | 5.0 - 8.5 | 5.0 - 9.0 | |
| Refractive index at 20°C | | 1.4015-1.4025 | | | | |
| Antioxidant (BHT), ppm | | 50 - 150 | | 50 - 150 | | |
| Flash point (PMCC), °C | | | | 85 | | |

| SPECIFICATION* | DE | EB | DB | EEA | EBA | DBA |
|-----------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Purity, weight % min | | | | 99.0 | 98.0 | 98.0 |
| Color, APHA max | 10 | 10 | 10 | 15 | 15 | 15 |
| Acidity (as acetic acid), wt% max | 0.01 | 0.01 | 0.01 | 0.02 | 0.02 | 0.02 |
| Specific gravity, 20/20°C | 0.989 - 0.994 | 0.901 - 0.904 | 0.953 - 0.956 | 0.971 - 0.976 | 0.940 - 0.944 | 0.975 - 0.985 |

Products, Grades and Specifications: Heavy Glycol Ethers

| SPECIFICATION* | HM | HHM | HE | HB |
|------------------------------------------------------------------------------------------|-----------|-----------|-----------|-------------|
| Triethylene Glycol Monomethyl Ether and higher molecular wt. Monomethyl Ethers, wt % min | 55.0 | 55.0 | | |
| Diethylene Glycol Monomethyl Ether, wt % max | 10.0 | 2.0 | | |
| Triethylene Glycol Monoethyl Ether and higher molecular wt. Monoethyl Ethers, wt % min | | | 70.0 | |
| Diethylene Glycol Monoethyl Ether, wt % max | | | 10.0 | |
| Triethylene Glycol Monobutyl Ether and higher molecular wt. Monobutyl Ethers, wt % min | | | | 88.0 |
| Diethylene Glycol Monobutyl Ether, wt % max | | | | 12 |
| Water, weight % max | 0.1 | 0.1 | 0.1 | 0.1 |
| pH, alcoholic (50/50) | 7.5-11.0 | 7.5-11.0 | 7.5-11.0 | 7.5-11.0 |
| Color, APHA max | 100 | 100 | 100 | 200 |
| Specific gravity at 20/20°C (typical) | 1.03-1.06 | 1.04-1.06 | 0.99-1.06 | 0.984-1.002 |
| Minimum Boiling Point °C | 238 | 249 | 220 | 250 |

(continued)

Table 11.7: (continued)

Occidental Glycol Ethers and Glycol Ether Acetates


| TYPICAL PROPERTIES | EM | EM-J | DM | DM-J | TM | EE |
|--------------------------------------------------|---------|---------|---------|---------|---------|---------|
| Molecular weight | 76.1 | 76.1 | 120.15 | 120.15 | 164.2 | 90.1 |
| Auto-ignition temp., °C | 285 | 285 | - | - | - | 235 |
| Boiling point, °C | 124.2 | 124.5 | 194.0 | 194.0 | 249.0 | 135.5 |
| Freezing point, °C | -85 | -85 | -68.9 | -68.9 | -44.0 | -90 |
| Flash point (TCC), °F | 105 | 105 | 192 | 192 | 238 | 110 |
| Surface tension @ 25°C, dynes/cm ² | 30.9 | 30.9 | 35.9 | 35.9 | 38.7 | 28.2 |
| Refractive index at 20°C | 1.4021 | 1.4021 | 1.4263 | 1.4263 | 1.4381 | 1.4076 |
| Vapor pressure at 20°C, mm Hg | 6.2 | 6.2 | 0.2 | 0.2 | <0.01 | 3.8 |
| Viscosity at 20°C, cP | 2.05 | 2.05 | 3.87 | 3.87 | 7.5 | 2.1 |
| Coeff. of expansion at 20°C | 0.00095 | 0.00095 | 0.00088 | 0.00088 | 0.00088 | 0.00097 |
| Weight/gal. in lbs. at 20°C | 8.04 | 8.04 | 8.51 | 8.51 | 8.74 | 7.75 |

| TYPICAL PROPERTIES | DE | EB | DB | EEA | EBA | DBA |
|--------------------------------------------------|---------|---------|---------|---------|---------|---------|
| Molecular weight | 134.17 | 118.2 | 162.2 | 132.2 | 160.2 | 204.3 |
| Auto-ignition temp., °C | 204 | 244 | 228 | 379 | 340 | 200 |
| Boiling point, °C | 202 | 171 | 230 | 156.4 | - | - |
| Freezing point, °C | -76 | -70 | -68 | -62 | - | - |
| Flash point (TCC), °F | 196 | 150 | 214 | 126 | 165 | 240 |
| Surface tension @ 25°C, dynes/cm ² | 31.8 | 27.4 | 30.0 | - | - | - |
| Refractive index at 20°C | 1.4297 | 1.4193 | 1.4316 | 1.4030 | 1.4200 | 1.4200 |
| Vapor pressure at 20°C, mm Hg | 0.1 | < 1 | < 0.1 | 2.0 | 0.25 | 0.04 |
| Viscosity at 20°C, cP | 4.5 | 6.4 | 6.5 | 1.3 | 1.8 | 3.6 |
| Coeff. of expansion at 20°C | 0.00090 | 0.00092 | 0.00085 | 0.00109 | 0.00100 | 0.00097 |
| Weight/gal. in lbs. at 20°C | 8.25 | 7.52 | 7.95 | 8.11 | 7.85 | 8.16 |


(continued)

Table 11.7: (continued)

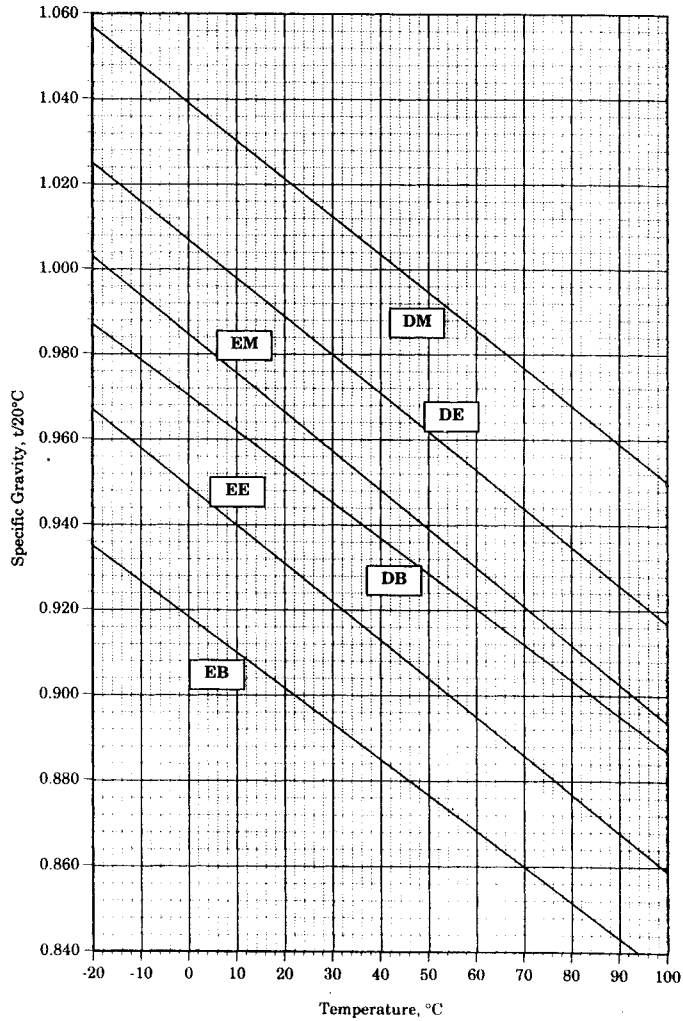Specific Gravity vs Temperature of the Glycol Ethers



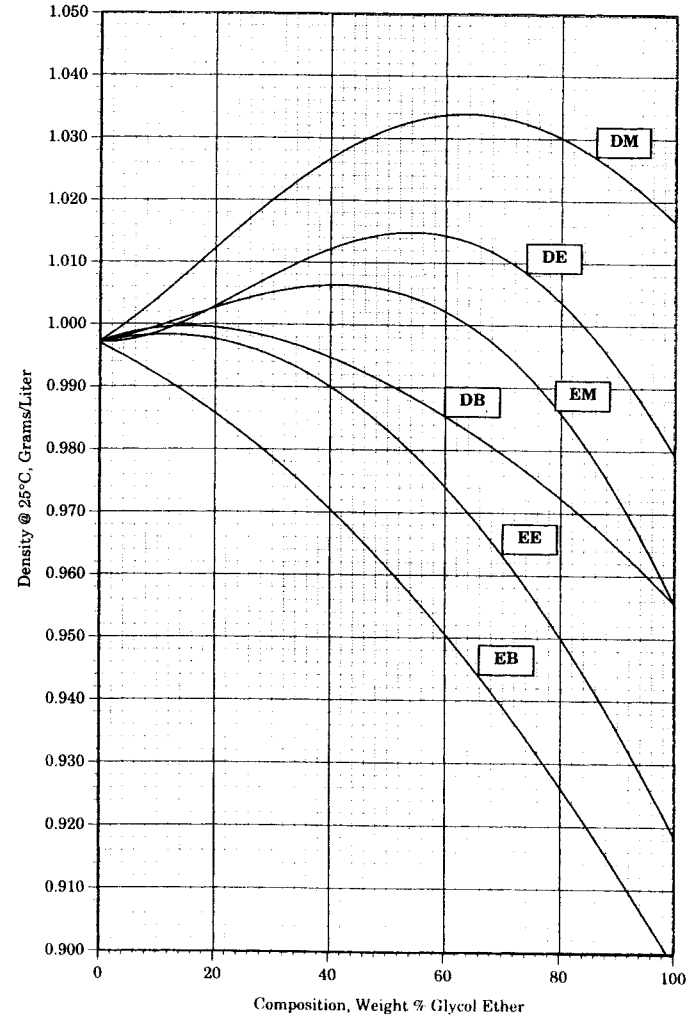
Density vs Composition of Aqueous Glycol Ether Solutions




(continued)

Table 11.7: (continued)

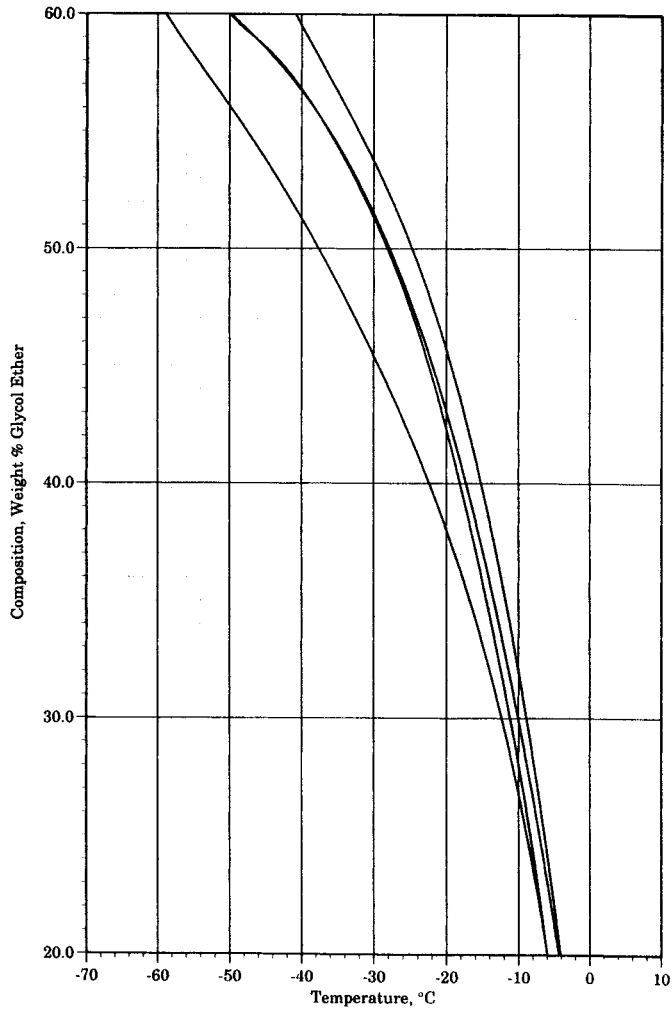Freezing Point vs Composition of Aqueous Glycol Ether Solutions



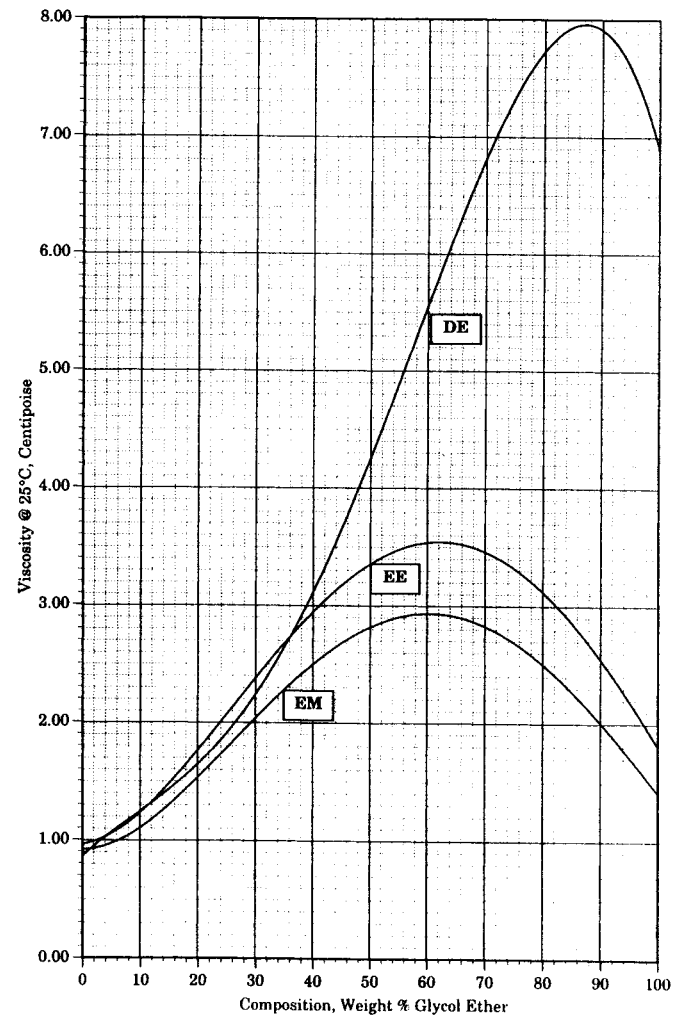
Viscosity vs Composition of Aqueous Glycol Ether Solutions




(continued)

Table 11.7: (continued)

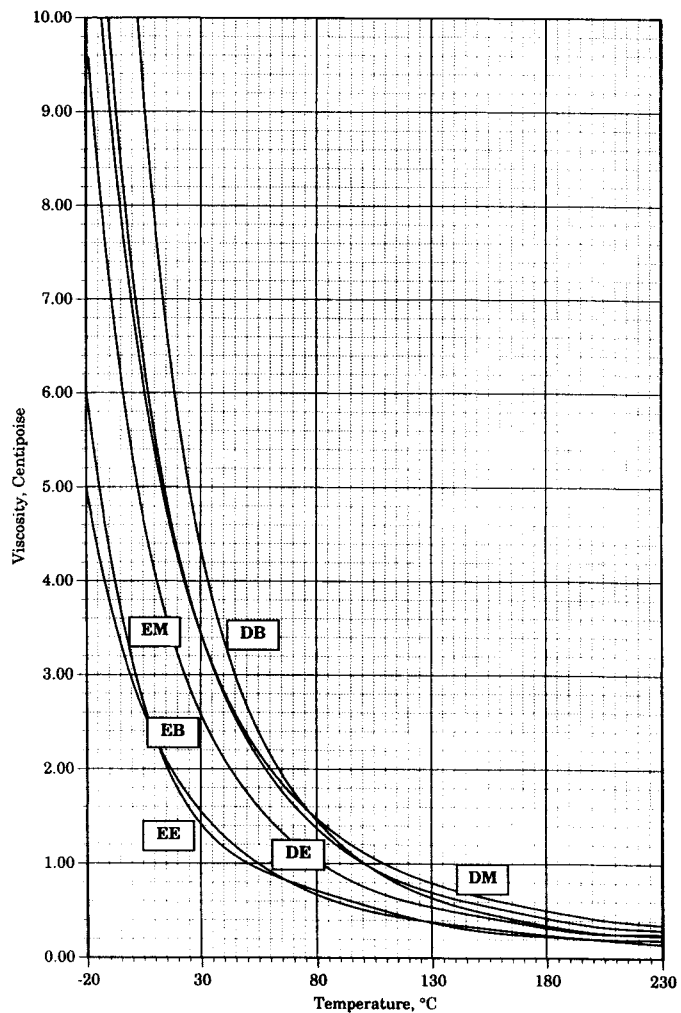Viscosity vs Temperature of the Glycol Ethers



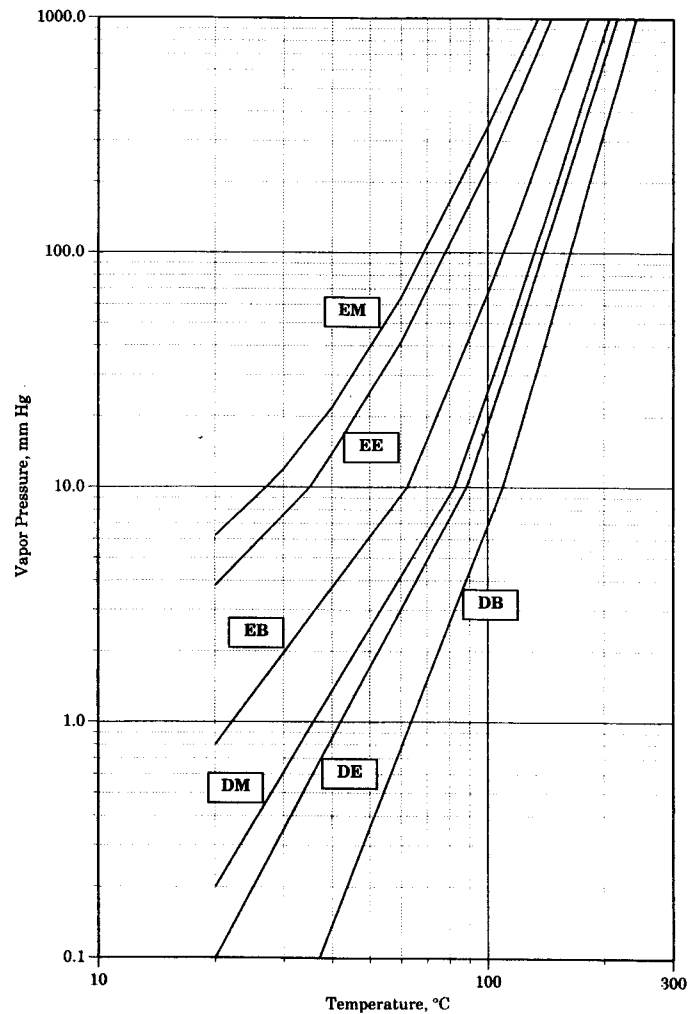Vapor Pressure vs Temperature of the Glycol Ethers



(continued)

Table 11.7: (continued)

Surface Tension vs Composition of Aqueous Glycol Ether Solutions

Liquid/Vapor Equilibrium @ 760 mm of Aqueous Glycol Ether Solutions

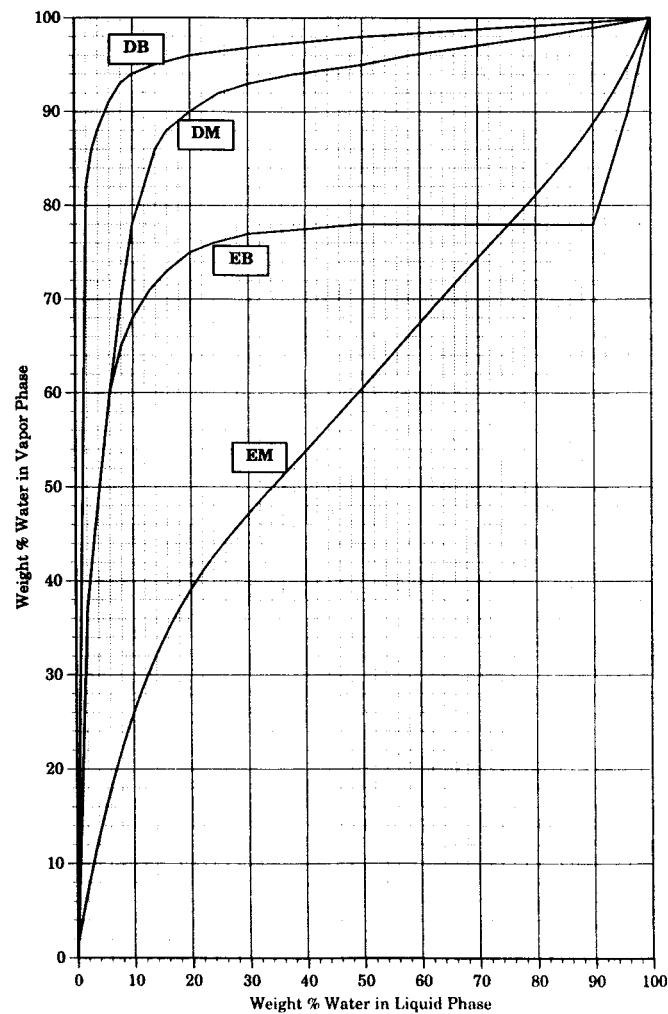
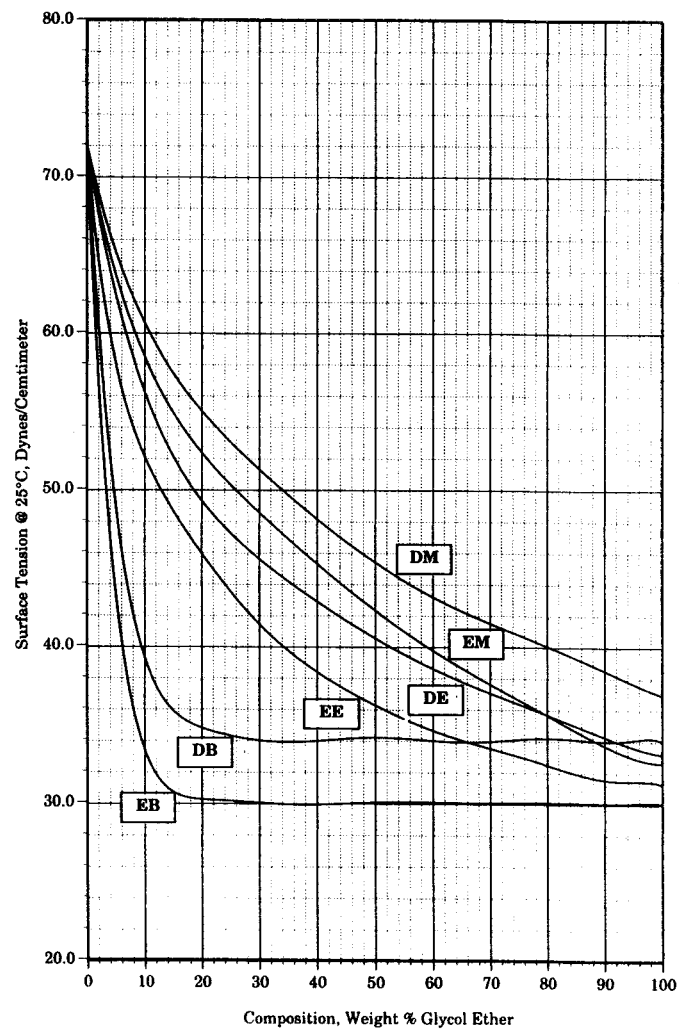


Table 11.8: Olin Chemicals Poly-Solv Propylene Glycol Ethers (66)

Olin produces five ethylene glycol ethers:

Poly-Solv®* EM, ethylene glycol monomethyl ether
(CH₃OCH₂CH₂OH)*Poly-Solv* DM, diethylene glycol monomethyl ether
(CH₃OCH₂CH₂OCH₂CH₂OH)*Poly-Solv* DE, diethylene glycol monoethyl ether
(CH₃CH₂OCH₂CH₂OCH₂CH₂OH)*Poly-Solv* TM, triethylene glycol monomethyl ether
CH₃(OCH₂CH₂)₃OH*Poly-Solv* TE, triethylene glycol monoethyl ether
CH₃CH₂(OCH₂CH₂)₃OH

| | Typical Physical Properties | | | | |
|------------------------------------------------|-----------------------------|----------|----------|----------|----------|
| | EM | DM | DE | TM | TE |
| Boiling Point (°C) | | | | | |
| @ 760 mm Hg | 124 | 194 | 202 | 249 | 256 |
| @ 50 mm Hg | 55 | 115 | 121 | 152 | 158 |
| @ 10 mm Hg | 27 | 82 | 87 | 126 | 130 |
| Coefficient of Expansion | | | | | |
| @ 20°C | 0.00095 | — | — | — | — |
| @ 55°C | 0.00099 | 0.00088 | 0.00084 | — | — |
| Density @ 25°C (lb/gal) | 8.05 | 8.51 | 8.24 | 8.71 | 8.50 |
| Flash Point, TCC (°C) | 41 | 87 | 85 | — | — |
| (°F) | 106 | 188 | 185 | — | — |
| Flash Point, COC (°C) | — | — | — | 118 | 124 |
| (°F) | — | — | — | 245 | 255 |
| Freezing Point (°C) | -85 | -85 | -76 | -55 | -21 |
| (°F) | -121 | -121 | -105 | -67 | -5.8 |
| Heat of Vaporization @ 760 mm Hg (joules/g) | 555.9 | 379.1 | 402.4 | 327.6 | 299.8 |
| Molecular Weight | 76.09 | 120.15 | 134.17 | 164.20 | 178.23 |
| Refractive Index @ 20°C | 1.4021 | 1.4263 | 1.4273 | 1.4381 | 1.4376 |
| Solubility @ 20°C | | | | | |
| <i>Poly-Solv</i> in water | Complete | Complete | Complete | Complete | Complete |
| water in <i>Poly-Solv</i> | Complete | Complete | Complete | Complete | Complete |
| Specific Gravity, apparent @ 20/20°C | 0.966 | 1.021 | 0.989 | 1.048 | 1.022 |
| Specific Heat @ 20°C (joules/g-°C) | 2.233 | 2.149 | 2.308 | — | — |
| Vapor Pressure @ 20°C (mm Hg) | 6.2 | 0.2 | 0.1 | <0.01 | <0.01 |
| Viscosity, absolute @ 20°C (cp) | 1.7 | 3.9 | 4.5 | 7.5 | 7.8 |

| | Specifications | | | | | |
|------------------------------------------|-----------------|-----------------|-----------------|---------------------|-----------------|----------------|
| | EM | DM | DE (regular) | DE (low gravity) | TM | TE |
| Water, max (% by weight) | 0.01 | 0.1 | 0.2 | 0.1 | 0.1 | 0.1 |
| Acidity, as acetic acid (% by weight) | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 | 0.01 |
| Specific Gravity @ 20/20°C | 0.964- 0.967 | 1.019- 1.025 | 1.024- 1.030 | 0.989- 0.993 | 1.037- 1.055 | 1.020 1.035 |
| Color, max (APHA) | 10 | 15 | 10 | 10 | 50 | 50 |
| Odor | M | M | M | M | C | C |
| Suspended Matter | F | F | F | F | F | F |
| Boiling Range (°C) | | | | | | |
| Initial boiling point, min | 123.5 | 191 | 190 | 198 | 220 | 225 |
| 5%, min | — | — | — | — | 230 | 235 |
| 95%, max | — | — | 200 | — | — | — |
| Dry point, max | 125.5 | 198 | 205 | 205 | — | — |

M = Mild N = Substantially none C = Characteristic F = Substantially Free

(continued)

Table 11.8: (continued)

Olin offers three propylene glycol monomethyl ethers:
Poly-Solv[®]* MPM, propylene glycol monomethyl ether
 $\text{CH}_3(\text{OC}_3\text{H}_6)\text{OH}$

Poly-Solv DPM, dipropylene glycol monomethyl ether
 $\text{CH}_3(\text{OC}_3\text{H}_6)_2\text{OH}$
Poly-Solv TPM, tripropylene glycol monomethyl ether
 $\text{CH}_3(\text{OC}_3\text{H}_6)_3\text{OH}$

| | Specifications | | | Typical Physical Properties | | | |
|-----------------------------------------------|----------------|--------|--------------------|--------------------------------------------|---------------------|----------|----------|
| | MPM | DPM | TPM | MPM | DPM | TPM | |
| Acidity, as acetic acid, max (% by weight) | 0.01 | 0.01 | 0.01 | Boiling Point @ 760 mm Hg (°C) | 120 | 187 | 242 |
| Water, max (% by weight) | 0.1 | 0.1 | — | Flash Point ^c (°C) | 32 | 78 | 107 |
| Specific Gravity @ 20/20°C | 0.922– | 0.953– | 0.964– | (°F) | 89 | 172 | 225 |
| | 0.925 | 0.957 | 0.976 ^a | Molecular Weight | 90.1 | 148.2 | 206.3 |
| Color, max (APHA) | 10 | 15 | 15 | Pour Point (°C) | –97 | –83 | –78 |
| Suspended Matter | S ^b | S | S | Refractive Index, n _D @ 25°C | 1.4036 ^d | 1.419 | 1.428 |
| Boiling Range | | | | Solubility in Water | Complete | Complete | Complete |
| @ 760 mm Hg (°C) | | | | Specific Gravity @ 20/20 | 0.923 | 0.954 | 0.969 |
| Initial Boiling Point, min | 119 | 180 | 236 | Vapor Pressure @ 20°C (mm Hg) | 12.5 | 0.4 | 0.02 |
| Dry Point, max | 125 | 196 | 251 | Viscosity @ 20°C (cs) | 1.9 | 3.9 | 6.1 |

^a@ 25/25°C^b= Substantially free^cPensky Martin Closed Flask Test^d@ 20°C


Table 11.9: Union Carbide Glycol Ethers (19)

| Ethylene Oxide, moles | Alcohol | | | | |
|--------------------------|------------------------------------------|-----------------------------------------|---------------------------------------|-----------------------------------------|----------------------------------------|
| | Methanol | Ethanol | Propanol | Butanol | Hexanol |
| 1 | Methyl CELLOSOLVE Solvent | CELLOSOLVE Solvent | Propyl CELLOSOLVE Solvent | Butyl CELLOSOLVE Solvent | Hexyl CELLOSOLVE Solvent |
| | (Ethylene Glycol Monomethyl Ether) | (Ethylene Glycol Monoethyl Ether) | (Ethylene Glycol Monopropyl Ether) | (Ethylene Glycol Monobutyl Ether) | (Ethylene Glycol Monohexyl Ether) |
| | CAS* 109-86-4 | CAS 110-80-5 | CAS 2807-30-9 | CAS 111-76-2 | CAS 112-25-4 |
| 2 | Methyl CARBITOL Solvent | CARBITOL Solvent | | Butyl CARBITOL Solvent | Hexyl CARBITOL Solvent |
| | (Diethylene Glycol Monomethyl Ether) | (Diethylene Glycol Monoethyl Ether) | | (Diethylene Glycol Monobutyl Ether) | (Diethylene Glycol Monohexyl Ether) |
| | CAS 111-77-3 | CAS 111-90-0 | | CAS 112-34-5 | CAS 112-59-4 |
| 3 | Methoxytriglycol | Ethoxytriglycol | | Butoxytriglycol | |
| | (Triethylene Glycol Monomethyl Ether) | (Triethylene Glycol Monoethyl Ether) | | (Triethylene Glycol Monobutyl Ether) | |
| | CAS 112-35-6 | CAS 112-50-5 | | CAS 143-22-6 | |

*Chemical Abstract Service (CAS) Number

METHYLAL

Dimethoxymethane




Methylene Dimethyl Ether

Methylal is a low-boiling solvent, stable in the presence of alkalis and mild acids, and to high temperatures and pressures. It differs from other ethers in that it forms only minute amounts of peroxides. It will dissolve such synthetic resins as nitrocellulose, cellulose acetate and propionate, ethyl cellulose, vinyl, "Epons" and polystyrene, and also many of the natural gums and waxes. Methylal as a latent solvent is activated by the addition of esters, ketones or alcohols. Its evaporation rate, twice that of acetone, places this ether in a class with such solvents as acetone, methyl acetate and ethyl acetate in resin formulations.

Table 11.10: Physical Properties of Methylal (2)

| | |
|-------------------------------------------|--------------|
| Acidity (as acetic acid), % by wt. (max.) | 0.1 |
| Aldehydes, % by wt. (max.) | 0.1 |
| Appearance | water-white |
| Boiling point at 760 mm. Hg, °C. | 42.3 |
| Boiling range, °C. | 42.0 to 43.5 |
| Flash point (Cleveland open cup), °F. | 0 |
| Freezing range, °C. | -104.8 |
| Heat of combustion (Btu/lb.) at 20°C. | 10.97 |
| Refractive index (n_D at 25°C.) | 1.35335 |
| Melting point, °C. | -104.8 |
| Methylal content, % (min.) | 97 |
| Molecular weight | 76.1 |
| Specific gravity, 20/20°C. | 0.8601 |
| Surface tension at 25°, dynes/cm. | 21.1 |
| Vapor pressure at 20°C., mm. Hg | 330 |
| Viscosity at 20°C., centipoises | 0.325 |

ETHYLENE GLYCOLS**Table 11.11: Ethylene Glycol Monomethyl Ether (2)****METHYL CELLOSOLVE Solvent****POLY-SOLV EM****ARCOSOLV EM****Glycol Ether EM**

Ethylene glycol monomethyl ether is a colorless, limpid liquid of mild odor. It is miscible with water and with aliphatic and aromatic hydrocarbons. It is a solvent for essential oils, lignin, dammar, elemi, ester gum, kauri, mastic, rosin, sandarac, shellac, Zanzibar, nitrocellulose, cellulose acetate, alcohol-soluble dyes and many synthetic resins. Its solvency for cellulose esters is augmented when a ketone or a halogenated hydrocarbon is added. The uses for methyl "Cellosolve" are as a solvent in quick-drying varnishes and enamels, in conjunction with aliphatic, aromatic and halogenated hydrocarbons, alcohols and ketones; in solvent mixtures and thinners for lacquers and dopes; in the manufacture of synthetic resin plasticizers and as a penetrating and leveling agent in dyeing processes, especially in the dyeing of leather, animal and vegetable fibers. Other uses are as a fixative in perfumes and as a solvent in odorless nail-polish lacquers. "Dowanol EM" should not be added to nitrocellulose lacquers containing coumarone resins or ester gum because it will cause incompatibility between these substances.


(continued)

Table 11.11: (continued)

| | |
|------------------------------------------|----------|
| Acidity (as acetic acid) % by wt. (max.) | 0.01 |
| Boiling point at 760 mm. Hg, °C. | 124.2 |
| Color (APHA, max.) | 15 |
| Coefficient of expansion at: | |
| 20°C. | 0.00095 |
| 55°C. | 0.00099 |
| Flash point (Cleveland open cup), °F. | 115 |
| Freezing range, °C. | -85.1 |
| Heat of vaporization (Btu/lb.) | 239 |
| Refractive index (n_D at 25°C.) | 1.4021 |
| Molecular weight | 76.09 |
| Specific gravity, 20/20°C. | 0.9663 |
| Specific heat (average) cal./°C. | 0.534 |
| Surface tension at 25°C., dynes/cm. | 30.8 |
| Solubility: | |
| in water at 20°C. | complete |
| water in at 20°C. | complete |
| Vapor pressure at 20°C., mm. Hg | 9.7 |
| Viscosity: | |
| at 25°F., centipoises | 1.53 |
| at 60°F., centipoises | 0.85 |
| Weight per gal. at 20°C., lb. | 8.01 |

Table 11.12: Ethylene Glycol Monoethyl Ether (2)

CELLOSOLVE Solvent
ARCOSOLV EE
Glycol Ether EE




This colorless liquid has a mild and agreeable odor and combines a low evaporation rate with a strong solvent action. It is miscible in all proportions with acetone, benzene, carbon tetrachloride, ethyl ether, methanol and water. It has a powerful solvent action on nitrocellulose and alkyd resins and an extremely high dilution ratio with coal-tar hydrocarbons. This solvent will tolerate 4.9 times its own volume of toluene before the mixture will cease to dissolve nitrocellulose, while butyl acetate will tolerate only 2.9 times its volume.

| | | | |
|-------------------------------------------|-------------|-------------------------------------|--------|
| Acidity (as acetic acid), % by wt. (max.) | 0.01 | Specific gravity, 25/25°C. | 0.9311 |
| Appearance | water-white | Specific heat (average) cal./°C. | 0.53 |
| Boiling point at 760 mm. Hg, °C. | 134.7 | Surface tension at 25°C., dynes/cm. | 28.2 |
| Fire point (open cup), °F. | 115 | Vapor pressure at 25°C., mm. Hg | 5.3 |
| Flash point (Cleveland open cut), °F. | 115 | Viscosity: | |
| Freezing range, °C. | -59 | at 25°C., centipoises | 1.84 |
| Refractive index (n_D at 20°C.) | 1.4076 | at 60°C., centipoises | 0.94 |
| Molecular weight | 90.1 | Weight per gal. at 20°C., lb. | 7.72 |

Table 11.13: Ethylene Glycol Dimethyl Ether (21)

MONOGLYME



| | | | |
|----------------------------------|--------|--------------------------------|--------|
| Molecular Weight | 90.12 | Surface Tension, dynes/cm 20°C | 22.9 |
| Boiling Point, °C, 760 mm Hg | 85.2 | Specific Heat, cal/g/°C | 0.438 |
| Freezing Point, °C | -69.0 | Auto Ignition, °C | 205 |
| Specific Gravity, 20°/20°C | 0.8683 | Vaporization Heat, Kcal/mol | 6.7 |
| Weight per Gallon, lb 20°C | 7.24 | Combustion Heat, Kcal/mol | 602 |
| Vapor Pressure, mm Hg/20°C | 54 | Formation Heat, Kcal/mol | 118 |
| Volatility, n-Butylacetate = 100 | 499 | Flash Point, °C, closed cup | -6 |
| Viscosity, cp 20°C | 1.1 | Refractive Index, at 20°C | 1.3792 |

Table 11.14: Ethylene Glycol Diethyl Ether (2)

| ETHYL GLYME | | $C_2H_5OCH_2CH_2OC_2H_5$ | |
|---------------------------------------|--------|---------------------------------|--------|
| Boiling point at 760 mm. Hg, °C. | 121.4 | Specific gravity, 20/20°C. | 0.8417 |
| Flash point (Cleveland open cup), °F. | 80 | Vapor pressure at 20°C., mm. Hg | 9.4 |
| Freezing range, °C. | -74 | Viscosity at 20°C., centipoises | 0.65 |
| Refractive index (n_D at 25°C.) | 1.3922 | Weight per gal. at 20°C., lb. | 7.01 |
| Molecular weight | 118.2 | | |

Table 11.15: Ethylene Glycol Monopropyl Ether (19)

| Propyl CELLOSOLVE Solvent ARCOSOLV EP | | | Glycol Ether EP EKTASOLVE EP | | | | |
|------------------------------------------|-------------------|----------------------------------|---------------------------------|--------------------|-----------------------------------------|-----------------------------------|---------------------|
| Solvent | Formula | Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F(a) | Vapor Pressure, mm Hg | |
| Propyl CELLOSOLVE Solvent | | 104.15 | 151.1 | -90(c) | 135 | 1.71 | |
| Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
| | | | In Water | Water In | | Neat Product | 25% Aq. Solution(b) |
| 0.913 | 7.60 | 0.00095 | Complete | Complete | 21 | 26.3 | 32.3 |

- (a) Tag Closed Cup
 (b) All solutions are percent by volume
 (c) Sets to glass below this temperature

Table 11.16: Ethylene Glycol Monobutyl Ether (2)

| Butyl CELLOSOLVE DOWANOL EB EKTASOLVE E ARCISIKV EB Glycol Ether EB | | $HOCH_2CH_2OC_4H_9$ |
|---------------------------------------------------------------------------------|--|---------------------|
|---------------------------------------------------------------------------------|--|---------------------|

Ethylene glycol monobutyl ether is colorless liquid, miscible in all proportions with many ketones, ethers, alcohols, aromatic paraffin and halogenated hydrocarbons. More specifically, it mixes in all proportions with acetone, benzene, carbon tetrachloride, ethyl ether, n-heptane and water. Because of its excellent solvency, low evaporation rate and high dilution ratios, it is used as a solvent in the manufacture and formulation of lacquers, enamels, inks and varnishes, employing such resins as alkyd, phenolic, nitrocellulose, maleic modified, styrene and epoxy. In lacquers butyl "Cellosolve" imparts a slow evaporation rate, strengthens bluish resistance, heightens gloss, improves flow-out and helps prevent orange peel. Hot spray lacquers usually contain about 10% of "Dowanol" EB based on the solvent-diluent weight.

| | | | |
|-------------------------------------------|-------------|-------------------------------------|-------|
| Acidity (as acetic acid), % by wt. (max.) | 0.01 | Molecular weight | 118.2 |
| Appearance | water-white | Specific gravity, 25/25°C. | 0.899 |
| Boiling point at 760 mm. Hg, °C. | 170.6 | Specific heat (average), cal./°C. | 0.54 |
| Fire point (open cup), °F. | 165 | Surface tension at 25°C., dynes/cm. | 27.4 |
| Flash point (Cleveland open cup), °F. | 165 | Vapor pressure at 75°C., mm. Hg | 0.88 |
| Freezing range, °C. | -40 | Viscosity at 25°C., centistokes | 2.83 |
| Heat of vaporization, Btu/lb. | 88.4 | Weight per gal. at 20°C., lb. | 7.48 |
| Refractive index (n_D at 25°C.) | 1.417 | | |

Table 11.17: Water Solubility of Ethylene Glycol n-Butyl Ether (23)


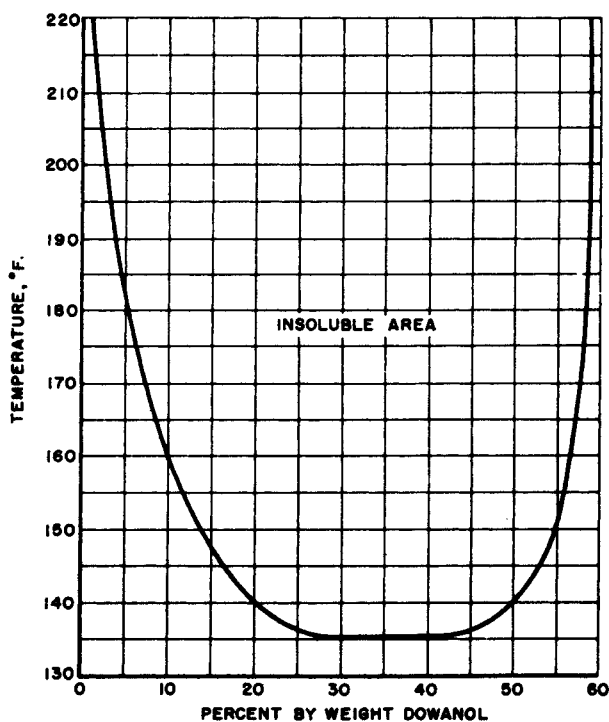


Table 11.18: Ethylene Glycol Monoisobutyl Ether (41)



Ethylene glycol monoisobutyl ether is a high boiling ether solvent for alkyd phenolic, malic, epoxy, alcohol-soluble butyrate, and ethyl cellulose nitrate resins.


Specifications

| | | | |
|------------------------------------|-------------|------------------|------------------------------------|
| Color (Pt-Co Scale), ppm, max | 10 | Water, wt %, max | 0.20 |
| Specific Gravity, 20°/20°C | 0.891-0.894 | Appearance | Free from insoluble matter or haze |
| Boiling Range, 760 mm, °C | | Odor | Mild, characteristic, nonresidual |
| Initial boiling point, min | 158.0 | | |
| Dry point, max | 162.0 | | |
| Acidity, as acetic acid, wt %, max | 0.01 | | |

(continued)

Table 11.18: (continued)

| Typical Properties | |
|-------------------------------------------------------------------|----------------------------|
| Molecular Weight (C ₆ H ₁₄ O ₂) | 118.17 |
| Evaporation Rate (n-butyl acetate = 1) | 0.1 |
| Weight/Vol. 20°C, | |
| lb/gal. (U. S.) | 7.40 |
| kg/liter | 0.89 |
| lb/gal. (Imperial) | 8.88 |
| Solubility, 20°C, wt % | |
| In water | Complete |
| Water in | Complete |
| Dilution Ratio, toluene | 3.1 |
| VM & P naphtha | 1.6 |
| Refractive Index, 20°C | 1.4168 |
| Vapor Pressure, 163°C, mm Hg | 752 |
| Flash Point, Tag Closed Cup, °F (°C) | 136 (58) |
| Tag Open Cup, °F (°C) | 145 (63) |
| Fire Point, °F (°C) | 146 (63) |
| Flammable Limits in Air, % by volume | |
| Lower | 1.21 |
| Upper | 9.4 |
| Autoignition Temperature (ASTM D-2155), °F (°C) | 540 (282) |
| NFPA Classification 30: | Flammable Liquid, Class II |
| ICC Labels Required | None |
| Bureau of Explosives Classification | Nonhazardous Liquid |

Table 11.19: Ethylene Glycol Dibutyl Ether (2)

This glycol diether is a colorless liquid. It is completely miscible with acetone, ethyl alcohol, ethyl acetate, isopropyl ether, heptane, ethylene dichloride and castor oil. Because of its being a good solvent for metallic reagents, it is particularly suitable for the Grignard type of reaction. It is also a solvent for inorganic halides and chlorosilanes, and is therefore used in silicone rubber formulations and in the extraction of aliphatic acids from dilute aqueous solutions.


| | |
|------------------------------------|---------|
| Acidity (as acetic acid), % by wt. | 0.01 |
| Boiling point, °C. | |
| 760 mm. | 203.6 |
| 50 mm. | 117 |
| 10 mm. | 83 |
| ΔBP/ΔP, °C./mm. Hg | 0.056 |
| Coefficient of expansion at 55°C. | 0.00105 |
| Distillation at 760 mm., °C. | |
| Initial BP, min. | 195 |
| DP, max. | 208 |
| Flash point (open cut), °F. | 185 |
| Freezing point, °C. | -69.1 |

Table 11.19: (continued)

| | |
|------------------------------------------|---------|
| Heat of vaporization (Btu/lb. at 1 atm.) | 118 |
| Molecular weight | 174.28 |
| Refractive index (n_D at 20°C.) | 1.4131 |
| Solubility, % by wt. at 20°C. | |
| in water | 0.2 |
| water in | 0.6 |
| Specific gravity, 20/20°C. | 0.8374 |
| $\Delta SG/\Delta T$. | 0.00085 |
| Specific heat at 20°C. | 0.480 |
| lb./gal. at 60°F. | 7.0 |
| Vapor pressure, mm. Hg at 20°C. | 0.09 |


Table 11.20: Ethylene Glycol Monophenyl Ether (23)

DOWANOL EPh




Ethylene glycol monophenyl ether is a colorless, high-boiling, nonhygroscopic, water-immiscible liquid with a faint rose-like odor.

| | |
|------------------------------------------------------------------------------|-------|
| Molecular Weight | 138.2 |
| Freezing Point, °F | 51 |
| Boiling Point, 760 mm Hg, °C | 245 |
| 10 mm Hg, °C | 131.3 |
| Vapor Pressure @ 20°C, mm Hg | 0.03 |
| Specific Gravity @ 25/25°C | 1.104 |
| Viscosity, centistokes, 25°C | 20.5 |
| 60°C | 4.3 |
| Flash Point, °F (TCC) | 260 |
| Specific Heat, (cal/g/°C) @ 25°C | 0.52 |
| Surface Tension, (dynes/cm) | |
| 25°C | 42 |
| 75°C | 38 |
| Heat of Vaporization, (cal/g) @ 760 mm Hg | 90.2 |
| Thermal Conductivity, $K \times 10^4$ (cal/cm ² sec °C/cm) @ 60°C | 3.86 |
| Pounds/Gallon @ 25°C | 9.20 |
| Phenol content, max. % | 0.5 |

Table 11.21: Ethylene Glycol Monobenzyl Ether (2)

Ethylene glycol monobenzyl ether is a water-white liquid which will dissolve a large number of organic substances among which are oils, fats, greases, some vinyl resins, dewaxed damar, rosin, ester gum, etc. It is used principally as a high boiling solvent in lacquers, inks, and textile dyeing.

| | |
|---------------------------------------------------------------|------------------|
| Acidity (as acetic acid), % by wt. (max.) | 0.010 |
| Boiling point at 760 mm. Hg, °C. | 255.9 |
| Distillation range at 760 mm. Hg, °C. | 248 to 260 |
| Flash point, °F. | 265 |
| Specific gravity at 20/20°C. | 1.0670 to 1.0720 |
| Solubility in water at 20°C., % by wt. | 0.4 |
| Solubility of water in benzyl "Cellosolve" 20°C., % by wt. | 18 |
| Vapor pressure at 20°C., mm. Hg | 0.02 |
| Weight per gal. at 20°C., lb. | 8.90 |

Table 11.22: Terpinyl Ethylene Glycol Ether (2)

Terpinyl ethylene glycol ether is a light-colored liquid used in enamels, inks, paints, and varnish.

| | |
|-------------------------------------------|-------------|
| Aniline point | Below -20°C |
| Color (Lovibond 500 Amber Series Glasses) | 3.0 |
| Distillation range (ASTM) 5% | 248.0°C |
| 10% | 252.0°C |
| 30% | 295.0°C |
| 50% | 263.5°C |
| 70% | 268.0°C |
| 90% | 278.0°C |
| 95% | 284.0°C |
| Flash point (Cleveland open cup) | 284°F |
| Freezing point | Below -10°C |
| Kauri butane solvency value | Infinite |
| Moisture | 0.05% |
| Refractive index at 20°C | 1.4786 |
| Specific gravity at 15.5/15.5°C | 0.9813 |
| Viscosity at 25°C (Ubbelohde) | 44.6 cp |

Table 11.23: Ethylene Glycol Butylphenyl Ethers (2)

| | I | II |
|------------------------------------------------|---------------|-------------------|
| I. - Ethylene Glycol p-sec-Butylphenyl Ether | | $C_{12}H_{18}O_2$ |
| II. - Ethylene Glycol p-tert-Butylphenyl Ether | | $C_{12}H_{18}O_2$ |
| Boiling point, °F. | 313 to 322/10 | 311 to 350/10 |
| Flash point (Cleveland open cup), °F. | 300 | 315 |
| Freezing range, °F. | below -4 | 54 |
| Fire point, °F. | 320 | 325 |
| Molecular weight | 194.3 | 194.3 |
| Specific gravity, 77/77°F. | 1.008 | 1.016 |
| Solubility (g./100 grams water) | 0.1 | 0.1 |
| Viscosity at 77°F., centistokes 140°F. | 64.6 8.8 | 120.7 11.6 |

Table 11.24: Ethylene Glycol Monohexyl Ether (19)

Hexyl CELLOSOLVE Solvent
ARCOSOLV EH

| Solvent | Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg | Surface Tension at 25°C, dynes/cm | | |
|--------------------------|--------------------------------|----------------------|-----------------------|-----------------------------------|-----------------------------|--------------------------------------|------------------------------------|--------------------------------------------------|
| | | | | | | Heat Product | 25% Aq. Solution ^(b) | |
| Hexyl CELLOSOLVE Solvent | 146.23 | 208.1 | -50 | 179 | 0.051 | | | |
| | | | | | | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) |
| | | | | | | In Water | Water In | |
| | 0.889 | 7.40 | 0.00086 | 0.99 | 18.8 | 0.82 | 30.3 | 28.5 ^(c) |

(a) Tag Closed Cup

(b) All solutions are percent by volume

(c) 1% solution

Table 11.25: Ethylene Glycol Ethyl Hexyl Ether (13)

SOLV EEH
ARCOSOLV EEH
EKTASOLVE EEH

| Product Name | Chemical Abstract Service Number | Evaporation Rate n-BuAc ¹ | Specific Gravity, @20/20°C | lb/gal @20°C | Distillation Range, °C | Viscosity cP 8% RS 1:2 sec N.C. @ 25°C | Dilution Ratio | | Flash Point, TCC; F |
|--------------|----------------------------------------|-----------------------------------------|-------------------------------|-----------------|---------------------------|----------------------------------------------|----------------|------------------------------|------------------------|
| | | | | | | | Toluene | Special Naphthoils (VM&P) | |
| Solv EEH | Mixture | 0.003 | 0.892 | 7.42 | 224-275 | Ins. | — | — | 208* |


*Seta Closed-Cup

| Solvent Constants | | | Solubility @20°C | | | | | | | | DOT Hazard Class | NFPA Ratings H-F-R | HMIS Ratings H-F-R | RQ (lbs.) |
|-------------------------|---------------------|------------------|----------------------|----------------------|--------------------------------|-------------------------------------|-------------------------------|-----------------------------------------|------|-------|------------------------|--------------------------|--------------------------|--------------|
| Solubility Parameter | Hydrogen Bonding | Dipole Moment | Weight % In Water | Weight % In Water | Blush Resistance %RH @ 80°F | Electrical Resistance Megohms | Vapor Pressure mm Hg @20°C | Coefficient of Expansion (Per °C) | | | | | | |
| 9.2 | 16.3 | 1.2 | 0.2 | 6.2 | — | <0.3 | 0.08 | 0.0009 | N-HL | 0-1-0 | 1*-1-0 | — | | |

*may be chronic health effects
(see MSDS)

Table 11.26: Diethylene Glycol (2)

Diglycol



This hygroscopic glycol is a clear colorless, odorless and stable liquid. It is also slightly viscous, noncorrosive and non-volatile. Because of its ether and alcohol group, diethylene glycol exhibits chemical properties characteristic of both primary alcohols and ethers. Its boiling point is considerably higher than that of ethylene glycol, and its solvent is greater. Diethylene glycol is miscible with water, ethers, lower aliphatic alcohols, aldehydes and ketones and is partially soluble in benzene, carbon tetrachloride, monobenzene, orthodichlorobenzene and toluene. It dissolves many dyes, resins, oils, nitrocellulose and many organic substances. Because of its solvent power, low volatility and hygroscopicity, it is used in textile lubricants, cutting oils, dry cleaning soap, printing inks, steam-set inks, and nongrain wood stains. In the textile industry diethylene glycol is used as a conditioning agent for wool, rayon, and cotton. As a solvent for dyes it makes a valuable assistant in dyeing and printing. The high hygroscopicity of diethylene glycol makes it an efficient softening agent for tobacco, paper, synthetic sponges, glues and casein. Diethylene glycol is especially useful in the dehydration of natural gas. A mixture of diethylene glycol and monoethanolamine will remove moisture, hydrogen sulfide and carbon dioxide from natural gas.

| | |
|-----------------------------------------------------------|------------------------|
| Acidity (as acetic acid), % by wt. (max.) | 0.02 |
| Boiling point at 760 mm. Hg, °C. | 244.5 |
| Coefficient of expansion at 20°C. | 0.000635/°C. |
| Density (true) at 20°C., g./°C. | 1.1161 |
| Distillation range at 760 mm. Hg | |
| Below 320°C. | none |
| Below 240°C. | not over 20% |
| Below 250°C. | not less than 85% |
| Below 270°C. | not less than 95% |
| Electrical conductivity (reciprocal ohms) | 0.586×10^{-6} |
| Fire point, °C. | 146 (approx.) |
| Flash point (Cleveland open cup), °C. | 143.3 (approx.) |
| Freezing point, °C. | -8 |
| Heat of combustion (constant pressure) at 20°C., kcal/mol | 567 |
| Heat of formation (constant pressure), kcal/mol | 148.42 |
| Heat of vaporization at 760 mm. Hg and 244.5°C. | |
| Btu/lb. | 270 |
| cal./g. | 150 |
| Ignition temperature in air, °C. | 351 |
| Spontaneous ignition temperature | 412.8 |
| Molecular weight | 106.12 |
| Refractive index (n_D at 20°C.) | 1.4475 |
| Specific gravity at 20/20°C. | 1.1185 |
| Specific heat at 20°C., cal./g./°C. | 0.5509 |
| Surface tension at 25°C., dynes/cm. | 48.5 |
| Vapor pressure, mm. Hg | |
| 20°C. | 0.015 |
| 130°C. | 8.0 |
| 180°C. | 96.0 |
| Viscosity (absolute), in centipoises | |
| 15°C. | 50.0 |
| 20°C. | 38.0 |
| 25°C. | 30.0 |
| Water, % by wt. (max.) | 0.30 |
| Weight per gal. at 20°C., lb. | 9.308 |

Table 11.27: Diethylene Glycol Monomethyl Ether (2)

| | |
|-----------------|-------------------------------------------------------------------------------------|
| DOWANOL DM | |
| EKTASOLVE DM | |
| Methyl CARBITOL | |
| POLY-SOLV DM | HOCH ₂ CH ₂ OCH ₂ CH ₂ OCH ₃ |
| SOLV DM | |
| ARCOSOLV DM | |
| Glycol Ether DM | |

Diethylene glycol monomethyl ether is a colorless, stable hygroscopic liquid with an agreeable odor. It is completely miscible with water, ketones, alcohol, ethers, aromatic hydrocarbons and halogenated hydrocarbons. More specifically, it is miscible with acetone, benzene, carbon tetrachloride, ethyl ether, methanol and water. It is a solvent for dyes, oils, fats, waxes, many natural and synthetic resins, nitrocellulose and cellulose acetate. It is used as a high-boiling solvent in such formulations as printing inks and pastes, stamp pad inks, textile dye pastes, lacquers, and synthetic resin coatings. Its presence in lacquers eases brushability and flow-out, and minimizes lifting of undercoats.

| | | | |
|--------------------------------------------|-------------|-------------------------------------|-------|
| Acidity (as acetic acid), % by wt. (max.) | 0.02 | Specific gravity, 25/25°C. | 1.018 |
| Appearance | water-white | Specific heat (average), cal./°C. | 0.54 |
| Boiling point at 760 mm. Hg, °C. | 194.1 | Surface tension at 25°C., dynes/cm. | 34.8 |
| Fire point (open cup), °F. | 200 | Vapor pressure at 75°C., mm. Hg | 0.18 |
| Flash point (Cleveland open cup), °F. | 200 | Viscosity at 20°C., centistokes | 3.87 |
| Freezing range, °C. | -50 | 25°C. | 3.47 |
| Heat of vaporization, Btu/lb. | 163 | 60°C. | 1.64 |
| Refractive index (n _D at 20°C.) | 1.424 | Weight per gal. at 20°C., lb. | 8.47 |
| Molecular weight | 120.2 | | |

Table 11.28: Diethylene Glycol Monoethyl Ether (2)

| | |
|--------------------------|---------------------------------------------------------------------------------------------------|
| CARBITOL Solvent | |
| EKTASOLVE DE | HOCH ₂ CH ₂ OCH ₂ CH ₂ OC ₂ H ₅ |
| POLY-SOLV DE Low Gravity | |
| SOLV DE | |

Diethylene glycol monoethyl ether is a colorless, stable, hygroscopic liquid of a mild, pleasant odor. It is completely miscible with water, alcohols, ethers, ketones, aromatic and aliphatic hydrocarbons, and halogenated hydrocarbons. Owing to the fact that it contains an ether-alcohol-hydrocarbon group in the molecule, it has the power to dissolve a wide variety of substances such as oils, fats, waxes, dyes, camphor and natural resins like copal, kauri, mastic, rosin, sandarac, shellac, as well as several types of synthetic resins. It is used as a solvent in synthetic resin coating compositions, and in lacquers, where high-boiling solvents are desired.

| | | | |
|--------------------------------------------|-------|-------------------------------------|-------|
| Acidity (as acetic acid), % by wt. (max.) | 0.02 | Molecular weight | 134.2 |
| Boiling point at 760 mm. Hg, °C. | 202.0 | Specific gravity, 25/25°C. | 0.986 |
| Fire point (open cup), °F. | 210 | Specific heat (average), cal./°C. | 0.54 |
| Flash point (Cleveland open cup), °F. | 205 | Surface tension at 25°C., dynes/cm. | 31.8 |
| Freezing range, °C. | -55 | Vapor pressure at 75°C., mm. Hg | 0.13 |
| Heat of vaporization, Btu/lb. | 84.5 | Viscosity at 20°C., centistokes | 3.78 |
| Refractive index (n _D at 25°C.) | 1.425 | Weight per gal. at 20°C., lb. | 8.20 |

Table 11.29: Diethylene Glycol Monoethyl Ether/Ethylene Glycol (41)

EKTASOLVE DE-HG

| | Evaporation Rate n-BuOAc = 1 | Lb/ Gal @ 20°C | Color Pt-Co Max | Specific Gravity @ 20°/20°C | Acidity, as Acetic Acid Max Wt % | Boiling Range °C | Freezing Point °C | Flash Point TCC °C (°F) | Assay Min Wt % |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------|-----------------------|-----------------------------------|----------------------------------------|------------------------|-------------------------|-------------------------------|----------------------|
| EKTASOLVE DE-HG Solvent* (Diethylene Glycol Monoethyl Ether/Ethylene Glycol) [C ₂ H ₅ (OC ₂ H ₄) ₂ OH][HOCH ₂ CH ₂ OH] | <0.01 | 8.56 | 10 | 1.027 | 0.01 | 190-205 | -70 | 96 (205) | — |

* High gravity solvent

Table 11.30: Diethylene Glycol Monobutyl Ether (2)ARCOSOLV DB
Glycol Ether DB

Diethylene glycol monobutyl ether is a colorless, high-boiling liquid. It is miscible in proportions with water, alcohol (methanol), ketones (acetone), ethers (ethyl ether), aromatic hydrocarbons (benzene), paraffinic hydrocarbons (n-heptane), and halogenated hydrocarbons (carbon tetrachloride). As it is an ether-alcohol type compound it possesses solvent action for many substances such as oils, dyes, gums, and natural and synthetic resins. It is used as a high-boiling solvent in nitrocellulose lacquers and other synthetic coatings, baking lacquers, flash-dry printing inks, and dye baths.

| | | | |
|-------------------------------------------|-------------|-------------------------------------|-------|
| Acidity (as acetic acid), % by wt. (max.) | 0.01 | Molecular weight | 162.2 |
| Appearance | water-white | Specific gravity, 25/25°C. | 0.952 |
| Boiling point at 760 mm. Hg, °C. | 230 | Specific heat (average), cal./°C. | 0.54 |
| Fire point (open cup), °F. | 240 | Surface tension at 25°C., dynes/cm. | 30.0 |
| Flash point (Cleveland open cup), °F. | 230 | Vapor pressure at 25°C., mm. Hg | 0.023 |
| Freezing range, °C. | -40 | Viscosity at 25°C., centistokes | 4.92 |
| Heat of vaporization, Btu/lb. | 74.3 | Weight per gal. at 20°C., lb. | 7.92 |
| Refractive index (n_D at 25°C.) | 1.430 | | |

Table 11.31: Diethylene Glycol Monopropyl Ether (19)EKTASOLV DP
SOLV DP
ARCOSOLV DP
Glycol Ether DP


| Solvent | | Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg | |
|---------------------------------|-------------------------|-------------------------------------------|--------------------------------|-----------------------|--------------------------------------------------|--------------------------------------|------------------------------------|
| Propyl CARBITOL Solvent | | 148.20 | 216.0 | -53 | 210 | 0.02 | |
| Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
| | | | In Water | Water In | | Neat Product | 25% Aq. Solution ^(b) |
| 0.969 | 8.06 | 0.00089 | Complete | Complete | 0.49 | 29.6 | 37.8 |

(a) Tag Closed Cup

(b) All solutions are percent by volume

Table 11.32: Diethylene Glycol Dimethyl Ether (2)

DIGLYME



Diethylene glycol dimethyl ether is a clear, water-white neutral liquid of faint, pleasant odor. This ether may be used as a solvent for alkali metal hydrides for use in such reactions as reduction, alkylation and condensation. It may also be used as a lacquer solvent.

| | | | |
|-------------------------------------------|-------------|-------------------------------------|--------|
| Acidity (as acetic acid), % by wt. (max.) | 0.015 | Specific gravity, 20/20°C. | 0.9451 |
| Appearance | water-white | Surface tension at 25°C., dynes/cm. | 27.0 |
| Flash point (Cleveland open cup), °F. | 168 | Vapor pressure at 100°C., mm. Hg | 3.0 |
| Freezing range, °C. | -68 | Viscosity at 20°C., centistokes | 2.0 |
| Refractive index (n_D at 20°C.) | 1.40778 | Weight per gal. at 20°C., lb. | 7.87 |
| Molecular weight | 134.2 | | |

Table 11.33: Diethylene Glycol Monoethyl Ether (Special Grade) (23)

CARBITOL Solvent
POLY-SOLV DE
Glycol Ether DE

| | |
|-------------------------------|---------|
| Boiling point, °C | 190-205 |
| Flash point (TCC), °F | 198 |
| Evaporation rate Bu Ac = 1.0 | 0.01 |
| Specific gravity 25°/25°C | 1.025 |
| Pounds per gallon 25°C | 8.52 |
| Viscosity, cs 25°C | 6.9 |
| Surface tension (dynes/cm) | 33.5 |
| Solvent constants | |
| Solubility parameter | 11.4 |
| Hydrogen bonding | 16.6 |
| Dipole moment (Debye) | 2.05 |
| Solubility in water ml/100 ml | ∞ |

Table 11.34: Diethylene Glycol Monohexyl Ether (19)

Hexyl CARBITOL Solvent

| Solvent | Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg | Solubility at 20°C, % by wt | | Surface Tension at 25°C, dynes/cm | |
|------------------------|---------------------------------|-------------------------|-------------------------------------------|-----------------------------------|--------------------------------------------------|--------------------------------|---------------------|--------------------------------------|------------------------------------|
| | | | | | | In Water | Water In | Neat Product | 25% Aq. Solution ^(b) |
| Hexyl CARBITOL Solvent | 190.28 | 259.1 | -40 | 271 | <0.01 | | | | |
| | Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | | Relative Evaporation Rate (nBuAc = 100) | | | | |
| | 0.935 | 7.78 | 0.00084 | 1.7 | 56.3 | 0.03 | 29.6 ^(c) | — | |


(a) Tag Closed Cup

(b) All solutions are percent by volume

(c) at 20°C


Table 11.35: Diethylene Glycol Divinyl Ether (19)

1,5-Bis(Vinyloxy)-3-Oxapentane



This vinyl ether is monomeric in character and is used as a chemical intermediate or as a crosslinking agent. Addition of isocyanic acid produces secondary diisocyanates. Divinyl ethers hydrolyze to the glycol and acetaldehyde. Chlorine or bromine add to the double bonds. Reaction with an alcohol in the presence of water produces a diacetal. Polymerization of divinyl ether of diethylene glycol with acidic catalysts produce crosslinked gels. Unsaturated polyesters, crosslinked with styrene, have been made noncorrosive to metals through use of divinyl ethers to reduce hydroxyl and acid numbers.


| | |
|---------------------|------------------|
| Boiling point, °C.: | |
| 10 mm. Hg | 81-82 |
| 12 mm. Hg | 85 |
| 50 mm. Hg | 115-116 |
| Density, 29°C. | 0.975 |
| Physical form | colorless liquid |
| Purity | 95% |
| Refractive index | 1.4441-1.4452 |
| Stabilizer | 0.01% |

Table 11.36: Diethylene Glycol Monoisobutyl Ether (41)

| Specifications | | | |
|--------------------------------------------------|-------|--------------------------------|------------------------------------|
| Color (Pt-Co Scale), ppm, maximum | 10 | Specific gravity, 20°/20°C | 0.945-0.949 |
| Acidity, as acetic acid, weight percent, maximum | 0.01 | Water, weight percent, maximum | 0.10 |
| Boiling Range, 760 millimeters, °C | | Appearance | Free from insoluble matter or haze |
| Initial boiling point, minimum | 217.0 | | |
| Dry point, maximum | 225.0 | | |

Table 11.37: Triethylene Glycol (2)

Triglycol



Triethylene glycol is a clear, colorless, viscous, stable liquid with a slightly sweetish odor. Because it has two ether and two hydroxyl groups its chemical properties are closely related to ethers and primary alcohols. It is a good solvent for gums, resins, nitrocellulose, steam-set printing inks and wood stains. With a low vapor pressure and a high boiling point, its uses and properties are similar to those of ethylene glycol and diethylene glycol. Because it is an efficient hygroscopic agent it serves as a liquid desiccant for removing water from natural gas. It is also used in air conditioning systems designed to dehumidify air.

| | |
|-----------------------------------------------------------|-----------------------------|
| Acidity (as acetic acid), % by wt. | 0.01 |
| Boiling point at 760 mm. Hg, °C. | 287.4 |
| Coefficient of expansion at 20°C. | 0.00069 |
| Density (true) at 20°C., g./°C. | 1.1242 |
| Fire point, °C. (approx.) | 173.9 |
| Flash point (Cleveland open cup), °C. (approx.) | 330.0 |
| Freezing point, °C. | -72 |
| Heat of combustion (constant pressure) at 20°C., kcal/mol | 850 |
| Heat for formation (constant pressure), kcal/mol | 192.9 |
| Heat of vaporization at 760 mm. Hg and 244.5°C., cal./g. | 179 |
| Spontaneous ignition temperature, °F. | 206 |
| Surface tension at 25°C., dynes/cm. | 45.2 |
| Vapor pressure, mm. Hg: | |
| 20°C. | 0.01 |
| 101°C. | 0.4 |
| 159°C. | 10 |
| 202°C. | 60 |
| Water | miscible in all proportions |
| Weight per gal. at 20°C., lb. | 7.37 |

Table 11.38: Triethylene Glycol Monomethyl Ether (66)

| POLY-SOLV TM | | CH ₃ OCH ₂ CH ₂) ₃ OH | | |
|--------------------------------------|----------|--------------------------------------------------------------------|--|--------|
| Physical Properties | | Specifications | | |
| Boiling Point (°C) | | Water, max | | |
| @ 760 mm Hg | 249 | (% by weight) | | 0.1 |
| @ 50 mm Hg | 152 | Acidity, as acetic acid | | |
| @ 10 mm Hg | 126 | (% by weight) | | 0.01 |
| Coefficient of Expansion | | Specific Gravity @ 20/20°C | | 1.037- |
| @ 20°C | — | | | 1.055 |
| @ 55°C | — | Color, max (APHA) | | 50 |
| Density @ 25°C (lb/gal) | 8.71 | Odor | | C |
| Flash Point, TCC (°C) | — | Suspended Matter | | F |
| (°F) | — | Boiling Range (°C) | | |
| Flash Point, COC (°C) | 118 | Initial boiling point, min | | 220 |
| (°F) | 245 | 5%, min | | 230 |
| Freezing Point (°C) | -55 | 95%, max | | — |
| (°F) | -67 | Dry point, max | | — |
| Heat of Vaporization @ 760 mm Hg | | | | |
| (joules/g) | 327.6 | | | |
| Molecular Weight | 164.20 | | | |
| Refractive Index @ 20°C | 1.4381 | | | |
| Solubility @ 20°C | | | | |
| <i>Poly-Solv</i> in water | Complete | | | |
| water in <i>Poly-Solv</i> | Complete | | | |
| Specific Gravity, apparent @ 20/20°C | 1.048 | | | |
| Specific Heat @ 20°C (joules/g-°C) | — | | | |
| Vapor Pressure @ 20°C (mm Hg) | <0.01 | | | |
| Viscosity, absolute @ 20°C (cp) | 7.5 | | | |

C = Characteristic F = Substantially Free

Table 11.39: Triethylene Glycol Monoethyl Ether (66)

| POLY-SOLV TE | | CH ₃ CH ₂ (OCH ₂ CH ₂) ₃ OH | | |
|--------------------------------------|----------|-------------------------------------------------------------------------------------|--|-------|
| Physical Properties | | Specifications | | |
| Boiling Point (°C) | | Water, max | | |
| @ 760 mm Hg | 256 | (% by weight) | | 0.1 |
| @ 50 mm Hg | 158 | Acidity, as acetic acid | | |
| @ 10 mm Hg | 130 | (% by weight) | | 0.01 |
| Coefficient of Expansion | | Specific Gravity @ 20/20°C | | 1.020 |
| @ 20°C | — | | | 1.035 |
| @ 55°C | — | Color, max (APHA) | | 50 |
| Density @ 25°C (lb/gal) | 8.50 | Odor | | C |
| Flash Point, TCC (°C) | — | Suspended Matter | | F |
| (°F) | — | Boiling Range (°C) | | |
| Flash Point, COC (°C) | 124 | Initial boiling point, min | | 225 |
| (°F) | 255 | 5%, min | | 235 |
| Freezing Point (°C) | -21 | 95%, max | | — |
| (°F) | -5.8 | Dry point, max | | — |
| Heat of Vaporization @ 760 mm Hg | | | | |
| (joules/g) | 299.8 | | | |
| Molecular Weight | 178.23 | | | |
| Refractive Index @ 20°C | 1.4376 | | | |
| Solubility @ 20°C | | | | |
| <i>Poly-Solv</i> in water | Complete | | | |
| water in <i>Poly-Solv</i> | Complete | | | |
| Specific Gravity, apparent @ 20/20°C | 1.022 | | | |
| Specific Heat @ 20°C (joules/g-°C) | — | | | |
| Vapor Pressure @ 20°C (mm Hg) | <0.01 | | | |
| Viscosity, absolute @ 20°C (cp) | 7.8 | | | |

C = Characteristic F = Substantially Free

Table 11.40: Triethylene Glycol Dimethyl Ether (21)

| TRIGLYME | $C_8H_{18}O_4$ |
|----------------------------------|--------------------|
| Molecular Weight | 178.22 |
| Boiling Point, °C 760 mm Hg | 216 |
| Freezing Point, °C | -45.0 |
| Specific Gravity, 20°/20°C | 0.9862 |
| Weight per Gallon, lb 20°C | 8.23 |
| Vapor Pressure, mm Hg/20°C | 0.02 |
| Volatility, n-butylacetate = 100 | (0.1 |
| Viscosity, cp 20°C | 3.8 |
| Surface Tension, dynes/cm 20°C | 29.4 |
| Specific Heat, cal/g/°C | 0.424 |
| Auto Ignition, °C | 195 |
| Heat of Vaporization, K cal/mol | 14.3 |
| Heat of Combustion, K cal/mol | 1191 |
| Heat of Formation, K cal/mol | 179 |
| Flash Point, °C closed cup | 111 |
| Refractive Index n_D at 20°C | 1.4224 |
| Appearance | Clear, colorless |
| Odor | Mild, non-residual |
| Solubility at 25°C | |
| In water | Complete |
| Water in | Complete |
| Organics* | |

*All glymes are miscible in all proportions in ethanol, acetone, benzene, diethyl ether and octane.

Table 11.41: Triethylene Glycol Monomethyl Ether/Highers (23)

DOWANOL TMH

| DOWANOL | CHEMICAL NAME | STRUCTURAL FORMULA | Molecular Weight | Boiling Pt. °C 760 mm Hg | Flash Point °F | Evap. Rate BuAc = 1.00 | Specific Gravity 25/25°C |
|---------|-----------------------------------------|--------------------------------------|------------------|--------------------------|------------------|------------------------|--------------------------|
| TMH | Triethylene Glycol Methyl Ether/Highers | $CH_3O(C_2H_4O)_nH$ (n = 3, 4, 5) | 173.0 (aver.) | 242.0 | 255 ³ | <<0.01 | 1.054 |

| Lb/Gal 25°C | Viscosity Centi-stokes 25°C | Vapor Pressure at 25°C (mm Hg) | Surface Tension (dynes/cm) | DILUTION RATIO | | SOLVENT CONSTANTS | | | |
|-------------|-----------------------------|--------------------------------|----------------------------|----------------|---------|------------------------------------|-------------------------------|-----------------------|-------------------------------|
| | | | | Toluene | Naphtha | Solubility Parameters ¹ | Hydrogen Bonding ² | Dipole Moment (Debye) | Solubility in Water ml/100 ml |
| 8.80 | 7.0 | <0.01 | 39.1 | 3.9 | 0.1 | 10.5 | 11.0 | — | ∞ |

¹ Solubility Parameters are useful as a guide in determining the ability of a solvent or solvent mixture to dissolve resins. A discussion of solubility parameters and the basis for these values are contained in an article by H.S. Burrell in the Spring 1955 issue of *Interchemical Review*.

² A discussion of the hydrogen bonding parameter is contained in an article by Allen A. Orr in the August 1975 issue of *Journal of Paint Technology*, Vol. 47, No. 607, pages 45-49. This particular article was the basis of the listed values of the hydrogen bonding parameter.

³ Pensky-Martens Closed Cup (PMCC)

Table 11.42: Triethylene Glycol Monobutyl Ether/Highers (23)

DOWANOL TBH

| DOWANOL | CHEMICAL NAME | STRUCTURAL FORMULA | Molecular Weight | Boiling Pt. °C 760 mm Hg | Flash Point °F | Evap. Rate BuAc = 1.00 | Specific Gravity 25/25°C | Lb/Gal 25°C |
|---------|----------------------------------------|----------------------------------------|------------------|--------------------------|------------------|------------------------|--------------------------|-------------------|
| TBH | Triethylene Glycol Butyl Ether/Highers | $C_4H_9O(C_2H_4O)_nH$ (n = 3, 4, 5) | 231.2 (aver.) | 283.0 | 285 ³ | <<0.01 | 0.996 | 8.30 ¹ |

| Viscosity Centi-stokes 25°C | Vapor Pressure at 25°C (mm Hg) | Surface Tension (dynes/cm) | DILUTION RATIO | | SOLVENT CONSTANTS | | | |
|-----------------------------|--------------------------------|----------------------------|----------------|---------|------------------------------------|-------------------------------|-----------------------|-------------------------------|
| | | | Toluene | Naphtha | Solubility Parameters ¹ | Hydrogen Bonding ² | Dipole Moment (Debye) | Solubility in Water ml/100 ml |
| 9.2 | <0.01 | 31.4 | 6.3 | 0.9 | 9.6 | 11.1 | — | ∞ |

¹ Solubility Parameters are useful as a guide in determining the ability of a solvent or solvent mixture to dissolve resins. A discussion of solubility parameters and the basis for these values are contained in an article by H.S. Burrell in the Spring 1955 issue of *Interchemical Review*.

² A discussion of the hydrogen bonding parameter is contained in an article by Allen A. Orr in the August 1975 issue of *Journal of Paint Technology*, Vol. 47, No. 607, pages 45-49. This particular article was the basis of the listed values of the hydrogen bonding parameter.

³ Pensky-Martens Closed Cup (PMCC)

Table 11.43: Tetraethylene Glycol (2)

Tetraethylene glycol is a high-boiling, clear liquid of low volatility. It is completely miscible with water and a wide variety of organic solvents. For certain aliphatic hydrocarbons, it has a very slight affinity. Tetraethylene glycol is used as a coupling agent for blending water-soluble and water-insoluble compounds in such formulations as lubricants, glues, cork and textile products, etc.

| | |
|-------------------------------------------|---------|
| Acidity (as acetic acid), % by wt. (max.) | 0.01 |
| Ash, % by wt. (max.) | 0.01 |
| Boiling point: | |
| 760 mm. Hg, °F. | 586.0 |
| 760 mm. Hg, °C. | 307.8 |
| Color, Pt-Co scale (max.) | 200 |
| Fire point, (Cleveland open cup), °F. | 375 |
| Flash point (Cleveland open cup), °F. | 365 |
| Freezing range, °F. | 22 |
| Molecular weight | 194.2 |
| Refractive index (n_D at 25°C.) | 1.457 |
| Specific gravity, 20/20°C. | 1.125-7 |
| Specific heat at 77°F. (25°C.) | 0.52 |
| Surface tension at 25°C., dynes/cm. | 45 |
| Vapor pressure at 25°C., mm. Hg | 0.01 |
| Viscosity (absolute) in centistokes: | |
| 25°C. | 39.9 |
| 60°C. | 10.2 |
| Water, % by wt. | 0.20 |
| Weight per gal. at 25°C., lb. | 9.34 |

Table 11.44: Triethylene Glycol Dimethyl Ether (21)

| | |
|----------------------------------|-------------------------|
| TRIGLYME | $C_8H_{18}O_4$ |
| Molecular Weight | 222.28 |
| Boiling Point, °C 760 mm Hg | 275 |
| Freezing Point, °C | -29.7 |
| Specific Gravity, 20°/20°C | 1.0132 |
| Weight per Gallon, lb 20°C | 8.45 |
| Vapor Pressure, mm Hg/20°C | 0.01 |
| Volatility, n-butylacetate = 100 | <0.1 |
| Viscosity, cp 20°C | 4.1 |
| Surface Tension, dynes/cm 20°C | 33.8 |
| Specific Heat, cal/g/°C | 0.427 |
| Auto Ignition, °C | 215 |
| Heat of Vaporization, K cal/mol | 18.7 |
| Heat of Combustion, K cal/mol | 1480 |
| Heat of Formation, K cal/mol | 217 |
| Flash Point, °C closed cup | 141 |
| Refractive Index n_D at 20°C | 1.4330 |
| Appearance | Clear, colorless |
| Odor | Very mild, non-residual |
| Solubility at 25°C | |
| In water | Complete |
| Water in | Complete |
| Organics* | |

*All glymes are miscible in all proportions in ethanol, acetone, benzene, diethyl ether and octane.

PROPYLENE GLYCOLS

Table 11.45: Propylene Glycol Monomethyl Ether (2)

| | |
|-------------------------------------------|-----------------------------------------|
| ARCOSOLV PM | |
| DOWANOL PM | $\text{CH}_3\text{CHOCH}_2\text{OCH}_3$ |
| POLY-SOLV MPM | |
| Glycol Ether PM | |
| Acidity (as acetic acid), % by wt. (max.) | 0.02 |
| Appearance | water-white |
| Boiling point, 760 mm. Hg, °C. | 120.1 |
| Fire point (open cup), °F. | 100 |
| Flash point (Cleveland open cup), °F. | 100 |
| Freezing range, °F. | -142 |
| Refractive index (n_D at 20°C.) | 1.4021 |
| Molecular weight | 90.1 |
| Specific gravity, 20/20°C. | 0.919 |
| Specific heat (average), cal./°C. | 0.58 |
| Surface tension at 25°C., dynes/cm. | 27.7 |
| Vapor pressure at 20°C., mm. Hg | 10.9 |
| Viscosity at 20°C., centistokes | 1.75 |
| 75°C. | 0.70 |
| Weight per gal. at 20°C., lb. | 7.65 |

Table 11.46: Propylene Glycol Monophenyl Ether (2)

DOWANOL PPh

Typical Physical Properties

| | |
|-----------------------------------|-------|
| Molecular Weight | 152.2 |
| Boiling Point, °C 760 mm Hg | 242.7 |
| Boiling Point, °C, 10 mm Hg | 115.9 |
| Freezing Point, °F | 55 |
| Specific Gravity, 25/25°C | 1.063 |
| Pounds/ Gallon at 25°C | 8.80 |
| Viscosity, cs, 25°C | 23.2 |
| Flash Point, °F (TCC) | 260 |
| Specific Heat, 25°C, cal/gm/°C | 0.52 |
| Surface Tension, 25°C, dynes/cm | 38.1 |
| Refractive Index, 25°C | 1.522 |
| Solubility in Water, 25°C, g/100g | 1.1 |
| Vapor Pressure, 25°C, mm Hg | <0.1 |
| Color, APHA | <25 |

Table 11.47: Propylene Glycol Monopropyl Ether (19)

ARCOSOLV PNP

| Solvent | Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg | | |
|---------------------------|--------------------------|----------------------------------|-----------------------------|--------------------------------|-----------------------------------------|-----------------------------------|---------------------------------|
| Propyl PROPASOL Solvent | 118.18 | 149.8 | -80 ^(c) | 119 | 1.68 | | |
| Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
| | | | In Water | Water In | | Neat Product | 25% Aq. Solution ^(b) |
| 0.887 | 7.36 | 0.00104 | Complete | Complete | 22 | 27.0 | 30.4 |

(a) Tag Closed Cup

(b) All solutions are percent by volume

(c) Sets to glass below this temperature

Table 11.48: Propylene Glycol Monobutyl Ether (19)

ARCOSOLV PNB

| Solvent | Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg | | |
|---------------------------|--------------------------|----------------------------------|-----------------------------|--------------------------------|-----------------------------------------|-----------------------------------|---------------------------------|
| Butyl PROPASOL Solvent | 132.20 | 170.1 | -80 ^(c) | 138 | 0.56 | | |
| Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
| | | | In Water | Water In | | Neat Product | 25% Aq. Solution ^(b) |
| 0.884 | 7.32 | 0.00100 | 5.6 | 14.9 | 8.8 | 27.4 | 32.3 ^(d) |

(a) Tag Closed Cup

(b) All solutions are percent by volume

(c) Sets to glass below this temperature

(d) 5% solution

Table 11.49: Propylene Glycol tert-Butyl Ether (13)

SOLV PTB
ARCOSOLV PTB
Glyrol Ether PTB

| Product Name | Chemical Abstract Service Number | Evaporation Rate n-BuAc=1 | Specific Gravity, @20/20°C | lb/gal @20°C | Distillation Range, °C | Viscosity cP @% RS 1/2 sec H.C. @ 25°C | Dilution Ratio | | |
|--------------|----------------------------------|---------------------------|----------------------------|--------------|------------------------|----------------------------------------|----------------|--------------------------|--------------------|
| | | | | | | | Toluene | Special Naphthols (VM&P) | Flash Point, TCC;F |
| Solv PTB | 57018-52-7 | 0.25 | 0.870 | 7.27 | 145-155 | 3.8 | 2.3 | 1.2 | 113 |

| Solvent Constants | | | Solubility @20°C | | Blush Resistance %RH @ 80°F | Electrical Resistance Megohms | Vapor Pressure mm Hg @20°C | Coefficient of Expansion (Per °C) | DOT Hazard Class | NFPA Ratings H-F-R | HMIS Ratings H-F-R | RD (lbs.) |
|----------------------|------------------|---------------|-------------------|-------------------|-----------------------------|-------------------------------|----------------------------|-----------------------------------|------------------|--------------------|--------------------|-----------|
| Solubility Parameter | Hydrogen Bonding | Dipole Moment | Weight % In Water | Weight % In Water | | | | | | | | |
| 9.0 | 15.7 | 2.1 | 14.5 | 20.1 | — | — | 4.7 | — | CL | 2-2-0 | 2-2-0 | — |

Table 11.50: Propylene Glycol Monobutoxyethyl Ether (19)

| Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg |
|--------------------------|-------------------|--------------------|--------------------------------|-----------------------|
| 176.26 | 230.0 | -90 ^(c) | 197 | < 0.01 |

| Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
|---------------------------|-------------------|----------------------------------|-----------------------------|--------------------|-----------------------------------------|-----------------------------------|---------------------------------|
| | | | In Water | Water In | | Neat Product | 25% Aq. Solution ^(b) |
| 0.938 | 7.81 | 0.00091 | ~4 ^(d) | ~20 ^(d) | 0.13 | 27.6 | — |

(a) Tag Closed Cup

(b) All solutions are percent by volume

(c) Sets to glass below this temperature

(d) An accurate determination of the solubility of Butoxyethyl PROPASOL Solvent in water and water in Butoxyethyl PROPASOL Solvent is difficult because of the similarity of their densities and the sensitivity of the solubility to slight changes in temperature. Thus, the solubility data reported here are approximate.

Table 11.51: Propylene Glycol Isobutyl Ether and Higher Homologs (23)

| | | | |
|-------------------------------|-------|-------------------------------|------|
| Boiling point, °C | 172 | Dilution ratio | |
| Flash point (TCC)°F | 138 | Toluene | 2.3 |
| Evaporation rate BuAc = 1.0 | 0.09 | Naphtha | 1.5 |
| Specific gravity 25°/25°C | 0.883 | Solvent constants | |
| Pounds per gallon 25°C | 7.33 | Solubility parameter | 8.6 |
| Viscosity, cs 25°C | 4.01 | Hydrogen bonding | 14.8 |
| Vapor pressure @ 25°C (mm Hg) | 1.3 | Dipole moment (Debye) | 1.97 |
| Surface tension (dynes/cm) | 25.1 | Solubility in water ml/100 ml | 2.9 |

Table 11.52: Propylene Based Glycol Ether Blends (23)

DOWANOL BC-100
DOWANOL BC-200

| DOWANOL | CHEMICAL NAME | STRUCTURAL FORMULA | Molecular Weight | Boiling Pt. °C 760 mm Hg | Flash Point °F | Evap. Rate BuAc = 1.00 | Specific Gravity 25/25°C |
|---------|------------------------------|--------------------|------------------|-----------------------------|-----------------|------------------------|--------------------------|
| BC-100 | Propylene-Based Glycol Ether | | — | 120.0-184.0 | 90 ³ | 0.60 | 0.919 |
| BC-200 | Propylene-Based Glycol Ether | | — | 120.0-184.0 | 93 ³ | 0.25 | 0.924 |

| Lb/Gal 25°C | Viscosity Centistokes 25°C | Vapor Pressure at 25°C (mm Hg) | Surface Tension (dynes/cm) | DILUTION RATIO | | SOLVENT CONSTANTS | | | |
|-------------|----------------------------|--------------------------------|----------------------------|----------------|---------|------------------------------------|-------------------------------|-----------------------|-------------------------------|
| | | | | Toluene | Naphtha | Solubility Parameters ¹ | Hydrogen Bonding ² | Dipole Moment (Debye) | Solubility in Water ml/100 ml |
| 7.68 | 2.39 | 12.5 | — | 5.0 | 0.9 | 10.2 | 14.5 | 1.7 | ∞ |
| 7.71 | 2.03 | 12.5 | — | 4.9 | 0.9 | 10.0 | 14.1 | 1.7 | ∞ |

¹ Solubility Parameters are useful as a guide in determining the ability of a solvent or solvent mixture to dissolve resins. A discussion of solubility parameters and the basis for these values are contained in an article by H.S. Burrell in the Spring 1955 issue of *Interchemical Review*.

² A discussion of the hydrogen bonding parameter is contained in an article by Allen A. Orr in the August 1975 issue of *Journal of Paint Technology*, Vol. 47, No. 607, pages 45-49. This particular article was the basis of the listed values of the hydrogen bonding parameter.


³ Setalflash

Table 11.53: Propylene Based Glycol Ether Blend (23)

| | |
|-------------------------------|-------|
| Boiling point, °C | 179 |
| Flash point (TCC)°F | 147 |
| Evaporation rate Bu Ac = 1.0 | 0.08 |
| Specific gravity 25°/25°C | 0.917 |
| Pounds per gallon 25°C | 7.62 |
| Viscosity, cs 25°C | 3.8 |
| Vapor pressure @ 25°C (mm Hg) | 0.6 |
| Surface tension (dynes/cm) | 26.4 |
| Solvent constants | |
| Solubility parameters | 9.0 |
| Hydrogen bonding | 14.1 |
| Dipole moment (Debye) | 1.97 |
| Solubility in water ml/100 ml | 12.0 |

Table 11.54: Dipropylene Glycol Monomethyl Ether (2)

ARCOSOLV DPM
DOWANOL DPM
POLY-SOLV DPM
Glycol Ether DM



"Dowanol" DPM has a mild, pleasant odor. Because of its structure it is completely miscible with water and a wide variety of organic substances, and has the combined solubility characteristics of an alcohol, an ether and a hydrocarbon. It is used in formulations of brake fluids, lacquers, paints, varnishes, dye and ink solvents, wood stains, textile processes, dry cleaning soaps and cleaning compounds.

| | | | |
|--------------------------------------------|-------------|------------------------------------|-------|
| Acidity (as acetic acid), % by wt. (max.) | 0.02 | Specific gravity, 20/20°C. | 0.951 |
| Appearance | water-white | Specific heat (average), cal./°C. | 0.54 |
| Boiling point at 760 mm. Hg, °C. | 188.3 | Surface tension at 25°C. dynes/cm. | 28.8 |
| Fire point (open cup), °F. | 185 | Vapor pressure at 20°C., mm. Hg | 0.4 |
| Flash point (Cleveland open cup), °F. | 185 | Viscosity in centistokes: 25°C. | 3.33 |
| Freezing range, °C. | -117 | 75°C. | 1.07 |
| Refractive index (n _D at 20°C.) | 1.419 | Weight per gal. at 20°C., lb. | 7.91 |
| Molecular weight | 148.2 | | |

Table 11.55: Dipropylene Glycol Monopropyl Ether (19)

ARCOSOLV DPNP

| | | Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg |
|--|--|--------------------------------|----------------------|-----------------------|-----------------------------------|-----------------------------|
| | | 176.26 | 212.3 | < -70 | 208 | 0.04 |

| Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
|---------------------------------|-------------------------|-------------------------------------------|--------------------------------|-------------|--------------------------------------------------|--------------------------------------|------------------------------------|
| | | | In Water | Water In | | Neat Product | 25% Aq. Solution ^(b) |
| 0.922 | 7.67 | 0.00093 | 18.0 | 23.0 | 0.64 | 25.8 | — |

(a) Tag Closed Cup

(b) All solutions are percent by volume

Table 11.56: Dipropylene Glycol Monobutyl Ether (19)

ARCOSOLV DPNB

| | | Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg |
|--|--|--------------------------------|----------------------|-----------------------|-----------------------------------|-----------------------------|
| | | 190.28 | 230.6 | -70 ^(c) | 230 | 0.05 |

| Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
|---------------------------------|-------------------------|-------------------------------------------|--------------------------------|-------------|--------------------------------------------------|--------------------------------------|------------------------------------|
| | | | In Water | Water In | | Neat Product | 25% Aq. Solution ^(b) |
| 0.917 | 7.62 | 0.00092 | 3.0 | 12.0 | 0.40 | — | — |

(a) Tag Closed Cup

(b) All solutions are percent by volume

(c) Sets to glass below this temperature

Table 11.57: Dipropylene Glycol Tertiary Butyl Ether (70)

ARCOSOLV DPTB

ARCOSOLV DPTB is a colorless liquid with a mild odor and low volatility. It is partially water soluble and demonstrates good coupling. It also shows good solvency for coating resins. The properties of DPTB support its use in agricultural, coating, cleaning, ink, textile and adhesive products

PRODUCT IDENTIFICATION

Chemical Name ...Tertiary Butoxy Propoxy Propanol

.....Dipropylene Glycol Tertiary Butyl Ether

Chemical FamilyPropylene Glycol Ether

Chemical FormulaC₁₀H₂₂O₃

(continued)

Table 11.57: (continued)

TYPICAL PROPERTIES

- Density (pounds per gallon at 25°C)7.6
- Evaporation Rate (BuAc = 100)1.5
- Flash Point (SETA) °C (°F).....87 (188)
- Solubility by weight in water at 20°C12%
- Solubility Parameter (Total Hansen)9.3
- Surface Tension (Dynes/cm) @ 25°C (77°F).....26
- Refractive Index @ 25°C (77°F)1.42
- Viscosity (centistokes) @ 25°C (77°F).....4.9
- Vapor Pressure @ 25°C (77°F) (mm Hg)0.08

PRODUCT SPECIFICATIONS

| Property | Specifications | Test Method |
|-----------------------------------------------------|----------------|------------------------|
| Specific Gravity @ 25°C | 0.890 – 0.910 | ASTM D-891 |
| Distillation @ 760mm Hg IBP, min. DP, max. | 200°C 220°C | ASTM D-1078; E-202 |
| Acidity, wt. % as acetic acid, max. | 0.015 | ASTM E-202; USP XXI |
| Water, wt. %, max. | 0.25 | ASTM E-202; E-203 |
| Color, APHA, max. | 20 | ASTM E-202; D-1209 |


Table 11.58: Tripropylene Glycol (2)

Tripropylene glycol is a water-white liquid. One of its unique features is its combination of water-solubility and good solubility for many organic compounds. Because of high boiling point and low volatility it is used in the formulation of textile soaps, lubricants, cutting oils, and similar applications.

| | |
|--------------------------------------------|------------|
| Boiling point: | |
| 760 mm. Hg, °F. | 513.0 |
| 760 mm. Hg, °C. | 267.2 |
| Fire point (Cleveland open cup), °F. | 310 |
| Flash point (Cleveland open cup), °F. | 285 |
| Freezing range | supercools |
| Molecular weight | 192.3 |
| Refractive index (n _D at 25°C.) | 1.442 |
| Specific heat at 77°F. (25°C.) | 0.51 |
| Surface tension at 25°C., dynes/cm. | 34 |
| Vapor pressure at 25°C., mm. Hg | 0.01 |
| Viscosity (absolute) in centistokes: | |
| 25°C. | 55.1 |
| 60°C. | 9.80 |
| Weight per gal at 25°C., lb. | 8.51 |

Table 11.59: Tripropylene Glycol Monomethyl Ether (2)

ARCOSOLV TPM
DOWANOL TPM
POLY-SOLV TPM
Glycol Ether TPM



Tripropylene glycol monomethyl ether is a colorless liquid possessing a mild, pleasant odor. It is completely miscible with a wide variety of organic products and water. This solubility for a wide range of organic products is due to the presence of the hydroxyl, ether and alkyl group in the molecule. It is used in the manufacture of cosmetics, liquid soaps, cleaning formulation, printing and writing inks, dyeing formulations, wood stains and in lacquers, paints and varnish formulations.

| | | | |
|--------------------------------------------|-------------|-------------------------------------|-------|
| Acidity (as acetic acid), % by wt. (max.) | 0.02 | Specific gravity, 25/25°C. | 0.967 |
| Appearance | water-white | Specific heat (average), cal./°C. | 0.51 |
| Boiling point at 760 mm. Hg, °C. | 242.4 | Surface tension at 25°C., dynes/cm. | 30.0 |
| Fire point (open cup), °F. | 270 | Vapor pressure at 75°C., mm. Hg | 0.022 |
| Flash point (Cleveland open cup), °F. | 260 | Viscosity in centistokes: | |
| Freezing range, °C. | -42 | 25°C. | 6.16 |
| Refractive index (n _D at 25°C.) | 1.428 | 75°C. | 1.67 |
| Molecular weight | 206.3 | Weight per gal. at 20°C., lb. | 8.05 |

Table 11.60: Aromatic Based Glycol Ether (23)**DALPAD A**

| | |
|-------------------------------|-----------|
| Molecular weight | 138.0 |
| Boiling point, °C | 245.0 |
| Flash point (TCC)°F | 260 |
| Evaporation rate Bu Ac = 1.0 | <0.01 |
| Specific gravity 25°/25° C | 1.104 |
| Pounds per gallon, 25°C | 9.18 |
| Viscosity, cs, 25°C | 20.5 |
| Vapor pressure @ 25°C (mm Hg) | 0.03 |
| Surface tension (dynes/cm) | 42.0 |
| Dilution ratio | |
| Toluene | Insoluble |
| Naphtha | Insoluble |
| Solvent constants | |
| Solubility parameter | 11.4 |
| Hydrogen bonding | 16.6 |
| Dipole moment (Debye) | 1.67 |
| Solubility in water ml/100 ml | 2.3 |

TRIGLYCOLS**Table 11.61: Methoxytriglycol (19)****POLY-SOLV TM****Triethylene Glycol Monomethyl Ether**

| | | | |
|----------------------------------------------|---------|------------------------------------------------|----------|
| Molecular weight | 164.20 | Freezing point, °C | -38.2 |
| Apparent specific gravity, @ 20°/20 °C | 1.053 | Absolute viscosity, cp @ 20°C | 7.27 |
| ΔSpecific gravity/Δt., 10°-40°C, per °C | 0.00088 | Solubility @ 20°C in water | complete |
| Boiling point, °C @ 760 mm Hg | 249.0 | % by wt water in | complete |
| @ 50 mm Hg | 162 | Solubility, % by wt in heptane** | 1.5 |
| @ 10 mm Hg | 126 | Refractive index, n _D ²⁰ | 1.4381 |
| Δb.p./Δp., 750 to 770 mm Hg, °C per mm Hg | 0.053 | Heat of vaporization, Btu/lb @ 1 atm | 141 |
| Vapor pressure at 20°C, mm Hg | <0.01 | @ 300 mm Hg | 150 |
| Relative evaporation rate* (Bu Ac = 100) | <0.1 | Flash point, closed cup, °F | 238 |

*Evaporation rate of glycol ether at 20°C referenced to n-butyl acetate at 25°C.

**At 25°C the glycol ether is completely soluble in acetone, benzene, ethyl ether, methanol, and carbon tetrachloride.

Table 11.62: Ethoxytriglycol (19)

| POLY-SOLV TE Triethylene Glycol Monoethyl Ether | | | |
|----------------------------------------------------|---------|------------------------------------------------|----------|
| Molecular weight | 178.23 | Freezing point, °C | -18.7 |
| Apparent specific gravity, @ 20°/20°C | 1.0250 | Absolute viscosity, cp @ 20°C | 7.8 |
| ΔSpecific gravity/Δt., 10°-40°C, per °C | 0.00088 | Solubility @ 20°C in water | complete |
| Boiling point, °C | | % by wt water in | complete |
| @ 760 mm Hg | 255.9 | Solubility, % by wt in heptane** | 2 |
| @ 50 mm Hg | 167 | Refractive index, n _D ²⁰ | 1.4376 |
| @ 10 mm Hg | 130 | Heat of vaporization, Btu/lb @ 1 atm | 129 |
| Δb.p./Δp., 750 to 770 mm Hg, °C per mm Hg | 0.055 | @ 300 mm Hg | 137 |
| Vapor pressure at 20°C, mm Hg | <0.01 | Flash point, closed cup, °F | 255 |
| Relative evaporation rate* (Bu Ac = 100) | <0.1 | | |

*Evaporation rate of glycol ether at 20°C referenced to n-butyl acetate at 25°C.

**At 25°C the glycol ether is completely soluble in acetone, benzene, ethyl ether, methanol, and carbon tetrachloride.

Table 11.63: Butoxytriglycol (19)

| Triethylene Glycol Monobutyl Ether | | | |
|----------------------------------------------|---------|------------------------------------------------|----------|
| Molecular weight | 206.28 | Freezing point, °C | -47.6 |
| Apparent specific gravity, @ 20°/20°C | 1.0021 | Absolute viscosity, cp @ 20°C | 10.9 |
| ΔSpecific gravity/Δt., 10°-40°C, per °C | 0.00082 | Solubility @ 20°C in water | complete |
| Boiling point, °C | | % by wt water in | complete |
| @ 760 mm Hg | (dec) | Solubility, % by wt in heptane** | complete |
| @ 50 mm Hg | 188 | Refractive index, n _D ²⁰ | 1.4394 |
| @ 10 mm Hg | 148 | Heat of vaporization, Btu/lb @ 1 atm | 176*** |
| Δb.p./Δp., 750 to 770 mm Hg, °C per mm Hg | - | @ 300 mm Hg | - |
| Vapor pressure at 20°C, mm Hg | <0.01 | Flash point, closed cup, °F | >250 |
| Relative evaporation rate* (Bu Ac = 100) | <0.1 | | |

*Evaporation rate of glycol ether at 20°C referenced to n-butyl acetate at 25°C.

**At 25°C the glycol ether is completely soluble in acetone, benzene, ethyl ether, methanol, and carbon tetrachloride.

***At 190°C and 50 mm Hg.

MISCELLANEOUS GLYCOL DATA


Table 11.64: ARCOSOLV Evaporation Characteristics, Resin Compatibility and Other Data (70)

Relative Solvent Evaporation Rates


| | |
|-----------------------------|-----|
| Fast Evaporating (-300) | |
| Acetone | 559 |
| Ethyl Acetate | 391 |
| Methyl Ethyl Ketone | 379 |
| Medium Evaporating (80,300) | |
| Methanol | 207 |
| Isopropyl Alcohol | 144 |
| Butyl Acetate | 100 |
| Slow Evaporating (-80) | |
| PM | 66 |
| EM | 47 |
| EE | 32 |
| EB | 6 |
| DPM | 2 |
| PMA | 34 |
| EEA | 20 |

(continued)


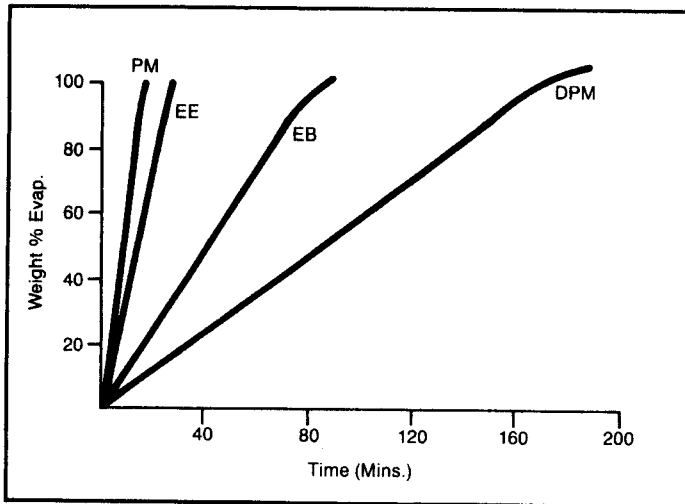
Evaporation Curves—Neat Solvents



Evaporation Rates for PM/DPM Blends

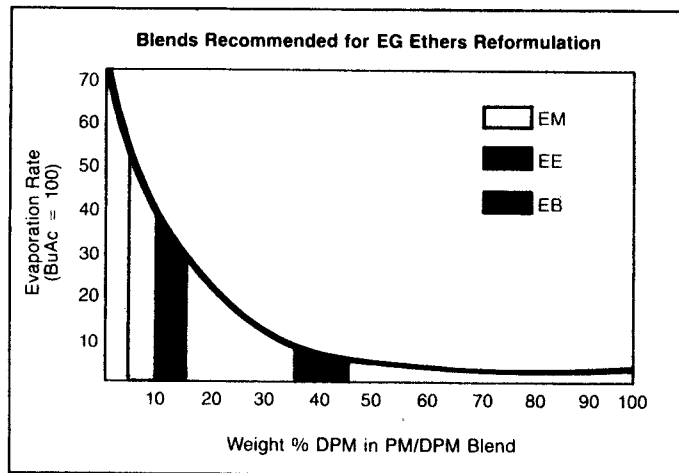

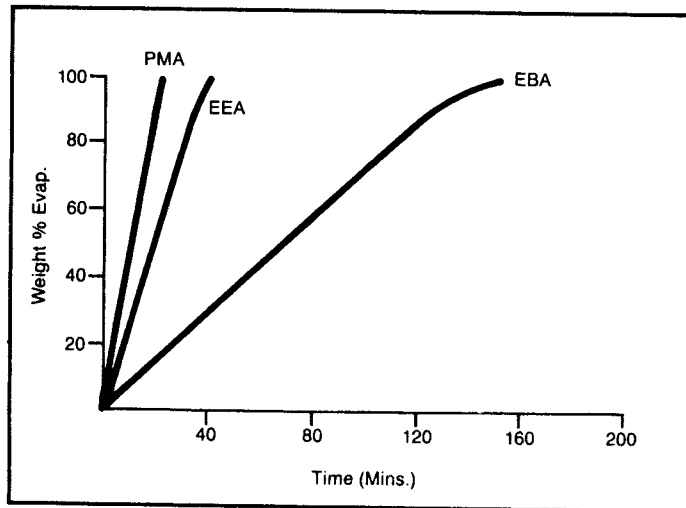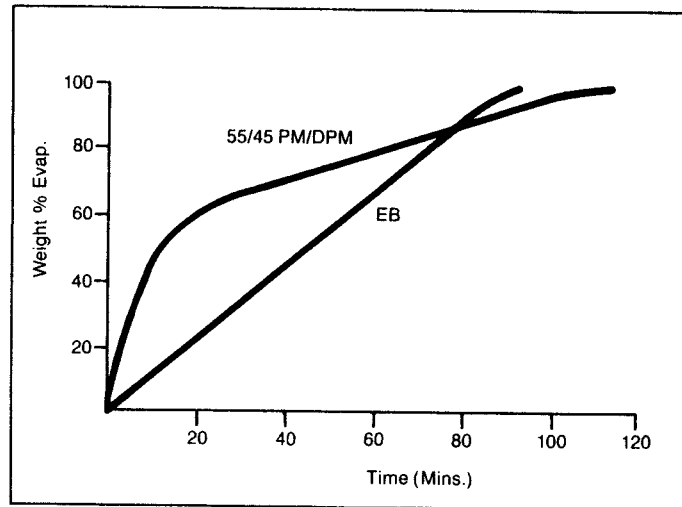
Evaporation Curves—55/45 PM/DPM Blend and EB (25°C)



(continued)


Table 11.64: (continued)

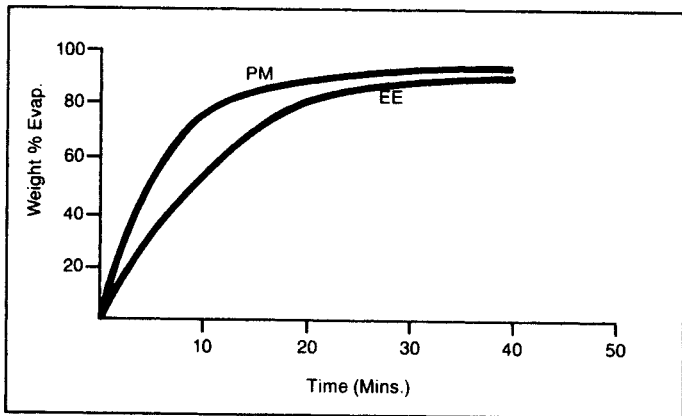Evaporation Curves from 60% Araldite® 6010* Epoxy Resin



* Ciba-Geigy Corp.

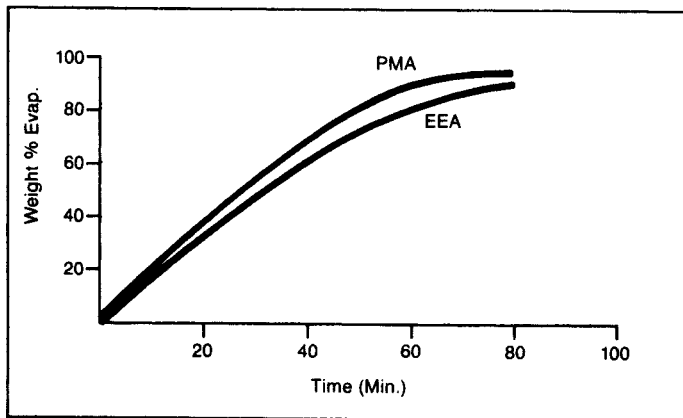Evaporation Curves from 10% RS 1/2 Sec. Nitrocellulose* Resin




* Hercules, Inc.

Evaporation Times of Glycol Ether Acetates

| Glycol Ether Acetate | Minutes to 90% Evaporation |
|----------------------|----------------------------|
| PMA | 17 |
| EEA | 28 |
| EBA | 115 |
| DPM | 315 |
| DEA | 500 |
| DBA | 2700 |

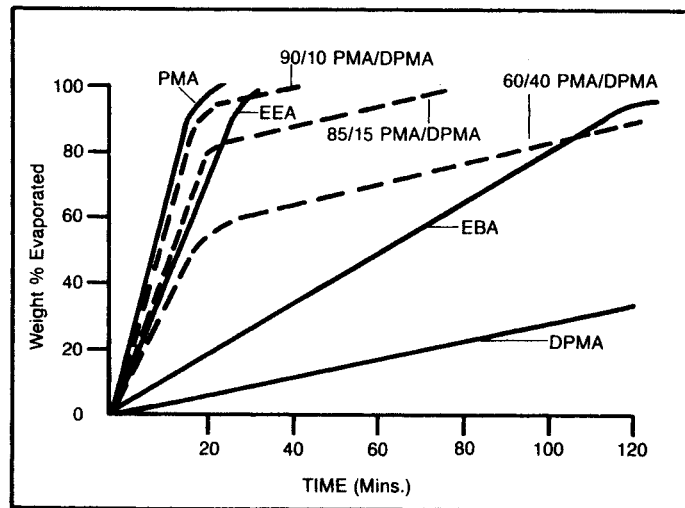Evaporation Curves—Glycol Ether Acetates and PM Acetate/DPM Acetate Blends (25°C)



(continued)


Table 11.64: (continued)

Glycol Ether Azeotropes with Water

| Glycol Ether | b.p. of pure glycol ether, C at 760mm Hg | b.p. of azeotrope, C at 760mm Hg | Composition of Azeotrope | |
|--------------|------------------------------------------|----------------------------------|--------------------------|--------------|
| | | | Glycol Ether, Wt. % | Water, Wt. % |
| EE | 136 | 99 | 29 | 71 |
| EP* | 150 | 99 | 27 | 73 |
| EB | 171 | 99 | 21 | 79 |
| PM | 121 | 98 | 50 | 50 |
| PTB | 151 | 95 | 21 | 79 |
| PP | 149 | 97 | 41 | 59 |
| PB | 170 | 99 | 28 | 72 |

*Ethylene Glycol Propyl Ether

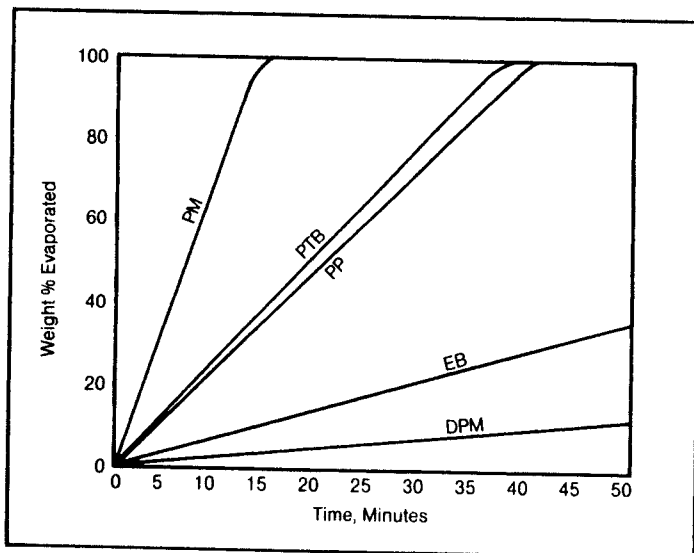ARCOSOLV PTB Ether and other Glycol Ethers Evaporation Curves—Neat Solvents



C - Clear
H - Hazy
V - Very
S - Slight
NS - Not Soluble
— - Not Tested

- 1 See Table for supplier listing by tradename.
- 2 All testing carried out under ambient conditions. Resins were used as received from manufacturer. Criterion for solubility in solutions was two hours shaking. Sample size was 200 g. Films were applied at 3 mils thickness on glass and air dried 48 hours.
- 3 20% Resin/80% ARCOSOLV PM solvent
- 4 5% Resin/95% ARCOSOLV PM solvent.
- 5 75% Resin/25% ARCOSOLV PM solvent.

Compatibility of ARCOSOLV[®] PM Solvent with Various Film Formers

| Resin Tradename ¹ | Compatibility ² | | | | | |
|-----------------------------------|----------------------------|----------------|-----------------|----------------|-------|------|
| | Wt. % ARCOSOLV PM/Resin | | | | | |
| | 10/90 | | 50/50 | | 90/10 | |
| | Soln | Film | Soln | Film | Soln | Film |
| Acrylic | | | | | | |
| Acryloid AT-51 | C | C | C | C | C | VH |
| Elvacite 2041 | NS ³ | — | NS ⁴ | — | NS | — |
| Acryloid OL-42 | C | C | C | C | C | — |
| Alkyd (Solvent Reducible) | | | | | | |
| Beckosol 12-006 | C | C | C | C | C | C |
| Duraplex 12-808 | C | C | C | C | C | C |
| Cargill 5836 | C | C | C | C | C | C |
| Alkyd (Vinyl Toluene/Oil) | | | | | | |
| Keltrol 1001 | C | C | C | C | NS | — |
| Alkyd (Water Reducible) | | | | | | |
| Kelsol 3902 | C | C | C | C | C | C |
| Kelsol 3921 | C | C | C | C | C | C |
| Cellulose Acetate Butyrate | | | | | | |
| CAB 381-05 | C ³ | C ³ | C ⁴ | C ⁴ | C | C |
| Chlorinated Rubber | | | | | | |
| Parlon S-20 | NS ⁴ | — | — | — | NS | NS |
| Epoxy | | | | | | |
| Araldite 6010 | C | C | C | C | C | C |
| Araldite 7071 | C ⁵ | C ⁵ | C | C | C | C |
| Ethylene Vinyl Acetate | | | | | | |
| Elvax 40 | — | — | NS | — | NS | — |
| Melamine Formaldehyde | | | | | | |
| Uformite 27-806 | C | C | C | C | C | C |
| Cymel 303 | C | C | C | C | C | C |
| Nitrocellulose | | | | | | |
| Cellofilm No. 101175 | C | C | C | C | C | C |
| Polyamide | | | | | | |
| Hardener HZ 815X70 | C | C | C | C | C | C |
| Hardener HZ 815 | C | C | C | C | C | C |
| Hardener HZ 840 | C | C | C | H | C | C |
| Urea Formaldehyde | | | | | | |
| Beetle 227-8 | C | C | C | C | C | C |
| Beckamine 21-511 | C | C | C | C | C | C |
| Urethane | | | | | | |
| Spenkel F-78-50 | C | C | C | C | C | H |
| Spenkel F-48-50 | C | C | C | C | C | SH |
| Spenkel F-77-60 | C | C | C | C | C | C |
| Vinyl Chloride/Acetate | | | | | | |
| Vinylite VYNS | NS ³ | — | NS ⁴ | — | NS | — |
| Vinylite VAGH | NS ³ | — | NS ⁴ | — | NS | — |
| Vinylite VYHH | NS ³ | — | NS ⁴ | — | NS | — |

(continued)

Table 11.64: (continued)

Resin Suppliers

| Resin Tradename | Supplier | % Solids | Solvents |
|-----------------------------------------|-------------------|----------|--------------------------------------------------------------|
| Acrylic | | | |
| Acryloid AT-51 | Rohm and Haas | 50 | Xylene/n-Butanol |
| Elvacite 2041 | DuPont | 100 | — |
| Acryloid OL-42 | Rohm and Haas | 80 | EEA |
| Alkyd (Solvent Reducible) | | | |
| Beckosol 12-006 | Reichhold | 50 | Xylene/VM&P Naphtha |
| Duraplex 12-808 | Reichhold | 60 | Xylene |
| Cargill 5836 | Cargill | 70 | EEA |
| Alkyd (Vinyl Toluene/Oil) | | | |
| | Spencer Kellogg | 60 | Mineral Spirits |
| ie) | | | |
| | Spencer Kellogg | 75 | EB |
| | Spencer Kellogg | 75 | Propylene Glycol Propyl Ether |
| Cellulose Acetate Butyrate | | | |
| | Eastman | 100 | — |
| | Hercules | 100 | — |
| Epoxy | | | |
| Araldite 6010 | Ciba-Geigy | 100 | — |
| Araldite 7071 | Ciba-Geigy | 100 | — |
| Ethylene Vinyl Acetate | | | |
| | DuPont | 100 | — |
| | Reichhold | 80 | i-Propanol/i-Butanol |
| | American Cyanamid | 100 | — |
| Cellofilm No. 101175 ½ Sec. Solution | Cellofilm | 40 | Methylisobutyl Ketone/ Toluene/Butyl Acetate/n-Butanol |
| Polyamide | | | |
| | Ciba-Geigy | 70 | Xylene |
| | Ciba-Geigy | 100 | — |
| | Ciba-Geigy | 100 | — |
| Urea Formaldehyde | | | |
| Beette 227-8 | American Cyanamid | 52 | Xylene/n-Butanol |
| Beckamine 21-511 | Reichhold | 60 | n-Butanol/Ethanol |
| Urethane | | | |
| | Spencer Kellogg | 50 | Mineral Spirits |
| | Spencer Kellogg | 50 | Mineral Spirits |
| | Spencer Kellogg | 60 | Mineral Spirits |
| Vinyl Chloride/Acetate | | | |
| Vynlite VYNS | Union Carbide | 100 | — |
| Vynlite VAGH | Union Carbide | 100 | — |
| Vynlite VYHH | Union Carbide | 100 | — |

Viscosities of PM with Various Resins

| Resin | Final % Sols. | Viscosity, cps at 25° C | | |
|--------------------------------|---------------|-------------------------|-----|------|
| | | PM | EE | EB |
| Acrylic ¹ | 30 | 390 | 430 | 650 |
| Epoxy ² | 60 | 690 | 780 | 1010 |
| Nitrocellulose ³ | 10 | 250 | 280 | 370 |
| Polyester ⁴ (bake) | 60 | 290 | 270 | 390 |
| Alkyd ⁵ (wat. red.) | 60 | 410 | 410 | 580 |

1. Acryloid[®] B-72 (Rohm and Haas)
2. Epon[®] 1001 (Shell Chemical Co.)
3. RS ½ Sec. Nitrocellulose (Hercules, Inc.)
4. Aroplat[®] 6025-A1-80 (Spencer Kellogg, Division of Textron, Inc.)
5. Cargill 7451 (Cargill, Inc.)

Viscosities of PM/DPM Blends with Various Resins


| Resin | Final % Sols. | Viscosity, cps at 25° C | | | | | | |
|----------------------|---------------|-------------------------|-----|-----|-----|----------------|-----------------|-----------------|
| | | PM | DPM | EE | EB | PM/DPM 95/5 | PM/DPM 90/10 | PM/DPM 65/35 |
| Acrylic ¹ | 30 | 390 | 910 | 430 | 650 | 415 | 440 | 540 |
| Alkyd ² | 50 | 460 | 840 | 490 | 645 | 480 | 490 | 600 |
| Epoxy ³ | 80 | 170 | 400 | 170 | 230 | 180 | 190 | 235 |

1. Acryloid[®] B-72 (Rohm and Haas)
2. Cargill 7433 (Cargill, Inc.)
3. ARALDITE[®] 6010 (Ciba-Geigy Corporation)

(continued)


Table 11.64: (continued)

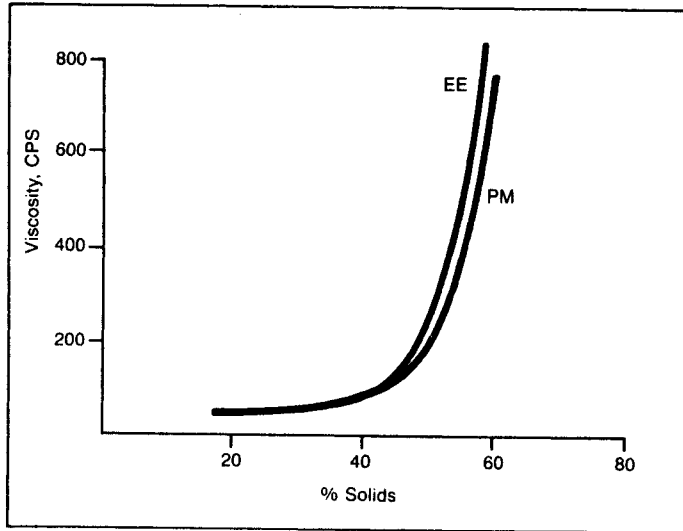**Viscosity Reduction
EPON[®] 1001
Epoxy Resin* (25°C)**




*Shell Chemical Company

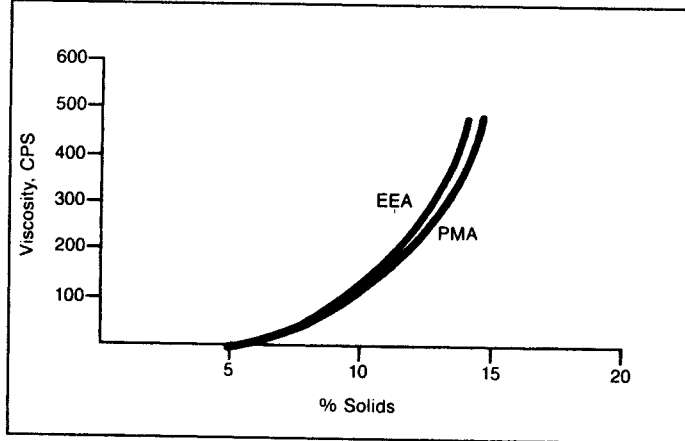**Viscosity Reduction
RS 1/2 Sec. Nitrocellulose
Resin* (25°C)**




*Hercules, Inc.

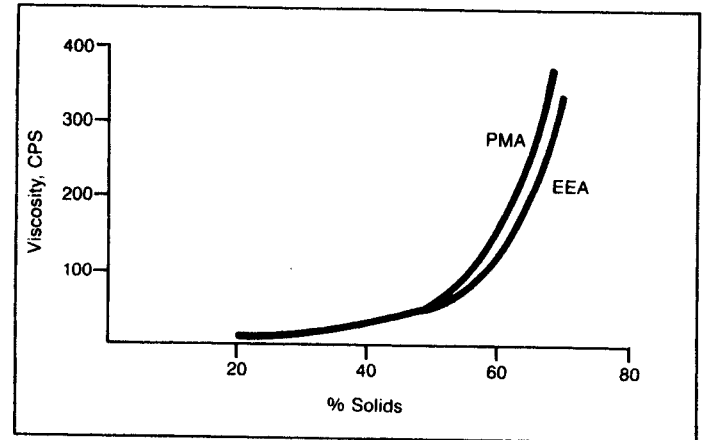**Viscosity Reduction
Aroplaz[®] 6230
Alkyd Resin* (25°C)**



*Spencer Kellogg Division, Textron, Inc.

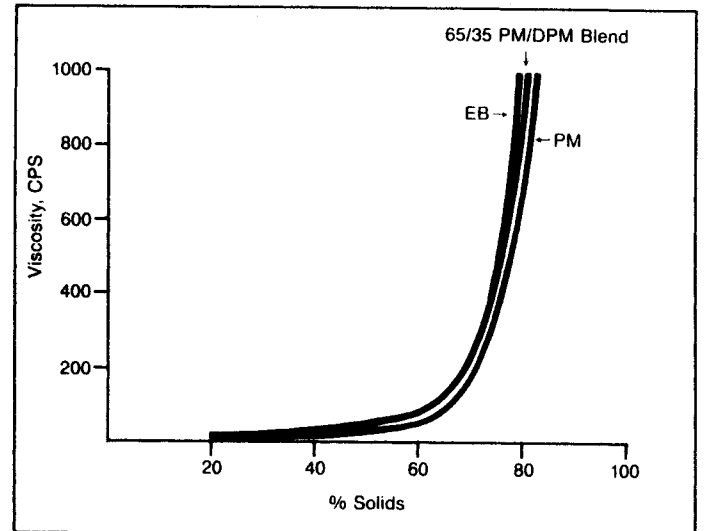**Viscosity Reduction
CARGILL 5710
Alkyd Resin* (25°C)**




*Cargill, Inc.

(continued)


Table 11.64: (continued)

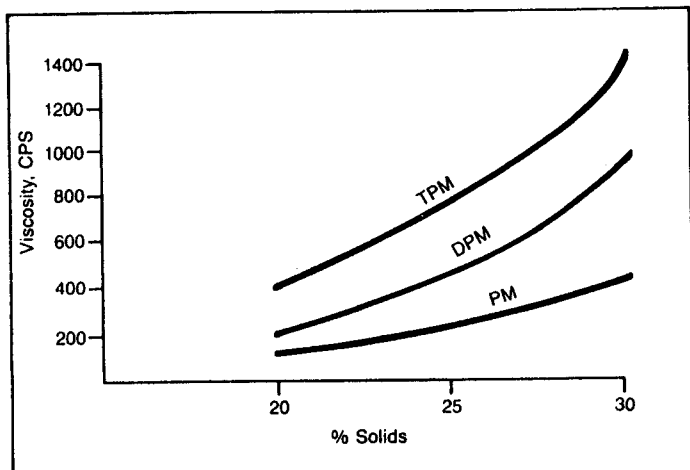Viscosity Reduction Acryloid® B-72 Acrylic Resin*





*Rohm and Haas Co.

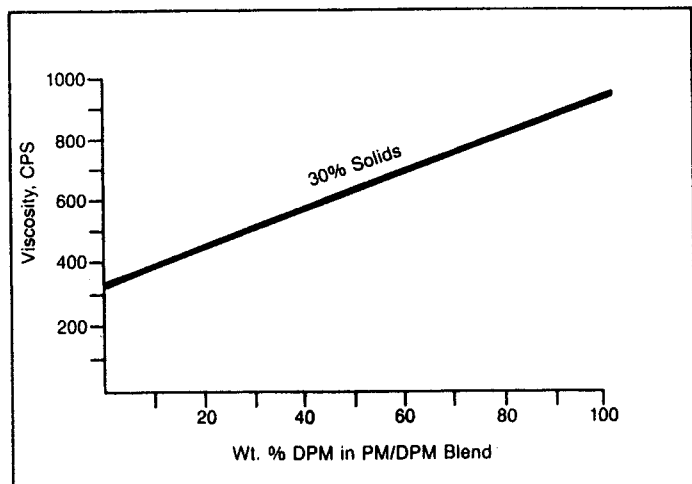Viscosity of Acryloid® B-72 Acrylic Resin* in PM/DPM Blends



*Rohm and Haas Co.

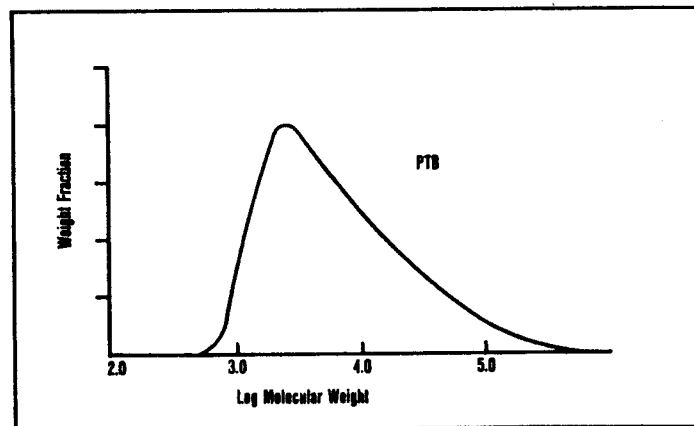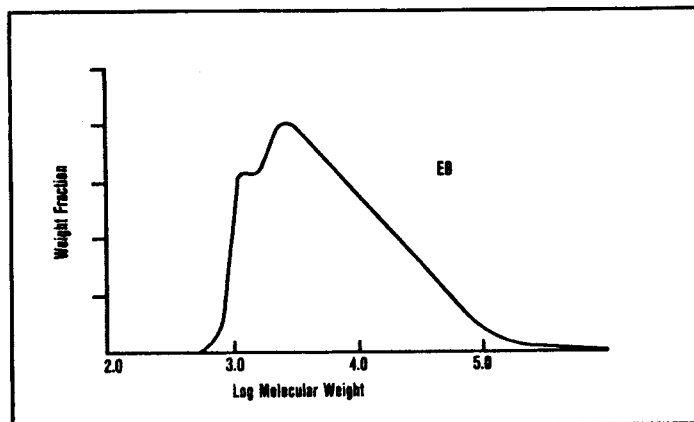Alkyd Resin Stability 125°F, Four Weeks



(continued)

Table 11.64: (continued)

Performance¹ of ARCOSOLV[®] DPMA in a Vinyl Acrylic Interior Wall Paint (6.8 Wt. % Coalescent)

| Coalescent | None | Texanol ² | EBA | ARCOSOLV [®] DPM Acetate |
|------------------------------------------|-------|----------------------|-------|--------------------------------------|
| Viscosity (KU) | 87 | 88 | 87 | 87 |
| Film Appearance (Sealed/Unsealed) | | | | |
| 77°F | 10/10 | 10/10 | 10/10 | 10/10 |
| 40°F | 10/10 | 10/10 | 10/10 | 10/10 |
| Sheen—85°F (Sealed/Unsealed) | | | | |
| 77°F | 17/15 | 18/14 | 15/14 | 16/12 |
| 40°F | 12/10 | 19/15 | 16/14 | 16/14 |
| Hiding (Sealed Area) | | | | |
| 77°F | 96.9 | 97.1 | 96.6 | 97.0 |
| 40°F | 95.5 | 96.1 | 95.5 | 96.3 |
| Reflectance—% (Sealed Area) | | | | |
| 77°F | | | | |
| Unstained | 91.9 | 92.1 | 91.8 | 92.1 |
| Stained | 86.6 | 86.2 | 85.5 | 85.5 |
| 40°F | | | | |
| Unstained | 89.7 | 92.5 | 92.2 | 92.2 |
| Stained | 72.1 | 84.8 | 84.2 | 85.0 |

1. ASTM Standardized Scoring Scheme

| Score | Performance | Effect |
|-------|-------------|------------------|
| 10 | Perfect | None |
| 9 | Excellent | Trace |
| 8 | Very Good | Very Slight |
| 6 | Good | Slight |
| 4 | Fair | Moderate |
| 2 | Poor | Considerable |
| 1 | Very Poor | Severe |
| 0 | No Value | Complete Failure |

2. Trademark of Eastman Chemical Products, Inc.

Improved Whiteness in Coatings using ARCOSOLV[®] Glycol Ethers and Acetates

| Formulation | Solvent | Whiteness Index (4B-3G Reflectance) |
|----------------------------|---------|----------------------------------------|
| Epoxy Baking Enamel | PM | 80.2 |
| | EE | 78.4 |
| Epoxy Maintenance Enamel | PM | 77.6 |
| | EE | 75.8 |
| High Solids Alkyd Enamel | PM | 78.5 |
| | EB | 76.2 |
| Polyester Appliance Enamel | PMA | 79.7 |
| | EEA | 78.5 |

Whiteness Study—Reduced Amount of Titanium Dioxide White Epoxy Baking Enamel

| | PM | | EE | |
|-------------------------------|------|------|------|------|
| TiO ₂ Reduction, % | — | 10 | — | 10 |
| Whiteness Index | 85.5 | 85.5 | 84.6 | 83.5 |
| Opacity | 94.5 | 94.1 | 94.0 | 92.0 |

Effect of Grinding Method on Whiteness White Epoxy Baking Enamel

| | High Speed Dispersion | | Sand Mill | |
|--------------------|-----------------------|--------|-----------|------|
| | PM | EE | PM | EE |
| Viscosity (CPS) | 25,000 | 19,000 | 400 | 1200 |
| Grind (Hegman No.) | 7 | 7 | 8+ | 8+ |
| Whiteness Index | 86.3 | 83.0 | 86.9 | 83.1 |
| Opacity | 95.4 | 93.6 | 96.0 | 93.8 |
| Whiteness Index | 86.4 | 84.5 | 86.3 | 83.3 |
| At 99.9+ % Opacity | | | | |

Hard Surface Cleaner Evaluation Selected Glycol Ethers

| Glycol Ether | Performance | |
|--------------|------------------------------------------------|---------------------|
| | Shell "Janitor in a Drum" ¹ Type | ARCO All Purpose |
| EB | 79 | 80 |
| ARCOSOLV PM | 78 | 79 |
| ARCOSOLV DPM | 79 | 81 |
| ARCOSOLV TPM | 78 | 80 |

1. Trademark of Texize Chemical Company

(continued)

Table 11.64: (continued)


Evaluation of ARCOSOLV Glycol Ethers in Household Cleaners

| Cleaner | Performance Rating | |
|--------------------------------------------|-----------------------------|-----------------------------|
| | Ethylene Glycol Butyl Ether | ARCOSOLV PM/DPM 60/40 Blend |
| All Purpose Hard Surface Type ¹ | 91 | 98 |
| Spray-On Metal Cleaner | Excellent | Excellent |

| Formulations | | | |
|------------------------------------------------------|-----------|-----------------------------------------------|------------|
| All Purpose Hard Surface Type | | Spray-On Metal Cleaner | |
| Glycol Ether | 5.0 Wt. % | Glycol Ether | 20.0 Wt. % |
| Trisodium Phosphate | 2.0 | Makon [®] 10 Surfactant ³ | 20.0 |
| Sodium Metasilicate (5 Hydrate) | 2.0 | Kerosene | 60.0 |
| Sodium EDTA (Anhydrous) | 2.0 | | |
| Tergitol [®] 15-S-9 Surfactant ² | 7.0 | | |
| Na Xylene Sulfonate (40%) | 1.0 | | |
| Water | 81.0 | | |

1. Evaluated in accordance with Federal Specification P-D-220D. Soil described in Method 6701T of Federal Test Method Standard 436.
2. Union Carbide Corporation.
3. Stepan Chemical Company.

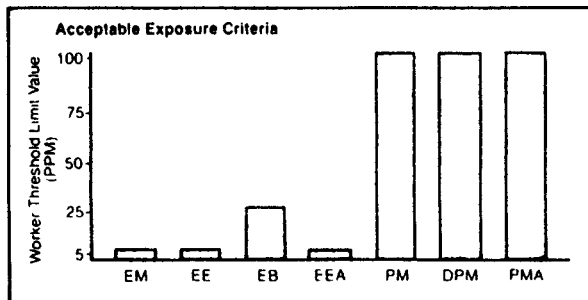ARCOSOLV Acceptable Exposure Criteria



TLV's of 5 ppm for EM, EE and their acetate derivatives established by the American Conference of Governmental Industrial Hygienists (ACGIH) in May 1984. Several glycol ether producers are recommending 2-5 ppm on EM and 5 ppm on EE and EEA. The ANPR could result in more severe restrictions. There is no standard established by ACGIH for PMA. Based on a comparison with PM TLV, a comfort level of 100 ppm would be recommended for PMA. For detailed information as for our toxicity bulletin or product MSDS


ARCOSOLV Comparative Aquatic Toxicity

| GLYCOL ETHER | LC-50s (mg/L) | | | | | | |
|--------------|---------------|-----------|----------------|---------------|--------|----------|-------------|
| | DAPHNIA MAGNA | BLUE GILL | FATHEAD MINNOW | RAINBOW TROUT | GUPPY | GOLDFISH | LAMPREY EEL |
| PM | 23,000 | N/D | 20,800 | N/D | N/D | N/D | N/D |
| PMA | 408 | N/D | 161 | N/D | N/D | N/D | >5,000 |
| PE | N/D | N/D | N/D | N/D | N/D | N/D | >5,000 |
| PNP | 3,600 | N/D | 3,420 | N/D | N/D | N/D | N/D |
| PNB | >1,000 | N/D | N/D | N/D | 560 | N/D | >5,000 |
| PTB | >1,000 | >1,000 | N/D | >1,000 | N/D | N/D | N/D |
| PPh | 370 | N/D | 280 | N/D | N/D | N/D | N/D |
| DPM | 1,919 | N/D | >10,000 | N/D | N/D | N/D | N/D |
| DPNB | >1,000 | N/D | N/D | N/D | 841 | N/D | N/D |
| TPM | >10,000 | N/D | 11,600 | N/D | N/D | N/D | N/D |
| TPNB | >1,000 | N/D | N/D | N/D | 564 | N/D | N/D |
| EM | >10,000 | >10,000 | N/D | 16,000 | 17,400 | >5,000 | N/D |
| EE | N/D | >10,000 | N/D | N/D | 16,400 | >5,000 | N/D |
| EB | 835 | 1,490 | 2,137 | N/D | 983 | 1,700 | N/D |

N/D = No Data Located

References

- AQUIRE, 1994. Online environmental data base available through the Chemical Information System (CIS), Baltimore.
- OHM/TADS (Oil and Hazardous Materials/Technical Assistance Data System), 1994. Online environmental data base available through the Chemical Information System (CIS), Baltimore.
- U.S. Fish and Wildlife Services, Research Information Bulletin No. 84-78. August, 1984.
- Verschueren, K. 1983. 'Handbook of Environmental Data on Organic Chemicals, Second Edition.' Van Nostrand Reinhold, NY.



Biodegradation of selected propylene glycol ethers after 28 days incubation. Test performed in the same laboratory, with pre-acclimated inoculum, using the same dose (3.75 mg/l).

(continued)

Table 11.64: (continued)

| TOXICOLOGICAL ENDPOINTS TABLE | | Birth Defects | | Embryo/Fetal Toxicity | | Testicular Toxicity | | Blood Damage | | Thymic Atrophy | |
|----------------------------------|------------------|------------------|-------|--------------------------|-------|------------------------|-------|-----------------|-------|-------------------|-------|
| | | NOAEL | LOAEL | NOAEL | LOAEL | NOAEL | LOAEL | NOAEL | LOAEL | NOAEL | LOAEL |
| PM | Inhalation (ppm) | 3,000 | NLF | 1,000 | 3,000 | 3,000 | NLF | 3,000 | NLF | 3,000 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | 1,000 | NLF | 1,000 | NLF | 1,000 | NLF |
| | Oral (mg/kg/d) | 3,000 | NLF | 370 | 740 | 3,000 | NLF | 3,000 | NLF | 3,000 | NLF |
| beta-PM | Inhalation (ppm) | 145 | 225 | 145 | 225 | N/D | N/D | N/D | N/D | N/D | N/D |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | 1,800 | N/D | N/D |
| PMA | Inhalation (ppm) | 3,000 | NLF | 3,000 | NLF | 3,000 | NLF | 3,000 | NLF | 3,000 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| beta-PMA | Inhalation (ppm) | 145 | 560 | 560 | NLF | 560 | 2,800 | 2800 | NLF | 2800 | NLF |
| | Dermal (mg/kg/d) | 2,000 | NLF | 2,000 | NLF | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| PE | Inhalation (ppm) | 2,000 | NLF | 2,000 | NLF | 2,000 | NLF | 300 | 2,000 | 2,000 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | ~1,800 | NLF | ~1,800 | NLF | ~1,800 | NLF |
| PEA | Inhalation (ppm) | N/D | N/D | N/D | N/D | 1,176 | NLF | 1,176 | NLF | 1,176 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| PNP | Inhalation (ppm) | 1,524 | NLF | 755 | NLF | 600 | NLF | 600 | NLF | 600 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| PNB | Inhalation (ppm) | N/D | N/D | N/D | N/D | 700 | NLF | 700 | NLF | 700 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | 1,140 | NLF | 1,140 | NLF | 1,140 | NLF |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | 1,000 | NLF | 1,000 | NLF | 1,000 | NLF |
| PTB | Inhalation (ppm) | 990 | NLF | 990 | NLF | 709 | NLF | 709 | NLF | 709 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| PPh | Inhalation (ppm) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | 1,000 | NLF | 1,000 | NLF | 1,000 | NLF |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| DPM | Inhalation (ppm) | 300 | NLF | 300 | NLF | 300 | NLF | 300 | NLF | 300 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | ~5,000 | NLF | ~5,000 | NLF | ~5,000 | NLF |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | 1,000 | NLF | 1,000 | NLF | 1,000 | NLF |

(continued)

Table 11.64: (continued)

| TOXICOLOGICAL ENDPOINTS TABLE <i>(continued)</i> | | Birth Defects | | Embryo/Fetal Toxicity | | Testicular Toxicity | | Blood Damage | | Thymic Atrophy | |
|--------------------------------------------------------|------------------|---------------|-------|-----------------------|-------|---------------------|-------|--------------|-------|----------------|-------|
| | | NOAEL | LOAEL | NOAEL | LOAEL | NOAEL | LOAEL | NOAEL | LOAEL | NOAEL | LOAEL |
| DPE | Inhalation (ppm) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | 1,000 | NLF | 1,000 | NLF | 1,000 | NLF |
| DPNP | Inhalation (ppm) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| DPNB | Inhalation (ppm) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Dermal (mg/kg/d) | 910 | NLF | 910 | NLF | 910 | NLF | 910 | NLF | 910 | NLF |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | 1,000 | NLF | 1,000 | NLF | 1,000 | NLF |
| DPTB | Inhalation (ppm) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| TPM | Inhalation (ppm) | 119 | NLF | 119 | NLF | 120 | NLF | 120 | NLF | 120 | NLF |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | 10,000* | NLF | ~10,000* | NLF | ~10,000* | NLF |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| TPE | Inhalation (ppm) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| TPNB | Inhalation (ppm) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Dermal (mg/kg/d) | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | N/D | N/D | N/D | N/D | 1,000 | NLF | 1,000 | NLF | 1,000 | NLF |
| EM | Inhalation (ppm) | 10 | 50 | 10 | 50 | 30 | 100 | 30 | 100 | 30 | 100 |
| | Dermal (mg/kg/d) | NNF | 250 | NNF | 250 | NNF | 650 | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | 31 | 250 | NNF | 31 | 50 | 100 | 10 | 50 | NNF | 100 |
| EE | Inhalation (ppm) | 50 | 175 | 10 | 50 | 100 | 400 | 100 | 370 | N/D | N/D |
| | Dermal (mg/kg/d) | NNF | ~250 | NNF | ~250 | N/D | N/D | N/D | N/D | N/D | N/D |
| | Oral (mg/kg/d) | NNF | 200 | NNF | 1,000 | 150 | 300 | 93 | 185 | N/D | N/D |
| EB | Inhalation (ppm) | 200 | NLF | 25 | 50 | 494 | NLF | 25 | 77 | 494 | NLF |
| | Dermal (mg/kg/d) | 1,176 | NLF | 1,176 | NLF | 360 | NLF | 150 | 180 | 360 | NLF |
| | Oral (mg/kg/d) | 1,180 | NLF | 30 | 100 | 885 | NLF | 80 | 90 | 885 | NLF |

N/D = No Data • NNF = No NOAEL Found (Lowest dose tested caused the effect) • NLF = No LOAEL Found (Highest dose tested did not cause the effect)

* Kidney toxicity was reported at lower doses.

Table 11.65: DOWANOL Miscibility, Solubility, Evaporation Rates, Vapor Pressure, Density, Surface Tension and Other Data (23)

Liquids Miscible With DOWANOL Glycol Ethers

| | | | |
|--------------------------------|----------------------------------------|----------------------------------------|-----------------------------------------|
| Acetaldehyde | Diacetone Alcohol ¹ | Furfural | Phenyl Acetate |
| Acetic Acid (Glacial) | Dibutoxy Ethyl Phthalate ¹ | Isopropanol | Phosphoric Acid (Conc.) |
| Acetic Anhydride | Dibutyl Phthalate | Isopropylbenzene (Cumene) | Pine Oil |
| Acetone | Dibutyl Sebacate ¹ | Isopropyl Chloride ¹ | Piperidine ¹ |
| Acetylene Tetrabromide | o-Dichlorobenzene | Lactic Acid 85% | Polyethylene Glycol 400 ¹ |
| Acrylonitrile ¹ | Dichloroethyl Ether | Methanol | Polyethylene Glycol 600 ¹ |
| Allyl Alcohol ¹ | Dichloroisopropyl Ether ¹ | Methyl Cyclohexanol ¹ | Polypropylene Glycol 400 ¹ |
| Amyl Alcohol | Diethanolamine | Methyl Ethyl Ketone | Polypropylene Glycol 750 ¹ |
| tert-Amyl Alcohol ¹ | Didecyl Phthalate ¹ | Methyl Isobutyl Ketone | Polypropylene Glycol 1200 ¹ |
| Amyl Acetate | Diethyl Ether | Methyl Salicylate | n-Propanol |
| Aniline | Diethylene Glycol | Methylene Bromide | Propylene Dichloride |
| Benzaldehyde | Di-2-Ethylhexyl Phthalate ¹ | Methylene Chlorobromide ¹ | Propylene Glycol |
| Benzene | Di-2-Ethylhexyl Sebacate ¹ | Methylene Chloride | Pyridine ¹ |
| Benzyl Alcohol | Diisooctyl Phthalate ¹ | Monochlorobenzene | Ricinoleic Acid ¹ |
| n-Butyl Acetate | Dimethoxy Ethyl Phthalate ¹ | Monoethanolamine | Styrene N-99 ¹ |
| n-Butyl Alcohol | p-Dioxane | Monoisopropanolamine | Styrene Oxide ¹ |
| n-Butyl Lactate ¹ | Diphenyl Oxide | Morpholine | Tetrachloroethane |
| Butyl Oleate ¹ | Dipropylene Glycol | Nitrobenzene | Tetrahydrofurfuryl Alcohol |
| n-Butyraldehyde | Ethanol (95%) | Nitroethane ¹ | Toluene |
| Carbon Bisulfide | Ethyl Acetate | Nitromethane | Trichloroethylene |
| Carbon Tetrachloride | Ethyl Benzene ¹ | Octyl Alcohol | 1,1,1-Trichloroethane |
| Castor Oil | Ethyl Bromide ¹ | Oleic Acid | Tricresyl Phosphate ¹ |
| Chloroform | Ethylene Chlorohydrin ¹ | Paraldehyde | Triethanolamine |
| CHLOROTHENE* solvent | Ethylene Dibromide | Pentachlorodiphenyl Oxide ¹ | Triethylene Glycol |
| Cyclohexanol | Ethylene Dichloride | Perchloroethylene | Trimethylene Chlorobromide ¹ |
| Cyclohexanone ¹ | Ethylene Glycol | Phenethyl Acetate ¹ | Tripropylene Glycol |
| Cyclohexene | Ethylidene Dichloride ¹ | Phenethyl Alcohol ¹ | Tall Oil |
| Dehydrated Castor Oil | Ethyl Lactate ¹ | Phenetole ¹ | Xylene |
| 9-11 Acids ¹ | | | |

¹The solubility of these products has not been determined for DOWANOL EPh, DALPAD A, and DOWANOL PPh
*Trademark of The Dow Chemical Company

Solubility Limits of Various Liquids in DOWANOL Glycol Ethers¹ (ml/100 ml)

| COMPOUND | PM | DPM | TPM | PPh | EB | DB | TBH | DM | TMH | EPh |
|-------------------------------|----------------|----------------|-----|-----|----|----|-----|----------------|------|-----|
| n-Butyl stearate | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | — | 8 | — | ∞ |
| Cottonseed oil | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | — | Ins. | — | 6 |
| Cyclohexane | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | — | 64 | — | 33 |
| Diamylnaphthalene | ∞ | ∞ | ∞ | — | ∞ | ∞ | — | ∞ | — | — |
| Di-2-ethylhexyl adipate | ∞ | ∞ | ∞ | — | ∞ | ∞ | — | ∞ | — | — |
| Fish oil | ∞ | ∞ | ∞ | — | ∞ | ∞ | — | 1.5 | — | — |
| Formaldehyde (40%) | ∞ | ∞ | ∞ | 21 | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ |
| Formamide (37-38% stabilized) | ∞ | ∞ | ∞ | 12 | ∞ | ∞ | — | ∞ | — | ∞ |
| Gasoline | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | 22 | ∞ | 10 |
| n-Heptane | ∞ | ∞ | ∞ | 46 | ∞ | ∞ | ∞ | 19 | 23 | 8 |
| Hexane | ∞ | ∞ | ∞ | 70 | ∞ | ∞ | 93 | 21 | 25 | 12 |
| Hydrochloric acid (conc.) | ∞ | ∞ | ∞ | 5.2 | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ |
| Kerosene | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | — | 3 | — | 0.5 |
| Linseed oil (boiled) | ∞ ² | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | <0.4 | Ins. | ∞ |
| Lemon oil | ∞ | ∞ | ∞ | — | ∞ | ∞ | — | ∞ | — | — |
| Methyl cyclohexane | ∞ | ∞ | ∞ | — | ∞ | ∞ | — | 46 | — | — |
| Oiticica oil | ∞ | ∞ | ∞ | — | ∞ | ∞ | — | ∞ ³ | — | — |
| Olive oil | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | ∞ | Ins. | Ins. | ∞ |
| Peanut oil | ∞ | ∞ | ∞ | — | ∞ | ∞ | ∞ | Ins. | Ins. | — |
| Safflower oil | ∞ | ∞ | ∞ | — | ∞ | ∞ | ∞ | Ins. | Ins. | — |
| Soybean oil | ∞ | ∞ | ∞ | — | ∞ | ∞ | ∞ | Ins. | Ins. | — |
| Turpentine | ∞ | ∞ | ∞ | — | ∞ | ∞ | ∞ | 55 | 28 | — |
| Tung oil | ∞ ⁴ | ∞ ⁵ | ∞ | — | ∞ | ∞ | ∞ | Ins. | Ins. | — |
| Water | ∞ | ∞ | ∞ | 1.1 | ∞ | ∞ | ∞ | ∞ | ∞ | 2.3 |

¹ Solubility data refer only to room temperature. For many DOWANOL glycol ether products, solubility is very dependent on temperature.

² Above 48 ml solute; smaller quantities give hazy solutions.

³ Above 80 ml solute; smaller quantities give hazy solutions.

⁴ Above 86 ml solute; smaller quantities give hazy solutions.

⁵ Above 20 ml solute; smaller quantities give hazy solutions.

(continued)

Table 11.65: (continued)

Solubility of Various Soaps in DOWANOL Glycol Ethers¹ (g/100 g)

| COMPOUND | PM | DPM | TPM | PPh | EB | DB | DM | EPh |
|---------------------------------|------|------|------|------|------|------|------|------|
| Monoethanolamine laurate | 19 | 4 | 3 | 7 | 37 | 21 | 15 | 3 |
| Monoethanolamine oleate | >100 | >100 | >100 | >100 | >100 | >100 | >100 | >100 |
| Monoethanolamine stearate | 3 | 1 | <1 | 2 | 2 | <1 | <1 | <1 |
| Diethanolamine laurate | >100 | 97 | 28 | >100 | >100 | >100 | >100 | >100 |
| Diethanolamine oleate | >100 | >100 | >100 | >100 | >100 | >100 | >100 | >100 |
| Diethanolamine stearate | 28 | 7 | 4 | 66 | 26 | 14 | 7 | 38 |
| Triethanolamine laurate | >100 | 22 | 18 | 68 | 90 | 58 | 67 | 80 |
| Triethanolamine oleate | >100 | >100 | >100 | >100 | >100 | >100 | >100 | >100 |
| Triethanolamine stearate | 15 | 6 | 5 | 21 | 13 | 5 | <1 | 27 |
| Monoisopropanolamine laurate | >100 | 37 | 15 | >100 | >100 | >100 | >100 | >100 |
| Monoisopropanolamine oleate | >100 | >100 | >100 | >100 | >100 | >100 | >100 | >100 |
| Monoisopropanolamine stearate | 3 | 2 | 1 | 11 | 5 | 4 | <1 | <1 |
| Monoethanolamine tall oil | >100 | >100 | >100 | >100 | >100 | >100 | >100 | >100 |
| Triethanolamine tall oil | >100 | >100 | >100 | >100 | >100 | >100 | >100 | >100 |
| Mixed Isopropanolamine tall oil | >100 | >100 | >100 | >100 | >100 | >100 | >100 | >100 |
| Potassium oleate | >100 | >100 | >100 | — | >100 | >100 | >100 | — |
| Sodium oleate | <1 | <1 | <1 | — | 1 | 1 | 1 | — |

¹ The solubilities of the various soaps in the DOWANOL glycol ether products were determined by the following method. The various substances were added by weight to 25g of DOWANOL glycol ether; the samples were then shaken mechanically for 15 hours. All solubility studies were carried out at room temperature. Solubility was determined on basis of a true solution. Solubility in all cases is reported as grams dissolved in 100g of DOWANOL glycol ether.

Resin Solubility[†]

| COMPOUND | PM | DPM | TPM | PMA | DPMA | PPh | EB | DB | DM | EPh |
|----------------------------------------------|----------------|----------------|----------------|-----|------|----------------|----------------|----------------|----------------|----------------|
| Acrylic Acryloid ¹ B-66 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Acryloid B-72 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Acryloid B-82 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Elvacite ² 2010 | ● | ★ | ■ | ● | ★ | ★ | ○ | ○ | ● | ★ |
| Epoxy D.E.R.* 651 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| D.E.R. 657 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Melamine Cymel ³ 303 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Isocyanate Desmodur ⁴ N100 | ● ⁷ | ● ⁷ | ● ⁷ | ● | ● | ● ⁷ | ● ⁷ | ● ⁷ | ● ⁷ | ● ⁷ |
| Nitrocellulose R.S. ½ sec | ● | ● | ● | ● | ● | ■ | ● | ● | ● | ■ |
| R.S. ¼ sec | ● | ● | ● | ● | ● | ★ | ● | ● | ● | ■ |
| Alkyd Cargill 5710 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Polyester Cargill 5781 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Chempol ⁵ 11-2339 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Cellulosic CAP-482-0.5 | ● | ★ | ■ | ● | ● | ● | ■ | ■ | ● | ● |
| CAB-381-2 | ● | ■ | ■ | ● | ● | ● | ○ | ○ | ● | ● |
| Phenoxy UCAR ⁶ PKHC | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Vinyl UCAR VYHH | ○ | ○ | ○ | ● | ■ | ■ | ○ | ○ | ■ | ★ |

[†] METHOD: Solubility observations were made after 0.5 g resin and 4.5 ml solvent were agitated for 24 hours

- * Trademark of The Dow Chemical Company
- ¹ Acryloid Trademark of Rohm & Haas Company
- ² Elvacite Trademark of E. I. DuPont de Nemours & Company
- ³ Cymel Trademark of American Cyanamid Company
- ⁴ Desmodur Trademark of Farbenfabriken Bayer AG
- ⁵ Chempol Trademark of Freeman Chemical Corporation
- ⁶ UCAR Trademark of Union Carbide Corporation
- ⁷ Soluble, but not recommended for use

- Soluble
- ★ Partially soluble, some undissolved gel particles
- Partially soluble, many undissolved gel particles
- Insoluble

(continued)

Table 11.65: (continued)

Coupling Abilities of DOWANOL Glycol Ethers and Alcohols

| Composition of Titrant, Volume % | | | | | | | | | ml to couple ¹ |
|----------------------------------|-----|-----|-----|-----|-----|-------------|------------|-----------|---------------------------|
| PM | DPM | TPM | EB | DB | DM | sec-butanol | isobutanol | n-butanol | |
| | | | 100 | | | | | | 32.8 |
| | | | 75 | | | 25 | | | 34.2 |
| | | | 50 | | | 50 | | | 37.9 |
| 50 | | | | | | | | 50 | 41.0 |
| | 25 | | | | | 75 | | | 42.1 |
| | | | | 100 | | | | | 42.5 |
| | | | 25 | | | 75 | | | 48.8 |
| 25 | | | | | | | | 75 | 51.0 |
| | 50 | | | | | | 50 | | 58.3 |
| | | | | | | 100 | | | 60.9 |
| | 25 | | | | | | 75 | | 61.8 |
| | 50 | | | | | 50 | | | 63.9 |
| 75 | | | | | | | | 25 | 64.0 |
| | | 100 | | | | | | | 67.0 |
| | | | | | | | | 100 | 71.0 |
| | 75 | | | | | | 25 | | 78.8 |
| 100 | | | | | | | | | 80.0 |
| | 75 | | | | | 25 | | | 82.1 |
| | 100 | | | | | | | | 95.8 |
| | | | | | | | 100 | | 104.6 |
| | | | | | 100 | | | | 230.0 |

¹ Milliliters of product required to titrate 10 ml of mineral spirits and 10 ml of water to a clear homogeneous solution at 25°C.

Evaporation Rates of DOWANOL Products



| DOWANOL | (BuAc = 1.00) ¹ | DOWANOL | (BuAc = 1.00) |
|---------|----------------------------|----------|---------------|
| PM | 0.71 | BC-300 | 0.21 |
| DPM | 0.02 | EB | 0.08 |
| TPM | <0.01 | DB | 0.003 |
| PMA | 0.34 | TBH | <<0.01 |
| DPMA | <0.01 | DM | 0.02 |
| PPh | <0.01 | TMH | <<0.01 |
| BC-100 | 0.60 | EPh | <0.01 |
| BC-200 | 0.25 | DALPAD A | <0.01 |

¹ Chemists use the evaporation rate of butyl acetate as the standard for determining evaporation rates of solvents. Butyl acetate has an arbitrary value of 1.00. All solvents evaporating faster than butyl acetate have a number higher than 1.00. Those evaporating more slowly have evaporation rates lower than 1.00. All glycol ethers evaporate more slowly than butyl acetate.

(continued)

Table 11.65: (continued)

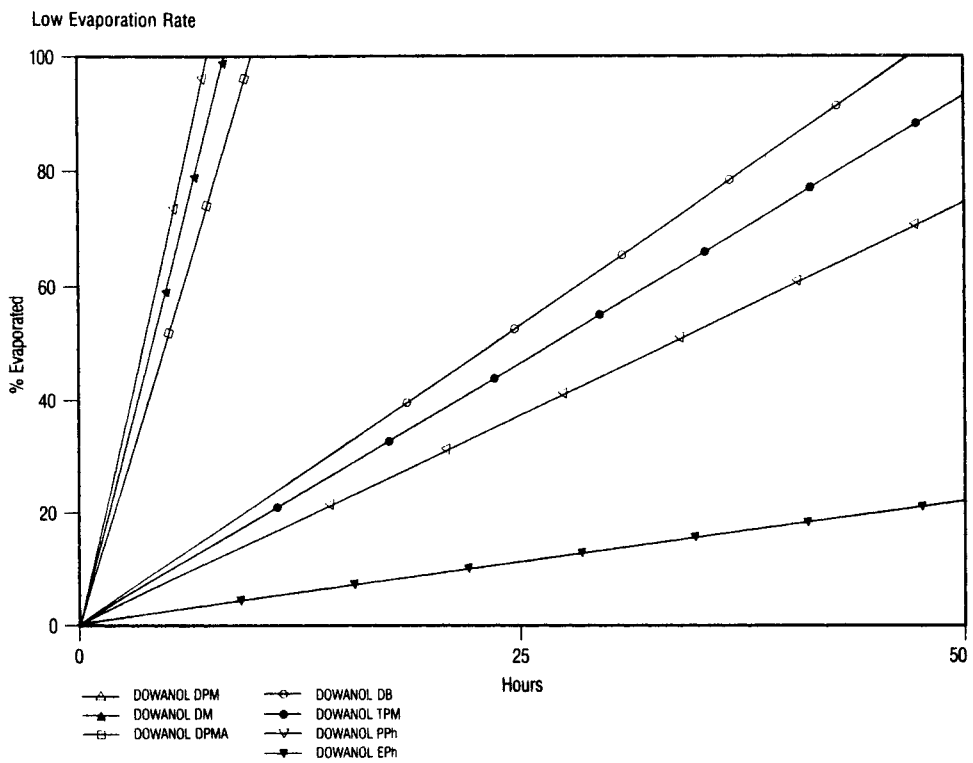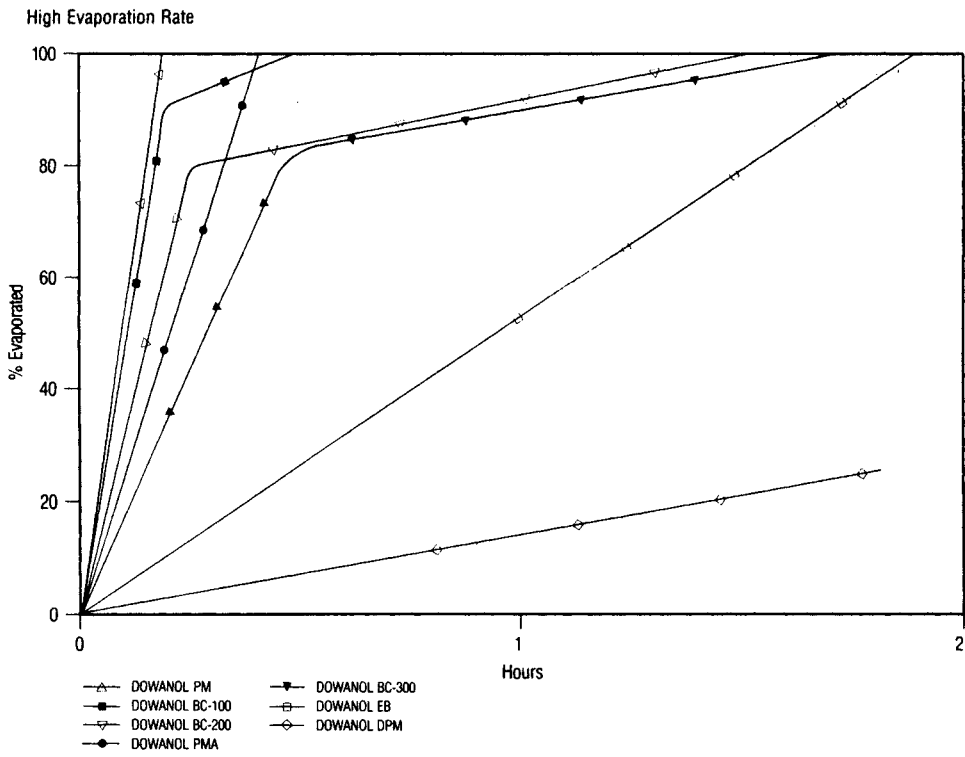
Evaporation Rates of DOWANOL Products




(continued)

Table 11.65: (continued)

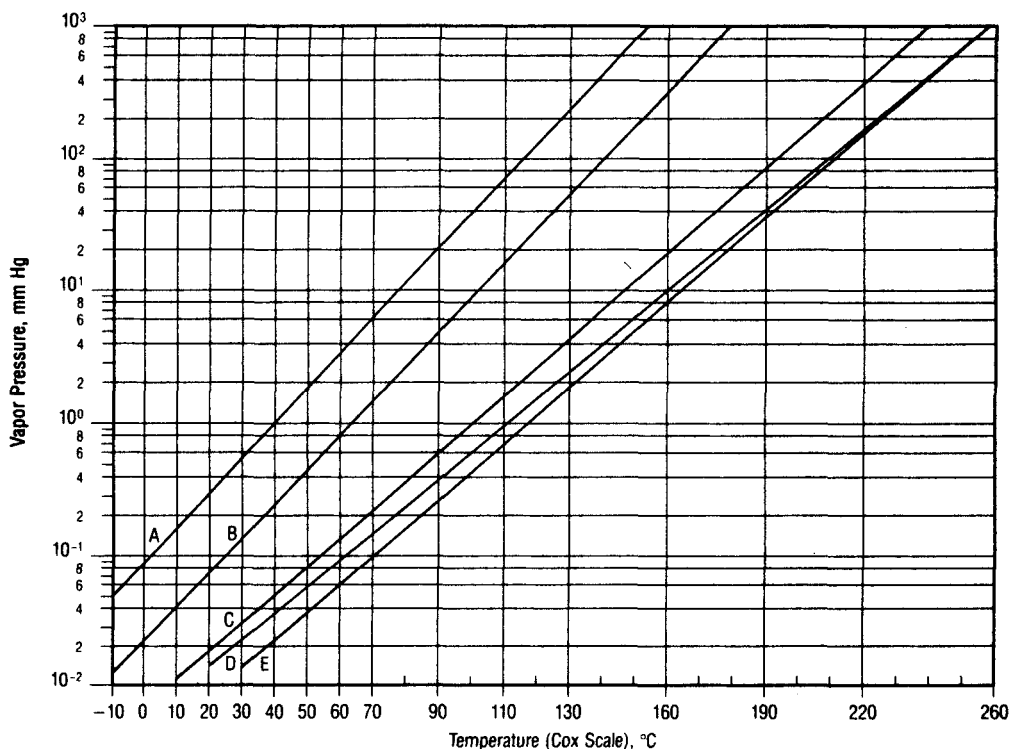Vapor Pressures of DOWANOL Products



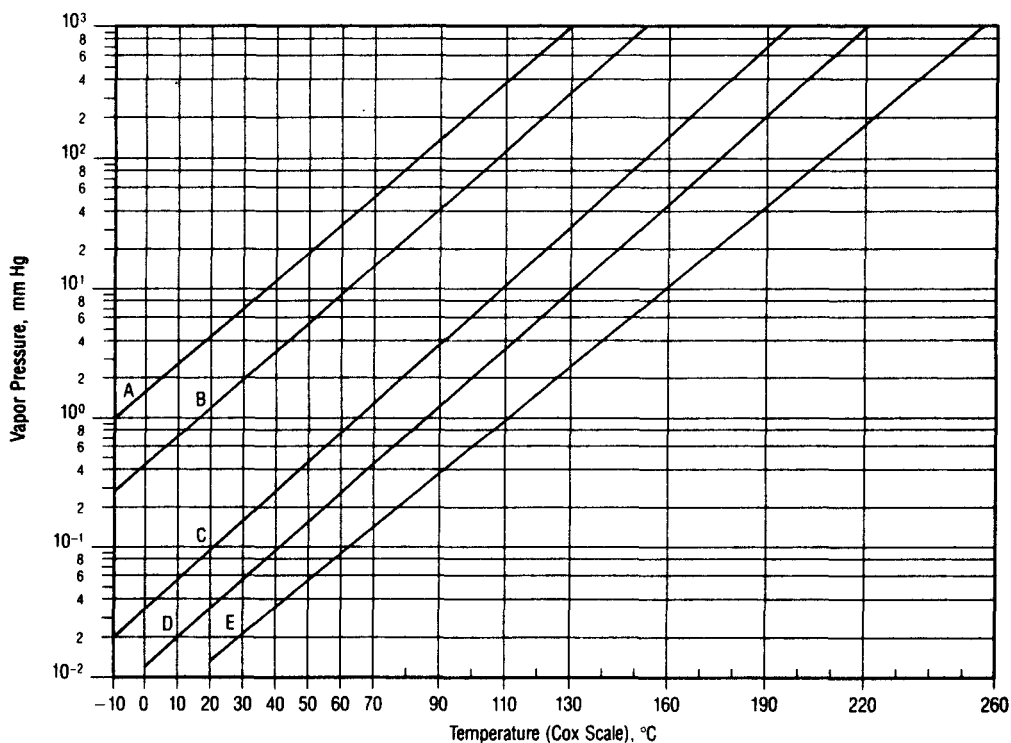A = DOWANOL EB B = DOWANOL DM C = DOWANOL DB D = DOWANOL PPh E = DOWANOL EPh







A = DOWANOL PM B = DOWANOL PMA C = DOWANOL DPM D = DOWANOL DPMA E = DOWANOL TPM

(continued)

Table 11.65: (continued)

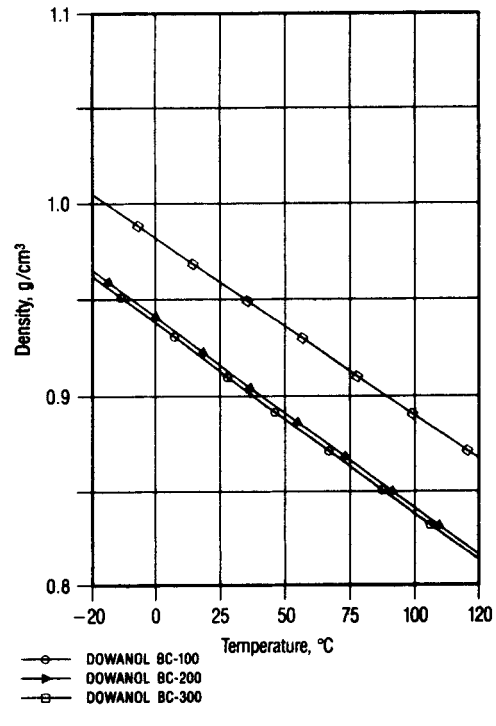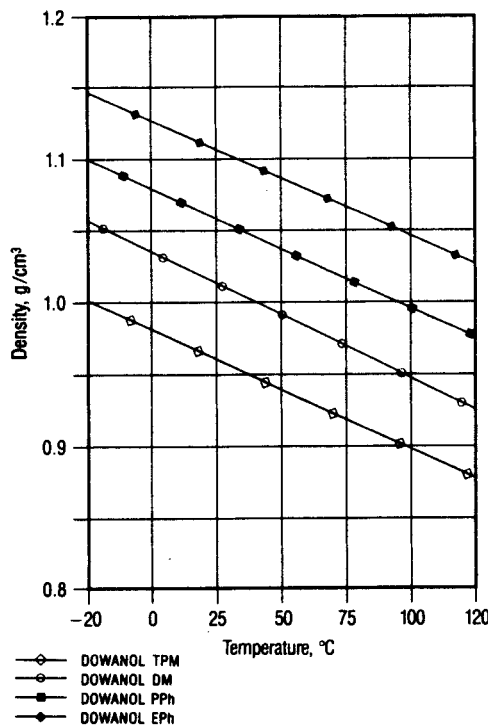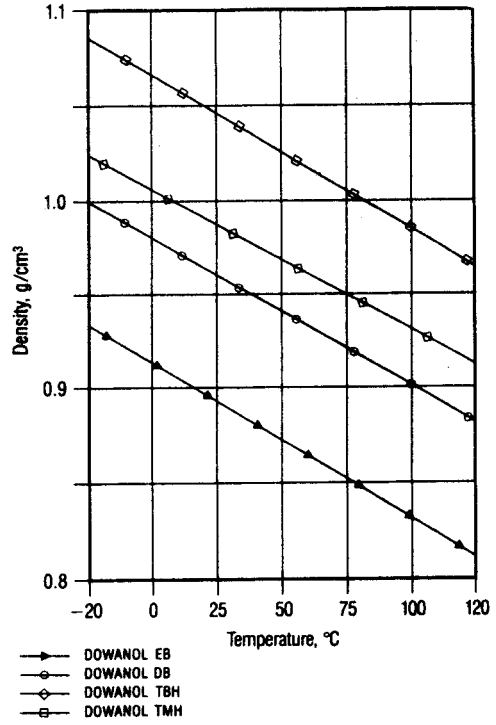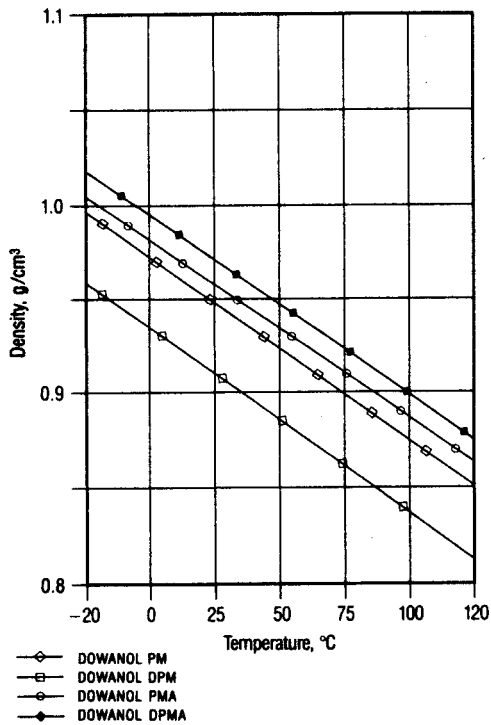
Density (g/cm³) of DOWANOL Products




(continued)

Table 11.65: (continued)

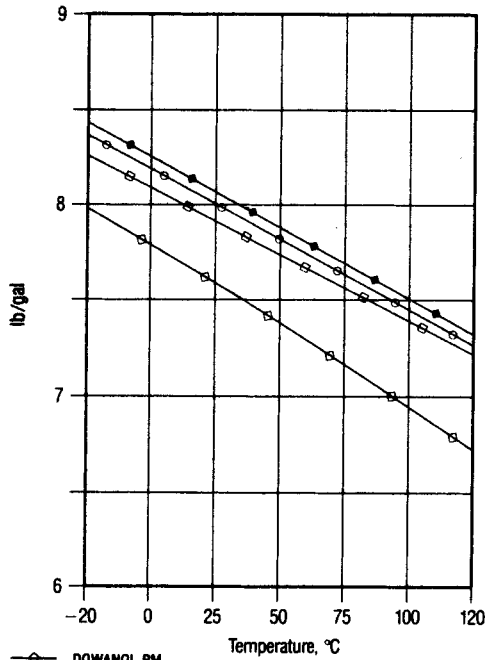
Pounds/Gallon of DOWANOL Products



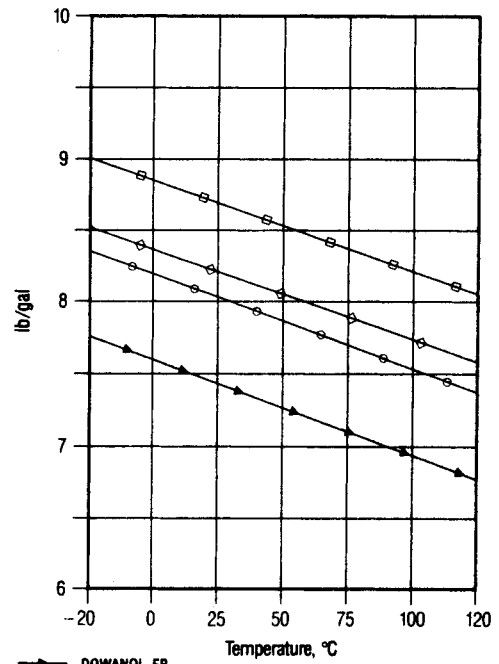
- DOWANOL PM
- DOWANOL DPM
- ◇ DOWANOL PMA
- DOWANOL DPMA



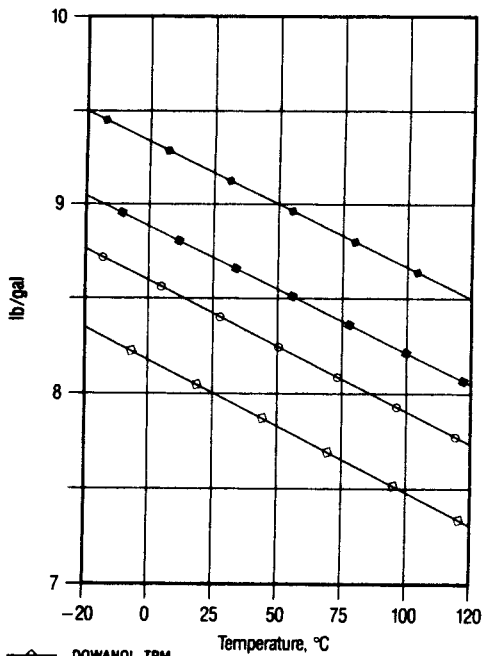- ▲ DOWANOL EB
- DOWANOL DB
- ◇ DOWANOL TBH
- DOWANOL TMH



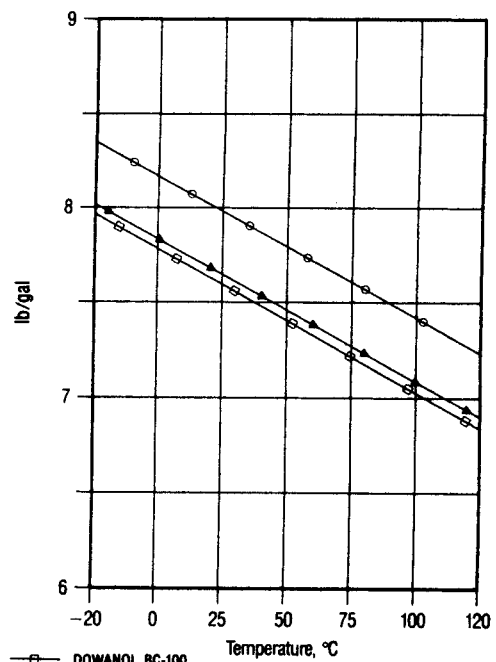- DOWANOL TPM
- ◇ DOWANOL DM
- DOWANOL PPh
- DOWANOL EPh



- DOWANOL BC-100
- ▲ DOWANOL BC-200
- DOWANOL BC-300


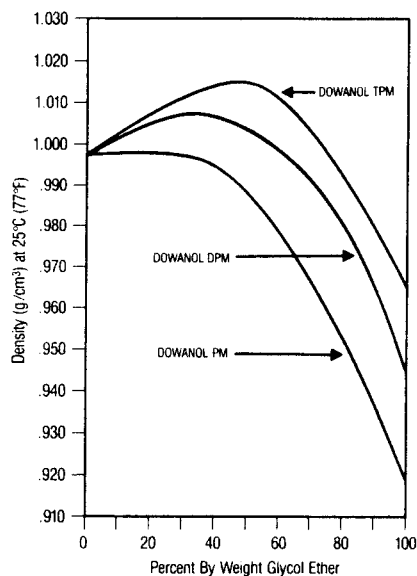
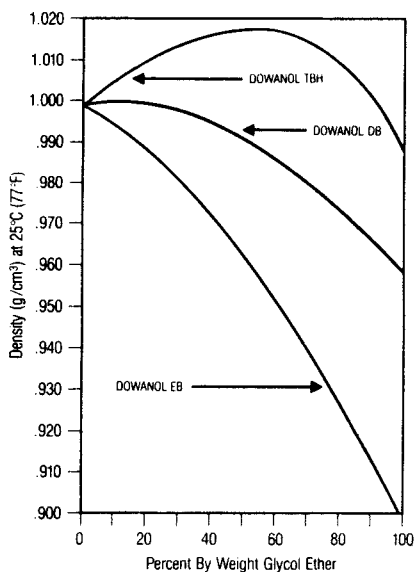
(continued)

Table 11.65: (continued)

Coefficients of Expansion of Liquid DOWANOL Products

| DOWANOL | Coefficient of Expansion (per °C) | Coefficient of Expansion (per °F) |
|----------|--------------------------------------|--------------------------------------|
| PM | 0.00100 | 0.00056 |
| DPM | 0.00094 | 0.00052 |
| TPM | 0.00089 | 0.00049 |
| PMA | 0.00097 | 0.00054 |
| DPMA | 0.00100 | 0.00056 |
| PPh | 0.00086 | 0.00048 |
| BC-100 | 0.00100 | 0.00056 |
| BC-200 | 0.00099 | 0.00055 |
| BC-300 | 0.00098 | 0.00055 |
| EB | 0.00086 | 0.00048 |
| DB | 0.00081 | 0.00045 |
| TBH | 0.00079 | 0.00044 |
| DM | 0.00091 | 0.00051 |
| TMH | 0.00079 | 0.00044 |
| EPh | 0.00086 | 0.00048 |
| DALPAD A | 0.00086 | 0.00048 |

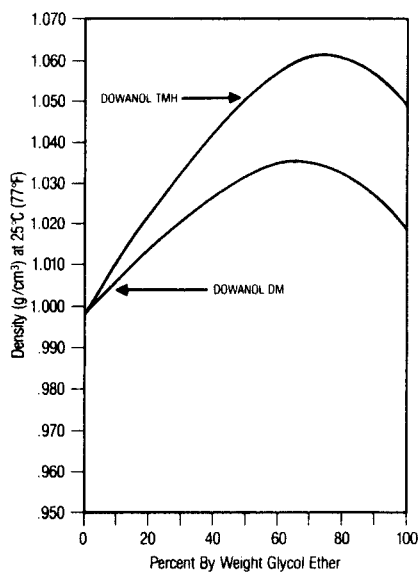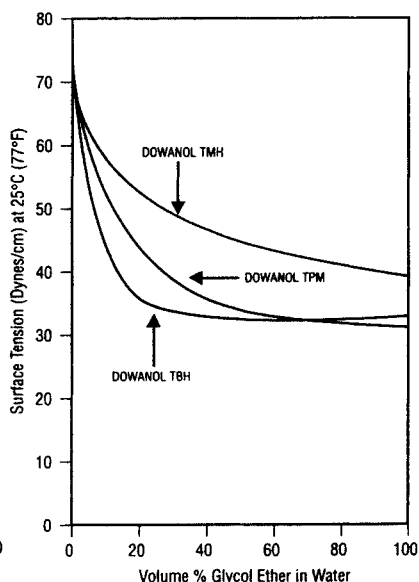
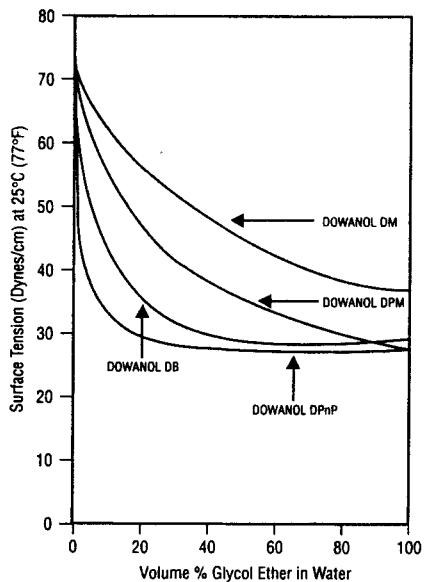
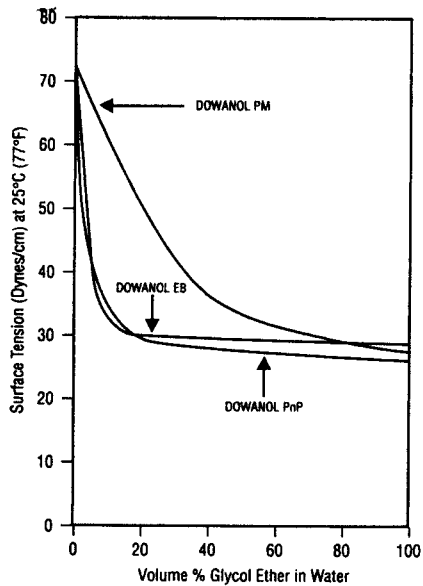
Density (g/cm³) of Aqueous Solutions of DOWANOL Products





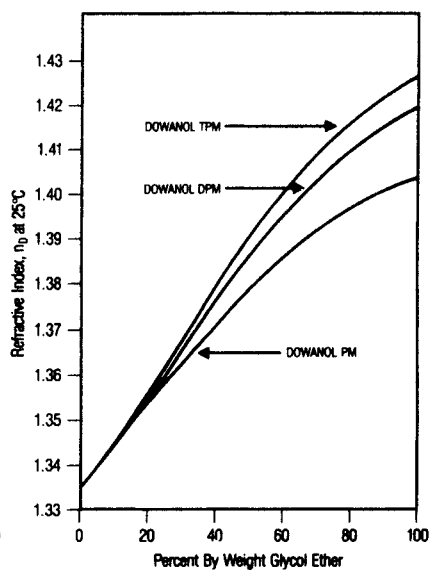
(continued)

Table 11.65: (continued)

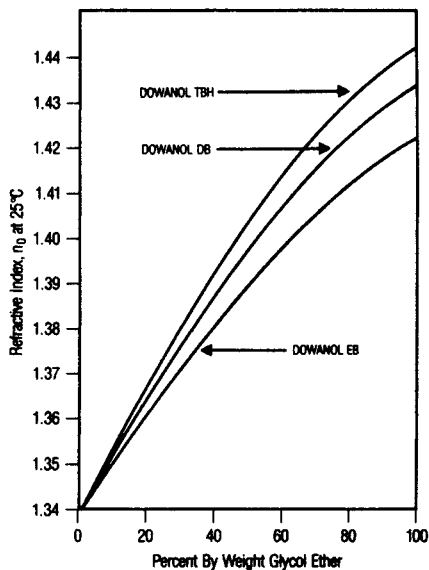Surface Tensions of Aqueous Solutions of DOWANOL Products



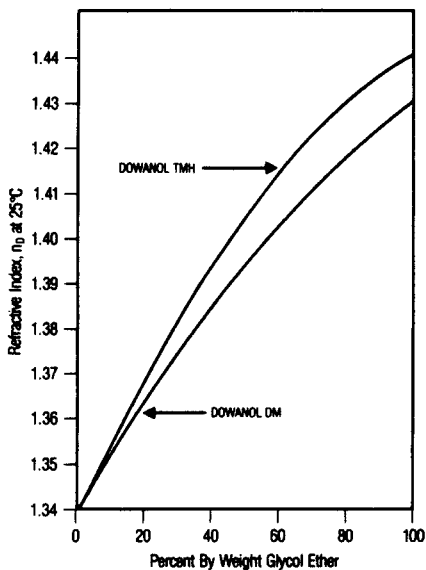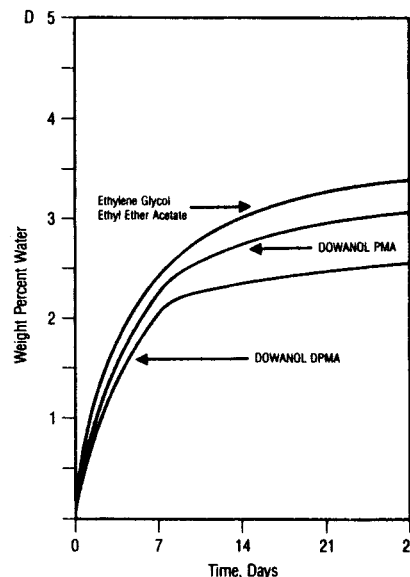
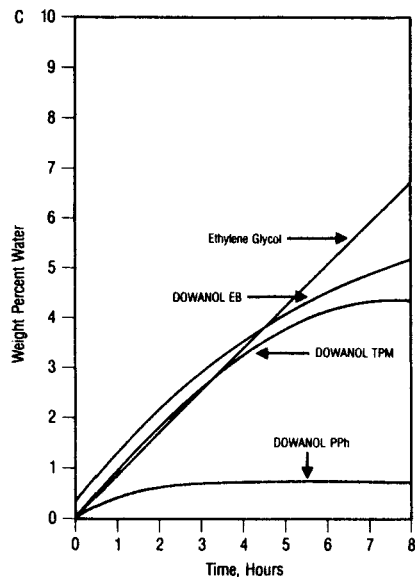
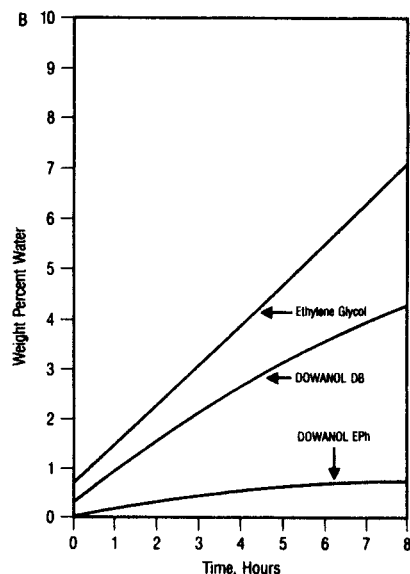
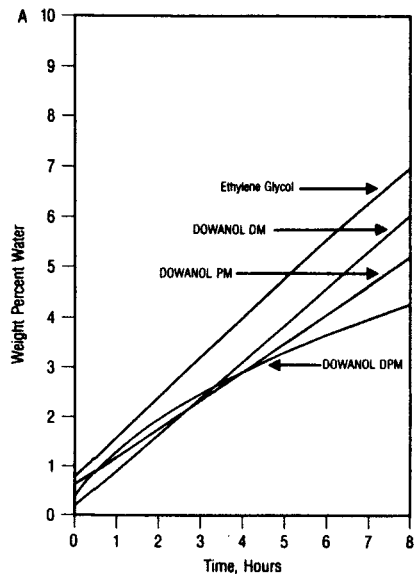
Refractive Indices of Aqueous Solutions of DOWANOL Products




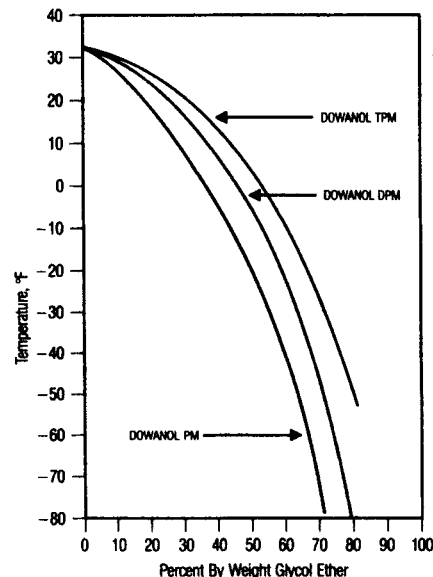
(continued)

Table 11.65: (continued)

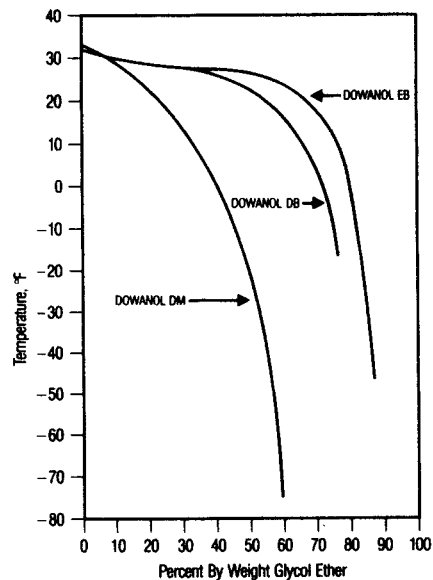Hygroscopicity of DOWANOL Products at 21°C (70°F) and 77% Relative Humidity




Freezing Points of Aqueous Solutions of DOWANOL Products



(continued)

Table 11.65: (continued)

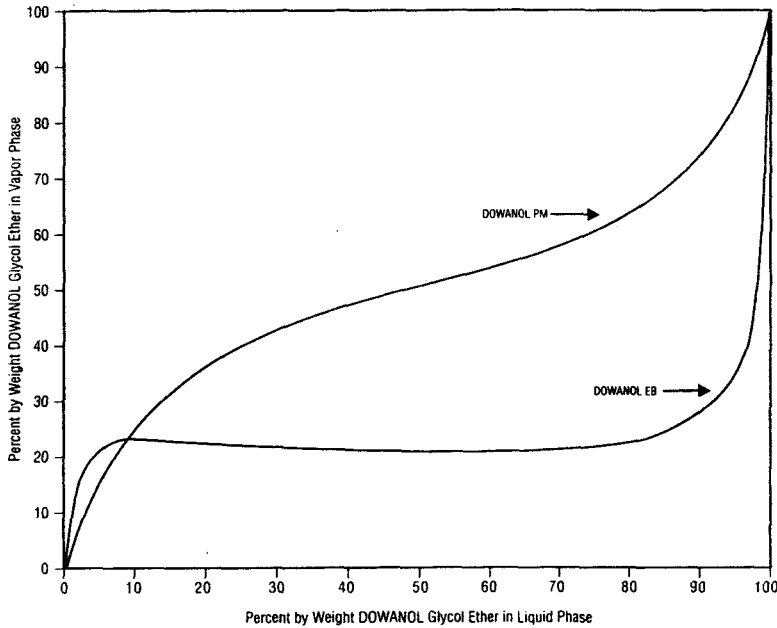Vapor-Liquid Equilibrium of DOWANOL Products & Water (760 mm Hg)



Azeotropes of DOWANOL Products

| Component Data | | Boiling Point °C at 760 mm Hg for Pure Component | Boiling Point °C at 760 mm Hg for Azeotrope | Azeotropic Data | |
|----------------|---------------------------|--------------------------------------------------|---------------------------------------------|--------------------------|---------|
| Component A | Component B | | | Composition of Azeotrope | |
| | | | | Wt. % A | Wt. % B |
| DOWANOL EB | Water | 171.2 | 98.8 | 20.8 | 79.2 |
| | Bis (2-chloroethyl) Ether | 179.2 | 170.8 | 75 | 25 |
| | Amyl Ether | 187.5 | 169.0 | 67 | 33 |
| DOWANOL PM | Water | 120.1 | 98.3 | 51.5 | 48.5 |
| | Toluene | 110.7 | 106.5 | 30 | 70 |

Rubber Swell Properties of DOWANOL Products

| | PM | DPM | TPM | EB | DB | DM |
|-------------------------------------------|----|-----|-----|-----|-----|----|
| <i>Natural Rubber Swell¹</i> | | | | | | |
| Average % Dimension Change | 6 | 7 | 9 | 21 | 11 | 2 |
| Average % Volume Change | 21 | 26 | 29 | 92 | 32 | 7 |
| <i>Synthetic Rubber Swell²</i> | | | | | | |
| Change in Length³ | | | | | | |
| Buna (GR-S) | 8 | 12 | 12 | 20 | 11 | 1 |
| Butyl | 6 | 9 | 7 | 15 | 7 | -1 |
| Neoprene | 10 | 20 | 22 | 24 | 28 | 7 |
| Change in Width³ | | | | | | |
| Buna (GR-S) | 7 | 11 | 13 | 26 | 14 | 4 |
| Butyl | 3 | 7 | 6 | 16 | 10 | 3 |
| Neoprene | 10 | 22 | 22 | 24 | 29 | 9 |
| Change in Thickness³ | | | | | | |
| Buna (GR-S) | 6 | 10 | 11 | 49 | 34 | 23 |
| Butyl | 5 | 10 | 7 | 33 | 25 | 19 |
| Neoprene | 42 | 59 | 58 | 60 | 69 | 48 |
| Average % Volume Change | | | | | | |
| Buna (GR-S) | 22 | 37 | 40 | 127 | 69 | 30 |
| Butyl | 14 | 28 | 22 | 79 | 47 | 22 |
| Neoprene | 72 | 133 | 135 | 147 | 178 | 73 |

¹ Tests made in manner specified for hydraulic fluids by SAE (Lockhead Wagner FC-666-XO brake fluid cups, 120 hours at 158°F.)

² Tests were carried out using cured rubber strips measuring approximately 2 x 1 x 0.11 inch, 120 hours at 158°F.

³ Average % dimension


(continued)

Table 11.65: (continued)

Heats of Combustion of DOWANOL Glycol Ethers


| DOWANOL | kcal/mole | kcal/g | BTU/lb |
|---------|-----------|--------|--------|
| PM | 556 | 6.18 | 11,115 |
| DPM | 961 | 6.49 | 11,700 |
| TPM | 1,366 | 6.62 | 11,900 |
| EB | 848 | 7.18 | 12,915 |
| DB | 1,109 | 6.84 | 12,300 |
| DM | 670 | 5.58 | 10,043 |
| EPh | 958 | 6.93 | 12,500 |

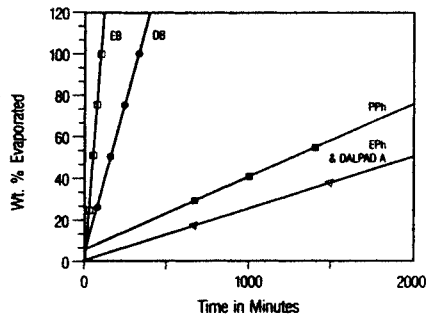Observed Evaporation Rates For DOWANOL EB, DB, PPh, EPh or DALPAD A



Minimum Film Formation Temperature (MFFT) - Coalescent Efficiency

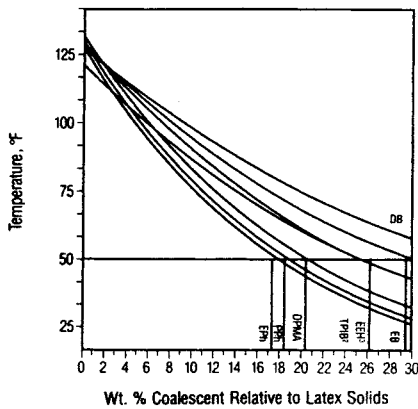RHOPLEX¹ WL - 91



- ¹ Trademark of Rohm & Haas Company
- ² 2, 2, 4-trimethyl-1, 3-pentanediol monoisobutyrate
- ³ Ethylene glycol mono-2-ethoxyethyl ether

Coupling Abilities of DOWANOL Glycol Ethers and Alcohols¹

| PM | DPM | TPM | Composition of Titrant, Volume % | | | | | | ml to couple ¹ |
|-----|-----|-----|----------------------------------|-----|-----|-------------|------------|-----------|---------------------------|
| | | | EB | DB | DM | sec-butanol | isobutanol | n-butanol | |
| | | | 100 | | | | | | 32.8 |
| | | | 75 | | | | 25 | | 34.2 |
| | | | 50 | | | | 50 | | 37.9 |
| 50 | | | | | | | | 50 | 41.0 |
| | 25 | | | | | | 75 | | 42.1 |
| | | | | 100 | | | | | 42.5 |
| | | | 25 | | | | 75 | | 48.8 |
| 25 | | | | | | | | 75 | 51.0 |
| | 50 | | | | | | | 50 | 58.3 |
| | | | | | | | 100 | | 60.9 |
| | 25 | | | | | | | 75 | 61.8 |
| | 50 | | | | | | 50 | | 63.9 |
| 75 | | | | | | | | 25 | 64.0 |
| | | 100 | | | | | | | 67.0 |
| | | | | | | | | 100 | 71.0 |
| | 75 | | | | | | | 25 | 78.8 |
| 100 | | | | | | | | | 80.0 |
| | 75 | | | | | | 25 | | 82.1 |
| | 100 | | | | | | | | 95.8 |
| | | | | | | | | 100 | 104.6 |
| | | | | | 100 | | | | 230.0 |

¹ Milliliters of product required to titrate 10 ml of mineral spirits and 10 ml of water to a clear homogeneous solution at 25°C

(continued)

Table 11.65: (continued)

Properties and Performance of DOWANOL Glycol Ethers in Lacquers

| DOWANOL | Viscosity of 8% nitrocellulose solutions in DOWANOL glycol ethers, centistokes at 77°F | Blush Conditions ¹ | | | | Dilution Ratios ² | | Kauri ³ Butanol Number |
|---------|----------------------------------------------------------------------------------------|---------------------------------------------------|----------------|---------------------|----------------|------------------------------|------------|-----------------------------------|
| | | Blush Conditions | | No Blush Conditions | | Toluene | Naphtha | |
| | | % Relative Humidity | Temperature °F | % Relative Humidity | Temperature °F | | | |
| PM | 74.18 | 61 | 82 | 56 | 82 | 5.2 | 0.9 | Above 500 |
| DPM | 158.76 | 90 | 82 | 85 | 82 | 4.2 | 0.8 | Above 500 |
| TPM | 407.16 | 95 | 82 | 90 | 82 | 3.1 | 0.7 | Above 500 |
| EB | 160.92 | 95 | 82 | 90 | 82 | 5.2 | 2.2 | Above 500 |
| DB | 229.32 | No blush at 95% rel. hum. and 84°F after one hour | | | | 6.5 | 1.9 | Above 500 |
| DM | 149.05 | 61 ⁴ | 82 | 56 ⁴ | 82 | 4.6 | Immiscible | Above 500 |

¹ Blush resistance tests were carried out by spraying a solution of 92% DOWANOL glycol ether and 8% nitrocellulose on a 6" x 24" glass plate from a distance of eight inches, 30-40 pounds air pressure was used and 30 minutes drying time allowed.

² Dilution ratios were determined by dissolving 2 g of dried nitrocellulose in 20 ml of DOWANOL glycol ether and adding toluene or naphtha until the nitrocellulose precipitated. The volume of toluene or naphtha required divided by 20 was taken as the dilution ratio.

³ Kauri Butanol numbers are determined by adding the material being checked to 20 ml of Kauri Butanol reagent until 10 point type can no longer be read through the solution. The number of ml of material required to reach the endpoint is recorded as the Kauri Butanol number. With all DOWANOL glycol ether products tested, 500 ml were added to the reagent without the endpoint being reached.

⁴ DOWANOL DM glycol ether seemed to be quite deliquescent.

Solubility of Resins in DOWANOL Products

| COMPOUND | Resin Solubility [†] | | | | | | | | | |
|---------------------------------------|-------------------------------|----------------|----------------|-----|------|----------------|----------------|----------------|----------------|----------------|
| | PM | DPM | TPM | PMA | DPMA | PPh | EB | DB | DM | EPh |
| Acrylic Acryloid ¹ B-66 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Acryloid B-72 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Acryloid B-82 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Elvacite ² 2010 | ● | ★ | ■ | ● | ★ | ★ | ○ | ○ | ● | ★ |
| Epoxy D. E. R. * 651 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| D. E. R. 657 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Melamine Cymel ³ 303 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Isocyanate Desmodur ⁴ N100 | ● ⁷ | ● ⁷ | ● ⁷ | ● | ● | ● ⁷ | ● ⁷ | ● ⁷ | ● ⁷ | ● ⁷ |
| Nitrocellulose R.S. ½ sec | ● | ● | ● | ● | ● | ■ | ● | ● | ● | ■ |
| R.S. ¼ sec | ● | ● | ● | ● | ● | ★ | ● | ● | ● | ■ |
| Alkyd Cargill 5710 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Polyester Cargill 5781 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Chempol ⁵ 11-2339 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Cellulosic CAP-482-0.5 | ● | ★ | ■ | ● | ● | ● | ■ | ■ | ● | ● |
| CAB-381-2 | ● | ■ | ■ | ● | ● | ● | ○ | ○ | ● | ● |
| Phenoxy UCAR ⁶ PKHC | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Vinyl UCAR VYHH | ○ | ○ | ○ | ● | ■ | ■ | ○ | ○ | ■ | ● |

[†] METHOD: Solubility observations were made after 0.5 g resin and 4.5 ml solvent were agitated for 24 hours.

- Soluble
- ★ Partially soluble, some undissolved gel particles
- Partially soluble, many undissolved gel particles
- Insoluble

(continued)

Table 11.65: (continued)

DOWANOL Glycol Ethers Used in Cleaning Formulations


| CLEANER | DOWANOL Glycol Ether | | | | | | | |
|---------------------------------|----------------------|-----|-----|-----|----------|----|----|-----|
| | P-Series | | | | E-Series | | | |
| | PM | DPM | TPM | PPh | EB | DB | DM | EPh |
| Household/Industrial Cleaners | | | | | | | | |
| Glass Cleaners | • | • | | | • | | | |
| Liquid Soaps | | • | | | • | | | |
| Dry Cleaning Soaps | • | • | | | • | • | | |
| Rug Cleaners | • | • | | | • | • | | |
| Spotting Fluids | • | • | | | • | • | | |
| Phosphoric Acid Rust Removers | | • | • | | • | • | • | • |
| Aluminum Brighteners | | • | • | | • | • | • | |
| Metal Cleaners | • | • | | | • | • | | |
| Carbon and Grease Removers | • | • | | | • | | | |
| Paint/Varnish/Silicone Removers | • | • | • | • | • | • | • | • |
| Ink Removers | • | | • | | • | • | | |
| Hard Surface Cleaners | • | • | • | | • | • | | |
| Oven Cleaners | | • | • | | | • | | • |
| Penetrating Oils | | | • | | | • | | |
| White Wall Tire Cleaners | | • | | | • | | | |
| Disinfectants/Germicides | | • | | | • | • | | • |

DOWANOL Glycol Ethers Acceptable as Inert Ingredients in Pesticide Formulations 40 CFR 180.1001, (d) & (e)

| Inert Ingredient | Uses |
|------------------------------------------------------------------|------------------------------------------------------------------------------|
| (d) Pesticide formulations applied to growing crops only: | |
| DOWANOL PM | Solvent. |
| DOWANOL DPM | Stabilizer. |
| DOWANOL EB | Solvent, co-solvent. |
| DOWANOL DB | Deactivator for formulations used before crop emerges from soil; stabilizer. |
| DOWANOL DM | |
| (e) Pesticide formulations applied to animals: | |
| DOWANOL PM | Deactivator, emollient. |
| DOWANOL DPM | Surfactants, related adjuvants of surfactants. |

Evaporation Rate Program Plot Format

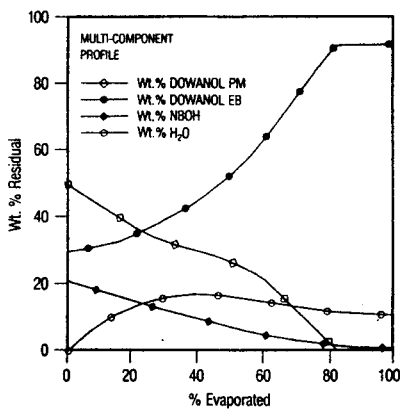
CHEMCOMP: Evaporation Rate Program



Typical Printout from Flash Point Estimator

CHEMCOMP: Flash Point Estimator

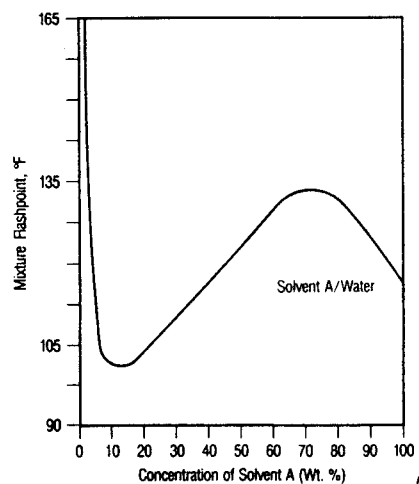Binary Flash Point Curve



(continued)

Table 11.65: (continued)

Typical Printout of Evaporation Rate Program

DOW CHEMICAL U.S.A. SOLVENT EVAPORATION RATE PROGRAM

CASE 1 – SOLVENTS AND COMPOSITIONS

| CODE | SOLVENT NAME | COMPOSITION | | |
|------------------|-------------------------|-------------|---------|---------|
| | | MOLE% | WEIGHT% | VOLUME% |
| PM | DOWANOL PM GLYCOL ETHER | 51.10 | 50.00 | 48.37 |
| EB | DOWANOL EB GLYCOL ETHER | 22.27 | 28.57 | 28.21 |
| NBOH | N-BUTYL ALCOHOL | 26.63 | 21.43 | 23.43 |
| H ₂ O | WATER | 0.00 | 0.00 | 0.00 |

| CODE | SOLVENT NAME | T90 (SEC) | RELATIVE RATE | FP (°F) | DENS (G/CC) | COST (\$/LB) |
|------------------|-------------------------|-----------|---------------|---------|-------------|--------------|
| PM | DOWANOL PM GLYCOL ETHER | 669. | 0.699509 | 100. | 0.916 | 0.00 |
| EB | DOWANOL EB GLYCOL ETHER | 6095. | 0.076770 | 143. | 0.898 | 0.00 |
| NBOH | N-BUTYL ALCOHOL | 1064. | 0.439783 | 97. | 0.811 | 0.00 |
| H ₂ O | WATER | 1490. | 0.314038 | | 0.997 | 0.00 |

ESTIMATED PROPERTIES FOR THE INITIAL BLEND

| | |
|--------------------------------------------|----------|
| DENSITY AT 25°C, G/CC | 0.888 |
| CLOSED CUP FLASH POINT, °F | 103. |
| SOLUBILITY PARAMETER, SQRT (CAL/CC) | 10.4 |
| HYDROGEN BONDING, RELATIVE TO ISOCTANE = 0 | 16.4 |
| DIPOLE MOMENT, DEBYE | 1.7 |
| 90% EVAPORATION TIME, SECONDS | 3910.42 |
| RATE RELATIVE TO NBAC AT 90% EVAPORATED | 0.119657 |

DATA SUMMARY – INITIAL AND AIR TEMP = 25.00°C, REL HUMIDITY = 60.00%

0.35% OF SOLVENT LOST DURING SAMPLE INJECTION TIME OF 8.00 SECONDS

| % EVAP | 0.0 | 15.0 | 30.0 | 45.0 | 60.0 | 75.0 | 90.0 |
|----------------------|-------|-------|-------|-------|-------|-------|-------|
| SECONDS | 0. | 264. | 635. | 1046. | 1522. | 2226. | 3910. |
| REL RATE | 0.00 | 0.30 | 0.25 | 0.22 | 0.20 | 0.18 | 0.12 |
| FP (F) | 104. | 125. | 134. | 142. | 150. | 161. | 165. |
| WT% PM | 49.69 | 39.75 | 34.43 | 29.34 | 21.12 | 5.21 | 0.00 |
| WT% EB | 28.65 | 32.69 | 38.46 | 47.08 | 60.89 | 83.44 | 89.97 |
| WT% NBOH | 21.33 | 16.40 | 11.84 | 7.67 | 3.63 | 0.35 | 0.00 |
| WT% H ₂ O | 0.33 | 11.16 | 15.26 | 15.92 | 14.36 | 10.99 | 10.03 |

SELECT PLOT OPTION

1 = NO MORE PLOTS 2 = LINE PRINTER PLOTS 3 = PEN PLOTS

(continued)

Table 11.65: (continued)

Typical Printout of Solvent Blend Program

The calculated values for this solvent blend are:

- Solubility Parameter 8.74
- Hydrogen Bonding Parameter 5.62
- Dipole Moment 1.08

Limits chosen for search are as follows:

- Solubility Parameter 8.60 to 8.88
- Hydrogen Bonding Parameter 5.50 to 5.80
- Dipole Moment 0.95 to 1.50

You have specified 111 solvents to be included in the search for a blend containing 3 components, one of which is PMA.

| BLEND # | SOL. PARAM. | H ₂ BOND. | DIPOLE MOMENT | SOLV. #1 WT% | SOLV. #2 WT% | SOLV. #3 WT% |
|---------|-------------|----------------------|---------------|--------------|--------------|--------------|
| 1 | 8.79 | 5.56 | 1.12 | PMA 60 | ACET 5 | CHEX 35 |
| 2 | 8.70 | 5.53 | 1.42 | PMA 45 | ACET 25 | HEPT 30 |
| 3 | 8.65 | 5.59 | 1.35 | PMA 50 | ACET 20 | HEPT 30 |
| 4 | 8.60 | 5.65 | 1.29 | PMA 55 | ACET 15 | HEPT 30 |
| 5 | 8.61 | 5.62 | 1.44 | PMA 45 | ACET 25 | ISOE 30 |
| 6 | 8.67 | 5.70 | 1.46 | PMA 45 | ACET 25 | ISOG 30 |
| 7 | 8.62 | 5.76 | 1.40 | PMA 50 | ACET 20 | ISOG 30 |
| 8 | 8.64 | 5.73 | 1.47 | PMA 45 | ACET 25 | ISOH 30 |

FOUND 100 BLENDS THAT MEET LIMITS OUT OF 119,308 CHECKED.

Typical Printout of VOC Program Calculations

VOC Calculations

FORMULATION: Epoxy Modified Acrylic

COMMENTS: Bake Schedule: 350°F, 10 Min.

TYPE OF CALCULATIONS: Dispersion

| MATERIAL | DENSITY LB/GAL | FORMULA | | SOLIDS | | VOC | |
|------------------------------|----------------|---------|-------|--------|-------|------|------|
| | | LB | GAL | LB | GAL | LB | GAL |
| TITANIUM DIOXIDE | 34.72 | 95.5 | 2.75 | 95.5 | 2.75 | — | — |
| ACRYLOID ¹ AT-400 | 8.60 | — | — | — | — | — | — |
| METHYL AMYL KETONE | 6.77 | 15.8 | 2.33 | — | — | 15.8 | 2.33 |
| RESIN SOLID | 9.45 | 47.4 | 5.02 | 47.4 | 5.02 | — | — |
| DER* 661 EPOXY RESIN | 9.90 | — | — | — | — | — | — |
| RESIN SOLID | 9.90 | 15.5 | 1.57 | 15.5 | 1.57 | — | — |
| DOWANOL PM | 7.56 | 28.0 | 3.70 | — | — | 28.0 | 3.70 |
| DOWANOL DPM | 7.91 | 6.7 | 0.85 | — | — | 6.7 | 0.85 |
| CYMEL ² 370 | 9.80 | — | — | — | — | — | — |
| ISO-BUTANOL | 6.68 | 4.6 | 0.68 | — | — | 4.6 | 0.68 |
| RESIN SOLID | 10.47 | 33.5 | 3.20 | 33.5 | 3.20 | — | — |
| Totals | 12.29 | 247.0 | 20.10 | 191.9 | 12.53 | 55.1 | 7.57 |

VOC = 2.74 LB/GAL 328.25 G/L


* Trademark of The Dow Chemical Company

¹ Trademark of Rohm & Haas Company² Trademark of American Cyanamid Company


(continued)

Table 11.65: (continued)

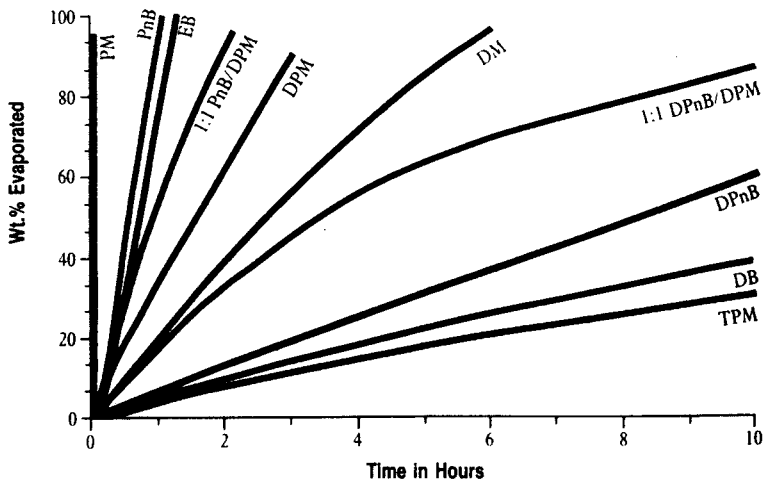
Observed Evaporation Rates of DOWANOL Glycol Ethers



Surface Tension

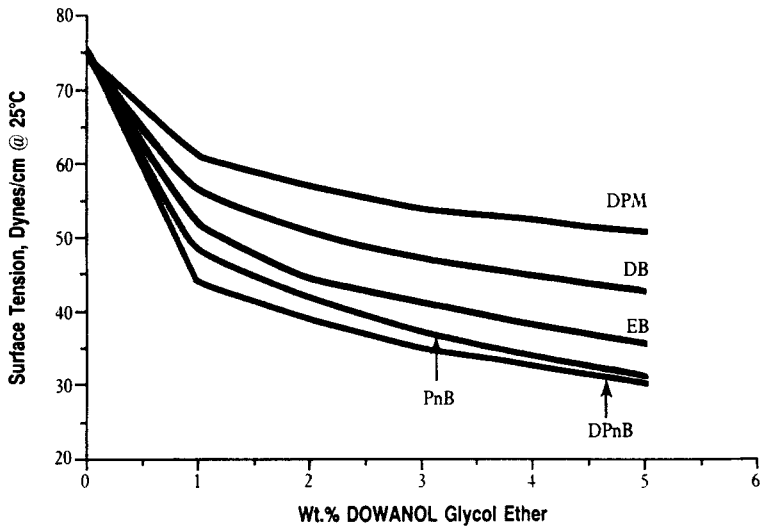


Surface Tension of Blends

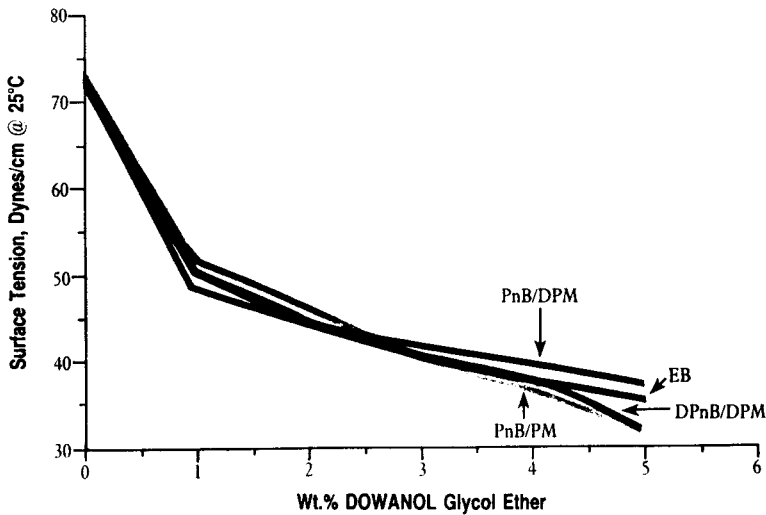

(continued)


Table 11.65: (continued)

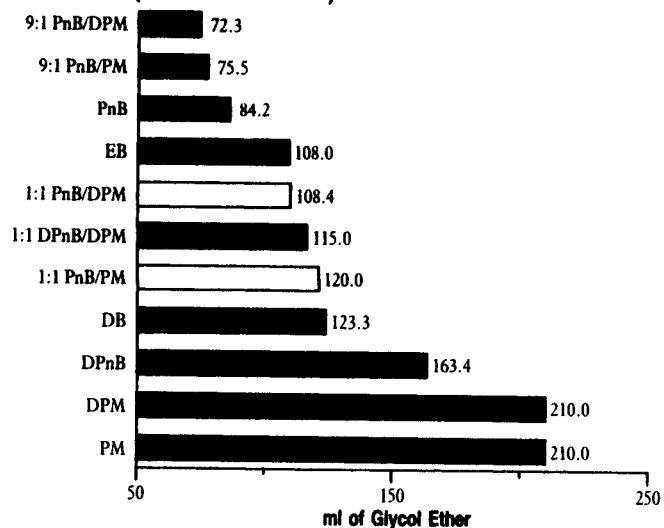**Coupling Performance† of DOWANOL Glycol Ethers
(Corn Oil and Water)**




†Volume of glycol ether required to titrate 10ml of corn oil and 10ml of water to a homogeneous solution at 25°C.

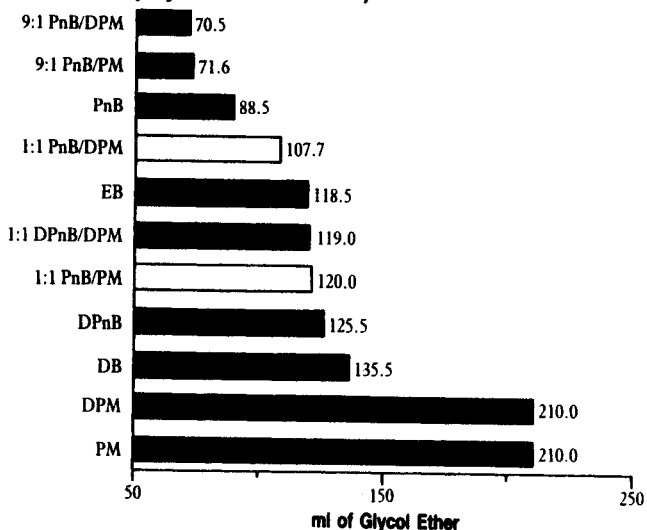**Coupling Performance† of DOWANOL Glycol Ethers
(Soybean Oil and Water)**




†Volume of glycol ether required to titrate 10ml of soybean oil and 10ml of water to a homogeneous solution at 25°C.

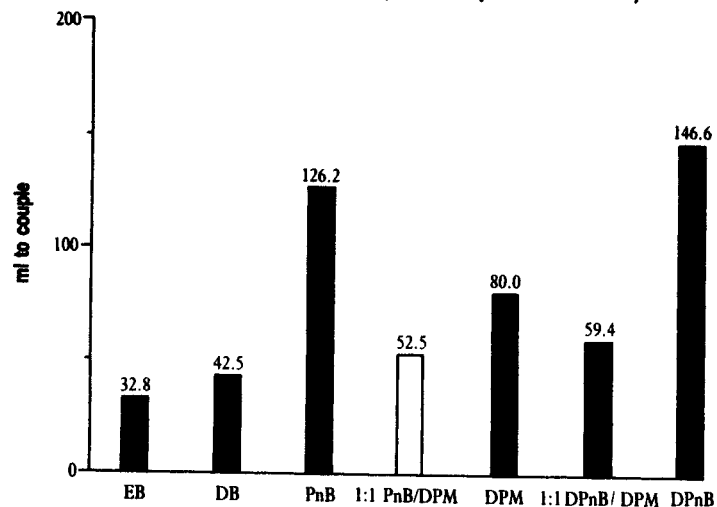Coupling Performance† (Mineral Spirits and Water)



†Volume of solvent required to titrate 10ml of mineral spirits and 10ml of water at 25°C to obtain a homogeneous solution.

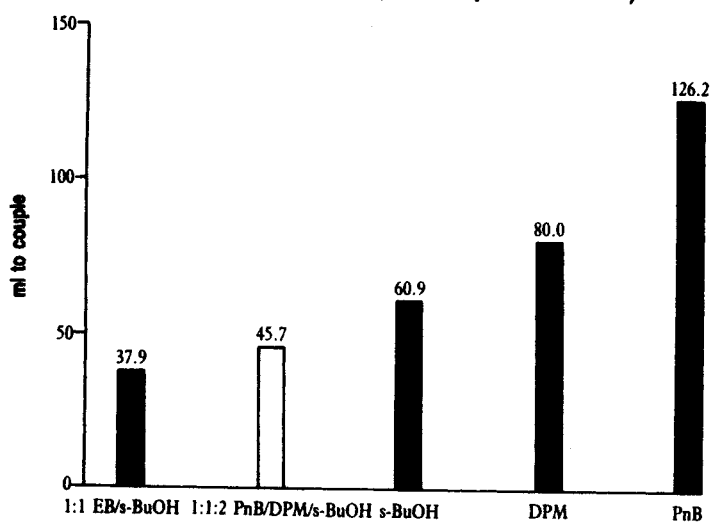
Coupling Performance† (Mineral Spirits and Water)




†Volume of solvent required to titrate 10ml of mineral spirits and 10ml of water at 25°C to obtain a homogeneous solution.

(continued)

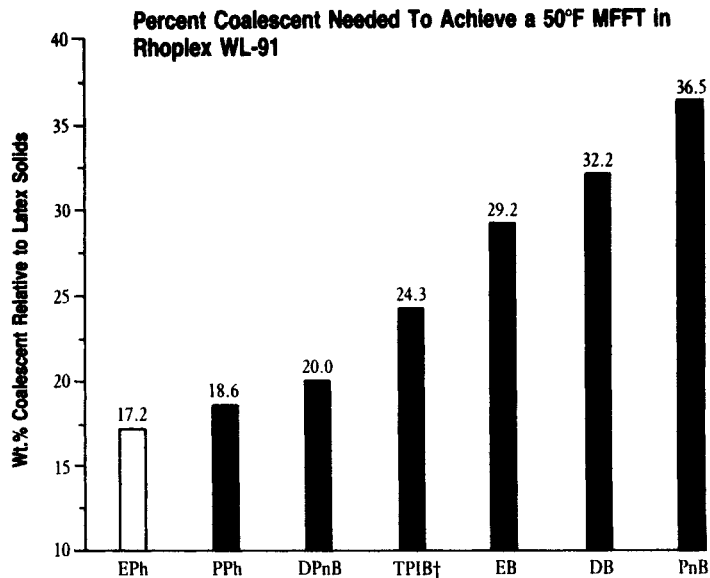
Table 11.65: (continued)



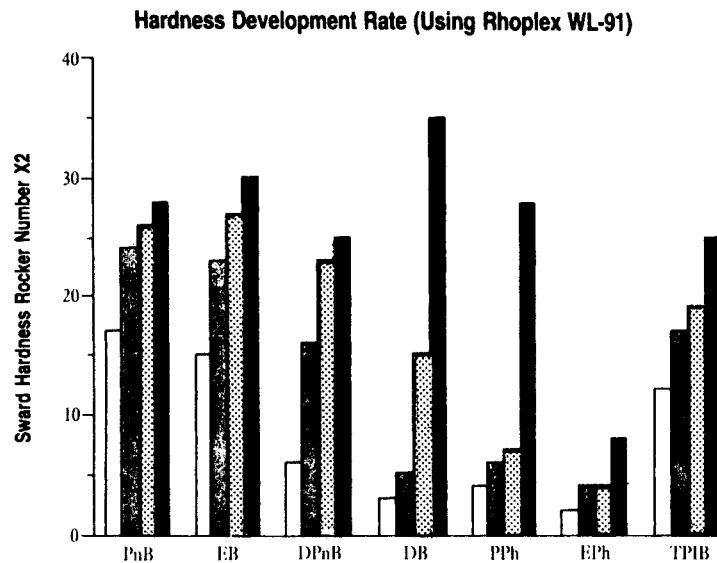†Texanol ester alcohol. Texanol is a trademark of Eastman Chemical.



□ 1 HR ■ 3 HR
 ▨ 6 HR ■ 24 HR

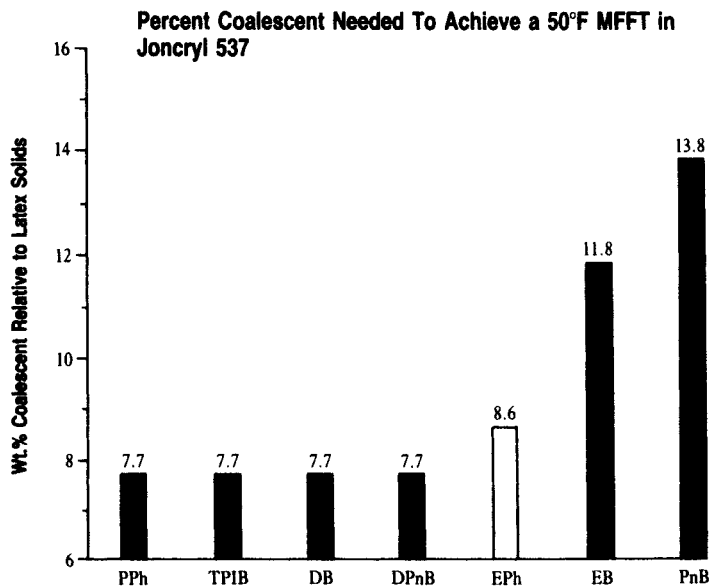


(continued)


Table 11.65: (continued)

Accelerated Aging Study (at Room Temperature)

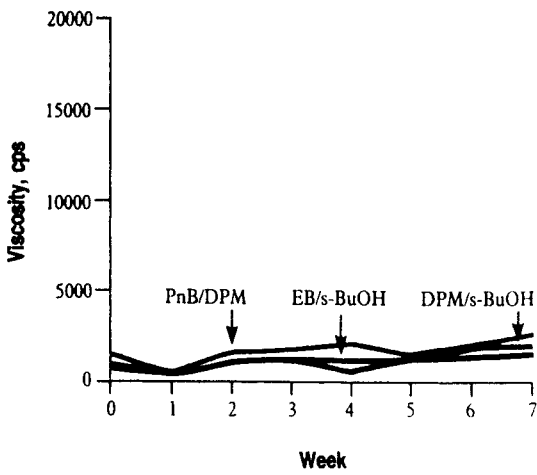Resin A Concentrate




Resin B Concentrate

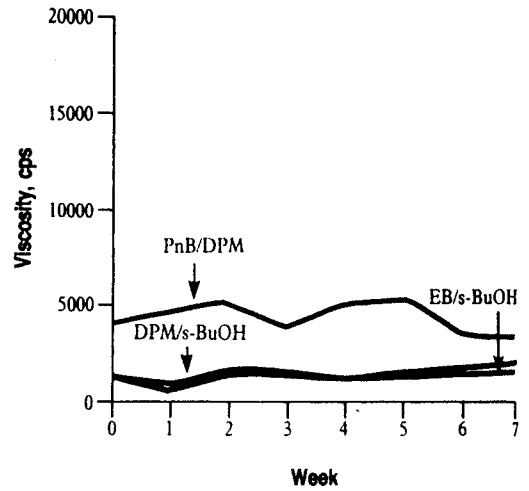


Accelerated Aging Study (at 120°F)

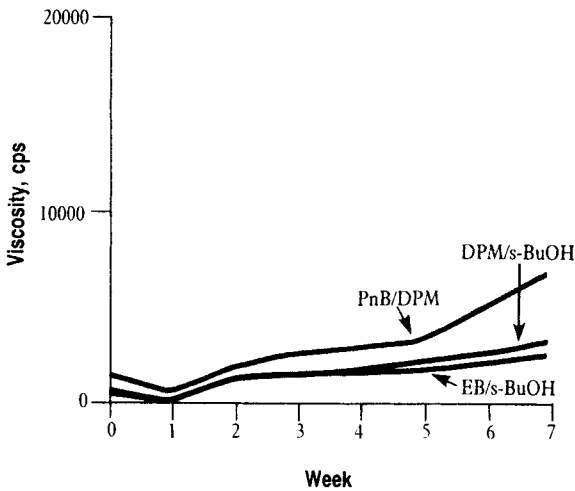Resin A Concentrate




Resin B Concentrate

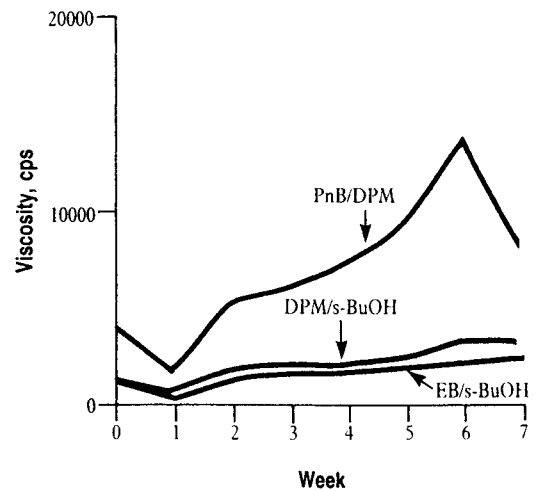


Molecular Weight Distribution (Resin A Concentrate)

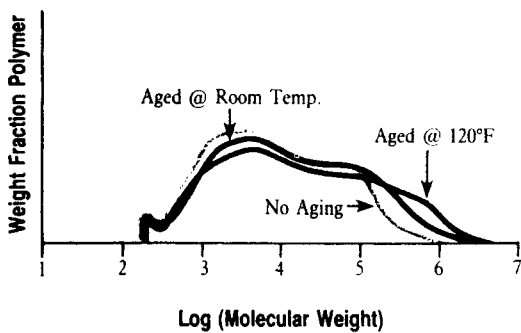EB/s-BuOH Concentrate



PnB/DPM Concentrate

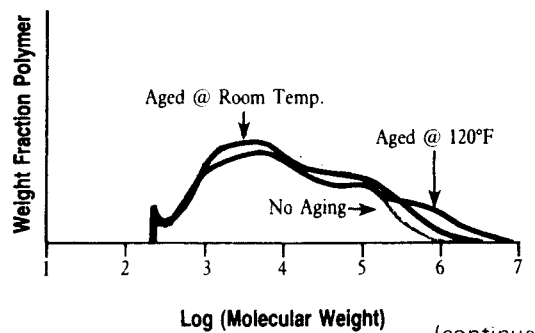


(continued)


Table 11.65: (continued)

Comparative Metabolism and Disposition of Ethylene Glycol Methyl Ether and DOWANOL PM Propylene Glycol Methyl Ether

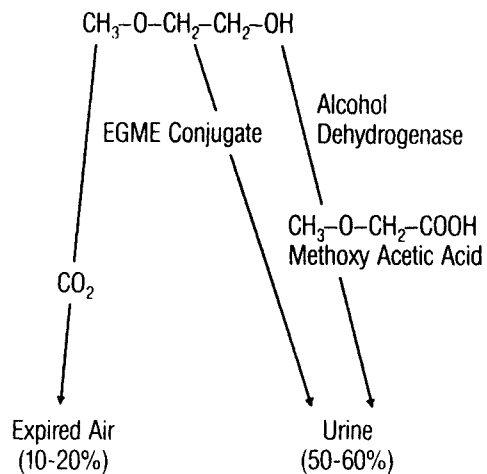EGME¹




PGME²

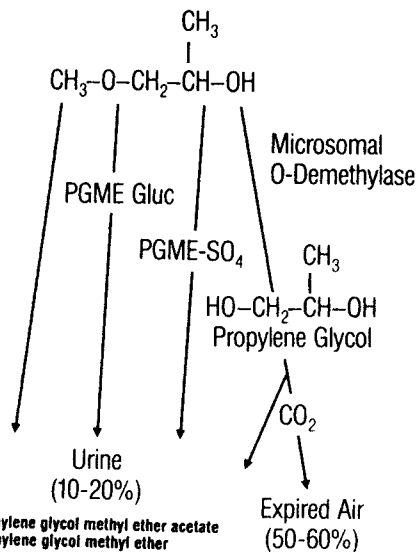

¹ Propylene glycol methyl ether acetate
² Propylene glycol methyl ether

Metabolism and Disposition of DOWANOL PMA Propylene Glycol Methyl Ether Acetate

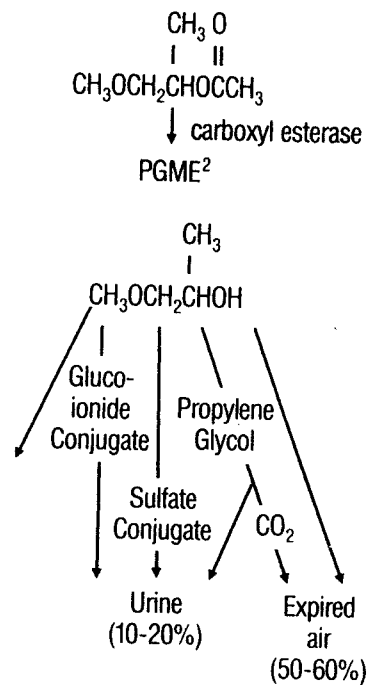PGMEA¹



¹ Propylene glycol methyl ether acetate
² Propylene glycol methyl ether

Table 11.65: (continued)

Glycol Ether Toxicity Summary

| Type of Study | Species | Exposure Level | Effects |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Propylene Glycol Monomethyl Ether (PM) | | | |
| 90-day subchronic inhalation study | Rats Rabbits | 3000 ppm | CNS depression and slight liver weight increase |
| | | 1000 ppm | NOEL |
| Inhalation teratology studies | Rats | 3000 ppm | Maternal toxicity (slight CNS depression, decreased food consumption); slight fetotoxicity |
| | | 1500 ppm | NOEL |
| | Rabbits | 3000 ppm | Maternal toxicity (decreased food consumption) |
| | | 1500 ppm | NOEL |
| Dipropylene Glycol Monomethyl Ether (DPM) | | | |
| 90-day subchronic inhalation study | Rats Rabbits | 200 ppm 50 ppm 15 ppm | No treatment-related effects at any level |
| Inhalation teratology study | Rats Rabbits | 300 ppm 150 ppm 50 ppm | No treatment-related effects at any level |
| 4-week dermal study | Rats | 1000 mg/kg 100 mg/kg | No treatment-related effects |
| Tripropylene Glycol Monomethyl Ether (TPM) | | | |
| Dermal 90-day subchronic study | Rabbits | 10 ml/kg 4 ml/kg 3 ml/kg 1 ml/kg | Mortality at high dose; narcosis at lower doses; mild skin irritation |
| Inhalation teratology study | Rats | Aerosols of 1.0 mg/L 0.3 mg/L 0.1 mg/L | Maternal toxicity at high dose; embryo/fetotoxicity and teratogenicity NOEL=1.0 mg/L |
| Propylene Glycol Monomethyl Ether Acetate (PMA) | | | |
| Inhalation 9-day subacute study | Rats Mice | 3000 ppm 1000 ppm 300 ppm | Mild, high-dose liver effects similar to those seen with DOWANOL PM; evidence of upper respiratory tract irritation in all exposures in mice and high exposure in rats |
| Inhalation teratology study | Rats | 4000 ppm 400 ppm | Embryo/fetotoxicity and teratogenicity NOEL=4000 ppm slight maternal toxicity |
| Dipropylene Glycol Monomethyl Ether Acetate (DPMA) | | | |
| No subchronic, teratogenicity, or reproductive studies have been conducted. However, this compound is likely to rapidly and completely convert to dipropylene glycol monomethyl ether after absorption into the body. Thus, its systemic toxicity would be expected to be similar to dipropylene glycol monomethyl ether. | | | |
| Propylene Glycol n-Butyl Ether (PnB) | | | |
| 13-week subchronic dermal study | Rabbits | 2 ml/kg/day of 57% soln. 5.7% soln. 0.57% soln. | Skin effects at all levels; no systemic effects at any level |

(continued)

Table 11.65: (continued)

| Type of Study | Species | Exposure Level | Effects |
|--------------------------------------------------|---------|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Propylene Glycol n-Butyl Ether (PnB) | | | |
| 13-week subchronic dermal study | Rats | 1 ml/kg/day (880 mg/kg/day) 0.3 ml/kg/day 0.1 ml/kg/day | Minor skin effects at all levels; no systemic effects at any level |
| 13-week subchronic oral study | Rats | 1000 mg/kg 350 mg/kg 100 mg/kg | Increased liver and kidney weights at 1000 mg/kg NOEL=350 mg/kg |
| Dermal teratology study | Rats | 1 ml/kg/day 0.3 ml/kg/day | No embryo/fetotoxicity or teratogenicity at any level |
| | Rabbits | 100 mg/kg/day 40 mg/kg/day 10 mg/kg/day | No embryo/fetotoxicity or teratogenicity at any level |
| Dipropylene Glycol n-Butyl Ether (DPnB) | | | |
| 13-week subchronic diet study | Rats | 1000 mg/kg/day | Slight effects to body weights, clinical chemistries, and liver weights |
| | | 450 mg/kg/day | Capacity changes; not considered toxic effects |
| | | 200 mg/kg/day | NOEL |
| 13-week subchronic dermal study | Rats | 1 ml/kg/day | Skin effects; effects to body weights, food consumption, and liver weights |
| | | 0.3 ml/kg/day | Effects to body weights and food consumption |
| | | 0.1 ml/kg/day | NOEL for systemic effects |
| Dermal teratology study | Rats | 1 ml/kg/day 0.3 ml/kg/day 0.1 ml/kg/day | Minor maternal skin effects at all levels; no embryo/fetotoxicity or teratogenicity at any level |
| Propylene Glycol Monophenyl Ether (PPh) | | | |
| 28-day subchronic dermal study | Rats | 1000 mg/kg 300 mg/kg 100 mg/kg | No evidence of systemic toxicity (NOEL=1000 mg/kg); mild, transient dermal irritation at all doses |
| Ethylene Glycol Monobutyl Ether (EB) | | | |
| 90-day subchronic inhalation study | Rats | 77 ppm | Blood effects |
| | | 25 ppm | NOEL |
| 90-day subchronic dermal study | Rabbits | 150 mg/kg 50 mg/kg 10 mg/kg | No treatment-related effects at any level |
| Teratology studies | Rats | 300 ppm | Maternal and embryo lethality |
| | | 200 ppm 100 ppm | Maternal toxicity, embryo toxicity, fetotoxicity |
| | | 50 ppm | NOEL |
| | Rabbits | 200 ppm | Maternal toxicity, embryo toxicity |
| | | 100 ppm | NOEL |
| Diethylene Glycol Mono-n-Butyl Ether (DB) | | | |
| 90-day subchronic dermal study | Rats | 2000 mg/kg 666 mg/kg | Slight hemoglobinuria |
| | | 200 mg/kg | NOEL |
| 90-day subchronic reproduction study | Rats | 2000 mg/kg 666 mg/kg 200 mg/kg | No reproductive effects at any level |

(continued)

Table 11.65: (continued)

| Type of Study | Species | Exposure Level | Effects |
|------------------------------------------------------------------------------------------------------------------|---------|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Diethylene Glycol Mono-n-Butyl Ether (DB) | | | |
| Dermal teratology study | Rabbits | 1000 mg/kg | NOEL for embryo toxicity and fetotoxicity |
| 90-day subchronic neurotoxicity study | Rats | 2000 mg/kg | NOEL |
| Triethylene Glycol Mono-n-Butyl Ether and Higher Homologs (TBH) | | | |
| <i>Note: Toxicity tests described below have been conducted only with triethylene glycol mono-n-butyl ether.</i> | | | |
| 3-week dermal study | Rabbits | 1000 mg/kg | Skin irritation; no systemic toxicity |
| Oral developmental toxicity screen | Rats | 1000 mg/kg 250 mg/kg | No treatment-related effects |
| Diethylene Glycol Monomethyl Ether (DM) | | | |
| 90-day subchronic inhalation study | Rats | 216 ppm 100 ppm 30 ppm | No treatment-related effects at any level |
| Dermal teratology study | Rabbits | 750 mg/kg | Maternal toxicity; slightly embryotoxic and fetotoxic |
| | | 250 mg/kg | Slightly fetotoxic |
| | | 50 mg/kg | NOEL |
| Triethylene Glycol Monomethyl Ether and Higher Homologs (TMH) | | | |
| <i>Note: Toxicity tests described below have been conducted only with triethylene glycol monomethyl ether.</i> | | | |
| 90-day oral subchronic study | Rats | 4000 mg/kg 1200 mg/kg 400 mg/kg | NOEL for neurotoxicity 4000 mg/kg; NOEL for systemic toxicity 400 mg/kg |
| 90-day dermal subchronic study | Rats | 4000 mg/kg 1200 mg/kg 400 mg/kg | NOEL 4000 mg/kg |
| Oral teratology study | Rats | 5000 mg/kg 2500 mg/kg 1250 mg/kg 625 mg/kg | Slight variations in fetal skeletons at 1250 mg/kg; fetal NOAEL 1250 mg/kg |
| Oral teratology study | Rabbits | 1500 mg/kg 1000 mg/kg 500 mg/kg 250 mg/kg | Fetal NOAEL 1500 mg/kg |
| Oral developmental neurotoxicity study | Rats | 3000 mg/kg 1650 mg/kg 300 mg/kg | Neurotoxicity NOEL 1650 mg/kg; developmental NOEL 300 mg/kg |
| Ethylene Glycol Monophenyl Ether (EPH) | | | |
| 90-day subchronic dermal study | Rabbits | 500 mg/kg 150 mg/kg 50 mg/kg | Minor skin effects; no evidence of systemic toxicity at any level |
| Dermal teratology study | Rabbits | 1000 mg/kg 600 mg/kg 300 mg/kg | Maternal death at high dose, maternal toxicity at 600 mg/kg; no embryo/fetotoxicity or teratogenicity at any level |
| Oral 5-week reproduction study | Mice | 2000 mg/kg 1000 mg/kg 500 mg/kg | No reproductive effects at any level |

NOEL: No Observed Effect Level
NOAEL: No Observed Adverse Effect Level

(continued)

Table 11.65: (continued)

Exposure Guidelines for DOWANOL Glycol Ethers and Acetates

| DOWANOL | CHEMICAL NAME | OSHA ² Standard | ACGIH ³ TLV ⁴ | Dow Internal Industrial Hygiene Guide |
|-----------------|---------------------------------------|------------------------------------------|-------------------------------------|---------------------------------------|
| <i>P-Series</i> | | | | |
| PM | Propylene glycol methyl ether | 100 ppm ⁵ | 100 ppm | NE |
| DPM | Dipropylene glycol methyl ether | 100 ppm ⁵ (skin) ⁶ | 100 ppm | NE |
| PMA | Propylene glycol methyl ether acetate | NE ⁷ | NE | NE |
| <i>E-Series</i> | | | | |
| EB | Ethylene glycol n-butyl ether | 25 ppm ⁵ (skin) | 25 ppm (skin) | NE |
| DB | Diethylene glycol n-butyl ether | NE | NE | 35 ppm |
| DM | Diethylene glycol methyl ether | NE | NE | 30 ppm |
| EPh | Ethylene glycol phenyl ether | NE | NE | 25 ppm (skin) |

Environmental Data for DOWANOL Products

| DOWANOL | COD (part/part) | | BOD/theory % ³ | | |
|-----------------|---------------------|------------------------------------------------------------|---------------------------|---------|---------|
| | Theory ¹ | K ₂ Cr ₂ O ₇ ² | 5 days | 10 days | 20 days |
| <i>P-Series</i> | | | | | |
| PM | 1.95 | 1.84 | 0 | 22 | 58 |
| DPM | 2.06 | 2.02 | 0 | 0 | 31 |
| TPM | 2.09 | 2.02 | 0 | 1 | 52 |
| PMA | 1.82 | 1.74 | 20 | 57 | 62 |
| DPMA | 1.94 | 1.98 | 2 | 28 | 62 |
| PPh | 2.30 | 2.26 | 3 | 37 | 52 |
| <i>E-Series</i> | | | | | |
| EB | 2.30 | 2.21 | 5 | 57 | 72 |
| DB | 2.17 | 2.06 | 2 | 13 | 47 |
| TBH | 2.10 | 2.02 | 0 | 5 | 24 |
| DM | 1.73 | 1.66 | 0 | 21 | 66 |
| TMH | 1.76 | 1.75 | 0 | 14 | 23 |
| EPh | 2.18 | 2.12 | 2 | 71 | 80 |
| DALPAD A | 2.18 | 2.12 | 2 | 71 | 80 |


¹ Theoretical Oxygen Demand (ThOD) calculated for complete oxidation to carbon dioxide and water.² Chemical Oxygen Demand (COD) determined by oxidation with acidic dichromate.³ Biochemical Oxygen Demand (BOD) expressed as a percentage of Theoretical Oxygen Demand. A BOD 20 of >50% indicates the product will be largely removed in a biological wastewater treatment plant. A BOD 20 of 10-50% indicates it will be partially removed.

Table 11.65: (continued) Food Additive Status of DOWANOL Glycol Ethers

| Regulation Number (21 CFR) | Title | PM | DPM | TPM | EB | DB | DM | EPh |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-----|-----|----|----|----|-----|
| 181.30 | Substances used in the manufacture of paper and paperboard products used in food packaging (prior sanctioned food ingredients). | • | • | • | | | | |
| 176.300 | Slimicides (for use in the manufacture of paper and paperboard). Adjuvant substances permitted to be used in the preparation of slimicides. | • | • | • | • | • | | |
| 176.210 | Defoaming agents used in the manufacture of paper and paperboard. | | | | • | | | |
| 175.105 | Adhesives. | • | • | • | • | • | • | • |
| 178.1010 | Sanitizing solutions. Paragraph (a)(4): an aqueous solution containing iodine, butoxy monoether of mixed (ethylene-propylene) polyalkylene glycol having a cloud point of 90°C-100°C in 0.5% aqueous solution and an average molecular weight of 3300, ethylene glycol monobutyl ether, and diethylene glycol monoethyl ether, together with components generally recognized as safe. | | | | • | | | |
| 176.180 | Components of paper and paperboard in contact with dry food. | | | | | • | | |
| 177.1650 | Polysulfide Polymer-Polyepoxy resins. Paragraph (a)(3): for use as a solvent. | | | | • | | | |
| 173.315 | Chemicals used in washing or to assist in the lye peeling of fruits and vegetables. Paragraph (a)(3): for use in flume water for washing sugar beets prior to the slicing operation (not to exceed 1 ppm in the flume water). | | | | • | | | |

NOTE: This information is for use as a general guideline. The regulations should be consulted for complete details.

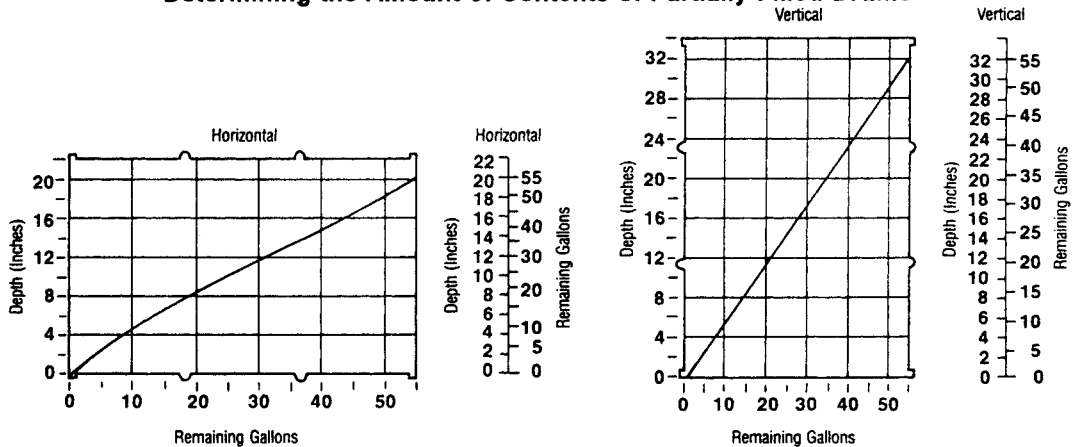Determining the Amount of Contents of Partially Filled Drums



Product Shelf Life


| Product/Shelf Life | Lot Number System | Conditions of Temperature and Storage | Deterioration Characteristics |
|-------------------------------------------------------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| DOWANOL PM, DPM, TPM, EB, DB, DM glycol ether products 18 months – Drums 6 months – Bulk | Standard | Normal conditions – Store below 90°F. Material is hygroscopic; should be in closed containers. Aluminum containers should be avoided. | Lowering of pH – possible rise in color on prolonged standing. |
| DOWANOL PPh, EPh glycol ether products 18 months – Drums 6 months – Bulk | Standard | Store below 110°F. Aluminum containers should be avoided. | Develops yellow color. |

Table 11.66: GLYME Azeotropic Vapor Pressure and Solubility Data (21)

AZEOTROPIC DATA


MONOGLYME

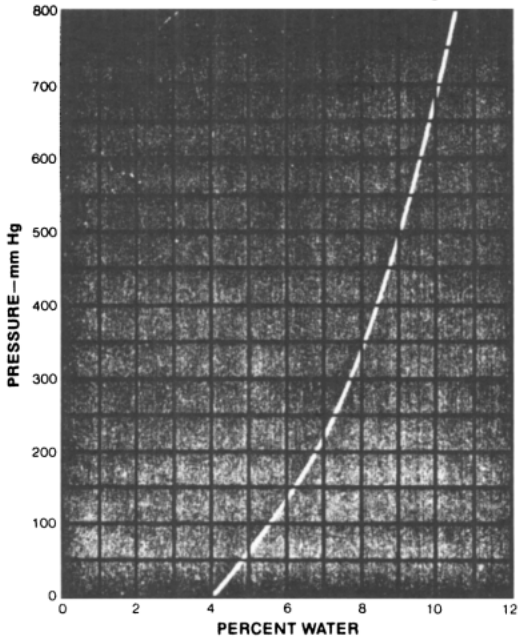Boiling point at 760 mm Hg—76°C
100 mm Hg—30°C




ETHYL GLYME

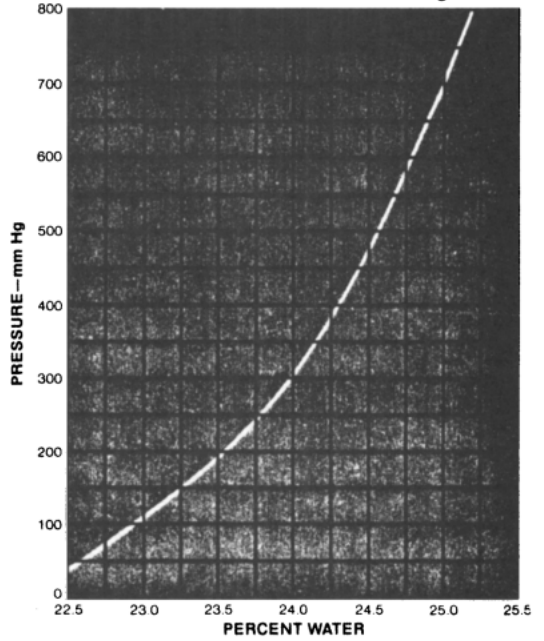Boiling point at 760 mm Hg—90°C
100 mm Hg—46°C




DIGLYME

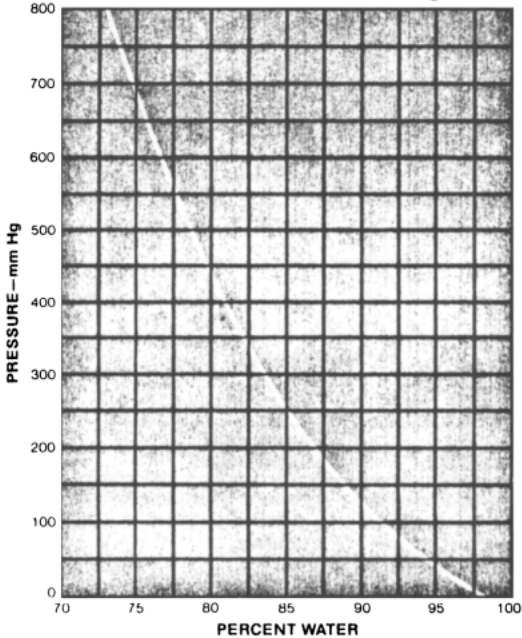Boiling point at 760 mm Hg—99.5°C
100 mm Hg—54°C



ETHYL DIGLYME

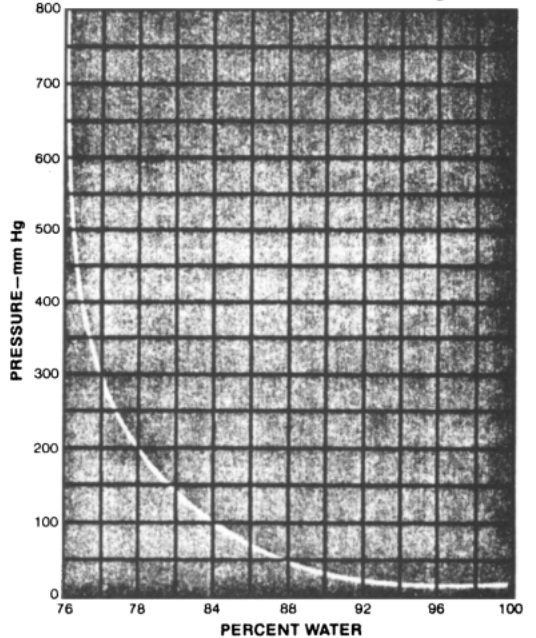Boiling point at 760 mm Hg—98°C
100 mm Hg—54°C



*Butyl Diglyme, Triglyme, and Tetraglyme do not form azeotropes with water.

(CONTINUED)

Table 11.66: (continued)

POLYMER SOLUBILITY

The solubility of various plastic and elastomeric materials in glymes was determined by placing 10 grams of sample in 100ml of the glyme at 21°C. The samples were examined after one week.

- U** – Unaffected
- A** – Attacked (noticeable softening, some swelling)
- S** – Soluble (10% or more; extreme swelling to gelation)

| | MONOGLYME | ETHYL GLYME | DIGLYME | ETHYL DIGLYME | BUTYL DIGLYME | TETRAGLYME |
|--------------------------------|-----------|-------------|---------|---------------|---------------|------------|
| PLASTICS | | | | | | |
| Acrylate | | | | | | |
| Acrylate ester | S | | S | | | S |
| Polymethyl methacrylate | S | | S | | | S |
| Vinyl | | | | | | |
| Polyvinyl acetate | S | | S | | | S |
| Polyvinyl chloride | A | A | A | A | U | A |
| Chlorinated polyvinyl chloride | | A | S | A | U | |
| Polyvinyl chloride acetate | A | S | A | S | A | A |
| Polyvinyl alcohol | U | A | U | U | U | U |
| Polyvinylidene chloride | U | U | A | U | U | A |
| Cellulose | | | | | | |
| Cellulose acetate | S | | S | | | S |
| Cellulose acetate butyrate | S | A | S | A | U | S |
| Cellulose nitrate | S | | S | | | S |
| Methyl cellulose | S | A | S | A | U | S |
| Condensation Polymers | | | | | | |
| Phenol formaldehyde, cast | A | | A | | | A |
| Nylon | U | U | U | U | U | U |
| Polyester | U | U | U | U | U | U |
| Polyurethane | A | A | S | A | U | S |
| Polycarbonate | A | U | A | A | U | A |
| Polyolefins | | | | | | |
| Polyethylene | U | U | U | U | U | U |
| Polystyrene | A | | A | | | A |
| Polytetrafluoroethylene | U | U | U | U | U | U |
| ELASTOMERS | | | | | | |
| Neoprene | S | S | S | S | S | S |
| EVA | A | A | A | A | A | U |
| Nitrile Rubber (NBR) | S | S | S | S | A | S |
| Natural Rubber | S | S | A | S | S | A |
| EPDM | U | A | U | A | A | A |
| SBR | S | S | S | S | S | A |

VAPOR PRESSURE/TEMPERATURE RELATIONSHIPS

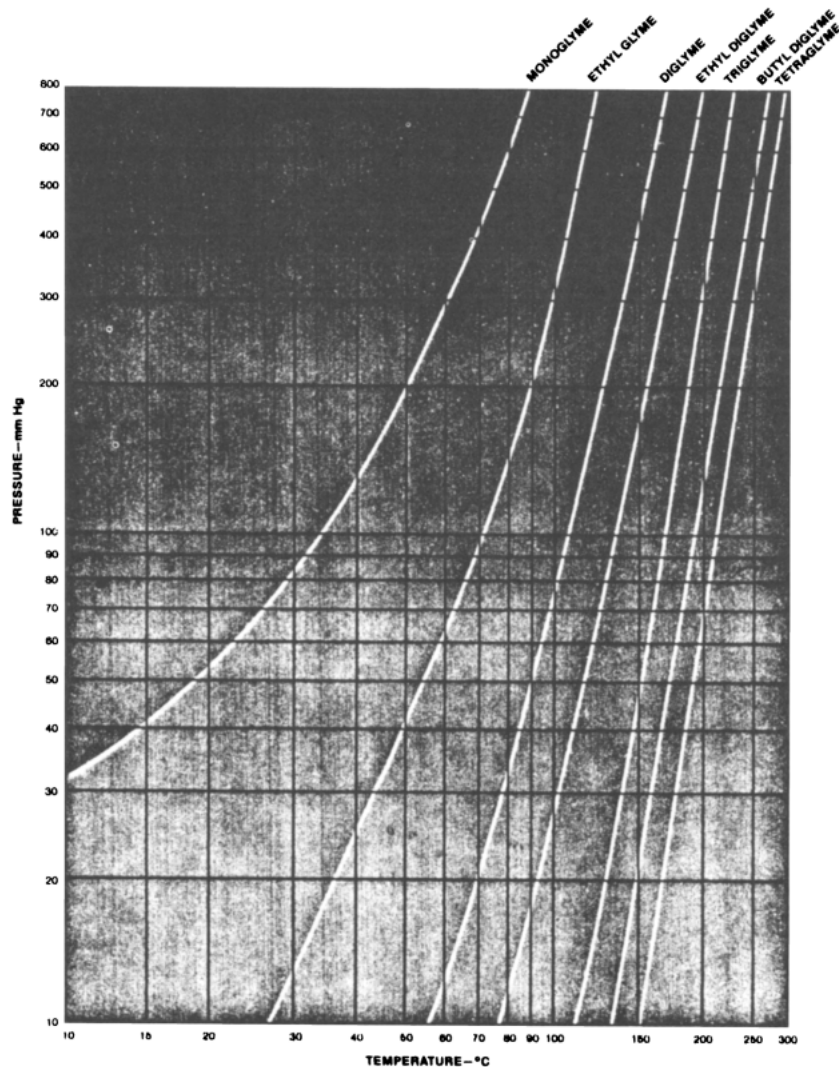


Table 11.67: Union Carbide Glycol Ethers (19)

Product Family Order

| Solvent | Formula Molecular Weight | Boiling Point, °C | Freezing Point, °C | Flash Point, °F ^(a) | Vapor Pressure, mm Hg at 20°C |
|---------------------------|--------------------------|----------------------|--------------------|--------------------------------|-------------------------------|
| Methyl CELLOSOLVE Solvent | 76.1 | 124.5 | -85 | 103 | 6.2 |
| Methyl CARBITOL Solvent | 120.2 | 194.0 | -85 | 188 ^(d) | 0.1 |
| Methoxytriglycol | 164.2 | 249.0 | -44 | 238 ^(d) | < 0.01 |
| CELLOSOLVE Solvent | 90.1 | 134.9 | -90 | 108 | 4.1 |
| CARBITOL Solvent | 134.2 | 201.6 | -78 ^(c) | 182 ^(d) | 0.08 |
| Ethoxytriglycol | 178.2 | 255.9 | -19 | 255 | < 0.01 |
| Propyl CELLOSOLVE Solvent | 104.2 | 150.1 | -90 | 135 ^(d) | 1.6 |
| Butyl CELLOSOLVE Solvent | 118.2 | 171.2 | -70 | 160 ^(d) | 0.6 |
| Butyl CARBITOL Solvent | 162.2 | 230.6 | -68 | 214 | 0.01 |
| Butoxytriglycol | 206.3 | 279.8 ^(e) | -48 | 276 ^(d) | < 0.01 |
| Hexyl CELLOSOLVE Solvent | 146.2 | 208.1 | -50 | 179 | 0.05 |
| Hexyl CARBITOL Solvent | 190.3 | 259.1 | -40 | 271 ^(d) | < 0.01 |

Boiling Point Order

| | | | | | |
|---------------------------|-------|----------------------|--------------------|--------------------|--------|
| Methyl CELLOSOLVE Solvent | 76.1 | 124.5 | -85 | 103 | 6.2 |
| CELLOSOLVE Solvent | 90.1 | 134.9 | -90 | 108 | 4.1 |
| Propyl CELLOSOLVE Solvent | 104.2 | 150.1 | -90 | 135 ^(d) | 1.6 |
| Butyl CELLOSOLVE Solvent | 118.2 | 171.2 | -70 | 160 ^(d) | 0.6 |
| Methyl CARBITOL Solvent | 120.2 | 194.0 | -85 | 188 ^(d) | 0.1 |
| CARBITOL Solvent | 134.2 | 201.6 | -78 ^(c) | 182 ^(d) | 0.08 |
| Hexyl CELLOSOLVE Solvent | 146.2 | 208.1 | -50 | 179 | 0.05 |
| Butyl CARBITOL Solvent | 162.2 | 230.6 | -68 | 214 | 0.01 |
| Methoxytriglycol | 164.2 | 249.0 | -44 | 238 ^(d) | < 0.01 |
| Ethoxytriglycol | 178.2 | 255.9 | -19 | 255 | < 0.01 |
| Hexyl CARBITOL Solvent | 190.3 | 259.1 | -40 | 271 ^(d) | < 0.01 |
| Butoxytriglycol | 206.3 | 279.8 ^(e) | -48 | 276 ^(d) | < 0.01 |

Product Family Order

| Solvent | Specific Gravity, 20/20°C | Pounds Per Gallon | Coefficient of Expansion at 20°C | Solubility at 20°C, % by wt | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
|---------------------------|---------------------------|-------------------|----------------------------------|-----------------------------|----------|-----------------------------------------|-----------------------------------|---------------------------------|
| | | | | In Water | Water In | | Neat Product | 25% Aq. Solution ^(b) |
| Methyl CELLOSOLVE Solvent | 0.966 | 8.04 | 0.00094 | 100 | 100 | 62 | 32.1 | 54.3 |
| Methyl CARBITOL Solvent | 1.023 | 8.51 | 0.00086 | 100 | 100 | 1.5 | 35.9 | 54.3 |
| Methoxytriglycol | 1.050 | 8.74 | 0.00084 | 100 | 100 | 0.04 | 34.7 | 48.4 |
| CELLOSOLVE Solvent | 0.931 | 7.74 | 0.00097 | 100 | 100 | 41 | 29.4 | 47.1 |
| CARBITOL Solvent | 0.991 | 8.25 | 0.00090 | 100 | 100 | 1.3 | 35.2 | 49.6 |
| Ethoxytriglycol | 1.025 | 8.53 | 0.00086 | 100 | 100 | 0.04 | 32.2 | 45.7 |
| Propyl CELLOSOLVE Solvent | 0.913 | 7.60 | 0.00095 | 100 | 100 | 21 | 26.3 | 32.3 |
| Butyl CELLOSOLVE Solvent | 0.902 | 7.50 | 0.00092 | 100 | 100 | 7.8 | 28.6 | 28.9 |
| Butyl CARBITOL Solvent | 0.954 | 7.94 | 0.00088 | 100 | 100 | 0.24 | 31.0 | 33.2 |
| Butoxytriglycol | 0.989 | 8.19 | 0.00085 | 100 | 100 | < 0.1 | 30.0 | 32.2 |
| Hexyl CELLOSOLVE Solvent | 0.889 | 7.40 | 0.00086 | 1.00 | 18.80 | 0.82 | 30.3 | 28.5 ^(g) |
| Hexyl CARBITOL Solvent | 0.935 | 7.78 | 0.00084 | 3 | 56.30 | 0.03 | 29.2 ^(f) | --- |

Boiling Point Order

| | | | | | | | | |
|---------------------------|-------|------|---------|------|-------|-------|---------------------|---------------------|
| Methyl CELLOSOLVE Solvent | 0.966 | 8.04 | 0.00094 | 100 | 100 | 62 | 32.1 | 54.3 |
| CELLOSOLVE Solvent | 0.931 | 7.74 | 0.00097 | 100 | 10 | 41 | 29.4 | 47.1 |
| Propyl CELLOSOLVE Solvent | 0.913 | 7.60 | 0.00095 | 100 | 100 | 21 | 26.3 | 32.3 |
| Butyl CELLOSOLVE Solvent | 0.902 | 7.50 | 0.00092 | 100 | 100 | 7.8 | 28.6 | 28.9 |
| Methyl CARBITOL Solvent | 1.023 | 8.51 | 0.00086 | 100 | 100 | 1.5 | 35.9 | 54.3 |
| CARBITOL Solvent | 0.991 | 8.25 | 0.00090 | 100 | 100 | 1.3 | 35.2 | 49.6 |
| Hexyl CELLOSOLVE Solvent | 0.889 | 7.40 | 0.00086 | 1.00 | 18.80 | 0.82 | 30.3 | 28.5 ^(g) |
| Butyl CARBITOL Solvent | 0.954 | 7.94 | 0.00088 | 100 | 100 | 0.24 | 31.0 | 33.2 |
| Methoxytriglycol | 1.050 | 8.74 | 0.00084 | 100 | 100 | 0.04 | 34.7 | 48.4 |
| Ethoxytriglycol | 1.025 | 8.53 | 0.00086 | 100 | 100 | 0.04 | 32.2 | 45.7 |
| Hexyl CARBITOL Solvent | 0.935 | 7.78 | 0.00084 | 3 | 56.30 | 0.03 | 29.2 ^(f) | --- |
| Butoxytriglycol | 0.989 | 8.19 | 0.00085 | 100 | 100 | < 0.1 | 30.0 | 32.2 |

(a) Tag Closed Cup unless otherwise noted

(b) All solutions are percent by volume

(c) Sets to glass below this temperature

(d) Pensky-Martens Closed Cup

(e) Decomposes at 760 mm Hg, boiling point extrapolated

(f) at 2°C

(g) 1% solution

(continued)

Table 11.67: (continued)

Constant Boiling Azeotropic Mixtures of Glycol Ethers and Other Solvents

| Solvent | Components | |
|---------------------------|-----------------------------|--------------------------------|
| | Specific Gravity at 20/20°C | Boiling Point at 760 mm Hg, °C |
| Methyl CELLOSOLVE Solvent | 0.966 | 124.5 |
| Toluene | 0.868 | 10.6 |
| Methyl CELLOSOLVE Solvent | 0.966 | 124.5 |
| Water | 1.000 | 100.0 |
| Methyl CARBITOL Solvent | 1.023 | 194.0 |
| Ethylene Glycol | 1.115 | 197.6 |
| CELLOSOLVE Solvent | 0.931 | 135.6 |
| Butyl Acetate | 0.88 | 126.0 |
| CELLOSOLVE Solvent | 0.931 | 135.6 |
| Toluene | 0.868 | 110.6 |
| CELLOSOLVE Solvent | 0.931 | 135.6 |
| Water | 1.000 | 100.0 |
| CARBITOL Solvent | 0.991 | 202.7 |
| Ethylene Glycol | 1.115 | 197.6 |
| Propyl CELLOSOLVE Solvent | 0.913 | 150.1 |
| Water | 1.000 | 100.0 |
| Butyl CELLOSOLVE Solvent | 0.902 | 171.2 |
| Water | 1.000 | 100.0 |
| Butyl CARBITOL Solvent | 0.954 | 230.6 |
| Ethylene Glycol | 1.115 | 197.6 |
| Hexyl CELLOSOLVE Solvent | 0.889 | 208.1 |
| Water | 1.000 | 100.0 |
| Hexyl CARBITOL Solvent | 0.935 | 259.1 |
| Water | 1.000 | 100.0 |

| Solvent | Boiling Point at 760 mm Hg, °C | Composition, % by Wt, at 20°C | | | Relative Volume of Layers at 20°C | Specific Gravity at 20/20°C of Azeotrope Layer |
|---------------------------|--------------------------------|-------------------------------|----------------|----------------|-----------------------------------|------------------------------------------------|
| | | in Azeotrope | in Upper Layer | in Lower Layer | | |
| Methyl CELLOSOLVE Solvent | 105.9 | 25 | — | — | — | 0.887 |
| Toluene | | 75 | — | — | | |
| Methyl CELLOSOLVE Solvent | 99.9 | 15 | — | — | — | — |
| Water | | 85 | — | — | | |
| Methyl CARBITOL Solvent | 192 | 70 | — | — | — | 1.051 |
| Ethylene Glycol | | 30 | — | — | | |
| CELLOSOLVE Solvent | 125.8 | 35.7 | — | — | — | 0.896 |
| Butyl Acetate | | 64.3 | — | — | | |
| CELLOSOLVE Solvent | 110.0 | 10.0 | — | — | — | 0.874 |
| Toluene | | 90.0 | — | — | | |
| CELLOSOLVE Solvent | 99.4 | 28.8 | — | — | — | 1.003 |
| Water | | 71.2 | — | — | | |
| CARBITOL Solvent | 192 | 54.5 | — | — | — | — |
| Ethylene Glycol | | 45.5 | — | — | | |
| Propyl CELLOSOLVE Solvent | 98.8 | 30 | — | — | — | — |
| Water | | 70 | — | — | | |
| Butyl CELLOSOLVE Solvent | 98.8 ^(a) | 20.8 | 57 | 10 | — | 0.989 ^(b) |
| Water | | 79.2 | 43 | 90 | | |
| Butyl CARBITOL Solvent | 196.2 | 27.5 | — | — | — | 1.074 |
| Ethylene Glycol | | 72.5 | — | — | | |
| Hexyl CELLOSOLVE Solvent | 99.7 | 9 | 81.2 | 1.0 | U 11 L 89 | U 0.915 L 1.000 |
| Water | | 91 | 18.8 | 99.0 | | |
| Hexyl CARBITOL Solvent | 100.0 | 2 | 43.7 | 1.7 | U 0.5 L 99.5 | U 0.982 L 1.000 |
| Water | | 98 | 56.3 | 98.3 | | |


(a) Heterogeneous at this boiling point

(b) Homogeneous at 20°C


(continued)

Table 11.67: (continued)

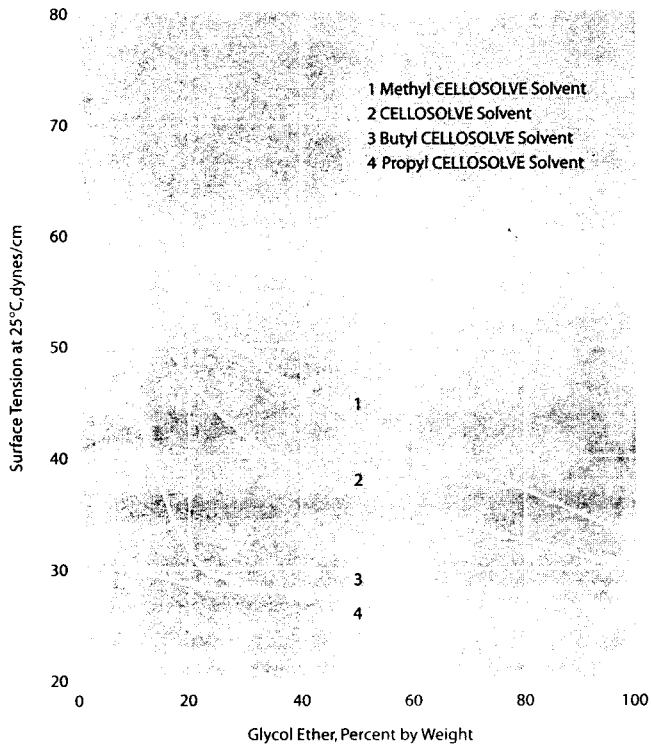
Surface Tension of Aqueous Solutions of Glycol Ethers



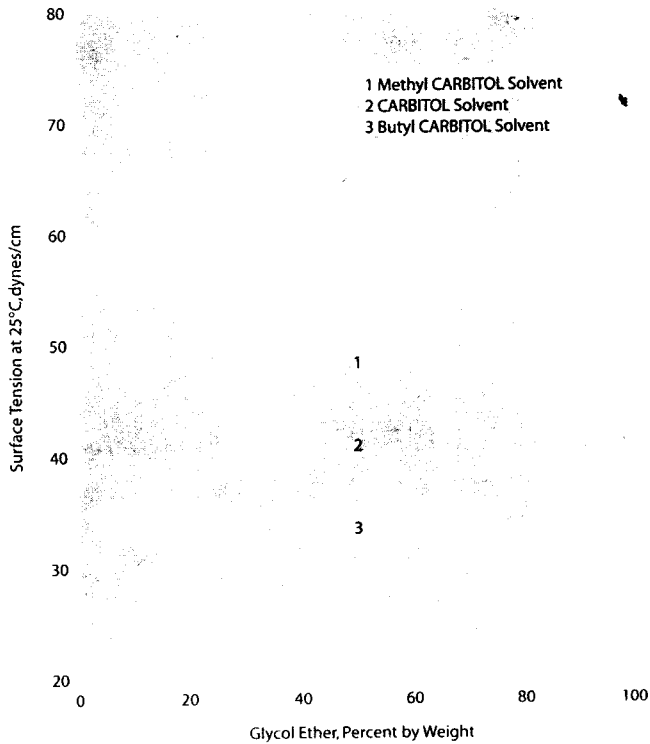Surface Tension of Aqueous Solutions of Glycol Ethers




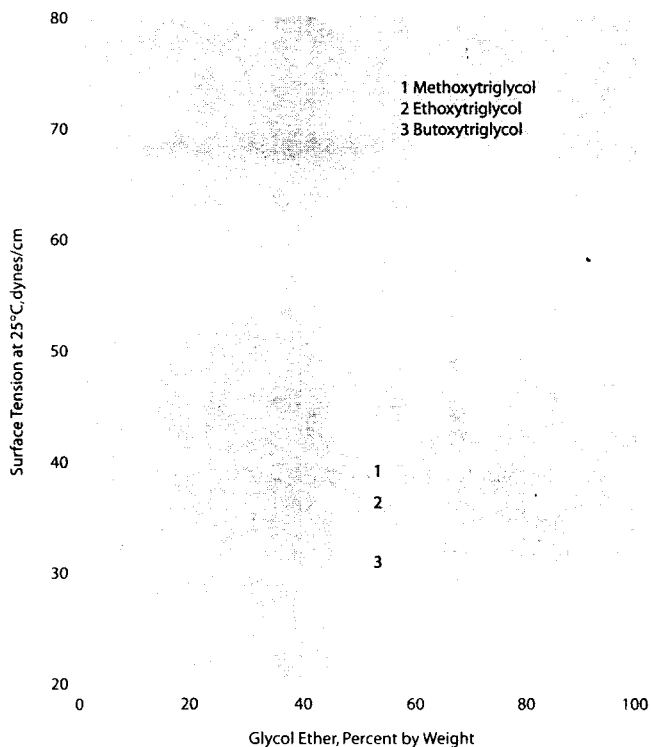Surface Tension of Aqueous Solutions of Glycol Ethers




(continued)

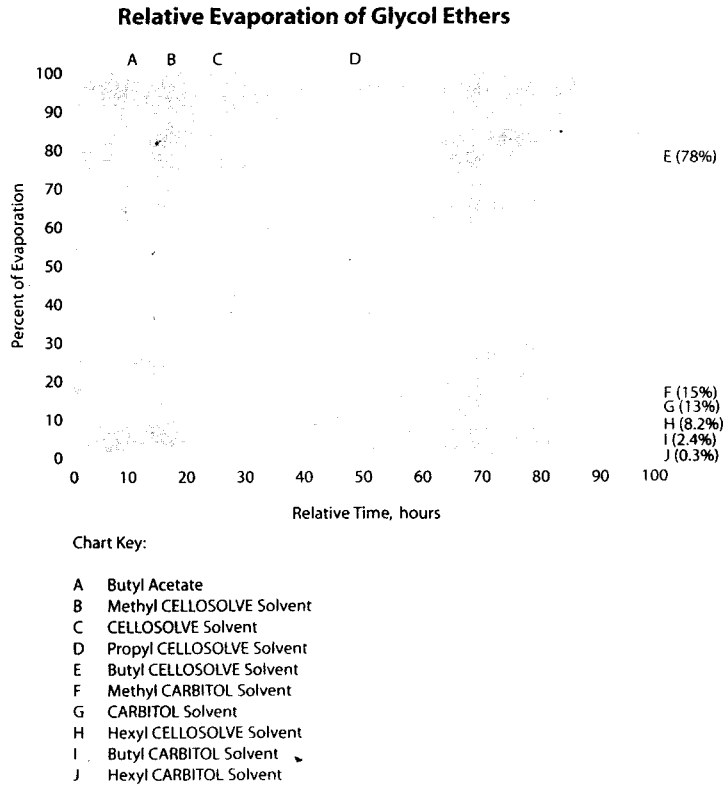
Table 11.67: (continued)



Vapor Pressures of Glycol Ethers

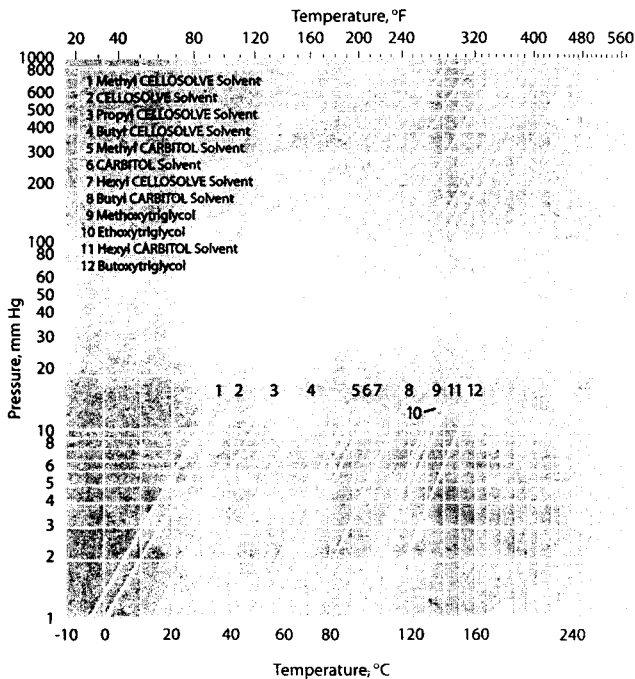

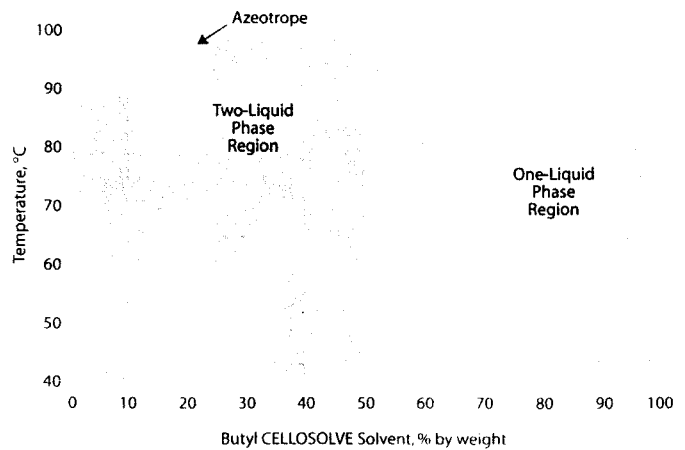Mutual Solubility of Butyl CELLOSOLVE® Solvent/Water vs Temperature



(continued)

Ecological Effects of Glycol Ethers

| Glycol Ether | Theoretical Oxygen Demand ^(a) , mg O ₂ /mg | | Biodegradation ^(b) % | | | Bacterial ^(c) IC ₅₀ mg/L | Fathead Minnow ^(d,e) LC ₅₀ mg/L | <i>Daphnia Magna</i> ^(d,e) LC ₅₀ mg/L |
|---------------------------|------------------------------------------------------------------|------------|---------------------------------|--------|--------|------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------|
| | Measured | Calculated | Day 5 | Day 10 | Day 20 | | | |
| Methyl CELLOSOLVE Solvent | 1.64 | 1.68 | 30 | 62 | 88 | > 10,000 | > 5,400 | > 10,000 |
| Methyl CARBITOL Solvent | — | 1.34 | 5 | 73 | 100 | > 5,000 | > 10,000 | > 10,000 |
| Methoxytriglycol | — | 1.75 | 29 | 33 | 71 | > 5,000 | > 10,000 | > 10,000 |
| CELLOSOLVE Solvent | 1.98 | 1.86 | 36 | 88 | 100 | > 10,000 | > 10,000 | > 10,000 |
| CARBITOL Solvent | 1.74 | 1.90 | 17 | 71 | 87 | > 5,000 | > 10,000 | > 10,000 |
| Ethoxytriglycol | — | 1.89 | 8 | 47 | 71 | > 10,000 | > 10,000 | > 10,000 |
| Propyl CELLOSOLVE Solvent | 1.94 | 2.15 | 13 | 66 | 100 | > 1,000 | > 5,000 | > 5,000 |
| Butyl CELLOSOLVE Solvent | 2.25 | 2.30 | 26 | 74 | 88 | > 5,000 | 1,700 | > 1,000 |
| Butyl CARBITOL Solvent | 2.05 | 2.17 | 22 | 64 | 77 | > 1,000 | 2,500 | > 1,000 |
| Butoxytriglycol | — | 2.10 | < 5 | 5 | 47 | > 5,000 | 2,400 | 2,210 |
| Hexyl CELLOSOLVE Solvent | 1.89 | 2.52 | 72 | 93 | 100 | 770 | 140 | 305 |
| Hexyl CARBITOL Solvent | — | 2.36 | 23 | 69 | 80 | > 1,000 | 220 | 433 |

- (a) Calculated theoretical oxygen demand (THOD) based on complete oxidation of the chemical to carbon dioxide and water. Measured value determined by chemical oxygen demand procedure published in *Standard Methods for the Examination of Water and Wastewater*, 18th ed., Am. Public Health Assoc., Washington, D.C. (1992)
- (b) Based on biooxidation measured in the dilution bottle biochemical oxygen demand (BOD) test published in *Standard Methods*. Biooxidation is the percentage ratio of BOD to THOD [(BOD/ThOD)*100%]. Nonacclimated domestic sewage microorganisms were used as seed in the tests.
- (c) Determined by turbidity/growth procedures where the median inhibition concentration (IC₅₀) is measured after 16 hours of incubation with sewage microorganisms.
- (d,e) EPA/ASTM bioassay procedures were followed in obtaining these values. Ten test organisms were used per test concentrations.

POLYETHYLENE GLYCOLS

Table 11.68: Ashland Polyethylene Glycols (69)

Soluble in water with resultant solutions being transparent, ASHLAND® polyethylene glycols are designated by numbers which approximate their average molecular weight. Intermediate combinations may be obtained by blending various grades.

Polyethylene Glycols 200, 300, 400 and 600

Water-soluble viscous liquids at normal temperatures, polyethylene glycols are also soluble in ketones, alcohols, glycol ethers, esters and aromatic hydrocarbons. Their viscosities and freezing points increase as the molecular weight increases. Used as paper softeners, in tire air bag lubricants and lotions. Fatty acid esters prove useful as emulsifiers, dispersants and lubricants.

Polyethylene Glycols 1000, 1450, 3350, 4600 and 8000

From semi-solid to the higher molecular weight hard waxy white solids, this group of polyethylene glycols finds use as mold lubricants and mold release agents in the rubber industry. Used in preparation of ointments, cosmetic creams and lotions, metal polishes, shoe polishes, abrasives and adhesives.

ASHLAND® polypropylene glycols have average molecular weights ranging from 400 to 4,000, and encompass a wide range of physical and chemical properties. They are used in cosmetic formulations, brake fluids, lubricating oils and greases, and rubber processing.

| Product | Specific Gravity 20°/20°C | Lb./Gal at 20°C | Average Molecular Weight | Freezing Range °C | Flash Point °F PM* | Viscosity Centistokes at 210°F |
|---------------------------|------------------------------|-----------------------|--------------------------------|----------------------|--------------------------|--------------------------------------|
| Polyethylene Glycol 200 | 1.127 | 9.38 | 200 | Supercools | >300 | 4.3 |
| Polyethylene Glycol 300 | 1.127 | 9.38 | 300 | -15 to -8 | >350 | 5.8 |
| Polyethylene Glycol 400 | 1.128 | 9.39 | 400 | 4-8 | >350 | 7.3 |
| Polyethylene Glycol 600 | 1.128 | 9.40 | 600 | 20-25 | >350 | 10.5 |
| Polyethylene Glycol 1000 | 1.101 (55/20) | 9.16 (55°C) | 1000 | 37-40 | >350 | 17.4 |
| Polyethylene Glycol 1450 | 1.102 (55/20) | 9.17 (55°C) | 1450 | 43-46 | >350 | 25-32 |
| Polyethylene Glycol 3350 | 1.1072 (a) | 8.94 (80°C) | 3350 | 54-58 | >350 | 75-110 |
| Polyethylene Glycol 4600 | 1.073 (a) | 8.95 (80°C) | 4600 | 57-61 | >350 | 160-230 |
| Polyethylene Glycol 8000 | 1.075 (a) | 8.96 (80°C) | 8000 | 60-63 | >350 | 700-900 |
| Polyethylene Glycol 20000 | 1.065 (80/20) | 8.67 (130°C) | 17500 | 50-55 | >350 | 14,500 |

*Pensky-Martens
(a) Density @ 80°C

Table 11.69: BASF Pluracol E Polyethylene Glycols (47)

| Product | Average Molecular Weight | Form | Viscosity at 99° C. CS | Flash Pt. ° C ^b | Pour Point ° C |
|-----------------|--------------------------------|--------|------------------------------|-------------------------------|----------------------|
| E200 | 200 | Liquid | 4.4 | 182 | -65 |
| E300 | 300 | Liquid | 5.9 | 210 | -13 |
| E400, E400 NF | 400 | Liquid | 7.4 | 238 | 5 |
| E600, E600 NF | 600 | Liquid | 10.8 | 249 | 20 |
| E1000 | 1000 | Solid | 17.5 | 255 | 38 ^a |
| E1450, E1450 NF | 1450 | Solid | 28.5 | 255 | 45 ^a |
| E2000 | 2000 | Solid | 43.5 | >260 | 52 ^a |
| E4000 | 4000 | Solid | 134.0 | >260 | 59 ^a |
| E4500 | 4500 | Solid | 170.0 | >260 | 60 ^a |
| E8000 | 8000 | Solid | 750.0 | >260 | 61 ^a |

^a Melting point ^b Cleveland open cup ^c Pensky-Martens closed cup ^d Flash points measured by the closed cup method, ASTM D-56

Table 11.70: CARBOWAX Polyethylene Glycols (19)

Typical Physical Properties of CARBOWAX Polyethylene Glycols and Methoxypolyethylene Glycols

| Product | Range of Average Molecular Weight | Liquid Density, g/cc | | | Melting or Freezing Range, °C | Solubility in Water at 20°C, % by wt | Viscosity at 210°F, cSt | Average Number of Repeating Oxyethylene Units |
|---------------------------------------------|-----------------------------------|----------------------|------------|------------|-------------------------------|--------------------------------------|-------------------------|-----------------------------------------------|
| | | 20°C | 60°C | 80°C | | | | |
| CARBOWAX® Polyethylene Glycol | | | | | | | | |
| 200 | 190 to 210 | 1.1238 | 1.0921 | 1.0763 | (f) | Complete | 4.3 | 4.1 |
| 300 | 285 to 315 | 1.1249 | 1.0927 | 1.0766 | -15 to -8 | Complete | 5.8 | 6.4 |
| 400 | 380 to 420 | 1.1255 | 1.0931 | 1.0769 | 4 to 8 | Complete | 7.3 | 8.7 |
| 540 Blend (a) | 468 to 534 | (h) | 1.0930 | 1.0765 | 38 to 41 | 73 | 15.1 | (a) |
| 600 | 570 to 630 | 1.1258 | 1.0931 | 1.0767 | 20 to 25 | Complete | 10.8 | 13.2 |
| 900 | 855 to 945 | (h) | 1.0926 | 1.0763 | 32 to 36 | 86 | 15.3 | 20.0 |
| 1000 | 950 to 1050 | (h) | 1.0927 | 1.0765 | 37 to 40 | 80 | 17.2 | 22.3 |
| 1450 | 1305 to 1595 | (h) | 1.0919 | 1.0761 | 43 to 46 | 72 | 26.5 | 32.5 |
| 3350 | 3015 to 3685 | (h) | 1.0926 | 1.0769 | 54 to 58 | 67 | 90.8 | 75.7 |
| 4000 | 3600 to 4400 | (h) | 1.0926 | 1.0769 | 57 to 59 | 66 | 140.4 | 90.5 |
| 4600 | 4140 to 5060 | (h) | 1.0926 | 1.0764 | 57 to 61 | 65 | 183.9 | 104.1 |
| 8000 | 7000 to 9000 | (h) | 1.0852 (b) | 1.0689 (d) | 60 to 63 | 63 | 821.7 | 181.4 |
| Compound 20M | 17,500 (g) | (h) | 1.0540 (c) | 1.0392 (c) | 61 to 63 | 65 (g) | 18,655 | 2 moles 8000 joined with an epoxide |
| CARBOWAX® Methoxypolyethylene Glycol | | | | | | | | |
| 350 | 335 to 365 | 1.0894 | 1.0547 | 1.0373 | -5 to 10 | Complete | 3.9 | 7.2 |
| 550 | 525 to 575 | 1.1039 | 1.0690 | 1.0515 | 15 to 25 | Complete | 6.5 | 11.8 |
| 750 | 715 to 785 | (h) | 1.0761 | 1.0595 | 27 to 32 | Complete | 10.3 | 16.3 |
| 2000 | 1800 to 2200 | (h) | 1.0871 | 1.0707 | 49 to 54 | 68 | 45.5 | 44.7 |
| 5000 | 4375 to 5625 | (h) | 1.0899 | 1.0742 | 57 to 63 | 64 | 319 | 112.9 |

| Product | Surface Tension at 25°C, dynes/cm | Refractive Index, n _D 20 | Liquid Specific Heat at 25°C, cal/g/°C | Heat of Fusion, cal/g | Heat of Combustion (l) at 25°C, Btu/lb | CTFA (m)/INCI (n) Nomenclature |
|---------------------------------------------|-----------------------------------|-------------------------------------|----------------------------------------|-----------------------|----------------------------------------|--------------------------------|
| | | | | | | |
| 200 | 44.5 | 1.4597 | 0.51 | (f) | 10,540 | PEG-4 |
| 300 | 44.5 | 1.4644 | 0.51 | 37 | 10,840 | PEG-6 |
| 400 | 44.5 | 1.4667 | 0.51 | 36 | 11,010 | PEG-8 |
| 540 Blend (a) | (h) | (h) | 0.51 (k) | 37 | -11,070 | PEG-6 (and) PEG-32 |
| 600 | 44.5 | 1.4688 | 0.51 | 35 | -11,100 | PEG-12 |
| 900 | (h) | (h) | 0.51 (k) | 36 | -11,210 | PEG-18 |
| 1000 | (h) | (h) | 0.51 (k) | 38 | -11,240 | PEG-20 |
| 1450 | (h) | (h) | 0.51 (k) | 37 | -11,300 | PEG-32 |
| 3350 | (h) | (h) | 0.51 (k) | 39 | -11,380 | PEG-75 |
| 4000 | (h) | (h) | 0.51 (k) | 45 | -11,390 | PEG-90 (p) |
| 4600 | (h) | (h) | 0.51 (k) | 45 | -11,390 | PEG-100 |
| 8000 | 51.3 (g) | (h) | 0.51 (k) | 41 | -11,410 | PEG-180 |
| Compound 20M | 49.6 (f) | (h) | 0.51 (k) | 38 | -11,430 | - |
| CARBOWAX® Methoxypolyethylene Glycol | | | | | | |
| 350 | 40.5 | 1.4557 | 0.51 | 26 | -11,340 | PEG-6 Methyl Ether |
| 550 | 40.7 (j) | 1.4620 | 0.51 | 30 | -11,400 | Methoxy PEG-10 |
| 750 | 40.7 (j) | 1.4572 (j) | 0.51(k) | 34 | -11,350 | Methoxy PEG-16 |
| 2000 | (h) | (h) | 0.51(k) | 41 | -11,390 | Methoxy PEG-40 |
| 5000 | (h) | (h) | 0.51(k) | 43 | -11,410 | Methoxy PEG-100 |

FOOTNOTES:


- (a) A 41/59 wt % mixture of PEG-300 and PEG-1450
 (b) At 70°C
 (c) At 120°C
 (d) At 90°C
 (e) At 140°C
 (f) Sets to glass below -65°C
 (g) Approximate

- (h) Solid at specified temperature
 (i) 50% aqueous solution
 (j) At 40°C
 (k) Solid heat capacity
 (l) Negative indicates heat evolved
 (m) Cosmetics, Toiletries, and Fragrances Association
 (n) International Nomenclature Cosmetic Ingredient
 (p) Proposed CTFA/INCI Name


(continued)

Table 11.70: (continued)

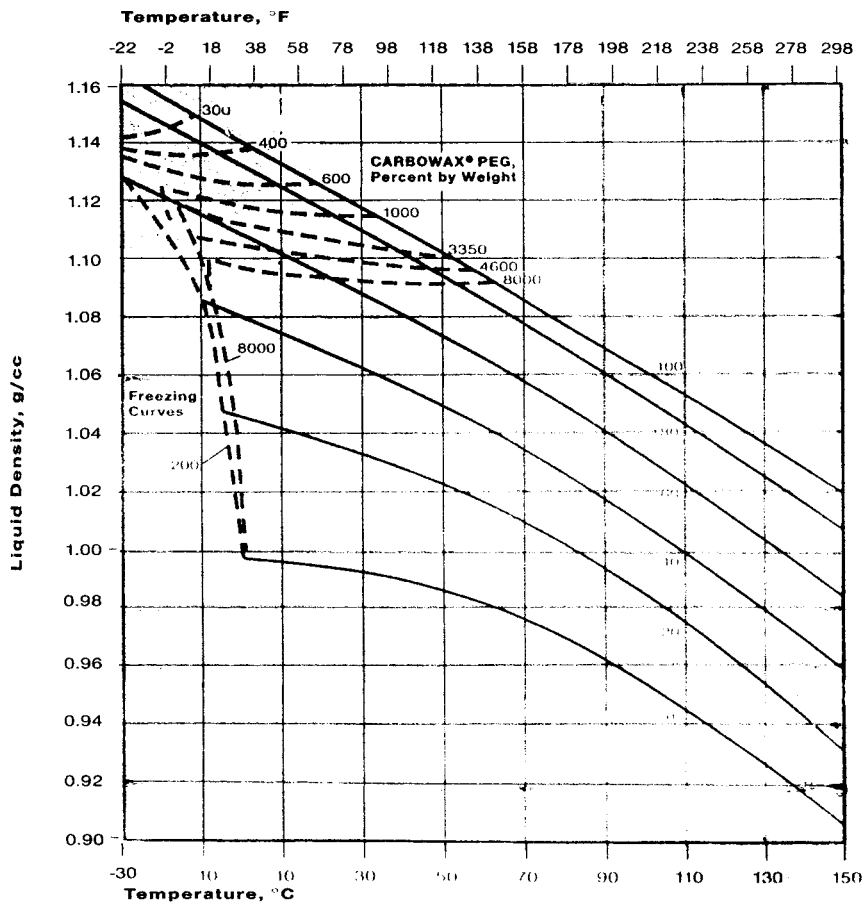Liquid Densities of Aqueous Solutions of Liquid and Solid CARBOWAX® Polyethylene Glycols



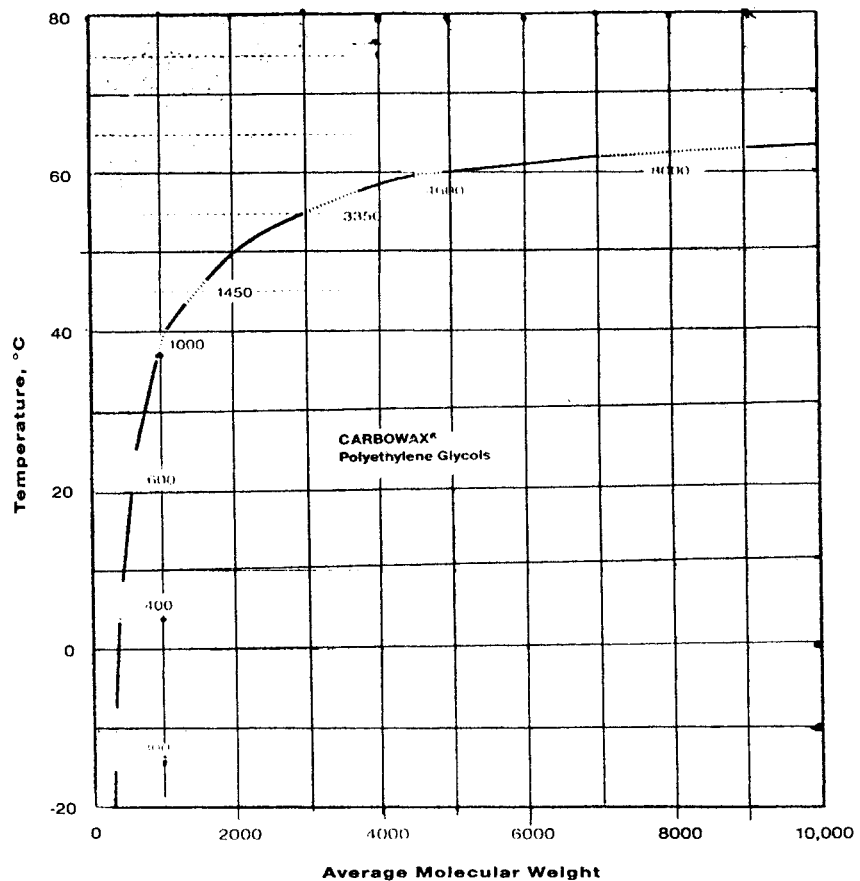
Melting/Freezing Range of CARBOWAX® Polyethylene Glycols vs. Molecular Weight



(continued)


Table 11.70: (continued)

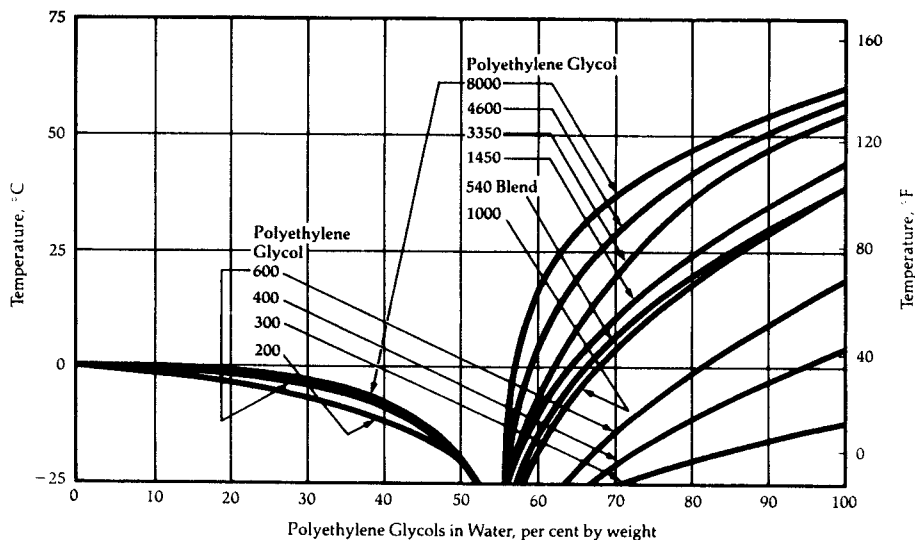Freezing Points of Aqueous Solutions of Liquid and Solid CARBOWAX Polyethylene Glycols



Note: Below -23°C , all mixtures supercool and have no definite freezing point. In high concentrations of water, the curves for polyethylene glycols 300, 400, 1000, 540 Blend, 1450, and 3350 can be interpolated from the curves given.

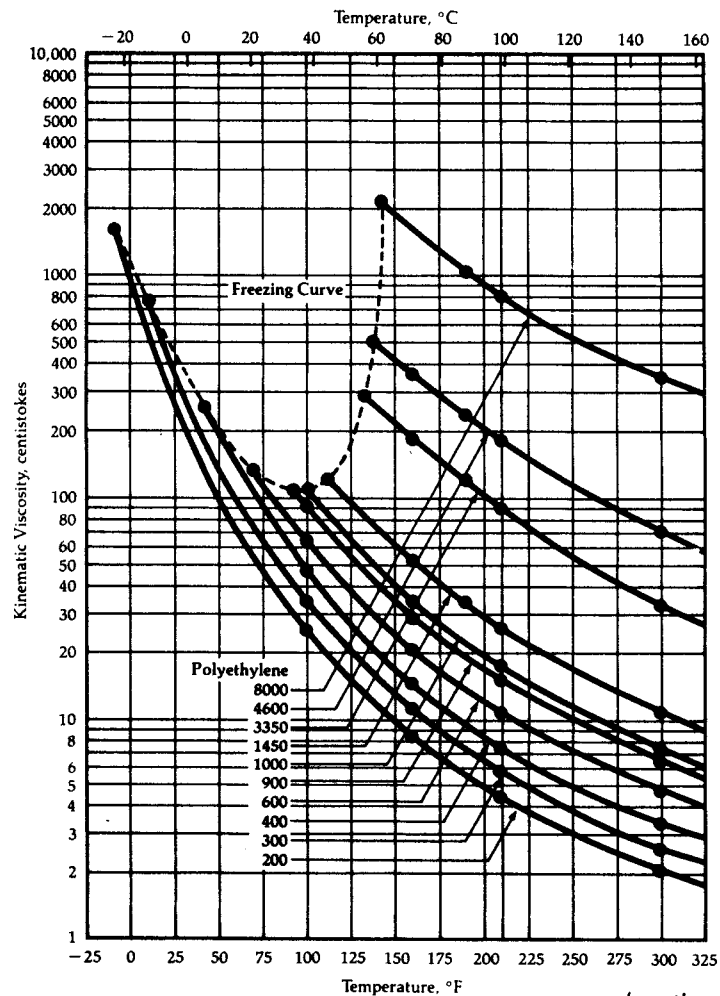
Kinematic Viscosity of CARBOWAX Polyethylene Glycols




(continued)

Table 11.70: (continued)

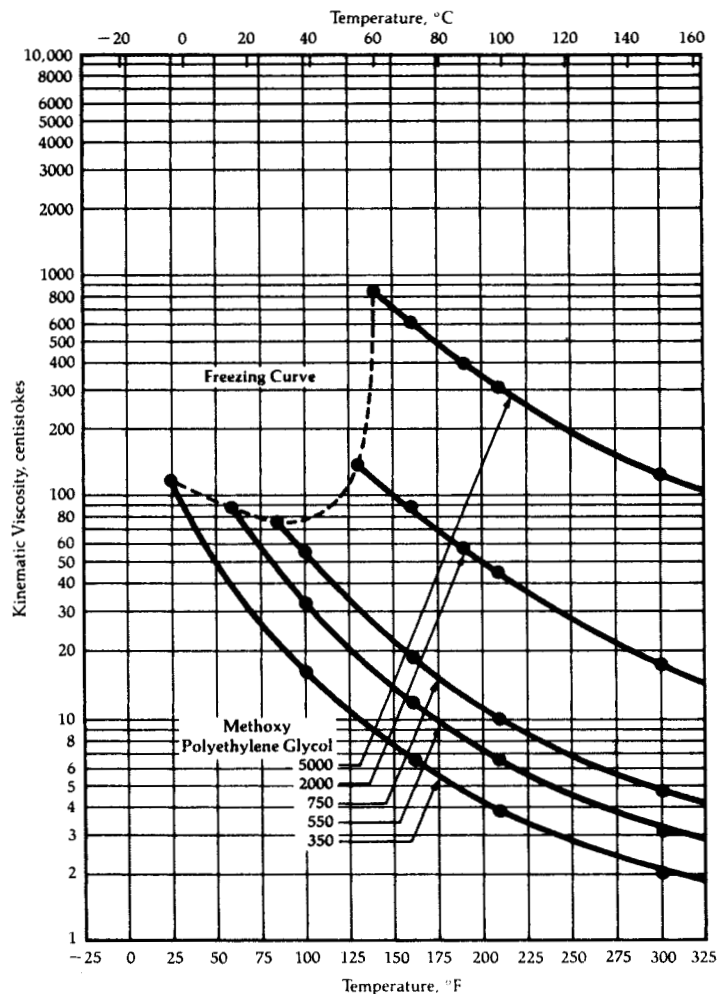**Kinematic Viscosity of CARBOWAX
Methoxypolyethylene Glycols**




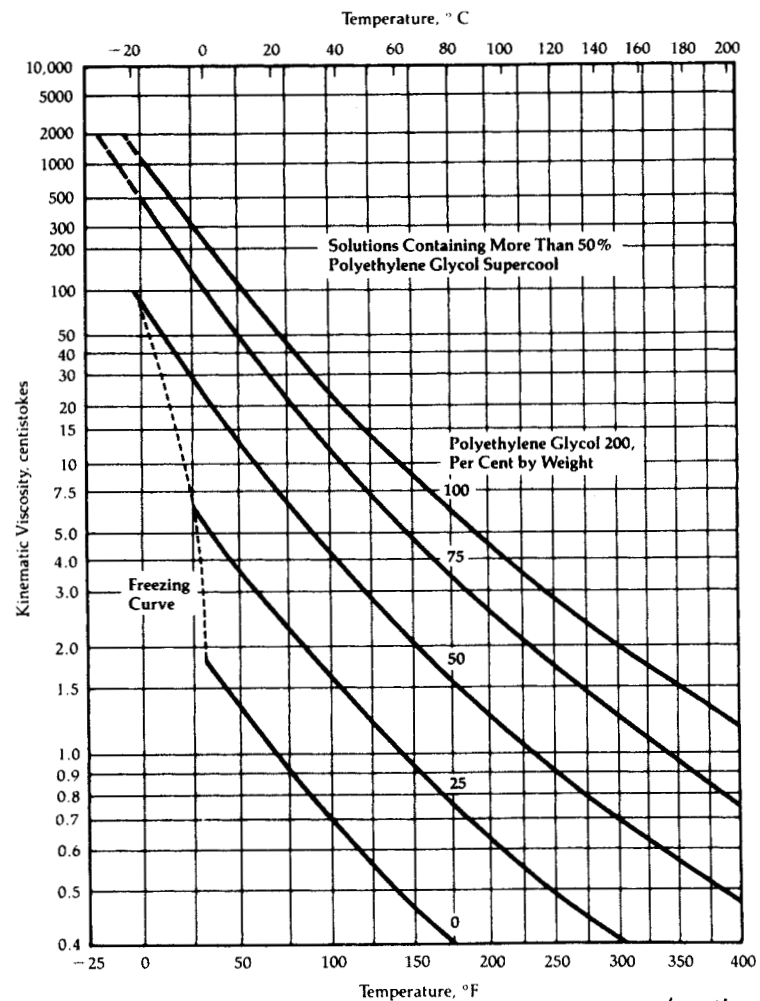**Kinematic Viscosity of Aqueous Solutions of CARBOWAX
Polyethylene Glycol 200**




(continued)

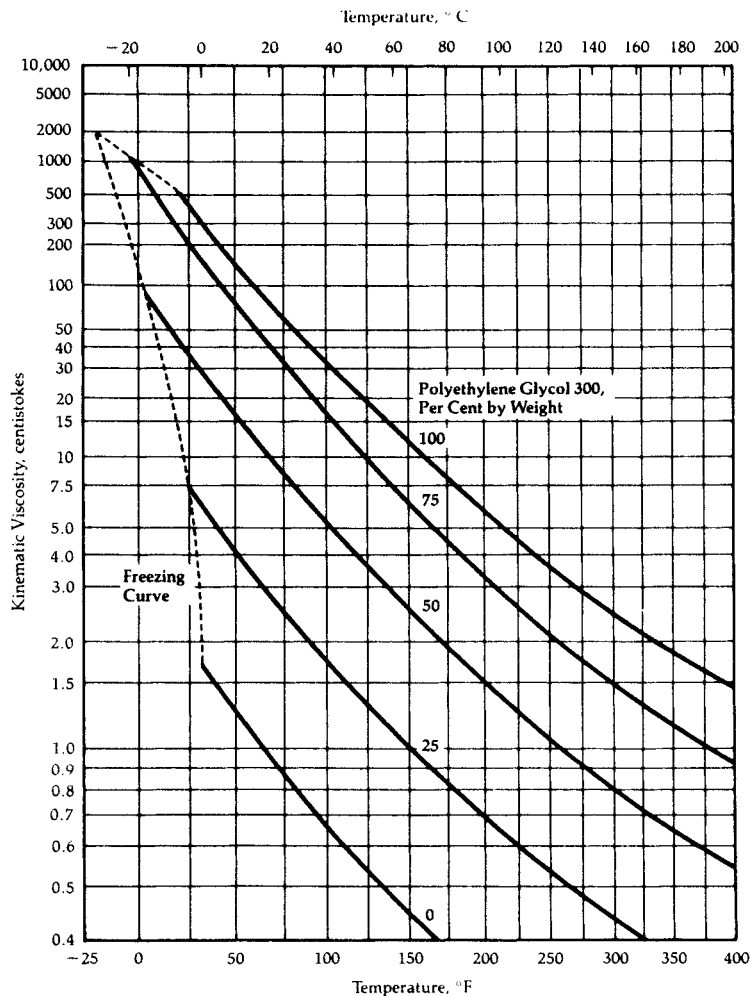Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 300



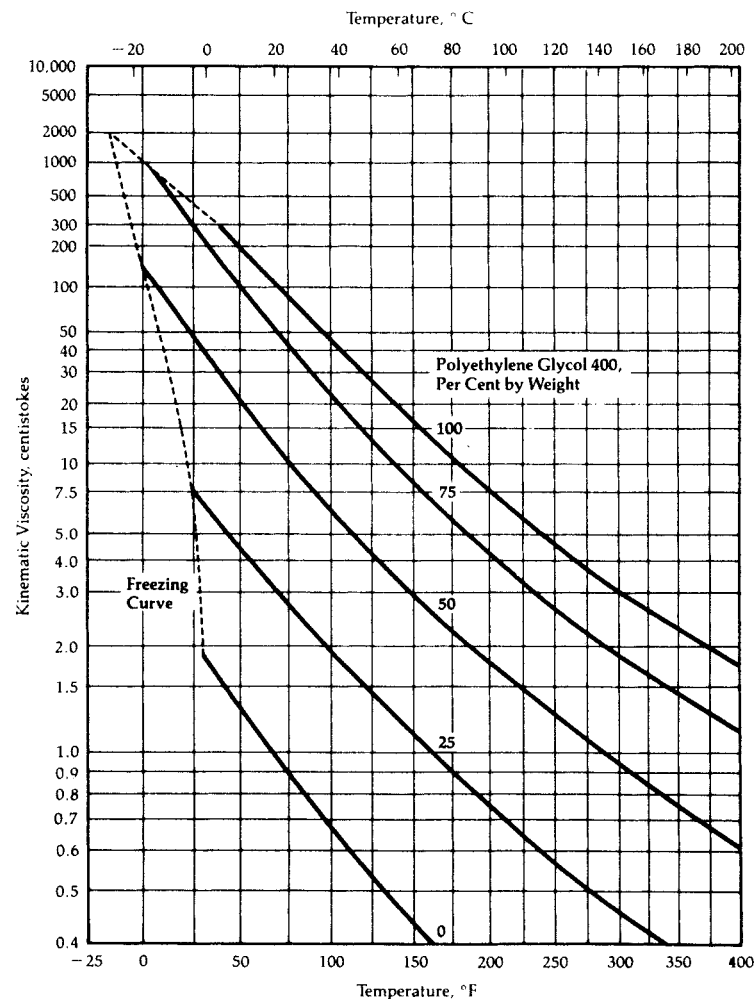
Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 400




(continued)

Table 11.70: (continued)

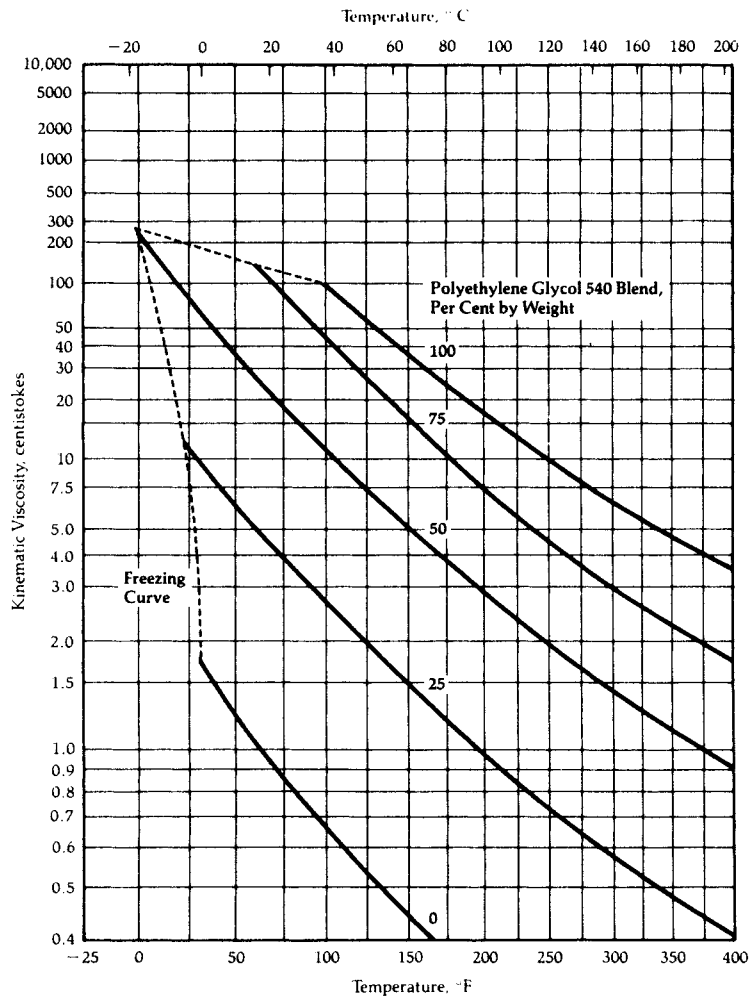Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 540 Blend



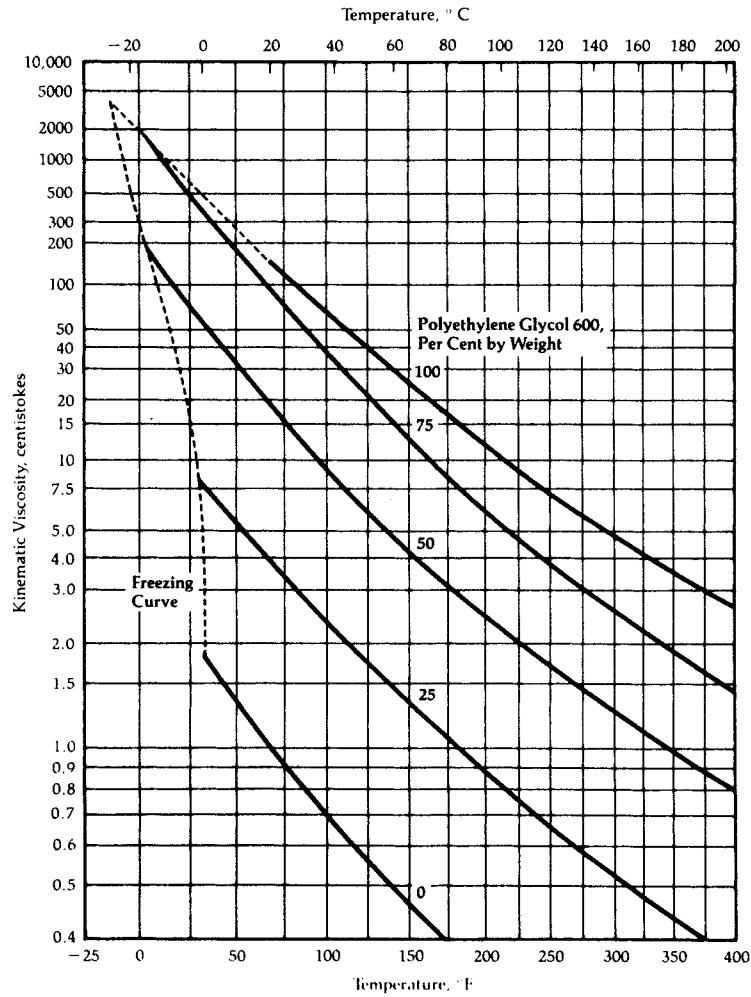
Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 600




(continued)

Table 11.70: (continued)

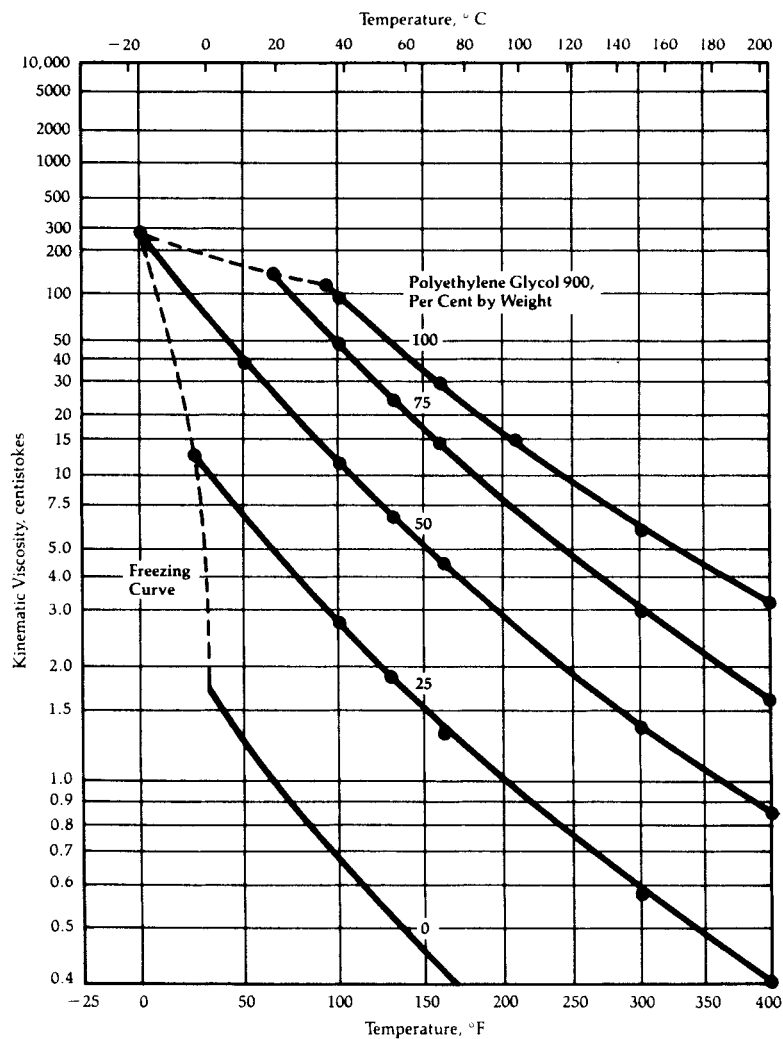Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 900



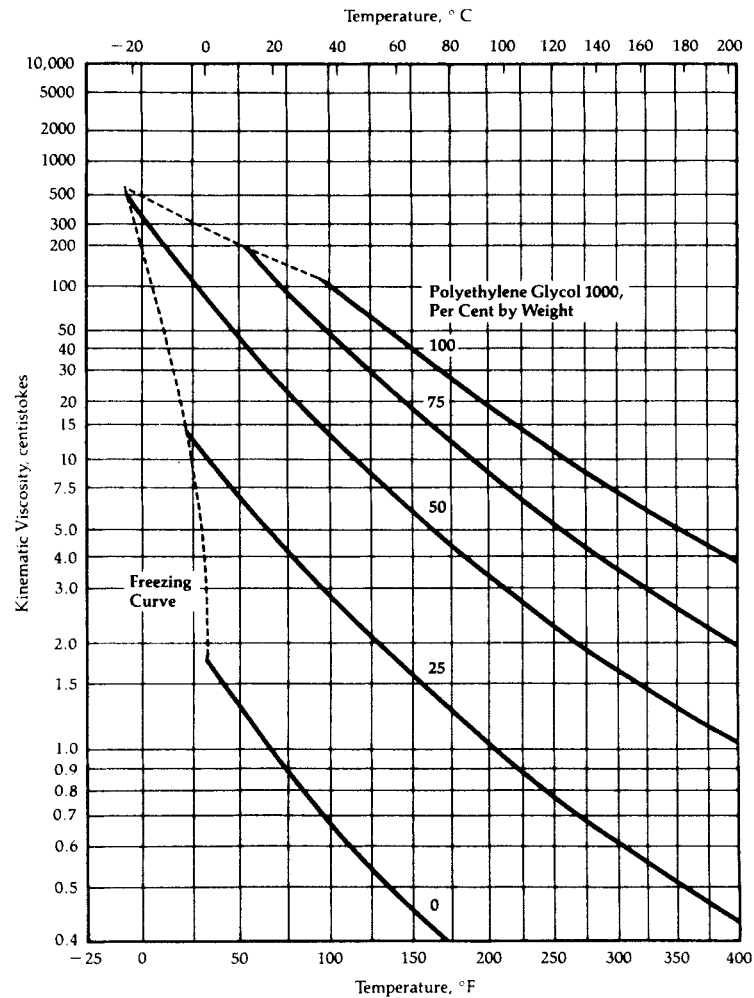
Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 1000




(continued)

Table 11.70: (continued)

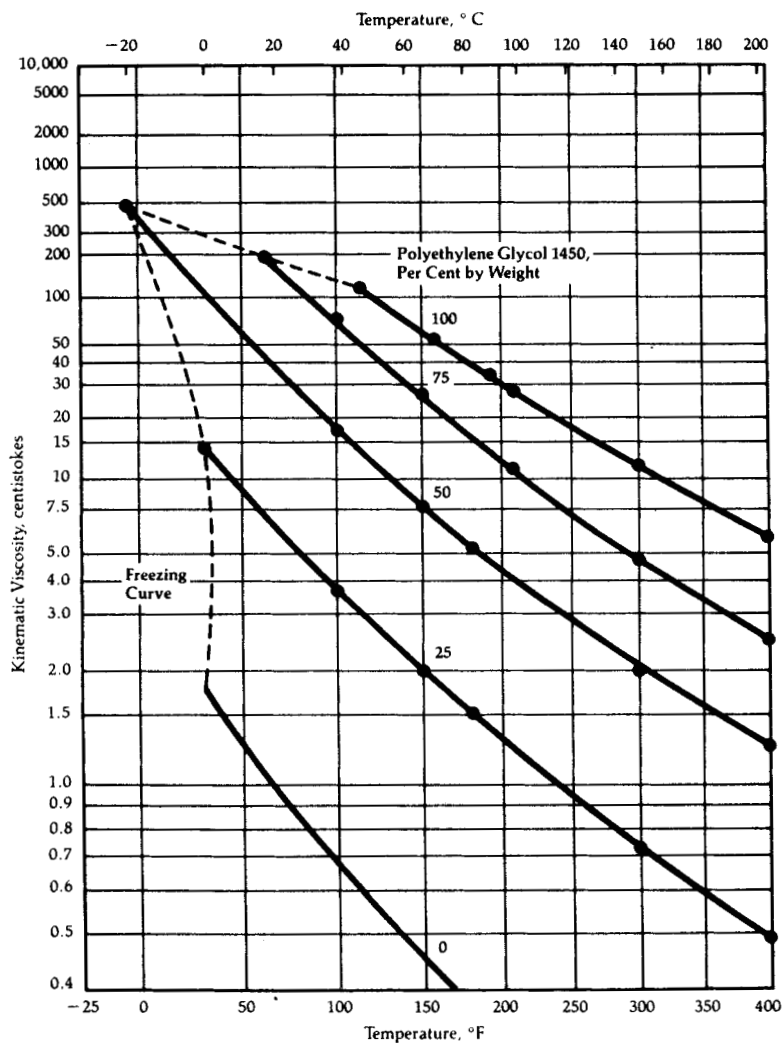Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 1450



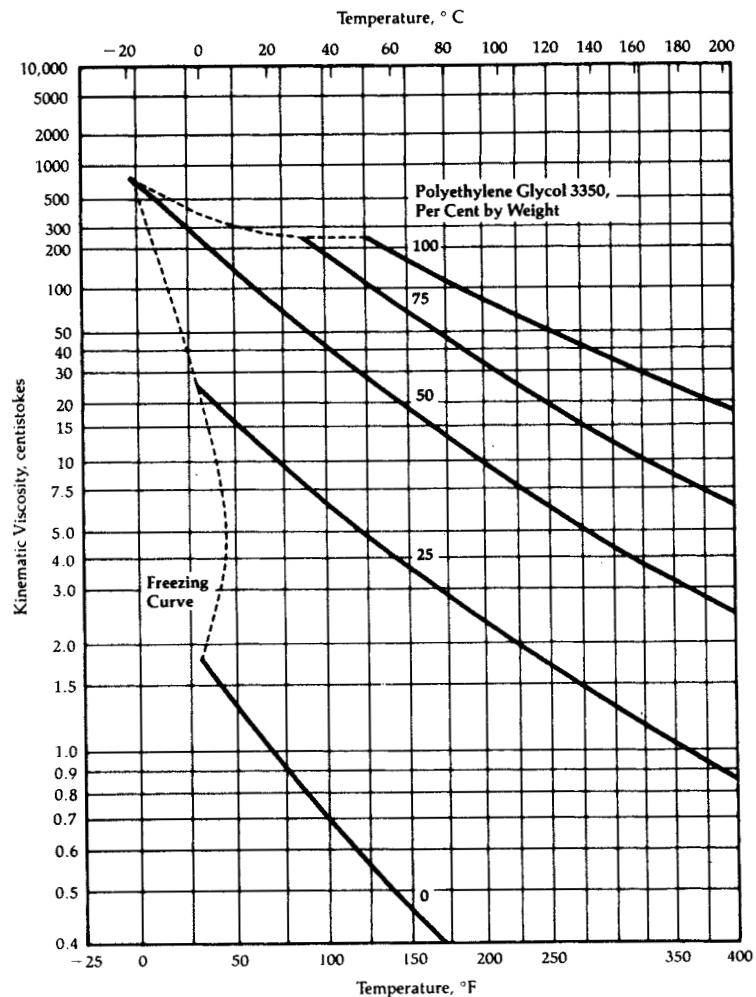
Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 3350




(continued)

Table 11.70: (continued)

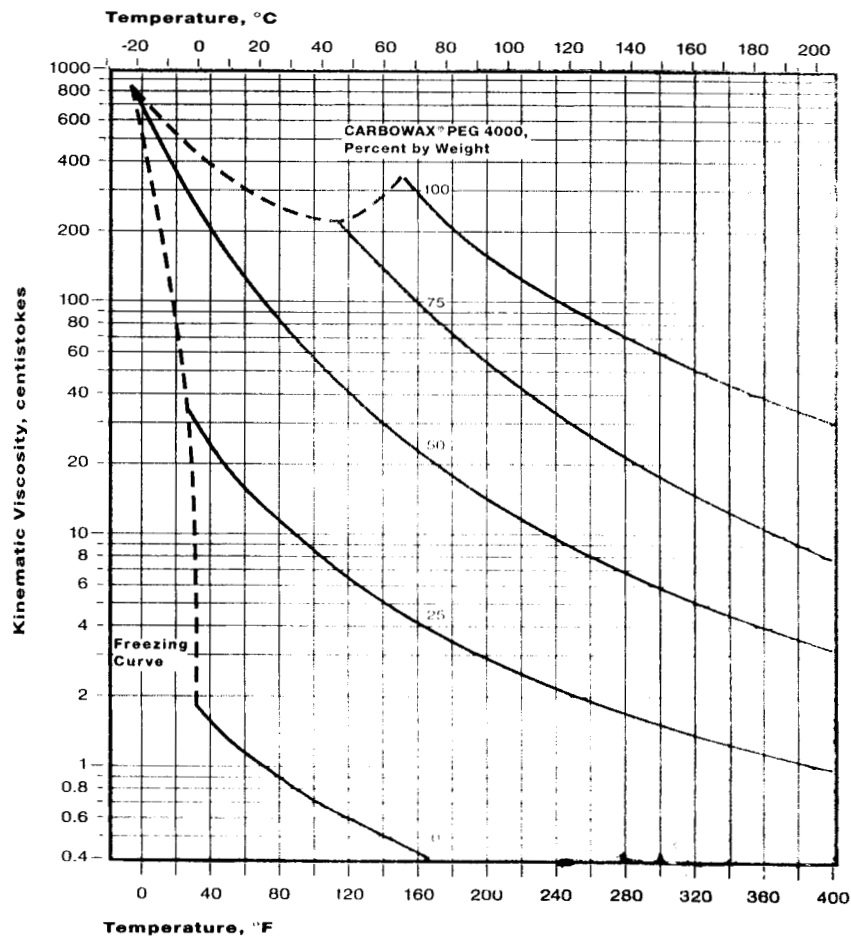Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 4000



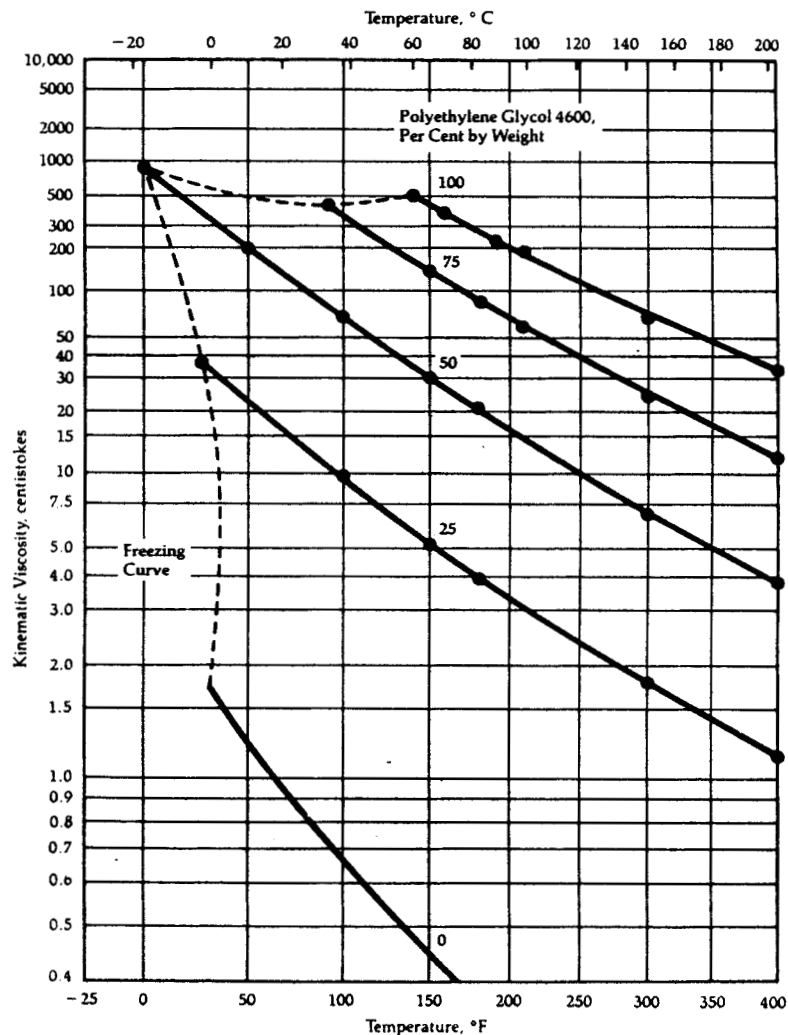
Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 4600




(continued)

Table 11.70: (continued)

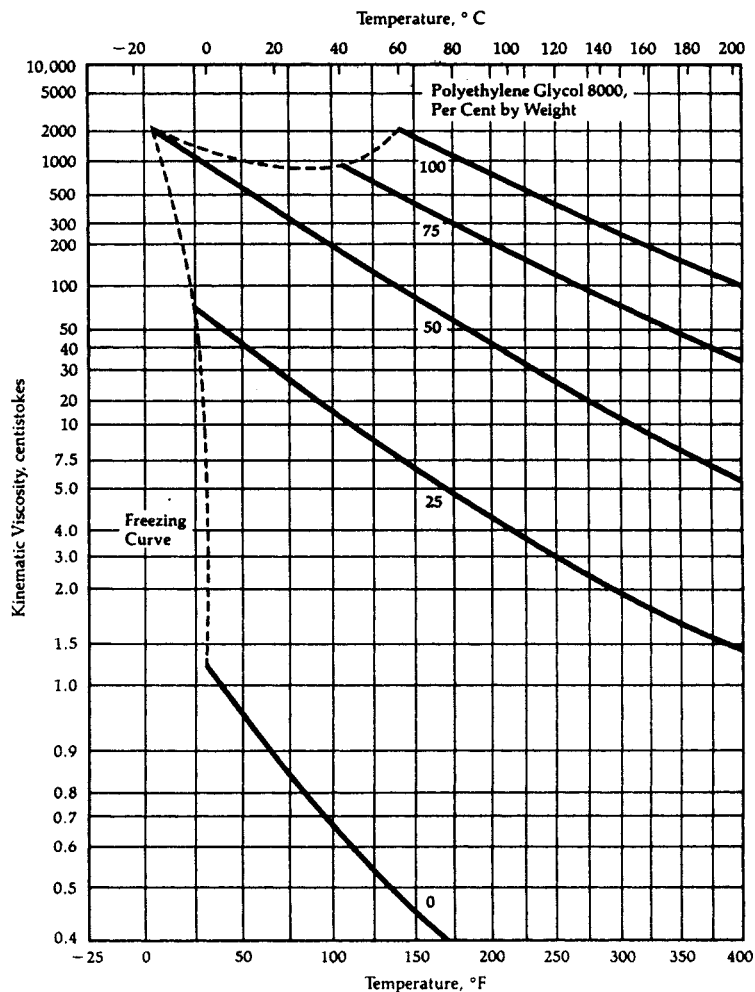Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol 8000



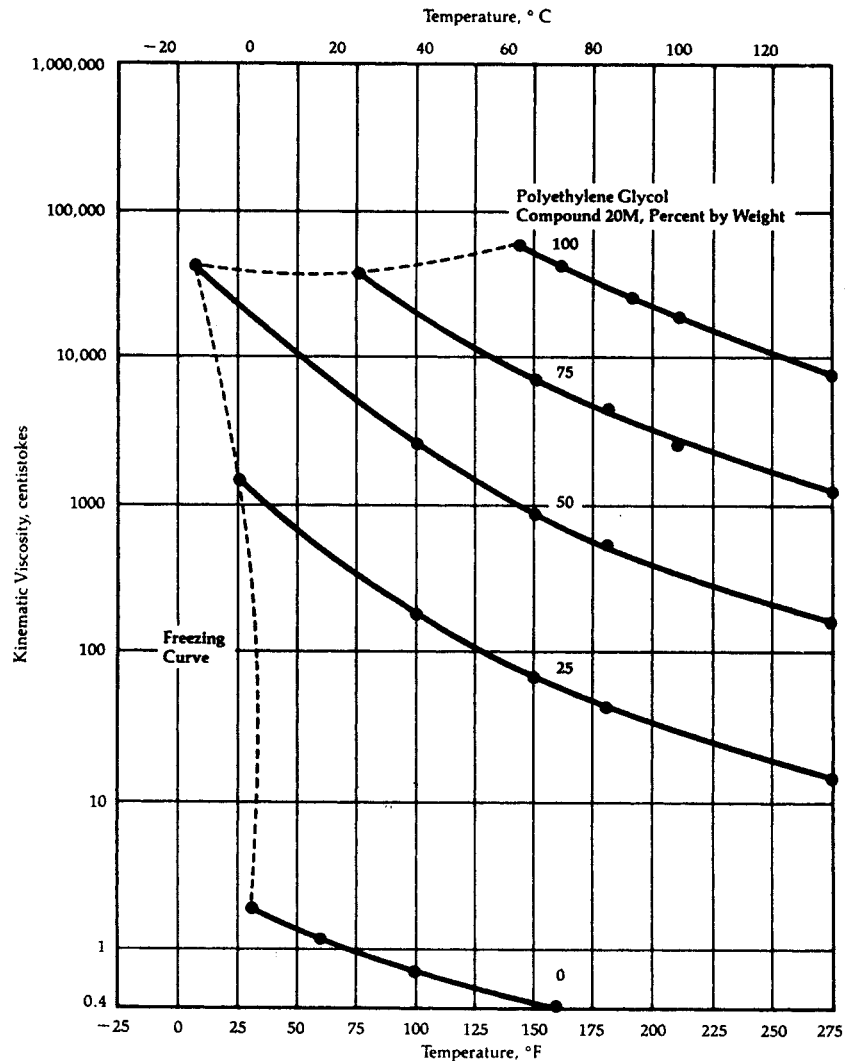
Kinematic Viscosity of Aqueous Solutions of CARBOWAX Polyethylene Glycol Compound 20M




(continued)

Table 11.70: (continued)

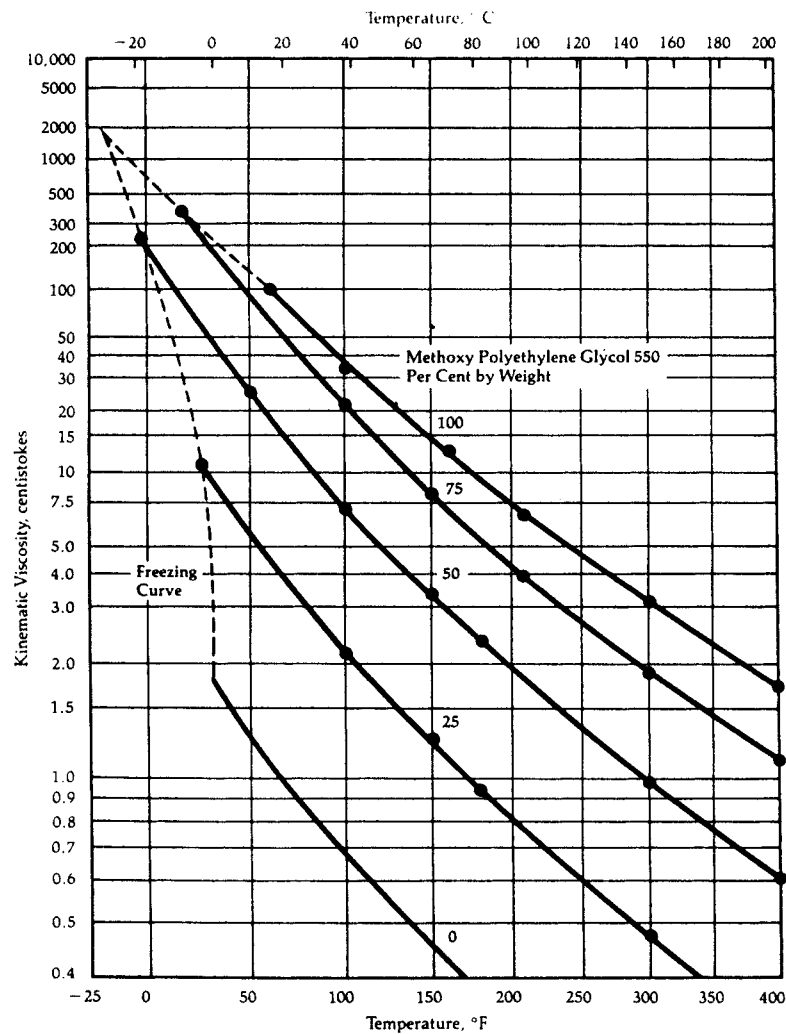**Kinematic Viscosity of Aqueous Solutions of CARBOWAX
Methoxypolyethylene Glycol 350**



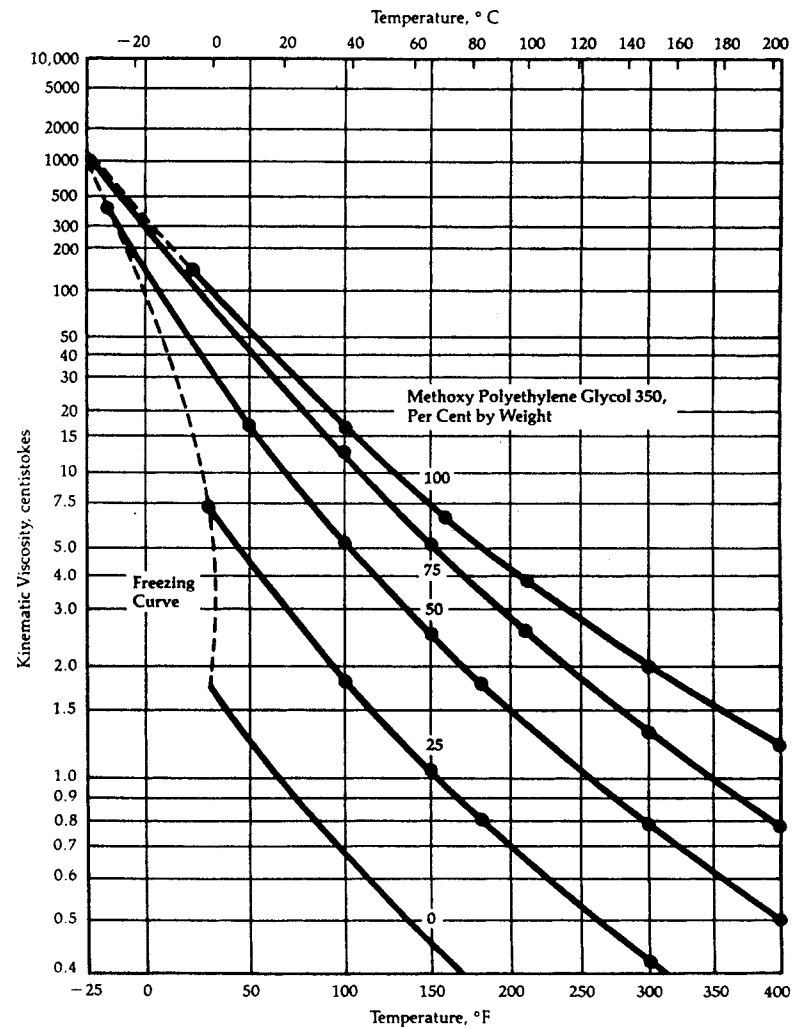
**Kinematic Viscosity of Aqueous Solutions of CARBOWAX
Methoxypolyethylene Glycol 550**




(continued)

Table 11.70: (continued)

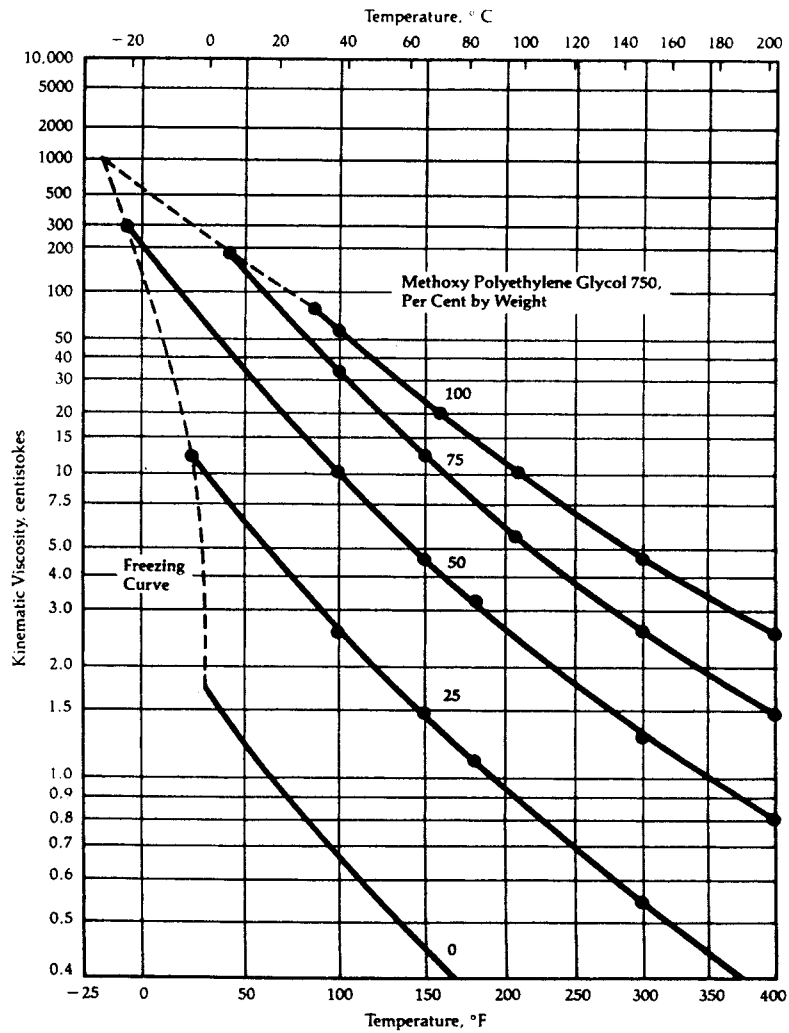Kinematic Viscosity of Aqueous Solutions of CARBOWAX Methoxypolyethylene Glycol 750



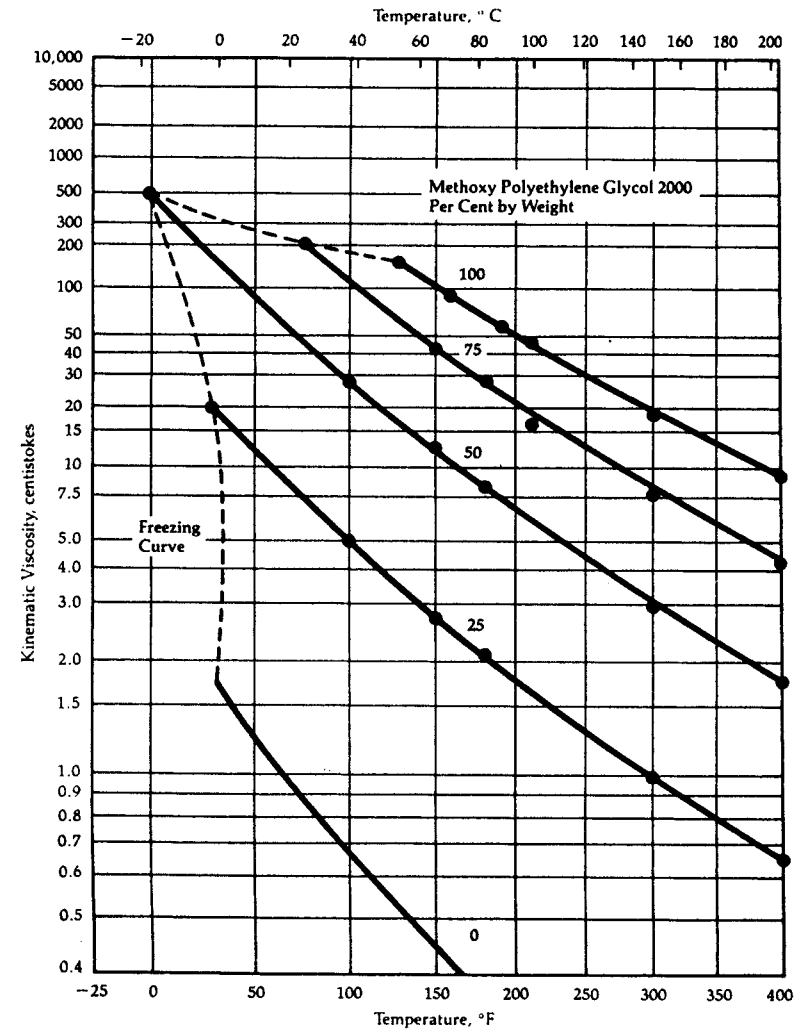
Kinematic Viscosity of Aqueous Solutions of CARBOWAX Methoxypolyethylene Glycol 2000




(continued)

Table 11.70: (continued)

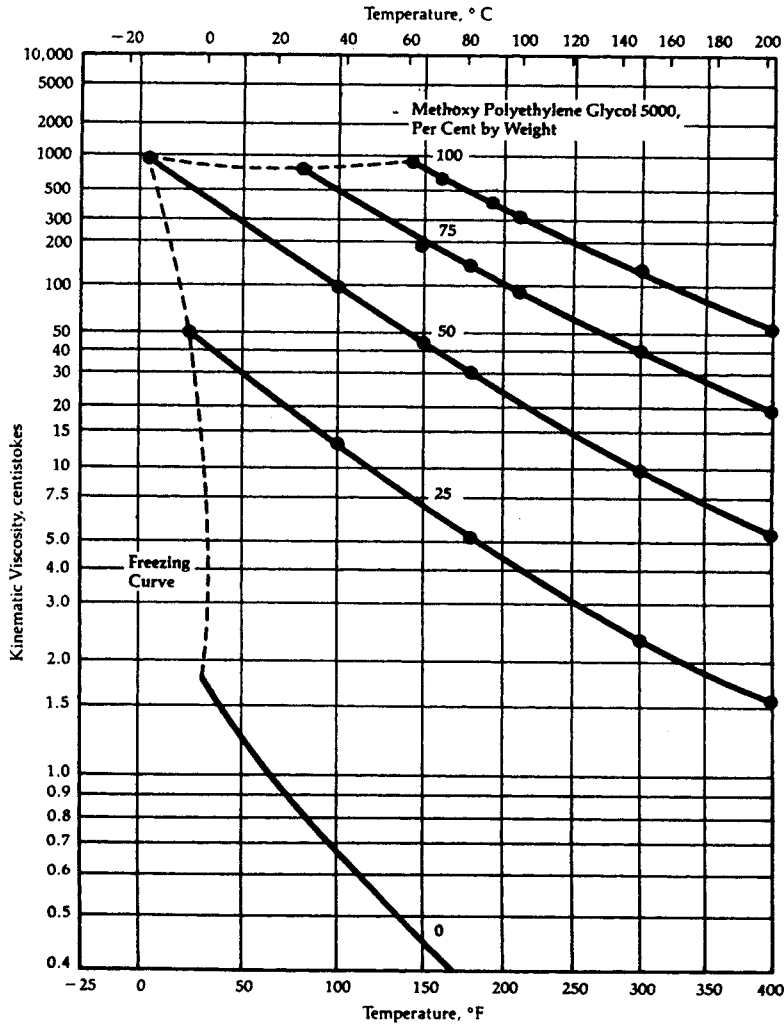Kinematic Viscosity of Aqueous Solutions of CARBOWAX Methoxypolyethylene Glycol 5000



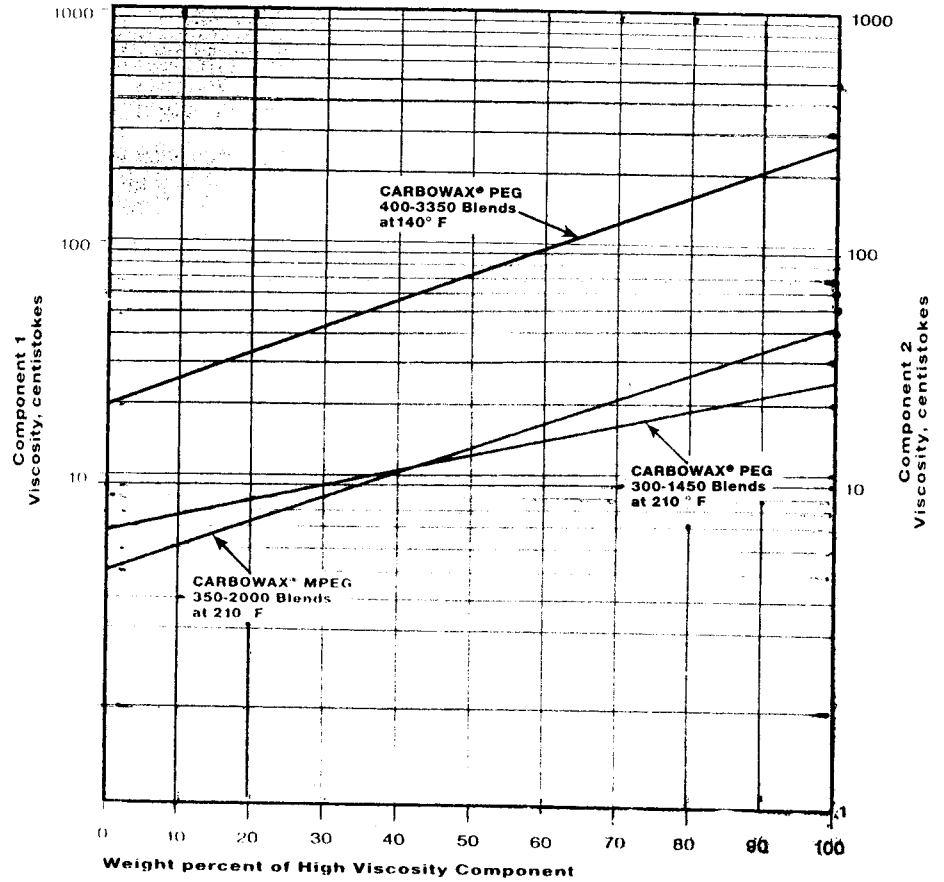
Kinematic Viscosity of Blends of CARBOWAX Polyethylene Glycols and Methoxypolyethylene Glycols




(continued)

Table 11.70: (continued)

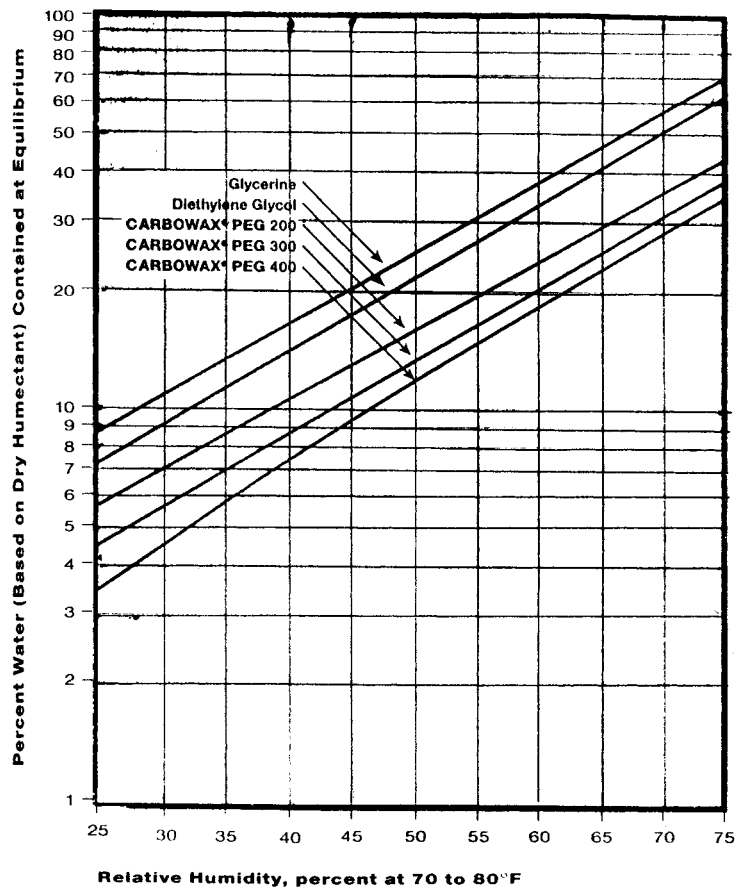Hygroscopicity of Liquid CARBOWAX Polyethylene Glycols at Various Relative Humidities



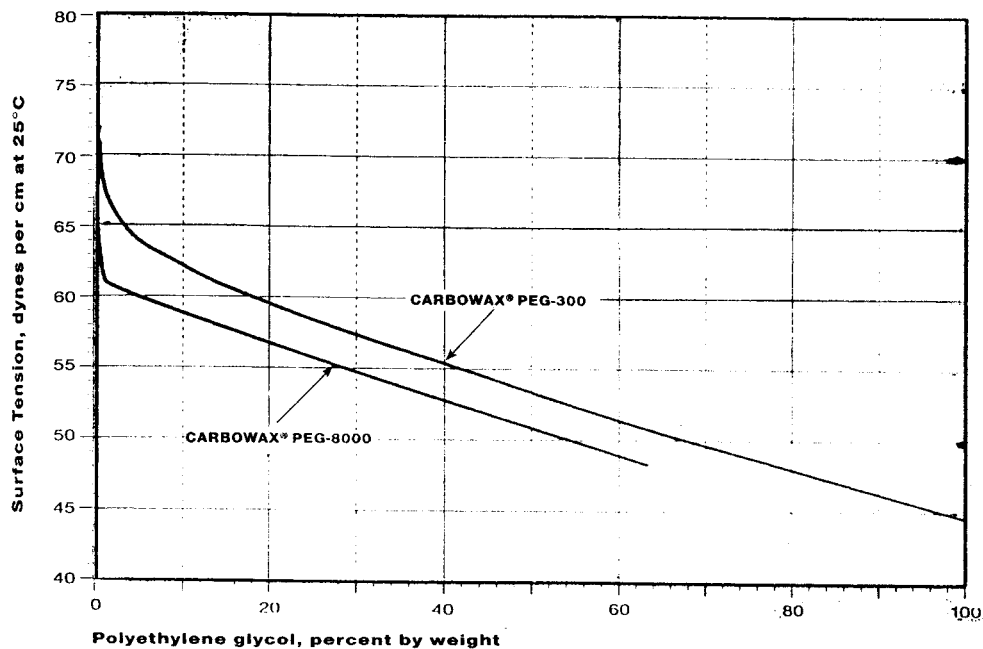Surface Tensions of Aqueous Solutions of CARBOWAX Polyethylene Glycols at 25°C




Note: These curves are valid to ± 1 dyne per cm. Surface tension for CARBOWAX Polyethylene Glycol 400 to 4600 lie between the curves shown.

(continued)

Table 11.70: (continued)

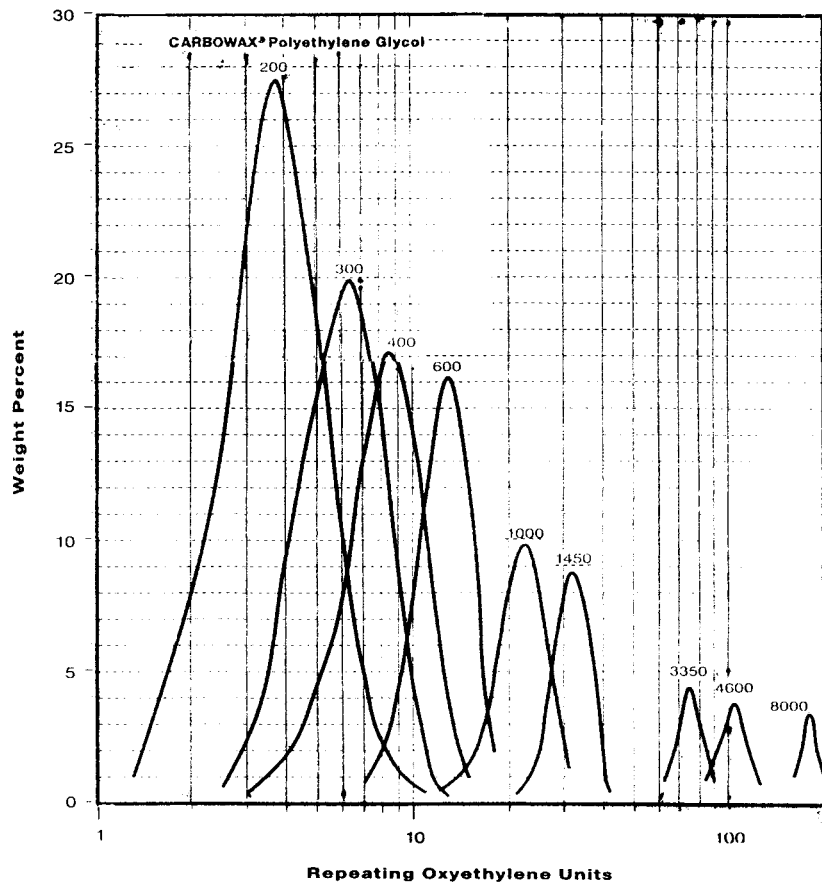Molecular Weight Distributions of CARBOWAX Polyethylene Glycols



Note: The curves for CARBOWAX® PEG 200, 300, 400, 600, 1000 and 1450 were determined by liquid chromatography. The curves for CARBOWAX® PEG 3350, 4600 and 8000 were determined by gel permeation chromatography.


Effect of Molecular Weight on Physical Properties

| Avg MW Range | Solubility | Hygroscopicity | Vapor Pressure | Melting or Freezing Range | Viscosity |
|--------------|------------|----------------|----------------|---------------------------|-----------|
| 200 | HIGHER | HIGHER | HIGHER | lower | lower |
| 300 | ↑ | ↑ | ↑ | ↓ | ↓ |
| 400 | | | | | |
| 600 | | | | | |
| 900 | | | | | |
| 1000 | | | | | |
| 1450 | lower | lower | lower | HIGHER | HIGHER |
| 3350 | ↓ | ↓ | ↓ | HIGHER | HIGHER |
| 4600 | | | | | |
| 8000 | | | | | |

(continued)


Table 11.70: (continued)

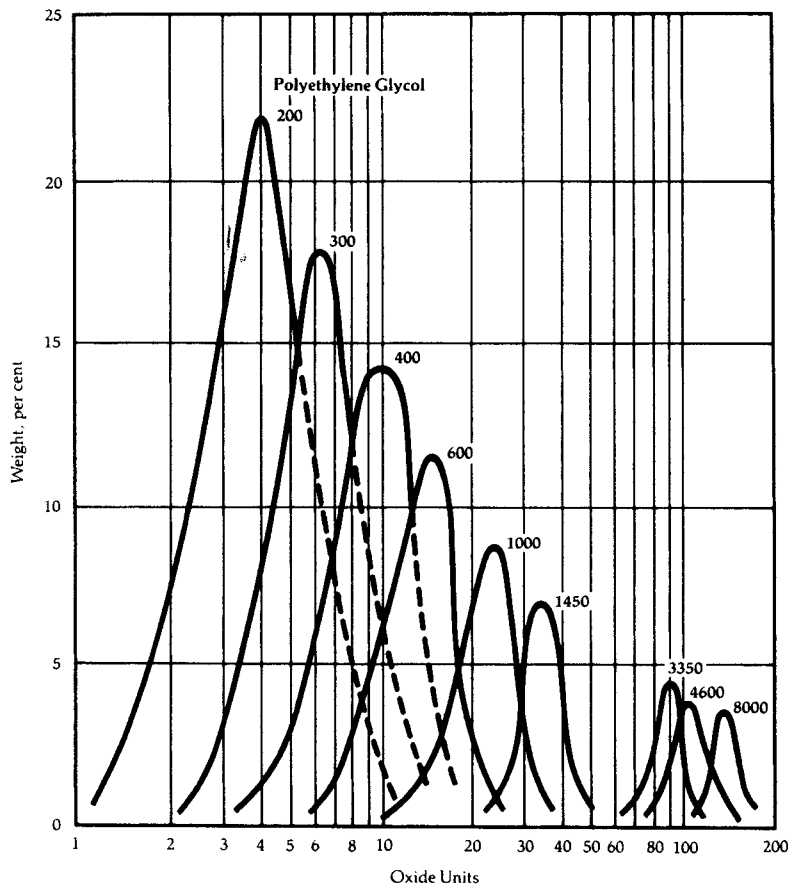Polymer Distribution in CARBOWAX Polyethylene Glycols 200, 300, 400, 600, 1000, 1450, 4600 and 8000



Note: These curves were computer-derived and confirmed by gel permeation chromatography

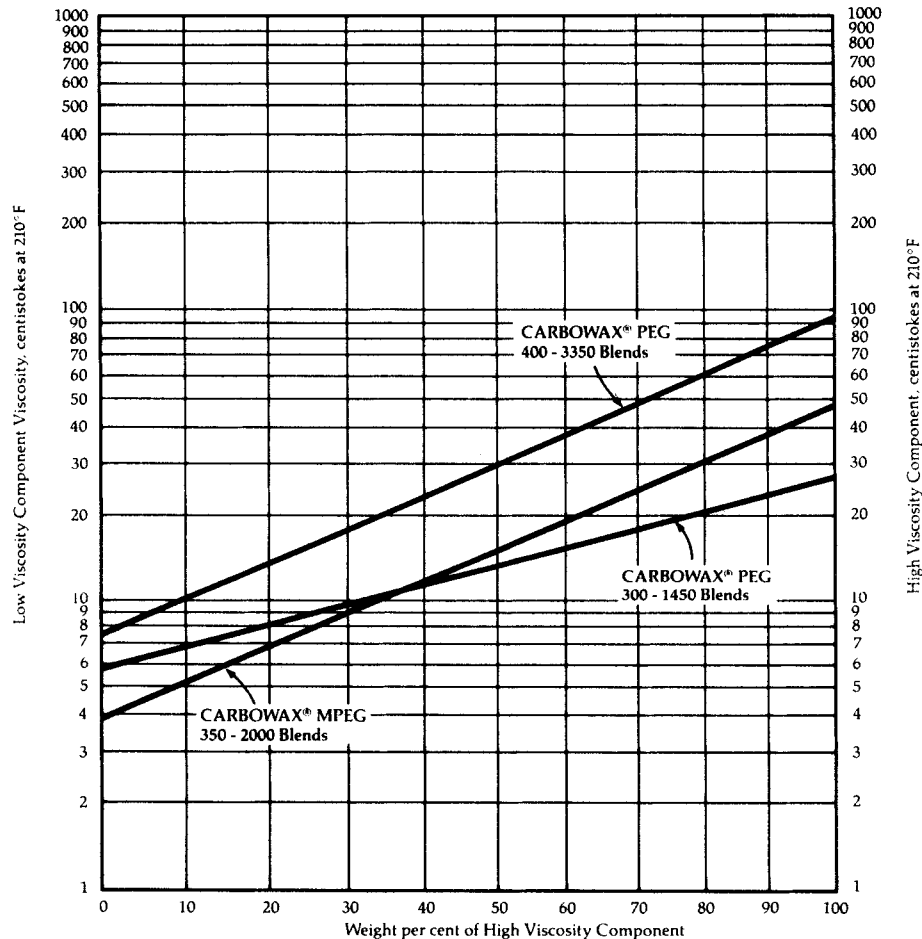Approximate Kinematic Viscosity of Blends of CARBOWAX Polyethylene Glycols and Methoxypolyethylene Glycols



Note: To determine the viscosity of a blend of two polyethylene glycols, draw a straight line from the low viscosity component on the left to the component on the right. Viscosities and percentages of the components of blends are then approximated by points along this line. Deviations are greater when blending lower viscosity products with those of higher viscosity. The three curves on this page are examples.

(continued)

Table 11.70: (continued)

Solubilities of Commonly Used Substances in CARBOWAX Polyethylene Glycols 400, 540 Blend and 3350

| | CARBOWAX Polyethylene Glycol 400 | CARBOWAX Polyethylene Glycol 540 Blend | CARBOWAX Polyethylene Glycol 3350 |
|----------------------|-------------------------------------------|-------------------------------------------------|--------------------------------------------|
| Nitrocellulose | Soluble | Soluble | Partly soluble |
| Ethyl Cellulose | Insoluble | Insoluble | Insoluble |
| Methyl Cellulose | Partly soluble | Insoluble | Insoluble |
| Shellac | Partly soluble | Partly soluble | Insoluble |
| Carnauba Wax (No. 3) | Insoluble | Insoluble | Insoluble |
| Paraffin Wax | Insoluble | Insoluble | Insoluble |
| Beeswax | Insoluble | Insoluble | Insoluble |
| Ester Gum | Insoluble | Insoluble | Insoluble |
| Rosin | Soluble | Partly soluble | Partly soluble |
| Gum Arabic | Insoluble | Insoluble | Insoluble |
| Raw Castor Oil | Insoluble | Insoluble | Insoluble |
| Tung Oil | Insoluble | Insoluble | Insoluble |
| Mineral Oil | Insoluble | Insoluble | Insoluble |
| Olive Oil | Insoluble | Insoluble | Insoluble |
| Pine Oil | Soluble | Partly soluble | Insoluble |
| Casein | Soluble | Soluble | Partly soluble |
| Zein | Soluble | Soluble | Partly soluble |
| Chlorinated Starch | Soluble | Soluble | Soluble |
| Gelatin | Insoluble | Insoluble | Insoluble |

Solubilities of CARBOWAX Polyethylene Glycols 400, 540 Blend and 3350 in Common Solvents

| | CARBOWAX Polyethylene Glycol 400 | | CARBOWAX Polyethylene Glycol 540 Blend | | CARBOWAX Polyethylene Glycol 3350 | |
|---------------------|-------------------------------------------|-----------|-------------------------------------------------|-----------|--------------------------------------------|-----------|
| | Approximate % by weight | | Approximate % by weight | | Approximate % by weight | |
| | at 20°C | at 50°C | at 20°C | at 50°C | at 20°C | at 50°C |
| Water | S | S | 73 | 97 | 62 | 84 |
| Methanol | S | S | 48 | 96 | 35 | S |
| Ethanol (200-proof) | S | S | <1 | S | <1 | S |
| Acetone | S | S | 20 | S | <1 | 99 |
| Dichloroethyl Ether | S | S | 44 | S | 25 | 85 |
| Trichloroethylene | S | S | 50 | 90 | 30 | 80 |
| Methylene Chloride | S | (a) | S | (a) | 70 | (a) |
| CELLOSOLVE® Solvent | S | S | <1 | S | <1 | 88 |
| Butyl CELLOSOLVE | S | S | <1 | S | <1 | 52 |
| CARBITOL® Solvent | S | S | 2 | S | <1 | 63 |
| Butyl CARBITOL | S | S | <1 | S | <1 | 64 |
| Ethyl Acetate | S | S | 15 | S | <1 | 93 |
| Dimethyl Phthalate | S | S | 30 | 90 | 13 | 74 |
| Dibutyl Phthalate | S | S | <1 | S | <1 | 55 |
| Ethyl Ether | Insoluble | (a) | Insoluble | (a) | Insoluble | (a) |
| Isopropyl Ether | Insoluble | Insoluble | Insoluble | Insoluble | Insoluble | Insoluble |
| Toluene | S | S | 13 | S | <1 | S |
| Heptane | Insoluble | Insoluble | 0.50 | 0.01 | <0.01 | <0.01 |

FOOTNOTES:

S = Greater than 100 g per 100 cc of solvent.

(a) Solvent boils at or below 50°C

Table 11.71: Dow Polyglycols (23)

| Polyethylene Glycols E-Series | Average Molecular Weight | Average Freezing Point, C | Average Viscosity, Centistokes | | | | Flash Point PMCC, F | Refractive Index at 25°C | Specific Gravity 25/25°C | Density Lbs/Gal at 25°C | Viscosity Index | Specific Heat Cal/g/°C at 25°C | CTFA ¹ Nomenclature | |
|-----------------------------------------|--------------------------|---------------------------|--------------------------------|-------|-------|-------|---------------------|--------------------------|--------------------------|-------------------------|-----------------|--------------------------------|--------------------------------|--------------|
| | | | 32 F | 77 F | 100 F | 210 F | | | | | | | | |
| CAS# | | Super | | | | | | | | | | | | |
| 25322-68-3 | E200 | 200 | Cools | 187 | 40 | 23 | 4.4 | 340 | 1.459 | 1.124 | 9.35 | 111 | 0.524 | PEG-4 |
| | E300 | 300 | 10 | 343 | 69 | 36 | 5.9 | >400 | 1.463 | 1.125 | 9.36 | 118 | 0.508 | PEG-6 |
| | E400 | 400 | + 6 | | 90 | 49 | 7.4 | >450 | 1.465 | 1.125 | 9.36 | 124 | 0.498 | PEG-8 |
| | E600 | 600 | +22 | | 131 | 72 | 11 | >450 | 1.466 | 1.126 | 9.37 | 154 | 0.490 | PEG-12 |
| | E900 | 900 | 34 | | | 100 | 16 | >450 | a | 1.204 | a | 182 | a | — |
| | E1000 | 1000 | 37 | | | | 18 | >450 | a | 1.214 | a | — | a | PEG-20 |
| | E1450 | 1450 | 44 | SOLID | | | 29 | >450 | a | 1.214 | a | — | a | PEG-6-32 |
| | E3350 | 3350 | 54 | | | | 93 | >450 | a | 1.224 | a | — | a | PEG-75 |
| | E4500 | 4500 | 58 | | | | 180 | >450 | a | 1.224 | a | — | a | PEG-100 |
| | E8000 | 8000 | 60 | | | | 800 | >500 | a | 1.224 | a | — | a | PEG-150 |
| Methoxypolyethylene Glycols MPEG | | | | | | | | | | | | | | |
| CAS# | MPEG | | | | | | | | | | | | | PEG-6 |
| 9004-74-4 | 350 | 350 | 0 | | 27 | 16 | 3.8 | >350 | 1.455 | 1.097 | 9.14 | 138 | — | Methyl Ether |
| | MPEG | | | | | | | | | | | | | PEG-10 |
| | 550 | 550 | 20 | | 56 | 30 | 6.3 | >400 | 1.461 | 1.102 | 9.17 | 181 | — | Methyl Ether |
| | MPEG | | | | | | | | | | | | | PEG-16 |
| | 750 | 750 | 30 | | | 53 | 9.9 | >450 | 1.463 | 1.096b | 9.04b | a | — | Methyl Ether |

a Designates properties not applicable for solids

b At 50°

¹ Cosmetic, Toiletry and Fragrance Association

Liquids Miscible in all Proportions with Liquid Polyethylene Glycols E200, E300, E400, E600

| | | |
|--------------------------|----------------------------|----------------------------|
| Acetaldehyde | Dichloroisopropyl Ether | Methyl Ethyl Ketone |
| Acetic Acid (Glacial) | Diethanolamine* | Methyl Formate |
| Acetic Anhydride | Diethylene Glycol* | Methyl Isobutyl Carbinol |
| Acetone* | 1,4-Dioxane* | Methyl Isobutyl Ketone |
| Acetylene Tetrabromide | Diphenyl Oxide* | Methyl Salicylate* |
| Acrylonitrile | Dipropylene Glycol* | Morpholine* |
| Allyl Alcohol | Ethanol (95%) | Nitrobenzene |
| Allyl Bromide | Ethanolamine* | Nitroethane |
| Amyl Acetate | Ethyl Acetate | Nitromethane |
| Amyl Alcohol | Ethyl Bromide | 1-Nitropropane |
| tert-Amyl Alcohol | Ethyl Chloroacetate | 2-Nitropropane |
| Aniline | Ethyl Lactate | Octyl Alcohol |
| Benzaldehyde | Ethylene Chlorohydrin | Paraldehyde |
| Benzene | Ethylene Dibromide* | Phenetole |
| Benzyl Alcohol | Ethylene Dichloride* | Phenyl Acetate |
| Bromobenzene | Ethylene Glycol* | Phenyl Ethyl Acetate |
| Bromoform | Ethylidene Dichloride | Phenyl Ethyl Alcohol |
| n-Butyl Acetate | Formamide | 4-Phenyl-m-Dioxane |
| n-Butyl Bromide | Furfural | Phosphoric Acid (85%) |
| n-Butyl Phosphate | Glycerine* | Piperidine |
| n-Butyl Stearate | Hydrochloric Acid (conc.)* | n-Propanol |
| o-Chloroaniline | Isophorone | Propylene Dibromide |
| Chlorobenzene | Isopropanol (99%) | Propylene Dichloride* |
| Chloroform* | Isopropyl Bromide | Pyridine |
| o-Cresol | Lactic Acid (85%) | Styrene Oxide |
| Cyclohexanol | Mesityl Oxide | Tetrahydrofurfuryl Alcohol |
| Cyclohexanone | Methanol | Triacetin |
| Diacetone Alcohol | Methyl Chloroform* | Trimethylene Bromide |
| Dichloroacetic Acid | (1,1,1-trichloroethane) | Trimethylene Chlorobromide |
| o-Dichlorobenzene | 4-Methylcyclohexanol | Tripropylene Glycol* |
| Dichloroethyl Ether | Methylene Bromide | Water |
| Methylene Chlorobromide* | Methylene Chloride* | |

* Available from Dow (Temp. = 75°F)

(continued)

Table 11.71: (continued)

Liquids Insoluble or Partly Soluble in the Liquid Polyethylene Glycols

| | Approximate Solubility, Volume Percent | | | |
|---------------------------|-------------------------------------------|------|------|------|
| | E200 | E300 | E400 | E600 |
| n-Butyl Stearate | Ins. | Ins. | Ins. | Ins. |
| Butyraldehyde | Ins. | Ins. | Ins. | Ins. |
| Carbon Disulfide | 10% | 10% | 10% | 25% |
| Carbon Tetrachloride* | 40% | 45% | Sol. | Sol. |
| Castor Oil | Ins. | Ins. | Ins. | Ins. |
| Cod Liver Oil | Ins. | Ins. | Ins. | Ins. |
| Cottonseed Oil | Ins. | Ins. | Ins. | Ins. |
| Cyclohexane | Ins. | Ins. | Ins. | Ins. |
| Decahydronaphthalene | Ins. | Ins. | Ins. | Ins. |
| Diamylnaphthalene | Ins. | Ins. | Ins. | Ins. |
| Dibutyl Sebacate | Ins. | Ins. | Ins. | Ins. |
| Diethylbenzene* | Ins. | Ins. | 10% | 25% |
| Diethyl Ether | 25% | 25% | 25% | 25% |
| Diisopropylbenzene | Ins. | Ins. | Ins. | Ins. |
| Dodecyl Alcohol | Ins. | Ins. | Ins. | Ins. |
| Ethylbenzene* | 10% | 35% | 75% | Sol. |
| Ethylcyclohexane | Ins. | Ins. | Ins. | Ins. |
| Gasoline | Ins. | Ins. | Ins. | Ins. |
| Isopropylbenzene | Ins. | 25% | 35% | Sol. |
| Isopropyl Chloride | 25% | 55% | Sol. | Sol. |
| Kerosene | Ins. | Ins. | Ins. | Ins. |
| Lard Oil | Ins. | Ins. | Ins. | Sol. |
| Lemon Oil | Ins. | Ins. | Ins. | Ins. |
| Methyl Laurate | Ins. | Ins. | Ins. | Ins. |
| alpha-Methylstyrene | 35% | Sol. | Sol. | Sol. |
| Olive Oil | Ins. | 2% | 10% | 30% |
| Orange Oil | Ins. | Ins. | Ins. | Ins. |
| Pentachlorodiphenyl Oxide | Ins. | Sol. | Sol. | Sol. |
| Perchloroethylene* | Ins. | Ins. | 10% | 25% |
| Ricinoleic Acid | Ins. | Ins. | Ins. | Ins. |
| Soya Oil | Ins. | Ins. | Ins. | Ins. |
| Sperm Oil | Ins. | Ins. | Ins. | 1% |
| Tetrahydronaphthalene | 10% | 25% | 45% | Sol. |
| Tributyl Aconitate | Ins. | Ins. | Ins. | 10% |
| Triethylbenzene | Ins. | Ins. | Ins. | Ins. |
| Xylene | 10% | 35% | 65% | Sol. |

Sol. - Soluble in all proportions
Ins. - Insoluble
(Temp. = 75°F)

* Available from Dow

Solubility of Polyethylene Glycols in Various Solvents

| | E200 | E300 | E400 | E600 | E1000 | E1450 | E3350 | E4500 | E8000 |
|-----------|------|------|------|------|-------|-------|-------|-------|-------|
| Acetone | ∞ | ∞ | ∞ | ∞ | >100 | 60 | <0.1 | <0.1 | <0.1 |
| Benzene | ∞ | ∞ | ∞ | ∞ | >100 | 64 | 32 | 38 | 12 |
| Ether | 11.0 | 7.0 | 5 | 4 | 4 | <0.1 | <0.1 | <0.1 | <0.1 |
| n-Heptane | <1 | <1 | <1 | <1 | 1 | <0.1 | <0.1 | <0.1 | <0.1 |
| Methanol | ∞ | ∞ | ∞ | ∞ | >100 | >100 | 28 | 38 | 10 |
| Water | ∞ | ∞ | ∞ | ∞ | >100 | >100 | >100 | >100 | >100 |

(approximate, grams per 100 grams solvent at 25°C)

Effect of Polyethylene Glycols on Styrene-Butadiene Rubber*


| Polyglycol | % Average Dimension Change |
|------------|----------------------------|
| E200 | -0.18 |
| E300 | -0.18 |
| E400 | -0.18 |
| E600 | -0.27 |
| E1000 | -0.73 |
| E1450 | -0.55 |
| E3350 | -0.55 |
| E4500 | -0.73 |
| E8000 | -0.55 |

* Materials Styrene-Butadiene Rubber (SBR) Brake Cups - Wheel Cylinder, Part Number RM3, used for rubber swell tests. Tests carried out according to SAE procedures defined by SAE hydraulic brake fluid specification J1703a (120 hours at 158°F)


(continued)

Table 11.71: (continued)

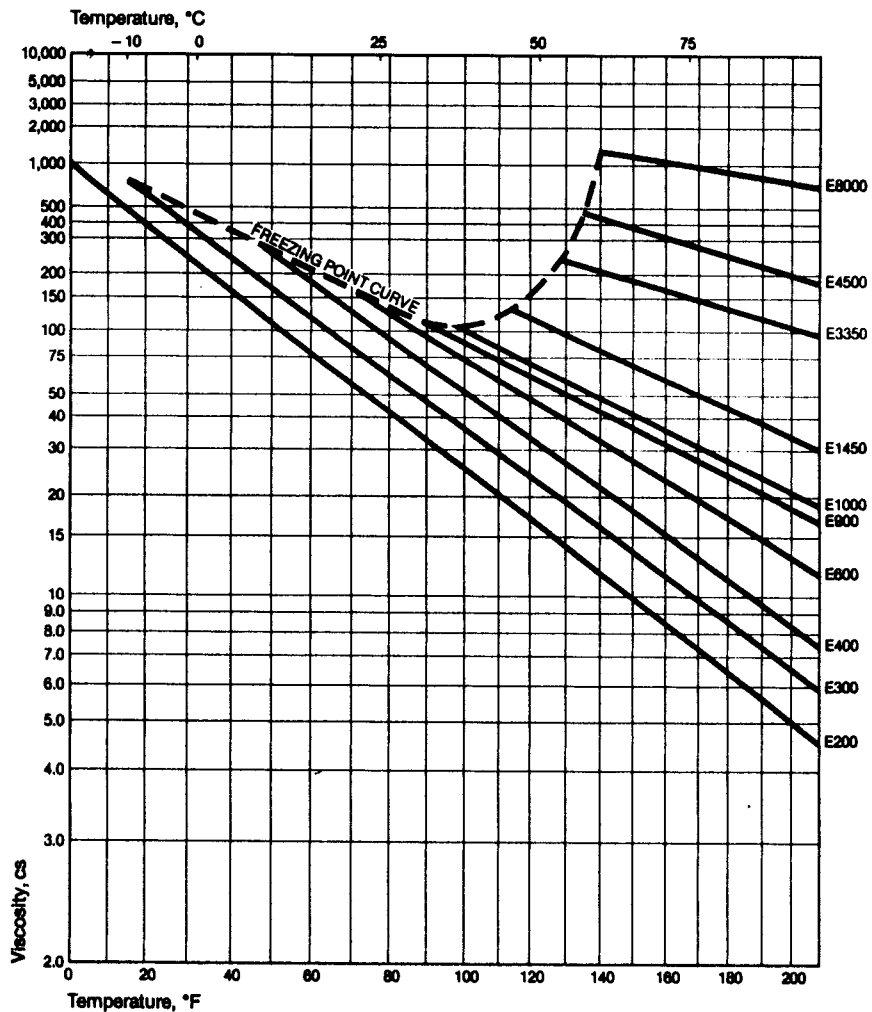Viscosity vs. Temperature For Dow Polyethylene Glycols



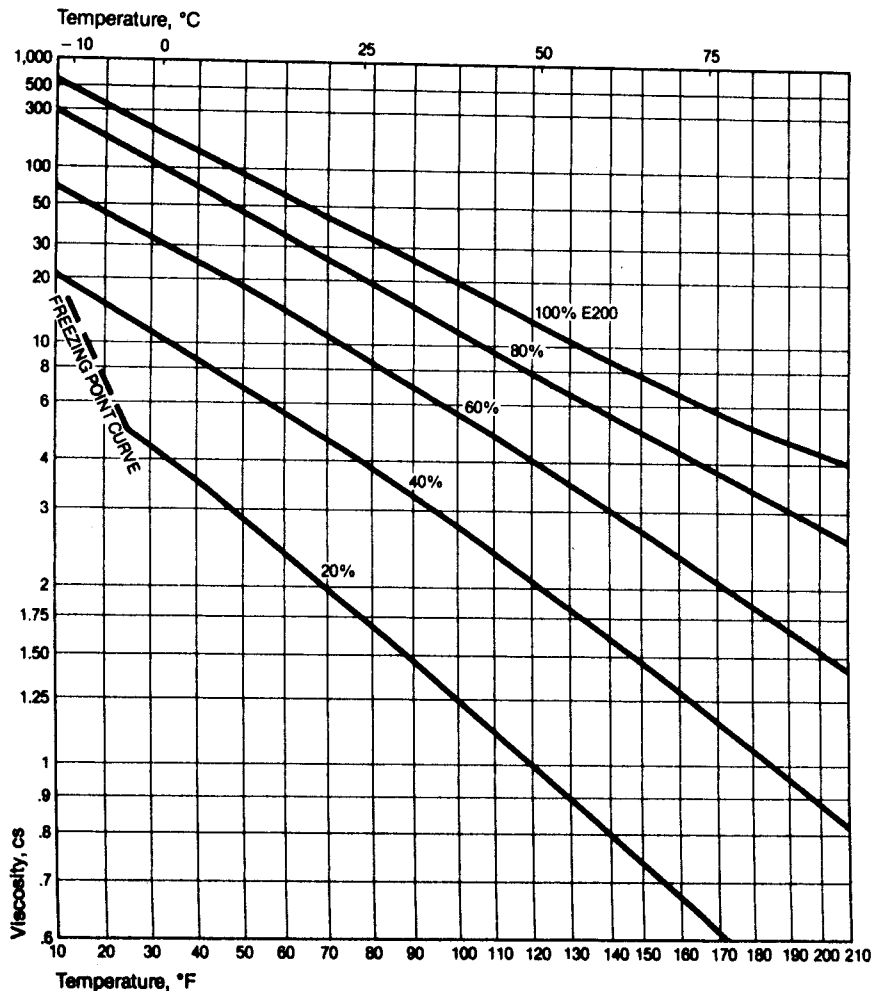
Viscosity of Aqueous Polyglycol E200 Solutions




(continued)

Table 11.71: (continued)

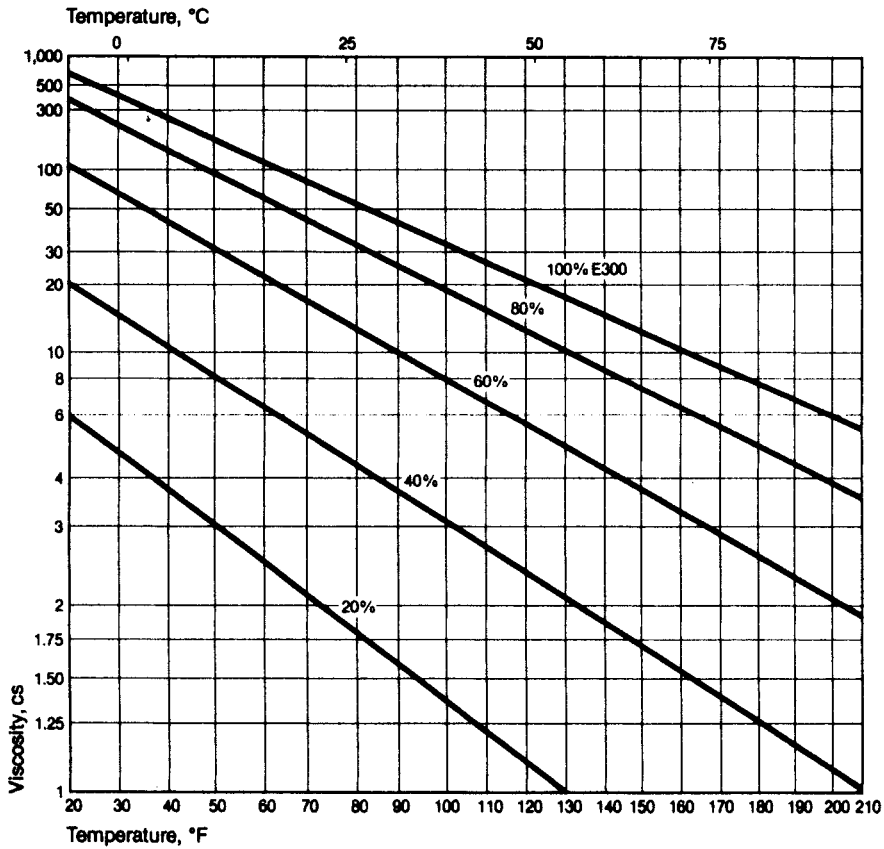Viscosity of Aqueous Polyglycol E300 Solutions



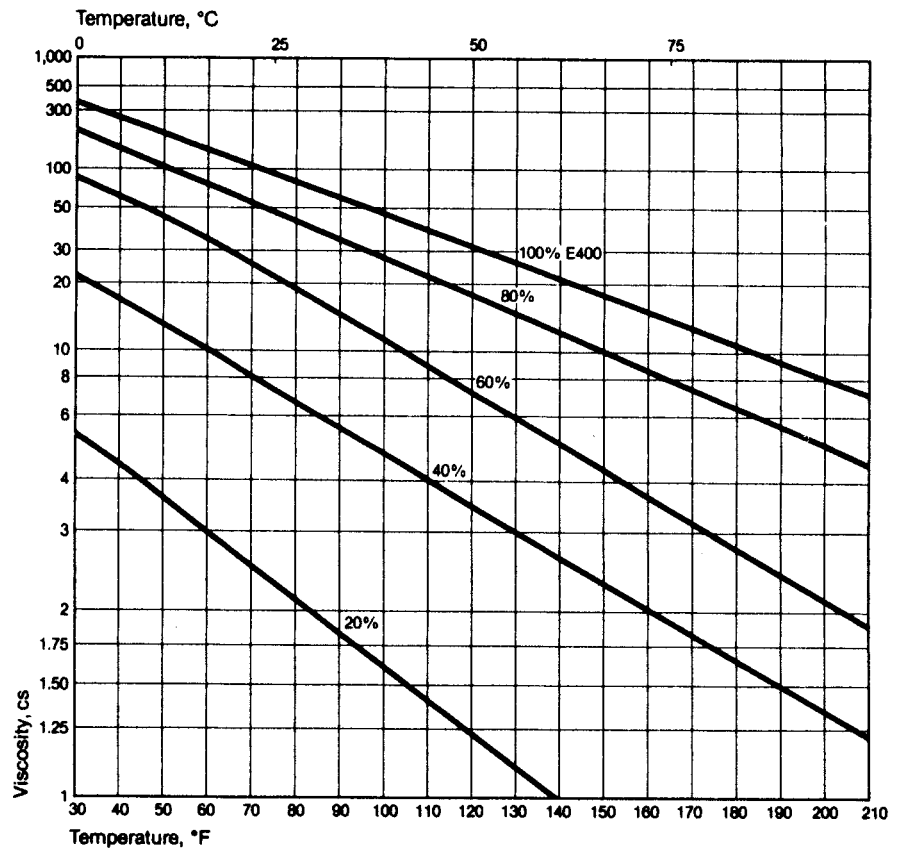
Viscosity of Aqueous Polyglycol E400 Solutions



(continued)

Table 11.71: (continued)

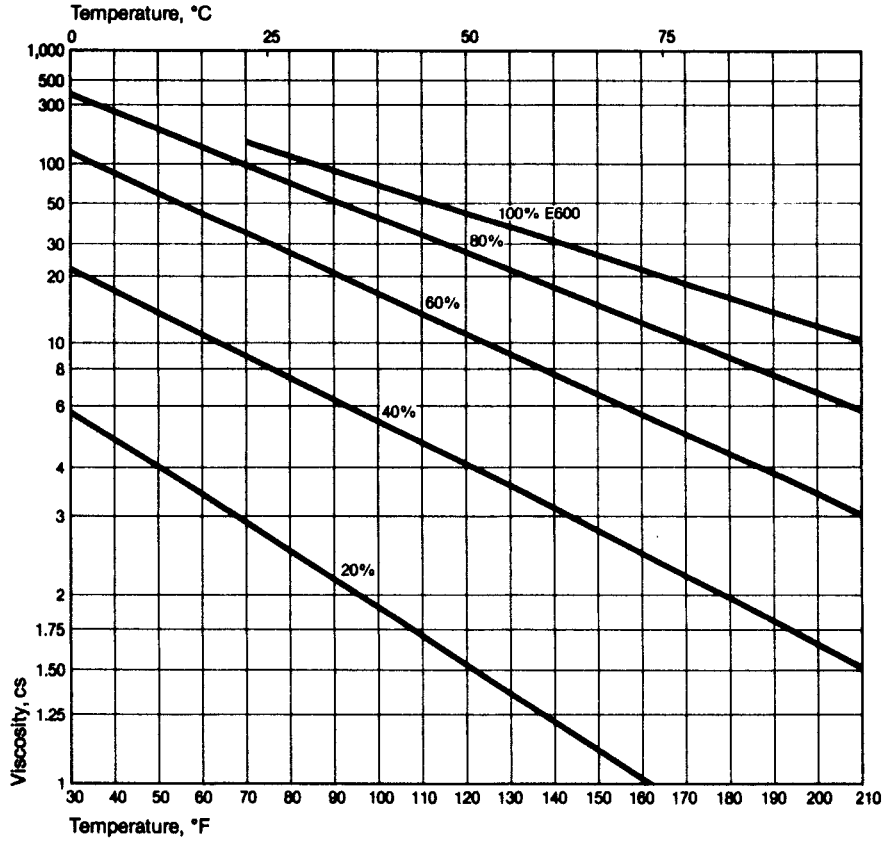Viscosity of Aqueous Polyglycol E600 Solutions



Viscosity of Aqueous Polyglycol E900 Solutions



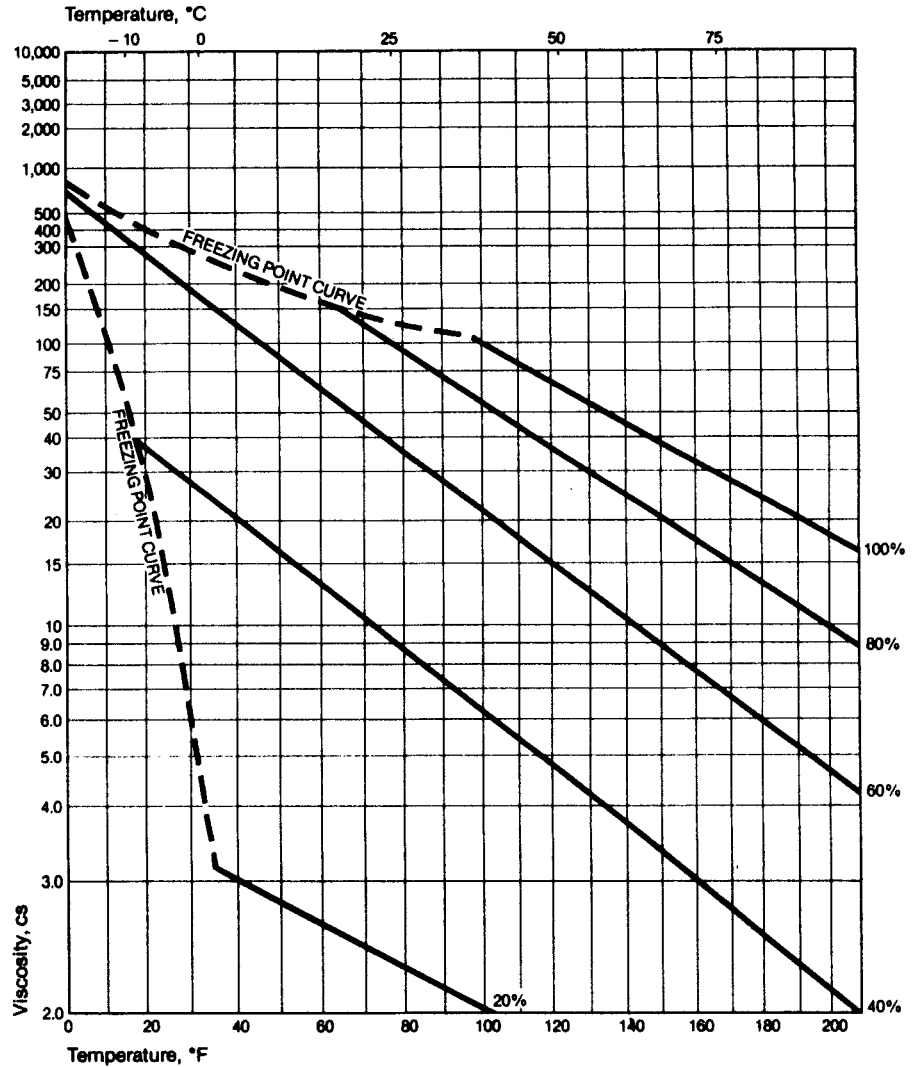


Table 11.71: (continued)

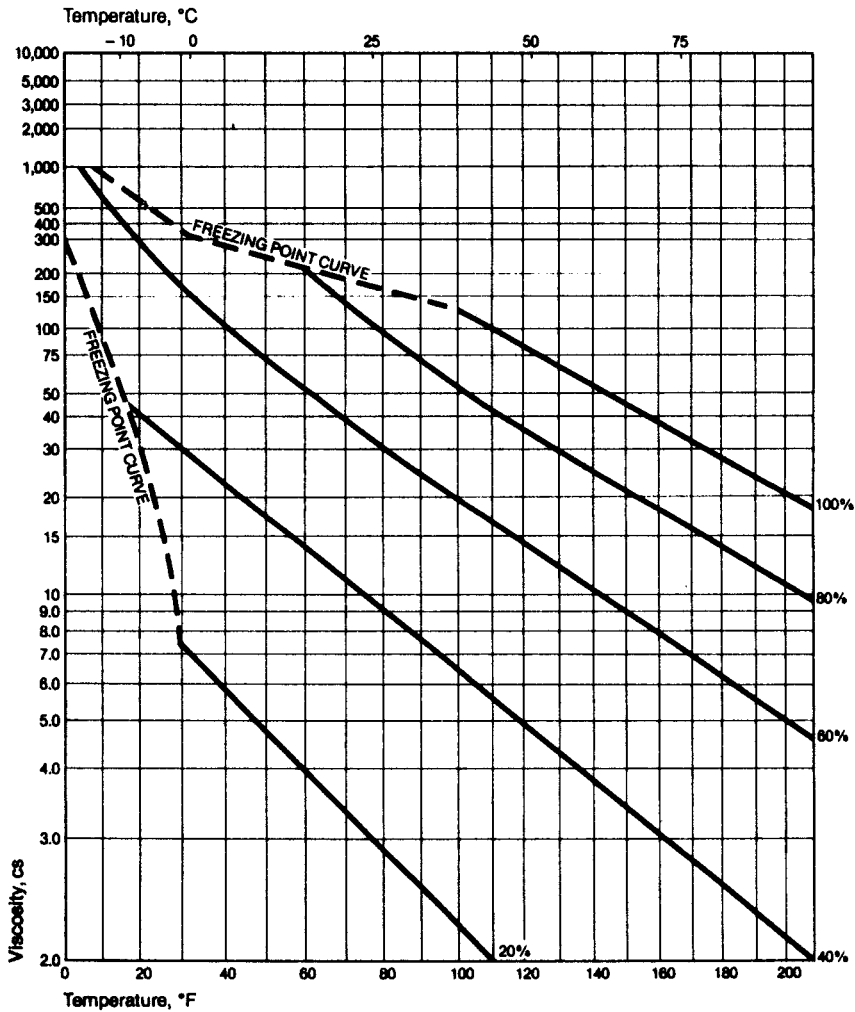Viscosity of Aqueous Polyglycol E1000 Solutions



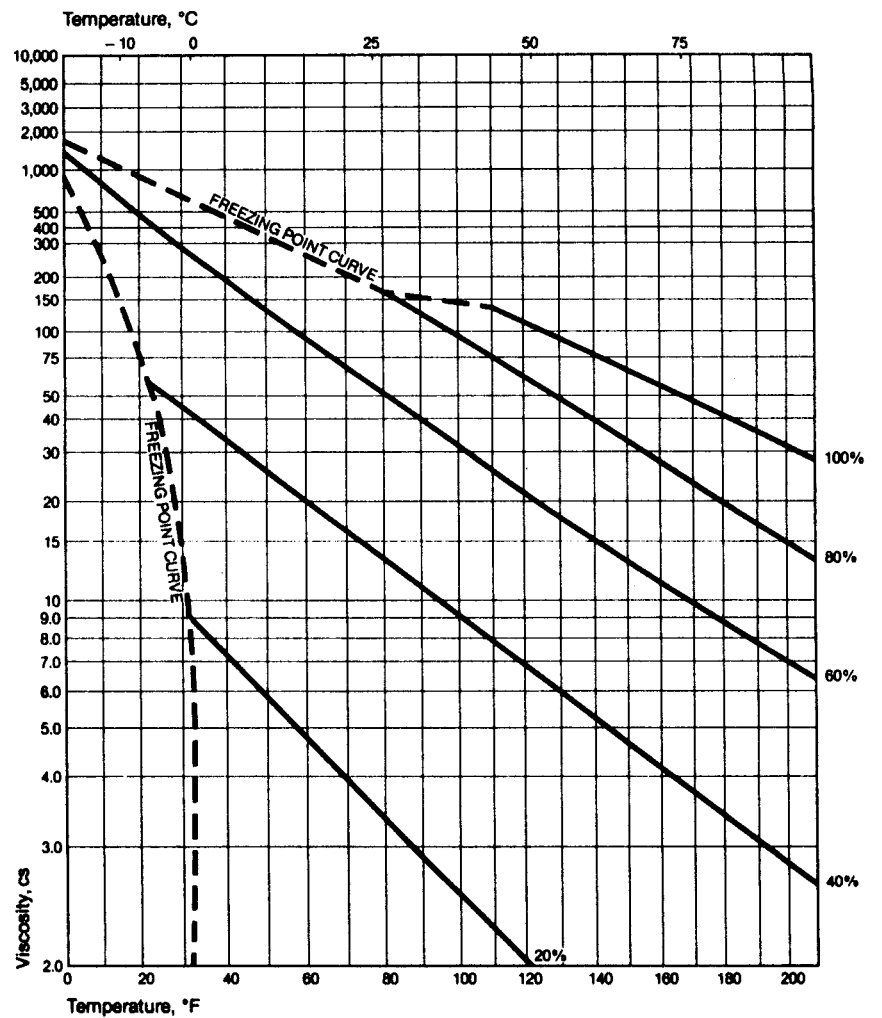
Viscosity of Aqueous Polyglycol E1450 Solutions




(continued)

Table 11.71: (continued)

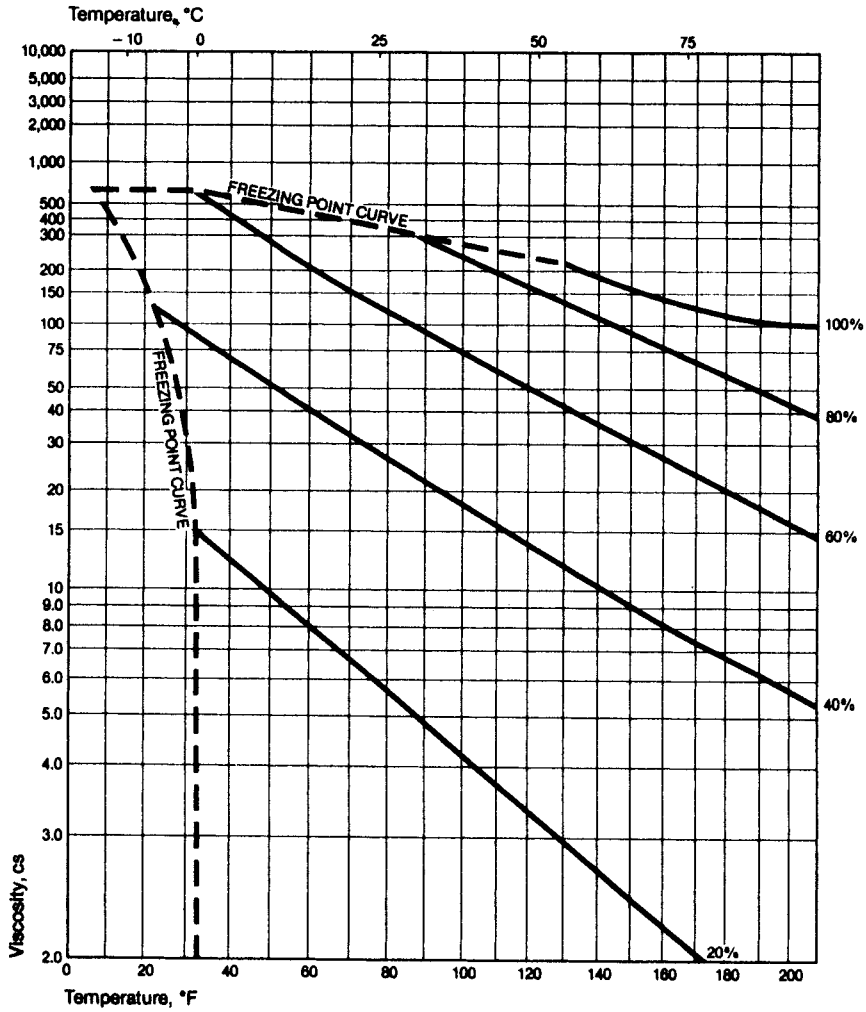Viscosity of Aqueous Polyglycol E3350 Solutions



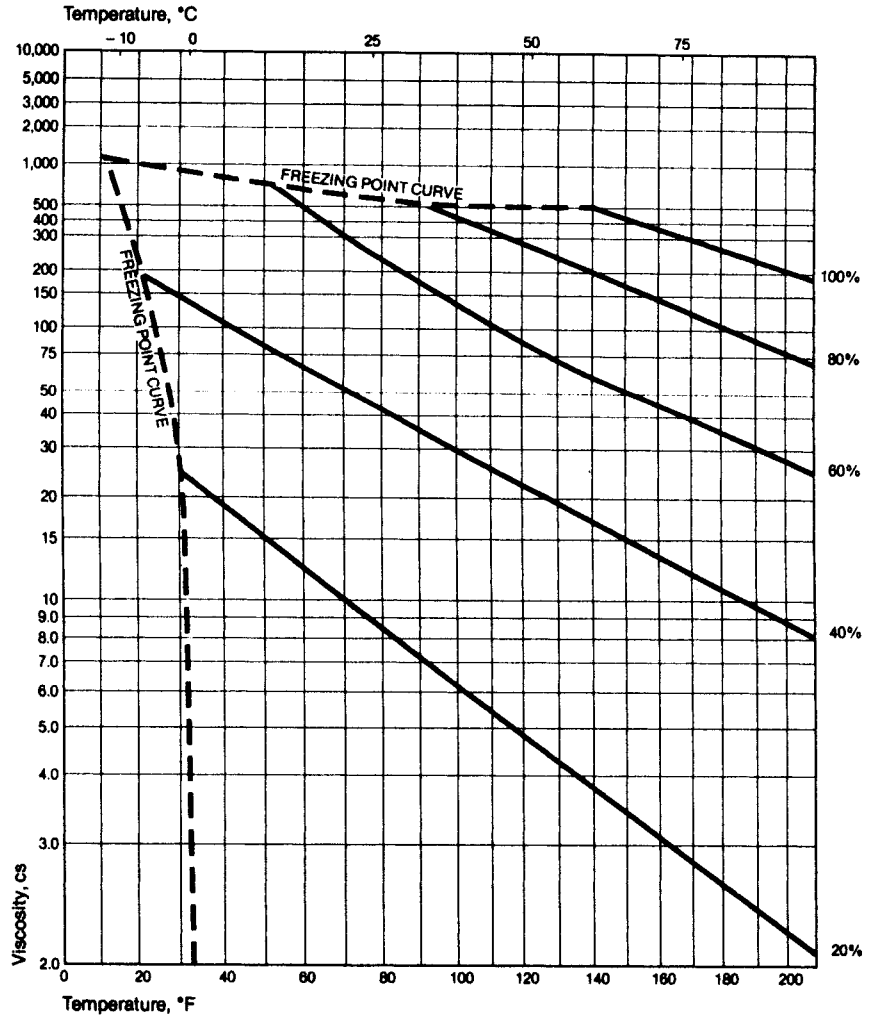
Viscosity of Aqueous Polyglycol E4500 Solutions




(continued)

Table 11.71: (continued)

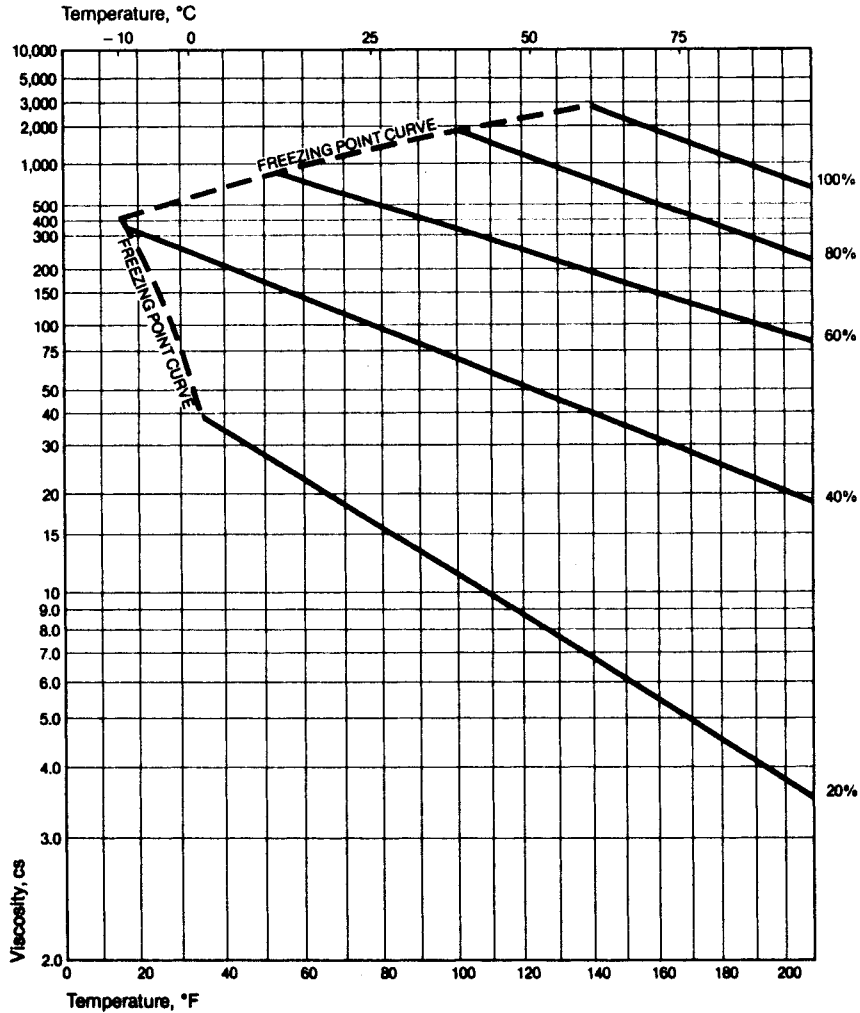Viscosity of Aqueous Polyglycol E8000 Solutions




Viscosity of E300/E1450 Blends

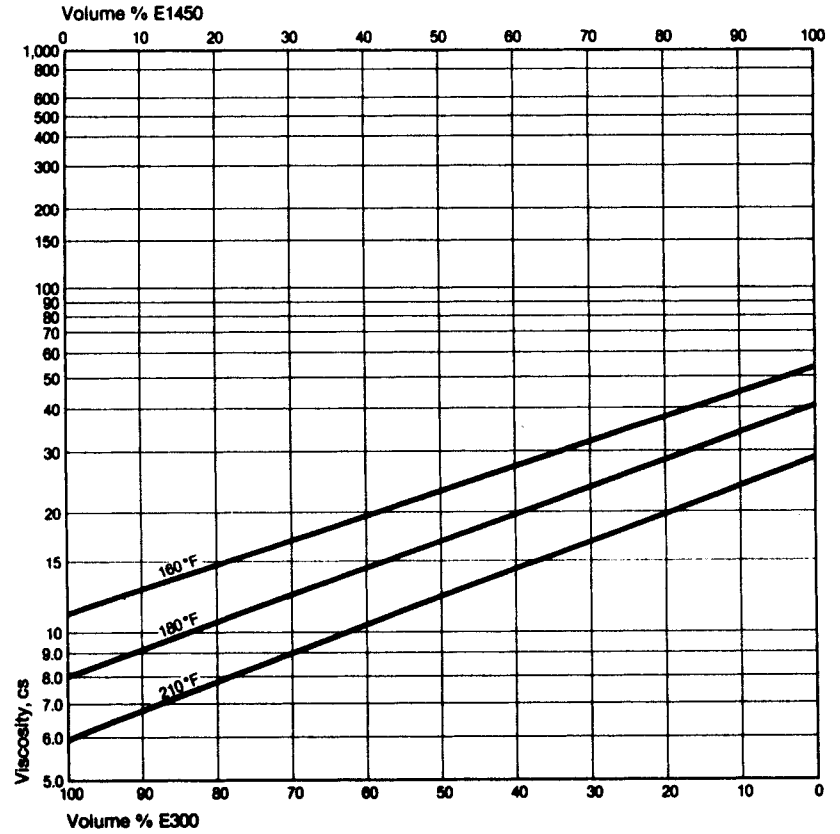


(continued)

Table 11.71: (continued)

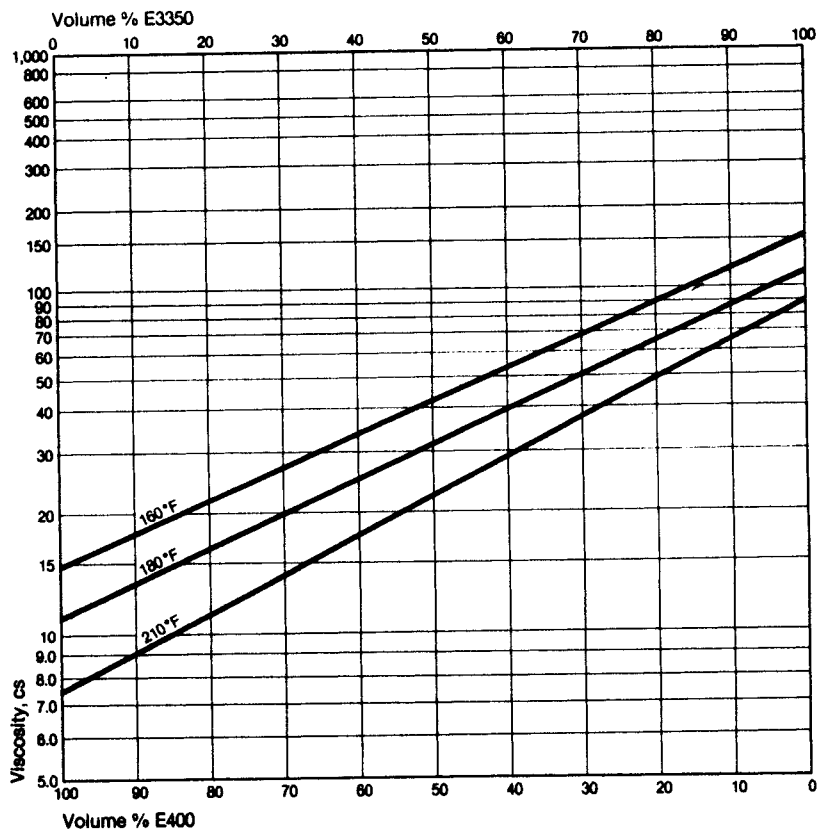Viscosity of E400/E3350 Blends




Viscosity of E300/E8000 Blends

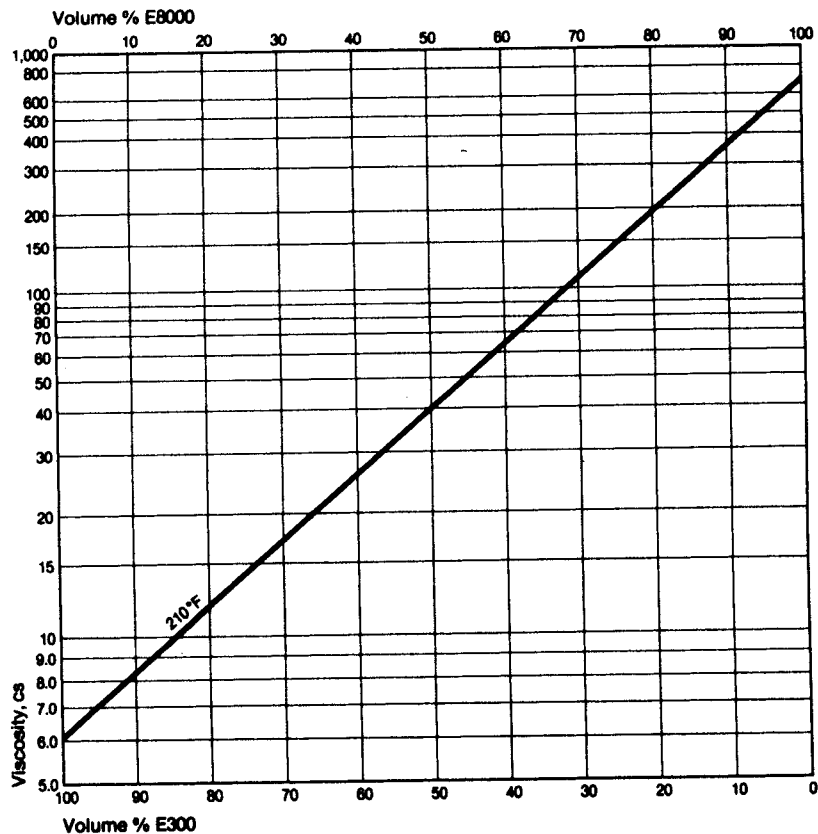


(continued)

Table 11.71: (continued)

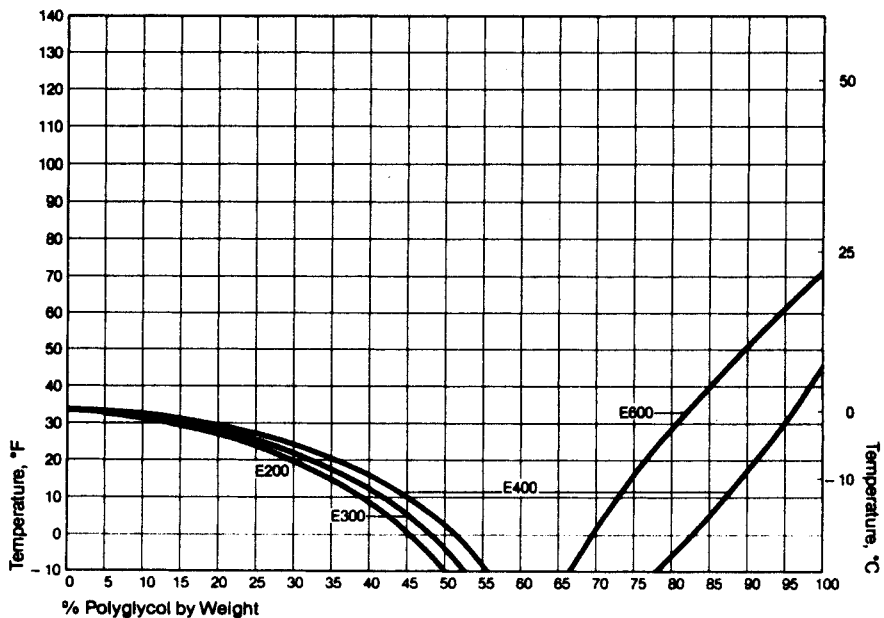Freezing Points — E200, E300, E400, E600 Aqueous Solutions



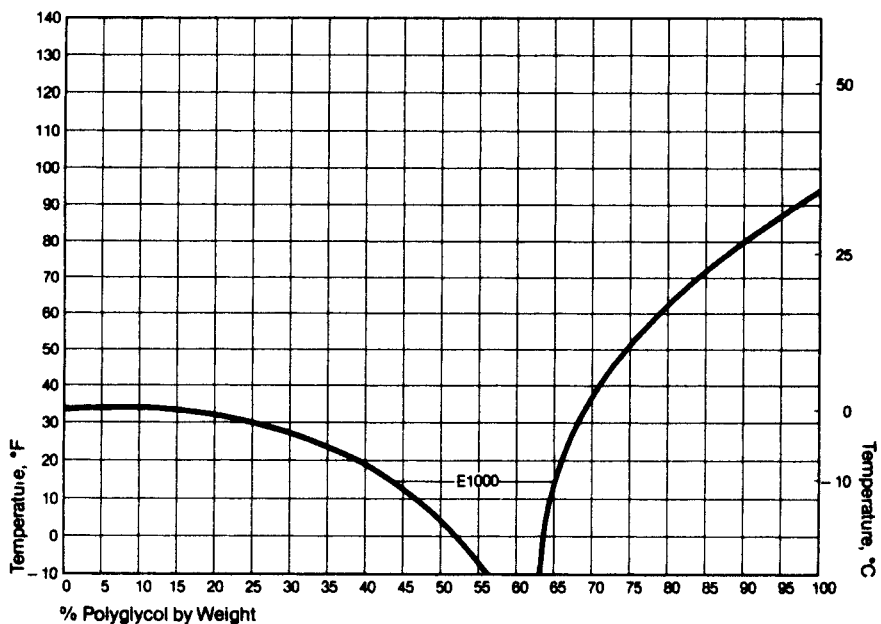
Freezing Points — E1000 Aqueous Solutions




(continued)

Table 11.71: (continued)

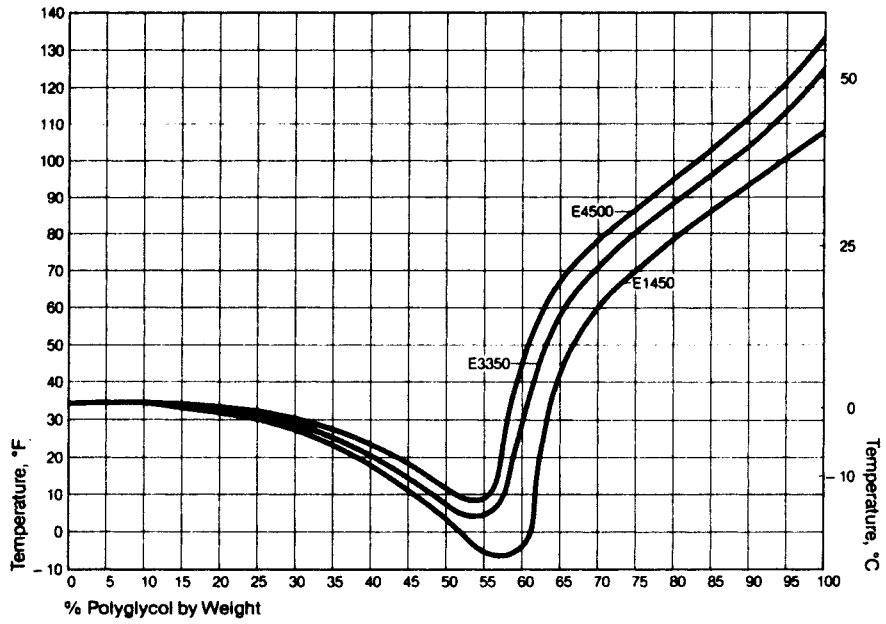Freezing Points — E1450, E3350, E4500 Aqueous Solutions



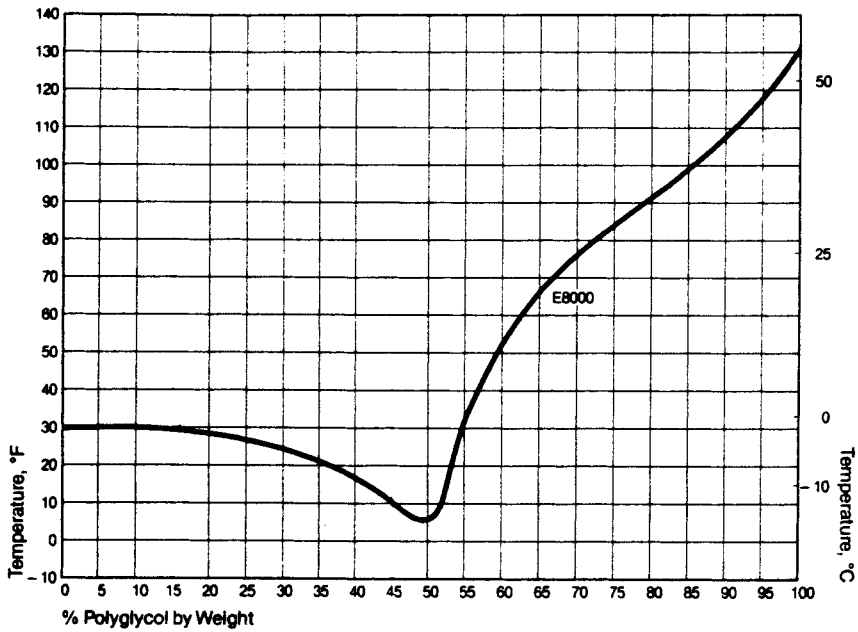
Freezing Point — E8000 Aqueous Solutions




(continued)

Table 11.71: (continued)

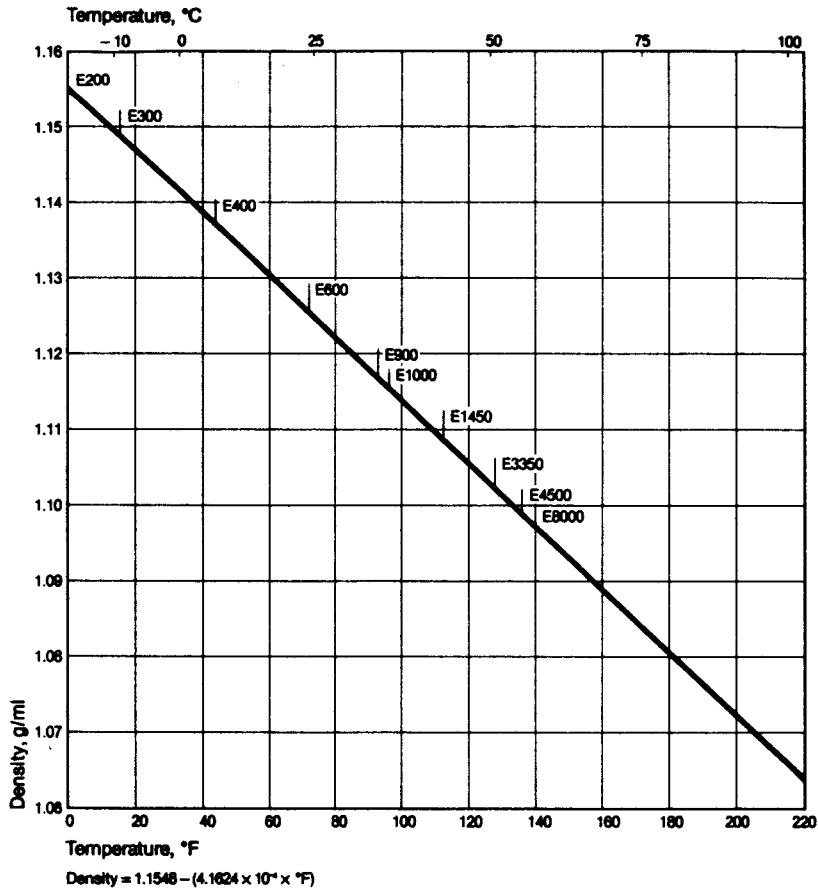**Polyethylene Glycols
Densities vs. Temperature Above Their Freezing Point**



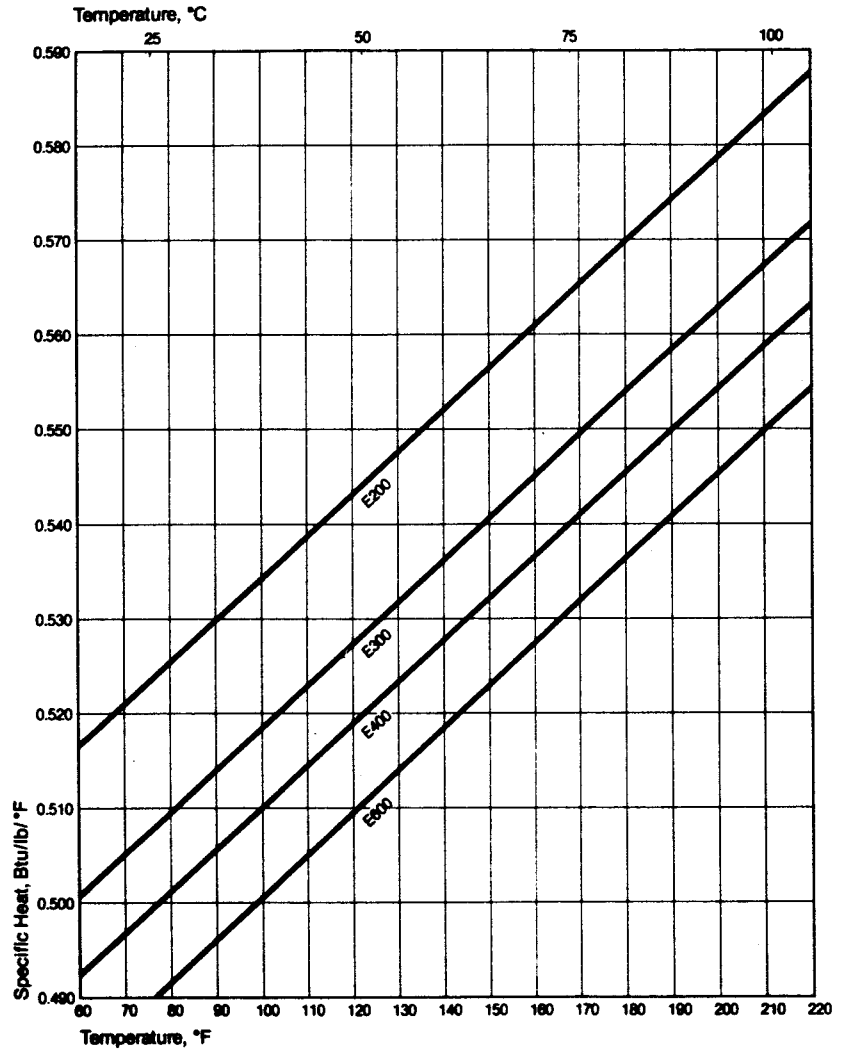
Specific Heats of Liquid Polyethylene Glycols



(continued)

Table 11.71: (continued)

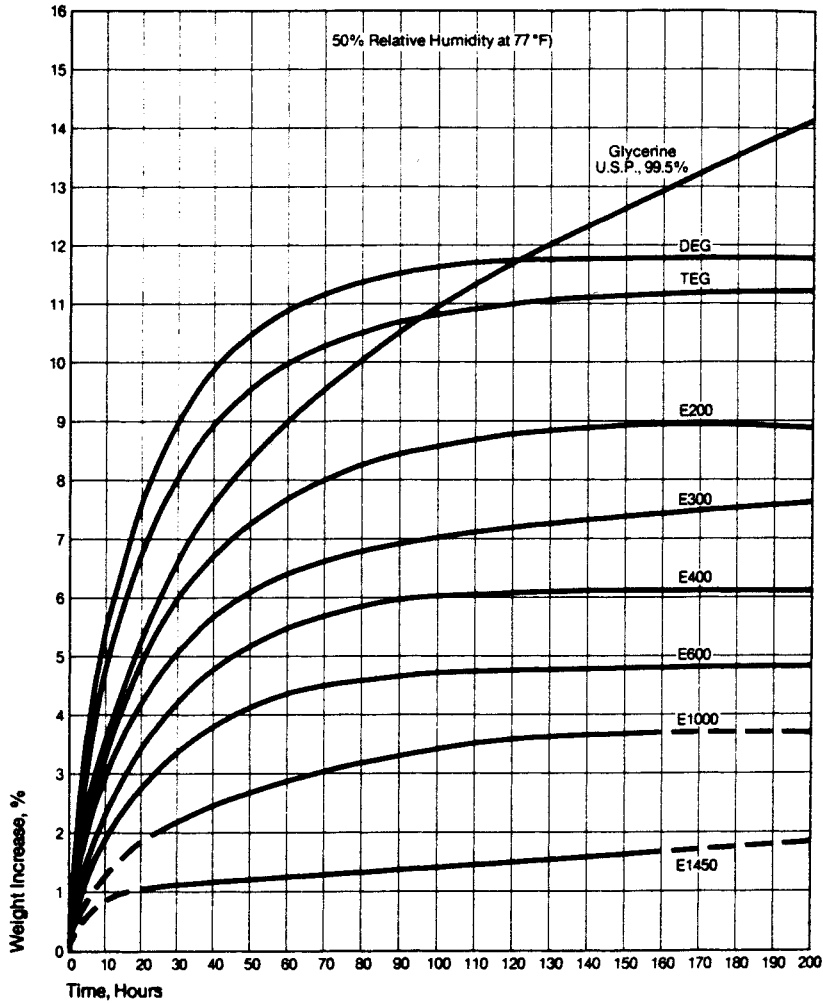Comparative Hygroscopicities



POLYPROPYLENE GLYCOLS

Table 11.72: Ashland Polypropylene Glycols (69)

| Product | Specific Gravity 20°/20°C | Lb/Gal at 20°C | Average Molecular Weight | Pt-Co Color | Centipoise at 20°C |
|---------------------------|------------------------------|----------------------|--------------------------------|----------------|-----------------------|
| Polypropylene Glycol 150 | 1.025 | 8.54 | 150 | 35 | 82(20°C) |
| Polypropylene Glycol 425 | 1.008 | 8.42 | 425 | 100 | 80 |
| Polypropylene Glycol 1025 | 1.005 | 8.39 | 1000 | 25 | 150 |
| Polypropylene Glycol 2025 | 1.005 | 8.39 | 2000 | 75 | 300 |
| Polypropylene Glycol 4000 | 1.004 | 8.36 | 4000 | 75 | 900 |

*Pensky-Martens
(a) Density @ 80 C

Table 11.73: Dow Polypropylene Glycols and Polyglycol Copolymers (23)

| Polypropylene Glycols P-Series | Average Molecular Weight | Average Freezing Point, °C | Average Viscosity, Centistokes | | | | Flash Point PMCC, °F | Refractive Index at 25°C | Specific Gravity 25/25°C | Density Lbs/Gal at 25°C | Viscosity Index | Specific Heat Cal/g/°C at 25°C | CTFA ¹ Nomenclature | |
|--------------------------------|--------------------------|----------------------------|--------------------------------|-------|-------|-------|----------------------|--------------------------|--------------------------|-------------------------|-----------------|--------------------------------|--------------------------------|-----------------------|
| | | | 32°F | 77°F | 100°F | 210°F | | | | | | | | |
| CAS# | | | | | | | | | | | | | | |
| 29434-03-5 | P425 | 425 | - 45* | 500 | 70 | 33 | 4.6 | 330 | 1.447 | 1.007 | 8.39 | — | 0.477 | PPG-9 |
| | P1200 | 1200 | - 40* | 1130 | 175 | 91 | 13.5 | 345 | 1.448 | 1.007 | 8.38 | 161 | 0.459 | PPG-20 |
| | P2000 | 2000 | - 30* | 1400 | 300 | 160 | 23 | 390 | 1.449 | 1.002 | 8.34 | 183 | 0.452 | PPG-26 |
| | P4000 | 4000 | - 26* | 4000 | 800 | 455 | 53 | 365 | 1.450 | 1.005 | 8.36 | 191 | — | PPG-30 |
| Polypropylene Glycols L-Series | | | | | | | | | | | | | | |
| CAS# | | | | | | | | | | | | | PPG-14 | |
| 9003-13-8 | L910 | 910 | - 43* | 356 | 83 | 43 | 8 | 345 | 1.444 | 0.9833 | 8.23 | 181 | — | Butyl Ether |
| | L1150 | 1150 | - 40* | 590 | 115 | 57 | 11 | > 400 | 1.446 | 0.9888 | 8.28 | 177 | — | PPG-18 Butyl Ether |
| Polyglycol Copolymers | | | | | | | | | | | | | | |
| CAS# | | | | | | | | | | | | | PPG-24 | |
| 51258-15-2 | 15-200 | 2600 | - 40* | 2060 | 420 | 206 | 32 | > 450 | 1.460 | 1.060 | 8.81 | 200 | 0.470 | Glycereth-24 |
| CAS# | | | | | | | | | | | | | PPG-66 | |
| 9082-00-2 | 112-2 | 4900 | - 18* | 20000 | 1000 | 445 | 60 | 455 | 1.455 | 1.028 | 8.56 | 200 | 0.430 | Glycereth-12 |
| CAS# | | | | | | | | | | | | | Poloxamer-181 | |
| 53637-25-5 | EP530 | 2000 | - 32* | 1450 | 321 | 168 | 25 | > 420 | 1.452 | 1.017 | 8.46 | 192 | — | 181 |

a Designates properties not applicable for solids

b At 50°

* Pour Point

¹ Cosmetic, Toiletry and Fragrance Association

Solubility of Additional Liquids in Polypropylene Glycols

| | Approximate Solubility, Volume % | | | |
|---------------------|----------------------------------|-------|-------|-------|
| | P425 | P1200 | P2000 | P4000 |
| Diethanolamine* | Sol. | < 1 | < 1 | < 1 |
| Diethylene Glycol* | Sol. | 10% | 10% | 10% |
| Ethylene Glycol* | Sol. | 8% | < 1 | < 1 |
| Glycerine* | < 1 | < 1 | < 1 | < 1 |
| Oleic Acid | < 1 | Sol. | Sol. | Sol. |
| Polyglycol E200* | Sol. | Sol. | 9% | < 1 |
| Polyglycol E400* | Sol. | Sol. | < 1 | 3% |
| Polyglycol E600* | Sol. | Sol. | < 1 | < 1 |
| Propylene Glycol* | Sol. | Sol. | 10% | 5% |
| Sperm Oil | 20% | Sol. | Sol. | Sol. |
| Triethanolamine* | Sol. | < 1 | < 1 | < 1 |
| Triethylene Glycol* | Sol. | Sol. | 9% | 9% |

Sol. = Soluble in all proportions

*Product of The Dow Chemical Company

(Temp. = 77°F)

(continued)

Table 11.73: (continued)

Liquids Soluble in All Proportions with Polyglycols P425, P1200, P2000 and P4000

| | | |
|------------------------|-----------------------------|----------------------------|
| Acetaldehyde | Dichloroethyl Ether | Methyl Laurate |
| Acetic Acid (glacial) | Dichloroisopropyl Ether | Methyl Salicylate* |
| Acetic Anhydride | Diethylbenzene* | a-Methylstyrene |
| Acetone* | Diethyl Ether | Morpholine* |
| Acetylene Tetrabromide | Diisopropylbenzene | Nitrobenzene |
| Allyl Alcohol | 1,4-Dioxane* | Nitroethane |
| Allyl Bromide | Diphenyl Oxide* | Nitromethane |
| Amyl Acetate | Dipropylene Glycol* | 1-Nitropropane |
| Amyl Alcohol | Dodecyl Alcohol | 2-Nitropropane |
| tert-Amyl Alcohol | Ethanol (95%) | Octyl Alcohol |
| Aniline | Ether | Olive Oil |
| Benzaldehyde | Ethyl Acetate | Orange Oil |
| Benzene | Ethylbenzene* | Paraldehyde |
| Benzyl Alcohol | Ethyl Bromide | Pentachlorodiphenyl Oxide |
| Bromobenzene | Ethyl Chloroacetate | Perchloroethylene* |
| Bromocyclohexane | Ethyl Cyanoacetate | Phenyl Ethyl Acetate |
| Bromoform | Ethylcyclohexane | Phenyl Ethyl Alcohol |
| n-Butyl Acetate | Ethyl Lactate | Phenetole |
| n-Butyl Bromide | Ethylene Chlorohydrin | Phenyl Acetate |
| n-Butyl Lactate | Ethylene Dibromide* | 4-Phenyl-m-dioxane |
| n-Butyl Phosphate | Ethylene Dichloride* | Pine Needle Oil |
| n-Butyraldehyde | Ethylidene Dichloride | Piperidine |
| Butyl Stearate | Furfural | Propyl Alcohol |
| Caproic Acid | n-Heptane | Propylene Dibromide |
| Carbon Bisulfide | Hydrochloric Acid (23°Be.)* | Propylene Dichloride* |
| Carbon Tetrachloride* | Isophorone | Pyridine |
| Castor Oil | Isopropyl Alcohol (99%) | Ricinoleic Acid |
| o-Chloroaniline | Isopropylbenzene | Soya Oil |
| Chloroform* | Isopropyl Bromide | Styrene Oxide |
| o-Chlorophenol | Isopropyl Chloride | Tetrachloroethane |
| Cod Liver Oil | Lactic Acid (85%) | Tetrahydrofurfuryl Alcohol |
| Cottonseed Oil | Lard Oil | Tetrahydronaphthalene |
| Cresol† | Lemon Oil | Triacetin |
| Cyclohexane | Mesityl Oxide | Tributyl Aconitate |
| Cyclohexanol | Methanol | 1,1,2-Trichloroethane* |
| Cyclohexanone | Methyl Chloroform* | Trichloroethylene* |
| Decahydroaphthalene | 4-Methylcyclohexanol | Triethylbenzene |
| Diacetone Alcohol | Methylene Bromide | Trimethylene Bromide |
| Diamylnaphthalene | Methylene Chloride* | Trimethylene Chlorobromide |
| Di-n-butylamine | Methylene Chlorobromide | Tripropylene Glycol* |
| Dibutyl Sebacate | Methyl Ethyl Ketone | Vinyl Cyanide |
| Dichloroacetic Acid | Methyl Formate | Xylene |
| o-Dichlorobenzene | Methyl Isobutyl Carbinol | |
| Dichlorodiphenyl Oxide | Methyl Isobutyl Ketone | |

*Product of The Dow Chemical Company

†Heat evolved on mixing

(Temp. = 77°F)

Solubility of Aliphatic Hydrocarbons in Polypropylene Glycols


| | Approximate Solubility, Volume % | | | | | | | |
|--------------------|----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | P425 | | P1200 | | P2000 | | P4000 | |
| | 77°F | 120°F | 77°F | 120°F | 77°F | 120°F | 77°F | 120°F |
| Hexane | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. |
| VM and P Naphtha | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. |
| No. 2 Fuel Oil | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. |
| Mineral Spirits | 35% | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. | |
| Hi Flash Naphtha | 30% | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. | Sol. |
| SAE 20 Lube Oil | 15% | 20% | 25% | Sol. | 30% | Sol. | 16% | 28% |
| Light Paraffin Oil | 5% | 10% | 20% | 40% | 25% | Sol. | 18% | 22% |
| Heavy Mineral Oil | 2% | 10% | 5% | 15% | 10% | 20% | 8% | 13% |

The solubility of aliphatic hydrocarbons in polyglycols P425, P1200, and P2000 diminishes with an increase in the chain length of the hydrocarbon.
Sol. = Soluble in all proportions


(continued)

Table 11.73: (continued)

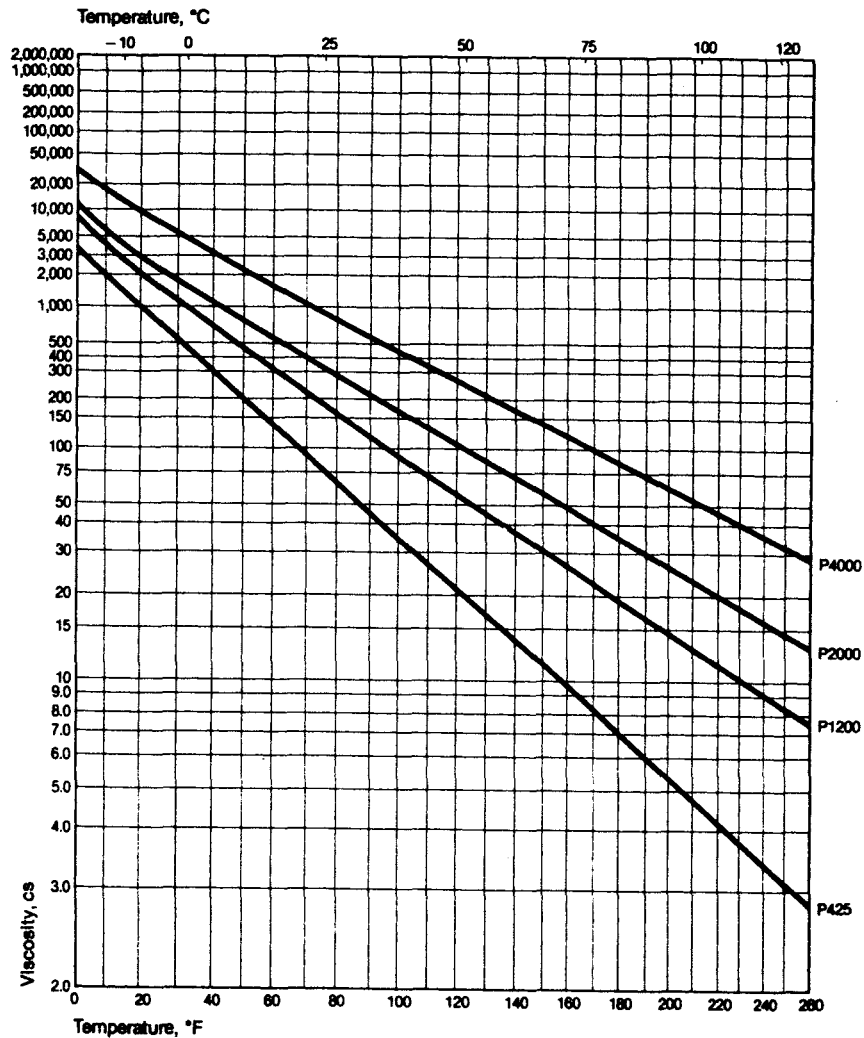Viscosity vs. Temperature For Polypropylene Glycols — P-Series



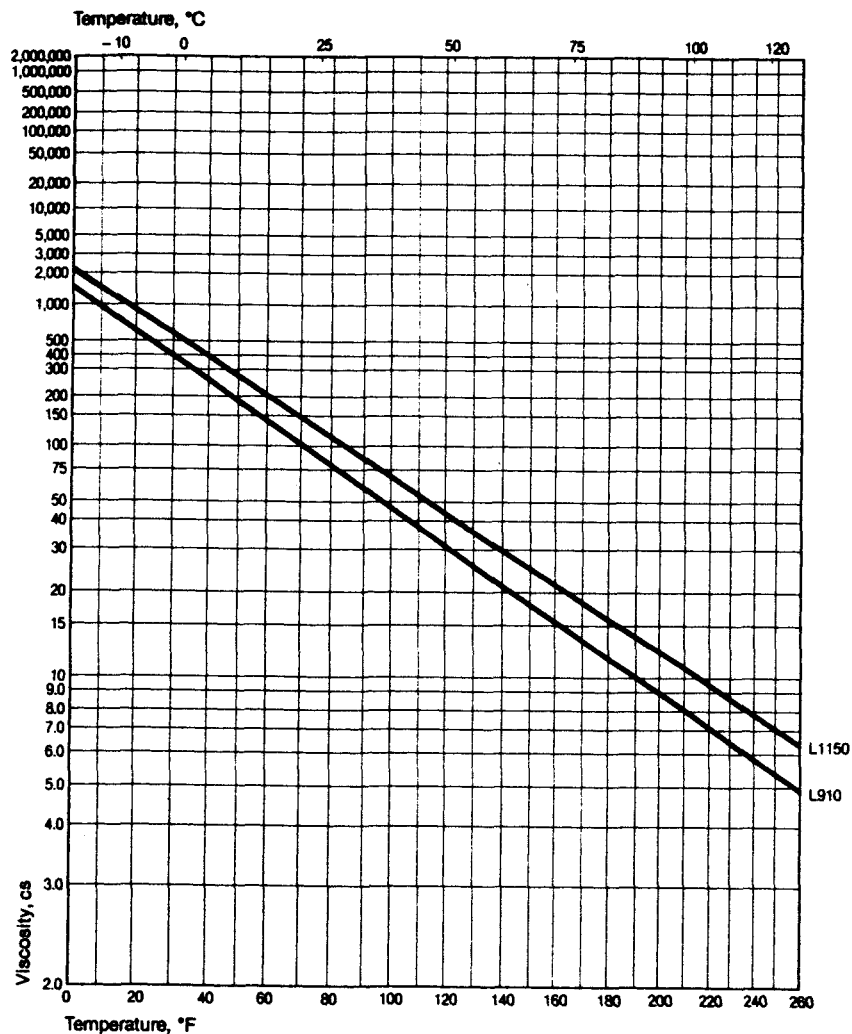
Viscosity vs. Temperature For Polypropylene Glycols — L-Series




(continued)

Table 11.73: (continued)

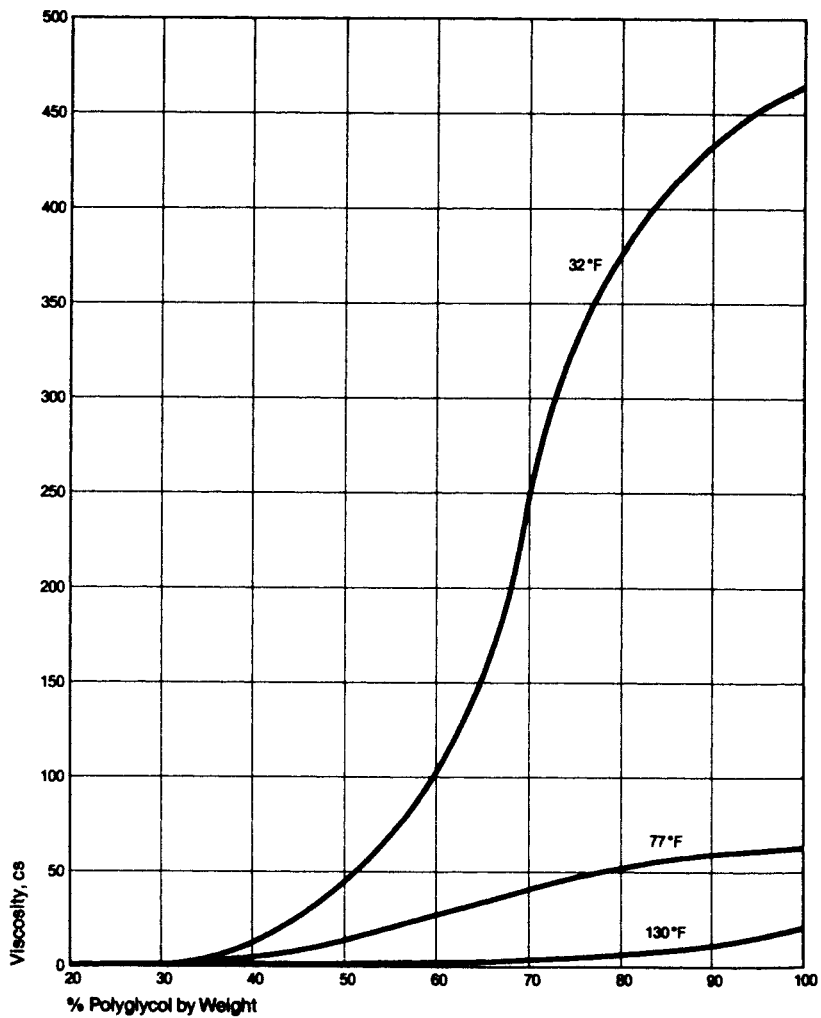Viscosity of Aqueous Solutions of Polyglycol P425



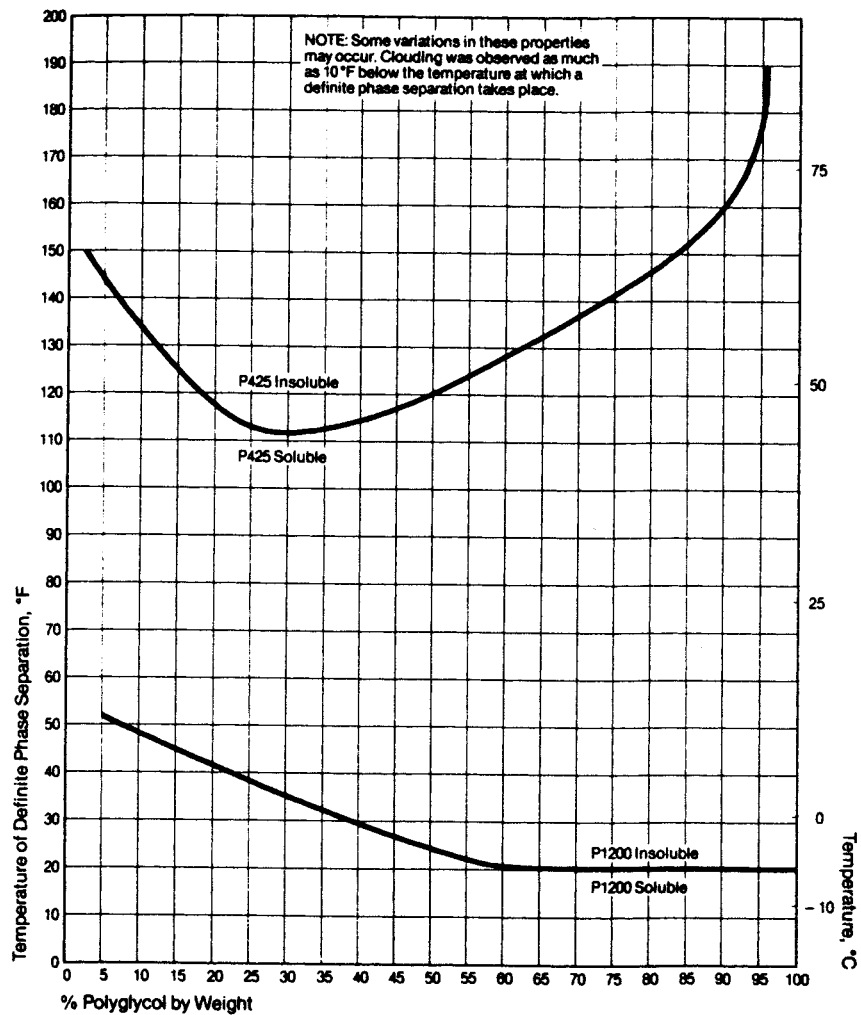
Water Solubility of Polypropylene Glycols P425 and P1200




(continued)

Table 11.73: (continued)

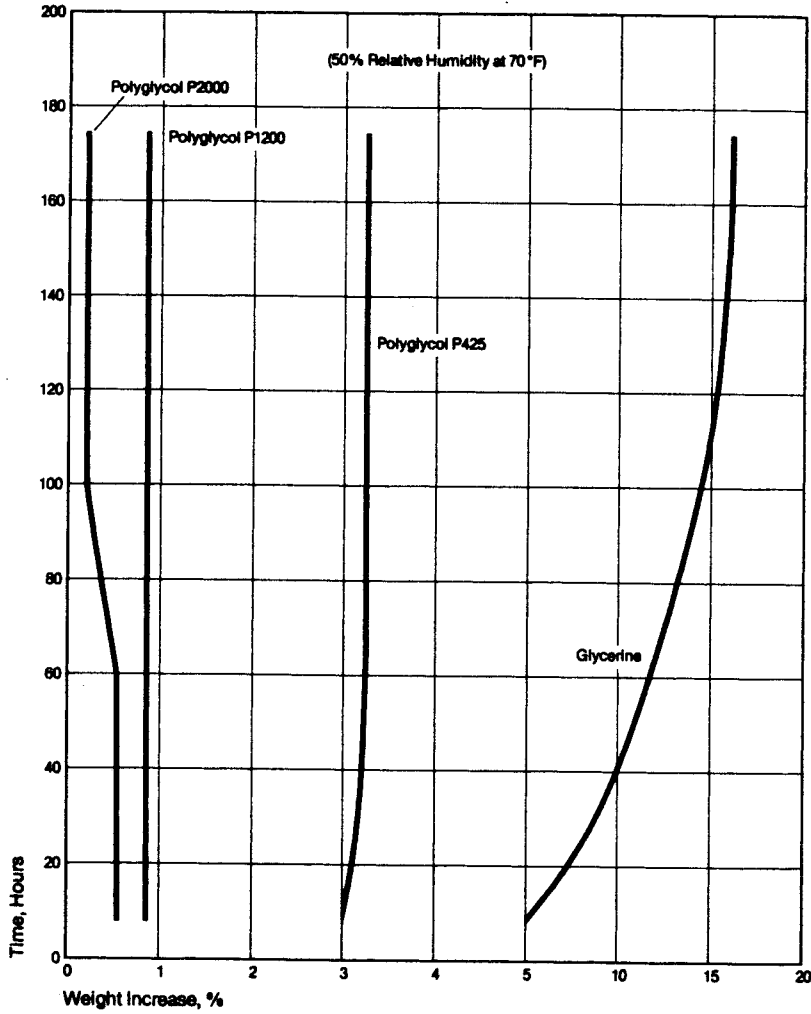Comparative Hygroscopicity of P-Series Polypropylene Glycols and Glycerine



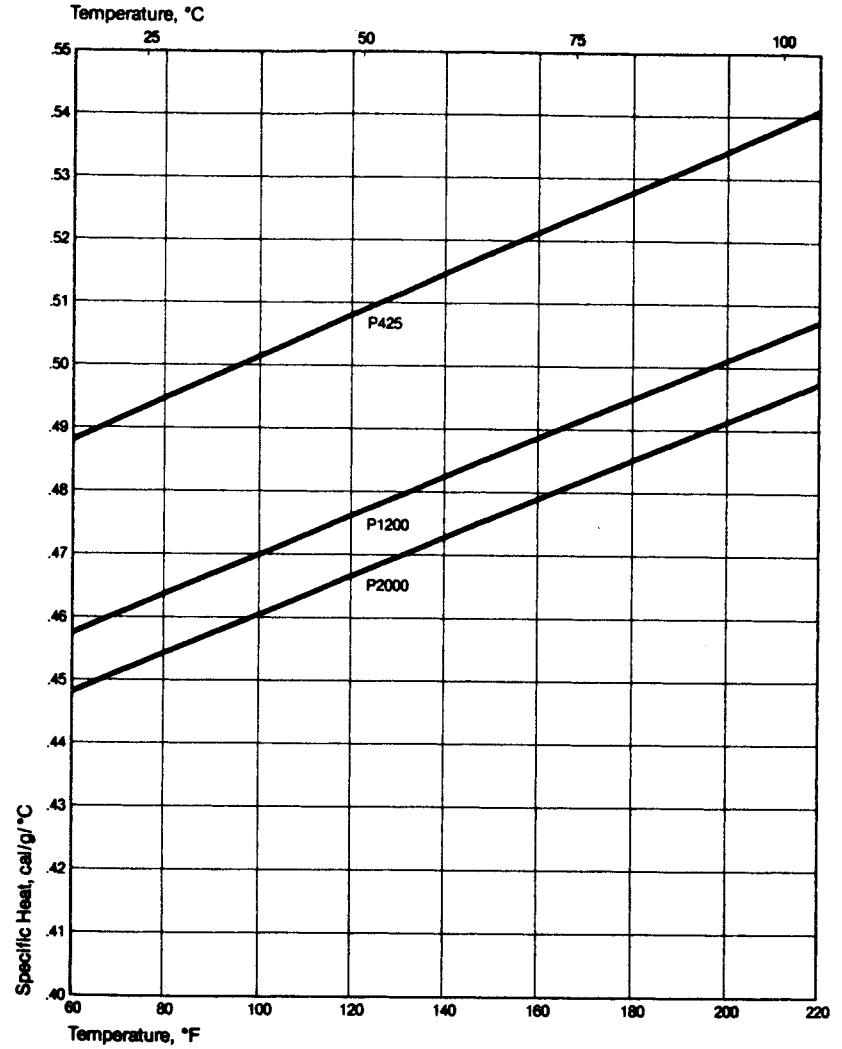
Specific Heats of Polypropylene Glycols — P-Series




(continued)

Table 11.73: (continued)

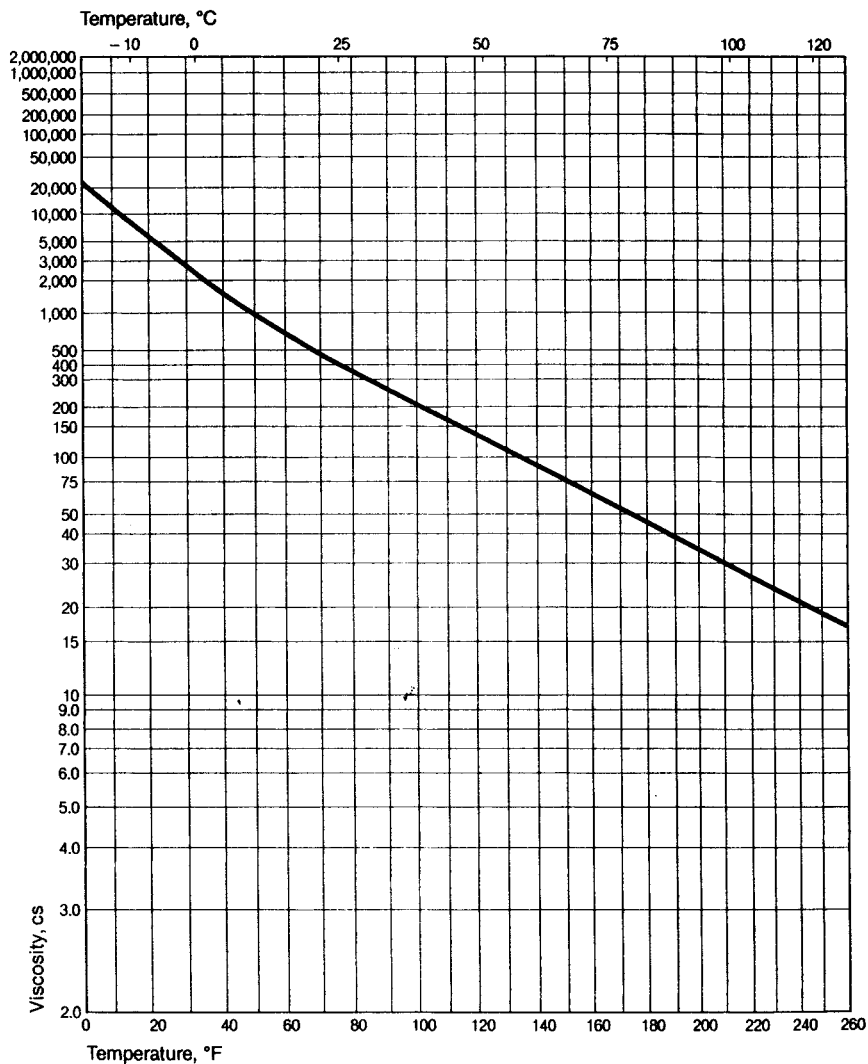Viscosity vs. Temperature for Polyglycol 15-200



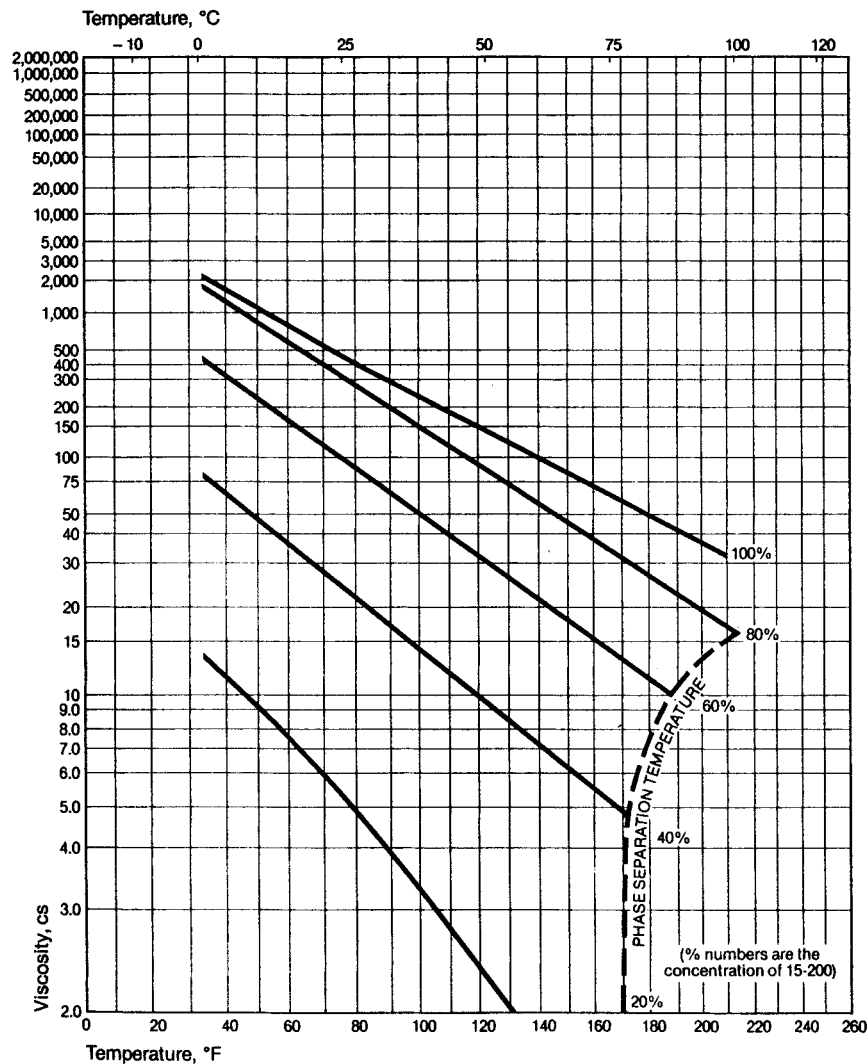
Viscosity vs. Temperature of Aqueous Polyglycol 15-200 Solutions




(continued)

Table 11.73: (continued)

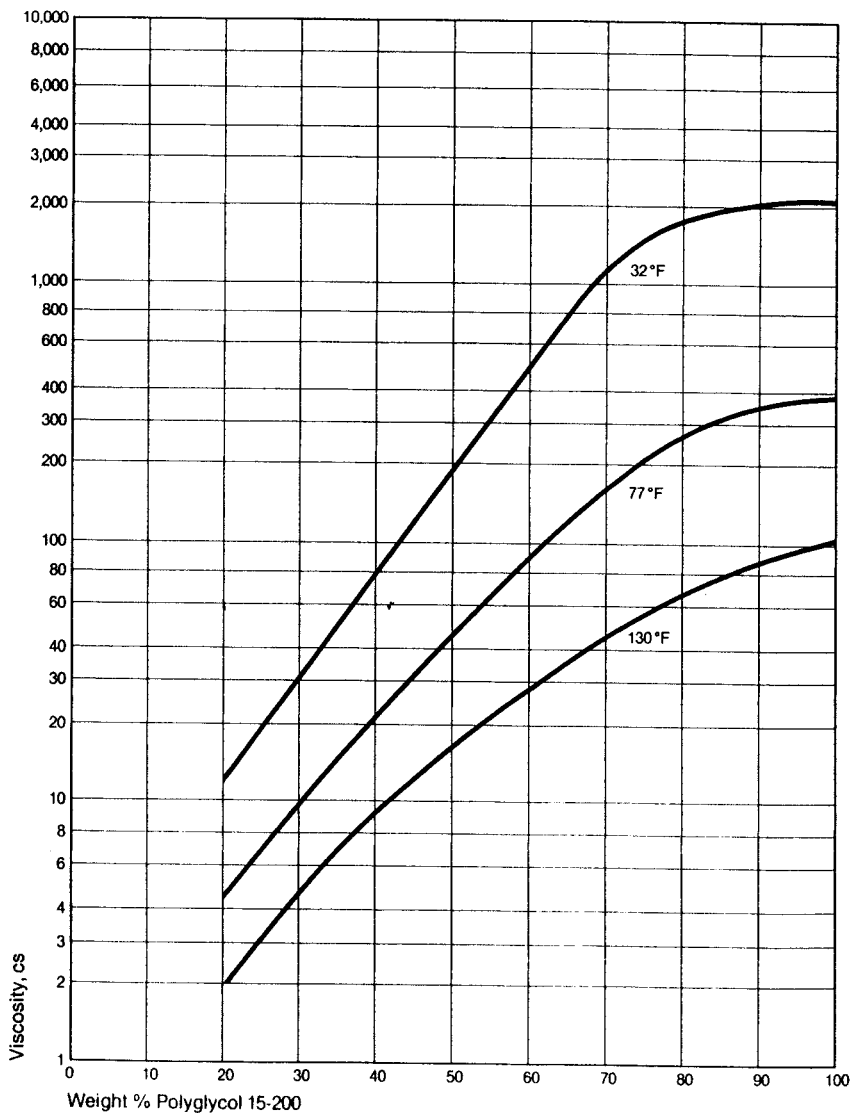Viscosity vs. Concentration of Aqueous Polyglycol 15-200 Solutions




Hygroscopicity of Polyglycol 15-200

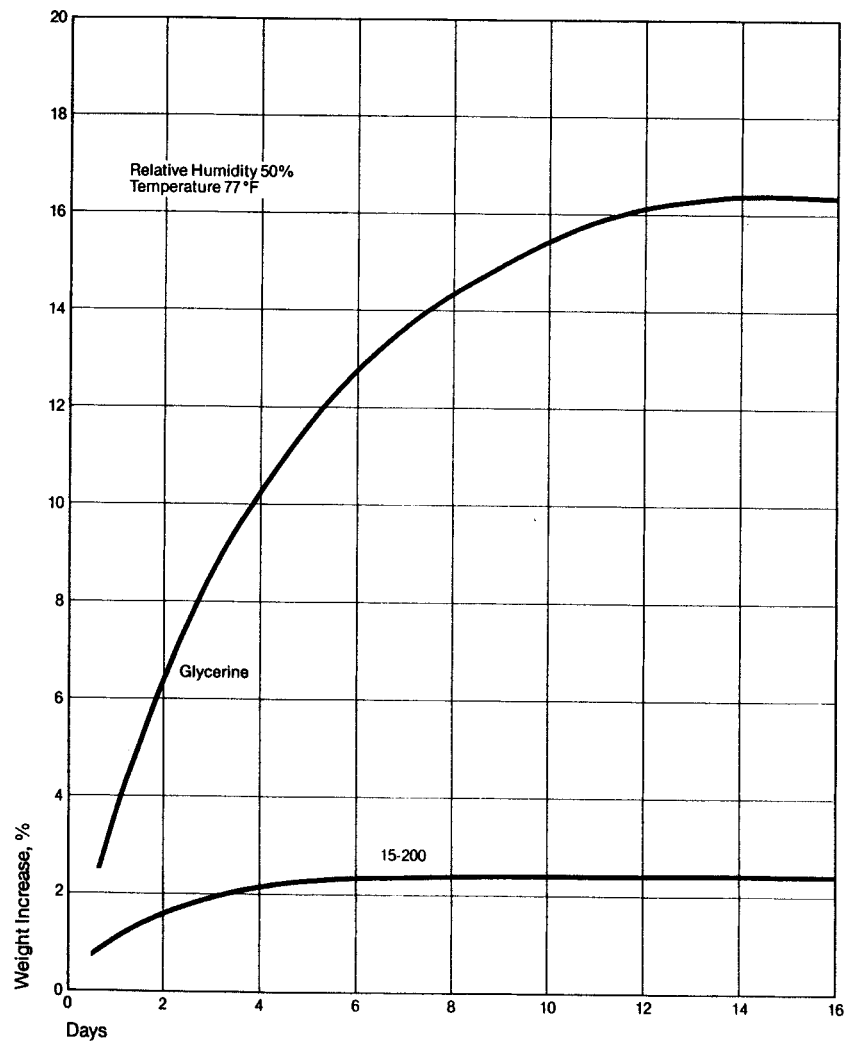


(continued)

Table 11.73: (continued)

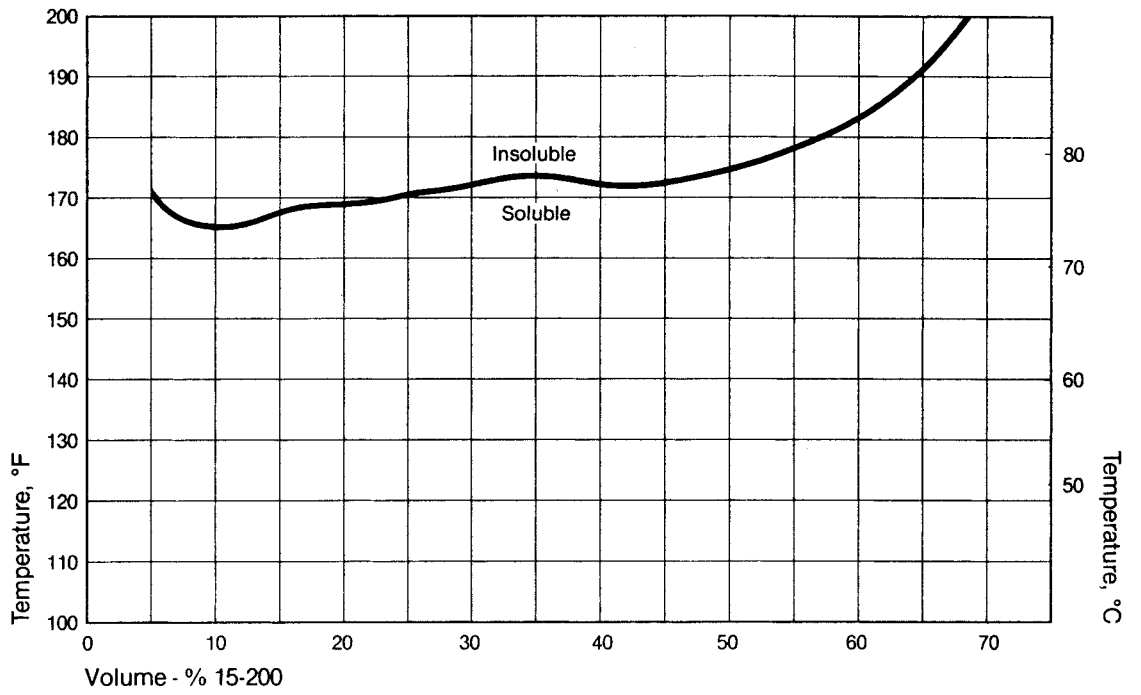15-200 Cloud Point in Water



Polyglycol 15-200 Separation Temperature in Water

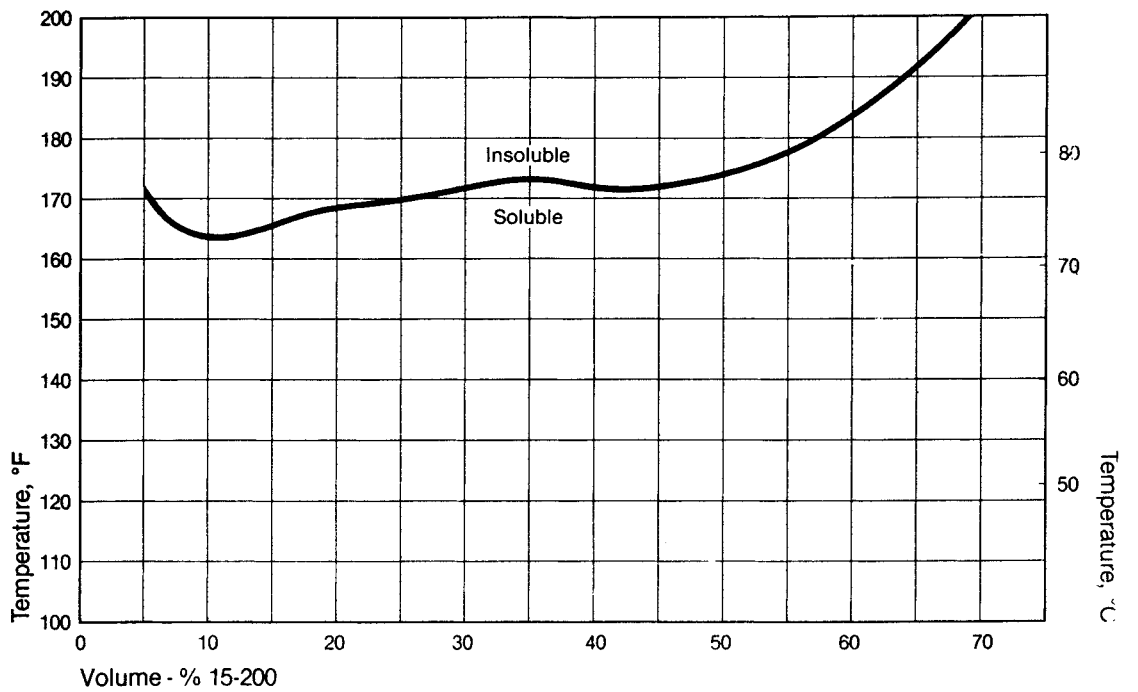

(continued)

Table 11.73: (continued)

Solubility of Organic Liquids in Polyglycol 15-200

| Organic Liquid | Solubility, % |
|----------------------|---------------|
| Butyl Stearate | 10 |
| Cotton Seed Oil | > 90 |
| Cyclohexane | 44 |
| Decahydronaphthalene | 36 |
| Diethanolamine* | Ins. |
| Ethyl Cyclohexane | 44 |
| Ethylene Glycol* | 25 |
| Gasoline | 25 |
| Glycerine* | Ins. |
| Lard Oil | Ins. |
| Olive Oil | Ins. |
| Soya Oil | Ins. |
| Triethanolamine* | Ins. |

Ins. = Insoluble in all proportions.

Organic Liquids Completely Soluble in Polyglycol 15-200

At 77 °F, Polyglycol 15-200 is soluble in all proportions with organic acids, alcohols, aldehydes, aromatics, halogenated hydrocarbons, glycols, glycol ethers, and some vegetable, animal and certain fruit oils. Specific compounds which are completely soluble include:


| | | | |
|------------------------|-----------------------------|---------------------------|----------------------------|
| Acetaldehyde | Cyclohexanone | Isopropanol (99%) | Phenyl Ethyl Acetate |
| Acetic Acid (glacial) | Diacetone Alcohol | Isopropylbenzene | Phenyl Ethyl Alcohol |
| Acetic Anhydride | a-Diamylnaphthalene | Isopropyl Bromide | Phenetole |
| Acetone* | Di-N-Butylamine | Isopropyl Chloride | Phenyl Acetate |
| Acetylene Tetrabromide | Dibutyl Sebacate | Lactic Acid (85%) | 4-Phenyl-M-Dioxane |
| Acrylonitrile | Dichloroacetic Acid | Lemon Oil | Pine Needle Oil |
| Allyl Alcohol | o-Dichlorobenzene | Mesityl Oxide | Piperidine |
| Allyl Bromide | Dichloroethyl Ether | Methanol | Polyglycol E200* |
| Amyl Acetate | Dichloroisopropyl Ether | Methyl Chloroform* | Polyglycol E300* |
| Amyl Alcohol | Diethylbenzene* | p-Methylcyclohexanol | Polyglycol E400* |
| tert-Amyl Alcohol | Diethylene Glycol* | Methylene Bromide | Polyglycol E600* |
| Aniline | Diethyl Ether | Methylene Chloride* | n-Propanol |
| Benzaldehyde | Diisopropylbenzene | Methyl Ethyl Ketone | Propylene Dibromide |
| Benzene | 1,4-Dioxane* | Methyl Formate | Propylene Dichloride* |
| Benzyl Alcohol | Diphenyl Oxide* | Methyl Isobutyl Carbinol | Propylene Glycol* |
| Bromochloromethane | Dipropylene Glycol* | Methyl Isobutyl Ketone | Pyridine |
| Bromocyclohexane | Dodecyl Alcohol | Methyl Laurate | Ricinoleic Acid |
| Bromoform | Ethanol (95%) | Methyl Salicylate* | Sperm Oil |
| n-Butyl Acetate | Ethyl Acetate | a-Methylstyrene | Styrene Oxide |
| n-Butyl Bromide | Ethylbenzene* | Morpholine* | Tetrachloroethane |
| n-Butyl Lactate | Ethyl Bromide | Nitrobenzene | Tetrahydrofurfuryl Alcohol |
| n-Butyl Phosphate | Ethyl Chloroacetate | Nitroethane | Tetrahydronaphthalene |
| n-Butylaldehyde | Ethyl Cyanoacetate | Nitromethane | Triacetin |
| Carbon Bisulfide | Ethyl Lactate | 1-Nitropropane | Tributyl Aconitate |
| Carbon Tetrachloride* | Ethylene Chlorohydrin | 2-Nitropropane | 1,1,2-Trichloroethane* |
| Castor Oil | Ethylene Dibromide* | Octyl Alcohol | Trichloroethylene* |
| o-Chloroaniline | Ethylene Dichloride* | Oleic Acid | Triethylbenzene |
| Chloroform* | Ethylidene Dichloride | Orange Oil | Triethylene Glycol* |
| o-Chlorophenol | Furfural | Paraldehyde | Trimethylene Bromide |
| Cresol | Hydrochloric Acid (23 °Be)* | Pentachlorodiphenyl Oxide | Trimethylene Chlorobromide |
| Cyclohexanol | Isophorone | Perchloroethylene* | Tripropylene Glycol* |
| | | | Xylene |

*Products of The Dow Chemical Company


(continued)

Table 11.73: (continued)

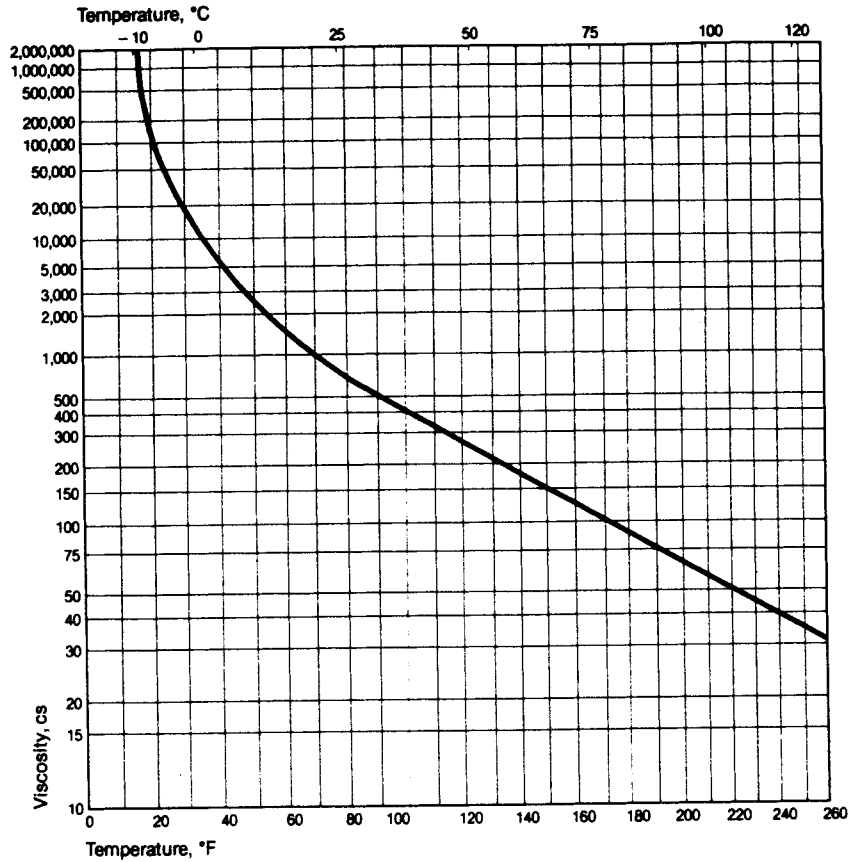Viscosity vs. Temperature For Polyglycol 112-2



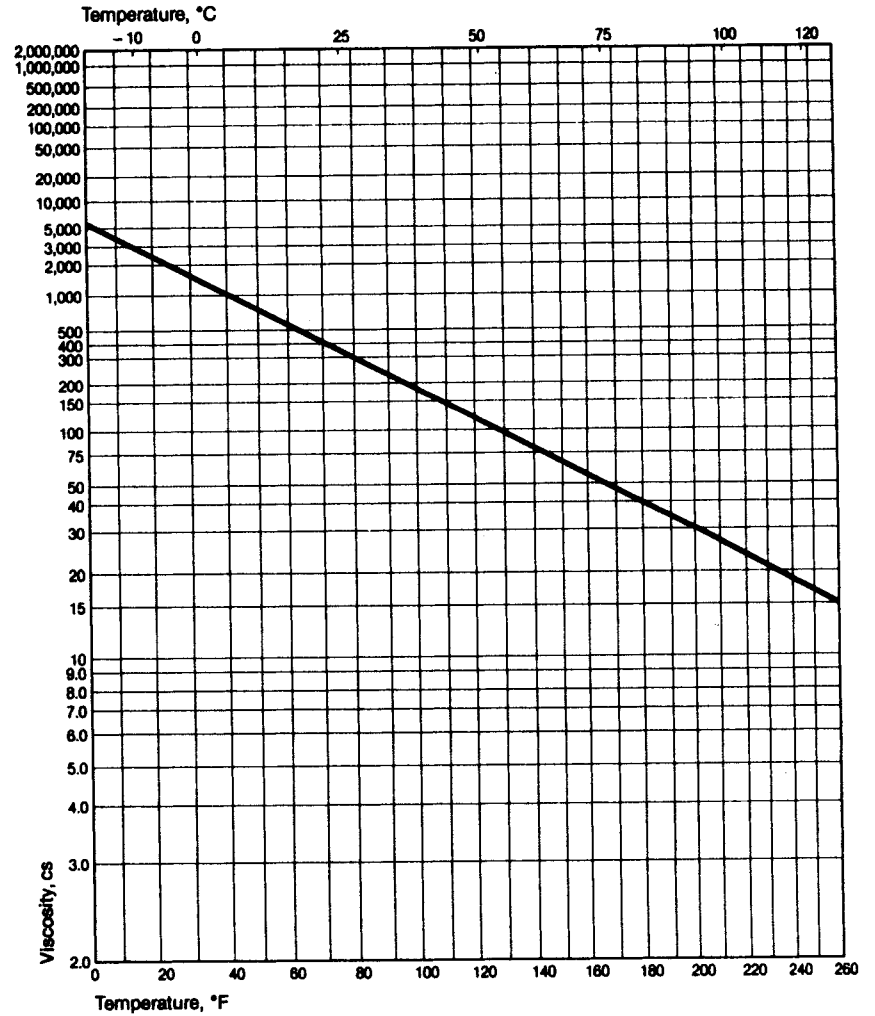Viscosity vs. Temperature For Polyglycol EP530



POLYOLS

Table 11.74: Properties of PLURONIC and TETRONIC Block Copolymer Surfactants (47)


| PLURONIC® Block Copolymer Surfactants | | | | | |
|---------------------------------------|--------|----------------------------------------|-------------------------------------------------|---------------------------------------------------|-------------------------------------|
| Product | Form | Cloud Point (1% aqueous sol.)° C | Surface Tension (0.1%, 25° C) dynes/cm | Foam Height (Ross Miles, 0.1%, 50° C) mm | HLB ^a Value, 25° C |
| L10 | Liquid | 32 | 40.6 | 30 | 12-18 |
| L31 | Liquid | 37 | 46.9 | 2 | 1-7 |
| L35 | Liquid | 73 | 48.8 | 25 | 18-23 |
| F38 | Solid | >100 | 52.2 | 35 | >24 |
| L43 | Liquid | 42 | 47.3 | 0 | 7-12 |
| L44, L44NF | Liquid | 65 | 45.3 | 25 | 12-18 |
| L61 | Liquid | 24 | Ins. | 0 | 1-7 |
| L62 | Liquid | 32 | 42.8 | 25 | 1-7 |
| L62D | Liquid | 35 | 43.0 | 3 | 1-7 |
| L62LF | Liquid | 28 | 38.6 | 5 | 1-7 |
| L64 | Liquid | 58 | 43.2 | 40 | 12-18 |
| P65 | Paste | 82 | 46.3 | 70 | 12-18 |
| F68, F68NF | Solid | >100 | 50.3 | 35 | >24 |
| F68LF | Solid | 32 | 43.7 | 16 | >24 |
| F77 | Solid | >100 | 47.0 | 100 | >24 |
| L81 | Liquid | 20 | Ins. | Ins. | 1-7 |
| P84 | Paste | 74 | 42.0 | 90 | 12-18 |
| P85 | Paste | 85 | 42.5 | 70 | 12-18 |
| F87, F87NF | Solid | >100 | 44.0 | 80 | >24 |
| F88 | Solid | >100 | 48.5 | 80 | >24 |
| L92 | Liquid | 26 | 35.9 | 15 | 1-7 |
| F98 | Solid | >100 | 43.0 | 40 | >24 |
| L101 | Liquid | 15 | Ins. | Ins. | 1-7 |
| P103 | Paste | 86 | 34.4 | 40 | 7-12 |
| P104 | Paste | 81 | 33.1 | 50 | 12-18 |
| P105 | Paste | 91 | 39.1 | 40 | 12-18 |
| F108, F108NF | Solid | >100 | 41.2 | 40 | >24 |
| L121 | Liquid | 14 | 33.0 ^b | Ins. | 1-7 |
| L122 | Liquid | 19 | 33.0 | 20 | 1-7 |
| P123 | Paste | 90 | 34.1 | 45 | 7-12 |
| F127, F127NF | *Solid | >100 | 40.6 | 40 | 18-23 |
| 10R5 | Liquid | 69 | 50.9 | 10 | 12-18 |
| 17R2 | Liquid | 35 | 41.9 | 0 | 2-7 |
| 17R4 | Liquid | 46 | 44.1 | 0 | 7-12 |
| 25R2 | Liquid | 29 | 37.5 | 1 | 2-7 |
| 25R4 | Liquid | 40 | 40.9 | 25 | 7-12 |
| 25R8 | Solid | 45 | 46.1 | 15 | 12-18 |
| 31R1 | Liquid | 25 | 34.1 | 0 | 1-7 |

^a HLB calculated from glc relative retention ratios except for PLURONIC R series estimated ranges ^b Not completely soluble Ins. = Insoluble

| TETRONIC® Block Copolymer Surfactants | | | | | |
|---------------------------------------|--------|----------------------------------------|-------------------------------------------------|---------------------------------------------------|-------------------------------------|
| Product | Form | Cloud Point (1% aqueous sol.)° C | Surface Tension (0.1%, 25° C) dynes/cm | Foam Height (Ross Miles, 0.1%, 50° C) mm | HLB ^a Value, 25° C |
| 304 | Liquid | 75 | 53.0 | 2 | 12-18 |
| 701 | Liquid | 18 | 36.1 ^b | 0 ^b | 1-7 |
| 704 | Liquid | 79 | 40.3 | 80 | 12-18 |
| 901 | Liquid | 20 | 36.2 ^b | 0 ^b | 1-7 |
| 904 | Liquid | 74 | 35.4 | 70 | 12-18 |
| 908 | Solid | >100 | 45.7 | 40 | >24 |
| 1107 | Solid | >100 | 42.9 | 50 | >24 |
| 90R4 | Liquid | 43 | 42.7 | 20 ^b | 1-7 |
| 150R1 | Liquid | 20 | 33.3 ^b | Ins. | 1-7 |

^a HLB calculated from glc relative retention ratios ^b Not completely soluble Ins. = Insoluble

GLYCERINE ETHERS

Table 11.75: Glyceryl α -Monomethyl Ether (2) α -Monomethyl Ether of Glycerine


Glyceryl α -monomethyl ether is a colorless liquid, soluble in benzene, ethyl alcohol, glycerol and water but insoluble in gasoline and carbon tetrachloride. It is a solvent for rosin, and when mixed with butyl acetate is compatible with nitrocellulose. It may be used as a selective solvent and in the manufacture of alkyd resins.

| | |
|--------------------------------------------|--------------------------|
| Boiling range at 745 mm | 90% between 215-220°C |
| Refractive index, $n_{\frac{25^\circ}{D}}$ | 1.442 |
| Specific gravity at 25/25°C | 1.1147 |
| Weight per gal | 9.29 lb |

Table 11.76: Glyceryl α,γ -Dimethyl Ether (2) α,γ -Dimethyl Ether of Glycerine


Glycerine α,γ -dimethyl ether is a water-white liquid soluble in benzene, gasoline, carbon tetrachloride, ethyl alcohol, water and glycerine, but insoluble in linseed oil and other fixed oils. It is a solvent for rosin, cellulose acetate and when mixed with butyl acetate is compatible with nitrocellulose. It has use as a solvent and plasticizer.

| | |
|-----------------------------|--------------------------|
| Boiling range at 736 mm. | 90% between 164-170°C |
| Specific gravity at 25/25°C | 1.003 |
| Weight per gal | 8.36 lbs |

Table 11.77: Glyceryl α -Mono-n-Butyl Ether (2) α -Mono-n-Butyl Ether of Glycerine

α -Mono-n-butyl ether of glycerine is a colorless liquid, soluble in benzene, gasoline, ethyl alcohol and carbon tetrachloride, but only slightly soluble in water and glycerol. It is a solvent for rosin and ester gum and may be used in the preparation of varnishes made with these substances.

| | |
|--------------------------------------------|--------------------------|
| Boiling range at 18 mm. | 90% between 133-137°C |
| Refractive index, $n_{\frac{25^\circ}{D}}$ | 1.434 |
| Specific gravity at 25/25°C | 0.945 |
| Weight per gal | 7.87 lbs |

Table 11.78: Glyceryl α -Monoisoamyl Ether (2) α -Monoisoamyl Ether of Glyceryl

α -Monoisoamyl ether of glyceryl is a colorless liquid which generally contains small amounts of other amyl isomers. It is soluble in benzene, ethyl alcohol, hydrogenated hydrocarbons, carbon tetrachloride, gasoline, linseed oil, and other fixed oils and, in certain amounts, soluble in glycerol and water. It is a solvent for rosin and, when mixed with butyl acetate, is compatible with nitrocellulose. It may be used as a solvent in the preparation of alkyd resins and in the synthesis of ester derivatives.

| | |
|--------------------------------------------|--------------------------|
| Boiling range at 745 mm | 90% between 252-260°C |
| Refractive index, $N_{\frac{25^\circ}{D}}$ | 1.442 |
| Specific gravity at 25/25°C | 0.987 |
| Weight per gal | 8.22 lbs |

Table 11.79: Glyceryl α,γ -Diisoamyl Ether (2) α,γ -Diisoamyl Ether of Glycerine

Glyceryl α,γ -diisoamyl ether is a water-white liquid which may contain small quantities of other amyl isomers. It is soluble in ethyl alcohol, benzene, gasoline, carbon tetrachloride and linseed oil, but insoluble in water and glycerol. It is a solvent for ester gum and rosin and has use as a solvent and plasticizer.

| | |
|--------------------------------------------|--------------------------|
| Boiling range at 10 mm | 90% between 147–153°C |
| Refractive index, $n_{\frac{25^\circ}{D}}$ | 1.432 |
| Specific gravity at 25/25°C | 0.903 |
| Weight per gal | 7.52 lbs |

Table 11.80: Miscellaneous Glycerine Ethers (2)


Glycerine ethers range widely from low-boiling liquids to high-boiling solids. The solubility varies equally from complete water miscibility to complete water insolubility. The following lists these glyceryl ethers with their density and boiling points.

| <u>Glyceryl-Ether</u> | <u>d</u> | <u>b.p. (or m.p.) °C.</u> |
|--------------------------------|------------------------------------|---------------------------------------------------------|
| α -Isoamyl | 0.987 ₂₅ ²⁵ | 137-9 ₂₅ 251-2 ₂₅ |
| α, γ -di-Isoamyl | 0.903 ₂₅ ²⁵ | 147-53 ₂₅ 269 |
| α -Benzyl | 1.196 ₂₅ ²⁵ | 124-6 ₂₅ |
| α -n-Butyl | 0.945 ₂₅ ²⁵ | 133-7 ₂₅ |
| Cresyl | | |
| α -Ethyl | 1.063 | 231-2 ₂₅ |
| α, γ -di-Ethyl | 0.920 ₂₅ ²⁵ | 190 |
| tri-Ethyl | 0.886 ₂₅ ²⁵ | 103-5 ₂₅ 181 ₂₅ |
| Epiethylin | 0.94 ₂₅ ²⁵ | 128-9 |
| Glycidol | 1.1143 ₂₅ ²⁵ | 41 ₁ |
| α -Methyl | 1.1147 ₂₅ ²⁵ | 110 ₂₅ 221 ₂₅ |
| β -Methyl | | |
| α, γ -di-Methyl | 1.003 ₂₅ ²⁵ | 69.5-70.5 ₂₅ 164-70 ₂₅ |
| tri-Methyl | 0.937 ₂₅ ²⁵ | 148 ₂₅ |
| Epimethylin | 1.002 ₂₅ ²⁵ | 113-4 ₂₅ |
| mono- α -Naphthyl | | m.p. 91-2 |
| mono- β -Naphthyl | | m.p. 109-10 |
| α -Phenyl | | 185-7 ₂₅ 150-5 ₂₅ m.p. 53-4 |
| α, γ -di-Phenyl | | 287-8 m.p. 80-1 |
| α -o-Cl-Phenyl | | m.p. 56 |
| α -p-Cl-Phenyl | | m.p. 76 |
| mono-2, 4-di-Nitrophenyl | | m.p. 83 |
| Epiphenylin | 1.06 ₂₅ ²⁵ | 115-6 ₂₅ |
| α -Propyl | 1.074 ₂₅ ²⁵ | 118-22 ₂₅ |
| α, γ -di-Isopropyl | 0.915 ₂₅ ²⁵ | 112-3 |
| α, γ -di-n-Propyl | | 215-7 |
| mono-p-Tolyl | | m.p. 73-4 |

Ketones

ACETONE

Dimethyl Ketone, Methylacetyl, Propanone-2



Acetone is a colorless, limpid, mobile, hygroscopic, flammable liquid having a mint-like odor.

Table 12.1: Physical Properties of Acetone (41)

Typical Properties

| | | | |
|----------------------------------------|----------|-----------------------------------------|------------------|
| Molecular Weight | 58.08 | Boiling Range, 760 mm. °C | |
| Color (Pt-Co Scale), max | 5 | Initial Boiling Point, min | 55.1 |
| Weight/Vol, 20°C, | | Dry Point, max | 57.1 |
| lb/gal (U. S.) | 6.59 | Freezing Point, °F (°C) | -138 (-95) |
| kg/litre | 0.79 | Flash Point, Tag Closed Cup, °F (°C) | -4 (-20) |
| lb/gal (Imperial) | 7.91 | Tag Open Cup, °F (°C) | -2 (-19) |
| Solubility, 20°C, wt % | | Fire Point, °F (°C) | -2 (-19) |
| In water | Complete | Flammable Limits in Air, % by volume | |
| Water in | Complete | Lower | 2.6 |
| Evaporation Rate (n-butyl acetate = 1) | 7.7 | Upper | 12.8 |
| Dilution Ratio, toluene | 4.6 | Autoignition Temperature (ASTM D-2155), | |
| VM & P na,phtha | 0.55 | °F (°C) | 1000 (538) |
| Refractive Index, 20°C | 1.3589 | NFPA Classification 30 | IB |
| Vapor Pressure, 20°C, mm Hg | 180 | DOT Classification | Flammable Liquid |
| Specific Gravity 20°/20°C | 0.792 | DOT Labels Required | Flammable Liquid |

Table 12.2: Low Temperature Characteristics of Aqueous Solutions of Acetone (19)

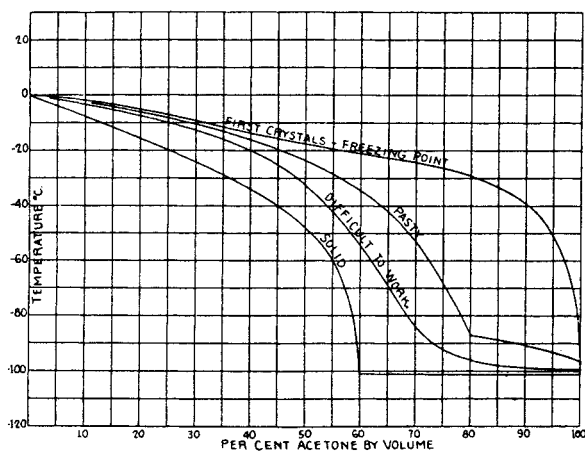


Table 12.3: Solubility of Various Materials in Acetone (44)

| SOLUBILITY OF SHELLACS IN ACETONE | | | | SOLUBILITY OF COPAL RESINS IN ACETONE | | |
|-----------------------------------|----------------------------------------------|--|--|---------------------------------------|----------------------------------------------|------------------------------------|
| TYPE | PER CENT SOLUBLE AT BOILING POINT OF ACETONE | | | TYPE | PER CENT SOLUBLE AT BOILING POINT OF ACETONE | SOLUBILITY OF PART SOLUBLE AT 25°C |
| Superfine orange shellac | 98.8 | | | Congo | 40.8 | M ¹ |
| Superfine shellac | 92.8 | | | Manila, soft | 96.6 | M |
| T. N. shellac, No. 1 | 95.6 | | | Elemi | 100.0 | M |
| T. N. shellac, No. 2 | 98.8 | | | Yacca | 96.6 | M |
| A. C. garnet | 81.3 | | | Sandarac | 97.0 | M ¹ |
| Refus lac | 63.0 | | | Sierra Leone | 55.5 | M ¹ |
| | | | | Borneo pontianac | 93.5 | M ¹ |
| | | | | Batavia dammar | 88.7 | M ² |
| | | | | Red, accrodites | 95.2 | M |

| PERCENTAGE OF ACETONE-INSOLUBLE MATTER IN VARIOUS RESINS | |
|----------------------------------------------------------|-------------------------------|
| TYPE | PER CENT INSOLUBLE IN ACETONE |
| Kauri, pale | 8.90 |
| Kauri, brown | 38.70 |
| Kauri, bush | 20.70 |
| Rosin | Soluble |
| Burgundy pitch | Soluble |
| Stockholm tar | Soluble |
| Mastic | 9.50 |
| Sandarac | Soluble |
| Madagascar copal, fused | 84.80 |

| SOLUBILITY OF WATER GUMS IN ACETONE | |
|-------------------------------------|----------------------------------------------|
| TYPE | PER CENT SOLUBLE AT BOILING POINT OF ACETONE |
| Arabic gum | 11.9 |
| Indian gum | 16.7 |
| Senegal gum | 12.0 |
| Tragacanth, Allepa | 9.2 |
| Tragacanth, Persian | 8.0 |
| Tragacanth, Turkey | 7.2 |

| SOLUBILITY OF FATS, OILS AND GREASES IN ACETONE | | | | SOLUBILITY OF ASPHALTS AND BITUMENS IN ACETONE | |
|-------------------------------------------------|----------------------|---------------------------|----------------------------------------|---------------------------------------------------------------------------|----------------------------------------------|
| TYPE | MISCIBILITY AT 25°C. | PER CENT SOLUBLE AT 25°C. | SOLUBILITY AT BOILING POINT OF ACETONE | TYPE | PER CENT SOLUBLE AT BOILING POINT OF ACETONE |
| Chinawood oil | M | | | Alberite | 5.8 |
| Coconut oil (refined and bleached) | M | | | Asphalt, blown, from mid-continental petroleum | 56.4 |
| Corn oil (raw) | M | | | Bermudez pitch, refined | 62.4 |
| Cottonseed oil (refined and bleached) | M | | | Coal-tar pitch, refined | 70.4 |
| Cottonseed oil (hydrogenated, Crisco) | M | 100.0 | M | Fatty acid pitch, soft grade | 62.4 |
| Cottonseed oil (hydrogenated) | | 32.0 | M | Fatty acid pitch, medium grade | 54.3 |
| Cottonseed oil (stearin) | M | | | Gilsonite selex | 25.0 |
| Cottonseed oil (summer) | M | | | Grahamite | 1.6 |
| Cottonseed oil (winter) | M | | | Mexican petroleum asphalt, steam-distilled, medium grade | 44.2 |
| Fish oil (herring, raw) | M | | | Mexican petroleum asphalt, steam-distilled, soft grade | 64.3 |
| Fish oil (hydrogenated) | | 35.8 | M | Petroleum asphalt, steam-distilled, Californin, medium grade | 81.0 |
| Fish oil (menhaden, raw) | m | 99.8 | M | Residual oil from Gulf Coast | 61.0 |
| Grease, brown | m | 96.4 | 99.8 | Residual oil from steam distillation of mid-continental petroleum asphalt | 97.2 |
| Grease, garbage | m | 99.6 | 99.7 | Syrian asphalt | 5.9 |
| Grease, white | m | 97.3 | M | Trinidad pitch, refined | 42.0 |
| Linseed oil, raw | M | | | | |

M—miscible in all proportions.
 m—part soluble at 25°C is miscible in all proportions.

Table 12.4: Specific Gravity of Aqueous Solutions of Acetone at Different Temperatures (19)

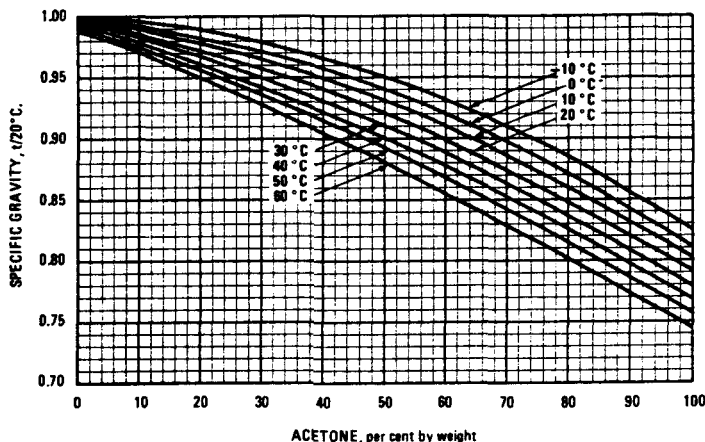


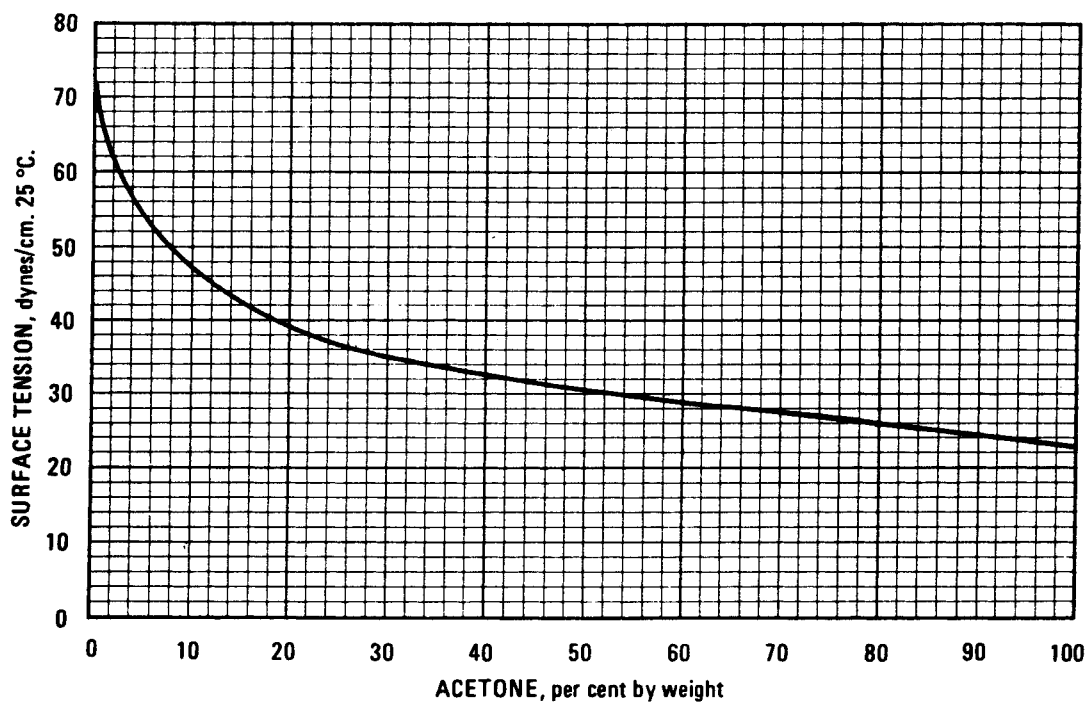
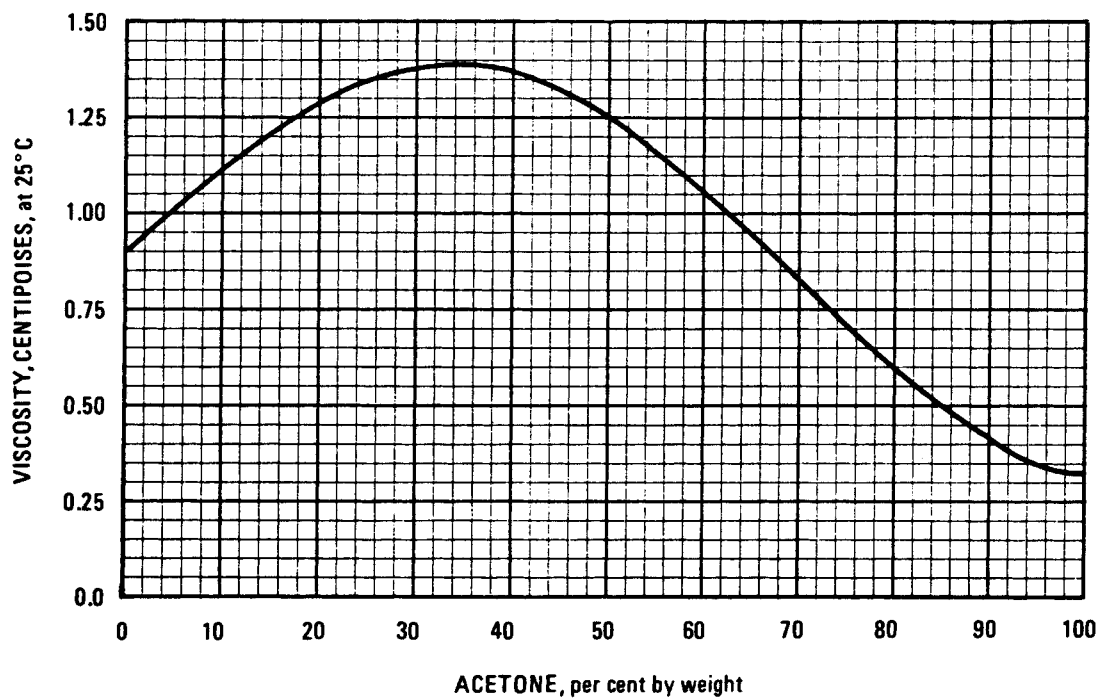
Table 12.5: Surface Tension of Aqueous Solutions of Acetone at 25°C (19)**Table 12.6: Viscosity of Aqueous Acetone Solutions at 25°C (19)**

Table 12.7: Refractive Index of Aqueous Solutions of Acetone at 25°C (19)

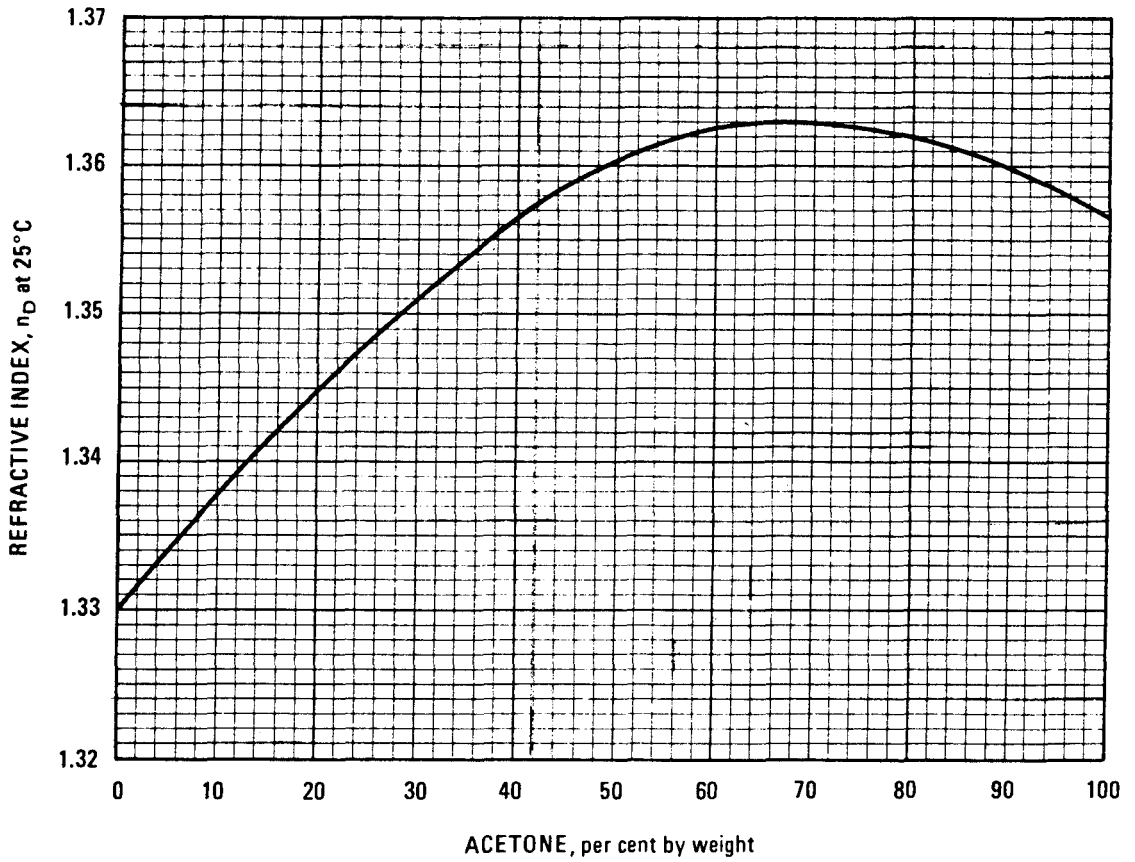


Table 12.8: Liquid-Vapor Equilibria for Aqueous Solutions of Acetone at Different Pressures (19)


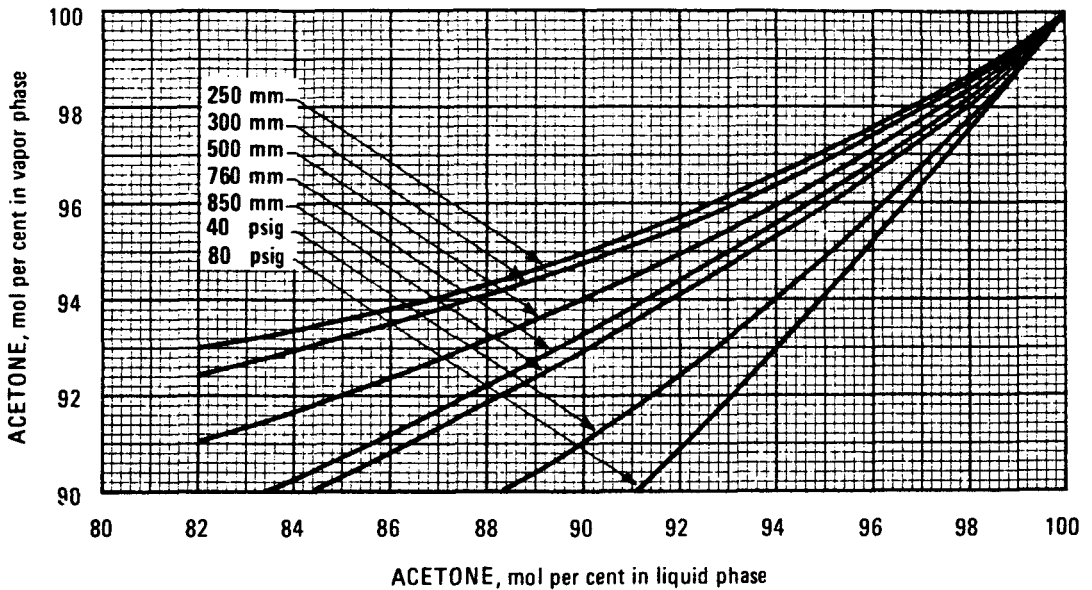


Table 12.9: Freezing Point of Aqueous Solutions of Acetone (19)

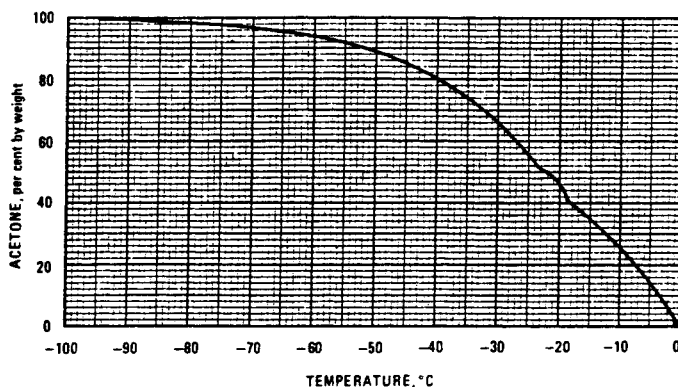

METHYL ETHYL KETONE

MEK, Butanone-2, Ethyl Methyl Ketone




Methyl ethyl ketone is a colorless, stable, mobile, flammable liquid with an odor like acetone.


Table 12.10: Physical Properties of Methyl Ethyl Ketone (2)

| <i>Azeotropic Mixtures</i> | | | | | | |
|------------------------------------------------|-----------------------------------|----------------------------|----------|------------------------|------|------|
| | % by wt. | | % by wt. | B.P. (°C) | | |
| Methyl ethyl ketone | 37.5 | Benzene | 62.5 | 78.4 | | |
| | 73 | <i>tert</i> -Butyl alcohol | 27 | 77.5 | | |
| | 84.7 | Carbon disulfide | 15.3 | 45.9 | | |
| | 29 | Carbon tetrachloride | 71 | 73.8 | | |
| | 40 | 1,3-Cyclohexadiene | 60 | 73.0 | | |
| | 40 | Cyclohexane | 60 | 72.0 | | |
| | 12 | Ethyl acetate | 82 | 77.0 | | |
| | 60 | Ethyl alcohol | 40 | 74.8 | | |
| | 20 | Ethyl sulfide | 80 | 77.5 | | |
| | 70 | Isopropyl alcohol | 30 | 77.5 | | |
| | 52 | Methyl propionate | 48 | 79.3 | | |
| | 55 | Propyl formate | 45 | 79.5 | | |
| | 75 | Propyl mercaptan | 25 | 55.5 | | |
| | 45 | Thiophene | 55 | 76 | | |
| <i>Ternary Mixtures</i> | | | | | | |
| (1) Methyl ethyl ketone | 22.2 | Water | 3.0 | CCl_4 | 74.8 | 65.7 |
| (2) | 17.8 | | 8.9 | C_6H_6 | 73.8 | 68.9 |
| | Upper layer of (2) | | 19.0 | | 0.4 | 80.6 |
| | Lower layer of (2) | | 3.5 | | 96.4 | 0.1 |
| <i>Typical Properties and Specifications</i> | | | | | | |
| Boiling point at 760 mm | 79.6°C | | | | | |
| Coefficient of expansion | 0.00076 per °F | | | | | |
| Electrical Conductivity | 1.0×10^{-7} ohms at 25°C | | | | | |
| Explosive limits | 1.97%—10.2% | | | | | |
| Flash point (Tag Closed Cup) | 25°F | | | | | |
| Freezing point | -86.4°C | | | | | |
| Heat of combustion | 582 Cal./mole | | | | | |
| Latent heat of Vaporization at 20°C | 106.0 cal./g | | | | | |
| Refractive Index, N _D ²⁰ | 1.3788 | | | | | |
| Solubility of water in solvent at 20°C | 10% by wt. | | | | | |
| Specific gravity at 20/20°C | 0.805–0.807 | | | | | |
| Specific heat | 0.55 cal./g | | | | | |
| Surface tension | | | | | | |
| 0°C | 26.9 dynes/sq cm | | | | | |
| 20 | 24.6 | | | | | |
| 40 | 22.3 | | | | | |
| 75 | 18.4 | | | | | |
| Viscosity at 15°C | 0.00423 poise | | | | | |
| Weight per gallon at 20°C | 6.72 lbs. | | | | | |
| Acidity (as acetic) | 0.0025 by wt. (max.) | | | | | |
| Distillation range (ASTM) | 70°–80.5°C | | | | | |
| Non-volatile matter | 3 mg. per 100 ml. (max.) | | | | | |
| Purity | 99% | | | | | |

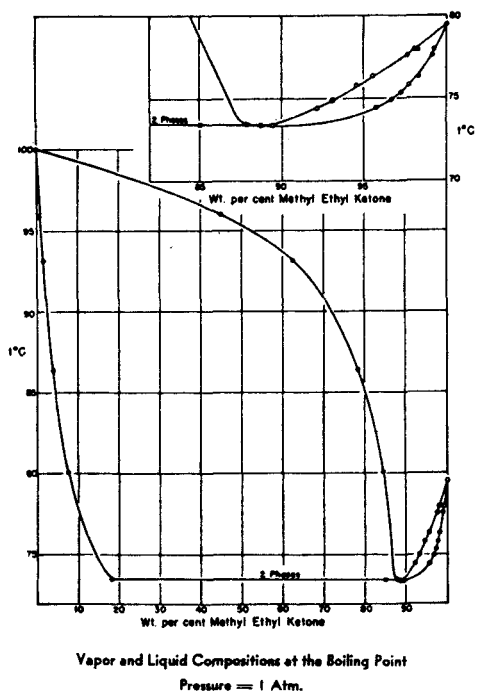Table 12.11: Methyl Ethyl Ketone and Water (14)

**METHYL n-PROPYL KETONE**

Pentanone-2



Commercial methyl n-propyl ketone, produced synthetically by dehydrogenation of the corresponding alcohol, consists of a mixture of methyl n-propyl and diethyl ketones in the approximate ratio of 3 to 1, and contains at least 97% of these ketones, the balance being secondary amyl alcohol. It is a colorless liquid, soluble in alcohol and ether but only very slightly soluble in water.

Table 12.12: Properties of Methyl n-Propyl Ketone (41)

Typical Properties

| | | | |
|-----------------------------------------------------|--------|-------------------------------------------------|------------------|
| Molecular Weight (C ₅ H ₁₀ O) | 86.13 | Specific Gravity at 20°/20° C | 0.807 |
| Branched-Chain Ketones, wt % (max) | 10 | Boiling Range at 760 mm, °C | |
| Color (Pt-Co Scale), max | 15 | Initial Boiling Point, min | 101 |
| Evaporation Rate (n-butyl acetate = 1) | 2.3 | Dry Point, max | 105 |
| Weight/Vol at 20° C | | Freezing Point, °F (°C) | -122 (-86) |
| lb/gal (U.S.) | 6.72 | Flash Point, Tag Closed Cup, °F (°C) | 46 (8) |
| kg/L | 0.81 | Tag Open Cup, °F (°C) | 50 (10) |
| lb/gal (Imperial) | 8.06 | Fire Point, °F (°C) | 50 (10) |
| Solubility at 20° C, wt % | | Flammable Limits in Air, % by volume | |
| In water | 3.1 | Lower, at 94° F (34° C) | 1.56 |
| Water in | 4.2 | Upper, at 144° F (62° C) | 8.7 |
| Dilution Ratio, toluene | 3.9 | Autoignition Temperature (ASTM D 2155), °F (°C) | 840 (449) |
| VM & P naphtha | 1.0 | NFPA Classification 30 | 1B |
| Refractive Index at 20° C | 1.3904 | DOT Classification | Flammable Liquid |
| Vapor Pressure at 20° C, mm Hg | 27.8 | DOT Labels Required | Flammable Liquid |

(continued)

Table 12.12: (continued)

Comparison of Solvent Power
MPK vs Other Solvents

| Solvent | Solution Viscosity at 25°C, cP (mPa · s) | | | |
|--------------------------------|------------------------------------------|------------------------------|----------------------------------------|-----------------------|
| | RS ½-Sec Nitrocellulose 8% | CAB-381-0.5 ^a 10% | Elvacite 2010 Acrylic ^b 10% | VYNS ^c 10% |
| Ethyl Acetate ^a | 23 | 28.3 | 5.8 | — |
| Isopropyl Acetate ^a | 25 | 31.0 | 6.6 | — |
| MEK | 14 | 18.8 | 3.6 | 22.8 |
| MPK ^a | 16 | 20.8 | 4.5 | 31.5 |
| MIBK ^a | 23 | 27.0 | 5.8 | 59.2 |

^aan Eastman product^bproduct of Du Pont Company^cproduct of Union Carbide Corporation**METHYL n-BUTYL KETONE**

Hexanone-2

CH₃·CO·C₄H₉

Methyl n-butyl ketone is a colorless liquid, freely soluble in alcohol and ether but very slightly soluble in water.


Table 12.13: Properties of Methyl n-Butyl Ketone (41)

| | | | |
|-----------------------------------------------------|--------|-------------------------------------------------|----------------------------|
| Molecular Weight (C ₆ H ₁₂ O) | 100.16 | Water, wt % | 0.05 |
| Melting Point, °C | -56.9 | Branched-Chain Ketones, max, wt % | 5 |
| Boiling Point, °C, 760 mm | 127 | Refractive Index, 20°C | 1.3969 |
| Evaporation Rate (n-butyl acetate = 1) | 1.0 | Flash Point (Tag Closed Cup), °F (°C) | 77 (25) |
| Weight/Vol, at 20°C | | (Tag Open Cup), °F (°C) | 83 (28) |
| lb/gal. (U.S.) | 6.75 | Fire Point, °F (°C) | 86 (30) |
| kg/liter | 0.81 | Flammable Limits in Air, % by volume | |
| lb/gal. (Imperial) | 8.10 | Lower | 1.3 |
| Solubility, 20°C, wt % | | Upper | 8.0 |
| In water | 1.4 | Autoignition Temperature (ASTM D-2155), °F (°C) | 795 (424) |
| Water in | 2.1 | NFPA Classification 30: | Flammable Liquid, Class IC |
| Dilution Ratio, toluene | 4.0 | ICC Labels Required | None |
| VM & P naphtha | 1.1 | Bureau of Explosives Classification | Nonhazardous Liquid |
| Color (Pt-Co Scale), ppm | 5 | | |
| Acidity, as acetic acid, wt % | 0.01 | | |


Several of the solvent characteristics of Methyl n-Butyl Ketone are listed in the following table. Similar values for other solvents are included for comparison.

| Eastman Solvent | Evap. Rate | Blush Res., % R.H. @ 80°F (27°C) | Solution Viscosity, 25°C, cp | | |
|------------------------|------------|----------------------------------|--------------------------------------------------|-------------------------------|------------------------------------|
| | | | RS. ½-Sec Cellulose Nitrate ^a 10 Wt % | Exon ^b 470 20 Wt % | Elvacite ^c 2010 20 Wt % |
| Methyl n-Butyl Ketone | 1.0 | 80 | 28 | 24 | 65 |
| Methyl Isobutyl Ketone | 1.6 | 78 | 30 | 24 | 64 |
| Isobutyl Acetate | 1.4 | 80 | 49 | 38 | 83 |
| n-Butyl Acetate | 1.0 | 83 | 46 | 33 | 77 |

^aproduct of Hercules, Inc.^bproduct of Firestone Plastics Co.^cproduct of E. I. du Pont de Nemours Co., Inc.

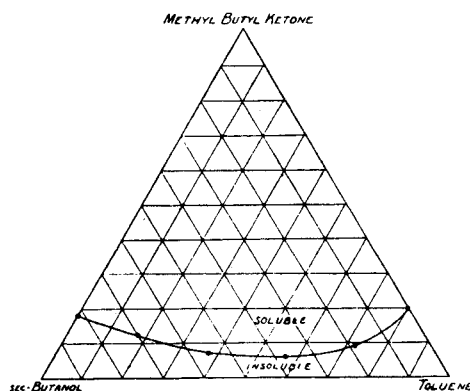Table 12.14: Solubility of Dry Half-Second R.S. Nitrocellulose in a System of Methyl Butyl Ketone-sec-Butanol-Toluene (2)**METHYL ISOBUTYL KETONE**

Hexone, 4-Methylpentanone-2, 2-Methyl-4-Pentanone



Although first prepared in 1849, methyl isobutyl ketone was not made synthetically and on a large scale until the last decades. It is a stable, colorless liquid classified as a medium boiler. It is miscible with most organic solvents and with mineral and vegetable oils. When compared with butyl acetate its rate of evaporation is somewhat faster so that it can either replace esters or be combined with them. Its rate of evaporation is somewhat faster than that of butyl acetate. It is used in the vinyl type resins for coatings where it helps to prevent gelling and lowers viscosity, in nitrocellulose lacquer manufacture, in extraction processes and in chemical synthesis. It may be used in dewaxing oils.

Table 12.15: Properties of Methyl Isobutyl Ketone (41)

| Typical Properties | |
|-----------------------------------------------------|------------------|
| Molecular Weight (C ₆ H ₁₂ O) | 100.16 |
| Color (Pt-Co Scale), max | 10 |
| Weight/Vol at 20° C, | |
| lb/gal (U.S.) | 6.67 |
| kg/L | 0.80 |
| lb/gal (Imperial) | 8.00 |
| Solubility at 20° C, wt % | |
| In water | 2.0 |
| Water in | 1.0 |
| Evaporation Rate (n-butyl acetate = 1) | 1.6 |
| Dilution Ratio, toluene | 3.5 |
| VM & P naphtha | 1.0 |
| Refractive Index at 20° C | 1.3958 |
| Vapor Pressure at 20° C, mm Hg | 15 |
| Specific Gravity at 20°/20° C | 0.802 |
| Boiling Range at 760 mm., ° C | |
| Initial Boiling Point, min | 114 |
| Dry Point, max | 117 |
| Freezing Point, ° F (° C) | -119 (-84) |
| Flash Point, Tag Closed Cup, ° F (° C) | 60 (16) |
| Tag Open Cup, ° F (° C) | 68 (20) |
| Fire Point, ° F (° C) | 70 (21) |
| Flammable Limits in Air, % by volume | |
| Lower, at 200° F (93° C) | 1.22 |
| Upper, at 200° F (93° C) | 7.96 |
| Autoignition Temperature (ASTM D-2155), ° F (° C) | 840 (449) |
| NFPA Classification 30 | IB |
| DOT Classification | Flammable Liquid |
| DOT Labels Required | Flammable Liquid |

(continued)

Table 12.15: (continued)

Several of these solvent characteristics of MIBK are listed in the following table. Similar values for other solvents are included for comparison.

| Eastman Solvent | Evap Rate | Blush Res.. % R.H. @ 80° F (27° C) | Solution Viscosity at 25° C. cP (mPa·s) | | |
|------------------------|-----------|------------------------------------------|--------------------------------------------------------|------------------------------------------|------------------------------------------------|
| | | | RS ½-Sec Cellulose Nitrate ^a 10 Wt %: | FPC 470 Resin ^b 20 Wt/% | Elvacite 2010 Resin ^c 20 Wt/% |
| Methyl Isobutyl Ketone | 1.6 | 78 | 30 | 24 | 64 |
| Isobutyl Acetate | 1.4 | 80 | 49 | 38 | 83 |
| n-Butyl Acetate | 1.0 | 83 | 46 | 33 | 77 |

^aProduct of Hercules Incorporated

^bProduct of Firestone Plastics Company


^cProduct of Du Pont Company

Table 12.16: Solubility of Miscellaneous Materials in Methyl Isobutyl Ketone at 20° to 25°C (2)

| Soluble, Over 5% by Weight Concentration | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Acid Oleic (Technical Red Oil) | Gums Elemi Kauri (Pale Bold) Mastic Pontianak |
| Oils Castor, Refined Raw Cottonseed, Raw China Wood Coconut, Crude Fish, Processed Linsced, Pure Raw Mineral, 70/80 viscosity Pine Soybean, 2-3 viscosity | Resins, Natural Dammar (dewaxed) Batavia Singapore Light Rosin Sandarac |
| RESINS, SYNTHETIC | |
| Trade Name | Type |
| Amberlac 80-X | Modified drying type phthalic alkyd |
| Amberol 801 | Rosin modified maleic alkyd |
| Arochem 519 | Modified maleic |
| Aroclor 1260 | Chlorinated diphenyl |
| Bakelite BR-254 | Non-heat-hardening 100% para-phenylphenol resin |
| No. 1 Solid Beckosol | Phenolic modified drying type alkyd |
| Beckosol 1313 | Drying type alkyd |
| Beetle 227-8 | Unmodified urea-formaldehyde |
| Cellolyn 102 | Modified rosin ester |
| Ester gum | Rosin ester |
| Ethyl methacrylate | Acrylic ester |
| Glyptal 2477 | Non-drying type alkyd |
| Melmac 245-8 | Unmodified melamine-formaldehyde |
| Neville R-21 (soft) | Unmodified coumarone-indene |
| Nevillite 1 | Naphthene polymers |
| Nitrocellulose | Cellulose ester |
| Parlon X (20 cps.) | Chlorinated rubber |
| Phenac 608 | Modified phenolic |
| Santolite K | Alkyl-arylsulfonamide-formaldehyde |
| Saran F-120 | Vinylidenechloride-acrylonitrilecopolymers |
| Staybelite | Hydrogenated rosin ester |
| Teglac Z-152 | Rosin modified maleic alkyd |
| Vinylite AYAF | Polyvinyl acetate |
| Vinylite VMCH | Maleic modified vinyl chloride-vinyl acetate copolymers |
| Vinylite VYHH | Vinyl chloride-vinyl acetate copolymers |

METHYL n-AMYL KETONE

Heptanone-2



This ketone is a colorless, stable liquid, miscible with most lacquer solvents and only very slightly soluble in water. It is used as a high-boiling solvent for nitrocellulose and is particularly applicable in vinyl resin finishes, where its slow rate of evaporation prevents quick drying, improves the flow and gives bluish resistance; also used with some effect in insecticidal preparations.

Table 12.17: Properties of Methyl n-Amyl Ketone (41)

| Typical Properties | | | |
|-----------------------------------------------------|--------|-------------------------------------------------|--------------------|
| Molecular Weight (C ₇ H ₁₄ O) | 114.19 | Specific Gravity at 20°/20°C | 0.817 |
| Branched-Chain Ketones, wt % max | 2.0 | Boiling Range at 760 mm. °C | |
| Color (Pt-Co Scale), max | 10 | Initial Boiling Point, min | 149 |
| Evaporation Rate (n-butyl acetate = 1) | 0.4 | Dry Point, max | 153.5 |
| Weight/Vol. at 20°C | | Freezing Point, °F (°C) | -27 (-33) |
| lb/gal (U. S.) | 6.80 | Flash Point, Tag Closed Cup, °F (°C) | 102 (39) |
| kg/L | 0.81 | Tag Open Cup, °F (°C) | 114 (46) |
| lb/gal (Imperial) | 8.16 | Fire Point, °F (°C) | 115 (46) |
| Solubility at 20°C, wt % | | Flammable Limits in Air, % by volume | |
| In water | 0.46 | Lower, at 150°F (66°C) | 1.11 |
| Water in | 1.31 | Upper, at 250°F (121°C) | 7.9 |
| Dilution Ratio, toluene | 3.9 | Autoignition Temperature (ASTM D 2155), °F (°C) | 740 (393) |
| VM & P naphtha | 1.2 | NFPA Classification 30 | II |
| Refractive Index, at 20°C | 1.4085 | DOT Classification | Combustible Liquid |
| Vapor Pressure at 20°C, mm Hg | 2.14 | DOT Labels Required | None |

COMPARISON OF PROPERTIES OF HIGH-BOILING SOLVENTS

| Solvent | Evap. Rate | Blush Res., % R.H. @ 80°F (27°C) | Solution Viscosity at 25°C, cP | | |
|------------------------------------------------|------------|----------------------------------|-------------------------------------------------|----------------------------------|-------------------------------------|
| | | | RS ½ Sec Cellulose Nitrate ^a 10 Wt % | CAB-381-0.5 ^b 10 Wt % | VMCH Copolymer ^c 20 Wt % |
| Methyl n-Amyl Ketone ^b | 0.4 | 93 | 40 | 37 | 158 |
| Methyl Isoamyl Ketone ^b | 0.5 | 89 | 42 | 37 | 164 |
| Isobutyl Isobutyrate ^b | 0.4 | 92 | 128 | Insol | Gel |
| Ethyl Amyl Ketone | 0.3 | 94 | 69 | Insol | 320 |
| Diisobutyl Ketone ^b | 0.2 | 95 | 143 | Insol | Gel |
| Ektasolve [®] EE Acetate ^b | 0.2 | 94 | 113 | 89 | 1040 |

^aproduct of Hercules Incorporated^ban Eastman product^cproduct of Union Carbide Corporation

METHYL ISOAMYL KETONE

MIAK



MIAK is a retarder solvent, having an evaporation rate of 0.5, but it also possesses exceptional solvent power for most film-formers. In lacquers, the low evaporation rate of MIAK promotes good flow and leveling properties; whereas the high solvency provides low viscosities or permits a higher nonvolatile content.

Table 12.18: Properties of Methyl Isoamyl Ketone (41)

| Typical Properties | | | |
|-----------------------------------------------------|--------|-------------------------------------------------|------------------|
| Molecular Weight (C ₇ H ₁₄ O) | 114.19 | Boiling Range, 760 mm. °C | |
| Color (Pt-Co Scale), max | 10 | Initial Boiling Point, min | 141 |
| Weight/Vol. 20°C | | Dry Point, max | 148 |
| lb/gal (U. S.) | 6.76 | Freezing Point, °F (°C) | -101 (-74) |
| kg/litre | 0.81 | Flash Point, Tag Closed Cup, °F (°C) | 96 (36) |
| lb/gal (Imperial) | 8.14 | Tag Open Cup, °F (°C) | 106 (41) |
| Solubility, 20°C, wt % | | Fire Point, °F (°C) | 107 (42) |
| In water | 0.5 | Flammable Limits in Air, % by volume | |
| Water in | 1.2 | Lower, at 200°F (93°C) | 1.05 |
| Evaporation Rate (n-butyl acetate = 1) | 0.5 | Upper, at 200°F (93°C) | 8.2 |
| Dilution Ratio, toluene | 4.1 | Autoignition Temperature (ASTM D-2155), °F (°C) | 795 (425) |
| VM & P naphtha | 1.2 | NFPA Classification 30 | IC |
| Refractive Index, 20°C | 1.4069 | DOT Classification | Flammable Liquid |
| Vapor Pressure, 20°C, mm Hg | 4.5 | DOT Labels Required | Flammable Liquid |
| Specific Gravity, 20°/20°C | 0.814 | | |

(continued)

Table 12.18: (continued)

| Solvent | Evap. Rate | Blush Res., % R. H. @ 80°F (27°C) | Solution Viscosity, 25°C, cP | | |
|-----------------------------------|------------|-----------------------------------|-------------------------------------------------|------------------------------------|------------------------------------------|
| | | | RS ½-Sec Cellulose Nitrate ^a 10 Wt/% | FPC 470 Resin ^b 20 Wt/% | Elvacite 2010 Resin ^c 20 Wt/% |
| Methyl Amyl Acetate | 0.5 | 92 | 128 | Insol | Insol |
| Methyl Isoamyl Ketone | 0.5 | 89 | 42 | 34 | 68 |
| Isobutyl Isobutyrate | 0.4 | 92 | 128 | Insol | Insol |
| Ektasolve [®] EE Acetate | 0.2 | 94 | 113 | Insol | 284 |

^aproduct of Hercules Incorporated
^bproduct of Firestone Plastics Company
^cproduct of Du Pont Company

Table 12.19: Properties of Methyl Isoamyl Ketone vs Other Solvents (41)

| Solvent | Evaporation Rate | Dilution Ratio (Toluene) | Blush Resistance, % R.H. at 80°F. | Specific Gravity, 20/20°C. | Flash Point, Tag Open Cup, °F. | Boiling Range, 760 mm., °C. |
|--------------------------------|------------------|--------------------------|-----------------------------------|----------------------------|--------------------------------|-----------------------------|
| Methyl isobutyl ketone | 1.6 | 3.6 | 78 | 0.8018 | 73 | 114-117 |
| Isobutyl acetate | 1.4 | 2.7 | 78 | 0.8728 | 90 | 114-118 |
| n-Butyl acetate | 1.0 | 2.7 | 82 | 0.8109 | 100 | 116-118 |
| Amyl acetate | 0.6 | 2.4 | 92 | 0.862 | 93 | 100-150 |
| MIAK | 0.50 | 4.1 | 92 | 0.813 | 110 | 141-148 |
| Methyl amyl acetate | 0.5 | 1.7 | 92 | 0.8595 | 110 | 143-150 |
| 2-Ethoxyethanol | 0.3 | 4.9 | 65 | 0.9311 | 130 | 132-136 |
| 4-Methoxy-4-methyl-pentanone-2 | 0.3 | 3.1 | 91 | 0.904 | 141 | 147-163 |
| Ethyl amyl ketone | 0.2 | 2.2 | 94 | 0.822 | 135 | 156-162 |
| 2-Ethoxyethyl acetate | 0.2 | 2.5 | 91 | 0.9748 | 150 | 145-165 |
| 4-Methoxy-4-methyl-pentanol-2 | 0.2 | 4.7 | 93 | 0.890 | 140 | 164-169 |
| Cyclohexanone | 0.2 | 5.8 | 92 | 0.945 | 129 | 153-160 |
| 2-Butoxyethanol | 0.06 | 3.33 | 96 | 0.9019 | 165 | 166-173 |
| Isophorone | 0.03 | 6.2 | 97 | 0.9229 | 205 | 205-220 |


Table 12.20: Butyrate-Acrylic Wood Lacquer—Substituting Isoamyl Ketone for 2-Ethoxyethyl Acetate (41)

| Ingredients | Part A | | Part B |
|---------------------------------------------------------|-----------|-----------|-----------|
| | Wt. % | | Wt. % |
| Half-Second Butyrate | 8.5 | | 8.5 |
| Acryloid B-66 resin (40%) ¹ | 21.3 | | 21.3 |
| Santicizer 160 plasticizer ² | 3.0 | | 3.0 |
| Dow-Corning 510 (1000 cs.) fluid ³ | 0.01 | | 0.01 |
| Eastman Inhibitor DOBP ⁴ | 0.09 | | 0.09 |
| Toluene | 26.3 | | 36.3 |
| Isobutyl acetate | 13.6 | | 13.6 |
| Isobutyl alcohol | 13.6 | | 3.6 |
| Methyl ethyl ketone | 6.8 | | 6.8 |
| MIAK | 6.8 | — | 6.8 |
| 2-Ethoxyethyl acetate | — | 6.8 | — |
| | 100 | 100 | 100 |
| Solids, % | 20.12 | 20.12 | 20.12 |
| Viscosity, cp. | 45 | 50 | 42 |
| Wt./gal., lb. | 7.45 | 7.51 | 7.50 |
| Flow out | excellent | excellent | excellent |

¹Product of Rohm and Haas Company ³Product of Dow Corning Corporation
²Product of Monsanto Chemical Company ⁴2-Hydroxy-4-dodecyloxy benzophenone

METHYL HEXYL KETONE

Octanone-2




A colorless liquid with a characteristic odor, methyl hexyl ketone is used as a solvent for vinyl compounds and dyes, and has been found particularly suitable in dispersing dyes in light petroleum oils for newsprint inks.

Table 12.21: Properties of Methyl Hexyl Ketone (2)

| | |
|----------------------------|-----------|
| Purity | 95%, min. |
| Specific gravity at 20°C. | 0.81-0.83 |
| Weight per gallon at 20°C. | 6-8 lbs. |

METHYL HEPTYL KETONE

MHK
5-Methyl-2-Octanone



Methyl heptyl ketone, a high-boiling, active solvent, imparts desirable drying characteristics in many high-temperature baked coatings.

Table 12.22: Properties of Methyl Heptyl Ketone (41)


| | | | |
|------------------------------------------------------------|---------|-------------------------------------------------|-----------------------------------|
| Molecular Weight (C ₉ H ₁₈ O), calcd | 142.24 | Color (Pt-Co Scale), ppm | 5-25 |
| Melting Point, °C | -9 | Acidity, as acetic acid, wt % | 0.018 |
| Boiling Range, °C, 760 mm | 183-195 | Water, wt % | 0.01-0.05 |
| Evaporation Rate (n-butyl acetate = 1) | 0.08 | Flash Point (Tag Closed Cup), °F (°C) | 140 (60) |
| Weight/Vol, at 20°C | | (Tag Open Cup), °F (°C) | 160 (71) |
| lb/gal (U.S.) | 6.87 | Fire Point, °F (°C) | 168 (76) |
| kg/liter | 0.83 | Flammable Limits in Air, % by volume | |
| lb/gal (Imperial) | 8.59 | Lower (at 180°F) | 0.9 |
| Solubility, 20°C, wt % | | Upper (at 313°F) | 5.9 |
| In water | 0.5 | Autoignition Temperature (ASTM D-2155), °F (°C) | 680 (360) |
| Water in | 0.95 | NFPA Classification 30: | Combustible Liquid, Class IIIA |
| Dilution Ratio, toluene | 3.0 | ICC Labels Required | None |
| VM & P naphtha | 1.0 | Bureau of Explosives Classification | Nonhazardous Liquid |
| Refractive Index, 20°C | 1.422 | | |

| Solvent | Evap Rate | Dilution Ratio | | Blush Res, % RH @ 80°F(27°C) | Sp Gr 20°/20°C | Lb/gal @20°C |
|------------------------|-----------|----------------|----------------|------------------------------|----------------|--------------|
| | | Toluene | VM & P Naphtha | | | |
| MAK | 0.4 | 3.9 | 1.2 | 93 | 0.815 | 6.80 |
| EKTASOLVE® EB Solvent* | 0.1 | 3.4 | 2.1 | 96 | 0.902 | 7.51 |
| MHK | 0.08 | 3.0 | 1.0 | 97 | 0.827 | 6.87 |
| Isophorone | 0.03 | 6.2 | 1.2 | 97 | 0.922 | 7.68 |

*EKTASOLVE EB (ethylene glycol monobutyl ether) is an Eastman product.

ETHYLBUTYL KETONE

Heptanone-3



Ethylbutyl ketone is a stable, high-boiling solvent of special value in lacquers and synthetic resin coatings. Its evaporation rate in relation to those of comparable solvents is indicated in the following tabulation:

| <u>Solvent</u> | <u>Hours</u> |
|------------------------|--------------|
| Methyl isobutyl ketone | 4.5 |
| Butyl acetate | 8 |
| Ethylbutyl ketone | 14 |
| Amyl acetate | 16 |
| Methylamyl acetate | 17 |
| Methylamyl ketone | 20 |
| "Cellosolve" acetate | 38 |
| Diisobutyl ketone | 44 |

The unusual combination of good solvent power with medium evaporation rate makes ethylbutyl ketone generally useful for coating solutions having adequate flow without unduly long drying time. It bakes out of films somewhat faster than other comparable ketones.

Table 12.23: Properties of Ethylbutyl Ketone (2)

| | |
|-----------------------------------|--------------|
| Boiling point | 147.8°C. |
| Freezing point | -36.7°C. |
| Coefficient of expansion at 20°C. | 0.00107 |
| Flash point | 125°F. |
| Solubility in water at 20°C. | 0.43% by wt. |
| Solubility of water in at 20°C. | 0.78% by wt. |
| Refractive index at 20°C. | 1.4085 |
| Specific gravity at 20/20°C. | 0.8197 |

ETHYL AMYL KETONE

EAK, 5-Methyl-3-Heptanone

Ethyl amyl ketone, a high boiling ketone, is a colorless, stable liquid with a mild pleasant odor. It is compatible with alcohols, ethers, other ketones and organic liquids, and in addition, exhibits low water miscibility. Ethyl amyl ketone's high solvency for cellulose esters, vinyl polymers




and copolymers, synthetic and natural protective coating resins, coupled with its slow evaporation rate, high blush resistance and good diluent tolerance makes it a valued surface coating raw material.

Table 12.24: Properties of Ethyl Amyl Ketone (14)

| | | | |
|-----------------------------------------|-------------|-------------------------------------------------|------|
| Apparent specific gravity, 20/20°C..... | 0.820-0.824 | Acidity (as acetic acid), % w. Max..... | 0.01 |
| 25/25°C..... | 0.816-0.820 | Water, % w. Max..... | 0.15 |
| Color, Pt-Co, Max..... | 25 | Alcohol (as ethyl amyl carbinol), % w. Max..... | 0.50 |
| Distillation range, °C..... | 156-162 | | |

DI-n-PROPYL KETONE

Heptanone-4, Butyrone, Amyl Ketone




Di-n-propyl ketone is a colorless, stable liquid having a pleasant odor. It is miscible with many organic solvents, and dissolves a wide variety of materials, some of which are crude rubber, nitrocellulose, raw and blown oils, many natural and synthetic resins like dewaxed dammar, manila, rosin, ester gum, and waxes.

Table 12.25: Properties of Di-n-Propyl Ketone (2)

| | |
|-----------------------------------------|------------------------------------------------------------|
| Boiling point | 143.7°C. |
| Coefficient of expansion | 0.001073 (per °C.) to 20°C. 0.001115 (per °C.) to 55°C. |
| Dilution ratio ("Kemsolene") | 0.8 |
| (Toluene) | 3.1 |
| Flash point (ASTM Open Cup) | 49°C. |
| Freezing point | -32.1°C. |
| Heat of combustion | 1051 cal./mol |
| Latent heat of vaporization | 75.8 cal./g. |
| Solubility in water at 20°C. | 0.53% by wt. |
| Solubility of water in solvent at 20°C. | 1.27% by wt. |
| Specific gravity at 20/20°C. | 0.8162 |
| Refractive index at 20°C. | 1.4068 |
| Specific heat at 25°C. | 0.553 cal./g. |
| Surface tension at 25°C. | 25.2 dynes/sq. cm. |
| Vapor pressure at 20°C. | 5.2 mm. Hg |
| Viscosity at 20°C. | 0.0074 poise |
| Weight per gallon at 20°C. | 6.79 lbs. |

DIISOBUTYL KETONE

Valerone



A water-white, stable liquid, miscible with most organic liquids, diisobutyl ketone has good solvency for cellulose acetate, nitrocellulose, vinyl resins, waxes, gums, natural and synthetic resins, and crude rubber. It is used principally as a high-boiler in nitrocellulose lacquers and vinyl resin coatings, where its slow evaporation rate is advantageous.

Table 12.26: Properties of Diisobutyl Ketone (41)

| Typical Properties | | | |
|-----------------------------------------------------|-------------|-------------------------------------------------|--------------------|
| Molecular Weight (C ₉ H ₁₈ O) | 142.23 | Boiling Range, 760 mm. °C | |
| Color (Pt-Co Scale), max | 20 | Initial Boiling Point, min | 163 |
| Evaporation Rate (n-butyl acetate = 1) | 0.2 | Dry Point, max | 173 |
| Weight/Vol, 20°C. | | Freezing Point, °F (°C) | -43 (-42) |
| lb/gal (U. S.) | 6.76 | Flash Point, Tag Closed Cup, °F (°C) | 120 (49) |
| kg/liter | 0.81 | Tag Open Cup, °F (°C) | 131 (55) |
| lb/gal (Imperial) | 8.11 | Fire Point, °F (°C) | 137 (58) |
| Solubility, 20°C, wt % | | Flammable Limits in Air, % by volume | |
| In water | 0.05 | Lower, at 200°F (93°C) | 0.81 |
| Water in | 0.75 | Upper, at 200°F (93°C) | 7.1 |
| Dilution Ratio, toluene | 1.5 | Autoignition Temperature (ASTM D-2155), °F (°C) | 745 (396) |
| VM & P naphtha | 0.8 | NFPA Classification 30 | II |
| Refractive Index, 20°C | 1.4230 | DOT Classification | Combustible Liquid |
| Vapor Pressure, 20°C, mm Hg | 1.7 | DOT Labels Required | None |
| Specific Gravity, 20°/20°C | 0.807-0.814 | | |

(continued)


Table 12.26: (continued)

| Solvent | Evap. Rate | Blush Res., % R. H. @ 80°F (27°C) | Solution Viscosity, 25°C, cp | | |
|-----------------------|------------|-----------------------------------|-------------------------------------|-------------------------------------|-------------------------------------------|
| | | | RS. ½-Sec Cellulose Nitrate, 10 Wt% | FPC 470 Resin ^a , 20 Wt% | Elvacite 2010 Resin ^b , 20 Wt% |
| Methyl Isoamyl Ketone | 0.5 | 89 | 50 | 34 | 68 |
| Methyl Amyl Acetate | 0.5 | 92 | 128 | Insol | Insol |
| Isobutyl Isobutyrate | 0.4 | 92 | 128 | Insol | Insol |
| Diisobutyl Ketone | 0.2 | 95 | 160 | 75 | Insol |

^aproduct of Firestone Plastics Company^bproduct of E. I. du Pont de Nemours Co., Inc.

CYCLOHEXANONE

"Sextone", "Anon", Pimelin Ketone, Keto Hexamethylene



Cyclohexanone is a colorless to pale yellow, stable liquid with an odor suggestive of peppermint. It is made by the dehydrogenation of cyclohexanol. It is miscible in all proportions with most solvents, especially the common lacquer solvents and diluents, hydrogenated and chlorinated hydrocarbons, phenols, pyridine, and turpentine. It is a good solvent for cellulose ethers, esters, basic dyes, latex, fats, blown oils, waxes, crude rubber, and such gums and resins as ester gum, alkyds, vinyls, coumarone, 100% and modified phenol resins, cyclohexanone resins and many natural resins. It forms constant-boiling mixtures with camphor, tetrachloroethane, and trichloropropane. It has a very high dilution ratio as compared with the coal-tar hydrocarbons, a fact which accounts for its excellence as a solvent, especially in the lacquer industry.

Its low rate of evaporation and strong solvent powers impart blush resistance, good flow and working qualities to lacquers and give films that are clear, smooth and glossy and show good adhesion. It is also used in spraying and brushing lacquers and as a medium boiler. It is particularly effective for blending nitrocellulose with spirit-soluble and hydrocarbon-soluble resins and oils. Its solvency for basic dyes makes it applicable in wood stains. Other uses are in the air-drying and stoving type of synthetic resins, in plastics and molding powders, in paint and varnish removers, in spot and stain removers, in metal-degreasing preparations, in polishes, printing inks, as a leveling agent in dyeing, in delustering cellulose acetate, insecticides and pharmaceuticals.

Table 12.27: Properties of Cyclohexanone (2)

| | |
|-----------------------------------------------|----------------------------|
| Boiling point | 155.6°C. |
| Color | Water-white to pale yellow |
| Dielectric constant at 25°C. | 18.2 |
| Evaporation rate, approximate (toluene = 100) | 20 |
| Flash point (open cup) | 130°F. |
| Freezing point | -45°C. |
| Solubility in water at 20°C. | 8.7% |
| Specific gravity at 20°C. | 0.944 - 0.950 |
| Specific heat 15° to 18°C. | 0.433 cal./g. |
| Refractive index | 1.443 - 1.451 |
| Viscosity (SUV at 100°F.) | 33 |
| Weight per gallon at 20°C. | 7.9 lbs. |
| Acidity | Neutral |
| Distillation range | 95% within 151° - 157°C. |
| Purity | 98 - 100% |
| Residue | 0.02% |
| Water content | 0.2% max. |

Table 12.28: Resin Solubility in Cyclohexanone (19)

| Resin | Manufacturer | Viscosity at 25°C., cps. (1) | Toluene Dilution (2) | Heptane Dilution (2) |
|--------------------------------------------------------|--------------|------------------------------------|----------------------------|----------------------------|
| Acrylic | | | | |
| "Acryloid" B-82 | Rohm & Haas | 32 | >50 | 2 |
| "Elvacite" 2010 | DuPont | 54 | >50 | 7 |
| Cellulosics | | | | |
| Cellulose Acetate AB-141-95 (14% acetyl) | Eastman | 9200 | 28 | 6.5 |
| Cellulose Acetate Butyrate EAB-171-2 (17% butyryl) | Eastman | 892 | 34 | 9.5 |
| Cellulose Acetate Butyrate EAB-381-20 (37% butyryl) | Eastman | 5060 | >50 | 14 |
| Ethyl Cellulose (N-22, 24 sec.) | Hercules | 1408 | >50 | 23 |
| Half Second Butyrate AB-H | Eastman | 242 | >50 | 17 |
| "Hercose" "C" Type A | Hercules | 806 | 38 | 8.5 |
| Nitrocellulose (RS 1 1/2 sec.) | Hercules | 218 | >50 | 10.5 |
| Styrene | | | | |
| Polystyrene | -- | 96 | >50 | 24 |
| SMA 4000A | Sinclair | 19 | >50 | 14.5 |
| Vinyl | | | | |
| BAKELITE Vinyl Resin AYAF | UCC | 74 | >50 | 7 |
| BAKELITE Vinyl Resin YVHH | UCC | 68 | >50 | 14.5 |
| BAKELITE Vinyl Resin XYHL | UCC | (3) | — | — |
| "Saran" F-120 (1000 cps.) | Dow | 484 | 21 | 6.5 |
| Epoxy | | | | |
| BAKELITE Epoxy Resin EKR 2002 | UCC | 21 | >50 | 9.5 |
| Urethane | | | | |
| "Estane" 5701F1 | Goodrich | 282 | 14 | 4.5 |
| "Estane" 5707F1 | Goodrich | 388 | 6 | 2 |
| Rosin-Ester | | | | |
| "Amberol" 801 LT | Rohm & Haas | 14 | >50 | 19 |
| "Cellolyn" 104 | Hercules | 20 | >50 | < 1 |
| Melamine-Formaldehyde | | | | |
| "Cymel" 300 | Am. Cyanamid | 16 | >50 | >50 |
| Alkyd | | | | |
| "Beckasol" # 7 | Reichhold | 28 | >50 | 47 |
| "Beckasol" #31 | Reichhold | 25 | >50 | >50 |
| Rubber | | | | |
| "Parlon" S-20 (18 cps.) | Hercules | 46 | >50 | 22 |
| "Pliolite" S-5 | Goodyear | 56 | >50 | 30 |
| Phenolic | | | | |
| BAKELITE Phenolic Resin BKR 2620 | UCC | 23 | 16 | 5.5 |
| Phenoxy | | | | |
| BAKELITE Phenoxy Resin PKHH | UCC | Insoluble | — | — |

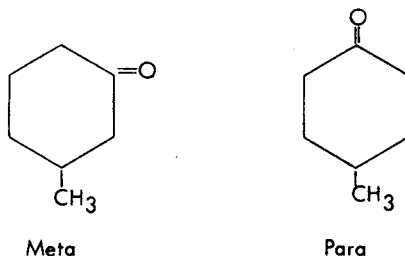
(1) 10 grams resin, 90 grams cyclohexanone

(2) 10 grams of 10% resin solution, titrated with diluent (in ml.)

(3) Partially soluble

METHYL CYCLOHEXANONE

Methyl "Anon", "Sextone" B



Methyl cyclohexanone is a water-white to pale yellow liquid with an acetone-like odor. It is a mixture of two isomeric cyclic ketones made by the dehydrogenation of methyl cyclohexanol. It closely resembles cyclohexanone in its physical properties, miscibility, tolerance for non-solvents and solvent action. It differs from cyclohexanone in its somewhat slower evaporation rate and lower dilution ratios with aromatic hydrocarbons. Methyl cyclohexanone is especially suitable for phenolic and alkyd resins, crude rubber, nitrocellulose, ester gum and kauri. It is also an excellent agent for blending pyroxylin with resins, oils and rubber in lacquers. It is used in crystalizing lacquers, where its low evaporation rate retards evaporation sufficiently to permit crystal growth. It is also used in slow-setting varnish removers and in rubber cements.

Table 12.29: Properties of Methyl Cyclohexanone (2)

| | |
|------------------------------------------------|--------------------------|
| Boiling point | 169.0° - 170.5°C. |
| Evaporation rate (approximate) (toluene = 100) | 20 |
| Flash point | 53°C. |
| Freezing point | -70°C. |
| Refractive index at 25°C. | 1.442 - 1.446 |
| Solubility in water at 20°C. | 2 - 3% |
| Specific gravity at 25/4°C. | 0.910 - 0.914 |
| Viscosity (SUV at 100°F.) | 33 |
| Weight per gallon | 7.6 lbs. |
| Distillation range | 165.0° - 172°C. |
| | 95% distills within 3.0° |
| Purity | 98 - 100% |
| Residue | None |
| Water content | 0.2%, max. |


METHYL ACETONE

Methyl Ketone

Methyl acetone is a clear, colorless, flammable, volatile liquid, obtained from the product of the destructive distillation of wood. Although it varies in composition it is generally composed of acetone 35 to 60%, methanol 20 to 40%, and methyl acetate 20 to 30%.

DIACETONE ALCOHOL

Diacetone
4-Hydroxy-4-Methylpentanone-2
"Pyranton A"
Diacetonyl Alcohol



Diacetone alcohol is a flammable liquid that is colorless when pure, becoming yellow on aging; it has a mint-like odor. Made by the condensation of acetone, the commercial product contains up to 15% of acetone. For this reason the technical product is superior in its solvent power to the acetone-free grade. It is miscible with most organic liquids, as well as with water. It is a good solvent for cellulose acetate, nitrocellulose, cellulose acetobutyrate, cellulose acetopropionate, hydrocarbons, oils, fats, resins, gums and dyes. It has only limited solvency for dammar gum, polyvinyl acetate and the petroleum resins. A high-boiling solvent, diacetone alcohol also exhibits the desirable properties of reducing the viscosities of organic solutions of high solids content, and of minimizing temperature effects on viscosities. In most respects it is quite similar to acetone with the exception of a very much slower rate of evaporation.

It is used in cellulose ester lacquers, particularly of the brushing type, where it produces brilliant gloss and hard film and where its lack of odor is desirable. It is used in lacquer thinners, dopes, wood stains, wood preservatives and printing pastes; in coating compositions for paper and textiles; in making artificial silk and leather; in imitation gold leaf; in celluloid cements; as a preservative for animal tissue; in metal-cleaning compounds; in the manufacture of photographic film; and in hydraulic brake fluids, where it is usually mixed with an equal volume of castor oil.


Diacetone alcohol is available in two grades: technical, containing up to 15% acetone, and acetone-free.

Table 12.30: Physical Properties of Acetone-Free Diacetone Alcohol (2)

| | |
|------------------------------------|----------------------------|
| Boiling point at 760 mm. | 167.9°C. |
| Coefficient of expansion (Cubical) | 0.000533 per °F. |
| Color | Water-white to light straw |
| Flash point (open cup) | 144°F. |
| Heat of combustion | 8,601 cal./g. |
| Melting point | -47°C. |
| Specific gravity at 20/20°C. | 0.937-0.946 |
| Refractive index at 20°C. | 1.4235 |
| Viscosity (Saybolt) | |
| 113 seconds at | -12°C. |
| 674 seconds at | -30°C. |
| 1,980 seconds at | -48°C. |
| Weight per gallon at 20°C. | 7.83 lbs. |
| Acidity (as acetic) | 0.05% |
| Distillation range at 760 mm. | |
| Below 135°C. | None |
| Below 158°C. | Not more than 5% |
| Above 170°C. | None |
| Nonvolatile matter | 0.005% by wt. (max.) |

ACETONYL ACETONE

Hexanedione-2,5




Acetonyl acetone, a diketone, is a water-white liquid with an agreeable odor. It is completely soluble in water, almost entirely soluble in such substances as toluene, kauri gum and rosin, and only partly soluble in raw linseed oil, shellac, dewaxed dammar and ester gum. It has been suggested as an intermediate in the manufacture of rubber accelerators, dyes, inhibitors, insecticides, and pharmaceuticals and for the preparation of derivatives of thiophene, furan and pyrrole. It may also be employed in tanning hides and skins.

Table 12.31: Properties of Acetonyl Acetone (2)

| | |
|------------------------------|-----------------------------------------------------------|
| Boiling point | 191.4°C. |
| Dilution ratio (xylene) | 1.8 |
| Flash point | 158°F. |
| Specific gravity at 20/20°C. | 0.9710–0.9760 |
| Solubility in water at 20°C. | Complete |
| Vapor pressure at 20°C. | 0.5 mm. Hg |
| Weight per gallon at 20°C. | 8.10 lbs. |
| Acidity (as acetic) | 0.020% by wt., max. |
| Boiling range at 760 mm. | 185° to 195°C. |
| Purity | 98.0% by wt., min. |
| Water | Miscible with 19 vol. 60° B \acute{e} gasoline at 20°C. |

MESITYL OXIDE

4-Methyl-3-Pentenone-2
Isopropylidone Acetone
Methyl Isobutenyl Ketone



Mesityl oxide is an unsaturated, medium-boiling ketone made by the dehydration of diacetone alcohol. It is a colorless to straw-yellow, oily liquid with a peppermint-like odor. It will darken and form a solid residue on exposure and aging. It is miscible with most organic liquids and it is a good solvent for such substances as nitrocellulose, ethylcellulose, low-viscosity cellulose acetate, polyvinyl chloride, vinyl resins, hydrocarbons, raw linseed oil, kauri gum, rosin, ester gum and synthetic rubber. It will only partly dissolve shellac and dewaxed dammar.


Mesityl oxide is used in lacquers and thinners where its presence in the solution lowers the viscosity and gives it both a high tolerance for hydrocarbons and resistance to humidity. Its excellent solvent power for gums and resins is especially applicable in vinyl-type resins, where it produces films that are tough, glossy and have good flow; its presence permits use of larger proportions of aromatic hydrocarbon diluents.

Table 12.32: Properties of Mesityl Oxide (2)

| | |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------|
| Boiling point at 760 mm. | 129.5°C. |
| Coefficient of expansion | 0.000599 per °F. |
| Color | Straw-yellow |
| Dielectric constant at 20°C. | 15.4 |
| Flash point (Tag closed cup) | 83°F. |
| Heat of combustion | 846.7 Cal. per mol |
| Heat of vaporization | 85.9 cal./g. |
| Melting point | -59°C. |
| Solubility in water at 25°C. | 3.4% by vol. |
| Solubility of water in solvent at 20°C. | 3.4% by wt. |
| Specific gravity at 20/20°C. | 0.853–0.856 |
| Specific heat (21–121°C.) | 0.521 cal./g. |
| Refractive index at 20°C. | 1.4456 |
| Vapor pressure at 20°C. | 8.0 mm. Hg |
| 30°C. | 14.3 mm. Hg |
| 40°C. | 24.5 mm. Hg |
| Viscosity at 25°C. | 8.79 millipoises |
| Weight per gallon at 20°C. | 7.12 lbs. |
| Acidity (as acetic) | 0.05%, max. |
| Distillation range (ASTM) | Below 120°C. None Above 135°C. None More than 95% distills over below 131°C. |
| Purity | 95% by wt., min. |
| Water | Miscible without turbidity with 19 vols. of 60° B \acute{e} gasoline at 20°C. (approx. 0.20% by wt.) |

ISOPHORONE

3,5,5-Trimethylcyclohexene-2-one-1



Isophorone is a stable, colorless, volatile liquid with a mild odor. It is only slightly soluble in water, but miscible with most lacquer solvents. It is an excellent solvent for many types of cellulose esters, cellulose ethers, oils, fats, gums and resins, both natural and synthetic. It is the most powerful solvent for nitrocellulose and "Vinylite" resins. Isophorone has one of the highest aromatic hydrocarbon dilution ratios for nitrocellulose—5.7 for toluene and 5.1 for xylene. It will dissolve 30% of "Vinylite" resin without gelling. At ordinary temperatures solutions can be made of 1/2 second RS nitrocellulose containing 45% solids. Isophorone is used in the manufacture of coatings, inks, stencil pastes and as a thinner in synthetic resin finishes.

Table 12.33: Properties of Isophorone (2)

| | |
|-----------------------------------------|------------------------------------------------------------------------------------------|
| Boiling point at 760 mm. | 215.2°C. |
| Dilution ratios | |
| Toluene | 5.7 |
| Xylene | 5.1 |
| "Trluoil" | 1.0 |
| Mineral spirits | 0.7 |
| Flash point (open cup) | 205°F. |
| Freezing point | -8.1°C. |
| Solubility in water at 20°C. | 1.2% by wt. |
| Solubility of water in solvent at 20°C. | 3.8% by wt. |
| Specific gravity at 20/20°C. | 0.9200-0.9250 |
| Vapor pressure at 20°C. | 0.25 mm. Hg |
| Weight per gallon at 20°C. | 7.68 lbs. |
| Acidity (as acetic) | 0.02% by wt., max. |
| Distillation range at 760 mm. | 205°-220°C. |
| Color | Not darker than 0.05 g. K ₂ Cr ₂ O ₇ per l. of water |
| Purity | 98.0% by wt., min. |
| Water content | Miscible with 19 vol. 60° Bé gasoline at 20°C. |

FENCHONE

Fenchone is a liquid ketone closely resembling camphor.






Table 12.34: Properties of Fenchone (2)


| | | | |
|-----------------------------|------------------------|---------------------------------------------|----------|
| Boiling point | 191.0°C. | <u>Distillation Range</u> | |
| Dilution ratio: | | <u>(Calculated from 50:50 Min. Spirits)</u> | |
| with coal-tar naphtha | 1.3 final conc. 8.0 | | |
| with hi-flash naphtha | 1.2 final conc. 8.2 | 5% | 193.0°C. |
| Kauri-butanol | All proportions in 50% | 10% | 193.4°C. |
| | sol. with mineral | 20% | 193.8°C. |
| | spirits 131 | 40% | 194.2°C. |
| Optical activity | +7.4 | 60% | 194.5°C. |
| Refractive index at 20°C. | 1.4625 | 80% | 195.4°C. |
| Specific gravity at 15.5°C. | 0.9457 | 90% | 196.0°C. |
| Aniline point (-) | 54°C. | 95% | 197.5°C. |

BETA-PROPIOLACTONE

BPL



Beta-Propionic Acid Derivatives




Hydracrylic Acid Derivatives

Table 12.35: Physical Properties of Beta-Propiolactone (42)

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Physical state | Liquid |
| Color | Colorless |
| Odor | Pungent, acrylic |
| Boiling point at 10 mm Hg, deg C | 51 |
| 100 mm Hg | 100.0 |
| 400 mm Hg | 139.7 |
| 760 mm Hg | 162.3 |
| Melting point, deg C | −33.4 |
| Refractive index n_D^{20} | 1.4131 |
| Specific gravity, 20/20 C | 1.1490 |
| Pounds per gallon at 20 C | 9.56 |
| Flash point, Tag open cup, deg F | 165 |
| Solubility: BPL is miscible at room temperature with most organic solvents such as ether, alcohol (reacts), benzene, acetone, and acetic acid. Solubility in water at 25 C is 37 per cent by volume, with moderately fast hydrolysis to hydroxypropionic (hydracrylic) acid. | |

GAMMA-BUTYROLACTONE

BLO



Gamma-butyrolactone is a powerful solvent and undergoes many reactions that make it of considerable interest in synthesis. It is a colorless hygroscopic liquid over a wide temperature range. It is soluble in acetone, benzene, carbon tetrachloride, ethyl ether, methanol, monochlorobenzene and water in all proportions.

Table 12.36: Properties of Gamma-Butyrolactone (49)

| | | | | | |
|------------------------------|--------------|---------------------------------|---------------|-------------------------------------------------|--------------|
| Appearance | clear liquid | Specify gravity (d_4^{25}) | 1.124 | Heat of combustion | 492 kcal/mol |
| Color (APHA) | .40 | Flash point, tag closed cup | .93°C (200°F) | Specific heat (25°C) | 0.40 cal/g°C |
| Purity | .99.5% min. | Fire point | .99°C (210°F) | (60°C) | 0.45 cal/g°C |
| Moisture | .0.1% max. | pH (10% aqueous solution) | 4.5 | Dielectric constant (20°C) | .39 |
| Free acid, as hydroxybutyric | .0.1% max. | Refractive index (n_D^{25}) | 1.435 | Critical pressure | 500 psi |
| Molecular weight | .86 | Heat of vaporization, | | (35 kg/cm ²) | |
| Boiling point | .204°C | Clausius-Clapeyron | | Critical temperature | .436°C |
| Freezing point | −44°C | (calc) | .133 cal/g | Solubility: soluble in acetone, benzene, carbon | |
| Viscosity (25°C) | .1.7 cp | Heat of solution | 598 cal/mol | tetrachloride, ethyl ether, methanol, | |
| | | | | chlorobenzene, and water in all proportions. | |
| | | | | (continued) | |

Table 12.36: (continued)

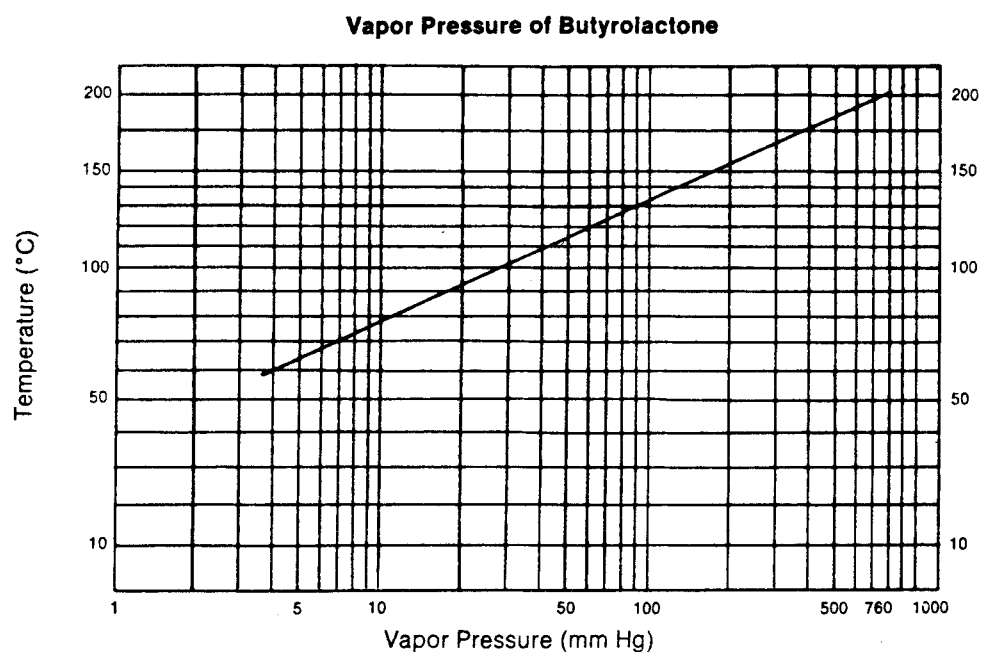


Table I. Percentage of Butyrolactone Hydrolyzed under Acid Conditions as Function of Time, Temperature, and Concentration

| Concentration (%) | | Time (hours) | | | | | | | |
|-------------------|------------|------------------|------|------------------|-------|------------------|-------|------------------|-------|
| | | 1 | | 3 | | 5 | | 24 | |
| BLO | Dilute HCl | Room Temperature | 65°C | Room Temperature | 65°C | Room Temperature | 65°C | Room Temperature | 65°C |
| 99 | 1 | — | — | — | 0.34 | — | 0.54 | — | 0.56 |
| 98 | 2 | — | 0.32 | 0.24 | 0.97 | 0.42 | 1.18 | 0.97 | 1.21 |
| 95 | 5 | — | 0.73 | 0.49 | 2.35 | 0.68 | 2.53 | 1.94 | 3.11 |
| 90 | 10 | — | 1.23 | 0.59 | 4.43 | 0.99 | 4.87 | 3.14 | 5.95 |
| 80 | 20 | 0.28 | 2.17 | 1.02 | 8.15 | 1.62 | 9.15 | 5.52 | 10.95 |
| 50 | 50 | 0.92 | 6.48 | 2.57 | 15.98 | 4.07 | 17.92 | 12.10 | 18.41 |

BUTYROLACTONE refers to gamma butyrolactone

Table II. Percentage of Butyrolactone Hydrolyzed at pH 7 as Function of Time and Concentration*

| Concentration (%)† | | Time (hours) | | |
|--------------------|------------------|--------------|------|------|
| BLO | H ₂ O | 8 | 24 | 48 |
| 80 | 20 | — | 0.33 | 1.7 |
| 50 | 50 | 1.7 | 11.1 | 17.4 |

*Tests were conducted at 65°C. No observable hydrolysis was detected at room temperature.

†At concentrations of up to 10 per cent water, no hydrolysis was observed in 48 hours.

(continued)

Table 12.36: (continued)

**Table III. Bunsen Coefficients of Butyrolactone
(cc gas/cc solvent converted to STP)**

| Gas | 25°C | 45°C | 75°C |
|------------------|--------------|-------|-------------|
| Hydrogen | 0.12 | 0 | 0 |
| Carbon Monoxide | 0.09 | 0.044 | 0 |
| Carbon Dioxide | 3.6 | 2.7 | 1.1 |
| Methyl Acetylene | 37.8 | 12.5 | 10.8 |
| Acetylene | 11.8 | 8 | 1.45 |
| Vinyl Acetylene | 145.1 (27°C) | 33.1 | 23.1 (73°C) |

Table IV. Solubilities of Compounds in Butyrolactone

| Compound | % Soluble |
|-------------------------------------------------------------|------------------|
| Acrylonitrile, (high) spec. vis. 8.5 ^a | >10 ^b |
| Acrylonitrile, (low) spec. vis. 3.18 ^a | >16 ^b |
| Acrylonitrile, (low) spec. vis. 2.45 ^a | 20 ^b |
| Acrylonitrile, (low) spec. vis. 2.11 ^a | 20 ^b |
| "Amberol" Resin 820 (Rohm & Haas) | 50 |
| "Aroclor" (60% Cl), chlorinated biphenyl (Monsanto) | 50 |
| Cellulose Acetate | 5 ^c |
| Cellulose Acetate Butyrate | 10 |
| Cellulose Acetate Propionate | 10 |
| Cellulose Nitrate | 25 |
| "Clorafin" (70% Cl), chlorinated paraffin (Hercules Powder) | 50 |
| DDT | 50 |
| "Epon" 1007, epoxy resin (Shell Chemical) | 25 |
| "Epon" 1009, epoxy resin (Shell Chemical) | 25 |
| Ester Gum | 50 ^c |
| Ethyl Cellulose | 25 ^c |
| "Formvar," polyvinyl formal resin (Monsanto) | > 5 |
| "Geon" Polyblend, polyvinyl chloride (Goodrich) | >10 ^c |
| "Geon" 102, polyvinyl chloride (Goodrich) | > 5 ^c |
| "Geon" 202, polyvinyl chloride (Goodrich) | >10 ^c |
| HET Anhydride | 60 ^c |
| Methyl Methacrylate Polymer | 25 |
| Methyl Vinyl Ether Polymer | 50 |
| "Neolyn" 23 Resin (Hercules Powder) | 50 |
| "Parlon," chlorinated rubber (Hercules Powder) | >25 |
| Polyvinyl Butyral | 25 ^c |
| Pyromellitic Acid | 20 |
| "Saran" F-120, vinylidene chloride (Dow Chemical) | >10 |
| Shellac | 25 |
| Polystyrene | >25 |
| Vinyl Acetate Polymer | >25 |
| 1-Vinyl-2-Pyrrolidone Polymer | >25 |
| 9-Vinylcarbazole, Monomer and Polymer | >25 |
| "Vinylite" VYNW, vinyl chloride resin (Union Carbide) | > 5 ^c |
| "Vinylite," XYSG, vinyl resin (Union Carbide) | 10 ^c |

^a 1 gram polymer dissolved in 100 ml BLO.

^b Heated for 1 hour at 100°C. and then cooled to room temperature.

^c Solubility after 1 hour at 100°C.

BUTYROLACTONE refers to gamma butyrolactone

COMPARATIVE DATA

Table 12.37: Ashland Ketones (69)

| PRODUCT | LB./GAL. | SP. GR. | BOILING RANGE | | FL. PT. | EVAP. RATE ¹ |
|-------------------------|----------|-----------|---------------|---------|---------|-------------------------|
| | 20° C | 20°/20° C | °C | °F | °F TCC | |
| Acetone | 6.59 | 0.790 | 55-56 | 131-133 | -4 | 14.4 |
| Methyl Ethyl Ketone | 6.71 | 0.806 | 78-81 | 172-178 | 24 | 5.7 |
| Methyl Propyl Ketone | 6.72 | 0.807 | 101-105 | 214-221 | 46 | 2.3 |
| Methyl Isobutyl Ketone | 6.67 | 0.802 | 114-117 | 237-243 | 60 | 1.6 |
| Methyl Isoamyl Ketone | 6.78 | 0.813 | 141-148 | 286-298 | 98 | 0.47 |
| Diacetone Alcohol, A.F. | 7.82 | 0.939 | 145-172 | 293-342 | 126 | 0.12 |
| Methyl Amyl Ketone | 6.80 | 0.818 | 147-154 | 297-309 | 102 | 0.40 |
| Cyclohexanone | 7.88 | 0.946 | 156-158 | 313-316 | 111 | 0.20 |
| Diisobutyl Ketone | 6.75 | 0.809 | 163-173 | 325-343 | 120 | 0.20 |
| Isophorone | 7.68 | 0.922 | 210-218 | 410-424 | 179 | < 0.05 |

¹n-Butyl Acetate = 1

Table 12.38: Chemcentral Ketones and Miscellaneous Active Solvents (67)

| KETONES & MISC. ACTIVE SOLVENTS | CAS | Mols Weight | % Purity Comm. Prod. | Spec. Grav. @ 20/20°C | Lbs. / Gal. @ 20°C | Coeff. of Expan. Per °C | Δ Sp. Gr. Per °C | Refractive Index @ 20°C | Distillation Range @ 760 mm Hg | | Vapor Press. @ 20°C mm Hg |
|---------------------------------|----------|-------------|----------------------|-----------------------|--------------------|-------------------------|------------------|-------------------------|--------------------------------|-------------------------|---------------------------|
| | | | | | | | | | °C | °F | |
| ACETONE | 67-64-1 | 58.08 | 99.5 | 0.792 | 6.59 | 0.00151 | 00102 | 1.3584 | 55.5-56.5 | 132-134 | 185.0 |
| CYCLOHEXANONE | 108-94-1 | 98.14 | 99.8 | 0.948 | 7.89 | 0.00091 | 00064 | 1.4507 | 154-157 | 309-315 | 7.0(30°) |
| DIACETONE ALCOHOL A F | 123-42-2 | 116.16 | 99 | 0.939 | 7.82 | 0.00100 | 00072 | 1.4234 | 145-172 | 295-342 | 1.0 |
| DIISOBUTYL KETONE (DIBK) | 108-83-8 | 142.23 | 95 | 0.808 | 6.72 | 0.00105 | 00066 | 1.4230 | 163-173 | 325-343 | 1.4 |
| DIMETHYL FORMAMIDE (DMF) | 68-12-2 | 73.09 | | 0.951 | 7.92 | 0.00100 | 00072 | 1.4269 | (95%) 2° Incl. 153° | (95%) 3.6° Incl. 307.4° | 2.8 |
| FURFURAL | 98-01-1 | 96.08 | 98 | 1.160 | 9.68 | | 00110 | 1.5261 | 161.7-BP | 323.1-BP | 1.7 |
| ISOPHORONE | 78-59-1 | 138.20 | 98 | 0.923 | 7.68 | 0.00087 | 00058 | 1.4775 | 215-220 | 418-428 | 0.2 |
| METHYL AMYL KETONE (MAK) | 110-43-0 | 114.19 | | 0.817 | 6.80 | | | | 149-151 | 300-304 | |
| METHYL ETHYL KETONE (MEK) | 78-93-3 | 72.10 | 99.9 | 0.806 | 6.71 | 0.00128 | 00084 | 1.3787 | 79-80 | 174-176 | 85.0 |
| METHYL ISOAMYL KETONE (MIAK) | 110-12-3 | 114.2 | 97.5 | 0.813 | 6.78 | 0.00091 | | | 141-148 | 287-297 | |
| METHYL ISOBUTYL KETONE (MIBK) | 108-10-1 | 100.16 | 99.8 | 0.802 | 6.67 | 0.00120 | 00078 | 1.3958 | 114-117 | 237-243 | 16.0 |
| METHYL n-PROPYL KETONE (MPK) | 107-87-9 | 86.13 | 99 | 0.808 | 6.73 | 0.00125 | 00082 | 1.3895 | 97-107 | 206-225 | 26.9 |
| TETRA HYDRO FURAN (THF) | 109-99-9 | 72.10 | | 0.888 | 7.40 | | | 1.4073 | 65-67 | 149-153 | 45.0 |
| 2-NITROPROPANE (NiPar** S-20) | 79-46-9 | 89.09 | 94 | 0.992 | 8.24 | 0.00104 | | 1.3941 | 119-122 | 246-252 | 12.9 |

| KETONES & MISC. ACTIVE SOLVENTS | Evap. Rate vs. B. Acet. = 1 | Solubility % by Wt. @ 20°C | | Dilution Ratio | | Bl. Res. % Rel. Hum. @ 80°F | V. % NC @ 25°C CPB | Freeze Point °C | Flash Point T.C.C. °F | Explosive Limits % by Vol. In Air | | Solubility Parameter |
|---------------------------------|-----------------------------|----------------------------|---------------------|----------------|--------|-----------------------------|--------------------|-----------------|-----------------------|-----------------------------------|-------|----------------------|
| | | In H ₂ O | Of H ₂ O | Toluol | Lactol | | | | | Lower | Upper | |
| | | | | | | | | | | | | |
| ACETONE | 7.7 | ∞ | ∞ | 4.6 | 0.7 | < 20 | 12 | -95 | -4 | 2.6 | 12.8 | 10.0 |
| CYCLOHEXANONE | 0.31 | 2.3 | 8.0 | 6.1 | 1.2 | 92 | 76 | -47 | 129 | 1.1 | 8.6 | 9.7 |
| DIACETONE ALCOHOL A F | 0.14 | ∞ | ∞ | 3.0 | 0.5 | 76 | 130 | -42.8 | 126 | 1.8 | 6.9 | 9.2 |
| DIISOBUTYL KETONE (DIBK) | 0.2 | 0.05 | 0.75 | 1.5 | 0.8 | 95 | 68 | -41.5 | 120 | 0.8 | 6.2 | 7.8 |
| DIMETHYL FORMAMIDE (DMF) | 0.17 | ∞ | ∞ | | | | | -61 | 136 | 2.2 | 15.2 | 1.21 |
| FURFURAL | | 8.3 | 4.8 | | | | | -36.5 | 152 ^a | 2.1 | 19.3 | |
| ISOPHORONE | 0.03 | 1.2 | 4.3 | 6.2 | 1.2 | 96 | 117 | -8.1 | 179 | 0.8 | 3.8 | 9.1 |
| METHYL AMYL KETONE (MAK) | 0.4 | 0.46 | 1.31 | 3.9 | 1.2 | 93 | 26 | | 102 | | | 9.0 |
| METHYL ETHYL KETONE (MEK) | 4.6 | 27.0 | 12.5 | 4.3 | 0.9 | 45 | 14 | -86.9 | 23 | 1.8 | 10.0 | 9.3 |
| METHYL ISOAMYL KETONE (MIAK) | 0.5 | 0.5 | 1.2 | 4.1 | 1.2 | 89 | 27 | | 96 | | | 8.3 |
| METHYL ISOBUTYL KETONE (MIBK) | 1.6 | 2.0 | 1.0 | 3.5 | 1.0 | 78 | 23 | -80.3 | 60 | 1.2 | | 8.4 |
| METHYL n-PROPYL KETONE (MPK) | 2.5 | 4.3 | 3.3 | 3.9 | 1.0 | 70 | 16 | -77.5 | 45 | 1.4 | 7.5 | 8.9 |
| TETRA HYDRO FURAN (THF) | 6.3 | ∞ | ∞ | 2.8 | 1.0 | 50 | 22 | | 4 | 2.0 | 11.8 | 9.9 |
| 2-NITROPROPANE (NiPar** S-20) | 1.10 | 1.7 | 0.6 | 1.2 | 0.4 | 82 | 64 | -163 | 82 | 2.6 | | 9.1 |

**Trademark Angus

^a Tag Open Cup Flash Point

^b at 25°C

Table 12.39: Eastman Chemical Ketones (41)

| | Evaporation Rate n-BuOAc = 1 | Lb/ Gal @ 20°C | Color Pt-Co Max | Specific Gravity @ 20°/20°C | Acidity, as Acetic Acid Max Wt % | Boiling Range °C | Freezing Point °C | Flash Point TCC °C (°F) | Assay Min Wt % |
|--------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------|-----------------------|-----------------------------------|----------------------------------------|------------------------|-------------------------|-------------------------------|----------------------|
| Acetone CH ₃ COCH ₃ | 5.7 | 6.59 | 5 | 0.792 | 0.004 | 55-57 | -95 | -20 (-4) | 99.5 |
| Methyl n-Propyl Ketone (MPK) ^a CH ₃ COC ₃ H ₇ | 2.3 | 6.74 | 15 | 0.810 | 0.02 | 101-105 | -86 | 8 (46) | 90.0 |
| Methyl Isobutyl Ketone (MIBK) ^a CH ₃ COCH ₂ CH(CH ₃) ₂ | 1.6 | 6.67 | 10 | 0.802 | 0.01 | 114-117 | -84 | 16 (60) | 99.0 |
| Methyl Isoamyl Ketone (MIAK) ^a CH ₃ COC ₂ H ₄ CH(CH ₃) ₂ | 0.5 | 6.76 | 10 | 0.813 | 0.02 | 141-148 | -74 | 36 (96) | 98.0 |
| Methyl n-Amyl Ketone (MAK) ^{a,b} CH ₃ COC ₅ H ₁₁ | 0.4 | 6.80 | 10 | 0.818 | 0.02 | 147-154 | -33 | 39 (102) | 98.0 |
| Diisobutyl Ketone (DIBK) (CH ₃) ₂ CHCH ₂ COCH ₂ CH(CH ₃) ₂ | 0.2 | 6.76 | 20 | 0.811 | 0.02 | 163-176 | -42 | 49 (120) | — |
| EASTMAN [®] C-11 Ketone | 0.02 | 7.02 | 75 | 0.84 | 0.10 | 175-250 | -8 | 84 (184) (seta-flash) | — |

^aUrethane grade^bKosher certified

Table 12.40: Exxon Ketones (8)

| | Methyl Ethyl Ketone | Methyl Isobutyl Ketone |
|----------------------------------|------------------------|---------------------------|
| Distillation Range, °C | 79-81 | 114-117 |
| Specific Gravity, 20°/20°C | 0.81 | 0.80 |
| Viscosity @ 25°C, cp | 0.4 | 0.6 |
| Vapor Pressure @ 20°C, mmHg | 80 | 15 |
| Density @ 20°C, lb/gal | 6.71 | 6.68 |
| Flash Point, TCC °C* | 21 | 62 |
| Acidity, wt % MAX** | 0.003 | 0.01 |
| Evaporation Rate, n-BuAc=100 | 572 | 165 |
| Purity, wt % (MIN) | >99.5 | >99.0 |
| Hildebrand Solubility Parameter | 9.3 | 8.6 |
| Surface Tension @ 20°C, dynes/cm | 25 | 24 |
| Water Content, wt % (MAX) | 0.1 | 0.1 |
| Water Solubility @ 25°C, wt % | | |
| In water | 26.3 | 1.7 |
| Water in | 11.8 | 1.9 |
| Inhalation TLV*** | 200 | 50 |
| CAS Registry Number | 78-93-3 | 108-10-1 |

*Tag Closed Cup, ASTM D 56 **As acetic acid

***Threshold Limit Value is a registered trademark of the ACGIH

Table 12.41: Hoechst-Celanese Ketones (42)

| Physical Properties | | | |
|-------------------------------------------------|--------------------------|------------------------------------------------|--------|
| Autoignition Temperature, °C | 515.5 | Heat of Combustion, kg-cal/g mole | 582.3 |
| Boiling Point at 760 mm Hg, °C | 79.6 | Heat of Fusion, cal/g mole | 1.78 |
| Boiling Point at 760 mm Hg, °F | 175.3 | Heat of Vaporization, btu/lb at 20°C | 212.4 |
| Coefficient of Thermal Expansion per °C at 20°C | 1.126 x 10 ⁻³ | Molecular Weight | 72.11 |
| Critical Pressure, atmospheres | 41.0 | Refractive Index, n _D ²⁰ | 1.3787 |
| Critical Temperature, °C | 252.5 | Solubility at 20°C at wt % in water | 26.8 |
| Dielectric Constant, 20°C | 15.45 | water in | 12.5 |
| Evaporation Rate (BuAc = 1) | 5.7 | Specific Gravity, 20/20°C | 0.8062 |
| Flammable Limits | | Specific Heat of Liquid, at 20°C, cal/g | .525 |
| (lower limit, vol %) | 2.0 | Surface Tension at 20°C, dynes/cm | 24.6 |
| (upper limit, vol %) | 11.0 | Vapor Density (air = 1) | 2.5 |
| Flash Point, Tag Open Cup, °F | 30 | Vapor Pressure, at 20°C, mm Hg | 77.5 |
| Tag Closed Cup, °F | 20 | Viscosity at 25°C, centipoise | 0.40 |
| Freezing Point, °C | -86.7 | Weight, pounds per gallon at 20°C | 6.71 |

Table 12.42: Shell Chemical Ketones (14)

| | Typical properties of the compounds | | | |
|-----------------------------------------------|-------------------------------------|---------------------|------------------------|-------------------|
| | Acetone | Methyl ethyl ketone | Methyl isobutyl ketone | Diacetone alcohol |
| Molecular weight | 58.080 | 72.108 | 100.162 | 116.162 |
| Specific gravity (apparent) | | | | |
| 60/60°F | 0.7967 | 0.8105 | 0.8055 | 0.9441 |
| 20/20°C | 0.7925 | 0.8065 | 0.8022 | 0.9409 |
| 25/25°C | 0.7879 | 0.8023 | 0.7986 | 0.9374 |
| Weight per U.S. gallon (in air) | | | | |
| 60°F | 6.636 | 6.750 | 6.709 | 7.863 |
| 20°C | 6.595 | 6.711 | 6.676 | 7.830 |
| 25°C | 6.549 | 6.668 | 6.638 | 7.792 |
| Boiling point @ 760 mm | | | | |
| °C | 56.13 | 79.64 | 116.2 | 169.2 |
| °F | 133.03 | 175.26 | 241.16 | 336.6 |
| Boiling point change | | | | |
| °C/mm @ 760 mm | 0.0385 | 0.04 | 0.046 | 0.075 |
| Vapor pressure @ 20°C, mm | 185.95 | 70.21 | 14.96 | 0.81 |
| Freezing point @ 760 mm, °C | -94.897 | -86.69 | -83.5 | -44. |
| Refractive index n _D ²⁰ | 1.35900 | 1.37880 | 1.3957 | 1.4234 |
| Heat of vaporization | | | | |
| cal/g @ 760 mm | 122.09 | 105.95 | 82.50 | 90.0 |
| Heat of fusion at melting point | | | | |
| cal/g | 23.53 | 24.86 | | |
| Specific heat (liquid) | | | | |
| cal/g °C @ 25°C | 0.51 | 0.51 | 0.53 | 0.62 |
| Flash point, tag open cup, °F approx. | 15. | 20. | 79. | 135. |
| tag closed cup, °F approx. | -15. | 23. | 60. | 126. |
| Flammable limits in air | | | | |
| % of compound, upper | 11.0v | 11.5v | 7.5v | |
| lower | 3.0v | 1.81v | 1.4v | |
| Solubility, % wt. | | | | |
| in water, @ 20°C | complete | 27.1 | 2.04 | complete |
| water in, @ 20°C | complete | 12.5 | 2.41 | complete |
| Azeotrope with water, | | | | |
| %w compound | none | 88.73 | 75.7 | 12.7 |
| Boil pt. @ 760 mm, °C | | 73.41 | 87.93 | 98.8 |
| Viscosity, cps | | | | |
| @ 20°C | | | 0.583 | |
| @ 25°C | 0.3075 | 0.41 | 0.55 | 2.9 |
| @ 30°C | | 0.365 | | |
| Surface tension | | | | |
| dyne/cm 20°C | 22.32 | 24.6 | 23.64 | 28.9 |

Table 12.43: Union Carbide Ketones (19)

| Ketones | Formula | Molecular Weight | Relative Evaporation Rate nBuAc = 1 | Vapor Pressure at 20°C, mm Hg | Density at 20°C, lb/gal | Gravity at 20/20°C | Specific Grav Solubility Parameters | | | |
|------------------------|-------------------------------------------------------------------------------------------|------------------|-------------------------------------|-------------------------------|-------------------------|--------------------|-------------------------------------|------------------|-------|-----------|
| | | | | | | | Total | Hydrogen Bonding | Polar | Non-Polar |
| Acetone | CH ₃ COCH ₃ | 58.08 | 14.40 | 184.0 | 6.59 | 0.792 | 9.6 | 5.4 | 4.8 | 6.4 |
| Cyclohexanone | CH ₂ (CH ₂) ₄ CO | 98.15 | 0.40 | 3.0 | 7.89 | 0.948 | 10.4 | 5.4 | 4.6 | 7.6 |
| Diacetone Alcohol | CH ₃ C(OH)(CH ₃)CH ₂ COCH ₃ | 116.16 | 0.12 | 1.0 | 7.82 | 0.940 | 9.8 | 6.1 | 5.6 | 5.2 |
| Diisobutyl Ketone | [CH ₃ CH(CH ₃)CH ₂] ₂ CO | 142.24 | 0.15 | 1.0 | 6.77 | 0.808 | 8.1 | 1.9 | 3.3 | 7.1 |
| Isophorone | CH=C(CH ₃)CH ₂ C(CH ₃) ₂ CH ₂ CO | 138.21 | 0.02 | 0.1 | 7.68 | 0.923 | 9.4 | 1.6 | 4.6 | 8.0 |
| Methyl n-Amyl Ketone | CH ₃ COC ₅ H ₁₁ | 114.19 | 0.28 | 2.0 | 6.80 | 0.817 | 9.0 | 3.5 | 3.7 | 7.4 |
| Methyl Ethyl Ketone | CH ₃ COC ₂ H ₅ | 72.10 | 6.60 | 75.0 | 6.71 | 0.806 | 9.5 | 4.6 | 4.5 | 6.9 |
| Methyl Isobutyl Ketone | CH ₃ COCH ₂ CH(CH ₃) ₂ | 100.16 | 1.60 | 15.0 | 6.67 | 0.802 | 8.6 | 2.9 | 3.9 | 7.1 |

| Ketones | Viscosity at 20°C, cP | Surface Tension at 20°C, dynes/cm | Boiling Point at 760 mm Hg, °C | Solubility at 20°C, Percent by Wt | | Flash Point, Tag Closed Cup, °F | Electrical Resistance ^a , Megohms | Odor Detection Threshold ^b , ED50, ppm | Title III Listed Hazardous Air Pollutant ^(c) | CAS Registration Number |
|------------------------|-----------------------|-----------------------------------|--------------------------------|-----------------------------------|----------|---------------------------------|----------------------------------------------|---------------------------------------------------|---------------------------------------------------------|-------------------------|
| | | | | In Water | Water In | | | | | |
| Acetone | 0.3 | 23.7 | 56.3 | Complete | | 0 | | | No | 67-64-1 |
| Cyclohexanone | 2.2 | 35.0 | 155.7 | 2.3 | 8.0 | 111 | | | No | 108-94-1 |
| Diacetone Alcohol | 3.2 | 30.3 | 169.2 | | | 133 | | | No | 123-42-2 |
| Diisobutyl Ketone | 1.0 | 23.2 | 169.4 | 0.05 | 0.75 | 120 | 0.06 | | No | 108-83-8 |
| Isophorone | 2.6 | 31.6 | 215.2 | <0.02 | 4.3 | 190 | | | Yes | 78-59-1 |
| Methyl n-Amyl Ketone | 0.8 | 26.7 | 151.5 | 0.4 | 1.3 | 105 | 0.75 | 0.02 | No | 110-43-0 |
| Methyl Ethyl Ketone | 0.4 | 24.5 | 79.6 | 24.0 | 10.0 | 21 | | | Yes | 78-93-3 |
| Methyl Isobutyl Ketone | 0.6 | 24.0 | 116.1 | 2 | 1 | 61 | 0.45 | | Yes | 108-10-1 |

(a) Measured with a Ransburg Model 219CB Paint Resistance Tester. Values listed are for commercially available materials.

(b) Odor Detection Threshold is the concentration of odorant in ppm necessary for 50% of a test panel to detect or perceive an odor in air.

(c) Hazardous Air Pollutants listed under Title III of the Clean Air Act.

(continued)

Table 12.43: (continued)

UCAR® Ketones Selection Guide

| Type | Ketone | Relative Evaporation rate (BuAc = 100) | TYPE OF COATING | | | | | | | | | | | |
|--------------------|------------------------|----------------------------------------|-----------------|-----------|----------|-------------|-----------|-------|-------------------|----------------|-----------------|---------|----------|---------------|
| | | | Nitrocellulose | | | | | Vinyl | Cellulose Acetate | 1/2-s Butyrate | Ethyl Cellulose | Acrylic | Urethane | Water Soluble |
| | | | Conventional | Hot Spray | High-Low | Multi-Color | Emulsions | | | | | | | |
| Fast Evaporating | Acetone | 1440 | ● | | ● | | | ● | ● | ● | ● | ● | ● | ● |
| | Methyl Ethyl Ketone | 631 | ● | | ● | | | ● | ● | ● | ● | ● | ● | ● |
| Medium Evaporating | Methyl Isobutyl Ketone | 162 | ● | ● | | ● | ● | ● | | ● | ● | ● | ● | ● |
| | Methyl n-Amyl Ketone | 40 | ● | ● | ● | | | ● | | ● | ● | ● | ● | ● |
| Slow Evaporating | Cyclohexanone | 23 | ● | ● | ● | | | ● | ● | ● | ● | ● | | |
| | Diisobutyl Ketone | 17 | ● | ● | ● | ● | ● | ● | | ● | ● | ● | | |
| | Diacetone Alcohol | 12 | ● | ● | ● | | ● | ● | ● | ● | ● | ● | | ● |
| | Isophorone | 2 | | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | Isobutyl Heptyl Ketone | 1 | | | | | ● | ● | ● | ● | ● | ● | | |

General Solvent Properties of UCAR® Ketones

| | Relative Evaporation Rate (BuAc = 100) | Weight per Gallon at 20°C, lb | 8 Percent Solution of R.S. 1/2-s Nitrocellulose | | | | | Solubility Parameters | | | Status under Rule 66-Type Regulations ^(a) |
|------------------------|----------------------------------------|-------------------------------|-------------------------------------------------|---------|--------|-------------------------------------|-----------------------|-----------------------|-------|------------------|------------------------------------------------------|
| | | | Dilution Ratio | | | Blush Resistance at 80°F, % RH ± 2% | Viscosity at 25°C, cP | Total | Polar | Hydrogen Bonding | |
| | | | Toluene | Naphtha | Xylene | | | | | | |
| Acetone | 1440 | 6.59 | 4.5 | 0.7 | — | <35 | 9 | 9.62 | 4.79 | 5.39 | NPCR |
| Methyl Ethyl Ketone | 631 | 6.71 | 4.3 | 0.9 | — | 51 | 10 | 9.45 | 4.52 | 4.63 | NPCR |
| Methyl Isobutyl Ketone | 162 | 6.67 | 3.6 | 1.0 | 3.2 | 78 | 19 | 8.58 | 3.94 | 2.88 | PCR-20% |
| Methyl n-Amyl Ketone | 40 | 6.81 | 3.9 | 1.2 | 3.6 | 92 | 25 | 8.98 | 3.73 | 3.52 | NPCR |
| Cyclohexanone | 23 | 7.89 | 5.7 | 1.1 | 4.8 | 92 | 79 | 10.42 | 4.58 | 5.39 | NPCR |
| Diisobutyl Ketone | 17 | 6.72 | 1.5 | 0.6 | 1.5 | 95 | 65 | 8.06 | 3.32 | 1.88 | PCR-20% |
| Diacetone Alcohol | 12 | 7.82 | 3.0 | 0.5 | 2.3 | 76 | 148 | 9.78 | 5.56 | 6.14 | PCR-20% |
| Isophorone | 2 | 7.67 | 6.2 | — | 5.1 | 96 | 104 | 9.36 | 4.58 | 1.55 | PCR-5% |
| Isobutyl Heptyl Ketone | 1 | 6.84 | Imm. | Imm. | Imm. | — | — | 7.95 | 2.93 | 1.74 | PCR-20% |

Footnote:

(a) NPCR, Nonphotochemically Reactive; PCR-20% and PCR-5%, Photochemically Reactive — volume percent without requiring emission control.

(continued)

Table 12.43: (continued)

Resin Solubilities of UCAR® Ketones

| Ketone | Cellulose Acetate, 41% Acetyl | Cellulose Acetate Butyrate, | | Ethyl Cellulose, 47-49% Ethoxyl | Poly-styrene | Poly-(methyl Meth-acrylate) | UCAR Solution Vinyl Resin VYHH | Poly-vinyl Acetate AYAF |
|------------------------|-------------------------------|-----------------------------|-------------|---------------------------------|--------------|-----------------------------|--------------------------------|-------------------------|
| | | 17% Butyryl | 37% Butyryl | | | | | |
| Acetone | S | S | S | S | PS | S | S | S |
| Cyclohexanone | S | S | S | S | S | S | S | S |
| Diacetone Alcohol | S | PS | S | S | I | S | S | S |
| Diisobutyl Ketone | I | I | I | SW | SW | I | S-G | PS |
| Isobutyl Heptyl Ketone | I | I | I | SW | I | I | I | I |
| Isophorone | S | S | S | S | S | PS | S | S |
| Methyl Ethyl Ketone | S | S | S | S | S | S | S | S |
| Methyl Isobutyl Ketone | I | I | S | S | S | S | S | S |
| Methyl n-Amyl Ketone | I | I | S | S | S | S | S | S |

NOTE:

Concentration = 0.5 g resin to 4.5 ml of solvent

S = Soluble

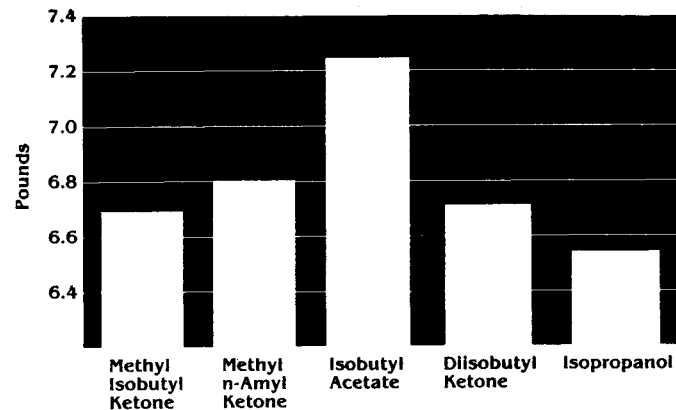
I = Insoluble

SW = Swelling


PS = Partly soluble

S-G = Soluble, tendency to gel

Weight of One Gallon of Solvent



Volume of 7.24 Pounds of Solvent

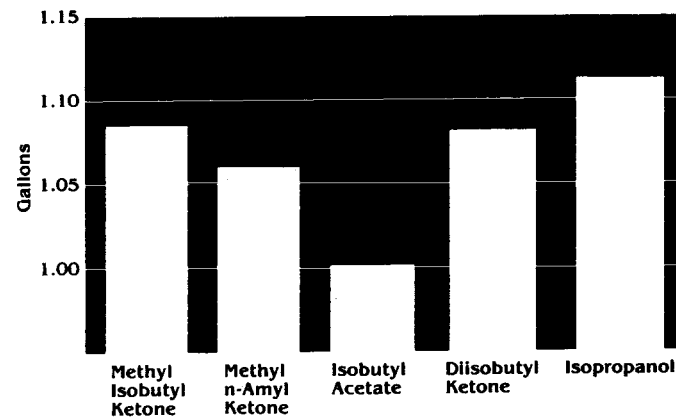

(continued)

Table 12.43: (continued)

Constant Boiling Mixtures

| Mixture | COMPONENTS | | | AZEOTROPE | | | | |
|------------------------|-----------------------------|--------------------------------|--------------------------------|----------------------------------|----------------|----------------|-----------------------------------|-----------------------------------------|
| | Specific Gravity at 20/20°C | Boiling Point at 760 mm Hg, °C | Boiling Point at 760 mm Hg, °C | Composition at 20°C, % by Weight | | | Relative Volume of Layers at 20°C | Sp Gr at 20/20°C of Azeotrope or Layers |
| | | | | In Azeotrope | In Upper Layer | In Lower Layer | | |
| Acetone | 0.7918 | 56.3 | | | | | | |
| Carbon Disulfide | 1.2657 | 46.2 | 39.3 | 33.0 | | | | 1.040 |
| Acetone | 0.7918 | 56.3 | | 20.0 | | | | |
| Chloroform | 1.4925 | 61.2 | 64.7 | 80.0 | | | | 1.268 |
| Acetone | 0.7918 | 56.3 | | 30.0 | | | | |
| Chloroform | 1.4925 | 61.2 | 57.5 ^(a) | 47.0 | | | | (b) |
| Methanol | 0.7922 | 64.7 | | 23.0 | | | | |
| Acetone | 0.7918 | 56.3 | | 59.0 | | | | |
| Hexane | 0.6717 | 68.7 | 49.8 | 41.0 | | | | |
| Acetone | 0.7918 | 56.3 | | 45.0 | | | | |
| Hexane (Commercial) | 0.6717 | 68.7 | 47.0 | 48.0 | | | | 0.720 |
| Methyl Acetate | 0.9355 | 57.0 | | 7.0 | | | | |
| Acetone | 0.7918 | 56.3 | | 56.5 | | | | |
| Isopropyl Ether | 0.7250 | 68.3 | 53.3 | 43.5 | | | | 0.764 |
| Acetone | 0.7918 | 56.3 | | 88.0 | | | | |
| Methanol | 0.7925 | 64.7 | 55.7 | 12.0 | | | | 0.795 |
| Acetone | 0.7918 | 108.7 ^(c) | | 68.0 | | | | |
| Methanol | 0.7925 | 109.1 ^(c) | 102 ^(c) | 32.0 | | | | 0.796 |
| Acetone | 0.7918 | 132.1 ^(d) | | 54.0 | | | | |
| Methanol | 0.7925 | 128.4 ^(d) | 124 ^(d) | 46.0 | | | | 0.796 |
| Acetone | 0.7918 | 151.4 ^(e) | | 44.0 | | | | |
| Methanol | 0.7925 | 143.8 ^(e) | 140 ^(e) | 56.0 | | | | 0.796 |
| Acetone | 0.7918 | 56.3 | | 5.8 | | | | |
| Methanol | 0.7925 | 64.7 | 53.7 | 17.4 | | | | 0.898 |
| Methyl Acetate | 0.9355 | 57.0 | | 76.8 | | | | |
| Acetone | 0.7918 | 56.3 | | 48.0 | | | | |
| Methyl Acetate | 0.9355 | 57.0 | 55.6 | 52.0 | | | | 0.854 |
| Acetone | 0.7918 | 83.8 ^(f) | | 98.7 | | | | |
| Water | 1.0000 | 127.3 ^(f) | 81.4 ^(f) | 1.3 | | | | 0.795 |
| Cyclohexanone | 0.9482 | 155.7 | 95 | 38.4 | 92.0 | 2.3 | U 41.5 | U 0.953 |
| Water | 1.0000 | 100.0 | | 61.6 | 8.0 | 97.7 | L 58.5 | L 1.000 |
| Diacetone Alcohol | 0.9395 | 169.2 | | 13.0 | | | | |
| Water | 1.0000 | 100.0 | 99.6 | 87.0 | | | | 1.002 |
| Diisobutyl Ketone | 0.8075 | 169.4 | | 48.1 | 99.25 | 0.05 | U 53.4 | U 0.810 |
| Water | 1.0000 | 100.0 | 97.0 | 51.9 | 0.75 | 99.95 | L 46.6 | L 1.000 |
| Isobutyl Heptyl Ketone | 0.8215 | 218.2 | | 16.0 | 99.8 | 0.01 | U 19.0 | U 0.810 |
| Water | 1.0000 | 100.0 | 99.0 | 84.0 | 0.2 | 99.99 | L 81.0 | L 1.000 |
| Isophorone | 0.9220 | 215.3 | | 16.1 | 95.7 | 1.2 | U 16.0 | U 0.929 |
| Water | 1.0000 | 100.0 | 99.5 | 83.9 | 4.3 | 98.8 | L 84.0 | L 0.999 |

Footnotes:

a) Distillation barrier present

d) at 7.82 atm

f) at 20 psig

b) Homogeneous at 20°C

e) at 11.6 atm

g) at 30/20°C

c) at 4.56 atm

(continued)

Table 12.43: (continued)

Constant Boiling Mixtures (continued)

| Mixture | COMPONENTS | | | AZEOTROPE | | | | |
|------------------------|-----------------------------|--------------------------------|--------------------------------|----------------------------------|----------------|----------------|-----------------------------------|-----------------------------------------|
| | Specific Gravity at 20/20°C | Boiling Point at 760 mm Hg, °C | Boiling Point at 760 mm Hg, °C | Composition at 20°C, % by Weight | | | Relative Volume of Layers at 20°C | Sp Gr at 20/20°C of Azeotrope or Layers |
| | | | | In Azeotrope | In Upper Layer | In Lower Layer | | |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | 78.4 | 37.5 | | | | |
| Benzene | 0.8800 | 80.1 | | 62.5 | | | | 0.853 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | | 26.1 | 28.1 | 5.2 | | |
| Benzene | 0.8800 | 80.1 | 68.2 | 65.1 | 71.3 | 0.1 | U 92.5 | U 0.858 |
| Water | 1.0000 | 100.0 | | 8.8 | 0.6 | 94.7 | L 7.5 | L 0.992 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | 45.9 | 15.3 | | | | |
| Carbon Disulfide | 1.2657 | 46.2 | | 84.7 | | | | 1.157 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | 73.8 | 29.0 | | | | |
| Carbon Tetrachloride | 1.5970 | 76.7 | | 71.0 | | | | 1.247 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | | 22.2 | 5.5 | 22.6 | | |
| Carbon Tetrachloride | 1.5970 | 76.7 | 65.7 | 74.8 | 0.1 | 77.3 | U 4.0 | U 0.993 |
| Water | 1.0000 | 100.0 | | 3.0 | 94.4 | 0.1 | L 96.0 | L 1.313 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | 79.9 | 83.0 | | | | |
| Chloroform | 1.4925 | 61.2 | | 17.0 | | | | 0.877 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | | 35.0 | 37.0 | 10.0 | | |
| Cyclohexane | 0.7790 | 80.7 | 63.6 | 60.0 | 62.4 | 0.1 | U 94.5 | U 0.769 |
| Water | 1.0000 | 100.0 | | 5.0 | 0.6 | 89.9 | L 5.5 | L 0.980 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | 74.8 | 66.0 | | | | |
| Ethanol | 0.7871 | 78.3 | | 34.0 | | | | 0.802 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | | 75.0 | | | | |
| Ethanol | 0.7871 | 78.3 | 73.2 | 14.0 | | | | |
| Water | 1.0000 | 100.0 | | 11.0 | | | | 0.832 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | 64.3 | 28.3 | | | | |
| Hexane (Commercial) | 0.6717 | 68.7 | | 71.7 | | | | 0.698 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | | 22.0 | 22.5 | 10.0 | | |
| Hexane (Commercial) | 0.6717 | 68.7 | 55.0 | 77.0 | 77.3 | 0.1 | U 99.0 | U 0.68 ^g |
| Water | 1.0000 | 100.0 | | 1.0 | 0.2 | 89.9 | L 1.0 | L 0.98 ^g |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | 77.3 | 70.0 | | | | |
| Isopropanol | 0.7864 | 82.3 | | 30.0 | | | | 0.800 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | | 88.0 | | | | |
| Isopropanol | 0.7864 | 82.3 | 73.4 | 1.0 | | | | |
| Water | 1.0000 | 100.0 | | 11.0 | | | | 0.834 |
| Methyl Ethyl Ketone | 0.8060 | 79.6 | 73.4 | 88.0 | | | | |
| Water | 1.0000 | 100.0 | | 12.0 | | | | 0.834 |
| Methyl Isobutyl Ketone | 0.8015 | 116.1 | 87.9 | 76.0 | 98.4 | 2.0 | U 80.4 | U 0.806 |
| Water | 1.0000 | 100.0 | | 24.0 | 1.6 | 98.0 | L 19.6 | L 0.999 |

Footnotes:

a) Distillation barrier present

d) at 7.82 atm

f) at 20 psig

b) Homogeneous at 20°C

e) at 11.6 atm

g) at 30/20°C

c) at 4.56 atm

Table 12.44: Vapor Pressure of Various Ketones at Different Temperatures (19)

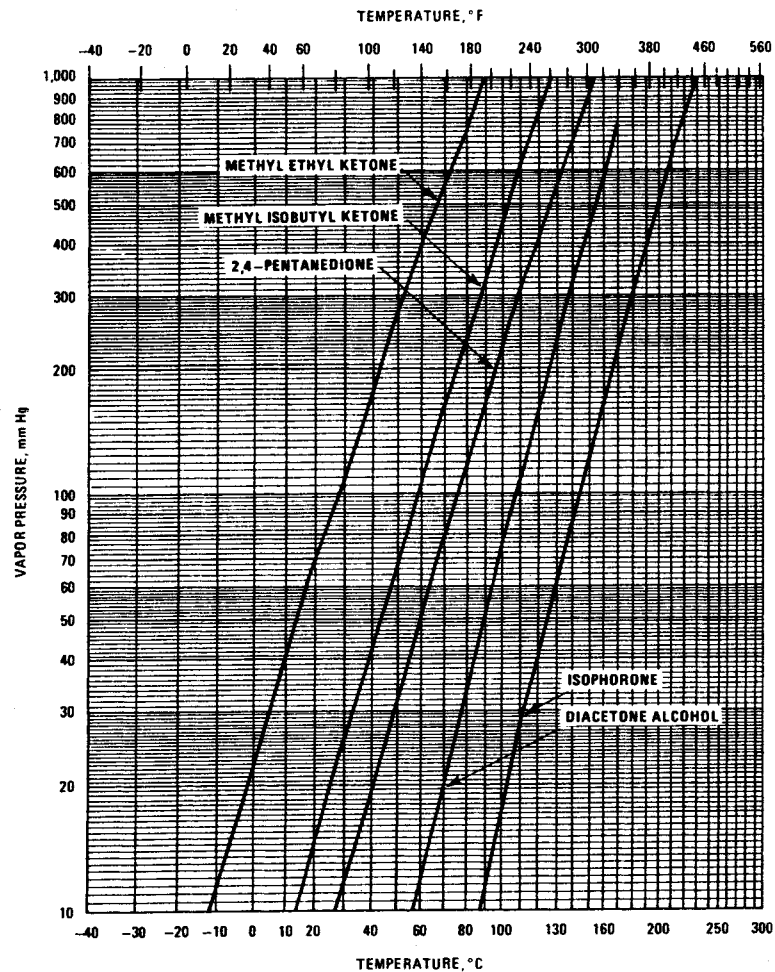
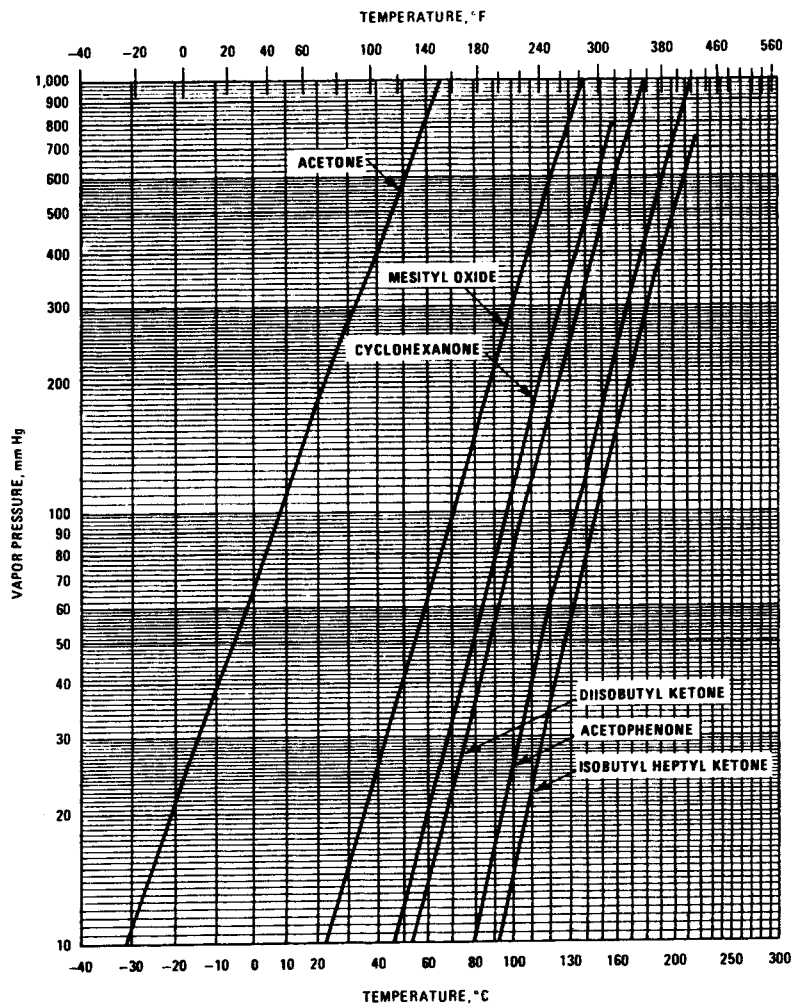


Table 12.45: Specific Gravities of Ketones (19)

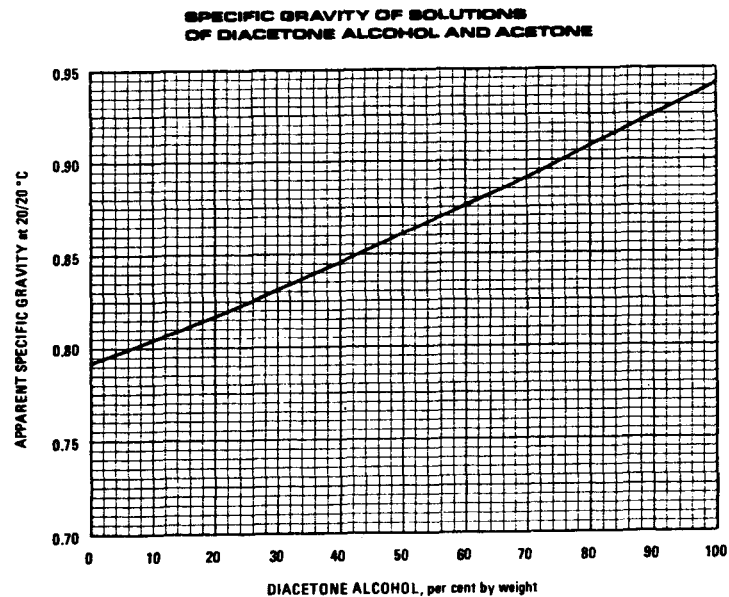
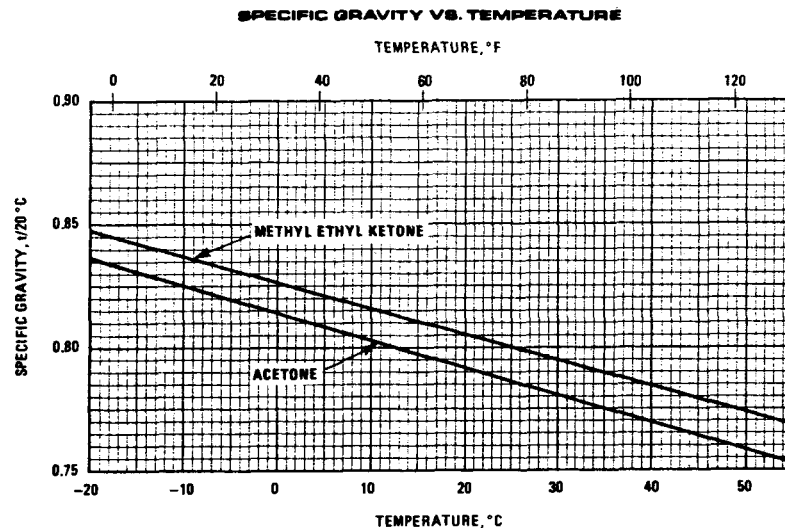
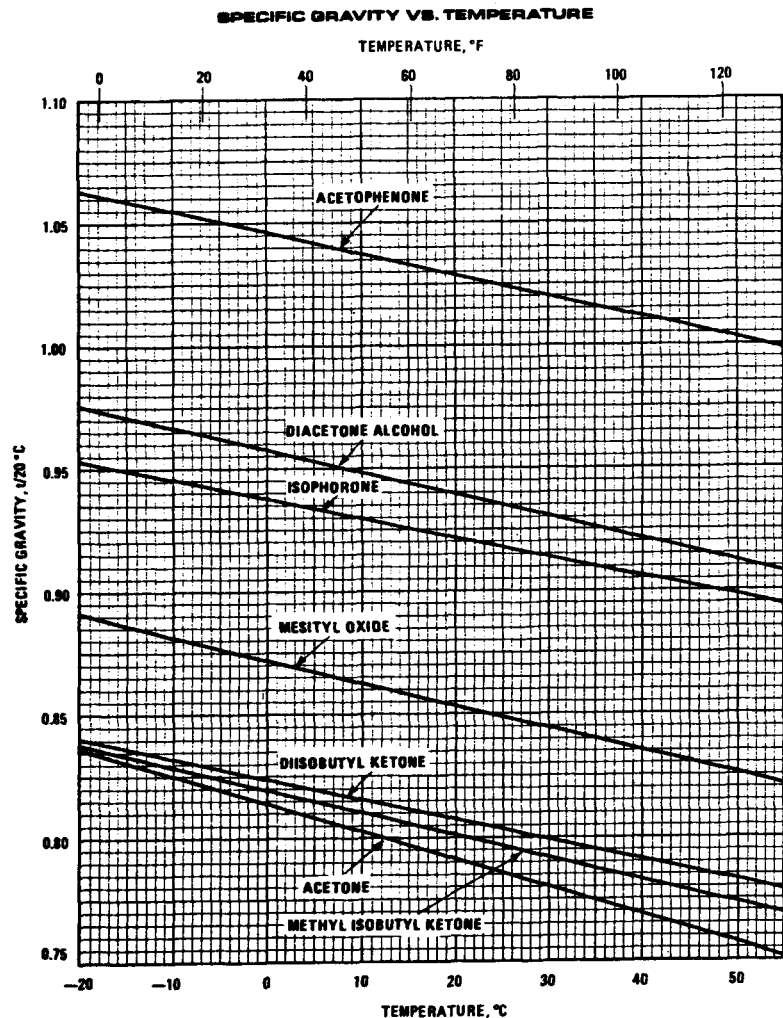


Table 12.46: Solubility of Ketones In Water (19)

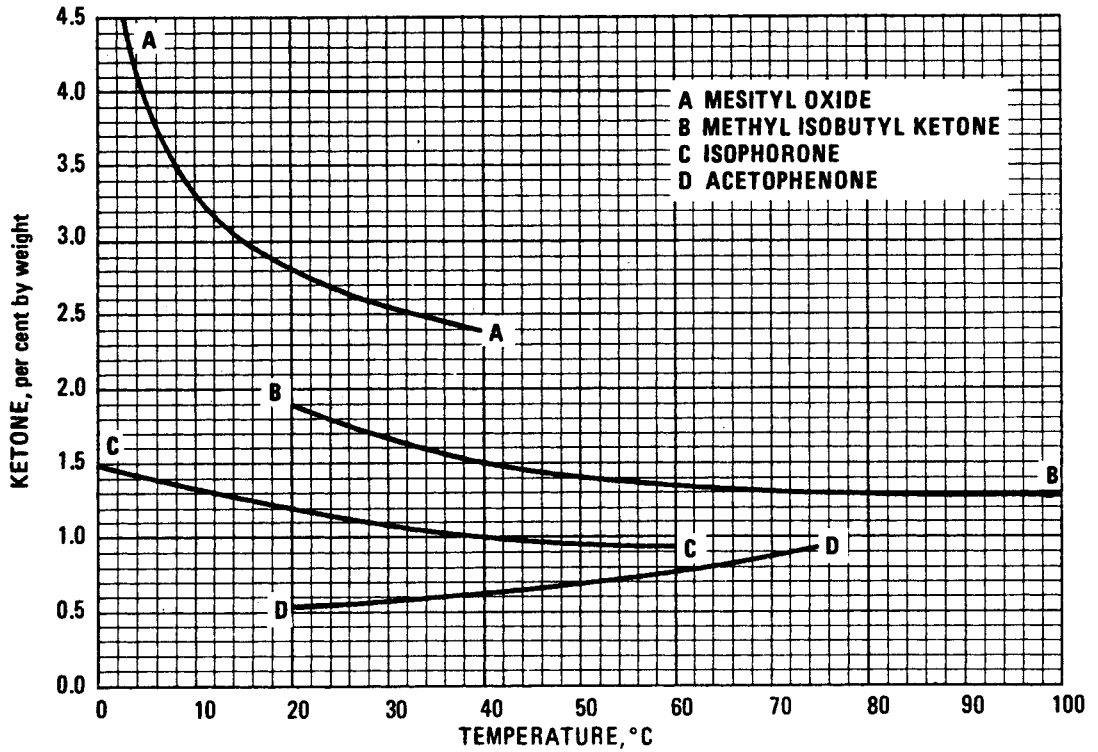


Table 12.47: Solubility of Water In Ketones (19)

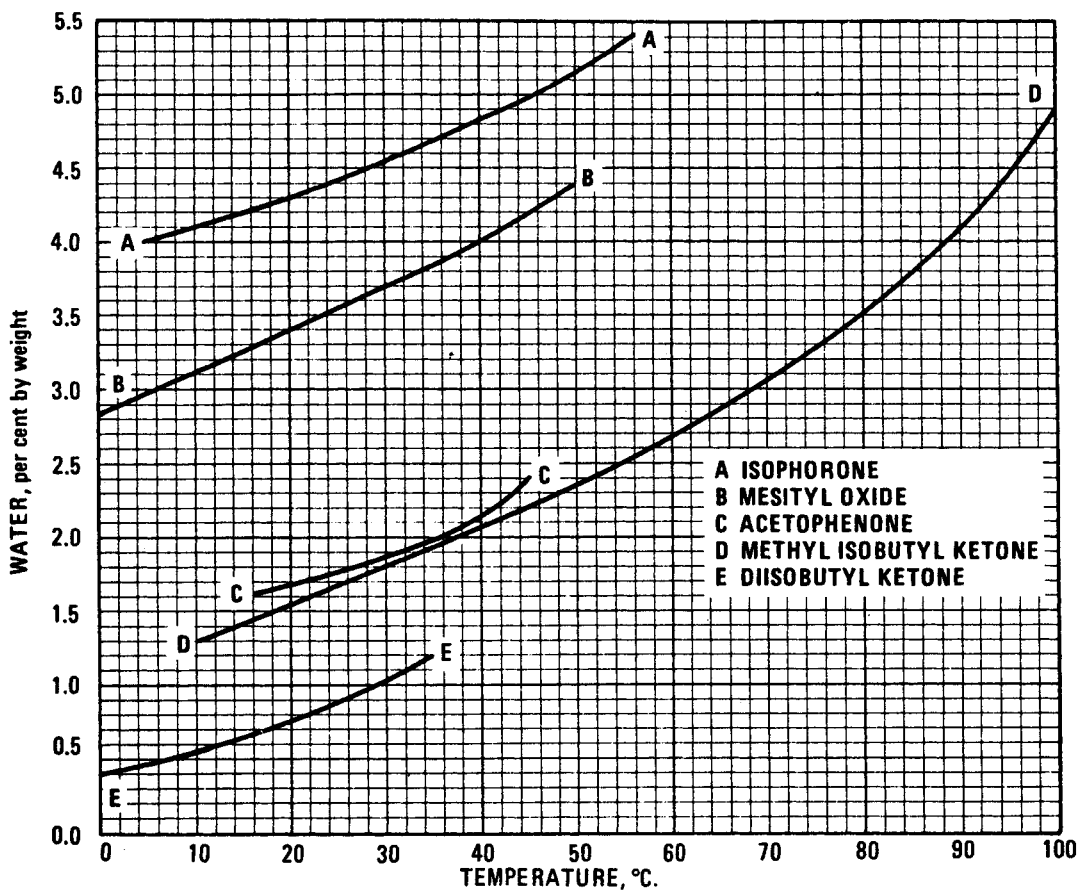


Table 12.48: Relative Evaporation of Ketones—Fast to Intermediate Evaporating Liquids (19)

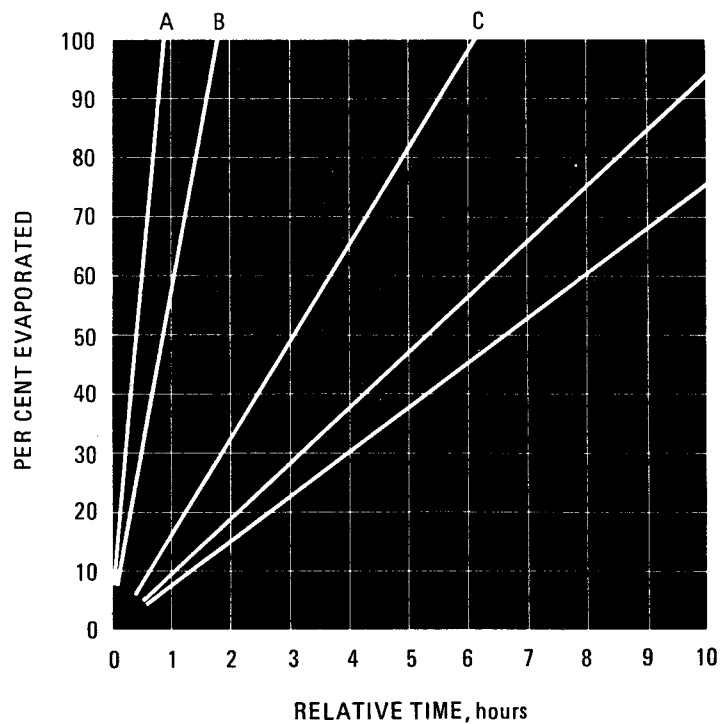


CHART KEY

- A Acetone
- B Methyl Ethyl Ketone
- C Methyl Isobutyl Ketone
- D Mesityl Oxide
- E 2,4-Pentanedione

Table 12.49: Relative Evaporation of Ketones—Intermediate to Slow Evaporating Liquids (19)


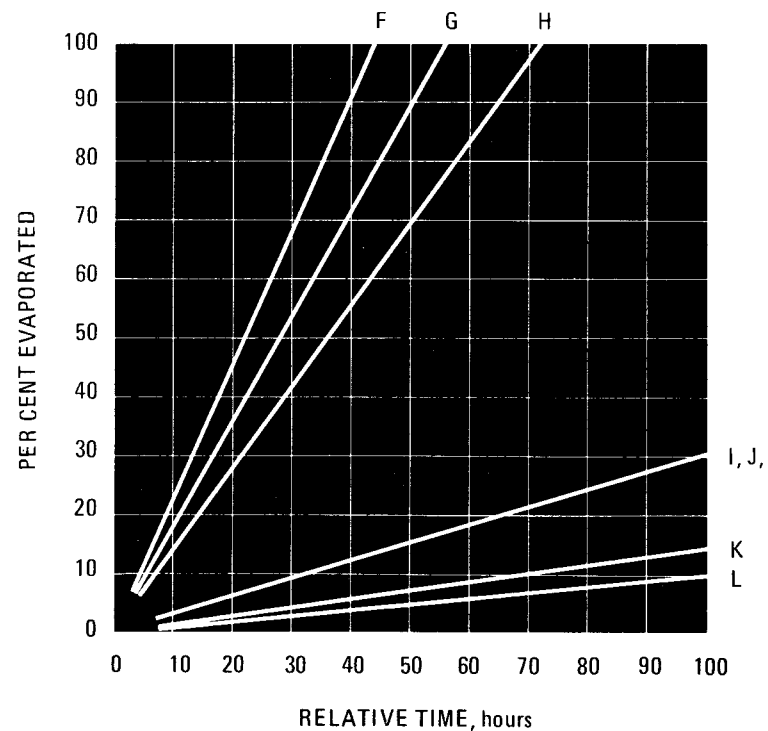


CHART KEY

- F Cyclohexanone
- G Diisobutyl Ketone
- H Diacetone Alcohol
- I Acetophenone
- J Isophorone
- K Isobutyl Heptyl Ketone
- L Propiophenone

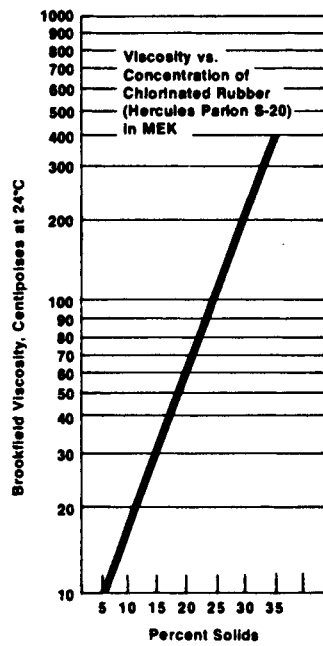Table 12.50: Viscosity vs Concentration of Chlorinated Rubber (Hercules PARLON S-20) in MEK (8)



Acids

Table 13.1: Acetic Acid (2)

Vinegar Acid
 Methanecarboxylic Acid
 Ethanoic Acid

CH_3COOH

Acetic acid is a colorless liquid with a pungent odor; it is made synthetically from acetylene or by the oxidation of alcohol. It is soluble in water, alcohols, ethyl ether, and other organic solvents. It is used as a precipitant for albumen, casein, and rubber latex. It is also employed in the manufacture of leather, cordage, linoleum, acetate solvents, acetyl derivatives, dyes, matches, printing inks, and polishes, and as an assistant in dyeing processes.

| | <i>Specifications (Glacial Acetic)</i> | | |
|------------------------------|----------------------------------------|----------------|----------------|
| | Standard + Laundry Special | U.S.P. XII | C.P. |
| Acetaldehyde | 0.05% (max.) | | |
| Acidity, as acetic acid | 99.5% (min.) | 99.5% (min.) | 99.8% (min.) |
| Color | Water-white | Water-white | Water-white |
| Formic acid | 0.2% (max.) | | 0.00% (max.) |
| Freezing point | 15.6°C (min.) | 15.6°C (min.) | 16.24°C (min.) |
| Non-volatile matter | | 0.0265% (max.) | 0.0008% (max.) |
| Water content | 0.5% (max.) | 0.5% (max.) | 0.2% (max.) |
| Weight per gallon at 20°C | 8.74 lbs. | 8.74 lbs. | 8.74 lbs. |

Table 13.2: Viscosity of Acetic Acid and Acetic Anhydride Mixtures at 15° and 76.5°C (19)


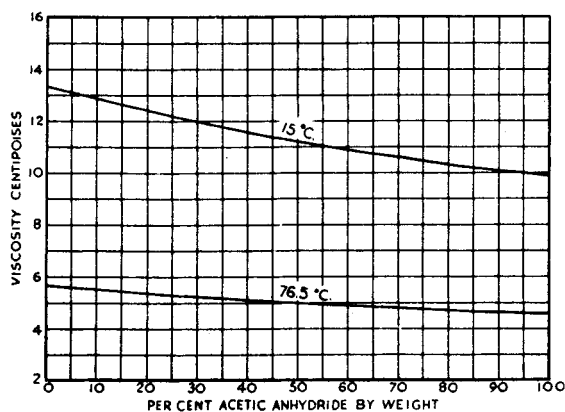


Table 13.3: Butyric Acid (2)



Ethylacetic Acid
 Butanoic Acid
 Propylformic Acid



Butyric acid is a water-white liquid having a characteristically pronounced and highly disagreeable odor. It is soluble in most organic solvents and completely soluble in water. The importance of butyric acid is found in its butyrate, made with alcohols; these compounds are used as flavors because of their pleasant fruity odors. Other uses are in the manufacture of flavor esters, plastics, drugs, in leather tanning and for delimiting hides.


Typical Properties and Specifications

| | | | |
|----------------------------------|-------------------------------------|----------------------------------------|--------------------|
| Boiling point at 760 mm | 163.5°C | Solubility in water at 20°C | Complete |
| Coefficient of expansion at 20°C | 0.001026°C | Solubility of water in solvent at 20°C | Complete |
| at 55 | 0.001064 | Specific gravity at 20/20°C | 0.9595 |
| Color | Water-white | Specific heat | 0.514 (20-100°C) |
| Critical temperature | 355°C | Refractive index at 19°C | 1.3980 |
| Critical density | 0.302 | Surface tension at 20°C | 26.8 dynes/sq cm |
| Dissociation constant at 25°C | 1.48×10^{-4} recip. ohm | Vapor pressure at 20°C | 0.84 mm Hg |
| Electrical conductivity at 25°C | 0.00039×10^{-4} recip. ohm | Viscosity at 25°C | 0.01529 poise |
| Flash point (ASTM open cup) | 170°F | Weight per gallon at 20°C | 7.985 lbs. |
| Heat of combustion | 5905 cal. (15)/g | Chlorides | None |
| Heat of fusion | 20.1 cal. (15)/g | Distillation range at 760 mm | 160-165°C |
| Heat of vaporization | 1.59 cal./g | Purity | 99.0% by wt., min. |
| Melting point | -5.7°C | | |

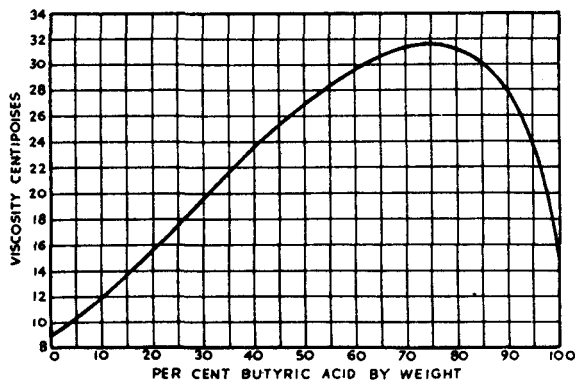
Table 13.4: Viscosity of Aqueous Butyric Acid Solution at 25°C (19)**Table 13.5: Butyric Anhydride (2)**

Butyric anhydride is a water-white liquid which hydrolyzes to butyric acid in the presence of water. Like butyric acid, it is used in making butyrates, flavors, drugs and tanning agents.

| | | | |
|------------------------------|-------------|-------------------------------|-------------------|
| Boiling point at 760 mm. | 199.5°C. | Weight per gallon at 20°C. | 8.1 lbs. |
| Color | Water-white | Distillation range at 760 mm. | |
| Flash point | 190°F. | Below 190°C. | None |
| Melting point | -75°C. | Above 200°C. | None |
| Specific gravity at 20/20°C. | 0.965-0.970 | Below 195°C. | Not more than 10% |
| Vapor pressure at 20°C. | 0.37 mm. Hg | Purity | 85% by wt., min. |

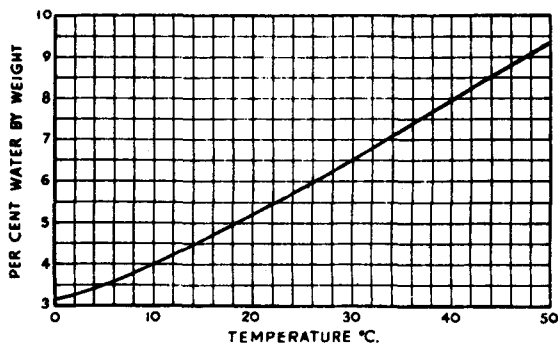Table 13.6: Solubility of Water in Caproic Acid at Various Temperatures (19)**Table 13.7: 2-Ethylbutyric Acid (2)**

Diethyl Acetic Acid
2-Ethylbutanoic Acid




2-Ethylbutyric acid is a water-white liquid, similar to butyric acid in most of its properties, except that its odor is less strong and it is not as soluble in water. Its halogenated derivatives are finding use in the manufacture of drugs. Its esters with higher glycols are outstanding vinyl resin plasticizers.

| | | | |
|-----------------------------------------|--------------|-------------------------------|------------------|
| Boiling point at 760 mm. | 194°C. | Vapor pressure at 20°C. | 0.14 mm. Hg |
| Flash point | 210°F. | Weight per gallon at 20°C. | 7.68 lbs. |
| Solubility in water at 20°C. | 0.22% by wt. | Distillation range at 760 mm. | 185°-200°C. |
| Solubility of water in solvent at 20°C. | 3.3% by wt. | Purity | 90% by wt., min. |
| Specific gravity at 20/20°C. | 0.9225 | | |

Table 13.8: 2-Ethylhexoic Acid (2)

Octoic Acid
2-Ethylhexanoic Acid



This acid possesses a mild odor and a high boiling point. It is important for its metallic esters, the properties of which suggest usefulness as varnish driers. These metallic salts are stable, mild-odored, light-colored compounds, and are soluble in hydrocarbons. The glycol esters of this acid are excellent vinyl resin plasticizers.

| | | | |
|-----------------------------------------|--------------|-------------------------------|----------------------------------|
| Boiling point at 760 mm. | 226.9°C. | Vapor pressure at 20°C. | 0.03 mm. Hg |
| Flash point | 260°F. | Weight per gallon at 20°C. | 7.55 lbs. |
| Solubility in water at 20°C. | 0.25% by wt. | Distillation range at 760 mm. | 220°-230°C. |
| Solubility of water in solvent at 20°C. | 1.2% by wt. | | (90% distills within this range) |
| Specific gravity at 20/20°C. | 0.9077 | Purity | 95% by wt. min. |


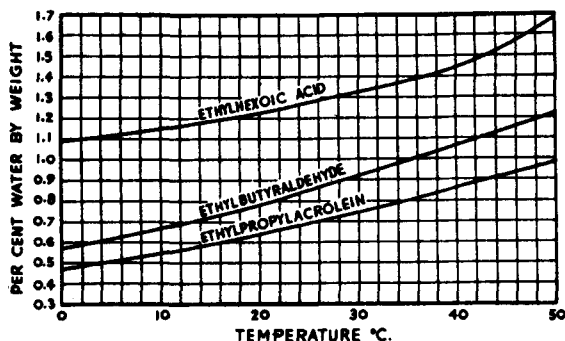

Table 13.9: Solubility of Water in Ethylhexoic Acid, Ethylbutyraldehyde and Ethylpropylacrolein (19)

Table 13.10: Lactic Acid (2)


 α -Hydroxypropionic Acid

Lactic acid, which is among the oldest known organic acids, is obtained from sour milk by the reduction of hexose sugars or by the interaction of acetaldehyde and carbon monoxide. It is miscible with water and many organic reagents. Since it has an asymmetrical carbon atom, lactic acid exists in two optical isomeric forms. Peckham states that "the nomenclature used to designate the isomeric forms was, until recently, very confusing. The form of the acid commonly known as sarcos-lactic, the form occurring in blood, has (+) rotation but the l configuration. It is therefore correctly designated as l(+), lactic acid and its mirror image as d(-) lactic acid. The salts of the l(+), form are levorotatory and the salts of the d(-) form are dextrorotatory. Because of the low optical rotatory power of the free acids, rotation of the pure acid or its simple salts is not a suitable criterion for establishing the optical form of the acids, or the percentage composition in case of a mixture".


Commercial lactic acid has been determined to be a mixture of α -hydroxypropionic acid, lactylactic acid, and water. When dilute lactic acid is concentrated, two molecules of lactic acid unite to form lactylactic acid and water. The lactylactic acid splits off from the water.



Polylactylactic acids may also be formed by loss of water between the carboxyl and the alcohol groups, thus:



The conditions which affect the production of a lactic acid solution from lactylactic acid are temperature, concentration and age of solution.



A graph showing the Composition of Aqueous Lactic Acid Systems at Equilibrium and at Progress States of Dehydration.

Table 13.11: Trifluoroacetic Acid (25)

| | |
|-------------------------------------------|--------------------------------|
| $\text{CF}_3\text{CO}_2\text{H}$ Mol. Wt. | 114.03 |
| Boiling Point | 72.5°C |
| Water Azeotrope (20.6% water) | 105.5°C (1) |
| Freezing Point | -15.36°C (1,2) |
| Density at 25°C | 1.4844 g/ml |
| | 12.4 lb/gal |
| Vapor Pressure 0°C | 28.8 mm (3) |
| 25°C | 107 mm |
| Heat of Vaporization | 7949 cal/mol (3) |
| | 125.5 Btu/lb |
| Viscosity at 25°C | 0.813 cp (4) |
| Dielectric Constant at 25°C | 42.1 ϵ (5) |
| Conductivity at 25°C | 0.026 $10^5/\text{cm ohm}$ (4) |
| Surface Tension at 26°C | 13.44 dynes/cm (6) |

(1) Swarts, F., *Bull. Acad. Roy. Belg. Classe sci.*, 8, 343 (1922).

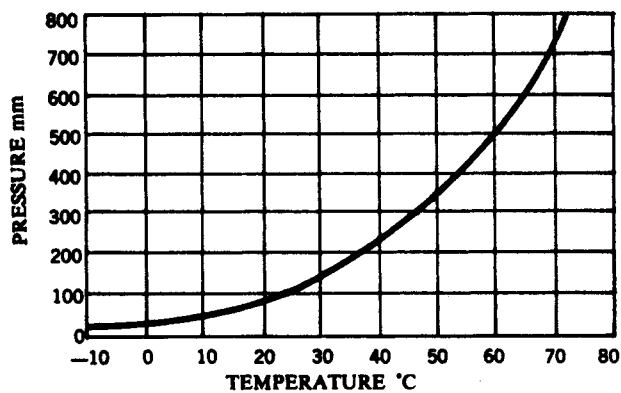
(2) Cady, H.H. and Cady, G.E., *J. Am. Chem. Soc.*, 76, 915 (1954).

(3) Taylor, M.D. and Templeman, M.B., *J. Am. Chem. Soc.*, 78, 2950 (1956).


(4) Fialkov, Y.Y. and Zhikarev, V.S., *Zh. Obshch. Khim.*, 33, 3466, 3471, 3790 (1963).

(5) Simons, J.H. and Lorentzen, K.E., *J. Am. Chem. Soc.*, 72, 1426 (1950).

(6) Jasper, J.J. and Wedlick, H.L., *J. Chem. Eng. Data*, 9, 446 (1964).




VAPOR PRESSURE OF TRIFLUOROACETIC ACID

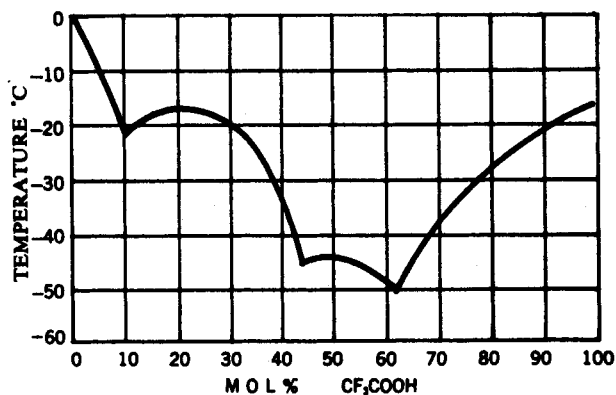

FREEZING POINTS WATER—TRIFLUOROACETIC ACID SYSTEM

(continued)

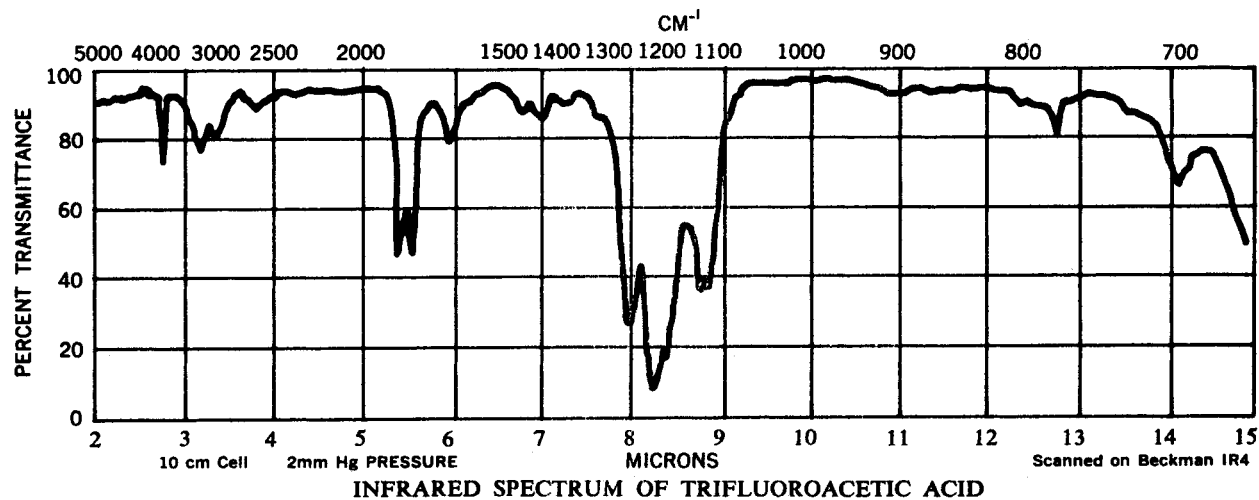Table 13.11: (continued)



Properties of Derivatives of Trifluoroacetic Acid

| Compound | Formula | Boiling Point °C | Melting Point °C |
|-------------------------------|---------------------------------------------------------------|------------------|------------------|
| Trifluoroacetic Anhydride | (CF ₂ CO) ₂ O | 40 | -65 |
| Methyl Trifluoroacetate | CF ₃ CO ₂ CH ₃ | 43 | |
| Ethyl Trifluoroacetate | CF ₃ CO ₂ C ₂ H ₅ | 62 | |
| Trifluoroacetamide | CF ₃ CONH ₂ | 163 | 75 |
| Trifluoroacetonitrile | CF ₃ CN | -64 | |
| Trifluoroacetyl Chloride | CF ₃ COCl | -19 | |
| Trifluoroacetyl Bromide | CF ₃ COBr | -5 | -130 |
| Trifluoroacetaldehyde | CF ₃ CHO | -19 | |
| Trifluoroacetaldehyde Hydrate | CF ₃ CH(OH) ₂ | 102-5 | 68-70 |

(continued)

Table 13.11: (continued)

SOLUBILITY OF INORGANIC ACIDS

| MISCIBLE | INSOLUBLE |
|-----------------------------------------------------------------------------------|--------------------------------|
| HCl, HClO ₄ , HF, HNO ₃ , H ₂ SO ₄ | H ₃ PO ₄ |

SOLUBILITY OF SALTS IN 100 GRAMS OF TRIFLUOROACETIC ACID AT ABOUT 25°C

| Over 10 g | 1-10 g | 0.1-1 g | Less than 0.1 g |
|-------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| CsCl K ₃ PO ₄ K ₂ SO ₄ NH ₄ NO ₃ | AgF, CrO ₃ , FeCl ₃ , KCl KCrO ₄ , KF, KI KMnO ₄ , KNO ₃ , NaCl, NaCrO ₄ , NaI NaF, NaNO ₃ , Na ₃ PO ₄ , Na ₂ SO ₄ | BaCl ₂ , BeCl ₂ CrCl ₃ Cr ₂ (SO ₄) ₃ MgF ₂ NiF ₂ | AgCl, AlCl ₃ BaSO ₄ CaF ₂ , FeF ₃ KClO ₄ NaClO ₄ , PbF ₂ |

SOLUBILITY OF METAL TRIFLUOROACETATES IN TRIFLUOROACETIC ACID AT 30°C

| Metal Salt | Al | Ba | Ca | Cu ⁺² | Hg ⁺² | K | Mg | Na | Ni | Fe ^{+3*} |
|-------------------|------|----|-----|------------------|------------------|----|------|----|----|-------------------|
| g Salt/100 g acid | 0.01 | 42 | 6.3 | 20 | 50 | 50 | 0.57 | 13 | 16 | 1.2 |

* Ref (38)

It is interesting to note that Si(O₂CCF₃)₄, TiO(O₂CCF₃)₂, Zr(O₂CCF₃)₄, and Th(O₂CCF₃)₄ have been prepared (77). The silicon compound exhibits covalent character.

SOLUBILITY OF GASES AT ABOUT 26°C; PARTIAL PRESSURES 650 mm Hg (38)
(Units are ml. gas dissolved in one ml. liquid)

| Gas | Cl ₂ | CO | CO ₂ | HBr | HCl | H ₂ S | N ₂ | O ₂ | SO ₂ |
|----------------------|-----------------|------|-----------------|-----|-----|------------------|----------------|----------------|-----------------|
| Trifluoroacetic Acid | 9.3 | 0.0 | 3.5 | 6.6 | 4.1 | 8.6 | 0.1 | 0.2 | 23 |
| Water | 2.1 | 0.02 | 0.8 | 580 | 423 | 2.5 | 0.02 | 0.03 | 36 |

Table 13.12: Vapor Pressure of Organic Acids and Anhydrides at Various Temperatures (19)

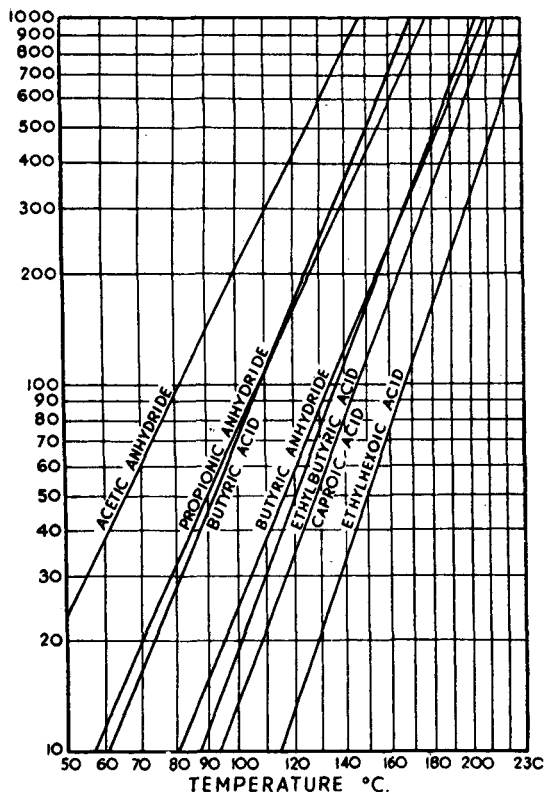


Table 13.13: Fatty Acid Composition of Various Fats and Oils (26)

| | BUTYRIC | CAPROIC | CAPRYLIC | CAPRIC | LAURIC | LAUROLEIC | MYRISTIC | MYRISTOLEIC | PENTADECANOIC | PALMITIC | PALMITOLEIC | MARGARIC | STEARIC | OLEIC | LINOLEIC | LINOLENIC | RICINOLEIC | DIIHYDROXYSTEARIC | LICANIC | ELCOSTEARIC | ARACHIDIC | ECOSENOIC | ECOSAPOLYENOIC | BEHENIC | ERICIC (DOCOSENOIC) | DOCOSAPOLYENOIC | LIGNOCERIC | TETRAOSENOIC | TETRACOSAPOLYENOIC | IODINE VALUE | SAPONIFICATION VALUE | TITER -°C |
|----------------------------------|---------|---------|----------|--------|--------|-----------|----------|-------------|---------------|----------|-------------|----------|---------|-------|----------|-----------|------------|-------------------|---------|-------------|-----------|-----------|----------------|---------|---------------------|-----------------|------------|--------------|--------------------|--------------|----------------------|-----------|
| BABASSU | — | — | 6.0 | 5.5 | 45.0 | — | 16.5 | — | — | 7.0 | — | — | 3.0 | 14.5 | 1.5 | — | — | — | — | — | — | 1.0 | — | — | — | — | — | — | — | 12-18 | 247-251 | 22-25 |
| BUTTERFAT | 3.0 | 1.0 | 1.5 | 3.0 | 3.5 | — | 12.0 | 1.5 | 1.0 | 28.0 | 3.0 | — | 13.0 | 28.5 | 1.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 25-42 | 210-235 | 33-38 |
| CASTOR | — | — | — | — | — | — | — | — | — | 1.5 | — | — | 0.5 | 5.0 | 4.0 | 0.5 | 87.5 | 0.5 | — | — | — | 0.5 | — | — | — | — | — | — | — | 81-91 | 177-187 | 11-3 |
| COCOA BUTTER | — | — | — | — | — | — | 0.5 | — | — | 25.0 | — | — | 34.5 | 36.5 | 3.0 | 0.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 35-40 | 190-200 | 45-50 |
| COCONUT | — | 0.5 | 7.0 | 6.0 | 48.0 | — | 19.0 | — | — | 9.0 | — | — | 3.0 | 6.0 | 1.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 8-12 | 250-260 | 20-24 | |
| CORN | — | — | — | — | — | — | — | — | — | 12.0 | — | — | 2.0 | 25.0 | 60.0 | 0.5 | — | — | — | — | — | 0.5 | — | — | — | — | — | — | — | 118-128 | 186-194 | 14-20 |
| COTTONSEED | — | — | — | — | — | — | 1.0 | — | — | 23.0 | 0.5 | — | 2.5 | 18.5 | 57.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 103-113 | 189-199 | 30-37 |
| HERRING | — | — | — | — | — | — | 7.0 | — | — | 12.0 | 10.0 | — | 0.5 | 8.0 | 13.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 125-145 | 180-193 | 23-27 |
| LARD | — | — | — | — | — | — | 1.5 | — | — | 25.0 | 3.0 | 0.5 | 13.0 | 45.5 | 10.5 | 1.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | 58-68 | 192-202 | 34-43 |
| LINSEED | — | — | — | — | — | — | — | — | — | 6.0 | — | — | 3.5 | 20.0 | 14.5 | 56.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | 180-195 | 188-196 | 18-21 |
| MENHADEN | — | — | — | — | — | — | 9.0 | 0.5 | 0.5 | 19.0 | 16.0 | 0.5 | 5.5 | 24.5 | 24.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 140-180 | 188-196 | 31-33 |
| MUSTARD SEED (MONTANA) | — | — | — | — | — | — | — | — | — | 3.0 | 0.5 | — | 6.5 | 22.0 | 22.5 | 15.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 114-128 | 176-184 | 6-10 |
| NEATSFOOT | — | — | — | — | 0.5 | 1.0 | 0.5 | — | — | 20.5 | 6.0 | — | 4.5 | 56.5 | 9.5 | — | — | — | — | — | — | 0.5 | — | — | — | — | — | — | — | 65-75 | 190-199 | 20-30 |
| OLITICICA | — | — | — | — | — | — | — | — | — | 6.0 | — | — | 5.0 | 6.0 | 5.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 140-160 | 188-196 | 17-21 |
| OLIVE | — | — | — | — | — | — | — | — | — | 13.0 | 1.0 | — | 2.5 | 74.0 | 9.0 | 0.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 79-89 | 188-196 | 17-28 |
| PALM | — | — | — | — | 1.0 | — | — | — | — | 43.5 | — | — | 4.5 | 40.0 | 11.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 45-55 | 195-205 | 40-47 |
| PALM KERNEL | — | — | 3.5 | 3.5 | 48.5 | — | 16.5 | — | — | 8.5 | — | — | 2.5 | 14.5 | 2.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 14-24 | 245-255 | 20-28 |
| PEANUT (SOUTHWEST) | — | — | — | — | — | — | — | — | — | 11.0 | — | — | 3.5 | 50.0 | 30.5 | 1.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | 93-98 | 188-196 | 28-34 |
| PEANUT (WEST COAST) | — | — | — | — | — | — | — | — | — | 12.5 | — | — | 3.0 | 38.5 | 38.0 | 1.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 96-101 | 188-196 | 26-32 |
| PERILLA | — | — | — | — | — | — | — | — | — | 8.0 | — | — | — | 16.0 | 14.0 | 62.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | 193-208 | 188-197 | 12-19 |
| RAPESEED (HIGH-ERICIC) | — | — | — | — | — | 0.5 | — | — | — | 4.0 | — | — | 0.5 | 12.5 | 14.5 | 16.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 97-104 | 169-179 | 11-15 |
| RAPESEED (MONTANA) | — | — | — | — | — | — | — | — | — | 3.0 | — | — | 1.5 | 32.0 | 19.0 | 10.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | 104-110 | 170-180 | 11-15 |
| RICE BRAN | — | — | — | — | — | — | 0.5 | — | — | 17.0 | — | — | 2.5 | 45.5 | 32.0 | 1.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | 92-109 | 184-195 | 26-28 |
| SAFFLOWER | — | — | — | — | — | — | — | — | — | 6.5 | — | — | 2.5 | 11.5 | 79.0 | 0.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 138-145 | 186-195 | 15-18 |
| SARDINE | — | — | — | — | — | — | 6.0 | — | — | 11.5 | 12.0 | — | 2.5 | 11.5 | 11.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 160-190 | 188-196 | 28-32 |
| SESAME | — | — | — | — | — | — | — | — | — | 9.0 | — | — | 6.0 | 41.5 | 43.0 | 0.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 106-113 | 188-196 | 20-25 |
| SOYBEAN | — | — | — | — | — | — | — | — | — | 11.0 | — | — | 4.0 | 21.0 | 55.5 | 8.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | 125-135 | 188-196 | 20-22 |
| SPERM-BODY FATTY ACIDS | — | — | — | — | 1.0 | — | 5.0 | 4.0 | — | 6.5 | 26.5 | — | — | — | 37.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 76-88 | 122-130 | 8-14 |
| SPERM-HEAD FATTY ACIDS | — | — | — | — | 3.0 | 16.0 | 4.0 | 14.0 | 14.0 | 8.0 | 15.0 | — | — | 2.0 | 17.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 55-70 | 140-144 | 12-18 |
| SUNFLOWER | — | — | — | — | — | — | 0.5 | — | — | 6.5 | — | — | — | 4.0 | 17.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 128-138 | 186-196 | 16-20 |
| TALL OIL (Distilled Fatty Acids) | — | — | — | — | — | — | — | — | — | 1.0 | 0.5 | — | — | 1.5 | 50.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 128-133 | 186-196 | 1-8 |
| TALLOW | — | — | — | — | — | — | 3.5 | 1.0 | 0.5 | 25.5 | 4.0 | 2.5 | 19.5 | 41.0 | 2.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 40-50 | 192-202 | 40-46 |
| TUNG OIL | — | — | — | — | — | — | — | — | — | 4.0 | — | — | — | 1.0 | 8.5 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 160-175 | 189-195 | 34-42 |
| WHALE | — | — | — | — | — | — | 8.0 | 2.0 | — | 17.0 | 13.0 | — | — | 2.0 | 39.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 110-140 | 185-195 | 22-24 |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------|------|------|-------|-------|-------|-----|-------|-----|-------|-------|-----|-------|-------|-------|------|--------|-----|-------|-----------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|----|---|---|---|
| NUMBER OF CARBON ATOMS | 4 | 6 | 8 | 10 | 12 | 12 | 14 | 14 | 15 | 16 | 16 | 17 | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 20 | 20 | 20 | 22 | 22 | 22 | 24 | 24 | 24 | | | |
| NUMBER OF DOUBLE BONDS | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 2 | 3 | 1 | 0 | 3 | 3 | 0 | 1 | 2-5 | 0 | 1 | 2-5 | 0 | 1 | 2-5 | | | | |
| MOLECULAR WEIGHT | 88 | 116 | 144 | 172 | 200 | 198 | 228 | 226 | 242 | 256 | 254 | 270 | 284 | 282 | 280 | 278 | 298 | 316 | 292 | 278 | 312 | 310 | — | 340 | 338 | — | 368 | 366 | — | | | | |
| NEUTRALIZATION VALUE | 636 | 483 | 389 | 325 | 280 | 282 | 245 | 247 | 231 | 218 | 220 | 207 | 197 | 198 | 200 | 201 | 187 | 177 | 191 | 201 | 179 | 180 | — | 164 | 165 | — | 152 | 153 | — | | | | |
| IODINE VALUE | 0 | 0 | 0 | 0 | 0 | 128 | 0 | 112 | 0 | 0 | 99 | 0 | 0 | 89 | 181 | 273 | 85 | 0 | 260 | 273 | 0 | 81 | — | 0 | 74 | — | 0 | 69 | — | | | | |
| BOILING POINT -°C @ 5 mm Hg | 50.0 | 86.5 | 113.5 | 137.0 | 158.0 | — | 178.0 | — | 187.0 | 197.0 | — | 206.0 | 214.0 | 209.0 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| MELTING POINT -°C | -8.0 | -3.4 | 16.7 | 31.6 | 44.2 | — | 53.9 | — | 52.3 | 63.1 | 0.5 | 61.3 | 69.6 | 13.4 | -5.0 | <-10.0 | 5.0 | 141.0 | 74.0-75.0 | — | 75.3 | — | — | — | — | — | — | — | — | — | — | — | — |

Table 13.14: Arizona Chemical ACTINOL Tall Oil Fatty Acids (5)

| | COLOR GARDNER 1963 | ACID VALUE | SAPONIFICATION VALUE | IODINE VALUE (WIJS) | MOISTURE % | ASH % | ROSIN ACIDS % | UNSAPONIFIABLES % | FATTY ACIDS TOTAL % | LINOLEIC NON-CONJUGATED |
|--------------|--------------------|------------|----------------------|---------------------|------------|--------|---------------|-------------------|---------------------|-------------------------|
| FA-1 | 5 | 194 | 197 | 131 | < 0.1 | < 0.01 | 4.5 | 2.7 | 92.8 | 34 |
| FA-1 Special | 4 + | 195 | 198 | 131 | < 0.1 | < 0.01 | 2.8 | 2.0 | 95.2 | 35 |
| FA-2 | 3 + | 197 | 199 | 130 | < 0.1 | < 0.01 | 0.9 | 1.3 | 97.8 | 37 |
| FA-3 | 3 - | 198 | 200 | 130 | < 0.1 | < 0.01 | 0.5 | 0.7 | 98.8 | 38 |
| EPG | 1 + | 198 | 200 | 130 | < 0.1 | < 0.01 | 0.5 | 0.5 | 99.0 | 38 |
| 736 | 7 | 189 | - | - | < 0.1 | < 0.01 | 7.5 | 5.5 | 87.0 | 0 |
| 746 | 4 | 198 | - | 90 | < 0.1 | < 0.01 | 1.0 | 1.5 | 97.5 | 0 |

| | LINOLEIC CONJUGATED | OLEIC % | SATURATED % | OTHERS BY DIFFERENCE, % | SPECIFIC GRAVITY 25°/25° C | WEIGHT PER GAL. 25° C, LBS. | VISCOSITY GARDNER-HOLDT 25° C | VISCOSITY CPS 25° C | FLASH POINT CLOSED CUP ° F |
|--------------|---------------------|---------|-------------|-------------------------|----------------------------|-----------------------------|-------------------------------|---------------------|----------------------------|
| FA-1 | 9 | 44 | 5 | 8 | 0.906 | 7.53 | A | 20 | > 200 |
| FA-1 Special | 9 | 47 | 3 | 6 | 0.902 | 7.50 | A | 20 | > 200 |
| FA-2 | 7 | 50 | 2 | 4 | 0.898 | 7.47 | A | 20 | > 200 |
| FA-3 | 7 | 50 | 2 | 3 | 0.897 | 7.45 | A | 20 | > 200 |
| EPG | 7 | 51 | 2 | 2 | 0.897 | 7.45 | A | 20 | > 200 |
| 736 | 11 | 61 | 10 | 18 | 0.900 | 7.48 | - | - | > 200 |
| 746 | 13 | 75 | 5 | 7 | 0.905 | 7.52 | - | - | > 200 |

Table 13.15: Eastman Chemicals Acids and Anhydrides (41)

| | Form | Color Pt-Co Max | Specific Gravity @ 20°/20°C | Boiling Point °C | Freezing Point °C | Flash Point TOC °C (°F) | Fire Point °C (°F) | Assay Min Wt % |
|----------------------------------------------------------------------------------------------------------------------|--------|-----------------------|-----------------------------------|------------------------|-------------------------|-------------------------------|--------------------------|----------------------|
| Glacial Acetic Acid ^{a,b,c,d} (Ethanoic Acid) CH ₃ COOH | Liquid | — | 1.05 | 118 | 17 | 43 (109) | 64 (148) | 99 |
| Acetic Anhydride ^d (Acetyl Oxide) (CH ₃ CO) ₂ O | Liquid | — | 1.08 | 140 | -73 | 56 (132) | 58 (137) | 99 |
| Butyric Acid (Ethyl Acetic Acid) C ₃ H ₇ COOH | Liquid | 15 | 0.96 | 164 | -8 | 71 (160) | 75 (167) | 99 |
| Butyric Anhydride (C ₃ H ₇ CO) ₂ O | Liquid | — | 0.97 | 195 | -73 | 84 (183) | 87 (189) | 98 |
| Crotonic Acid (2-Butenoic Acid) CH ₃ CH:CHCOOH | Solid | 15 (APHA) | 0.96 (80°/4°C) | 185 | 70 | 94 (202) COC | 97 (207) | 99 |
| 2-Ethylhexoic Acid (2-Ethylhexanoic Acid) C ₄ H ₉ CH(C ₂ H ₅)COOH | Liquid | 25 | 0.91 | 223 | -118 | 118 (245) COC | 127 (260) | 99 |
| Isobutyric Acid (2-Methylpropanoic Acid) (CH ₃) ₂ CHCOOH | Liquid | 10 | 0.95 | 155 | -47 | 62 (143) | 67 (152) | 99 |
| Isobutyric Anhydride C ₈ H ₁₄ O ₃ | Liquid | — | 0.95 | 182 | -54 | 72 (161) | 74 (166) | 98 |
| Propionic Acid ^{a,b,c} C ₂ H ₅ COOH | Liquid | 10 | 0.99 | 141 | -22 | 54 (130) | 58 (137) | 99 |
| Propionic Anhydride (C ₂ H ₅ CO) ₂ O | Liquid | — | 1.01 | 167 | -45 | 66 (151) | 66 (151) | 98 |

^aAvailable in food grade^bKosher certified^cAvailable in feed grade^dAvailable in reagent grade

Table 13.16: Halocarbon Products BIOGRADE Trifluoroacetic Acid (25)

SPECIFICATIONS:

| | |
|---------------------------|------------|
| Assay by titration | 99.9% Min. |
| Trifluoroacetic Anhydride | nil |
| Water | 0.05% Max. |

Trace Impurities (Maximums)

| | |
|---------------------------|---------|
| Chloride | 0.001% |
| Fluoride | 0.001% |
| Sulfate | 0.001% |
| Iron (Fe) | 0.0001% |
| Residue after evaporation | 0.0002% |

| | |
|-----------------------------------------------------------------------------------------------|--------|
| Color (Platinum-Cobalt Scale) | 5 Max. |
| Ultraviolet Absorbance Maxima (0.1% in distilled water vs. distilled water in 1 cm cell path) | |
| at 230 nm | 0.15% |
| at 254 nm | 0.01% |

Table 13.17: EMERY Fatty and Dibasic Acids (63)

Dimer, Trimer and Polybasic Acids

| Specifications | | | Comparative Typical Composition ¹ | | | | | |
|----------------------------------------|----------------------|--------------------------|----------------------------------------------|----|------|-------------------------------------|-----------------|-----------------|
| | Acid Value | Color 1963 Gardner, max. | Short-Path Methyl Ester Distillation | | | High Pressure Liquid Chromatography | | |
| | | | Mono | Di | Poly | Mono | Di | Poly |
| Empol® 1010 Dimer Acid (polymer grade) | 194-200 | 1 | 0 | 97 | 3 | 4 | 94 | 2 |
| Empol 1014 Dimer Acid | 194-198 | 5 | 1 | 95 | 4 | 4 | 91 | 5 |
| Empol 1016 Dimer Acid | 190-198 | 6 | 1 | 80 | 19 | 6 | 76 | 18 |
| Empol 1018 Dimer Acid | 190-198 | 8 | Tr | 83 | 17 | 6 | 79 | 15 |
| Empol 1022 Dimer Acid | 189-197 | 8 | 3 | 75 | 22 | 9 | 77 | 14 |
| Empol 1024 Dimer Acid | 190-198 | 8 | Tr | 75 | 25 | 8 | 77 | 15 |
| Empol 1040 Trimer Acid | 175-192 | — | — | 7 | 93 | 2 | 18 | 80 |
| Empol 1041 Trimer Acid | 161-181 | 11 | — | 10 | 90 | 3 | 35 | 62 |
| Empol 1052 Polybasic Acid | 250-265 ² | dark | — | — | — | 3 ³ | 34 ³ | 63 ³ |

¹Short path methyl ester fractionation measures the relative molecular size of the various components of these acids. High pressure liquid chromatography (HPLC) separates components according to their functionality.

²Not a specification.

³By thin layer chromatography. This method determines composition according to functionality.

Food Grade¹ Fatty Acids

| Specifications | | | | | Typical Composition ² | | | | | | | | | | | | | | |
|----------------------------------------------------|-----------|-------------------|----------------------------------|------------|---------------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|--------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------|---------------------------------------------------------|----------------------------------------------------------|--|--|--|--|--|
| | Titer, °C | Iodine Value max. | Color % Trans. 440/550 nm., min. | Acid Value | Saturated Acids | | | | | Unsaturated Acids | | | | | | | | | |
| | | | | | Myristic C ₁₄ H ₂₈ O ₂ | Pentadecanoic C ₁₅ H ₃₀ O ₂ | Palmitic C ₁₆ H ₃₂ O ₂ | Margaric C ₁₇ H ₃₄ O ₂ | Stearic C ₁₈ H ₃₆ O ₂ | Myristoleic C ₁₄ H ₂₈ O ₂ | Palmitoleic C ₁₆ H ₃₀ O ₂ | Oleic C ₁₈ H ₃₄ O ₂ | Linoleic C ₁₈ H ₃₂ O ₂ | Linolenic C ₁₈ H ₃₀ O ₂ | | | | | |
| Emersol® 6320 DP Stearic Acid | 53.9-54.7 | 3.5-5.0 | 88/99 | 205-210 | 2.5 | 0.5 | 50 | 1 | 40 | | | | | | | | | | |
| Emersol 6332 NF TP Stearic Acid ^{3,4} | 54.5-55.5 | 0.5 | 93/99 | 205-211 | 1.5 | 0.5 | 50 | 1 | 47 | | | | | | | | | | |
| Emersol 6349 Stearic Acid | 59.0-60.5 | 0.5 | 88/99 | 203-206 | 3 | 0.5 | 26.5 | 1 | 69 | | | | | | | | | | |
| Emersol 6351 Stearic Acid ⁵ | 65-88 | 1.0 | 84/98 | 196-201 | 1 | Tr | 7.5 | 2.5 | 88 | | | | | | | | | | |
| Emersol 6313 NF Low-titer Oleic Acid ³ | 6 max. | 88-93 | 75/98 | 201-204 | 3 | Tr | 5 | 1 | Tr | 3 | 6 | 75 | 6 | 1 | | | | | |
| Emersol 6321 NF Low-titer White Oleic ³ | 6 max. | 87-92 | 85/99 | 201-204 | 3 | Tr | 5 | 1 | Tr | 3 | 6 | 75 | 6 | 1 | | | | | |
| Emersol 6333 NF LL Oleic Acid ^{3,6} | 8-10 | 86-91 | 85/99 | 200-204 | 3 | Tr | 6.5 | 1 | 1.5 | 3 | 5.5 | 73.5 | 5.5 | 0.5 | | | | | |

¹Meet the requirements of Federal Food Additive Regulation Section 21CFR 172.860.

²Typical compositions determined by GLC analysis, AOCS Ce 1-62. These compositions are not manufacturing specifications.

³USP XXI/NF XVI.

⁴Powdered grade also available.

⁵Emersol 7051 Kosher Grade available.

⁶LL (low-linoleic content) oleic: polyunsaturate 6% max.

(continued)

Table 13.17: (continued)

Coconut Fatty Acids

| | Specifications | | | | | Typical Composition ¹ | | | | | | | |
|--------------------------------------------------------|----------------|-----------------|----------------------------------|--------------------------|---------------|-----------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------|
| | Titer, °C | Iodine Value | Color | | Acid Value | Caprylic C ₈ H ₁₆ O ₂ | Capric C ₁₀ H ₂₀ O ₂ | Lauric C ₁₂ H ₂₄ O ₂ | Myristic C ₁₄ H ₂₈ O ₂ | Palmitic C ₁₆ H ₃₂ O ₂ | Stearic C ₁₈ H ₃₆ O ₂ | Oleic C ₁₈ H ₃₄ O ₂ | Linoleic C ₁₈ H ₃₂ O ₂ |
| | | | % Trans. 440/550 nm., min. | Gardner 1963, max. | | | | | | | | | |
| Emery® 621 Coconut Fatty Acid | 23-27 | 5-16 | 30/80 | 5 ² | 258-268 | 4 | 5 | 48 | 20 | 10 | 2 | 10 | 1 |
| Emery 622 Coconut Fatty Acid | 22-26 | 5-10 | 65/96 | 2 ² | 268-276 | 7 | 6 | 48 | 19 | 9 | 2 | 8 | 1 |
| Emery 625 Partially Hydrogenated Coconut Fatty Acid | 23-25 | 5.0 max. | 85/98 | 1 | 269-273 | 7 | 6 | 49 | 19 | 9 | 7 | 3 | |
| Emery 626 Low IV Ultra Coconut Fatty Acid ³ | 23-26 | 1.0 max. | 85/99 | 1 | 270-276 | 7 | 6 | 51 | 18 | 10 | 7 | 1 | |
| Emery 627 Low IV, Stripped, Ultra Coconut Fatty Acid | 28-32 | 1.0 max. | 90/98 | 1 | 252-258 | | 1 | 55 | 22 | 11 | 10 | 1 | |
| Emery 629 Stripped, Coconut Fatty Acid | 27-30 | 6-10 | 88/98 | 1 | 253-259 | | 1 | 55 | 23 | 12 | 3 | 5 | |

¹Typical compositions determined by GLC analysis, AOCS Ce 1-62. These compositions are not manufacturing specifications.

²Typical property.

³Emery 7026 Kosher Grade available.

Isostearic Acids

| Specifications | | | | |
|------------------------------|--------------------|-----------------|--------------------------------------------|---------------|
| | Titer, °C, max. | Iodine Value | Color % Trans. 440/550, nm., min. | Acid Value |
| Emersol® 871 Isostearic Acid | 10 | 12 max. | 30/85 | 175 min. |
| Emersol 875 Isostearic Acid | 10 | 3 max. | 85/98 | 187-197 |

Oleic Acids

| Specifications | | | | | Typical Composition ¹ | | | | | | | | | | |
|----------------------------------------------------------|-----------------|-------------------------------------------|---------------|---------|----------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------------|
| | | | | | Saturated Acids | | | | | Unsaturated Acids | | | | | |
| Titer, °C | Iodine Value | Color % Trans. 440/550 nm., min. | Acid Value | | Lauric C ₁₂ H ₂₄ O ₂ | Myristic C ₁₄ H ₂₈ O ₂ | Pentadecanoic C ₁₅ H ₃₀ O ₂ | Palmitic C ₁₆ H ₃₂ O ₂ | Margaric C ₁₇ H ₃₄ O ₂ | Stearic C ₁₈ H ₃₆ O ₂ | Myristoleic C ₁₄ H ₂₈ O ₂ | Palmitoleic C ₁₆ H ₃₀ O ₂ | Oleic C ₁₈ H ₃₄ O ₂ | Linoleic C ₁₈ H ₃₂ O ₂ | Linolenic C ₁₈ H ₃₀ O ₂ |
| Emersol® 210 Oleic Acid | 7-12 | 87-95 | 2/30 | 197-204 | Tr | 3 | Tr | 5 | 1 | 1 | 4 | 6 | 71 | 8 | 1 |
| Emersol 213 NF Low-titer Oleic Acid ^{2,3} | 5 max. | 88-95 | 56/86 | 199-204 | Tr | 3 | Tr | 5 | 1 | Tr | 3 | 6 | 73 | 8 | 1 |
| Emersol 221 NF Low-titer White Oleic Acid ^{2,3} | 5 max. | 88-95 | 77/98 | 199-204 | Tr | 3 | Tr | 4 | 1 | Tr | 3 | 7 | 73 | 8 | 1 |
| Emersol 223 NF Ultra Oleic Acid ³ | 5 max. | 88-95 | 85/99 | 199-204 | Tr | 3 | Tr | 4 | 1 | Tr | 3 | 7 | 73 | 8 | 1 |
| Emersol 233 LL Oleic Acid ⁴ | 6 max. | 86-90 | 78/99 | 200-204 | Tr | 3 | Tr | 4 | 1 | Tr | 3 | 11 | 74 | 4 | Tr |

¹Typical compositions determined by GLC analysis, AOCS Ce 1-62. These compositions are not manufacturing specifications.

²Corresponding food grade products available

³For external use only, USP XXI/NF XVI.

⁴LL (low-linoleic content) oleic: polyunsaturates 5% max.

(continued)

Table 13.17: (continued)

Short-Chain Acids²

| | Specifications | | | | Typical Composition ¹ | | | | | |
|--------------------------------|----------------|-------------------|----------------------------------|------------|-------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|
| | Titer, °C | Iodine Value max. | Color % Trans. 440/550 nm., min. | Acid Value | Caproic C ₆ H ₁₂ O ₂ | Caprylic C ₈ H ₁₆ O ₂ | Capric C ₁₀ H ₂₀ O ₂ | Lauric C ₁₂ H ₂₄ O ₂ | Myristic C ₁₄ H ₂₈ O ₂ | Palmitic C ₁₆ H ₃₂ O ₂ |
| Emery® 657 Caprylic Acid | 14-16 | 0.2 | 88/99 | 385-390 | Tr | 99 | 1 | | | |
| Emery 658 Caprylic-Capric Acid | 1-6 | 0.3 | 88/99 | 356-366 | 3 | 56 | 40 | 1 | | |
| Emery 659 Capric Acid | 28-31 | 0.5 | 88/99 | 322-326 | | 1 | 97 | 2 | | |
| Emery 650 Lauric Acid | 33-35 | 0.4 | 85/97 | 268-272 | | | | 71 | 28 | 1 |
| Emery 651 Lauric Acid | 41-43 | 0.2 | 90/98 | 276-282 | | Tr | 1 | 96 | 3 | |
| Emery 652 Lauric Acid | 43 min. | 0.2 | 90/98 | 277-281 | | Tr | 0.3 | 99 | 0.7 | |
| Emery 655 Myristic Acid | 52.0-53.5 | 0.5 | 90/99 | 243-246 | | | | 1 | 97 | 2 |

¹Typical compositions determined by GLC analysis, AOCS Ce 1-62. These compositions are not manufacturing specifications.

²Kosher Grades of these acids are available.

Stearic and Palmitic Acids

| | Specifications | | | | | Typical Composition ¹ | | | | | | | | |
|----------------------------------------------------|----------------|--------------|----------------------------------|------------|---------------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|--------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------|---------------------------------------------------------|----|
| | Titer, °C | Iodine Value | Color % Trans. 440/550 nm., min. | Acid Value | Saturated Acids | | | | | Unsaturated Acids | | | | |
| | | | | | Myristic C ₁₄ H ₂₈ O ₂ | Pentadecanoic C ₁₅ H ₃₀ O ₂ | Palmitic C ₁₆ H ₃₂ O ₂ | Margaric C ₁₇ H ₃₄ O ₂ | Stearic C ₁₈ H ₃₆ O ₂ | Arachidic C ₂₀ H ₄₀ O ₂ | Palmitoleic C ₁₆ H ₃₀ O ₂ | Oleic C ₁₈ H ₃₄ O ₂ | Linoleic C ₁₈ H ₃₂ O ₂ | |
| Emersol® 110 Stearic Acid | 52.8-53.5 | 8-12 | 60/94 | 205-210 | 2.5 | 0.5 | 50 | 2 | 35 | | | 9 | 1 | |
| Emersol 120 Stearic Acid ² | 53.7-54.7 | 5-7 | 88/99 | 205-210 | 2.5 | 1 | 50 | 2.5 | 39 | | | Tr | 5 | Tr |
| Emersol 132 NF Lily® Stearic Acid ^{2,3,4} | 54.5-55.5 | 0.5 max. | 93/99 | 205-210 | 2.5 | 0.5 | 50 | 1.5 | 45.5 | | | | | |
| Emersol 143 Palmitic Acid | 58-61 | 1 max. | 93/99 | 215-223 | Tr | 0.5 | 91 | 4.5 | 4 | | | | | |
| Emersol 150 Stearic Acid ⁵ | 63.9-65.0 | 1 max. | 93/99 | 197-202 | 2 | 1 | 11 | 2 | 83 | | | | 1 | |
| Emersol 152 NF Stearic Acid ³ | 66.5-69.0 | 1 max. | 80/97 | 196-199 | | | 7 | | 90 | 3 | | | | |
| Emersol 153 NF Stearic Acid ³ | 67-69 | 1 max. | 80/97 | 196-199 | | | 5 | | 95 | | | | | |
| Emery 400 Stearic Acid | 52 min. | 9.5 max. | 1/40 | 197-212 | | | | | | | | | | |
| Emery 404 Stearic Acid | 53.5-54.5 | 6-9 | 1/50 | 197-209 | | | | | | | | | | |
| Emery 405 Stearic Acid ⁶ | 57 min. | 6 max. | 40/86 | 195-205 | | | | | | | | | | |
| Emery 410 Stearic Acid | 56.1-60.0 | 7 max. | 40/86 | 195-209 | 3 | 0.5 | 25 | 2 | 63 | | | 2.5 | 4 | |
| Emery 420 Stearic Acid | 57.2-63.0 | 1 max. | 85/98 | 200-207 | 4 | 0.5 | 29 | 1.5 | 65 | | | Tr | Tr | |
| Emery 422 Stearic Acid | 55.8-60.0 | 1 max. | 90/99 | 203-209 | 3 | Tr | 41 | 1 | 55 | | | | | |

¹Typical compositions determined by GLC analysis, AOCS Ce 1-62. These compositions are not manufacturing specifications.

²Corresponding food grade products available.

³For external use only, USP XXI/NF XVI.

⁴Powdered grade also available.

⁵80% minimum stearic content.

⁶Tentative specification.

(continued)

Table 13.17: (continued)

Tallow and Modified Fatty Acids

| | Specifications | | | | Typical Composition ¹ | | | | | | | | |
|------------------------------|-----------------|-------------------------------------------|--------------------|---------|------------------------------------------------------------|-----------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------------|
| | | | | | Saturated Acids | | | | | Unsaturated Acids | | | |
| | | | | | Myristic C ₁₄ H ₂₈ O ₂ | Pentadecanoic C ₁₅ H ₃₀ O ₂ | Palmitic C ₁₆ H ₃₂ O ₂ | Margaric C ₁₇ H ₃₄ O ₂ | Stearic C ₁₈ H ₃₆ O ₂ | Palmitoleic C ₁₈ H ₃₄ O ₂ | Oleic C ₁₈ H ₃₄ O ₂ | Linoleic C ₁₈ H ₃₂ O ₂ | Linolenic C ₁₈ H ₃₀ O ₂ |
| Titer, °C | Iodine Value | Color % Trans. 440/550 nm., min. | Acid Value | | | | | | | | | | |
| Emery® 531 Tallow Fatty Acid | 36-44 | 45-70 | 19/81 | 200-208 | 2.5 | 0.5 | 27 | 1 | 17 | 4 | 42 | 5 | 1 |
| Emery 401 Fatty Acid | 44-53 | 34-44 | 80/95 | 199-208 | | | | | | | | | |
| Emery 876 Fatty Acid | 35-45 | 2-6 | — | 235-269 | | | | | | | | | |
| Emery 877 Fatty Acid | 34-45 | 2 max. | 47/93 ² | 240-270 | 80% Monobasic acids, 20% dibasic acids | | | | | | | | |
| Emery 878 Fatty Acid | — | 1 max. | 70/95 | 295-315 | | | | | | | | | |

¹Typical compositions determined by GLC analysis, AOCS Ce 1-62. These compositions are not manufacturing specifications.

²Not a specification.

Tallow/Coconut Fatty Acid Blends

| Specifications | | | | |
|-----------------------|---------------|-----------------|--------------|-------------------------------------------|
| | Acid Value | Iodine Value | Titer, °C | Color % Trans. 440/550 nm., min. |
| Emery® 515 Fatty Acid | 212-218 | 44-54 | 35-40 | 72/96 |
| Emery 516 Fatty Acid | 214-216 | 35-42 | 38-45 | 70/94 |
| Emery 517 Fatty Acid | 216-222 | 42 max. | 37-40.5 | 78/94 |

Linoleic and Vegetable Fatty Acids

| | Specifications | | | | | Typical Composition ¹ | | | | | | | | | | |
|-------------------------------|-----------------|-------------------------------------------|--------------------------|---------------|---------|----------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------------|
| | | | | | | Saturated Acids | | | | | Unsaturated Acids | | | | | |
| | | | | | | Lauric C ₁₂ H ₂₄ O ₂ | Myristic C ₁₄ H ₂₈ O ₂ | Pentadecanoic C ₁₅ H ₃₀ O ₂ | Palmitic C ₁₆ H ₃₂ O ₂ | Margaric C ₁₇ H ₃₄ O ₂ | Stearic C ₁₈ H ₃₆ O ₂ | Myristoleic C ₁₄ H ₂₈ O ₂ | Palmitoleic C ₁₆ H ₃₀ O ₂ | Oleic C ₁₈ H ₃₄ O ₂ | Linoleic C ₁₈ H ₃₂ O ₂ | Linolenic C ₁₈ H ₃₀ O ₂ |
| Titer °C | Iodine Value | Color % Trans. 440/550 nm., min. | Gardner 1963, max. | Acid Value | | | | | | | | | | | | |
| Emersol® 315 Linoleic Acid | 5 max. | 145-160 | 72/96 | 3 | 195-202 | | 0.5 | Tr | 3.5 | Tr | 0.5 | Tr | Tr | 19.5 | 65.5 | 10.5 |
| Emery® 610 Soya Fatty Acid | 15-25 | 125-138 | 60/90 | 3 | 195-205 | Tr | 0.5 | | 16 | Tr | 4 | | 1 | 25.5 | 48 | 5 |
| Emery 618 Soya Fatty Acid | 15-23 | 138-145 | 72/96 | 3 | 197-203 | | | | 11 | | 4 | | 1 | 27 | 50 | 7 |

¹Typical compositions determined by GLC analysis, AOCS Ce 1-62. These compositions are not manufacturing specifications.

Table 13.18: INDUSTRENE and HYSTRENE Fatty and Dibasic Acids (26)

| CAPRYLIC/CAPRIC ACIDS | | | | | | | | | | | | | | |
|---------------------------------------------------------------------|---------------------------------------------------------------------|----------------|-----------------|---------------|-------------------|-------------------------------|--------------------------|----------------------------------|-----|-----|-----|-----|----------------------|--------|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | | | |
| | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAT MAX | % TRANS 440/550 nm, MIN | COLOR LOVIBOND MAX | SATURATED | | | | | UNSATURATED C18:1 | OTHERS |
| | | | | | | | | C8 | C10 | C12 | C14 | C16 | | |
| Industrene 365* | Caprylic/Capric (Mixture Caprylic/ Capric Acid) 67762-36-1 | 6 Max | 1 Max | 355-369 | 1 | 70/92 | 5.0Y-0.5R | 60 | 38 | | | | 2 | |
| * Available only in bulk Typical moisture levels are below 0.3%. | | | | | | | | | | | | | | |

| LAURIC AND MYRISTIC ACIDS | | | | | | | | | | | | | | | |
|-----------------------------------------|--------------------------------------------------------------------------------|----------------|-----------------|---------------|-------------------|-------------------------------|--------------------------|----------------------------------|-----|-----|-----|-----|----------------------|--------|-----|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | | | | |
| | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAT MAX | % TRANS 440/550 nm, MIN | COLOR LOVIBOND MAX | SATURATED | | | | | UNSATURATED C18:1 | OTHERS | |
| | | | | | | | | C8 | C10 | C12 | C14 | C16 | | | C18 |
| Industrene 325 | Distilled Coconut (Coconut Acid) 61788-47-4 | 22-27 | 5-10 | 265-277 | 0.5 | 65/90 | 8.0Y-0.8R | 7 | 6 | 50 | 19 | 9 | 2 | 6 | 1 |
| Industrene 223 | Hydrogenated Coconut (Hydrogenated Coconut Acid) 67701-05-7 | 23-26 | 3 Max | 266-274 | 0.3 | 85/96 | 2.0Y-0.2R | 7 | 6 | 51 | 18 | 9 | 2 | 5 | 2 |
| Industrene 328 | Stripped Coconut (Coconut Acid) 61788-47-4 | 27-30 | 5-10 | 252-260 | 0.5 | 80/96 | 3.0Y-0.3R | | | 55 | 24 | 12 | 1 | 4 | 4 |
| Hystrene 5012 | Hydrogenated Stripped Coconut (Hydrogenated Coconut Acid) 143-07-7 | 26-33 | 1 Max | 250-260 | 0.5 | 85/96 | 2.0Y-0.2R | 1 | 1 | 55 | 23 | 12 | 8 | | |
| Hystrene 9512 | 95% Lauric (Lauric Acid) 143-07-7 | 41-44 | 0.5 Max | 275-281 | 0.25 | 85/96 | 2.0Y-0.2R | 1 | 96 | 3 | | | | | |
| Hystrene 9912 | 99% Lauric (Lauric Acid) 143-07-7 | 43-45 | 0.2 Max | 276-281 | 0.25 | 92/98 | 1.0Y-0.1R | | | 99 | | | | | 1 |
| Hystrene 9014 | 90% Myristic (Myristic Acid) 544-63-8 | 50-54 | 0.5 Max | 238-245 | 0.3 | 85/96 | 2.0Y-0.2R | | | 2 | 92 | 4 | | | 2 |
| Hystrene 9514 | 95% Myristic (Myristic Acid) 544-63-8 | 52-54 | 0.5 Max | 241-247 | 0.3 | 92/98 | 1.0Y-0.1R | | | 1 | 97 | 1 | | | 1 |
| Typical moisture levels are below 0.3%. | | | | | | | | | | | | | | | |

(continued)

Table 13.18: (continued)

| STEARIC AND PALMITIC ACIDS | | | | | | | | | | | | |
|--------------------------------|-------------------------------------------------------|----------------|-----------------|---------------|-------------------|-------------------------------|-----------------------|----------------------------------|-----|-----|-------------|--------|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | |
| | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAT MAX | % TRANS 440/550 nm, MIN | COLOR MAX | SATURATED | | | UNSATURATED | OTHERS |
| | | | | | | | | C14 | C16 | C18 | C18:1 | |
| Hystrene 9016 | 90% Palmitic (Palmitic Acid) 57-10-3 | 59-62 | 0.5 Max | 214-219 | 0.2 | 92/98 | 1.0Y-0.1R Lovibond | 1 | 92 | 6 | | 1 |
| Industrene 5016 | Double Pressed Grade (Stearic Acid) 57-11-4 | 53-56 | 4-7 | 207-210 | 0.5 | 88/96 | 1.5Y-0.2R Lovibond | 3 | 46 | 42 | 5 | 4 |
| Hystrene 5016 NF-EXT | Triple Pressed Grade (Stearic Acid) 57-11-4 | 54.5-56.5 | 0.5 Max | 206-210 | 0.2 | 92/98 | 1.0Y-0.1R Lovibond | 2 | 51 | 45 | | 2 |
| Hystrene 5016 NF-EXT-VEG | Triple Pressed Grade (Stearic Acid) 57-11-4 | 55-57 | 0.7 Max | 205-210 | 0.2 | 88/96 | 1.5Y-0.2R Lovibond | 1 | 52 | 46 | | 1 |
| Industrene 4516 | 45% Palmitic (Palmitic Acid) 57-11-4 | 54-57 | 2 Max | 204-209 | 1 | 88/96 | 1.5Y-0.2R Lovibond | 2 | 44 | 52 | | 2 |
| Hystrene 4516 | 45% Palmitic (Palmitic Acid) 57-11-4 | 55-58 | 0.8 Max | 203-209 | 0.25 | 92/98 | 1.0Y-0.1R Lovibond | 2 | 43 | 52 | | 3 |
| Industrene R | Stearic Acid 57-11-4 | 52-64 | 10 Max | 193-213 | 3 | | 12 Gardner | | | | | |
| Industrene B | Stearic Acid 57-11-4 | 57-63 | 3 Max | 198-207 | 1 | 40/86 | 3 Gardner | 3 | 28 | 65 | | 4 |
| Industrene 7018 | 70% Stearic (Stearic Acid) 57-11-4 | 58-62 | 1 Max | 200-207 | 0.5 | 70/92 | 5.0Y-0.5R Lovibond | 3 | 28 | 65 | | 4 |
| Hystrene 7018 | 70% Stearic (Stearic Acid) 57-11-4 | 58-62 | 0.5 Max | 200-206 | 0.3 | 92/98 | 1.0Y-0.1R Lovibond | 2 | 28 | 66 | | 4 |
| Industrene 9018 | 90% Stearic (Stearic Acid) 57-11-4 | 65-68.5 | 2 Max | 195-201 | 0.5 | 70/92 | 5.0Y-0.5R Lovibond | | 6 | 91 | | 3 |
| Hystrene 9718 NF-EXT | 92% Stearic (Stearic Acid) 57-11-4 | 66.5-69 | 0.8 Max | 195-200 | 0.3 | 92/98 | 1.0Y-0.1R Lovibond | | 4 | 94 | | 2 |
| Hystrene 9718 NF-EXT-VEG | 92% Stearic (Stearic Acid) 57-11-4 | 66.5-69 | 0.8 Max | 195-200 | 0.3 | 92/98 | 1.0Y-0.1R Lovibond | | 5 | 94 | | 1 |

Typical moisture levels are below 0.3%.

(continued)

Table 13.18: (continued)

| ARACHIDIC AND BEHENIC ACIDS | | | | | | | | | | | | | | |
|-----------------------------|-----------------------------------------------------------------------------|----------------|-----------------|---------------|-------------------|-------------------------------|-------------------------|----------------------------------|-----|-----|-----|-----------|--------|-----|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | | | |
| | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAT MAX | % TRANS 440/550 nm, MIN | COLOR GARDNER MAX | SATURATED | | | | | OTHERS | |
| | | | | | | | | C14 | C16 | C18 | C20 | C20 & C22 | | C22 |
| Hystrene 3022 | 30% Arachidic and Behenic (Hydrogenated Menhaden Acid) 112-85-6 | 51-55 | 4 | 193-201 | 1.5 | 50/90 | 3 | 6 | 30 | 30 | | 30 | | 4 |
| Hystrene 5522 | 55% Arachidic and Behenic (Hydrogenated Menhaden Acid) 112-85-6 | 60-63 | 4 | 178-185 | 1.5 | 50/90 | 3 | | 14 | 26 | | 55 | | 5 |
| Hystrene 6022 | 60% Arachidic and Behenic (Behenic Acid) 112-85-6 | 68-71 | 2 | 169-177 | 1.5 | 50/90 | 3 | | | 27 | 10 | | 60 | 3 |
| Hystrene 7022 | 70% Arachidic and Behenic (Behenic Acid) 112-85-6 | 63-67 | 3 | 170-180 | 1.5 | 50/90 | 3 | | | 23 | | 72 | | 5 |
| Hystrene 9022 | 90% Arachidic and Behenic (Behenic Acid) 112-85-6 | 67-72 | 3 | 165-175 | 1.5 | 50/90 | 3 | | | 6 | | 90 | | 4 |
| Hystrene 9222 | 92% Behenic (Behenic Acid) 112-85-6 | 74-79 | 2 | 162-169 | 2.0 | | 3 | | | 2 | 3 | | 93 | 2 |

Typical moisture levels are below 0.3%.

| ERUCIC ACIDS | | | | | | | | | | | | |
|------------------|-------------------------------------------------------|----------------|-----------------|---------------|-------------------|-------------------------|----------------------------------|-----|-----|-----|--------|---|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | | |
| | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAT MAX | COLOR GARDNER MAX | SATURATED & UNSATURATED | | | | OTHERS | |
| | | | | | | | C18 | C20 | C22 | C24 | | |
| Hystrene 2290 | 90% Erucic 112-86-7 | 27-37 | 65-90 | 160-185 | 2.0 | 5 | 1 | 3 | 90 | 4 | | 2 |

(continued)

Table 13.18: (continued)

| TALLOW TYPE ACIDS | | | | | | | | | | | | | | | |
|-------------------|---------------------------------------------------------------|----------------|-----------------|---------------|-------------------|-------------------------------|-----------------------|----------------------------------|-----|-----|-----|-------------|-------|-------|--------|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | | | | |
| | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAT MAX | % TRANS 440/550 nm, MIN | COLOR MAX | SATURATED | | | | UNSATURATED | | | OTHERS |
| | | | | | | | | C12 | C14 | C16 | C18 | C18:1 | C18:1 | C18:2 | |
| Hystrene 1835 | Soap Blend (Mixture Tallow/ Coconut Acid) 67701-05-7 | 40 Max | 36-42 | 214-222 | 1 | 78/94 | 4.0Y-0.4R Lovibond | 10 | 6 | 22 | 18 | 3 | 33 | 3 | 5 |
| Industrene 143 | Tallow Type 61790-37-2 | 39-43 | 45-65 | 201-206 | 1.5 | | 5 Gardner | 3 | 24 | 17 | | 5 | 43 | 5 | 3 |
| Industrene 145 | Tallow Type 61790-37-2 | 44-49 | 36-44 | 198-207 | 1.0 | 80/93 | | 3 | 26 | 25 | | 3 | 39 | 1 | 3 |

Typical moisture levels are below 0.3%.

| OLEIC ACIDS | | | | | | | | | | | | | | | |
|-------------------|-------------------------------------------------------|----------------|-----------------|---------------|-------------------|-----------------------|----------------------------------|-----|-----|-------------|-------|-------|-------|--------|---|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | | | | | |
| | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAT MAX | COLOR MAX | SATURATED | | | UNSATURATED | | | | OTHERS | |
| | | | | | | | C14 | C16 | C18 | C18:1 | C18:1 | C18:2 | C18:3 | | |
| Industrene 105 | High-Titer Oleic (Oleic Acid) 112-80-1 | 14 Max | 85-95 | 195-204 | 1.5 | 6 Gardner | 3 | 6 | 2 | 6 | 70 | 10 | | | 3 |
| Industrene 106 | Oleic (Oleic Acid) 112-80-1 | 6 Max | 95 Max | 198-204 | 1 | 3 Gardner | 2 | 5 | 2 | 6 | 72 | 10 | | | 3 |
| Industrene 205 | Oleic (Oleic Acid) 112-80-1 | 14 Max | 85-95 | 195-204 | 1.5 | 5.0Y-0.5R Lovibond | 2 | 5 | 3 | 5 | 72 | 9 | | | 4 |
| Industrene 206 | Low-Titer Oleic (Oleic Acid) 112-80-1 | 6 Max | 95 Max | 199-204 | 1 | 7.0Y-1.2R Lovibond | 2 | 4 | 1 | 6 | 72 | 9 | | | 6 |
| Industrene 210 | Canola 67701-08-0 | 13 Max | 100-125 | 190-210 | | 10Y-1.5R Lovibond | | 7 | 2 | | 63 | 20 | 5 | | 3 |

Typical moisture levels are below 0.3%.

(continued)

Table 13.18: (continued)

| LINOLEIC AND LINOLENIC ACIDS | | | | | | | | | | | | | |
|------------------------------|-------------------------------------------------------|----------------|-----------------|---------------|----------------|-------------------------------|-------------------------|----------------------------------|-----|-------------|-------|-------|--------|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | SPECIFICATIONS | | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | | |
| | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAP MAX | % TRANS 440/550 nm, MIN | COLOR GARDNER MAX | SATURATED | | UNSATURATED | | | OTHERS |
| | | | | | | | | C16 | C18 | C18:1 | C18:2 | C18:3 | |
| Industrene 120 | Linseed (Linolenic Acid) 68424-45-3 | 14-18 | 185-200 | 197-202 | 1 | | 5 | 7 | 4 | 20 | 16 | 52 | 1 |
| Industrene 130 | Oleic-Linoleic 67701-08-8 | 30-38 | 90-112 | 198-206 | 2 | | 4 | 18 | 10 | 31 | 32 | 5 | 4 |
| Industrene 225 | Soya (Linoleic Acid) 67701-08-0 | 25 Max | 135-150 | 195-201 | 2 | 75/85 | 2 | 4 | 5 | 24 | 57 | 8 | 2 |
| Industrene 226 | Soya (Linoleic Acid) 67701-08-0 | 26 Max | 127-138 | 195-203 | 2 | 70/85 | 3 | 11 | 4 | 24 | 53 | 6 | 2 |

Typical moisture levels are below 0.3%.

| FOOD AND KOSHER GRADE ACIDS | | | | | | | | | | | | | | | |
|-------------------------------|---------------------------------------------------------|--------|----------------|-----------------|---------------|----------------|-------------------------------|-------------------------|----------------------------------|-----|-----|-------------|-------|-------|--------|
| PRODUCT | ACID DESCRIPTION (CTFA ADOPTED NAME) CAS NUMBER | KOSHER | SPECIFICATIONS | | | | | | TYPICAL CARBON CHAIN COMPOSITION | | | | | | |
| | | | TITER °C | IODINE VALUE | ACID VALUE | % UNSAP MAX | % TRANS 440/550 nm, MIN | COLOR GARDNER MAX | SATURATED | | | UNSATURATED | | | OTHERS |
| | | | | | | | | | C14 | C16 | C18 | C18:1 | C18:2 | C18:3 | |
| Hystrene 4516 NF-FG | 45% Palmitic (Palmitic Acid) 57-11-4 | ■ | 55-59 | 0.6 Max | 203-209 | 0.25 | 92/98 | 1.0Y-0.1R Lovibond | 1 | 44 | 54 | | | | 1 |
| Hystrene 5016 NF-FG | Triple Pressed Stearic (Stearic Acid) 57-11-4 | | 54.5-56.5 | 0.5 Max | 206-210 | 0.2 | 92/98 | 1.0Y-0.1R Lovibond | 2 | 51 | 45 | | | | 2 |
| Hystrene 5016 NF-FG-VEG | Triple Pressed Stearic (Stearic Acid) 57-11-4 | | 55-57 | 0.5 Max | 205-210 | 0.2 | 92/98 | 1.0Y-0.1R Lovibond | 1 | 52 | 46 | | | | 1 |
| Hystrene 7018 FG | 70% Stearic (Hydrogenated Tallow Acid) 57-11-4 | | 58-62 | 0.5 Max | 200-205 | 0.3 | 92/98 | 1.0Y-0.1R Lovibond | 2 | 28 | 66 | | | | 4 |
| Industrene 8718 FG | 87% Stearic (Stearic Acid) 57-11-4 | ■ | 66-68 | 1 Max | 195-200 | 0.5 | 92/98 | 1.0Y-0.1R Lovibond | | 9 | 89 | | | | 2 |
| Hystrene 9718 NF-FG | 92% Stearic (Stearic Acid) 57-11-4 | | 66.5-69 | 0.5 Max | 195-200 | 0.3 | 92/98 | 1.0Y-0.1R Lovibond | 4 | 94 | | | | | 2 |
| Industrene 226 FG | Distilled Soya (Soya Acid) 67701-08-0 | ■ | 26 Max | 127-138 | 195-203 | 2 | 70/85 | 3 Gardner | 11 | 4 | 24 | 53 | 6 | 2 | |

■ Materials available in Kosher grade.
Typical moisture levels are below 0.3%.

Table 13.19: NEO-FAT Fatty Acids (59)

| Product Name | Fatty Acid | SPECIFICATIONS | | | | | | | | | | | APPROXIMATE CHEMICAL COMPOSITION (GAS CHROMATOGRAPHY) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------|------------------|----------------------------------------|------|--------------|------|------------|------|-------------------|--------------------|-------------------|----------------------|-----|-------------------------------------------------------|-------------|--------------|-------------|-------------|---------------|--------------------|---------------|----------------|--------------|----------------|-------------------------------|-------------------------------|-------------------------|----------------------------|-----------------------------|--|-------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | Titer °C | | Iodine Value | | Acid Value | | Color Lovibond | Moisture | Heat Stability | Saponification Value | | Unsaponifiable | Caproic C-6 | Caprylic C-8 | Capric C-10 | Lauric C-12 | Myristic C-14 | Pentadecanoic C-15 | Palmitic C-16 | Heptanoic C-17 | Stearic C-18 | Arachidic C-20 | Myristoleic C-18 ¹ | Palmitoleic C-18 ¹ | Oleic C-18 ¹ | Linoleic C-18 ² | Linolenic C-18 ³ | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Min | Max | Min | Max | Min | Max | Max | Max | Max | Min | Max | Max | SATURATED | | | | | | | | | | | | | | | | UNSATURATED | | | | | | | | | | | | | | | | | | | | | | | |
| SHORT CHAIN SATURATED ACIDS | 8 | Commercially Pure Caprylic | 8.0 | 12.0 | | 0.7 | 387 | 392 | 1.0 R- 5 Y 5-1/4" | 0.2 | 4.0 R-40 Y | 387 | 394 | 0.2 | 5.0 | 92.0 | 3.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 8-S | 98% Min. Commercially Pure Caprylic | 15.0 | | | 0.5 | 385 | 390 | 0.5 R- 3 Y 5-1/4" | 0.2 | 2.5 R-15Y | 385 | 392 | 0.2 | 0.4 | 99.2 | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 10 | Commercially Pure Capric | 29.0 | 32.0 | | 0.5 | 323 | 329 | 0.8 R- 3 Y 5-1/4" | 0.2 | 2.5 R-10 Y | 323 | 331 | 0.2 | | 1.0 | 97.0 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 12 | Commercially Pure Lauric | 41.5 | 44.0 | | 0.5 | 278 | 282 | 0.5 R- 3 Y 5-1/4" | 0.2 | 1.5 R-10 Y | 278 | 284 | 0.2 | | | 1.0 | 97.0 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 12-43 | 99% Commercially Pure Lauric | 43.0 | | | 0.5 | 278 | 282 | 0.5 R- 2 Y 5-1/4" | 0.2 | 1.0 R- 5 Y | 278 | 284 | 0.2 | | | 0.3 | 99.0 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 14 | Commercially Pure Myristic | 52.0 | | | 0.5 | 244 | 249 | 0.5 R- 2 Y 5-1/4" | 0.2 | 1.5 R- 8 Y | 244 | 251 | 0.2 | | | | 1.5 | 97.5 | 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 255 | Stripped Coco | 27.5 | 29.5 | 8.0 | 13.0 | 252 | 258 | 1.0 R- 7 Y 5-1/4" | 0.3 | | 252 | 260 | 0.5 | | | 1.0 | 55.0 | 22.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 265 | Distilled Coco | 23.0 | 26.0 | | 10.0 | 265 | 275 | 1.0 R- 7 Y 5-1/4" | 0.3 | | 265 | 277 | 0.5 | | 5.0 | 6.0 | 52.0 | 19.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LONG CHAIN SATURATED ACIDS | 16 | Commercially Pure Palmitic | 59.0 | 61.0 | | 0.5 | 216 | 220 | 0.5 R- 2 Y 5-1/4" | 0.2 | 1.0 R- 6 Y | 216 | 221 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 16-S | 97% Commercially Pure Palmitic | 61.6 | | | 0.5 | 216 | 220 | 0.5 R-2.0 Y 5-1/4" | 0.2 | 1.0 R- 6 Y | 216 | 221 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 16-54 | Eutectic Palmitic-Stearic | 53.0 | 55.0 | | 0.5 | 211 | 213 | 0.5 R- 2 Y 5-1/4" | 0.2 | 1.5 R- 7 Y | 211 | 214 | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 16-56 | 80% Commercially Pure Palmitic | 56.0 | 58.0 | | 1.0 | 214 | 218 | 0.6 R-3.5 Y 5-1/4" | 0.2 | 2.0 R-12 Y | 214 | 219 | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 18 | Commercially Pure Stearic | 65.5 | 68.0 | | 1.0 | 195 | 200 | 1.0 R- 5 Y 5-1/4" | 0.2 | 3.5 R-25 Y | 197 | 201 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 18-S | Special C. P. Stearic | 65.5 | | | 0.5 | 195 | 200 | 0.5 R-1.5 Y 5-1/4" | 0.2 | 1.5 R-5.0 Y | 197 | 201 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 18-53 | Single Pressed Stearic | 53.3 | 54.2 | 5.0 | 10.0 | 207 | 210 | 2.0 R- 15 Y 5-1/4" | 0.5 | | 207 | 211 | 0.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 18-54 | Double Pressed Stearic | 54.0 | 54.6 | 4.5 | 7.0 | 208 | 211 | 0.5 R- 2 Y 5-1/4" | 0.5 | 3.0 R-20 Y xxx | 208 | 212 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 18-55 | Triple Pressed Stearic | 55.0 | 56.0 | | 0.5 | 208 | 211 | 0.5 R- 2 Y 5-1/4" | 0.5 | 1.0 R- 7 Y | 208 | 212 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 18-58 | Hydrogenated Tallow Acid | 57.0 | 61.0 | | 1.0 | 201 | 206 | 1.0 R- 5 Y 5-1/4" | 0.5 | 2.5 R-15Y | 201 | 207 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 18-59 | Rubber Grade Stearic | 55.0 | 62.0 | | 9.0 | 195 | 208 | 8.0 R-40 Y 1" | 0.5 | | 195 | 209 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18-61 | Stearic-Palmitic | 60.0 | 64.0 | | 1.0 | 198 | 205 | 1.0 R- 5 Y 5-1/4" | 0.5 | 3.5 R-25 Y | 198 | 206 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| UNSATURATED ACIDS-OLEIC | 90-04* | Low Poly-unsaturated Oleic Acid†‡ | | 7.0 | 84.0 | | | 200 | 204 | 1.0 R- 8 Y 5-1/4" | 0.4 | xx | 200 | 205 | 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 92-04* | 5°C Max Titer Crystallized White Oleic | | 5.0 | | | 95.0 | 200 | 204 | 1.3 R- 9 Y 5-1/4" | 0.4 | xx | 200 | 205 | 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 94-04* | 5°C Max Titer Crystallized Red Oil | | 5.0 | | | 95.0 | 199 | 204 | 1.0 R- 7 Y 1" | 0.4 | xx | 199 | 205 | 1.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 94-10* | 8-11°C Titer Crystallized Red Oil | 8.0 | 11.0 | | 95.0 | 199 | 204 | 1.0 R- 7 Y 1" | 0.4 | xx | 199 | 205 | 1.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| UNSATURATED ACIDS-OTHER | 65 | Distilled Animal Acid | 40.0 | 44.0 | 49.0 | 60.0 | 201 | 206 | 1.5 R- 10 Y 1" | 0.5 | | 201 | 207 | 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

*Ester Number 1 Maximum
xxxPeroxide Index Max 1
xxFlash Point Min 300°F
†2 Hours at 200°C; 5¼" Lovibond Cell.
‡Polyunsaturates Max 5%

(continued)

Table 13.19: (continued)

| PROPERTIES OF FATTY ACIDS—SATURATED, UNSATURATED, AND SUBSTITUTED | | | | |
|-------------------------------------------------------------------|---------------------------|-----------------------------|---------------------------|--|
| Systematic name | Number of C atoms | Viscosity centipoises (T°C) | Index of refraction (T°C) | |
| Saturated | | | | |
| Capric | Decanoic | 2.88 (70) | 1.4130 (80) | |
| Undecylic | Undecanoic | 7.30 (50) | 1.4164 (80) | |
| Lauric | Dodecanoic | 4.43 (70) | 1.4191 (80) | |
| Myristic | Tetradecanoic | 5.83 (70) | 1.4236 (80) | |
| Pentadecylic | Pentadecanoic | | 1.4254 (80) | |
| Palmitic | Hexadecanoic | 7.8 (70) | 1.4272 (80) | |
| Margaric | Heptadecanoic | | 1.4287 (80) | |
| Stearic | Octadecanoic | 9.87 (70) | 1.4299 (80) | |
| Arachidic | Eicosanoic | | 1.4250 (100) | |
| Behenic | Docosanoic | | 1.4270 (100) | |
| Unsaturated | | | | |
| Palmitoleic | 9-Hexadecenoic | | 1.44103 (70) | |
| Oleic | 9-Octadecenoic | 9.41 (60) | 1.4582 (20) | |
| Erucic | 13-Docosenoic | | 1.4758 (20) | |
| Linoleic | 9,12-Octadecadienoic | | 1.4699 (20) | |
| Linolenic | 9,12,15-Octadecatrienoic | | 1.480 (20) | |
| Eleostearic | 9,11,13-Octadecatrienoic | | 1.5112 (50) | |
| Substituted | | | | |
| Ricinoleic | 12-Hydroxy-9-octadecenoic | | 1.4716 (20) | |
| Vernolic | 12-Epoxy-9-octadecenoic | | 1.4628 (40) | |

UNSATURATED FATTY ACIDS (C_nH_{2n-2}O, where x is an integer from 1 to 5)

| Common Name | Geneva Nomenclature | Chemical Formula | Acid Value | Melting Point °C | Iodine Value | Molecular Weight |
|---------------------------|----------------------------|---------------------------------------------------------------------------------------------------------------------|------------|------------------|--------------|------------------|
| ONE DOUBLE BOND | | | | | | |
| Myristoleic | 9-Tetradecenoic | CH ₃ (CH ₂) ₃ CH=CH(CH ₂) ₉ COOH | 247.87 | -4.0 | 112 | 226.35 |
| Palmitoleic | 9-Hexadecenoic | CH ₃ (CH ₂) ₅ CH=CH(CH ₂) ₉ COOH | 220.53 | 0.5 | 100 | 254.40 |
| Oleic | cis-9-Octadecenoic | CH ₃ (CH ₂) ₇ CH=CH(CH ₂) ₉ COOH | 198.63 | 13.4 | 90 | 282.45 |
| Elaidic | trans-9-Octadecenoic | CH ₃ (CH ₂) ₇ CH=CH(CH ₂) ₉ COOH | 198.63 | 46.5 | 90 | 282.45 |
| Erucic | cis-13-Docosenoic | CH ₃ (CH ₂) ₉ CH=CH(CH ₂) ₁₁ COOH | 165.72 | 34.7 | 75 | 338.57 |
| TWO DOUBLE BONDS | | | | | | |
| Linoleic | 9, 12-Octadecadienoic | CH ₃ (CH ₂) ₄ CH=CHCH ₂ CH=CH(CH ₂) ₉ COOH | 200.06 | -5.0 | 181 | 280.44 |
| THREE DOUBLE BONDS | | | | | | |
| Linolenic | 9, 12, 15-Octadecatrienoic | CH ₃ CH ₂ CH=CHCH ₂ CH=CHCH ₂ CH=CH(CH ₂) ₃ COOH | 201.51 | -10.5 | 273 | 278.42 |
| α-Eleostearic | 9, 11, 13-Octadecatrienoic | CH ₃ (CH ₂) ₃ CH=CHCH=CHCH=CH(CH ₂) ₃ COOH | 201.51 | 49.0 | 273 | 278.42 |

SATURATED FATTY ACIDS (C_nH_{2n}O₂)

| Common Name | Geneva Nomenclature | Chemical Formula | Molecular Weight | Acid Value | Melting Point °C |
|-------------|---------------------|--------------------------------------|------------------|------------|------------------|
| Acetic | n-Ethanoic | CH ₃ COOH | 60.05 | 934.26 | 16.6 |
| Butyric | n-Butanoic | C ₃ H ₇ COOH | 88.10 | 636.79 | -7.9 |
| Caproic | n-Hexanoic | C ₅ H ₁₁ COOH | 116.15 | 483.00 | -3.4 |
| Caprylic | n-Octanoic | C-7H ₁₅ COOH | 144.21 | 389.05 | 16.7 |
| Capric | n-Decanoic | C ₉ H ₁₉ COOH | 172.26 | 325.69 | 31.6 |
| Lauric | n-Dodecanoic | C ₁₁ H ₂₃ COOH | 200.31 | 280.08 | 44.2 |
| Myristic | n-Tetradecanoic | C ₁₃ H ₂₇ COOH | 228.36 | 245.68 | 53.9 |
| Palmitic | n-Hexadecanoic | C ₁₅ H ₃₁ COOH | 256.42 | 218.80 | 63.1 |
| Stearic | n-Octadecanoic | C ₁₇ H ₃₅ COOH | 284.47 | 197.23 | 69.6 |
| Arachidic | n-Eicosanoic | C ₁₉ H ₃₉ COOH | 312.52 | 179.52 | 75.3 |
| Behenic | n-Docosanoic | C ₂₁ H ₄₃ COOH | 340.57 | 164.73 | 79.9 |
| Lignoceric | n-Tetracosanoic | C ₂₃ H ₄₇ COOH | 368.62 | 152.20 | 84.2 |

Table 13.20: Proctor & Gamble Fatty Acids (39)

Fatty Acids

| Chemical Properties | Whole-Cut Coconut Type | | | | | Whole-Cut Tallow Type | | | Soya | Sunflower | Canola | Tallow/Coco |
|--------------------------------------|------------------------|-----------------------|-----------------------|-----------------------|--------------------|-----------------------|--------------------|-------------------|---------------------|------------|------------|-----------------------|
| | C-101 | C-103 | C-108 | C-109 | C-110 | T-11 | T-18 | T-22 | S-210 | S-205 | R-910 | TC-1010T |
| Acid Value | 267-273 (271) | 267-273 (271) | 266-274 (271) | 266-274 (271) | 266-274 (271) | 200-208 (203) | 200-208 (204) | 200-210 (205) | 197-203 (201) | 200 appx. | 194-202 | 214-218 (217) |
| Iodine Value | 1.3 max. (1.1) | 5.0 max. (3.2) | 5.0 max. (3.2) | 5.0-70 | 12 max. (6) | 35-42 (42) | 40-55 (50) | 45-70 (60) | 133 min. (136) | 140 appx. | 105-125 | 36-41 (39) |
| Moisture (% KF) | 0.3 max. (0.1) | 0.3 max. (0.1) | 0.3 max. (0.04) | 0.2 max. | 0.3 max. (0.05) | 0.3 max. (0.05) | 0.3 max. (0.05) | 0.5 max. (0.1) | 0.15 max. (0.04) | 0.1 max. | 0.3 max. | 0.3 max. (0.04) |
| Physical Properties | | | | | | | | | | | | |
| Color, Gardner (1963) | <1 | <1 | <1 | <1 | 3 max. (2) | | 5 max. (2) | 7 max. (4) | 2 max. (1.5) | 3 max. | 3 max. | |
| Color, % Transmittance @ 440nm/550nm | 85/95 min. (91/97) | 85/95 min. (91/97) | 85/95 min. (91/97) | 80/95 min. (80/96) | | 80/93 min. (85/97) | | | | | | 76/93 min. (94/98) |
| Average Molecular Weight | (207) | (207) | (207) | (208) | (207) | (276) | (275) | (274) | (280) | (280) | (282) | (260) |
| Titer (C) | (27) | (25) | (25) | (25) | (25) | 44-47 (45) | (42) | 37-44 (39) | 21-25 (23) | | 12 max. | 38-42 (40) |
| Approximate Composition (GC) | | | | | | | | | | | | |
| C6 Caproic | <1 | <1 | 1 | 1 | 1 | | | | | | | |
| C8 Caprylic | 6 | 6 | 7 | 7 | 7 | | | | | | | 1 |
| C10 Capric | 6 | 6 | 6 | 6 | 6 | | | | | | | 1 |
| C12 Lauric | 50 | 50 | 49 | 49 | 49 | 1 | 1 | 1 | 0.5 | | | 10 |
| C14 Myristic | 19 | 19 | 18 | 18 | 18 | 3 | 3 | 2 | 0.5 | | | 6 |
| C16 Palmitic | 8 | 8 | 8 | 8 | 8 | 26 | 25 | 22 | 11 | 8 | 5 | 23 |
| C16=1 Palmitoleic | | | | | | 2 | 3 | 3 | | | | 3 |
| C17 Margaric | | | | | | 2 | 2 | 2 | | | 0.3 | 1 |
| C18 Stearic | 9 | 6 | 6 | 5 | 4 | 25 | 19 | 18 | 4 | 3 | 2 | 17 |
| C18=1 Oleic | 1 | 4 | 4 | 5.0-70 | 5 | 40 | 42 | 43 | 24 | 20 | 56 | 35 |
| C18=2 Linoleic | | | | | 2 | 1 | 4 | 8 | 52 | 67 | 23 | 3 |
| C18=3 Linolenic | | | | | | | 1 | 1 | 8 | 2.0 max. | 11 | |
| C20 Arachidic | | | | | | | | | 0.3 | 0.5 | 0.5 | |
| CAS No. | 67701-05-7 | 67701-05-7 | 67701-05-7 | 67701-05-7 | 67701-05-7 | 67701-06-8 | 67701-06-8 | 67701-06-8 | 67701-08-0 | 67701-08-0 | 67701-08-0 | 67701-06-8 |

Light Cut Fatty Acid and Methyl Ester

Fractionated

| Chemical Properties | C-810 | C-810L* | CE-810 | C-895 | C-898 | C-899* | C-1095 | CE1095 |
|----------------------|-------------------|-------------------|--------------------|-------------------|---------|---------|-------------------|--------------------|
| Saponification Value | 370 max (365) | 366 max | | 395 max (386) | 395 max | 386-390 | 331 max (324) | 295-305 (302) |
| Acid Value | 358-368 (364) | 345-365 (357) | 0.5 max (0.2) | 380-394 (386) | 380-394 | 385-389 | 320-330 (324) | 0.5 max (0.3) |
| Iodine Value | 0.5 max (0.2) | 0.5 max (0.2) | 0.5 max (0.2) | 0.2 max (0.1) | 0.2 max | 0.2 max | 0.5 max (0.3) | 0.6 max (0.3) |
| Moisture, (% KF) | 0.2 max (0.04) | 0.2 max (0.06) | 0.15 max (0.06) | 0.2 max (0.03) | 0.2 max | 0.2 max | 0.2 max (0.03) | 0.15 max (0.04) |

(continued)

Table 13.20: (continued)

Physical Properties

| | | | | | | | |
|----------------------------------------|------------------------|------------------------|----------------|------------------------|-----------|----------|------------------------|
| Color - Lov. 5' / 1" Yellow/Red | 3/0.8 max (1.1/0.1) | 3/1.0 max (1.0/0.0) | | 3/0.8 max (1.2/0.2) | 3/0.8 max | 10/1 max | 3/0.8 max (1.4/0.3) |
| Color-% Transmittance @ 460nm/550nm | | | 95 min (99) | | | | 95 min (98) |
| Avg. Molecular Weight | (154) | (157) | | (145) | | (144) | (173) |
| Titer, (C) | (3) | (3) | | (14) | | (14) | (30) |
| Specific Gravity 25/25 C | | | 0.870 | | | | (0.874) |
| Melting Point (C) | | | -29 | | | | -14 |

Approximate Composition


| | | | | | | | | |
|--------------|----------------|-------------------|------------------|--------------------|-----------|-----------|--------------------|--------------------|
| C6 Caproic | 6 max (4) | 0.50 max (0.2) | 6.0 max (4) | 2.0 max (0.4) | 1.0 max | 0.6 max | | |
| C8 Caprylic | 53-60 (55) | 53-63 (57) | 51-58 (55.9) | 95.0 min (97.5) | 98.0 min | 99.0 min | (0.9) | (0.4) |
| C10 Capric | 34-42 (39) | 37-47 (41) | 34-42 (39.3) | (1.5) | 1.0 max | 0.6 max | 95.0 min (96.9) | 95.0 min (96.6) |
| C12 Lauric | 2 max (0.4) | 1.5 max (0.6) | 1.0 max (0.5) | 0.5 max (0.0) | | 0.1 max | (1.4) | (1.7) |
| C14 Myristic | | | | | | | | (0.2) |
| CAS No. | 67762-36-1 | 67762-36-1 | 67762-39-4 | 124-07-02 | 124-07-02 | 124-07-02 | 334-48-5 | 110-42-9 |

Table 13.21: Union Carbide Acids (19)


| | 2-Ethylhexoic Acid $C_8H_{16}CH(C_2H_5)COOH$ | Isopentanoic Acid $C_5H_{10}COOH$ | Propionic Acid C_3H_6COOH | Valeric Acid $C_5H_{10}COOH$ |
|------------------------------|-------------------------------------------------|--------------------------------------|--------------------------------|---------------------------------|
| Molecular Weight | 144.21 | 102.13 | 74.08 | 102.13 |
| Pounds per gallon @20°C | 7.56 | 7.76 | 8.28 | 6.9 |
| Specific Gravity @ 20°/20°C | 0.09077 | 0.9323 | 0.9952 | 0.9406 |
| Boiling Point @ 760 mmHg, °C | 227.0 | 175.0 | 140.8 | 185.5 |
| Vapor Pressure @ 20°C, mmHg | >0.1 | 0.21 | 2.4 | 0.1 |
| Percent Solubility @ 20°C | | | | |
| In Water | 0.1 | — | Complete | 2.4 |
| Water In | 1.4 | — | Complete | 13.0 |
| CAS Registration Number | 149-57-5 | 503-74-2 | 79-09-4 | 109-52-4 |

Table 13.21: (continued)

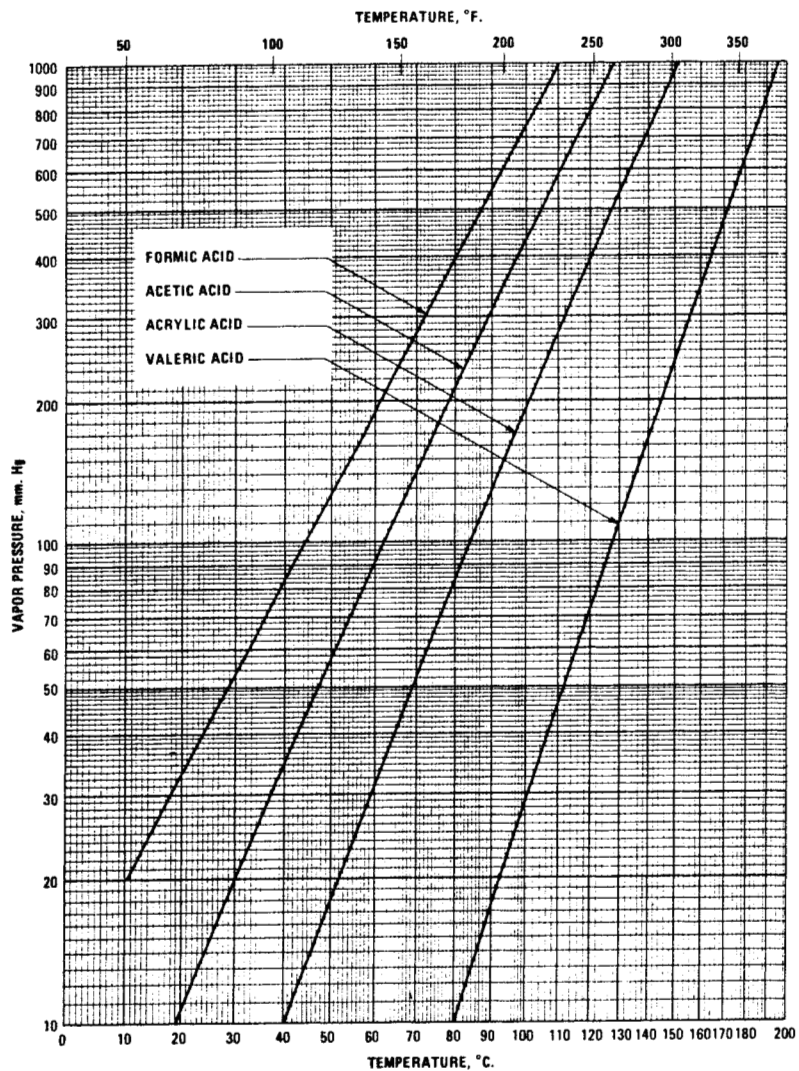VAPOR PRESSURES AT VARIOUS TEMPERATURES




VAPOR PRESSURES AT VARIOUS TEMPERATURES

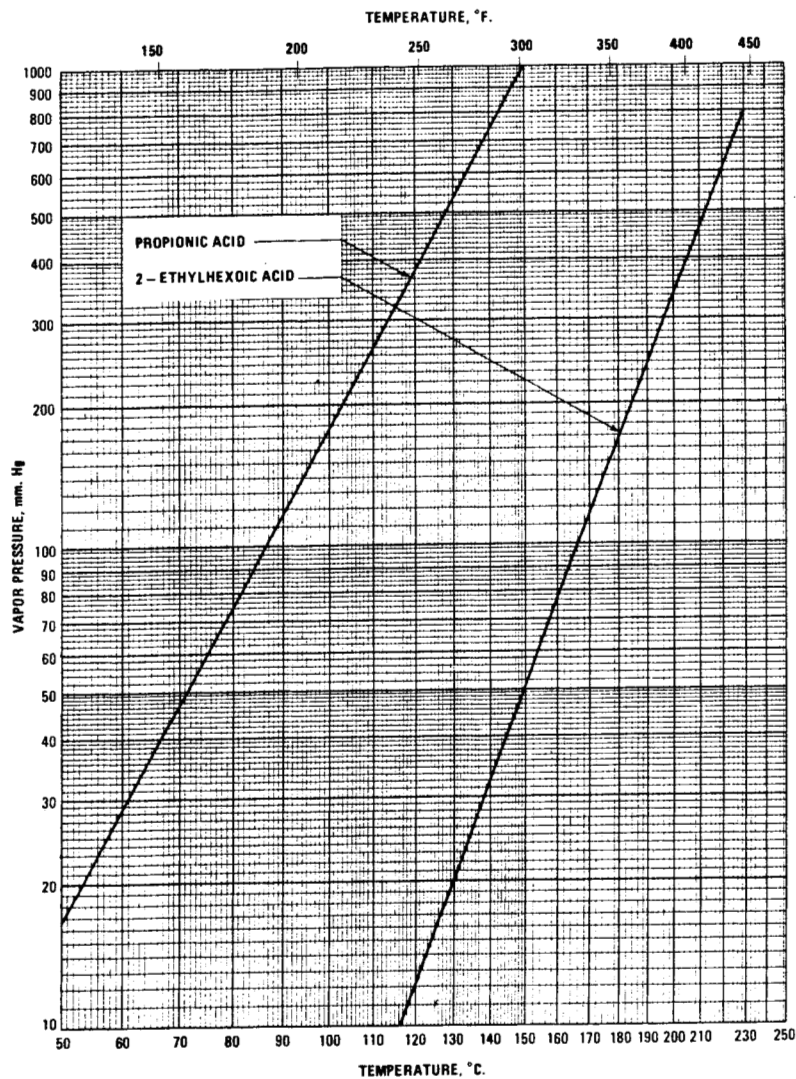

Amines

ALKYL AMINES

Table 14.1: Monomethylamine (2)




Monomethylamine is a colorless, flammable gas with a strong ammoniacal odor; it is sold commercially as a 30% by weight aqueous solution. It is soluble in ethyl alcohol, ethyl ether, and many other organic substances, as well as in water. It is used in the tanning industry, in the manufacture of dyestuffs, in many synthetic products, and in the treatment of cellulose acetate rayon for dyeing.

Typical Properties and Specifications

| | |
|-------------------------------------------|----------------------------------------|
| Boiling point (75 mm.) | -6°C. |
| Flash point (30% solution) | 0.3°C. |
| Melting point | -92.5°C. |
| Specific gravity at -10.8°/15°C. | 0.699 |
| Solubility in water | Very soluble |
| Weight per gallon (30% solution) at 68°F. | 7.7 lbs. |
| Ammonia | Less than 0.2% by weight of solution |
| Concentration | 3 to 3.5% by weight in water gas |
| Formaldehyde | Less than 0.3% by weight of solution |
| Purity | Not less than 98 mol % of total amines |

Table 14.2: Dimethylamine (2)



Dimethylamine is a colorless gas with a strong ammoniacal odor. The commercial product is an aqueous solution containing 25% by weight of dimethylamine. It is soluble in ethyl alcohol, ethyl ether, water, and many organic solvents. It is used as a dehairing agent in the tanning industry, in the manufacture of antioxidants, dyes, flotation agents, gasoline stabilizers, pharmaceuticals, rubber accelerators, emulsifiers, and cleaning compounds.

(continued)

Table 14.2: (continued)

| <u>Typical Properties and Specifications</u> | |
|----------------------------------------------|----------------------------------------|
| Boiling point (764 mm.) | 7.2 to 7.3°C. |
| Description | Gas at ordinary temperature |
| Flash point (25% solution) | Approx. 6.25°C. |
| Melting point | -96°C. |
| Specific gravity at -6°C. | 0.6865 |
| Solubility in water | Soluble |
| Weight per gallon (25% solution, 68°F.) | Approx. 7.8 lbs. |
| Ammonia | Not more than 1% by wt. of sol. |
| Concentration | 25 to 25.5% by wt. in water |
| Formaldehyde | Not more than 0.5% by wt. of sol. |
| Purity | Not less than 98 mol % of total amines |

Table 14.3: Trimethylamine (2)



Trimethylamine is a colorless, flammable, easily condensable gas with a pungent, ammoniacal odor. The commercial product is an aqueous solution containing 25% by weight of trimethylamine. It is very soluble in water and is used as a warning agent in bottled gas, as an insect attractant, and in organic synthesis.

| <u>Typical Properties and Specifications</u> | |
|----------------------------------------------|----------------------------------------------------------------|
| Boiling point | Approx. 3.5°C. |
| Critical temperature | 161°C. |
| Critical pressure | 41 atm. |
| Decomposition temperature | 800 to 1300°C. |
| Dielectric constant at 4°C. | 2.9 |
| Electrical conductivity | 2.2×10^{-12} reciprocal ohms at -33.5°C. |
| Heat of combustion | 578.6 kg. cal. per mol |
| Ionization constant at 25°C. | 6.5×10^{-5} for solutions 0.001 N to 0.06N |
| Heat of evaporation at BP | 95.6 cal. per g. |
| Melting point | -124°C. |
| Specific gravity at -5°C. | 0.662 |
| Surface tension at -4°C. | 17.4 dynes per cm. |
| Solubility in water at 19°C. | 1 liter of aqueous saturated solution contains 410 g. of amine |
| Absolute viscosity at -33.5°C. | 3.208 millipoises |
| Ammonia | Not more than 0.2% by wt. of solution |
| Formaldehyde | Not more than 0.3% by wt. of solution |
| Purity | Not less than 98 mol % |

Table 14.4: Freezing Points of Aqueous Methylamine Solutions (34)

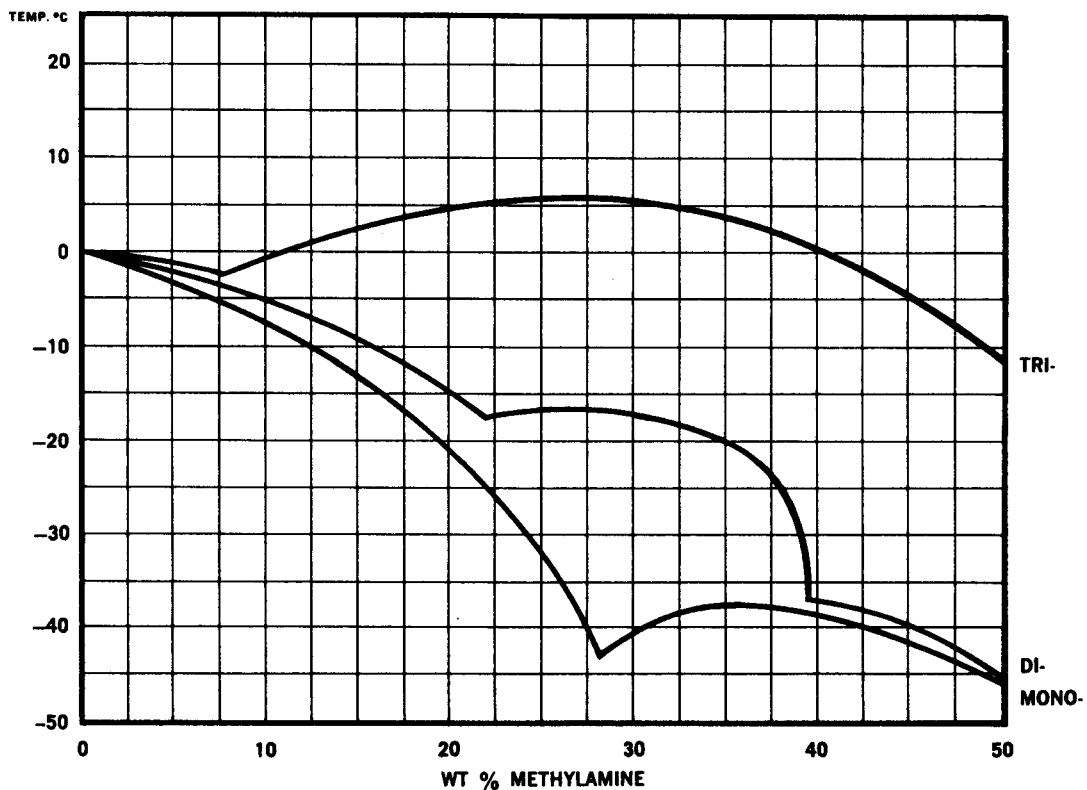


Table 14.5: Binary Azeotropes of Methylamines (34)

| A = Monomethylamine | Azeotrope | Wt. % A |
|---------------------------|-----------|---------------|
| B - Component as follows: | b.p., °C | |
| Trimethylamine at 760 mm | - 6.5 | 70 |
| 60 psig | 36 | 85 |
| 210 psig | 75 | 90-92 |
| 1-3 Butadiene | - 9.5 | 41.4 |
| 1-Butene | -13 | 22.2 |
| cis-2-Butene | - 9.6 | 47.5 |
| trans-2-Butene | -10.4 | 48.5 |
| 1-Butene-3-yne | - 6.8 | 97.5 |
| Isoprene | | Minimum B.P. |
| 2-Methylpropane | -19.9 | 25.5 |
| 2-Methylpropene | -14.3 | 32 |
| Butane | -14.0 | 37.6 |
| Amylenes | | Minimum B.P. |
| <hr/> | | |
| A = Dimethylamine | | |
| B - Component as follows: | | |
| Trimethylamine at 760 mm | 3 | 26 |
| 107 psig | 73 | 72 |
| Ammonia | | Non-azeotrope |
| 3-Methyl-1-Butene | | Non-azeotrope |
| <hr/> | | |
| A = Trimethylamine | | |
| B - Component as follows: | | |
| Dimethyl ether | | Non-azeotrope |
| 1-Butene | | Non-azeotrope |
| 2-Methylpropene | | Non-azeotrope |
| n-Butane | | Non-azeotrope |
| 2-Methylpropane | | Non-azeotrope |
| Acetic acid | 149 | 20 |
| Ammonia | -34 | 27 |
| Boron trifluoride | 230 | 47 |
| Formic acid | 179 | 75 |

Table 14.6: Solubility Data for Methylamines (34)

solubility of some inorganic salts in methylamines

| SALT | MONO | DI- | TRI- | SALT | MONO | DI- | TRI- |
|-------------------------------------------------|------|-----|------|--------------------------------------------------------------------------------------------|------|-----|------|
| AgI | v | v | A i | I ₂ ^b | v | v | s |
| AgNO ₃ | v | v | — | KAg(CN) ₂ | — | s | — |
| Ag ₂ SO ₄ | s | — | — | KCN | — | s | — |
| Ag ₂ SO ₄ | A i | — | — | KI | — | s | i |
| BaBr ₂ | — | s | — | KNO ₃ | s | — | — |
| BaI ₂ | A v | A v | A s | K ₂ PtCl ₆ | — | s | — |
| Ba(NO ₃) ₂ | s | s | s | K ₂ PtCl ₆ | s | — | — |
| Ba(SCN) ₂ | v | m | i | KSCN | v | — | — |
| BiBr ₃ | — | v | — | LiCl | v | m | — |
| BiCl ₃ | A m | — | — | Mg(NO ₃) ₂ | — | A s | — |
| BiI ₃ | A v | v | s | NaBr | — | s | — |
| Bi ₂ S ₃ | s | — | — | NaClO ₃ | m | s | — |
| Br ₂ ^a | v | R v | — | NaNO ₃ | v | s | s |
| CaC ₂ | i | — | — | NiSO ₄ | i | — | — |
| CaI ₂ | — | v | — | P (red) | s | — | i |
| Ca(NO ₃) ₂ | m | i | i | P (yellow) ^c | m | — | — |
| CdBr ₂ | — | A m | — | PbBr ₂ | — | m | — |
| Cd(CN) ₂ | — | m | — | PbI ₂ ^d | A s | A s | A s |
| CdI ₂ | — | v | m | Pb(SCN) ₂ | A v | — | m |
| Cr ₂ (SO ₄) ₃ | i | — | — | PtI ₂ | — | s | — |
| CuCl | R | — | — | S | v | — | s |
| CuHAsO ₄ | s | — | — | SbI ₃ | — | v | i |
| CuS | s | — | i | SnI ₄ | A i | m | — |
| CuSCN | v | — | — | SrI ₂ | — | A v | — |
| CuSO ₄ | i | — | — | Sr(NO ₃) ₂ | v | — | — |
| Fel ₃ | — | m | — | TiNO ₃ | v | m | s |
| Fe ₂ (SO ₄) ₃ | A i | — | — | UrO ₂ (C ₂ H ₃ O ₂) ₂ ^a | s | — | — |
| Hg(CN) ₂ | v | v | — | UrO ₂ (NO ₃) ₂ | — | — | i |
| HgI ₂ | v | v | m | ZnS | i | — | — |
| Hg(SCN) ₂ | s | — | s | | | | |


LEGEND: v = very soluble; m = moderately soluble; s = slightly soluble; i = insoluble; A = formation of an aminate; R = marked reaction

- a) Bromine reacts with dimethylamine with the evolution of heat to form a very soluble crystalline compound. With methylamine, the reaction is much more violent and a black residue is formed in addition to a soluble crystalline product.
- b) Iodine is extremely soluble in mono- and dimethylamine, but not in trimethylamine. On standing, the deep color of the solution fades in color. Iodine is only slightly soluble in trimethylamine but, after some weeks, colorless crystals separate from this solution.
- c) Yellow phosphorus is soluble in monomethylamine, forming almost colorless solutions, but on standing the red form, which is only slightly soluble, separates.
- d) PbI₂ turns white on contact with the amines. By heating the tubes very gently, the original yellow color returns, indicating that the amine of crystallization has been removed. On cooling, the PbI₂ again turns white.
- e) A solution of UrO₂(C₂H₃O₂)₂ gelatinizes on standing for some days.

solubility of methylamines in organic liquids

Volumes of gas per 1 cc of liquid Pressure = 1 atmosphere; temperature = 20°C


| SOLVENT | MONO | DI- | TRI- |
|------------------------------------|--------|--------|--------|
| Aniline | 271 cc | 520 cc | 300 cc |
| Anisole | 89 | 252 | 185 |
| Benzyl alcohol | 314 | 528 | 322 |
| i-Butanol | 298 | 598 | 405 |
| n-Butanol | 303 | 504 | 379 |
| Cedrene | 34 | 106 | 86 |
| o-Chloronaphthalene | 52 | 174 | 130 |
| Cymene | 48 | 182 | 177 |
| Decahydronaphthalene | 24 | 116 | 156 |
| Diacetone alcohol | 420 | 457 | 345 |
| Dibenzylether | 115 | 154 | 120 |
| o-Dichlorobenzene | 64 | 252 | 240 |
| Diethanolamine | 313 | 497 | 74 |
| Diethylaniline | 60 | 180 | 134 |
| Diethylene glycol mono-ethyl ether | 336 | 588 | 216 |
| Dimethylaniline | 64 | 230 | 149 |
| Dimethylcyclohexylamine | 67 | 187 | 187 |
| Dimethylformamide | 132 | 298 | 78 |
| Ethanol | 440 | 727 | 600 |
| Ethylene glycol | 630 | 860 | 369 |
| Furfuryl alcohol | 413 | 679 | 410 |
| Methanol | 654 | 992 | 573 |
| Methylcyclohexanol | 219 | 439 | 256 |
| Monoethanolamine | 216 | 379 | 48 |
| Monoethylaniline | 113 | 324 | 228 |
| Monomethylaniline | 197 | 406 | 223 |
| Morpholine | 255 | 580 | 138 |
| Nitrobenzene | 88 | 226 | 154 |
| o-Nitrotoluene | 86 | 221 | 149 |
| Pinene | 34 | 156 | 176 |
| n-Propanol | 339 | 600 | 439 |
| Quinoline | 92 | 212 | 255 |
| Tetrahydronaphthalene | 40 | 170 | 151 |
| o-Tolidine | 88 | 430 | 242 |
| Triethylene glycol | 316 | 488 | 164 |
| Trimethylene glycol | 480 | 722 | 307 |

Table 14.7: Monoethylamine (2)

Monoethylamine is a water-white liquid which is commercially available as a 70% aqueous solution. It is soluble in ethyl alcohol, methyl alcohol, the paraffin hydrocarbons, aromatic and aliphatic hydrocarbons, ethyl ether, ethyl acetate, acetone, fixed oils, mineral oil, oleic and stearic acids. It is also soluble in hot paraffin and carnauba waxes, which solidify when cooled.

*Typical Properties and Specifications
(Anhydrous grade)*


| | |
|-----------------------------------|-----------------------------------------------------|
| Distillation range | 15–18°C |
| Flash point (open cup) | Below 20°F |
| Purity | 97–99% |
| Specific gravity at 15/15°C | 0.689 |
| Weight per gallon | 5.70 lbs |
| <i>(70% Solution)</i> | |
| Boiling point | 16.6°C |
| Color | Water-white |
| Critical temperature | 183.2°C |
| Dissociation constant at 25°C. | 5.6×10^{-4} |
| Heat of combustion | Gas 9157 cal./g. Liquid 9058 cal./g. |
| Heat of vaporization at 15°C | 14.57 cal./g. |
| Heat of solution in water at 19°C | 6330 cal. per mol of solute at infinite dilution |
| Melting point | –80.6°C |
| Purity | At least 70% |
| Specific gravity at 20°/20°C | 0.79–0.80 |
| Weight per gallon (20°C) | 6.63 lbs. |

Table 14.8: Diethylamine (2)

Diethylamine is a water-white liquid with an ammoniacal odor. It is soluble in water, ethyl alcohol, paraffin hydrocarbons, aromatic and aliphatic hydrocarbons, ethyl ether, ethyl acetate, acetone, fixed oils, mineral oil, oleic and stearic acids. It dissolves hot paraffin and carnauba waxes, which solidify when cooled. It is used as a selective solvent for the removal of impurities from oils, fats, and waxes where its property of hydrating in aqueous solution is utilized; also used in the manufacture of rubber chemicals, textile emulsions, dyes, flotation agents, resins, polymerization inhibitors, gum inhibitors, drugs, and insecticides.

Typical Properties and Specifications

| | |
|-----------------------------------------------|-------------------------------------------------|
| Boiling point | 56.0°C |
| Critical density | 0.246 g./cc. |
| Critical pressure | 36.2 atm |
| Critical temperature | 223.5°C |
| Dissociation constant | 1.26×10^{-4} |
| Flash point (open cup) | Below 0°F |
| Heat of combustion | |
| Gas | 9995 cal./g. |
| Liquid | 9882 cal./g. |
| Heat of Vaporization at 58°C | 91.03 cal./g. |
| Heat of solution in water at room temperature | 8220 cal./mol of solute at infinite dilution |
| Melting point | –50.0°C |
| Specific gravity at 20/20°C | 0.71 |
| 20/4°C | 0.711 |
| Specific heat of liquid at 22.5°C | 0.516 cal./g. |
| Refractive Index at 17.6°C | 1.3873 |
| Viscosity at 25°C | 0.346 centipoise |
| Weight per gallon (20°C) | 5.89 lbs. |
| Distillation range | |
| Initial boiling point | Not below 53°C |
| Final boiling point | Not above 59.5° |
| Purity | At least 98% |
| Water insoluble | None |

Table 14.9: Triethylamine (2)


Triethylamine is a colorless liquid, freely soluble in water at temperatures below 18°C., soluble in ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, aliphatic and aromatic hydrocarbons, acetone, fixed oils, mineral oil, oleic and stearic acids, and in hot carnauba and paraffin waxes, the latter two solidifying when cooled. It is used in the manufacture of corrosion inhibitors, emulsifying agents, dyestuffs, and insecticides.

Typical Properties and Specifications

| | |
|------------------------------------------|------------------------------------------------|
| Boiling point | 89.5°C |
| Critical solution temperature (in water) | 18°C |
| Dissociation constant | 6.4×10^{-4} |
| Flash point (open cup) | 20°F |
| Heat of combustion | 10,248 cal./g. |
| Heat of solution in water | 10,040 cal./mol of solute at infinite dilution |
| Melting point | -114.8°C |
| Specific gravity at 20/20°C | 0.730 |
| Refractive index at 20°C | 1.4003 |
| Weight per gallon (20°C) | 6.1 lbs. |
| Color | Water-white |
| Distillation range | |
| Initial boiling point | Not below 85°C |
| Final boiling point | Not above 91°C |
| Purity | 98.5%, min. |
| Water insoluble (20-30°C) | None |


Table 14.10: n-Propylamine (2)

1-Aminopropane



n-Propylamine is a colorless liquid soluble in water, methyl and ethyl alcohols, ethyl ether, ethyl acetate, acetone, aromatic, aliphatic and paraffin hydrocarbons, fixed oils, mineral oil, oleic and stearic acids, and hot carnauba and paraffin waxes, the latter two solidifying when cooled.

| | |
|-----------------------------|---------------|
| Boiling point (760 mm) | 49-50°C |
| Distillation range | 46-51°C |
| Flash point | Below 20°F |
| Melting point | -83°C |
| Purity | 95-99% (min.) |
| Refractive index at 20°C | 1.3910 |
| Specific Gravity at 20°C | 0.718 |
| Weight per gallon (at 20°C) | 5.99 lbs. |

Table 14.11: DI-n-Propylamine (2)


Di-n-propylamine is a colorless liquid, soluble in ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, acetone, paraffin hydrocarbons, aliphatic and aromatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids. It dissolves hot paraffin and carnauba waxes which solidify when cooled. It is partly soluble in water.

| | |
|---------------------------|-----------|
| Boiling point | 110-1°C |
| Flash point | 45°F |
| Melting point | -39.6°C |
| Purity | 97% min. |
| Specific gravity at 20°C | 0.74 |
| Refractive index at 20°C | 1.4063 |
| Weight per gallon at 20°C | 6.18 lbs. |


Table 14.12: Mutual Solubility of DI-n-Propylamine and Water at Various Temperatures (2)

| WEIGHT % AMINE | TEMP., °C. | WEIGHT % AMINE | TEMP., °C. |
|----------------|-------------------|----------------|------------|
| 1.96 | 52.6 | 47.54 | -1.5 |
| 2.42 | 44.1 | 60.40 | 4.2 |
| 2.91 | 36.1 | 64.06 | 8.0 |
| 5.86 | 12.2 | 73.33 | 17.5 |
| 9.33 | -0.6 | 78.69 | 24.7 |
| 12.27 | -2.2 | 82.15 | 31.2 |
| 15.28 | -3.5 | 85.83 | 39.0 |
| 25.21 | -4.5 ^a | 89.26 | 49.0 |
| 33.69 | -4.8 | 93.25 | 74.8 |
| 44.68 | -2.9 | | |

^a Upon cooling to -5.0° the first blue opalescence was noted at -4.9°.

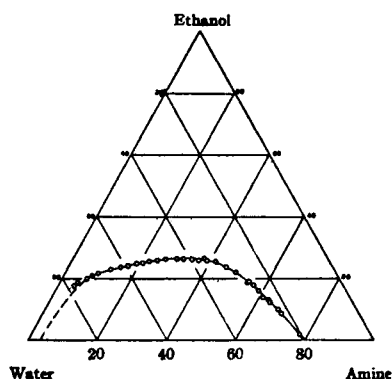
Table 14.13: Solubility Curve at 25° for the System DI-n-Propylamine-Water-Ethanol (29)**Table 14.14: Isopropylamine (2)**

2-Aminopropane



This water-white, primary aliphatic amine is available commercially in an anhydrous form. It is soluble in water, methyl and ethyl alcohols, ethyl ether, ethyl acetate, aromatic and aliphatic hydrocarbons, acetone, mineral oil, fixed oils, oleic and stearic acids. It is soluble in hot paraffin and carnauba waxes, which solidify on cooling. It is potentially useful as an intermediate in such manufactured products as dyestuffs, surface-active agents, textile specialties, pharmaceuticals, bactericides, insecticides, and cleaning compounds. It is also used as a dehairing agent in the leather industry.

| | |
|------------------------------|-------------|
| Boiling point | 31.9°C |
| Flash point | <20°F |
| Melting point | -101.2°C |
| Specific gravity at 25/4°C | 0.686 |
| Vapor pressure at 15°C | 385 mm |
| pH of 0.1 N aqueous solution | 11.57 |
| Boiling range | 31-35°C |
| Color | Water-white |


Table 14.15: Di-isopropylamine (2)

Di-isopropylamine is a water-white liquid with an amine odor. It is soluble in methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, mineral oil, fixed oils, oleic and stearic acids, and only partly soluble in water. It dissolves hot paraffin and carnauba waxes which solidify on cooling.

| | |
|-----------------------------|---------|
| Boiling range | 81–85°C |
| Flash point | 20°F |
| Specific gravity at 20/20°C | 0.726 |


Table 14.16: n-Butylamine (2)

1-Aminobutane




n-Butylamine is a colorless liquid with an ammoniacal odor. It is miscible with water, ethyl alcohol, ethyl ether, paraffin hydrocarbons, and many organic solvents, and dissolves a wide range of materials. The butylamine salts and soaps are usually soluble in hydrocarbons. It behaves in many ways like monoamylamine, but will not produce a constant-boiling mixture with water. This compound is used in the manufacture of specialty soaps, emulsifying agents, desizing agents for textiles, rubber chemicals, flotation agents, corrosion inhibitors, dyestuffs, insecticides, and pharmaceuticals.

| | |
|--------------------------------|----------------------|
| Boiling point (760 mm) | 77.8°C |
| Flash point | 45°C |
| Heat of combustion | 710 kg. cal. per mol |
| Melting point | –50.5°C |
| Specific gravity at 20/20°C | 0.7385 |
| Solubility in water | Complete |
| Solubility of water in solvent | Complete |
| Refractive index at 20°C | 1.4044 |
| Viscosity at 25°C | 0.68 centipoise |
| Vapor pressure at 20°C | 0.01 mm |
| Weight per gallon at 20°C | 6.15 lbs. |
| Acid insoluble | 1.0% max. |
| Distillation range | |
| Initial boiling point | Not below 73.0°C |
| Not less than 95% | Below 82.0°C |
| Final boiling point | Not above 86.0°C |
| Purity | 94% min. |

Table 14.17: n-Dibutylamine (2)


n-Dibutylamine is a water-white liquid with an ammoniacal odor. It is miscible with a large number and variety of organic solvents but its solubility in water is limited. It is soluble in ethyl and methyl alcohols, ethyl ether, ethyl acetate, acetone, aliphatic, and aromatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids. While it dissolves hot paraffin and carnauba waxes, these solidify on cooling. It is used in organic synthesis where its derivatives are used as flotation reagents, dyestuffs, rubber vulcanization accelerators and corrosion inhibitors.

| | |
|-----------------------------|-----------------|
| Boiling point | 161°C |
| Flash point (open cup) | 135°F |
| Specific gravity at 20/20°C | 0.76 |
| 20/4°C | 0.767 |
| Refractive index at 20°C | 1.4186 |
| Vapor pressure at 20°C | 2.5 mm |
| Weight per gallon at 20°C | 6.33 lbs. |
| Acid insoluble | 0.6% max. |
| Distillation range | |
| Initial boiling point | Not below 153°C |
| Not less than 95% | Below 163°C |
| Final boiling point | Not above 172°C |
| Purity | 98% min. |

Table 14.18: n-Tributylamine (2)


n-Tributylamine is a water-white to light yellow liquid with an ammoniacal odor. It is soluble in ethyl alcohol, methyl alcohol, aliphatic and aromatic hydrocarbons, ethyl acetate, acetone, fixed oils, mineral oil, oleic and stearic acids, hot carnauba and paraffin waxes, the latter two solidifying when cooled, and most organic solvents. It is almost insoluble in water. Its sulfuric acid salts are water-soluble. It is used in the manufacture of corrosion inhibitors, emulsifying agents, dyestuffs, and insecticides.

| | |
|---------------------------------|-----------------|
| Boiling point | 214°C |
| Coefficient of expansion per °C | 0.00105 |
| Flash point (open cup) | 187°F |
| Melting point | -70°C |
| Specific gravity at 20/20°C | 0.78 |
| 20/4°C | 0.778 |
| 60/15°C | 0.755 |
| Refractive index at 20°C | 1.431 |
| Surface tension at 20°C | 24.9 dynes/cm. |
| Viscosity at 25°C | 1.35 centipoise |
| at 60°C | 0.73 centipoise |
| Weight per gallon at 20°C | 6.5 lbs. |
| Acid insoluble | 0.25% max. |
| Distillation range | |
| Initial boiling point | Not below 203°C |
| Not less than 95% | Below 216°C |
| Final boiling point | Not above 219°C |
| Purity | 99% min. |

Table 14.19: Isobutylamine (2)

Isobutylamine is a colorless liquid soluble in water, methyl and ethyl alcohols, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids, and hot paraffin and carnauba waxes, the latter two solidifying when cooled.

| | |
|---------------------------|------------|
| Boiling point | 68-9°C |
| Flash point | Below 20°F |
| Melting point | -85°C |
| Specific gravity at 20°C | 0.731 |
| Refractive index at 20°C | 1.3985 |
| Weight per gallon at 20°C | 6.10 lbs. |
| Distillation range | 66-69°C |
| Purity | 99% min. |

Table 14.20: Diisobutylamine (2)


Diisobutylamine is a colorless liquid soluble in ethyl alcohol, methyl alcohol, aromatic and aliphatic hydrocarbons, ethyl ether, ethyl acetate, acetone, fixed oils, mineral oil, oleic and stearic acids. It is insoluble in water and while it dissolves hot paraffin and carnauba waxes, these solidify on cooling.

| | |
|---------------------------|-----------|
| Flash point | 85°F |
| Melting point | -70°C |
| Specific gravity at 20°C | 0.75 |
| Refractive index at 20°C | 1.4124 |
| Weight per gallon at 20°C | 6.22 lbs. |
| Distillation range | 136-140°C |
| Purity | 97% min. |

Table 14.21: *sec*-Butylamine (2)


sec-Butylamine is a water-white liquid with a characteristic amine odor. It is soluble in water, methyl and ethyl alcohols, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, mineral oil, fixed oils, stearic and oleic acids. It dissolves hot paraffin and carnauba waxes but these solidify on cooling.

| | |
|-----------------------------|---------|
| Boiling point (772 mm) | 66°C |
| Flash point | 20°F |
| Melting point | -104°C |
| Specific gravity at 20/20°C | 0.725 |
| Boiling range | 62-69°C |

Table 14.22: Mono-*n*-Butyl Diamylamine (2)

This amine is a light straw colored liquid with an amine odor. It is soluble in acetone, ethyl ether, ethyl acetate, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, and oleic and stearic acids. It is insoluble in water, methyl alcohol, and although soluble in hot paraffin and carnauba waxes, these solidify on cooling.

| | |
|-----------------------------|-----------|
| Flash point | 200°F |
| Specific gravity at 20/20°C | 0.788 |
| Weight per gallon at 20°C | 6.56 lbs. |
| Boiling range | 229-241°C |

Table 14.23: *n*-Amylamine (2)

n-Amylamine is a colorless liquid with an ammoniacal odor. Commercially it is a mixture of the following isomers, although a pure product is available.

| | B.P.,°C. |
|--------------------------|----------|
| <i>tert</i> -Amylamine | 82 |
| <i>sec</i> -Isoamylamine | 87 |
| 2-Aminopentane | 89 |
| 3-Aminopentane | 90 |
| Active amylamine | 94 |
| <i>sec</i> -Amylamine | 95 |
| <i>n</i> -Amylamine | 104 |


It is miscible with water, ethyl and methyl alcohols, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, pyridine, oleic and hot stearic acids, hot paraffin and hot carnauba waxes, the latter two solidifying when cooled. It dissolves a varied range of materials which are usually dissolved with difficulty by other organic solvents. It is used as a corrosion inhibitor and as a base for emulsifiers which are soluble in vegetable and mineral oils. It is also employed in textile lubrication, and as a raw material in the manufacture of dyestuffs, emulsifying agents, antioxidants, desizing agents for textiles and pharmaceuticals.

| | | | |
|-------------------------------------|-----------------------|---------------------------|-----------------|
| Boiling point | 102-104°C | Viscosity at 20°C | 0.01018 poise |
| Coefficient of expansion at 20-60°C | 0.00116 | Vapor pressure at 26°C | 35 mm |
| Constant-boiling mixture | | Weight per gallon at 20°C | 6.41 lbs. |
| <i>n</i> -Amylamine | 79-82.5% 82-85°C B.P. | Color | Water-white |
| Water | 21-17.5% | Distillation range | |
| Flash point (open cup) | 65°F | Initial boiling point | Not below 84°C |
| Heat of vaporisation | 108 cal./g. | Not less than 95% | Below 100°C |
| Melting point | -55°C | Final boiling point | Not above 110°C |
| Specific gravity at 20/20°C | 0.76-0.78 | Purity | 90% min. |
| Specific heat at 60°F | 0.65 cal./g. | Water dilution | 20:1 min. |
| Refractive index at 19°C | 1.4068 | | |
| Surface tension at 13°C | 24.4 dynes/cm. | | |

Table 14.24: sec-Amylamine (2)

sec-Amylamine is a colorless liquid with an amine odor. It is soluble in water, methyl and ethyl alcohols, aromatic and aliphatic hydrocarbons, ethyl ether, ethyl acetate, acetone, fixed oils, oleic and stearic acids. It dissolves hot paraffin and carnauba waxes which solidify when cooled.

| | |
|---------------------------|-------------|
| Boiling point (760 mm) | 91–92°C |
| Flash point | 20°F |
| Specific gravity at 20°C | 0.739 |
| Refractive index at 20°C | 1.4047 |
| Weight per gallon at 20°C | 6.15 lbs. |
| Distillation range | 89–92°C |
| Purity | 95–99% min. |

Table 14.25: Diamylamine (Mixed Isomers) (2)

Diamylamine is a colorless to straw-colored liquid with an ammoniacal odor, which is composed of a mixture of amyl isomers. It is soluble in ethyl alcohol, methyl alcohol, ethyl ethers, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids. It is insoluble in water and while soluble in hot paraffin and carnauba waxes, these solidify on cooling. It is a solvent for oils, resins, and some cellulose esters. Introduction of the amyl group imparts oil solubility to otherwise oil-insoluble substances. It is used as a corrosion inhibitor, and in chemical synthesis.

| | |
|-------------------------------------|-----------------|
| Coefficient of expansion at 20–80°C | 0.00102 |
| Flash point (open cup) | 158°F |
| Heat of vaporization | 83 cal./g. |
| Specific gravity at 20/20°C | 0.77–0.78 |
| Specific heat at 60°F | 0.54 cal./g. |
| Refractive index at 20°C | 1.4259 |
| Surface tension at 13°C | 24.4 dynes/cm. |
| Vapor pressure at 26°C | 9 mm |
| Viscosity at 20°C | 0.01284 poise |
| Weight per gallon at 20°C | 6.45 lbs. |
| Acid insoluble | 0.5% min. |
| Distillation range | |
| Initial boiling point | Not below 175°C |
| Not less than 95% | Below 202°C |
| Final boiling point | Not above 218°C |
| Purity | 99% min. |
| Sulfur | 0.06% min. |

Table 14.26: Triamylamine (Mixed Isomers) (2)

Triamylamine is a water-white to light yellow, stable liquid which is strongly basic in reaction. It is soluble in ethyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids, and in hot paraffin and carnauba waxes, the latter two solidifying when cooled. It is insoluble in water and methyl alcohol. It is an excellent corrosion inhibitor of steel in a 0.13% solution in normal sulfuric acid. It is used in the manufacture of emulsifying agents, dyestuffs, and insecticides.

| | |
|-----------------------------|-----------------|
| Coefficient of expansion | 0.00091 |
| Flash point (open cup) | 215°F |
| Heat of vaporization | 79 cal./g. |
| Specific gravity at 20/20°C | 0.79–0.80 |
| Specific heat at 60°F | 0.51 cal./g. |
| Refractive index at 18°C | 1.4374 |
| Surface tension at 13°C | 24.4 dynes/cm. |
| Viscosity at 20°C | 0.02421 poise |
| Vapor pressure at 26°C | 7 mm |
| Weight per gallon at 20°C | 6.60 lbs. |
| Acid insolubles | 1.0% max. |
| Distillation range | |
| Initial boiling point | Not below 234°C |
| Not less than 50% | Above 244°C |
| Not less than 95% | Below 256°C |
| Final boiling point | Not above 280°C |
| Purity | 99% min. |

Table 14.27: sec-Hexylamine (2)

sec-Hexylamine is a colorless liquid with an amine odor and soluble in water, ethyl alcohol, and paraffin hydrocarbons.

| | |
|--------------------------|-----------|
| Flash point | 55°F |
| Specific gravity at 20°C | 0.746 |
| Weight per gallon | 6.22 lbs. |
| Distillation range | 107-110°C |
| Purity | 95-99% |


Table 14.28: 2-Ethylbutylamine (2)

Hexylamine



2-Ethylbutylamine is a water-white liquid with an amine odor. It is soluble in methyl and ethyl alcohols, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids. It dissolves in water and while soluble in hot paraffin and carnauba waxes, these solidify on cooling.

| | |
|-----------------------------|-----------|
| Flash point | 70°F |
| Specific gravity at 20/20°C | 0.776 |
| Boiling range | 121-125°C |


Table 14.29: n-Heptylamine (2)

n-Heptylamine is a water-white liquid with an amine odor. It is insoluble in water but soluble in ethyl and methyl alcohols, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids. It dissolves hot paraffin and carnauba waxes, which solidify when cooled.

| | |
|-----------------------------|-----------|
| Flash point | 130°C |
| Melting point | -23°C |
| Specific gravity at 20/20°C | 0.779 |
| Boiling range | 150-160°C |

Table 14.30: 2-Ethylhexylamine (2)

Octylamine




Octylamine is a water-white liquid with an amine odor. It is insoluble in water but soluble in methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids. It dissolves hot paraffin and carnauba waxes, which solidify on cooling.

| | |
|-----------------------------|-----------|
| Flash point | 135°F |
| Specific gravity at 20/20°C | 0.792 |
| Boiling range | 165-169°C |


Table 14.31: DI-2-Ethylhexylamine (2)

Dioctylamine



Dioctylamine is a colorless liquid with a faintly amine odor. It is soluble in methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids. It is insoluble in water and while soluble in hot paraffin and carnauba waxes, these solidify when cooled. Among the large number of substances it will dissolve are natural and synthetic resins.


| | | | |
|-----------------------------|--------------|----------------------------------------|--------------|
| Boiling point (760 mm) | 281.1°C | Solubility of water in solvent at 20°C | 0.17% by wt. |
| Flash point | 270°C | Vapor pressure at 20°C | 0.01 mm |
| Specific gravity at 20/20°C | 0.8062 | Weight per gallon at 20°C | 6.71 lbs. |
| Solubility in water at 20°C | 0.02% by wt. | Boiling range | 269-280°C |

Table 14.32: Cyclohexylamine (2)

Cyclohexylamine is a colorless, caustic liquid with a fishy, amine odor. It has been known since 1893, but not until 1936 was it made in commercial quantities in the United States. It is produced by the catalytic hydrogenation of aniline. It is a strong base, even stronger than ammonia or the ethanol-amines. It is miscible with water and most of the common organic solvents, among which are the alcohols, ethers, ketones, esters, aliphatic and aromatic hydrocarbons, both pure and chlorinated. It is used as a solvent and as a corrosion inhibitor. Either alone or as a soap, it is employed as a wetting-out, cleansing, washing, emulsifying or dispersing agent in the textile industry. It may be used to absorb acidic gases, as a preservative for dyes, as an insecticide, and in the printing and dyeing of textile products.

Typical Properties and Specifications

| | |
|-----------------------------|-----------------------------------|
| Boiling point (760 mm) | 134.5°C |
| Freezing point | -17.7°C |
| Fire point | 30°C |
| Flash point | Below 0°C |
| Specific gravity at 25/25°C | 0.8647 |
| Refractive index at 25°C | 1.4565 |
| Weight per gallon at 20°C | 7.206 lbs. |
| Azeotropic mixture | |
| Cyclohexylamine | 44.2% by wt. B.P. (760 mm) 96.4°C |
| Water | 55.8% by wt. |
| Distillation range | 132.0-137.5°C |

Table 14.33: Dicyclohexylamine (2)

Dicyclohexylamine is a clear, colorless and strongly basic liquid with a faint odor. It is miscible with most organic solvents but only slightly soluble in water. Unlike cyclohexylamine, it does not form an azeotropic mixture with water. It is more toxic than cyclohexylamine when absorbed through the skin and when large amounts are absorbed, death may result.

Dicyclohexylamine soaps are good emulsifying agents. This solvent may be used to absorb acidic gases, to preserve rubber latex, to plasticize casein, to neutralize plant and insect poisons, and as a solvent for dyes in the textile printing and dyeing industry.

Typical Properties and Specifications

| | |
|-----------------------------|---------------|
| Boiling point (760 mm) | 255.8°C |
| Freezing point | -0.1°C |
| Fire point | 160°C |
| Flash point | 100°C |
| Specific gravity at 25/25°C | 0.9104 |
| Refractive index at 25°C | 1.4823 |
| Weight per gallon at 20°C | 7.59 lbs. |
| Boiling range | 252.0-258.0°C |
| Purity | 98%, min. |

Table 14.34: ALIQUAT Fatty Quaternary Ammonium Chloride (58)

| | |
|----------------|--------------------------------------|
| Product | Aliquat 336* |
| Description | Methyl tricaprylyl ammonium chloride |
| Percent solids | 88% minimum |

*Aliquat is a registered trademark of Henkel Corp.

Table 14.35: KEMAMINE Fatty Quaternary Ammonium Chlorides (26)

| Product | Description (CTFA adopted name) | % Active Min | % Amine Max | % Amine HCl Max | Color Gardner, 1963 Max |
|---------------------|------------------------------------------------------|--------------------|-------------------|--------------------------|----------------------------------|
| Kemamine Q-2802C* | Dimethyl Di-Behenyl (Dibehenyl Dimonium Chloride) | 75 | 2 | 2 | 4 |
| Kemamine Q-9702C | Dimethyl Di-Hydrogenated Tallow (Quaternium-18) | 75 | 1.5 | 0.5 | 2 |
| Kemamine Q-9743CHGW | Trimethyl Monoalkyl (Tallow Trimonium Chloride) | 65 | 1.5 | 0.5 | 4 |
| Kemamine Q-9743C | Trimethyl Monoalkyl (Tallow Trimonium Chloride) | 65 | 1.5 | 0.5 | 4 |
| Kemamine BQ-9742C | Dimethyl Tallow Benzyl (Tallow Alkonium Chloride) | 75 | 1.5 | 0.5 | 6 |

*Semicommercial.

| Product | Average molecular weight | pH of 5% solution Max | % Ash Max | Typical carbon chain composition | | | | | | | |
|---------------------|--------------------------------|-----------------------------|-----------------|----------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| | | | | Saturated | | | | | | Unsaturated | |
| | | | | C ₁₄ | C ₁₆ | C ₁₈ | C ₂₀ | C ₂₂ | C ₂₄ | C _{18:1} | C _{18:2} |
| Kemamine Q-2802C* | 690 | 9 | 0.2 | | 2 | 5 | 10 | 80 | 3 | | |
| Kemamine Q-9702C | 575 | 9 | 0.2 | 4 | 29 | 67 | | | | | |
| Kemamine Q-9743CHGW | 335-355 | 9 | 0.5 | 4 | 29 | 25 | | | | 38 | 4 |
| Kemamine Q-9743C | 335-355 | 9 | 0.5 | 4 | 29 | 25 | | | | 38 | 4 |
| Kemamine BQ-9742C | 420 | 9 | 0.2 | 4 | 29 | 25 | | | | 38 | 4 |

*Semicommercial.

Table 14.36: High Molecular Weight Aliphatic Amines (59)

| N-alkyl Chain | Carbon Chain Length | Primary | | | | | | | | | | | | | | Secondary | | Diamines | | | | | | | |
|-------------------------|---------------------|-----------|------------|-----------|------------|------------|------------|------------|--------------|-----------|------------|----------|------------|----------|------------|-----------|------------|-----------|-------------|-----------|-------------|-----------|-----------|-----|---|
| | | Armeen 8D | Armeen 10D | Armeen 12 | Armeen 12D | Armeen 14D | Armeen 16D | Armeen H T | Armeen H T D | Armeen 18 | Armeen 18D | Armeen T | Armeen T D | Armeen S | Armeen S D | Armeen C | Armeen C D | Armeen 2C | Armeen 2H T | Duomeen C | Duomeen C D | Duomeen S | Duomeen T | | |
| Hexyl | 6 | 3 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Octyl | 8 | 90 | 4 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Decyl | 10 | 7 | 90 | 2 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Dodecyl | 12 | — | 6 | 95 | 95 | 4 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Tetradecyl | 14 | — | — | — | 3 | 92 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Hexadecyl | 16 | — | — | — | — | 4 | 92 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Octadecyl | 18 | — | — | — | — | — | 7 | 71 | 71 | 90 | 90 | 28 | 28 | 17 | 17 | — | — | — | — | — | — | — | — | — | |
| Octadecenyl | 18 | — | — | — | — | — | 1 | 3 | 3 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Octadecadienyl | 18 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Mol. combining weight | | 135 | 166 | 213 | 195 | 227 | 250 | 300 | 275 | 300 | 280 | 298 | 274 | 297 | 275 | 223 | 208 | 450 | 530 | 321 | 310 | 402 | 400 | 400 | |
| Percent Primary Amine | | 90 | — | 82 | 94 | 92 | 95 | 85 | 95 | 85 | 95 | 85 | 95 | 86 | 95 | 85 | 95 | 85 | 85 | 40 | 44 | 40 | 40 | 40 | |
| Percent Secondary Amine | | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Approx. Melting Pt. °C | | -13 | 8 | 24 | 24 | 29 | 38 | 57 | 55 | 55 | 55 | 46 | 41 | 31 | 22 | 24 | 21 | 46 | 68 | 22 | 20 | 40 | 46 | 46 | |
| Color—FAC | | 3 | 3 | 9 | 3 | 3 | 3 | 11 | 3 | 11 | 3 | 19 | 3 | 19 | 7 | 11 | 3 | 5 | 5 | 11 | 13 | 13 | 19 | 19 | |
| Grade: | | | | | | | | | | | | | | | | | | | | | | | | | |
| D—Distilled | | D | D | T | D | D | D | T | D | T | D | T | D | T | D | T | D | D | D | D | T | D | T | T | T |
| T—Technical | | | | | | | | | | | | | | | | | | | | | | | | | |

| N-alkyl Chain | Carbon Chain Length | Dimethyl Tertiary Amine | | | | | | | | | | Dialkyl Tertiary Amines | | | | | | | | | | | | | |
|-------------------------|---------------------|-------------------------|--------------|-------------|--------------|--------------|----------------|--------------|----------------|----------------|--------------|-------------------------|------------|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|
| | | Armeen DM16 | Armeen DM16D | Armeen DM18 | Armeen DM18D | Armeen D M C | Armeen D M C D | Armeen D M S | Armeen D M S D | Armeen D M H T | Armeen DMHTD | Armeen M2HT | Armeen M2C | Armeen M2S | | | | | | | | | | | |
| Hexyl | 6 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Octyl | 8 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Decyl | 10 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Dodecyl | 12 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Tetradecyl | 14 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Hexadecyl | 16 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Octadecyl | 18 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Octadecenyl | 18 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Octadecadienyl | 18 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Mol. weight—theoretical | | 271 | 271 | 295 | 295 | 224 | 224 | 289 | 289 | 289 | 289 | 289 | 289 | 289 | 289 | 289 | 289 | 522 | 389 | 520 | 520 | 520 | 520 | 520 | |
| Mol. combining weight | | 338 | 295 | 369 | 321 | 280 | 244 | 361 | 314 | 361 | 314 | 361 | 314 | 361 | 314 | 361 | 314 | 564 | 436 | 594 | 594 | 594 | 594 | 594 | |
| Percent Tertiary Amine | | 80 | 92 | 80 | 92 | 80 | 92 | 80 | 92 | 80 | 92 | 80 | 92 | 80 | 92 | 80 | 92 | 80 | 92 | 80 | 92 | 80 | 92 | 80 | |
| Approx. Melting Pt. °C | | 15 | 10 | 23 | 20 | -10 | -15 | 0 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 28 | — | — | — | — | — | — | |
| Color—Gardner—1933 | | 5 | 1 | 5 | 1 | 5 | 1 | 5 | 1 | 5 | 1 | 5 | 1 | 5 | 1 | 5 | 1 | 5 | 1 | 5 | 1 | 5 | 1 | 5 | |
| D—Distilled | | T | D | T | D | T | D | T | D | T | D | T | D | T | D | T | D | T | D | T | D | T | D | T | D |
| T—Technical | | | | | | | | | | | | | | | | | | | | | | | | | |

Table 14.37: Solubilities of Pure Dodecyl- and Octadecyl-Trimethylammonium Chlorides in Grams per 100 Grams of Solvent (59)

| Salt—Solvent | -10° | 0° | 10° | 20° | 30° | 40° | 45° | 50° | 55° | 56.5° | 60° | 65° | 70° | 72° | 80° | 84° | 86° | |
|-----------------------------------------------|----------------------------------------------------------------------|----------|-------|-------|------|-------|-------|-----|-------|-------|-------|-----|------|------|-----|-----|-----|---|
| Dodecyl | Methanol | 83.1 | 113.8 | 145.8 | 180 | 226.6 | — | — | — | — | — | — | — | — | — | — | — | |
| | Acetone | — | — | — | — | 2.88 | 9.76 | — | 41.75 | 91.9 | 110.6 | — | — | — | — | — | — | |
| | Acetonitrile | — | 4.8 | 10.9 | 18.2 | 32.8 | 81.2 | — | — | — | — | — | — | — | — | — | — | |
| | Carbon tetrachloride | — | — | — | — | 1.21 | 34.2 | 102 | gel | — | — | — | — | — | — | — | — | |
| | Insoluble in ethyl acetate, benzene, n-hexane or cyclohexane at 95°. | | | | | | | | | | | | | | | | | |
| | Octadecyl | Methanol | 5.7 | 15.4 | 32.5 | 71.6 | 112.8 | 168 | — | 252 | — | — | — | — | — | — | — | — |
| Ethanol(93.5%) | | 3.7 | 9.3 | 25.6 | 43.1 | 82.9 | 132 | — | 210 | — | — | — | — | — | — | — | — | |
| Acetone | | — | — | — | — | — | — | — | 0.50 | 0.71 | 0.76 | — | — | — | — | — | — | |
| Acetonitrile | | — | — | — | 0.7 | 1.8 | 3.2 | — | 5.1 | — | — | — | — | — | — | — | — | |
| Carbon tetrachloride | | — | — | — | — | — | — | — | — | — | 0.40 | — | 5.04 | 36.2 | — | — | — | |
| Chloroform | | 13.6 | 25 | 40.8 | 56 | 73.5 | 100 | — | — | — | — | — | — | — | — | — | — | |
| Ethyl acetate | | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| Benzene | — | — | — | — | — | — | — | — | 0.5 | — | 3.1 | 19 | 46 | — | — | — | — | |
| Insoluble in n-hexane or cyclohexane at 95°C. | | | | | | | | | | | | | | | | | | |

Table 14.38: Solubilities of Organic Compounds in Aliphatic Amines at 25° ± 5°C (1)(2)

| Abbreviation | Approx. Solv Range per 100 cc. of Solvent Grams | | | | | | | | | | |
|----------------------------------|-------------------------------------------------|----------------------------------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------------------|-------------------------------------------------|-----------------------------------------------------|--------------------------------------|---------------------------------------------------|---------------------------------------------------------------|
| | CH ₃ OH | $\begin{matrix} \text{O} \\ \text{C}_6\text{H}_5 \\ \text{C}_6\text{H}_5 \end{matrix}$ | CH ₃ NH ₂ | $\begin{matrix} \text{NH} \\ \text{C}_6\text{H}_5 \\ \text{C}_6\text{H}_5 \end{matrix}$ | (CH ₃) ₂ N | (n-C ₄ H ₉) ₂ NH | n-C ₄ H ₉ NH ₂ | (n-C ₆ H ₁₃) ₂ NH | (n-C ₆ H ₁₃)N | iso-C ₄ H ₉ NH ₂ | C ₆ H ₅ CH ₂ NH ₂ |
| 1 Acenaphthene | ssx | .. | .. | 15 | .. | .. | .. | .. | .. | .. | ins |
| 2 Acetaldehyde | .. | .. | misc | .. | .. | .. | .. | .. | .. | .. | .. |
| 3 Acetamide | s | .. | vs | ssx | ins | .. | s | ins | ins | s | vs |
| 4 Acetanilide | vs | ss | .. | 11 | ssx | .. | vs | ss | ssx | ss | .. |
| 5 Acetic acid | .. | .. | vs | .. | .. | .. | .. | .. | .. | .. | .. |
| 6 Acetoacetic ester | 00 | .. | .. | 00 | .. | .. | .. | 00 | .. | .. | 00 |
| 7 Acetone | 00 | 00 | 00 | .. | .. | .. | .. | .. | .. | .. | .. |
| 8 Acetophenone | 00 | .. | .. | ins | ins | .. | .. | 00 | .. | .. | s |
| 9 p-Acetophenylene diamine | .. | .. | .. | ins | .. | .. | ssx | ssx | .. | ssx | .. |
| 10 p-Acetotoluide | ss | s | .. | ss | .. | .. | .. | ssx | ssx | .. | ss |
| 11 Acetylene | s | .. | s | .. | .. | .. | .. | .. | .. | .. | .. |
| 12 Acetylene tetrabromide | s | 00 | .. | r | .. | .. | .. | .. | .. | .. | s |
| 13 Acetylsalicylic acid | vs | ss | .. | s | s | s | vs | s | ss | vs | s |
| 14 Agar-agar | .. | .. | .. | .. | .. | .. | .. | .. | .. | insn | .. |
| 15 Alanine | ss | ins | .. | .. | .. | .. | .. | .. | .. | insn | ins |
| 16 Aldol | 00 | s | .. | 00 | .. | .. | 00 | .. | .. | .. | .. |
| 17 Alizarin | .. | 00 | s | .. | .. | .. | .. | .. | .. | .. | .. |
| 18 Allyl alcohol | 00 | 00 | .. | 00 | .. | .. | .. | .. | .. | .. | .. |
| 19 1-Aminoanthraquinone | ss | ss | .. | ss | ss | ssm | ss | ssx | ssm | ss | .. |
| 20 p-Aminobenzoic acid | s | ss | .. | ins | ins | ss | ins | ss | insn | ss | ssx |
| 21 m-Aminophenol | s | s | .. | vs+ | ss | .. | s | ss | .. | vs | s |
| 22 o-Aminophenol | ss | ss | .. | vs | ins | s | vs+ | ss | ssn | s | vs |
| 23 Aminosulfonic (sulfamic) acid | .. | .. | .. | .. | .. | .. | .. | .. | .. | ssx | .. |
| 24 Ammonium benzoate | .. | .. | .. | ss | .. | .. | vsr | .. | .. | vsr | vs |
| 25 Ammonium citrate | .. | .. | .. | ss | .. | .. | .. | .. | .. | .. | .. |
| 26 Amyl alcohol (iso) | 00 | 00 | .. | 00 | .. | .. | 00 | .. | .. | .. | 00 |
| 27 n-Amyl formate | 00 | 00 | 00 | .. | .. | .. | .. | 00 | .. | .. | .. |
| 28 Anethole | 00 | 00 | .. | 00 | .. | .. | .. | .. | .. | .. | ss |
| 29 Anhydroformaldehydeaniline | ss | ss | .. | ssn | ssx | ins | ss | ss | ssx | ssx | .. |
| 30 Aniline blue | .. | .. | .. | ss | ins | .. | ss | ins | ins | ss | .. |
| 31 Anthracene | ss | ss | .. | ss | ssx | .. | ssx | ss | ssx | ssx | ins |
| 32 Anthranilic acid | s | s | .. | ss | ins | ssx | s | ss | ss | s | .. |
| 33 Anthraquinone | ss | ss | .. | .. | .. | .. | ssx | .. | .. | ssx | ins |
| 34 Atoxyl | .. | .. | .. | ins | ins | .. | ss | ins | ins | ss | .. |
| 35 Azobenzene | ss | s | vs | vs | vsx | vs | vs | vs | s | vs | s |
| 36 Azoxybenzene | s | s | .. | es | .. | .. | .. | .. | .. | es | s |
| 37 Beeswax | .. | .. | .. | s | s | .. | s | s | ssm | s | ssm |
| 38 Benzalacetophenone | ss | vs | .. | vs | .. | .. | es | .. | ssx | .. | .. |
| 39 Benzaldehyde | 00 | 00 | .. | 00 | .. | .. | .. | .. | .. | .. | es |
| 40 Benzamide | s | vs | .. | ss | ins | s | s | ssx | ins | s | vs |
| 41 Benzene | 00 | 00 | .. | 00 | .. | .. | 00 | 00 | .. | .. | 00 |
| 42 Benzidine | s | ss | .. | ss | ss | .. | s | ssx | ins | ss | s |
| 43 Benzil | vs | vs | vs | vs | ss | ss | es | ss | ss | es | es |
| 44 Benzoic acid | vs | vs | vs | ssx | ssx | .. | vs | s | ssp | s | ss |
| 45 Benzoic sulfinate (Saccharin) | ss | ins | r | .. | .. | .. | .. | .. | .. | ss | .. |
| 46 Benzoin | s | .. | .. | .. | .. | .. | vs | .. | .. | .. | .. |
| 47 Benzophenone | s | s | vs | es | es | .. | es | vs+ | ss | es | s |
| 48 Benzyl acetate | 00 | 00 | .. | 00 | .. | .. | .. | 00 | .. | .. | 00 |
| 49 Benzyl alcohol | 00 | 00 | .. | 00 | .. | .. | .. | 00 | .. | .. | 00 |
| 50 Borneol | vs | vs | .. | es | .. | .. | .. | .. | .. | .. | s |
| 51 o-Bromoacetanilide | .. | .. | vs | .. | .. | .. | .. | .. | .. | .. | .. |
| 52 p-Bromoaniline | vs | vs | .. | vsx | vs+ | esx | vs+ | vs | ssx | vs | vs+ |
| 53 Bromocamphor | s | vs | .. | vs+x | s | .. | vs+x | vs+ | ssx | vs | .. |
| 54 Bromocresol green | .. | .. | .. | ss | ins | .. | s | ssn | ins | s | .. |
| 55 1-Bromonaphthalene | 00 | 00 | .. | 00 | .. | .. | .. | 00 | .. | .. | .. |
| 56 p-Bromonitrobenzene | s | s | .. | s | .. | .. | .. | .. | .. | .. | .. |
| 57 o-Bromotoluene | s | .. | .. | 00 | .. | .. | .. | 00 | 00 | 00 | .. |
| 58 p-Bromotoluene | s | s | .. | es | .. | .. | .. | es | .. | 00 | .. |
| 59 n-Butyl alcohol | 00 | .. | .. | 00 | .. | .. | .. | .. | .. | 00 | 00 |
| 60 tert-Butyl alcohol | .. | .. | 00 | .. | .. | .. | .. | .. | .. | .. | .. |
| 61 n-Butyl xyanide | 00 | s | .. | 00 | .. | .. | 00 | 00 | 00 | 00 | .. |
| 62 n-Butyl ether | 00 | 00 | .. | 00 | .. | .. | 00 | 00 | 00 | 00 | s |
| 63 n-Butyl formate | 00 | 00 | .. | 00 | .. | .. | .. | 00 | 00 | 00 | .. |
| 64 n-Butyl stearate | .. | .. | .. | 00 | .. | .. | 00 | 00 | 00 | 00 | iss |
| 65 Caffeine | ss | ss | .. | ss | .. | .. | ssx | .. | .. | ssx | .. |
| 66 Calcium acetate | ins | .. | .. | insn | .. | .. | .. | .. | .. | .. | .. |
| 67 n-Calcium butyrate | .. | .. | .. | .. | .. | .. | insn | .. | .. | .. | .. |
| 68 Calcium formate | ins | .. | .. | .. | .. | .. | .. | .. | insn | .. | .. |
| 69 d-Camphor | es | vs | .. | es | es | .. | es | vs | vsx | es | vs |
| 70 Carbon disulfide | 00 | 00 | .. | r | .. | .. | esr | .. | 00 | .. | r |

Abbreviation: ins Insoluble or extremely slightly soluble; ss Slightly soluble; s Moderately soluble; vs Very soluble; vs+ More than vs; es Extremely soluble; misc Miscible (in methylamine column only); 00 Miscible in all proportions; n Not soluble to an appreciable greater extent in hot solvent; x More soluble in heated amine, crystallizes on cooling; r More soluble in heated amine (in some cases because of chemical reaction); p Separates into two liquid phases; r Solute reacts chemically with solvent. Reaction is rapid enough to be apparent. All acidic substances react more or less rapidly with amines. (The letter r has been omitted in these cases).

a Numerals: Numerals appearing in diethylamine column indicate number of grams of solute (or of its reaction product with diethylamine) per 100 cc. of solution.

(continued)

Table 14.38 (continued)

| | CH ₃ OH | $\begin{matrix} \text{CH}_3 \\ \text{C} \text{---} \text{O} \\ \text{CH}_3 \end{matrix}$ | CH ₃ NH ₂ | $\begin{matrix} \text{C}_6\text{H}_5 \\ \text{C} \text{---} \text{NH} \\ \text{C}_6\text{H}_5 \end{matrix}$ | (C ₆ H ₅) ₂ N | (<i>n</i> -C ₆ H ₁₃) ₂ NH | #-C ₆ H ₅ NH ₂ | (<i>n</i> -C ₆ H ₁₃) ₂ NH | (<i>n</i> -C ₆ H ₁₃) ₂ N | <i>iso</i> -C ₆ H ₁₃ NH ₂ | C ₆ H ₅ CH ₂ NH ₂ | NH ₂ (-33° C.) |
|-----|----------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------|--------------------------------------------------------------|-------------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------------|---------------------------------------------------------------|---------------------------|
| 71 | Casein | .. | .. | ins | ins | .. | ins | ins | ins | ins | ins | .. |
| 72 | Cellulose | ins | ins | .. | ins | ins | ins | ins | ins | ins | ins | .. |
| 73 | Cellulose acetate | .. | .. | .. | .. | .. | .. | .. | .. | .. | .. | .. |
| 74 | Cellulose nitrate | .. | .. | .. | .. | .. | .. | .. | .. | .. | .. | .. |
| 75 | Cerulain | .. | .. | vs | .. | .. | .. | .. | .. | .. | .. | .. |
| 76 | Cetyl alcohol | s | s | vax | .. | .. | es | .. | s | .. | .. | ins |
| 77 | Chloroacetic acid (mono) | s | s | .. | sx | vaxp | sx | asxr | sdp | vs | ssxm | vs |
| 78 | <i>p</i> -Chlorodiphenyl | s | s | .. | vs+ | vs+x | vs | vs | .. | .. | .. | vs |
| 79 | Chloroform | oo | oo | oo r | .. | .. | oo | oo | oo | oo | oo | sr |
| 80 | Cholesterol | ssx | s | .. | .. | .. | vs+ | .. | .. | .. | .. | ins |
| 81 | Chromotropic salt | .. | .. | .. | .. | .. | insn | .. | .. | .. | .. | .. |
| 82 | Cinchonine | ss | ss | .. | .. | .. | ssn | .. | .. | .. | .. | ins |
| 83 | Cinnamic acid | s | vs | .. | s | .. | sx | es | sax | s | ssx | s |
| 84 | Coconut oil | .. | .. | .. | .. | .. | .. | .. | .. | .. | .. | .. |
| 85 | Copal | .. | .. | .. | .. | .. | .. | .. | .. | inan | .. | .. |
| 86 | Crystal violet | .. | .. | .. | ins | ins | vs | ins | ins | s | .. | s |
| 87 | Cyclohexanol | s | s | .. | oo | .. | .. | .. | .. | .. | .. | .. |
| 88 | <i>o</i> -Dianisidine (biansidine) | s | vs | .. | .. | ins | .. | sx | es | ins | s | .. |
| 89 | Diazaminobenzene | s | vs | .. | vs | .. | .. | .. | .. | es | .. | .. |
| 90 | <i>p</i> -Dibromobenzene | s | .. | .. | 40 | vs+x | .. | vax | vs | sx | vs | vs |
| 91 | 2,3-Dibromopropyl alcohol | vs | oo | .. | .. | .. | .. | .. | .. | .. | .. | .. |
| 92 | Dichloramine-T | .. | .. | .. | vsr | sr | .. | vsr | asr | r | vsr | vs+r |
| 93 | <i>p</i> -Dichlorobenzene | es | vs | .. | 53 | esx | .. | es | ves | vs+x | es | es |
| 94 | Dichlorogallein | .. | .. | s | .. | .. | .. | .. | .. | .. | .. | s |
| 95 | Dichlorohydrin | oo | oo | .. | oo | .. | .. | .. | .. | .. | .. | .. |
| 96 | 2,3-Dihydroxyquinoline | .. | .. | .. | .. | .. | insn | .. | .. | .. | .. | s |
| 97 | Dimethylaminoazobenzene | x | .. | .. | sx | ssx | ssx | es | s | ssx | s | .. |
| 98 | <i>p</i> -Dimethylaminobenzaldehyde | s | s | .. | .. | .. | sx | .. | .. | .. | .. | .. |
| 99 | Dimethylaniline | s | oo | .. | oo | .. | .. | .. | .. | .. | .. | .. |
| 100 | Dimethylethylcarbinol | s | s | .. | oo | .. | .. | oo | .. | oo | oo | .. |
| 101 | Dimethylglyoxime | vs | vs | .. | ssx | s | ssx | vs | es | ssx | vs | .. |
| 102 | 2,6-Dimethylquinoline | vs | vs | .. | vs | .. | .. | .. | .. | .. | .. | .. |
| 103 | 2,2-Dimethylamine | ss | .. | .. | ssx | ssx | sx | ssx | ssx | s | ss | .. |
| 104 | 2,4-Dinitroaniline | ss | .. | vs | .. | .. | .. | .. | .. | .. | .. | .. |
| 105 | <i>m</i> -Dinitrobenzene | ssx | .. | vs | 9.3 | ss | .. | s | ss | ssx | s | .. |
| 106 | 3,5-Dinitrobenzoic acid | vs | ss | .. | es | es | ssx | s | ss | ssx | vs | sm |
| 107 | 4,4'-Dinitrodiphenyl | ss | vs | .. | ss | ss | .. | ssx | ssx | ssx | vs | ssx |
| 108 | 2,4-Dinitro-1-naphthol-7-sulfonic acid | .. | .. | .. | ss | .. | .. | .. | .. | .. | .. | .. |
| 109 | 2,4-Dinitrophenol | ss | vs | .. | ss | .. | .. | sx | .. | ssn | vs | .. |
| 110 | 2,4-Dinitrotoluene | ss | .. | vs | sx | .. | .. | sr | ssx | ssx | .. | .. |
| 111 | Diphenyl | ss | s | .. | 41 | s | .. | vs | s | sx | vs | ss |
| 112 | Diphenylamine | vs | vs | .. | es | vs | es | es | vs | sx | es | .. |
| 113 | Diphenylbenzamide | .. | .. | .. | ss | .. | .. | .. | .. | .. | .. | .. |
| 114 | Diphenylguanidine | .. | .. | .. | ss | ins | .. | vs | s | ssx | vs | .. |
| 115 | Diphenyl ketazine | .. | .. | .. | vs | .. | .. | .. | .. | .. | .. | .. |
| 116 | Diphenyl sulfone (phenyl sulfone) | ss | s | .. | sx | sx | .. | ssx | ss | ssx | ssx | .. |
| 117 | Diphenylurea (sym.) | s | s | .. | ss | ins | .. | ss | ss | ssx | s | ssx |
| 118 | 4,4'-Dipyridyl (bipyridine) | vs | .. | .. | .. | .. | .. | vax | .. | .. | sx | .. |
| 119 | Di- <i>p</i> -tolylselenide | .. | .. | .. | .. | .. | .. | es | .. | .. | .. | .. |
| 120 | Eosin | s | .. | .. | ss | ins | .. | vs | ss | ins | vs | s |
| 121 | Ethyl alcohol | oo | oo | .. | .. | .. | .. | oo | .. | .. | oo | sr |
| 122 | Ethyl carbonate | s | .. | .. | ssr | .. | .. | oo | .. | .. | .. | .. |
| 123 | Ethyl cyanoacetate | oo | oo | .. | oo | .. | .. | .. | .. | .. | oo | .. |
| 124 | Ethylene dibromide | s | oo | spr | oo | .. | .. | oo | .. | .. | oo | .. |
| 125 | Ethylene glycol | oo | ss | .. | oo | .. | oo | .. | .. | oo | oo | .. |
| 126 | Ethyl iodide | s | s | .. | oo | .. | .. | .. | oo | .. | esr | s |
| 127 | Ethyl malonate | oo | oo | .. | oo | .. | .. | oo | .. | .. | oo | .. |
| 128 | Ethyl oxalate | s | .. | .. | oo | .. | .. | .. | .. | .. | ssr | .. |
| 129 | Ethyl sulfate | .. | .. | .. | r | .. | .. | .. | rs | .. | .. | .. |
| 130 | Fluorene | ss | vs | .. | 13 | ssx | sx | s | s | ssx | s | ins |
| 131 | Fluorescein | vs | ss | .. | ss | ins | .. | s | ins | ins | s | s |
| 132 | Galactose | ss | .. | vs | .. | .. | .. | .. | .. | .. | .. | .. |
| 133 | Gallein | .. | .. | ss | .. | .. | .. | .. | .. | .. | .. | .. |
| 134 | Gallie acid | s | ss | .. | insn | insn | .. | s | insx | insn | s | ssm |
| 135 | Gelatin | .. | .. | .. | ins | ins | .. | insn | ins | ins | ins | .. |
| 136 | Glucose | ss | ins | vs | ss | ins | ssn | vs+ | ins | ins | s | vs |
| 137 | β -Glucose pentaacetate | ss | ss | .. | .. | .. | .. | es | .. | .. | .. | .. |
| 138 | Glycerol | oo | ins | vs | .. | .. | .. | .. | .. | .. | .. | .. |
| 139 | Guaiacol | oo | oo | .. | oo | .. | .. | .. | .. | .. | .. | .. |
| 140 | Guanidine nitrate | .. | .. | .. | ss | .. | .. | .. | .. | .. | .. | .. |
| 141 | Gum arabic | .. | .. | .. | insn | ins | .. | ins | ins | ins | ssn | ss? |
| 142 | H acid | ss | ss | .. | .. | .. | .. | insn | .. | .. | .. | .. |
| 143 | Hemoglobin | .. | .. | .. | ins | .. | .. | insn | .. | .. | .. | .. |
| 144 | Hexaethylbenzene | s | vs | .. | .. | .. | .. | ssx | .. | .. | ssx | .. |
| 145 | Hexamethylenetetramine | ss | ins | .. | ssn | .. | .. | ssn | .. | .. | .. | .. |
| 146 | Hippuric acid | ss | vs | vs | ssx | .. | .. | .. | .. | vs | .. | vs |
| 147 | Hydrazine sulfate | ins | .. | .. | ins | .. | .. | .. | .. | .. | .. | insr |
| 148 | Hydroquinone | vs | vs | vs | 35 | ss | s | s | ss | s | ssx | vs |
| 149 | Hydroxylamine hydrochloride | s | ins | vs | .. | .. | .. | .. | .. | .. | .. | .. |
| 150 | Indigotin | ins | ins | vs | ins | ins | .. | ss | ss | ss | ins | ss |

(continued)

Table 14.39: Vapor Pressure of Various Amines (37)



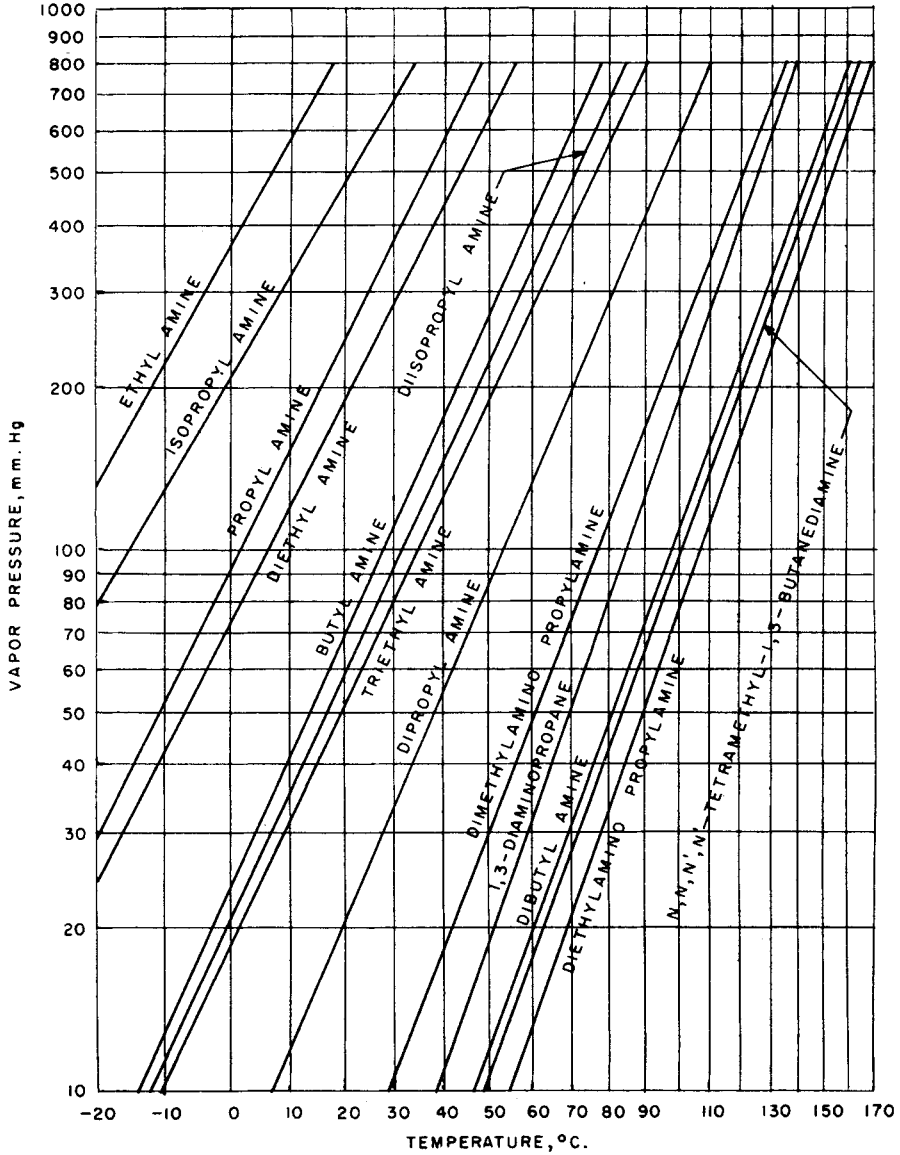


Table 14.40: Vapor Pressure of Sharples Amines (37)

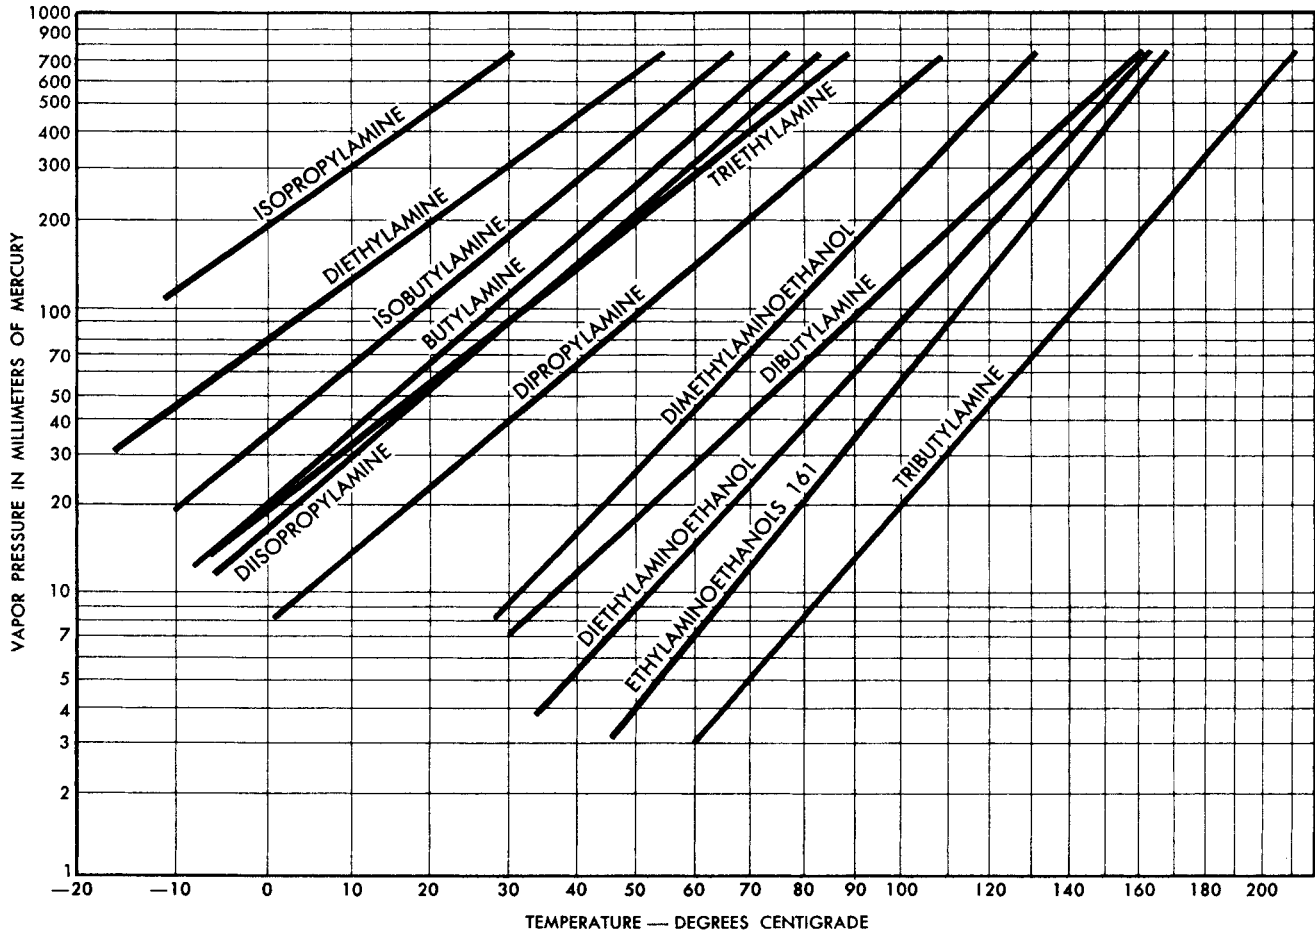

ALKYLENE DIAMINES

Table 14.41: Ethylene Diamine (2)



Ethylenediamine is a water-white, hygroscopic liquid with a strong ammoniacal odor. The commercial product is a 78% solution of ethylenediamine by weight. It is used in the synthesis of organic rubber accelerators, insecticides, textile processing chemicals, emulsifiers, plastics and pharmaceuticals. It is also used as a corrosion inhibitor.

| 78% solution | |
|----------------------------------------|----------------------|
| Boiling point (760 mm) | 117.2°C |
| Dielectric constant at 18°C | 16.0 |
| Flash point (open cup) | 110°F |
| Heat of combustion | 425.6 cal./mol |
| Heat of solution at 15°C | 7.6 cal./mol |
| Ionization constant at 25°C | 7.1×10^{-4} |
| Latent heat of evaporation | 167 cal./g. |
| Latent heat of fusion (0°C) | 77 cal./g. |
| Melting point | 11.0°C |
| Specific gravity at 20/20°C | 0.8995 |
| Solubility in water at 20°C | Complete |
| Solubility of water in solvent at 20°C | Complete |
| Refractive index at 28°C | 1.4540 |
| Vapor pressure at 20°C | 10.7 mm |
| Viscosity at 25°C | 0.0154 poise |
| Weight per gallon at 20°C | 7.49 |
| Constant-boiling mixture | |
| Ethylenediamine | 80% by wt. B.P.°C |
| Water | 20% by wt. 118.5 |
| Boiling range (760 mm) | 115 to 122°C |
| Color | Water-white |
| Purity | 78% by wt. |

Table 14.42: Boiling Point Composition Curves for Aqueous Ethylenediamine Solutions (2)


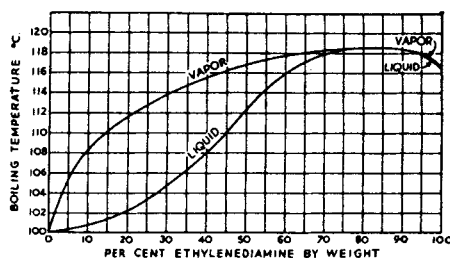



Table 14.43: Diethylenetriamine (2)

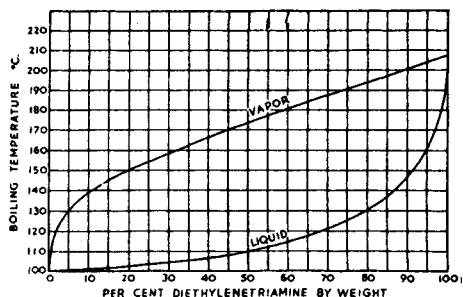

Diethylenetriamine is a colorless liquid, completely miscible with water and many organic solvents. It is a solvent for sulfur, acid gases, numerous natural resins and dyes. It is also used in organic synthesis and as a saponification agent for acidic materials.

| | |
|-----------------------------|-----------|
| Boiling point (760 mm) | 207.1°C |
| Flash point (open cup) | 215°F |
| Specific gravity at 20/20°C | 0.9542 |
| Vapor pressure at 20°C | 0.03 mm |
| Weight per gallon at 20°C | 7.94 lbs. |


Table 14.44: Boiling Point Composition Curves for Aqueous Diethylenetriamine Solutions (2)**Table 14.45: Tetraethylenepentamine (2)**

Tetraethylenepentamine is a viscous, hygroscopic and high-boiling liquid. It is miscible with water and many organic solvents, and is a solvent for dyes, resins, sulfur, and acid gases. It also forms soaps with fatty acids and it is employed in the synthesis of emulsifiers, plastics, and in rubber reclaiming.

| | |
|---------------------------|------------|
| Boiling point (760 mm) | 333°C |
| Flash point | 325°F |
| Specific gravity at 20°C | 0.998 |
| Vapor pressure at 20°C | 0.01 mm |
| Weight per gallon at 20°C | 8.31 lbs. |
| Boiling range (760 mm) | 320°-360°C |

Table 14.46: Propylenediamine (2)

1,2-Diaminopropane



Propylenediamine is a water-white liquid with an ammoniacal odor. It is miscible with water and many organic solvents, among them being benzene and naphtha. It does not form a constant-boiling mixture with water. It is a solvent for such substances as cellulose nitrate, castor oil, shellac, pine oil, copal gum, rosin, and dyes.

It behaves much like ethylenediamine but it is considered superior in solvent power. It is used in the manufacture of gasoline additives.

| | |
|----------------------------------------|-----------------|
| Boiling point (760 mm) | 119.7°C |
| Flash point (open cup) | 120°F |
| Specific gravity at 20/20°C | 0.8732 |
| Solubility in water at 20°C | Complete |
| Solubility of water in solvent at 20°C | Complete |
| Vapor pressure at 20°C | 9.4 mm |
| Weight per gallon at 20°C | 7.27 lbs. |
| Boiling range (760 mm) | 112-122°C |
| Purity | 80% by wt. min. |

Table 14.47: Solvent Properties of Alkylene Diamines (2)

| | ETHYLENE DIAMINE | PROPYLENE DIAMINE | TRIETHY- LENE TETRAMINE | MORPHO- LINE | MORPHO- LINE ETHANOL | MORPHOLINE ETHYL ETHER |
|---------------------|---------------------|----------------------|-------------------------------|-----------------|----------------------------|------------------------------|
| Water | M | M | M | M | M | M |
| Alcohol | M | M | M | M | M | M |
| Glycols | M | M | M | M | M | M |
| Glycol ethers | M | M | M | M | M | M |
| Acetone | M | M | M | M | M | M |
| Methyl butyl ketone | S | S | S | M | M | M |
| Ethyl ether | S | S | S | M | M | M |
| Butyl ether | SS | S | SS | M | M | M |
| Naphtha | S | S | SS | S | I | M |
| Benzene | M | M | S | M | M | M |
| Turpentine | I | I | I | M | M | M |
| Pine oil | M | M | M | M | M | M |
| Paraffin oil | I | I | I | I | I | M |
| Castor oil | M | M | M | M | M | M |
| Linseed oil | I | I | I | M | S | M |
| Paraffin wax | SH | SH | SH | SH | SH | SS |
| Beeswax | I | I | SH | I | I | SS |
| Shellac | S | S | S | S | S | S |
| Rosin | S | S | S | S | SS | S |
| Ester gum | SS | SS | SS | S | S | S |
| Dammar gum | I | I | I | PS | PS | S |
| Copal gum | S | S | S | S | S | S |
| Sulfur | VS | VS | S | SS | SS | SS |
| Vinylite A | G | G | G | S | G | SS |
| Vinylite N | S | S | S | S | S | S |
| Vinylite 0200 | G | G | G | S | G | S |
| Cellulose acetate | G | G | G | S | S | I |
| Cellulose nitrate | S | S | S | S | S | S |
| Benzyl cellulose | SS | SS | SS | S | S | S |
| Water-sol. dye | S | S | S | SS | I | I |
| Alcohol-sol. dye | S | S | S | S | S | S |
| Oil-sol. dye | S | S | S | S | S | S |
| Satd. brine | M | M | M | M | M | S |

M = miscible in all proportions

S = sol. to over 5%

SS = sol. from 1 to 5%

PS = sol. in part

I = sol. to less than 1%

SH = sol. hot

VS = very sol.

G = gels.

Table 14.48: Vapor Pressures of Alkylene Diamines and Other Amines (19)

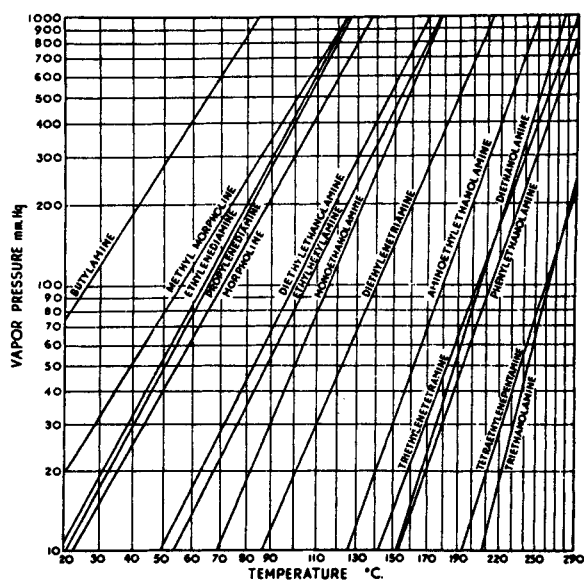


Table 14.49: Density of Ethylenediamine Solutions (23)

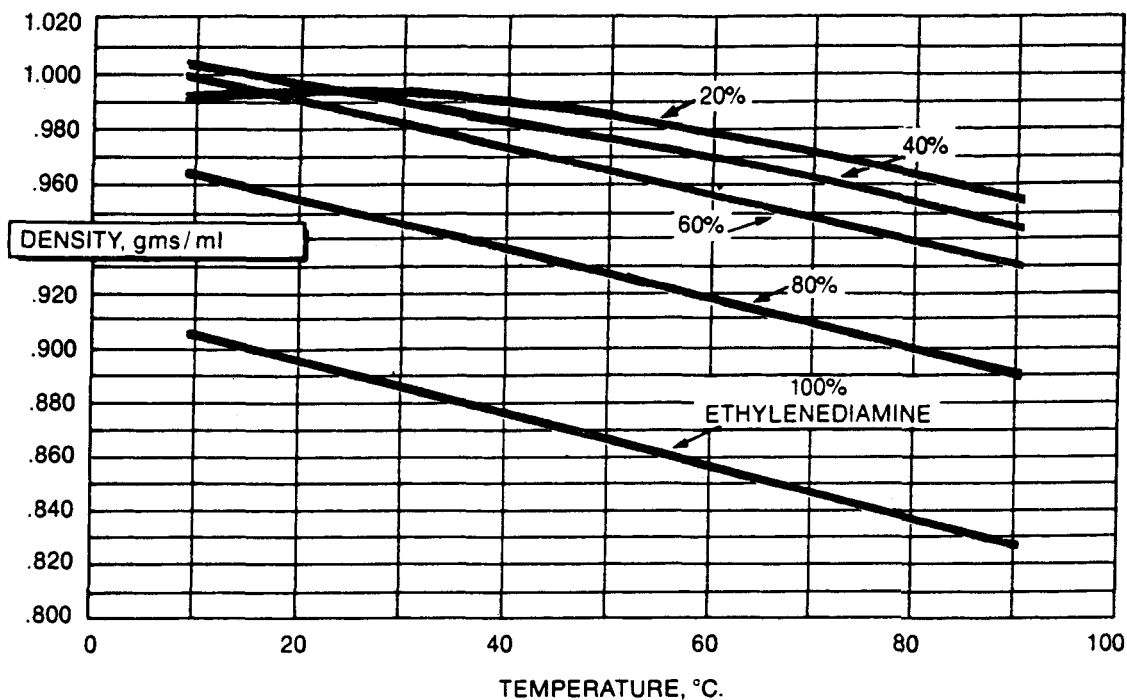


Table 14.50: Density of Higher Ethylene Amines (23)

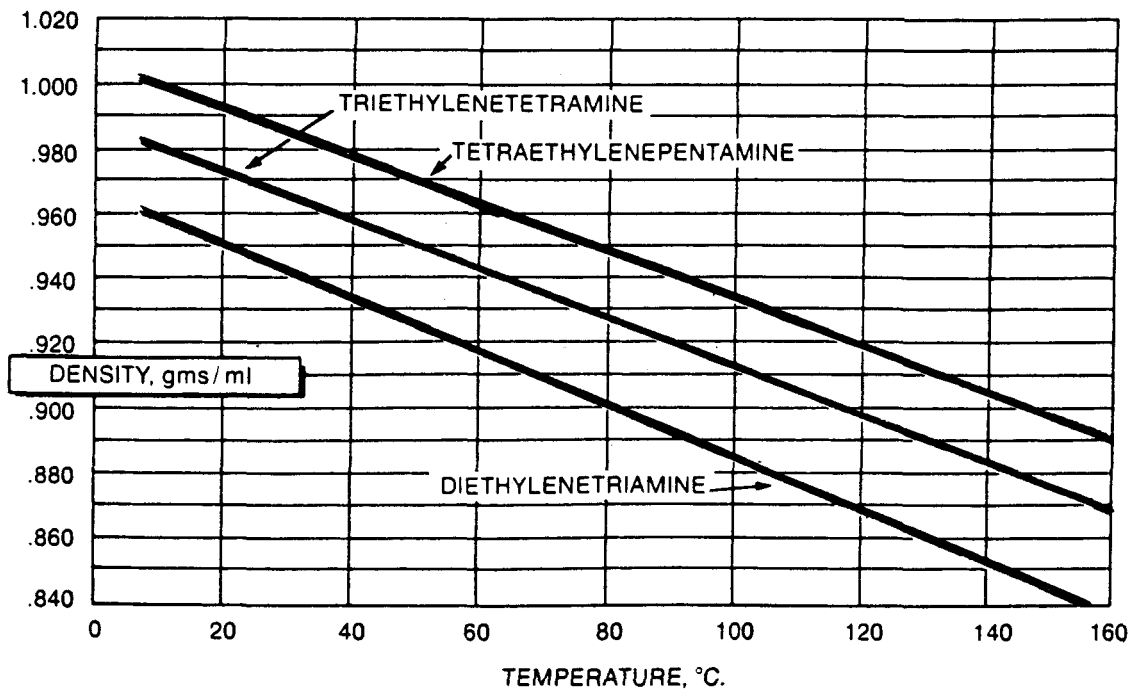


Table 14.51: Viscosity of Ethylenediamine Solutions (23)


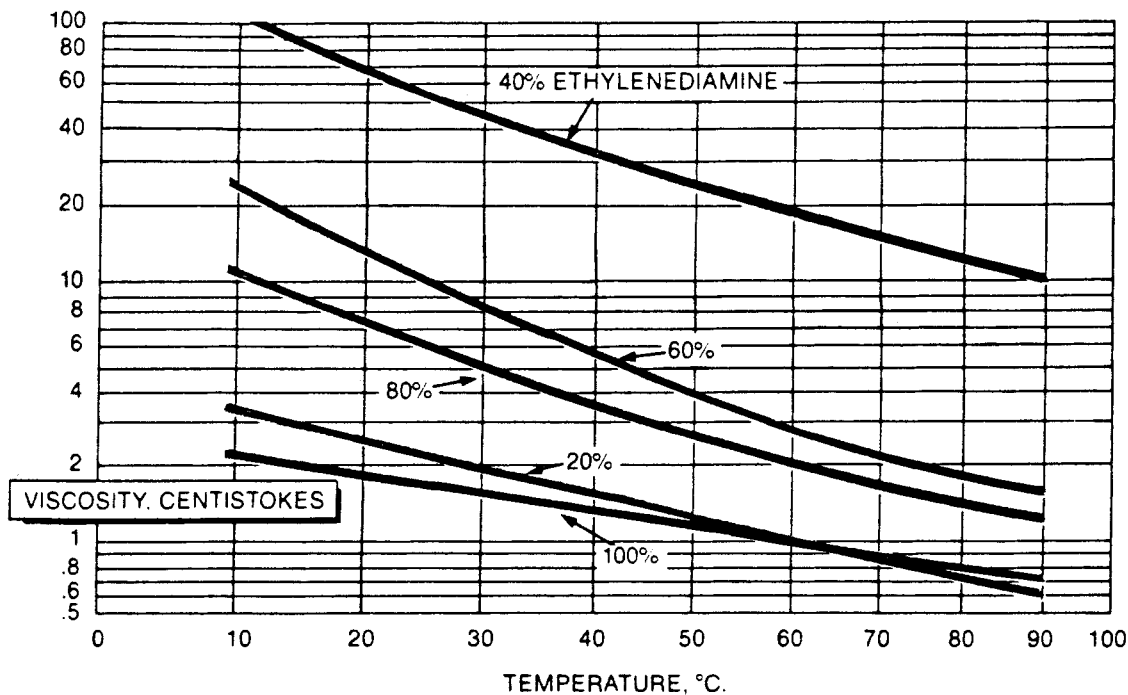


Table 14.52: Viscosity of Higher Ethylene Amines (23)

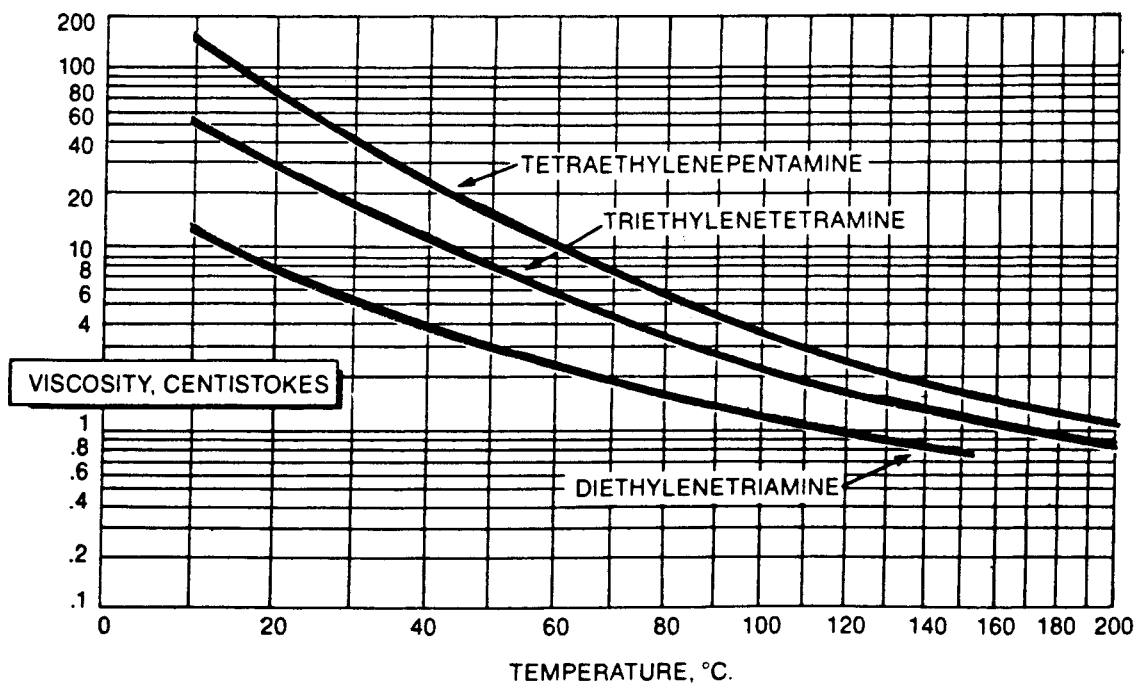

COMPARATIVE DATA

Table 14.53: Akzo ARMEEN, DUOMEEN, TRIAMEEN, ETHOMEEN, Ethoxylated Diamines, Propoxylated Amines (59)

Armeen Primary Amines

| SPECIFICATIONS | | | | | | | TYPICAL PROPERTIES | | | | |
|----------------------|-------------------------------|-------------|------------------|--------------|---------------|------------|---------------------|-------------------|------------------|--------------|--------------|
| Registered Tradename | Common Name* | TSCA Number | Primary Amine, % | Amine Number | Gardner Color | Moisture % | Equivalent Weight** | Melting Point, °C | Primary Amine, % | Amine Number | Iodine Value |
| | | | Min. | Min. | Max. | Max. | | | | | |
| Armeen 12D | Dodecylamine | 124-22-1 | 98 | 297 | 1 | 0.5 | 186 | 24 | 99.5 | 303 | 0.5 |
| Armeen 16D | Hexadecylamine | 143-27-1 | 98 | 228 | 1 | 0.5 | 243 | 48 | 99 | 231 | 1 |
| Armeen 18D | Octadecylamine | 124-30-1 | 98 | 204 | 1 | 0.5 | 270 | 55 | 99 | 208 | 2 |
| Armeen O | Oleylamine | 112-90-3 | 97 | 205 | 3 | 0.5 | 266 | 24 | 98 | 211 | 89 |
| Armeen OD | Oleylamine | 112-90-3 | 98 | 207 | 1 | 0.5 | 265 | 23 | 99 | 212 | 89 |
| Armeen OL | Oleylamine | 112-90-3 | 95 | 202 | 4 | 0.5 | 273 | 20 | 97 | 206 | 89 |
| Armeen OLD | Oleylamine | 112-90-3 | 98 | 207 | 1 | 0.5 | 265 | 21 | 100 | 212 | 89 |
| Armeen C | Cocoalkylamine | 61788-46-3 | 97 | 272 | 3 | 0.5 | 204 | 16 | 98 | 275 | 9 |
| Armeen CD | Cocoalkylamine | 61788-46-3 | 98 | 275 | 1 | 0.5 | 200 | 16 | 100 | 281 | 9 |
| Armeen S | Soyaalkylamine | 61790-18-9 | 97 | 206 | 4 | 0.5 | 273 | 29 | 97 | 206 | 92 |
| Armeen SD | Soyaalkylamine | 61790-18-9 | 98 | 208 | 2 | 0.5 | 264 | 29 | 100 | 213 | 92 |
| Armeen T | Tallowalkylamine | 61790-33-8 | 97 | 208 | 3 | 0.5 | 267 | 40 | 98 | 210 | 46 |
| Armeen TD | Tallowalkylamine | 61790-33-8 | 98 | 210 | 1 | 0.5 | 262 | 40 | 100 | 214 | 46 |
| Armeen HT | Hydrogenated tallowalkylamine | 61788-45-2 | 97 | 207 | 3 | 0.5 | 271 | 55 | 98 | 207 | 3 |
| Armeen HTD | Hydrogenated tallowalkylamine | 61788-45-2 | 98 | 209 | 1 | 0.5 | 263 | 55 | 100 | 213 | 3 |

Armeen Secondary Amines

| SPECIFICATIONS*** | | | | | | | TYPICAL PROPERTIES | | | | |
|----------------------|---------------------------------|-------------|-----------------------------|--------------|---------------|------------|---------------------|-------------------|--------------------|--------------|--------------|
| Registered Tradename | Common Name* | TSCA Number | Apparent Secondary Amine, % | Amine Number | Gardner Color | Moisture % | Equivalent Weight** | Melting Point, °C | Secondary Amine, % | Amine Number | Iodine Value |
| | | | Min. | Min. | Max. | | | | | | |
| Armeen 2C | Dicocoalkylamine | 61789-76-2 | 93 | 140 | 2 | | 401 | 43 | 92 | 140 | 8 |
| Armeen 2T | Ditallowalkylamine | 68783-24-4 | 93 | 110 | 2 | | 507 | 55 | 94 | 111 | 33 |
| Armeen 2HT | Dihydrogenated tallowalkylamine | 61789-79-5 | 93 | 110 | 2 | | 510 | 62 | 91 | 110 | 3 |
| Armeen 2-18 | Diocetadecylamine | 112-99-2 | 93 | 107 | 2 | | 518 | 80 | 89 | 108 | 1 |

*Common name may be different from the name listed by TSCA.
 **Equivalent Weight = 56,110/Amine Number
 ***D = Distilled
 ****All secondary amines meet moisture specifications of 0.5% max.

(continued)

Table 14.53: (continued)

Armeen Tertiary Amines

Armeen Monoalkyl Amines

| SPECIFICATIONS ** | | | | | TYPICAL PROPERTIES | | | | |
|----------------------|----------------------------------------|-------------|-------------------|--------------|--------------------|-------------------|-------------------|--------------|-------------------|
| Registered Tradename | Common Name *** | TSCA Number | Tertiary Amine, % | Amine Number | Gardne Color | Equivalent Weight | Melting Point, °C | Amine Number | Tertiary Amine, % |
| | | | Min. | Min. | Max. | | | | |
| | <i>Monoalkyl-dimethylamines:</i> | | | | | | | | |
| Armeen DM12D *** | Dodecyl-dimethylamine | 112-18-5 | 95 | 250 | 1 | 218 | -15 | 258 | 98 |
| Armeen DM16D | Hexadecyl-dimethylamine | 112-69-6 | 95 | 198 | 1 | 276 | 8 | 203 | 98 |
| Armeen DM18D | Octadecyl-dimethylamine | 124-28-7 | 95 | 180 | 1 | 303 | 20 | 185 | 98 |
| Armeen DMOD | Oleyl-dimethylamine | 28061-69-0 | 95 | 183 | 1 | 295 | -10 | 190 | 98 |
| Armeen DMCD | Cocoalkyl-dimethylamine | 61788-93-0 | 95 | 234 | 1 | 236 | -22 | 239 | 98 |
| Armeen DMSD | Soyaalkyl-dimethylamine | 61788-91-8 | 95 | 183 | 2 | 297 | -10 | 189 | 98 |
| Armeen DMTD | Tallowalkyl-dimethylamine | 68814-69-7 | 95 | 184 | 1 | 291 | 5 | 193 | 98 |
| Armeen DMHTD | Hydrogenated tallowalkyl-dimethylamine | 61788-95-2 | 95 | 184 | 2 | 292 | 18 | 192 | 98 |

Armeen Dialkyl Amines

| SPECIFICATIONS ** | | | | | TYPICAL PROPERTIES | | | | |
|----------------------|----------------------------------------|-------------|-------------------|--------------|--------------------|-------------------|-------------------|--------------|-------------------|
| Registered Tradename | Common Name *** | TSCA Number | Tertiary Amine, % | Amine Number | Gardne Color | Equivalent Weight | Melting Point, °C | Amine Number | Tertiary Amine, % |
| | | | Min. | Min. | Max. | | | | |
| | <i>Dialkyl-methylamines:</i> | | | | | | | | |
| Armeen M2C | Dicocoalkyl-methylamine | 61788-62-3 | 97 | 137 | 2 | 395 | -2 | 142 | 99 |
| Armeen M2HT | Dihydrogenated tallowalkyl-methylamine | 61788-63-4 | 97 | 105 | 1 | 524 | 38 | 107 | 99 |

Armeen Trialkyl Amines

| SPECIFICATIONS ** | | | | | TYPICAL PROPERTIES | | | | |
|----------------------|------------------------|-------------|-------------------|--------------|--------------------|-------------------|-------------------|--------------|-------------------|
| Registered Tradename | Common Name *** | TSCA Number | Tertiary Amine, % | Amine Number | Gardne Color | Equivalent Weight | Melting Point, °C | Amine Number | Tertiary Amine, % |
| | | | Min. | Min. | Max. | | | | |
| | <i>Trialkylamines:</i> | | | | | | | | |
| Armeen 3-12 | Tridodecylamine | 102-87-4 | 95 | 102 | 1 | 540 | -9 | 104 | 96 |
| Armeen 3-16 | Trihexadecylamine | 67701-00-2 | 98 | 82 | 3 | 668 | 38 | 84 | 99 |

(continued)

Table 14.53: (continued)

Polyamines

Duomeen Diamines

| SPECIFICATIONS | | | | | | | TYPICAL PROPERTIES | | |
|----------------------|-----------------------------------------------|-------------|--------------|---------------|--------------|------------|--------------------|--------------------|--------------|
| Registered Tradename | Common Name* | TSCA Number | Amine Number | Gardner Color | Iodine Value | Moisture % | Equivalent Weight | Appearance @ 25 °C | Amine Number |
| | | | Min. | Max. | Min. | Max. | | | |
| Duomeen C | N-coco-1,3-diaminopropane | 61791-63-7 | 410 | 5 | – | 1.0 | 133 | Liquid | 422 |
| Duomeen CD | N-coco-1,3-diaminopropane | 61791-63-7 | 410 | 3 | – | 1.0 | 130 | Liquid | 432 |
| Duomeen T | N-tallow-1,3-diaminopropane | 61791-55-7 | 334 | 5 | 30 | 1.0 | 161 | Paste | 348 |
| Duomeen TTM | N,N,N'-trimethyl-N'-tallow-1,3-diaminopropane | 68783-25-5 | 271 | 8 | – | 1.0 | 199 | Liquid | 282 |
| Duomeen OL | N-oleyl-1,3-diaminopropane | 7173-62-8 | 520 | 10 | 70 | 1.0 | 163 | Liquid | 344 |
| Duomeen LT-4 | 3-tallowalkyl-1,3-hexahydropyrimidine | EPA Listed | 267 | 8 | – | 0.5 | 200 | Liquid | 281 |
| Duomeen S | N-Soyaalkyl trimethylenediamines | 61791-67-1 | 512 | 12 | 60 | 1.0 | 160 | Soft Paste | 350 |

Higher Amines

| SPECIFICATIONS | | | | | | | TYPICAL PROPERTIES | | |
|----------------------|--------------------------------------|-------------|--------------|---------------|--------------|------------|--------------------|---------------|--------------|
| Registered Tradename | Common Name* | TSCA Number | Amine Number | Gardner Color | Iodine Value | Moisture % | Equivalent Weight | Melting Point | Amine Number |
| | | | Min. | Max. | Min. | Max. | | | |
| Triameen T | N-tallowalkyl dipropylene triamine | 61791-57-9 | 415 | 8 | – | 0.5 | 133 | 34 | 422 |
| Tetrameen T | N-tallowalkyl tripropylene tetramine | 68911-79-5 | 475 | 6 | 25-35 | 0.5 | 114 | 37 | 492 |

*Common name may be different from the name listed by TSCA.

Ethomeen Ethoxylated Amines

| SPECIFICATIONS* * | | | | | | | TYPICAL PROPERTIES | |
|----------------------|---------------------------------|-------------|-------------------|------|---------------|---------------------------------|--------------------|--------------------|
| Registered Tradename | Common Name*** | TSCA Number | Equivalent Weight | | Gardner Color | Primary plus Secondary Amine, % | Amine Number | Appearance @ 25 °C |
| | | | Min. | Max. | | | | |
| Ethomeen C/12 | Ethoxylated (2) cocoalkylamine | 61791-31-9 | 280 | 300 | 6 | 3 | 193 | Liquid |
| Ethomeen C/15 | Ethoxylated (5) cocoalkylamine | 61791-14-8 | 410 | 435 | 7 | 2 | 133 | Liquid |
| Ethomeen C/20 | Ethoxylated (10) cocoalkylamine | 61791-14-B | 620 | 660 | 10 | 1 | 88 | Liquid |
| Ethomeen C/25 | Ethoxylated (15) cocoalkylamine | 61791-14-8 | 830 | 890 | 10 | 1 | 65 | Liquid |
| Ethomeen O/12 | Ethoxylated (2) oleylamine | 15127-82-7 | 343 | 363 | 8 | 3 | 160 | Liquid |

(continued)

Table 14.53: (continued)

| SPECIFICATIONS** | | | | | | | TYPICAL PROPERTIES | |
|----------------------|-----------------------------------|-------------|-------------------|------|--------------------|---------------------------------|--------------------|--------------------|
| Registered Tradename | Common Name*** | TSCA Number | Equivalent Weight | | Gardner Color Max. | Primary plus Secondary Amine, % | Amine Number | Appearance @ 25 °C |
| | | | Min. | Max. | | | | |
| Ethomeen O/15 | Ethoxylated (5) oleylamine | 58253-49-9 | 470 | 495 | 8 | 2 | 116 | Liquid |
| Ethomeen T/12 | Ethoxylated (2) tallowalkylamine | 61791-44-4 | 340 | 360 | 6 | 3 | 160 | Paste |
| Ethomeen T/15 | Ethoxylated (5) tallowalkylamine | 61791-26-2 | 470 | 495 | 7 | 2 | 116 | Liquid to Paste |
| Ethomeen T/25 | Ethoxylated (15) tallowalkylamine | 61791-26-2 | 890 | 950 | 8 | 1 | 61 | Liquid to Paste |
| Ethomeen S/12 | Ethoxylated (2) soyaalkylamine | 61791-24-0 | 342 | 362 | 10 | 3 | 159 | Liquid |
| Ethomeen S/15 | Ethoxylated (5) soyaalkylamine | 61791-24-0 | 470 | 495 | 10 | 2 | 116 | Liquid |
| Ethomeen S/20 | Ethoxylated (10) soyaalkylamine | 61791-24-0 | 685 | 725 | 10 | 1 | 80 | Liquid |
| Ethomeen S/25 | Ethoxylated (15) soyaalkylamine | 61791-24-0 | 895 | 955 | 10 | 1 | 61 | Liquid |
| Ethomeen 18/12 | Ethoxylated (2) octadecylamine | 10213-78-2 | 350 | 370 | 7 | 3 | 156 | Solid |
| Ethomeen 18/15 | Ethoxylated (5) octadecylamine | 26635-92-7 | 480 | 505 | 8 | 2 | 114 | Solid |
| Ethomeen 18/20 | Ethoxylated (10) octadecylamine | 26635-92-7 | 690 | 730 | 8 | 1 | 79 | Liquid to Paste |
| Ethomeen 18/25 | Ethoxylated (15) octadecylamine | 26635-92-7 | 900 | 960 | 8 | 1 | 60 | Liquid to Paste |
| Ethomeen 18/60 | Ethoxylated (50) octadecylamine | 26635-92-7 | 2370 | 2570 | 10 | 0.5 | 23 | Paste to Solid |

Ethoduomeen Ethoxylated Diamines

| SPECIFICATIONS | | | | | | TYPICAL PROPERTIES | |
|----------------------|----------------------------------------------|-------------|-------------------|------|---------------------------------|--------------------|--------------------|
| Registered Tradename | Common Name*** | TSCA Number | Equivalent Weight | | Primary plus Secondary Amine, % | Equivalent Weight | Appearance @ 25 °C |
| | | | Min. | Max. | | | |
| Ethoduomeen T/13 | Ethoxylated (3) N-tallow-1,3-diaminopropane | 61790-85-0 | 220 | 250 | 2 | 239 | Liquid |
| Ethoduomeen T/20 | Ethoxylated (10) N-tallow-1,3-diaminopropane | 61790-85-0 | 375 | 405 | 2 | 144 | Liquid |
| Ethoduomeen T/25 | Ethoxylated (15) N-tallow-1,3-diaminopropane | 61790-85-0 | 485 | 515 | 2 | 112 | Liquid |

Propomeen Proxylated Amines

| SPECIFICATIONS* | | | | | | | TYPICAL PROPERTIES | |
|----------------------|----------------------------------------|-------------|-------------------|------|--------------------|-------------------|--------------------|--------------------|
| Registered Tradename | CAS Name | TSCA Number | Equivalent Weight | | Gardner Color Max. | Tertiary Amine, % | Amine Number | Appearance @ 25 °C |
| | | | Min. | Max. | | | | |
| Propomeen C/12 | N-cocoalkyl-1,1'-iminobis-2-propanol | 68516-06-3 | 308 | 318 | 5 | 95 | 179 | Hazy Liquid |
| Propomeen O/12 | N-oleyl-1,1'-iminobis-2-propanol | 65086-71-7 | 371 | 391 | 6 | 97 | 147 | Clear Liquid |
| Propomeen T/12 | N-tallowalkyl-1,1'-iminobis-2-propanol | 68951-72-4 | 375 | 385 | 5 | 95 | 148 | Clear Liquid |

(continued)

Table 14.53: (continued)

ARMEEN Aliphatic Amines

| TRADE NAME | CTFA ADOPTED NAME | FORM | CONC (%) (APPROX.) |
|--------------|------------------------------------|--------|--------------------|
| Armeen CD | Cocamine | Liquid | 98 |
| Armeen 2C | Dicocamine | Solid | 90 |
| Armeen DMCD | Dimethyl Cocamine | Liquid | 95 |
| Armeen DMMCD | Dimethyl Cocamine | Liquid | 95 |
| Armeen 12D | Lauramine | Liquid | 95 |
| Armeen DM12D | Dimethyl Lauramine | Liquid | 95 |
| Armeen 16D | Palmitamine | Solid | 98 |
| Armeen DM16D | Dimethyl Palmitamine | Liquid | 95 |
| Armeen 18D | Stearamine | Solid | 90 |
| Armeen DM18D | Dimethyl Stearamine | Liquid | 95 |
| Armeen SD | Soyamine | Paste | 98 |
| Armeen DMSD | Dimethyl Soyamine | Liquid | 95 |
| Armeen TD | Tallow Amine | Solid | 98 |
| Armeen HTD | Hydrogenated Tallow Amine | Solid | 98 |
| Armeen DMHTD | Dimethyl Hydrogenated Tallow Amine | Liquid | 95 |
| Armeen 2HT | Hydrogenated Ditalow Amine | Solid | 92 |
| Armeen OD | Oleamine | Paste | 98 |

ETHOMEEN Ethoxylated Aliphatic Amines

| TRADE NAME | CTFA ADOPTED NAME | FORM | CONC (%) (APPROX.) |
|----------------|-----------------------|-----------------|--------------------|
| Ethomeen C/12 | PEG - 2 Cocamine | Liquid | 99 |
| Ethomeen C/15 | PEG - 5 Cocamine | Liquid | 99 |
| Ethomeen C/20 | PEG - 10 Cocamine | Liquid | 99 |
| Ethomeen C/25 | PEG - 15 Cocamine | Liquid | 99 |
| Ethomeen 18/12 | PEG - 2 Stearamine | Solid | 99 |
| Ethomeen 18/15 | PEG - 5 Stearamine | Solid | 99 |
| Ethomeen 18/20 | PEG - 10 Stearamine | Liquid to Paste | 99 |
| Ethomeen 18/25 | PEG - 15 Stearamine | Liquid to Paste | 99 |
| Ethomeen 18/60 | PEG - 50 Stearamine | Paste to Solid | 99 |
| Ethomeen O/12 | PEG - 2 Oleamine | Liquid | 99 |
| Ethomeen O/15 | PEG - 5 Oleamine | Liquid | 99 |
| Ethomeen O/25 | PEG - 15 Oleamine | Liquid | 99 |
| Ethomeen S/12 | PEG - 2 Soyamine | Viscous Liquid | 99 |
| Ethomeen S/15 | PEG - 5 Soyamine | Liquid | 99 |
| Ethomeen S/20 | PEG - 10 Soyamine | Liquid | 99 |
| Ethomeen S/25 | PEG - 15 Soyamine | Liquid | 99 |
| Ethomeen T/12 | PEG - 2 Tallow Amine | Paste | 99 |
| Ethomeen T/15 | PEG - 5 Tallow Amine | Liquid to Paste | 99 |
| Ethomeen T/25 | PEG - 15 Tallow Amine | Liquid to Paste | 99 |

(continued)

Table 14.53: (continued)

Solubilities of Normal Saturated Primary Fatty Amines in Various Solvents

All temperatures are in degrees Centigrade.

Solubilities are in g/amine per 100 g/solvent.

| Benzene | | | | | |
|-------------------------------|------|------|-----|-----|------|
| No. of Carbon Atoms in Amines | 10° | 20° | 30° | 40° | 50° |
| 10 | 395 | ∞ | ∞ | ∞ | ∞ |
| 12 | 72 | 277 | ∞ | ∞ | ∞ |
| 14 | 26.4 | 83 | 302 | ∞ | ∞ |
| 16 | 10.0 | 30.7 | 98 | 388 | ∞ |
| 18 | 4.2 | 14.8 | 52 | 173 | 1000 |

| Cyclohexane | | | | | |
|-------------|------|------|------|-----|-----|
| | 10° | 20° | 30° | 40° | 50° |
| 10 | 318 | ∞ | ∞ | ∞ | ∞ |
| 12 | 57 | 230 | ∞ | ∞ | ∞ |
| 14 | 19.9 | 68 | 268 | ∞ | ∞ |
| 16 | 7.4 | 26.6 | 86 | 360 | ∞ |
| 18 | 2.8 | 13.2 | 42.9 | 144 | 940 |

| Tetrachloromethane | | | | | | |
|--------------------|--------|------|-------|-------|-------|-------|
| | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 10.5 | 57 | ∞ | ∞ | ∞ | ∞ |
| 12 | 5.5 | 19.8 | 148 | ∞ | ∞ | ∞ |
| 14 | 2.3 | 7.7 | 56 | 235 | ∞ | ∞ |
| 16 | 0.5 | 3.2 | 21.2 | 73 | 335 | ∞ |
| 18 | <0.1 | 0.6 | 7.7 | 27.9 | 120 | 835 |

| Trichloromethane | | | | | | | |
|------------------|--------|--------|------|-------|-------|-------|-------|
| | -40.0° | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 17.7 | 43.0 | 148 | ∞ | ∞ | ∞ | ∞ |
| 12 | 9.2 | 20.0 | 56 | 315 | ∞ | ∞ | ∞ |
| 14 | 4.5 | 11.2 | 29.5 | 110 | 308 | ∞ | ∞ |
| 16 | 2.4 | 6.6 | 17.0 | 56 | 117 | 378 | ∞ |
| 18 | 1.2 | 3.3 | 9.4 | 31.9 | 63 | 149 | 845 |

| Ethyl Ether | | | | | | |
|-------------|--------|--------|------|-------|-------|-------|
| | -40.0° | -20.0° | 0.0° | 20.0° | 30.0° | 34.5° |
| 10 | 1.4 | 12.1 | 86 | ∞ | ∞ | ∞ |
| 12 | 0.2 | 3.4 | 22.6 | 275 | ∞ | ∞ |
| 14 | | 0.2 | 5.8 | 71 | 273 | 705 |
| 16 | | | 0.2 | 18.5 | 72 | 135 |
| 18 | | | | 4.4 | 22.7 | 46.8 |

| Ethyl Acetate | | | | | | |
|---------------|--------|------|-------|-------|-------|-------|
| | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 14.8 | 69 | ∞ | ∞ | ∞ | ∞ |
| 12 | 4.7 | 18.6 | 211 | ∞ | ∞ | ∞ |
| 14 | 1.7 | 7.8 | 57 | 233 | ∞ | ∞ |
| 16 | 0.3 | 3.2 | 19.7 | 63 | 295 | ∞ |
| 18 | | 0.9 | 9.5 | 27.0 | 100 | 845 |

| Butyl Acetate | | | | | | |
|---------------|--------|------|-------|-------|-------|-------|
| | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 13.3 | 69 | ∞ | ∞ | ∞ | ∞ |
| 12 | 4.4 | 23.0 | 221 | ∞ | ∞ | ∞ |
| 14 | 1.4 | 9.7 | 62 | 233 | ∞ | ∞ |
| 16 | 0.2 | 3.5 | 23.9 | 64 | 295 | ∞ |
| 18 | | 1.0 | 11.4 | 30.4 | 100 | 845 |

| Acetone | | | | | | |
|-------------------------------|--------|------|-------|-------|-------|-------|
| No. of Carbon Atoms in Amines | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 6.6 | 54 | ∞ | ∞ | ∞ | ∞ |
| 12 | 0.3 | 8.1 | 266 | ∞ | ∞ | ∞ |
| 14 | | 0.1 | 15.5 | 228 | ∞ | ∞ |
| 16 | | | <0.1 | 4.7 | 445 | ∞ |
| 18 | | | | <0.1 | 3.7 | 17.0 |

| 2-Butanone | | | | | | |
|------------|--------|------|-------|-------|-------|-------|
| | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 10.0 | 65 | ∞ | ∞ | ∞ | ∞ |
| 12 | 3.6 | 18.6 | 290 | ∞ | ∞ | ∞ |
| 14 | 0.2 | 2.8 | 48 | 285 | ∞ | ∞ |
| 16 | | | 8.3 | 48 | 580 | ∞ |
| 18 | | | 0.2 | 6.3 | 85 | 1975 |

| Methanol | | | | | | | |
|----------|--------|--------|------|-------|-------|-------|-------|
| | -40.0° | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 31.0 | 172 | 550 | ∞ | ∞ | ∞ | ∞ |
| 12 | 4.8 | 29.7 | 196 | 930 | ∞ | ∞ | ∞ |
| 14 | =0.2 | 2.8 | 62 | 292 | 770 | ∞ | ∞ |
| 16 | | 0.2 | 6.1 | 116 | 256 | 785 | ∞ |
| 18 | | | 0.6 | 15.6 | 95 | 256 | 1440 |

| Ethanol | | | | | | | |
|---------|--------|--------|------|-------|-------|-------|-------|
| | -40.0° | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 8.5 | 91 | 350 | ∞ | ∞ | ∞ | ∞ |
| 12 | 2.0 | 14.1 | 115 | 660 | ∞ | ∞ | ∞ |
| 14 | | 1.5 | 30.2 | 218 | 660 | ∞ | ∞ |
| 16 | | | 3.0 | 83 | 239 | 770 | ∞ |
| 18 | | | 0.1 | 7.2 | 75 | 280 | 1630 |


| Isopropanol | | | | | | | |
|-------------|--------|--------|------|-------|-------|-------|-------|
| | -40.0° | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 11.1 | 49.0 | 228 | ∞ | ∞ | ∞ | ∞ |
| 12 | 4.7 | 15.0 | 75 | 492 | ∞ | ∞ | ∞ |
| 14 | 0.6 | 3.7 | 25.1 | 154 | 458 | ∞ | ∞ |
| 16 | | 0.4 | 7.3 | 68 | 169 | 580 | ∞ |
| 18 | | | 0.5 | 30.0 | 86 | 228 | 1330 |

| n-Butanol | | | | | | | |
|-----------|--------|--------|------|-------|-------|-------|-------|
| | -40.0° | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 9.5 | 30.8 | 182 | ∞ | ∞ | ∞ | ∞ |
| 12 | 2.4 | 8.5 | 57 | 430 | ∞ | ∞ | ∞ |
| 14 | 0.2 | 2.4 | 16.5 | 130 | 405 | ∞ | ∞ |
| 16 | | <0.1 | 3.9 | 55 | 148 | 515 | ∞ |
| 18 | | | 0.4 | 22.7 | 75 | 208 | 1240 |

| Acetonitrile | | | | | | |
|--------------|--------|------|-------|-------|-------|-------|
| | -20.0° | 0.0° | 20.0° | 30.0° | 40.0° | 50.0° |
| 10 | 2.8 | 12.7 | ∞ | ∞ | ∞ | ∞ |
| 12 | | 0.2 | 27.7 | ∞ | ∞ | ∞ |
| 14 | | | 1.8 | 14.9 | ∞ | ∞ |
| 16 | | | 0.2 | 1.3 | 14.8 | ∞ |
| 18 | | | | 0.3 | 1.9 | 10.5 |

(continued)

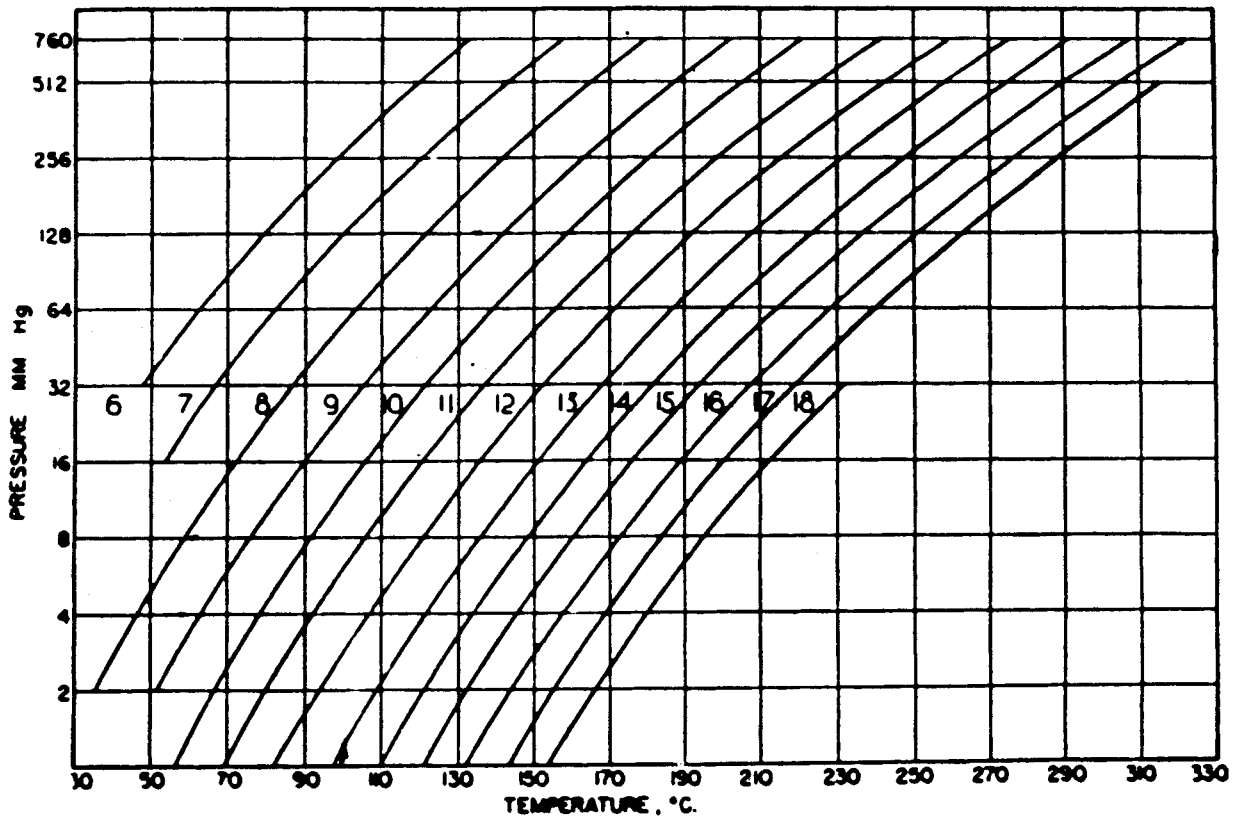Table 14.53: (continued)



Vapor Pressure Curves of Normal Saturated Primary Amines

Approximate Alkyl Percent Distribution for Fine Amine Chemicals*

| Alkyl Groups | 10 | 12 | 16 | 18 | O | OL | C | S | T | HT |
|--------------------|--------|----------|------------|------------|--------|--------|------|------|--------|---------------------|
| Alkyl Composition | decyl- | dodecyl- | hexadecyl- | octadecyl- | oleyl- | oleyl- | coco | soya | tallow | hydrogenated tallow |
| Saturated | | | | | | | | | | |
| C8 | 4 | | | | | | 6 | | | |
| C10 | 90 | 1 | | | | | 7 | | | |
| C12 | 6 | 95 | | | 0.5 | 0.5 | 51 | 0.5 | | |
| C14 | | 3 | | | 1.5 | 1.5 | 19 | 1.0 | 3 | 3.5 |
| C15 | | | 0.5 | | | | | | 0.5 | 0.5 |
| C16 | | 1 | 91 | 9 | 4 | 4 | 9 | 16.0 | 29 | 31 |
| C17 | | | 1.5 | 2 | 0.5 | 0.5 | | | 1 | 1 |
| C18 | | | 7 | 87 | 14 | 8 | 2 | 15.0 | 20 | 61 |
| Unsaturated | | | | | | | | | | |
| C14' | | | | | 0.5 | 0.5 | | | 0.5 | |
| C16' | | | | | 4 | 4 | | 1.0 | 2 | |
| C18' | | | | 2 | 70 | 74 | 6 | 49.5 | 44 | 3 |
| C18'' | | | | | 5 | 7 | | 13 | | |

* Composition is that of base acids from which amines were derived.

The chemical name in each table indicates the major alkyl group or the source of each alkyl mixture for every product.

The table gives additional information about the alkyl distribution of all products.

The tradename includes the source for each product; for example, Armeen 18 is octadecylamine.

The alkyl group in Armeen Z is derived from cocamine.

Table 14.54: ANGUS Amines (34)

Amine CS-1135^e

| | |
|----------------------------|----------------------------------------|
| Principal component | 78% by weight in water |
| Appearance | Colorless to pale yellow mobile liquid |
| Boiling point | 70–72°C at 100 torr |
| Neutral equivalent (calc.) | 120–126 |
| Density at 26°C | 0.942g/ml |
| pH of 0.1M soln. (20°C) | 11.0 |

Soluble at > 50% by wt. in water; ethyl alcohol; benzene; mineral spirits

Amine CS-1246[~]

| | |
|----------------------------|----------------------------------------|
| Principal component | 97.5% minimum |
| Appearance | Colorless to pale yellow mobile liquid |
| Boiling point | 73–75°C at 10 torr |
| Neutral equivalent (calc.) | 143 |
| Density at 26°C | 1.072g/ml |
| pH of 0.1M soln. (20°C) | 10.2 |

Soluble at > 50% by wt. in water; ethyl alcohol; benzene; mineral spirits

ZOLDINE[®] ZT-55

| | |
|-------------------------|----------------------------------------|
| Principal component | 55% solution in water |
| Appearance | Colorless to pale yellow mobile liquid |
| Melting point | 54.5°C (active component) |
| Neutral equivalent | 273–278 |
| Density at 25°C | 1.125g/ml |
| pH of 0.1M soln. (20°C) | 9.4 |

Active ingredient soluble at > 50% by wt. in water; ethyl alcohol; at 25 g/100 ml in benzene at 25°C; at 1.2 g/100 ml in mineral spirits¹ at 75°C.¹ when anhydrous**Typical Properties of AMINE CS-1135**

| | |
|------------------------------|-------------|
| Amine component | 78% by wt |
| Neutral equivalent as a base | 120-126 |
| Color, APHA | 100 (max) |
| Flash point, Tag closed cup | 120°F |
| Freezing point | below -20°C |
| Specific gravity at 25/25°C | 0.98-0.99 |
| Viscosity at 25°C | ~7.5 cp |
| pH | 10.5-11.5 |
| Weight per U.S. gallon | 8.2 lb |

Typical Physical Properties of CS-1246

| | |
|------------------------------------------------------------------------------|-------|
| Specific gravity, 30/20°C | 1.085 |
| Boiling point, °C at 15 mmHg | 71 |
| Freezing point, °C | 0 |
| Surface tension, dynes/cm at 25°C | 36.5 |
| pH | 8–9 |
| Soluble in water, ethanol, benzene, chlorinated hydrocarbons, and acetone | |
| Flash point, Tag closed cup, °F | 175 |

Specifications

| | |
|------------------------------|-----------|
| Purity, % by wt. | 97.5 min. |
| Total Oxazolidines, % by wt. | 99.5 min. |
| Color, APHA | 100 max. |
| Water, % by wt. | 0.5 max. |

Table 14.55: Ashland Amines (69)

| Product | Specific Gravity | Distillation °C | Amine % by wt Based on Total Alkalinity | Color Pt-Co Scale Max | Flash Point °F Open Cup | Freezing Point °C at 20°C | Lb. per Gal. at 20°C |
|----------------------|--------------------------|-------------------------|-----------------------------------------|-----------------------|-------------------------|---------------------------|----------------------|
| AMP-95 | 0.942 | | 95 | 28 | 172 | -2 | 7.85 (25°C) |
| Butyl Amine | 0.742-0.747 | 76.0-81.0 | 97.0 | 15 | 30 | -49 | 6.20 |
| Cyclohexylamine | 0.8645-0.8655 (25°/25°C) | Approx. 134.5 | 98 | 20 | 72 | -18 | 7.19 (25°C) |
| Dibutyl Amine | 0.760 | 155-163 | 98 | 15 | 124 | -62 | 6.32 |
| Diethanolamine | 1.090-1.094 | Approx 187 (50mm) | 98.5 | 15 | 280 | 28.0 | 9.14 |
| Diethyl Amine | 0.705-0.709 | 54.0-59.5 | 98.5 | 15 | <0 | -50 | 5.88 |
| Diethylene Triamine | 0.953-0.958 | 195-215 | 89.0-93.0 | 30 | 215 | -39 | 7.98 |
| Diethylethanolamine | 0.885 | 157-165 | 99.5 | 15 | 120(CC) | | |
| Diisopropyl Amine | 0.715-0.720 | Approx. 84.1 | 98.0 | 15 | 21 | -96 | 5.97 |
| Dimethylethanolamine | 0.888 | 130-135 | 99 | 20 | 103(CC) | -59 | |
| Isopropyl Amine | 0.686-0.690 | 30.5-34.0 (90 ml. min.) | 99.0 | 15 | <0 | -95 | 5.73 |
| Methyldiethanolamine | 1.04 | 242-260 | 99 | 250 | 259 | -22.5 | 8.68 |
| Monoethanolamine | 1.016-1.019 | 166.0-174.0 | | 15 | 200 | 10.3 | 8.47 |
| Morpholine | 1.001-1.004 | 126.0-130.0 | 99.0 | 10 | 102 | | 8.37 |
| Triethanolamine | 1.1220-1.1300 | Approx. 360 | 85.0 | 50 | 355 | 21.6 | 9.37 |
| Triethanolamine, 99% | 1.1240-1.1270 | | 99.0 | 50 | 375 | 21.6 | 9.37 |
| Triethyl Amine | 0.726-0.730 | 85.0-91.0 | 99.0 | 15 | 20 | -115 | 6.06 |

Table 14.56: Chemcentral Amines (67)

| AMINES | CAS | Mole Weight | % Purity Comm. Prod. | Specific Gravity 25/25°C | Lbs. Per Gal. @ 25°C | Coef. of Expan. Per °C | ΔSpec. Gravity Per °C | Refractive Index @ 25°C |
|--------------------------|---------------|-------------|----------------------|--------------------------|----------------------|------------------------|-----------------------|-------------------------|
| AMP-95 ^c | 124-68-5 | | | 0.942 | 7.85 | .00096 | | |
| AMP REGULAR ^c | 124-68-5 | | | 0.928 ^d | 7.78 ^d | .00095 | | 1.449 |
| DIETHANOLAMINE (DEA) | 111-42-2 | 105.3 | 98.0 | 1.088 30/4°C | 9.09 @ 30°C | .00060 | .00040 | 1.475 @ 30°C |
| DIISOPROPANOLAMINE | 110-97-4 | 133.0 | | 0.992 40/4°C | 8.28 @ 40°C | | | 1.4595 @ 30°C |
| DI-TRI ISOPROPANOLAMINE | | 139.5 | | 1.008 20/4°C | 8.37 | .00070 | .00034 | 1.4601 |
| MONOETHANOLAMINE (MEA) | 141-43-5 | 61.4 | 97.5 Min. | 1.015 | 8.45 | .00079 | .00058 | 1.4525 |
| MONOISOPROPANOLAMINE | 78-96-6 | 75.2 | 97 | 0.960 | 7.99 | .00086 | .00060 | 1.4456 |
| MORPHOLINE | 110-91-8 | 87.1 | 99 | 0.999 | 8.32 | .00096 | .00072 | 1.4545 @ 20°C |
| TRIETHANOLAMINE (TEA) | 102-71-6 | 149.2 | 85 | 1.121 | 9.33 | .00053 | .00036 | 1.4836 |
| TRIETHANOLAMINE 99% | 102-71-6 | 149.2 | 99 | 1.124 | 9.35 | | | |
| TRISOPROPANOLAMINE | 122-20-3 | 191.0 | | 1.010 40°C | 8.44 @ 40°C | | | |
| ETHYLENEDIAMINE | EDA 107-15-3 | 60.1 | 99 | 0.901 | 7.45 | | | 1.455 |
| DIETHYLENTRIAMINE | ETA 111-40-0 | 103.2 | 99 | 0.949 | 7.89 | | | 1.483 |
| TRIETHYLENETETRAMINE | TETA 112-24-3 | 146.2 | | 0.977 | 8.13 | | | 1.496 |
| TETRAETHYLENEPENTAMINE | TEPA 112-57-2 | 189.3 | | 0.922 | 8.26 | | | 1.503 |
| DIETHYLAMINOETHANOL | | 100-37-8 | 117.2 | 99 | 0.8851† | | | 7.40† |
| DIETHYLAMINE | | 109-89-7 | 73.14 | 99.4 | 0.7079† | | | 5.87† |
| ETHYLAMINOETHANOL | | 110-73-6 | 89.16 | | 0.914† | | | 7.62† |
| TRIETHYLAMINE | | 121-44-8 | 101.2 | 100 | 0.729† | | | 6.08† |

^a20 mm Hg ^b5 mm Hg † @ 20/20°C ^aOpen Cup ^bCentistokes ^cTrade Mark Angus ^d@ 40/40°C

| AMINES | Boiling Range 5-95% @ 760 mm Hg | | Vapor Press. @ 25°C mm Hg | Viscosity CPS @ 25°C | Solubility % by Wt. @ 25°C | | Freeze Point °C | Fire Point °F | Flash Point °F |
|--------------------------|---------------------------------|----------------------|---------------------------|----------------------|----------------------------|---------------------|-----------------|---------------|----------------|
| | °C | °F | | | In H ₂ O | Of H ₂ O | | | |
| AMP-95 ^c | 100-165 | 212-329 | | 147 | | | -2 | | 172 |
| AMP REGULAR ^c | 156-177 | 313-351 | | | ∞ | ∞ | 31 | | |
| DIETHANOLAMINE (DEA) | 168-169 ^a | 334-336 ^a | < .01 | 351.9 (30°C) | ∞ | ∞ | 28 | 300 | 305 |
| DIISOPROPANOLAMINE | 119-123 ^a | 246-253 ^a | | 870 (30°C) | 1200 | ∞ | 47 | 275 | 250 |
| DI-TRI ISOPROPANOLAMINE | 100-274 ^a | 212-525 ^a | | 980 | ∞ | ∞ | -23 | 245 | > 197 |
| MONOETHANOLAMINE (MEA) | 170-172 | 338-342 | 0.36 | 18.95 | ∞ | ∞ | 10 | 200 | 195 |
| MONOISOPROPANOLAMINE | 159-163 | 318-325 | 0.51 | 23.0 | ∞ | ∞ | 3 | | 165 |
| MORPHOLINE | 126-130 | 259-266 | 7.0 | 2.23 (20°C) | ∞ | ∞ | -5 | | 100 |
| TRIETHANOLAMINE (TEA) | 175-191 ^a | 347-376 ^a | < .01 | 590.5 | ∞ | ∞ | 18 | 410 | 365 |
| TRIETHANOLAMINE 99% | | | | 600.7 | ∞ | ∞ | 20 | 420 | 385 |
| TRISOPROPANOLAMINE | | | | | > 500 | | 60 | | 320 |
| ETHYLENEDIAMINE | EDA 115-119 | 239-246 | | 1.56 ^b | ∞ | ∞ | 11 | 100 | 100 |
| DIETHYLENTRIAMINE | ETA 199-207 | 390-405 | | 6.00 ^b | ∞ | ∞ | -35 | 210 | 210 |
| TRIETHYLENETETRAMINE | TETA 260-290 | 500-554 | | 20.00 ^b | ∞ | ∞ | < -40 | 310 | 270 |
| TETRAETHYLENEPENTAMINE | TEPA 155-210 | 311-410 | | 52.50 ^b | | | < -40 | 385 | 340 |
| DIETHYLAMINOETHANOL | 162.1 | 324 | | | ∞ | ∞ | | | 130 |
| DIETHYLAMINE | 55.5 | 132 | | | ∞ | ∞ | -49 | | 0 |
| ETHYLAMINOETHANOL | 162-169 | 324-336 | | | ∞ | ∞ | | | 160 |
| TRIETHYLAMINE | 85-91 | 185-196 | | | ∞ | ∞ | -114 | | 20 |

Table 14.57: Dow Commercial Alkanolamines (23)

Properties of Dow Commercial Alkanolamines[†]

| Property | MEA | DEA | TEA 85 | TEA 99 | MIPA | DIPA | TIPA | Isopropanolamine Mixture |
|----------------------------------------|------------------|------------------|------------------|------------------|-----------------------|-------------------------|-------------------------|--------------------------|
| Equivalent Wt. | 61.4 | 105.3 | 142.0 | 148.6 | 75.2 | 133.0 | 191.0 | 139.5 |
| Boiling Point, °C(°F), 760mm Hg | 171 (340) | 268 (514) | 325 (617) | 340 (644) | 159 (318) | 249 (480) | 306 (583) | 214 (417) |
| Freezing Point, °C,°F | 10 (50) | 28 (82.4) | 17 (62.6) | 21 (69.8) | 3 ¹ (37.4) | 44 ¹ (111.2) | 44 ¹ (111.2) | 24 ¹ (75.2) |
| Specific Gravity, 25/4°C. | 1.0113 | 1.0881 (30/4°C) | 1.1179 | 1.1205 | 0.960 (20/4°C) | 0.992 (40/4°C) | 0.988 (70/4°C) | 1.003 |
| Lbs./Gal, 25°C | 8.45 | 9.09 (30°C) | 9.34 | 9.35 | 7.95 | 8.27 (40°C) | 8.24 (70°C) | 8.36 |
| Refractive Index N _D , 25°C | 1.4525 | 1.4750 (30°C) | 1.4836 | 1.4839 | 1.4456 | 1.4595 (30°C) | --- | 1.4601 |
| Viscosity, cps, 25°C | 18.9 | 351.9 (30°C) | 590.5 | 600.7 | 23.0 | 870.0 (30°C) | --- | 950 |
| 60°C | 5.0 | 53.8 | 65.6 | 65.8 | 6.0 (54°C) | 86.0 (54°C) | 100 | 68 (54°C) |
| Flash Point, °F | 201 ² | 325 ³ | 354 ⁴ | 350 ⁵ | 173 ⁶ | 276 ³ | 320 ⁵ | 229 ⁴ |
| Fire Point, °F | 200 | 300 | 410 | 420 | --- | 275 | --- | 245 |

¹Supercools; freezing point results show variation.

²L.T. Setflash C.C.

³H.T. Setflash C.C.

⁴Pensky-Martin C.C.

⁵Cleveland O.C., no flashpoint observed up to the boiling point using Setflash closed cup.

⁶Tag C.C.

[†]These properties are typical of the product, but should not be confused with or regarded as specifications.

(continued)

Table 14.57: (continued)

Properties of Pure Alkanolamines¹

| Property | Mono-ethanolamine | Diethanolamine | Triethanolamine | Monoisopropanolamine | Diisopropanolamine | Triisopropanolamine |
|------------------------------------------------------------|-------------------------------------------------|----------------------------------------------------|---------------------------------------------------|-------------------------------------------------|----------------------------------------------------|---------------------------------------------------|
| Chemical Name | 2-aminoethanol | 2,2'-iminobisethanol | 2,2,2'-nitrilotriethanol | 1-aminopropan-2-ol | 1,1'-iminodi-2-propanol | 1,1',1''-nitrilotri-2-propanol |
| CAS Number..... | 141-43-5 | 111-42-2 | 102-71-6 | 78-96-6 | 110-97-4 | 122-20-3 |
| Formula..... | HOC ₂ H ₄ NH ₂ | (HOC ₂ H ₄) ₂ NH | (HOC ₂ H ₄) ₃ N | HOC ₃ H ₆ NH ₂ | (HOC ₃ H ₆) ₂ NH | (HOC ₃ H ₆) ₃ N |
| Molecular Weight..... | 61.09 | 105.14 | 149.19 | 75.11 | 133.19 | 191.27 |
| Boiling point, °C 760mm Hg..... | 171 | 268 | 340 | 159 | 249 | 306 |
| Freezing point, °C..... | 10 | 28 | 21 | 3.0 | 44 | 44 |
| Density, gm/ml, 20°C..... | 1.0147 | — | — | 0.961 | 0.999 (30°C) | — |
| 25°C..... | 1.0108 | — | 1.1196 | 0.957 | 0.992 (40°C) | — |
| 40°C..... | 0.9989 | 1.0828 | 1.1116 | 0.944 | 0.977 (60°C) | 1.010 |
| Viscosity, cps, 20°C..... | 24.14 | — | — | 30.6 | — | — |
| 25°C..... | 18.95 | — | 613.6 | 17.3 (30°C) | 870 (30°C) | — |
| 40°C..... | 10.06 | 196.4 | 208.1 | 6.0 (54°C) | 86 (54°C) | 100 (60°C) |
| Refractive index, N _D , 20°C..... | 1.4541 | — | 1.4835 (25°C) | 1.4479 | 1.4595 (30°C) | 1.4560 (25°C) |
| 40°C..... | 1.4474 | 1.4720 | 1.4798 | 1.4369 (50°C) | — | 1.4600 |
| Specific heat, 30°C, cal/gm/°C..... | 0.644 | 0.593 | 0.555 | 0.650 | 0.710 (50°C) | 0.635 (50°C) |
| Flash point, °F ¹ | 201 | 325 | 350 | 173 | 276 | 320 |
| Heat of fusion, btu/lb ² | 144.35 | 102.75 | 78.41 | 77.65 | 85.14 | 51.10 |
| Heat of vaporization, btu/lb, 1 atm. ² | 360 | 287 ³ | 176 | 273 | 188 | 143 |
| Critical temperature, °C ² | 341.3 | 442.1 | 514.3 | 339.5 | 399.2 | 444.9 |
| Critical pressure, atmospheres ² | 44.1 | 32.3 | 24.2 | 55.9 | 36.0 | 26.6 |
| Constants for Antoine equation A..... | 8.27771 | 8.14949 | 8.36007 | 7.65791 | 7.52712 | 7.65342 |
| B..... | 2103.36 | 2336.03 | 2987.63 | 1666.511 | 1885.092 | 2177.51 |
| C..... | 219.339 | 175.008 | 205.111 | 180.077 | 156.432 | 150.00 |

¹Reference data and methods for Dow Commercial Alkanolamines above.²Calculated.³At 165.5°C and 13.2mm Hg.[†]These properties are typical of the product, but should not be confused with or regarded as specifications.

Solubility of Alkanolamines



| Grams of Alkanolamine per 100 grams of solvent at 25°C | | | | | | | | |
|--------------------------------------------------------|-------------------|-----------------|---------------------|---------------------|-----------------------|--------------------|----------------------|--------------------------|
| | Mono-ethanolamine | Di-ethanolamine | Tri-ethanolamine 85 | Tri-ethanolamine 99 | Mono-isopropanolamine | Diisopropanolamine | Tri-isopropanolamine | Isopropanolamine Mixture |
| [†] Acetone..... | CM | CM | CM | CM | CM | 810 | 450 | CM |
| Benzene..... | about 1.2 | about 0.2 | about 2.7 | about 4.9 | CM | 53 | 410 | CM |
| n-Butyl Alcohol..... | CM | CM | CM | CM | CM | 200 | 445 | CM |
| [†] Carbon Tetrachloride..... | * | * | * | * | about 4* | about 35* | about 170* | CM* |
| Dibutyl Phthalate..... | about 3.6 | about 0.5 | about 2.8 | about 3.8 | about 19* | about 5* | about 115* | CM* (slow) |
| [†] o-Dichlorobenzene..... | about 0.7* | about 0.1* | about 6* | CM* | CM* | about 29* | about 300* | CM* |
| [†] DOWANOL** EB glycol ether..... | CM | CM | CM | CM | CM | 91 | 250 | CM |
| [†] DOWANOL TPM glycol ether..... | CM | CM | CM | CM | CM | 45 | 18 | CM |
| Ethyl Alcohol (absolute)..... | CM | CM | CM | CM | CM | 430 | > 500 | CM |
| Ethyl Ether..... | about 2.2 | about 0.7 | about 1.5 | about 1.8 | CM (slow) | 9 | 365 | CM (slow) |
| [†] Ethylene Dichloride..... | CM* | IM* | CM* | CM* | CM* | about 150* | about 375* | CM* |
| [†] Ethylene Glycol..... | CM | CM | CM | CM | CM | 260 | 425 | CM |
| [†] Glycerine..... | CM | CM | CM | CM | CM | 220 | 115 | CM |
| n-Heptane..... | about 0.06 | about 0.01 | about 0.02 | about 0.03 | 0.4 | 0.1 | 3.45 | 0.9 |
| Isopropanol..... | CM | CM | CM | CM | CM | 320 | > 500 | CM |
| Kerosene..... | about 0.05 | about 0.01 | about 0.02 | about 0.03 | 0.4 | 0.2 | 4 | 0.8 |
| Methanol..... | CM | CM | CM | CM | CM | 670 | > 500 | CM |
| [†] 1,1,1-Trichloroethane..... | about 0.6* | about 0.08* | about 1.4* | about 2.5* | CM* | about 15* | about 280* | CM* |
| [†] Methylene Chloride..... | CM* | IM* | CM* | CM* | CM* | about 180* | > 500* | CM* |

(continued)

Table 14.57: (continued)

| Grams of Alkanolamine per 100 grams of solvent at 25°C | | | | | | | | |
|--------------------------------------------------------|--------------------|------------------|----------------------|----------------------|------------------------|---------------------|-----------------------|--------------------------|
| | Mono-ethanol-amine | Di-ethanol-amine | Tri-ethanol-amine 85 | Tri-ethanol-amine 99 | Mono-isopropanol-amine | Diisopropanol-amine | Tri-isopropanol-amine | Isopropanolamine Mixture |
| Mineral Oil | about 0.06 | about 0.02 | about 0.03 | about 0.03 | 0.2 | 0.05 | about 0.4 | 0.2 |
| Mineral Spirits . . . | about 0.08 | about 0.01 | about 0.03 | about 0.04 | 0.4 | 0.2 | 5 | 1.0 |
| Naphtha VMP. | about 0.07 | about 0.01 | about 0.03 | about 0.06 | 0.4 | 0.3 | 6 | 1.6 |
| †Perchloro-ethylene. | about 0.1* | about 0.02* | about 0.1* | about 0.17* | about 0.7* | about 0.9* | about 160* | CM* |
| Pine Oil | CM | CM | CM | CM | CM | 110 | 90 | CM |
| Toluene. | about 0.7 | about 0.1 | about 0.6 | about 1.7 | CM | 12 | 340 | CM |
| Water. | CM | CM | CM | CM | CM | 1200 | >500 | CM |

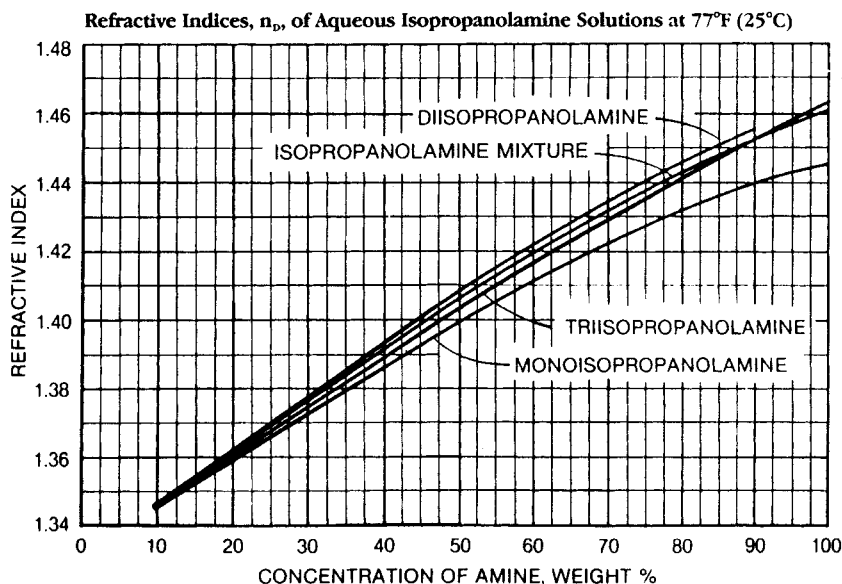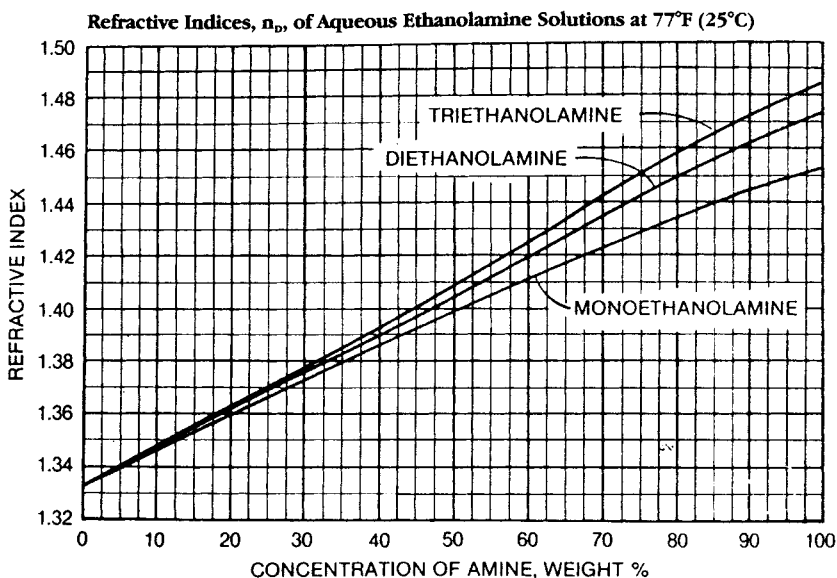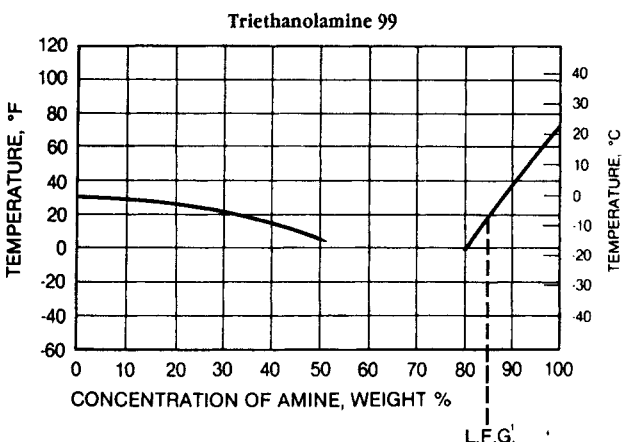
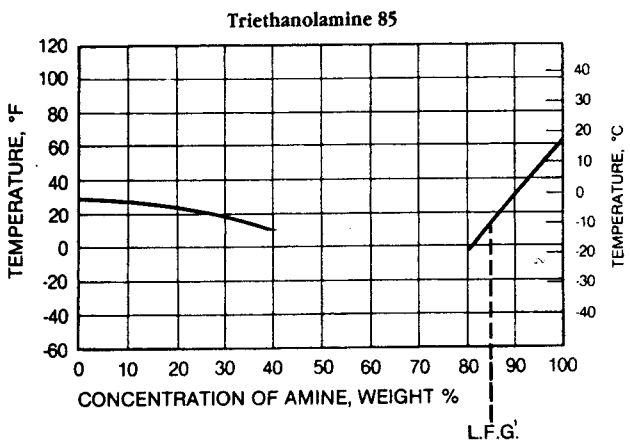
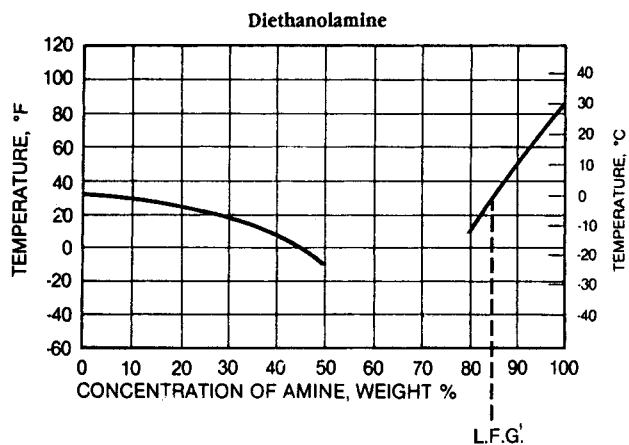
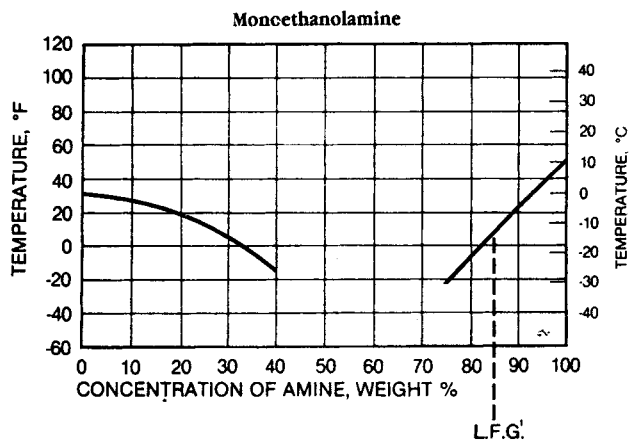
CM = completely miscible IM = not completely miscible †Dow Solvents
 *The amine reacts with the solvent to some extent
 **Trademark of The Dow Chemical Company




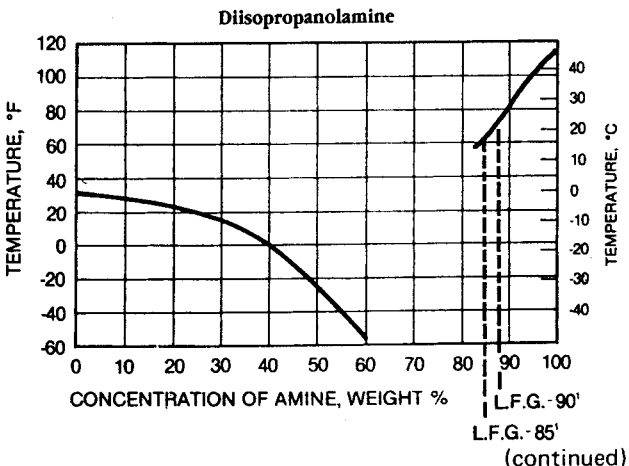
(continued)

Table 14.57: (continued)

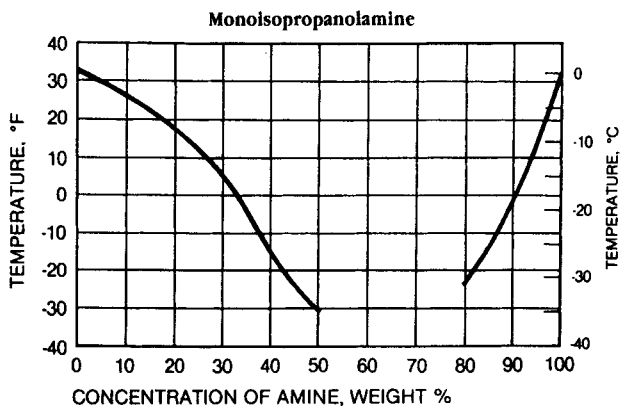Freezing Curves of Aqueous Ethanolamine Solutions



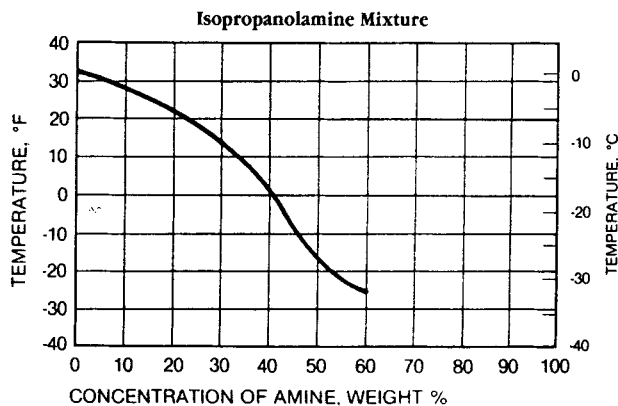
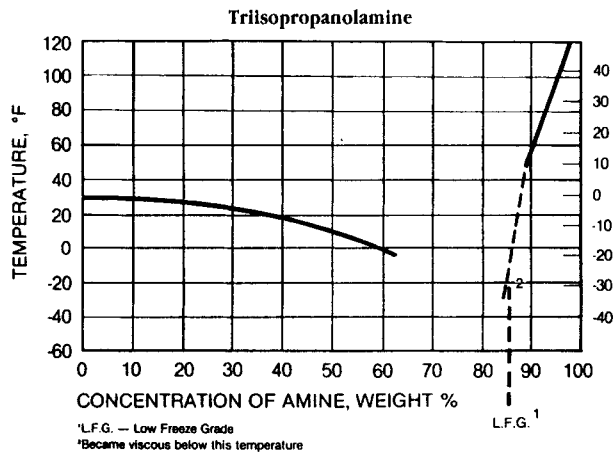
Freezing Curves of Aqueous Isopropanolamine Solutions





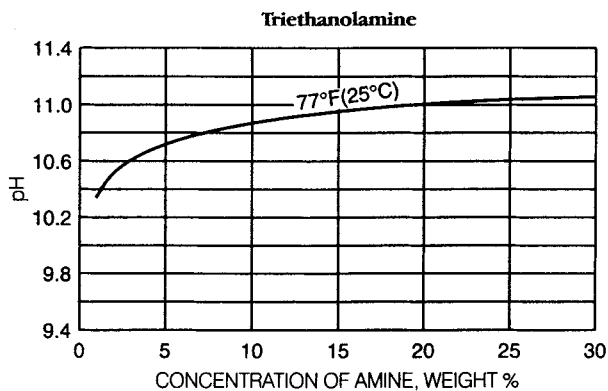
(continued)

Table 14.57: (continued)

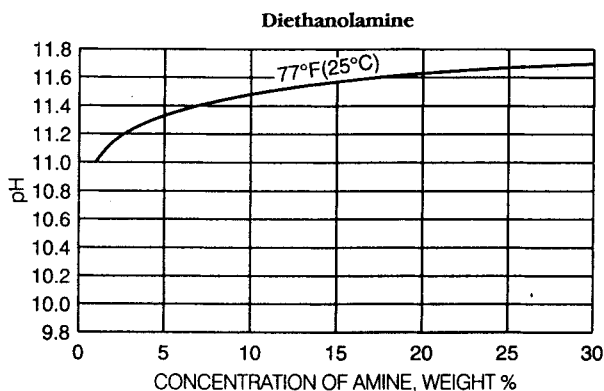Freezing Curves of Aqueous Isopropanolamine Solutions (Con't.)




pH Values of Aqueous Ethanolamines

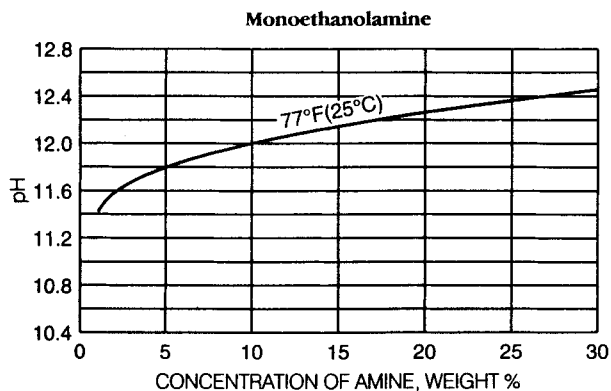


(continued)

Table 14.57: (continued)

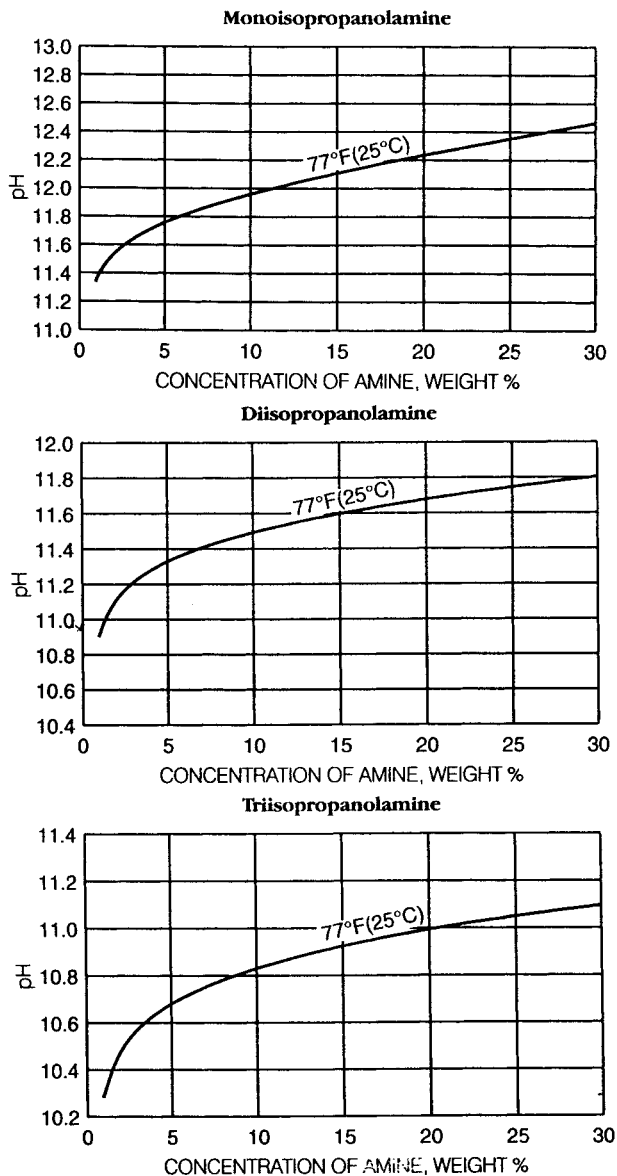pH Values of Aqueous Isopropanolamines






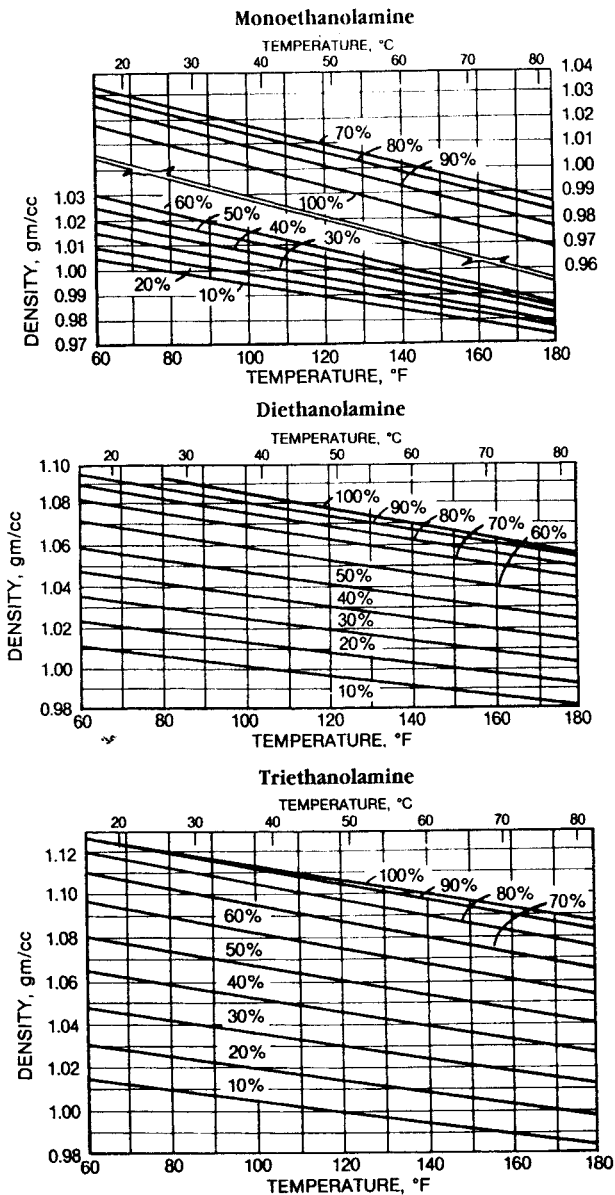
Densities of Aqueous Ethanolamine Solutions (weight % of amine)



(continued)


Table 14.57: (continued)

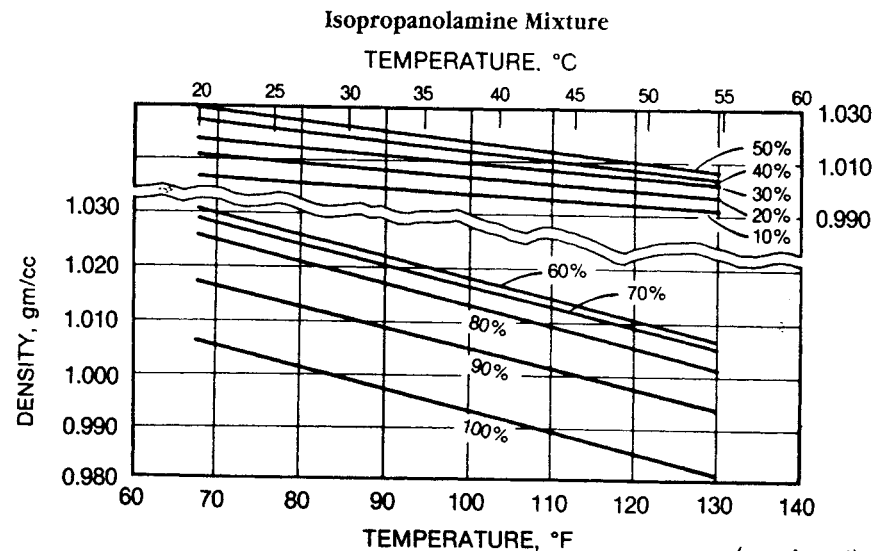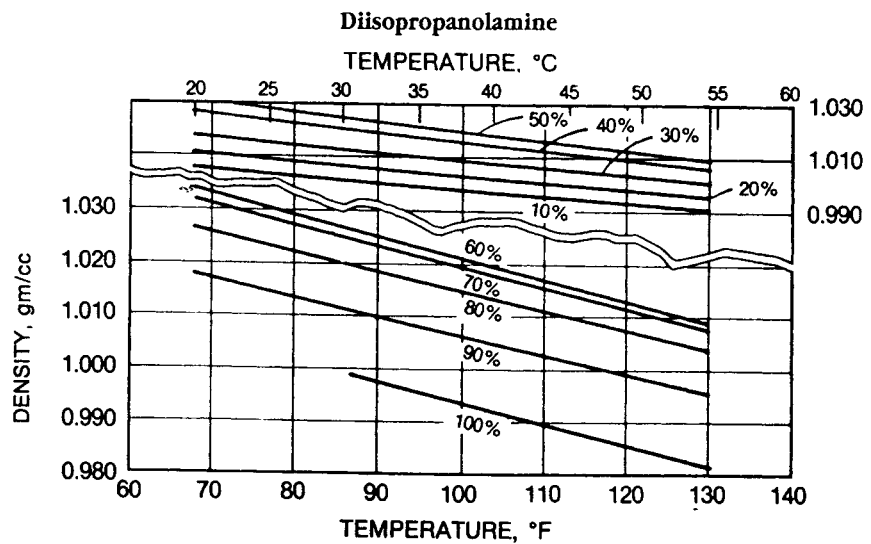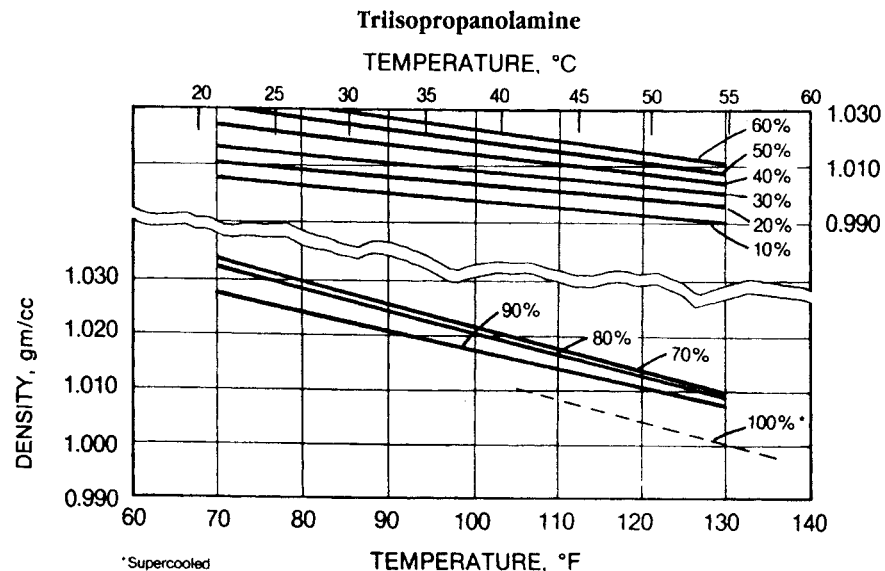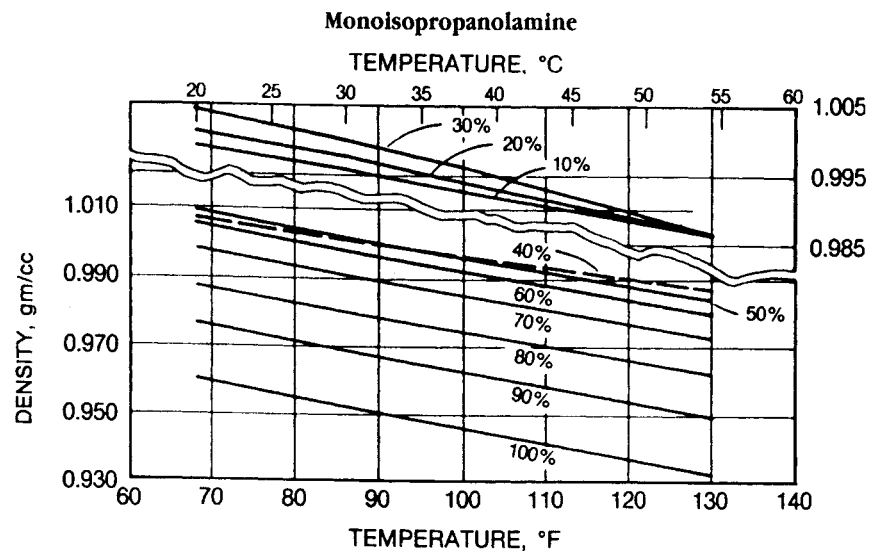Densities of Aqueous Isopropanolamine Solutions (weight % of amine)




(continued)

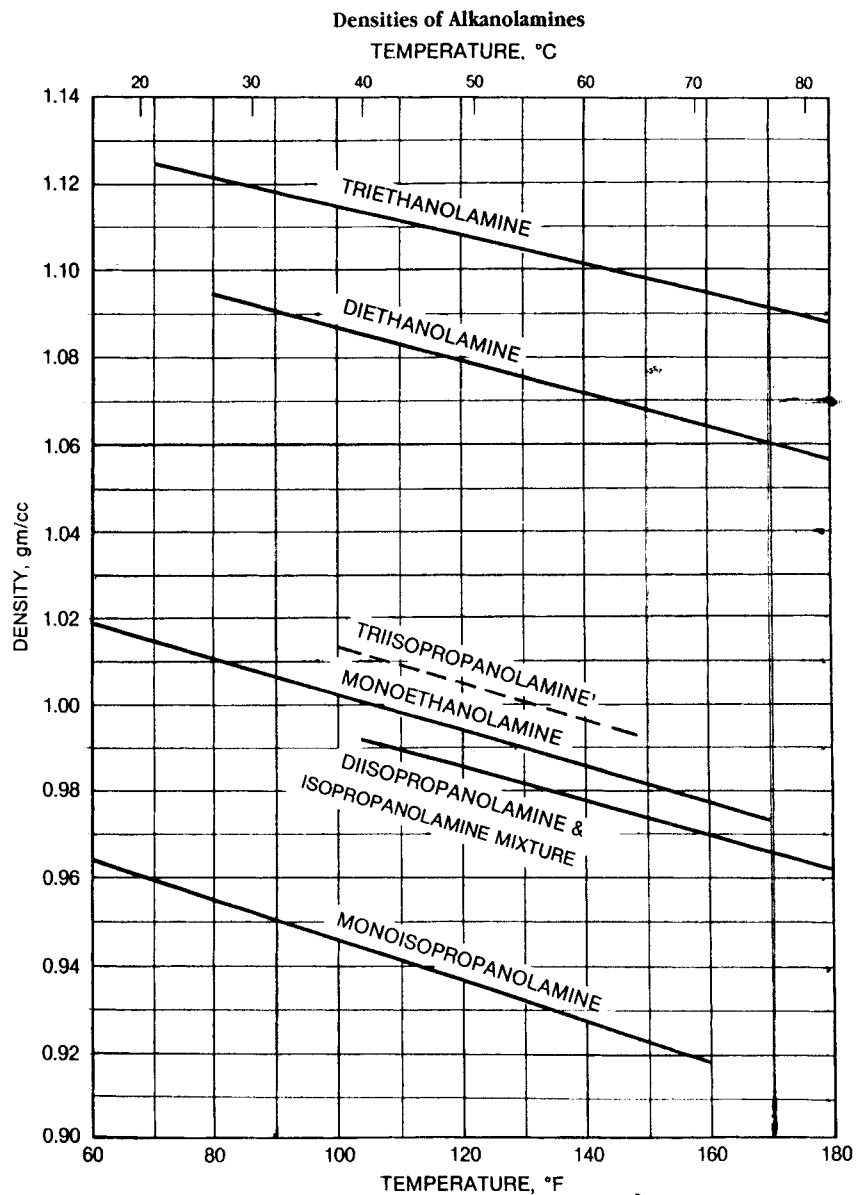Table 14.57: (continued)



¹Extrapolation on Supercooled Product

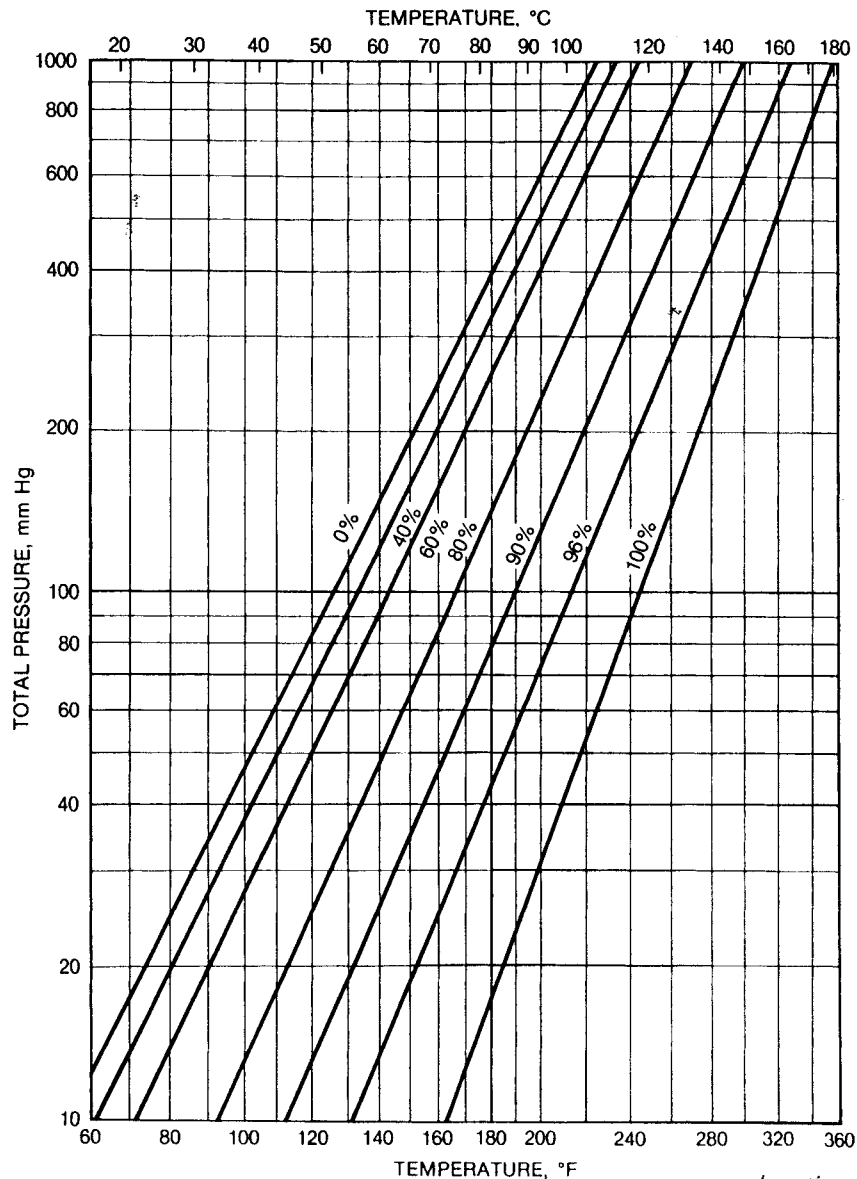
Total Vapor Pressures of Aqueous Monoethanolamine Solutions
(weight % of amine)




(continued)

Table 14.57: (continued)

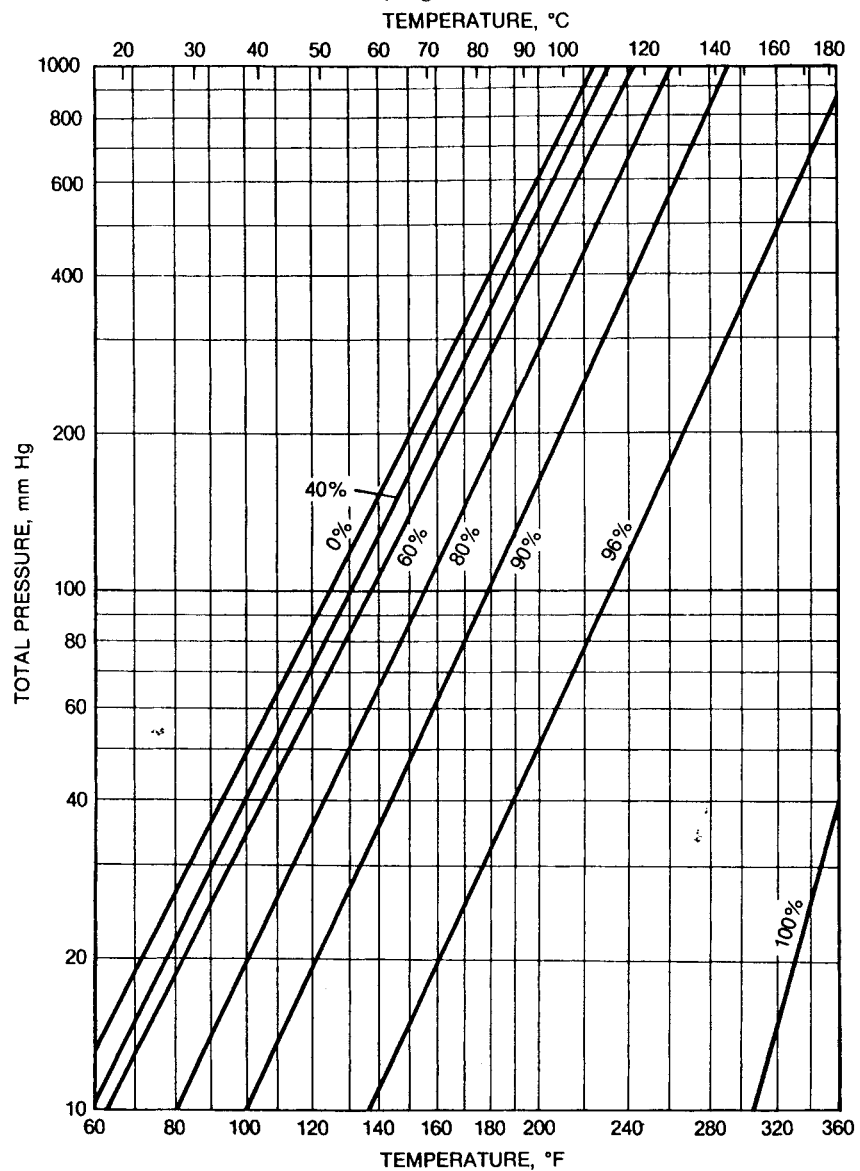Total Vapor Pressures of Aqueous Diethanolamine Solutions
(weight % of amine)



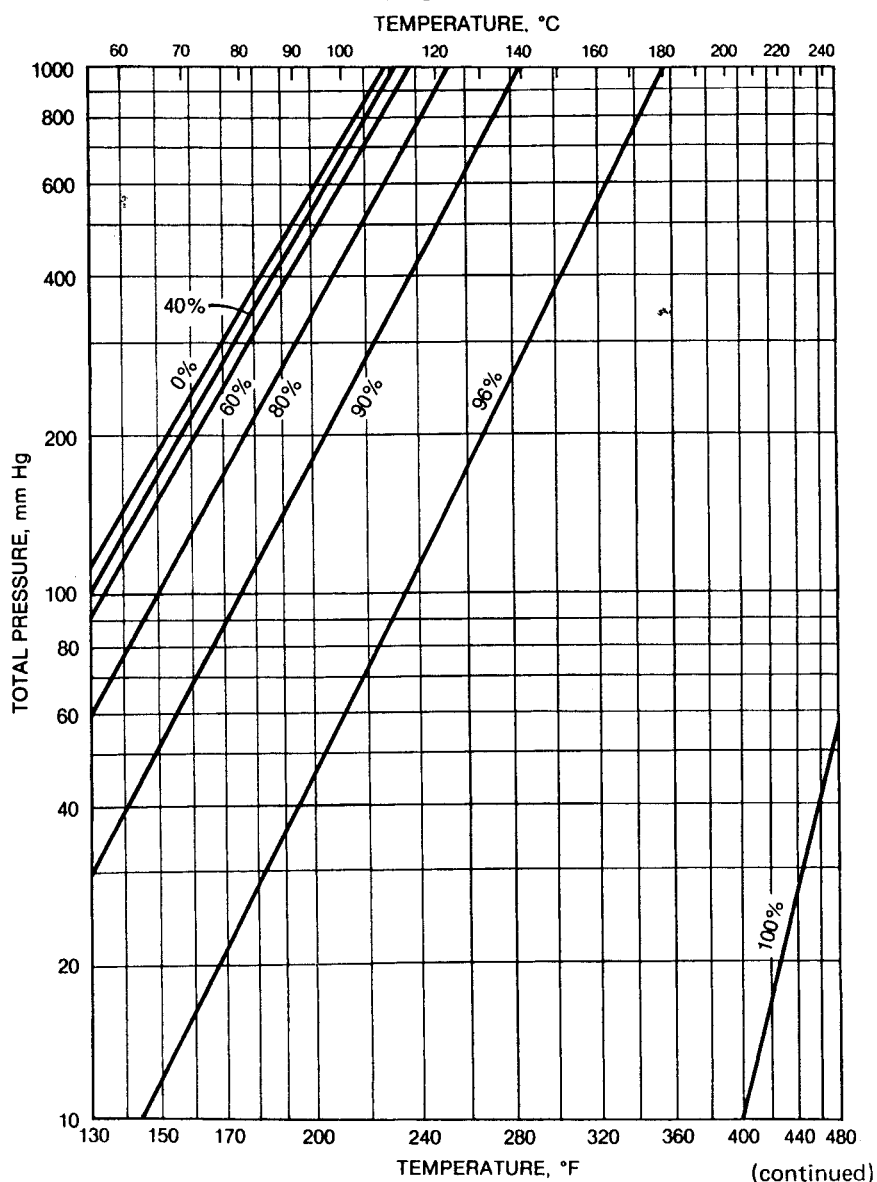
Total Vapor Pressures of Aqueous Triethanolamine Solutions
(weight % of amine)



(continued)

Table 14.57: (continued)

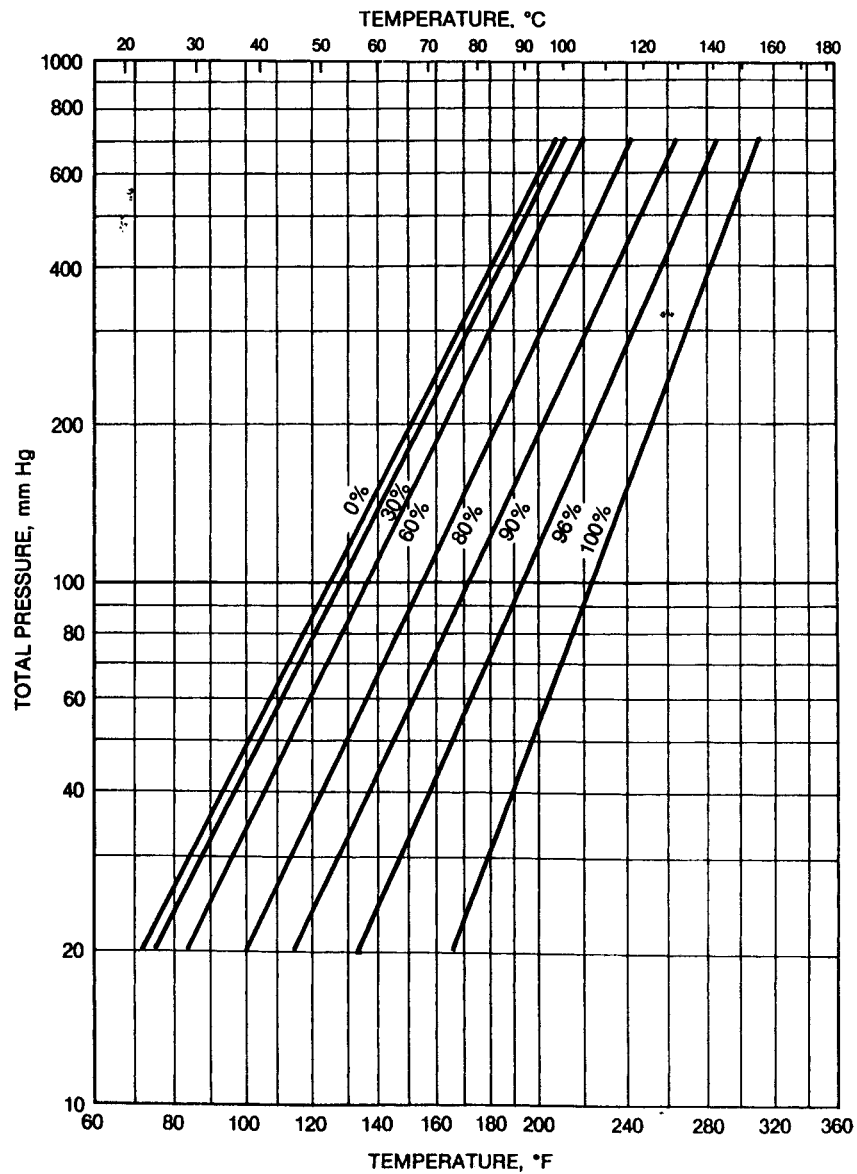**Total Vapor Pressures of Aqueous Monoisopropanolamine Solutions
(weight % of amine)**



**Total Vapor Pressures of Aqueous Diisopropanolamine Solutions
(weight % of amine)**


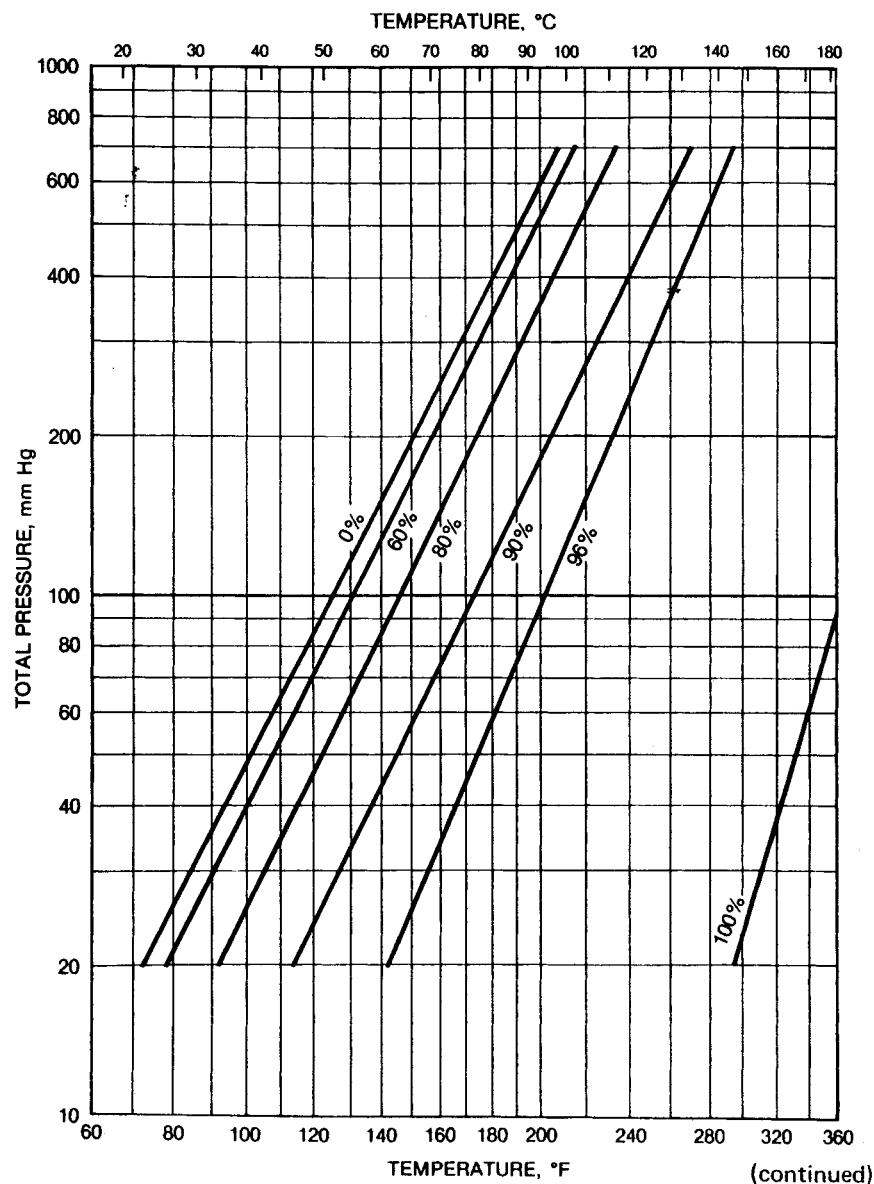


Table 14.57: (continued)

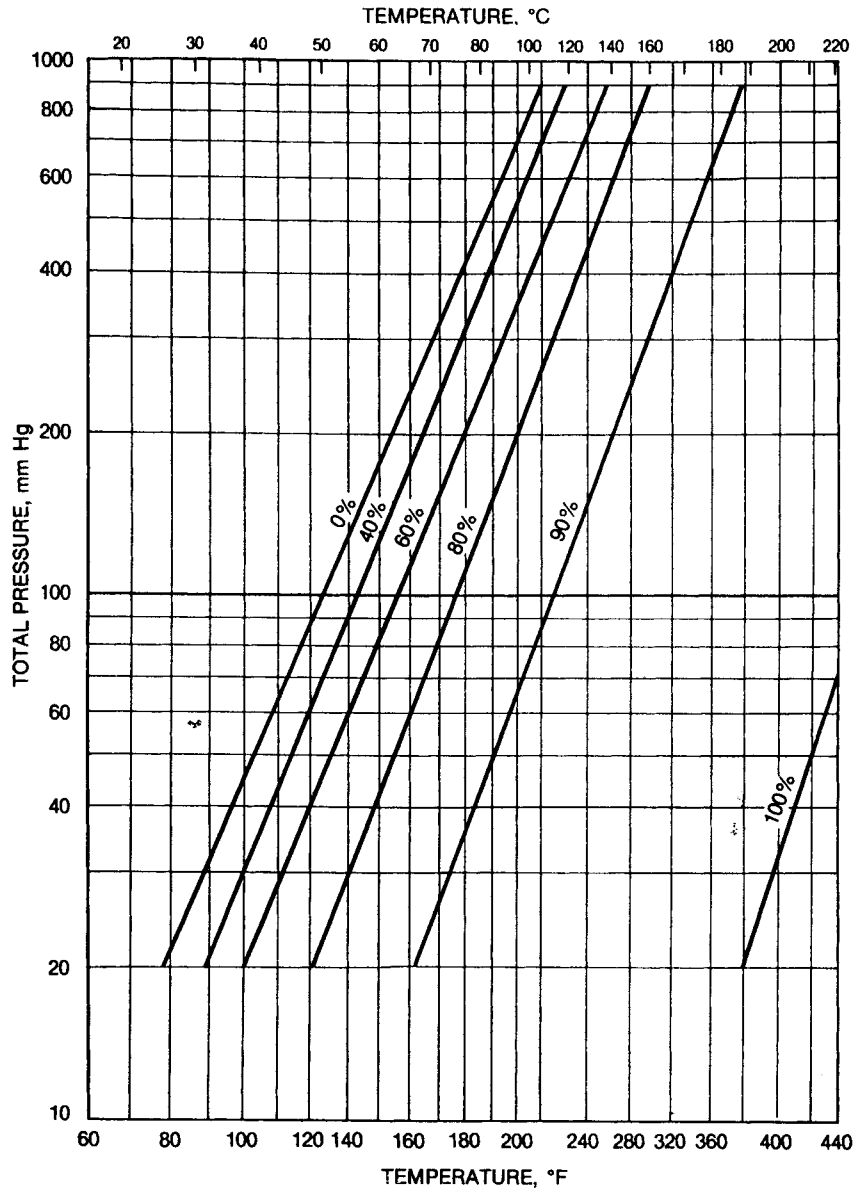**Total Vapor Pressure of Aqueous Triisopropanolamine Solutions
(weight % of amine)**



**Total Vapor Pressures of Aqueous Isopropanolamine Mixture Solutions
(weight % of amine)**



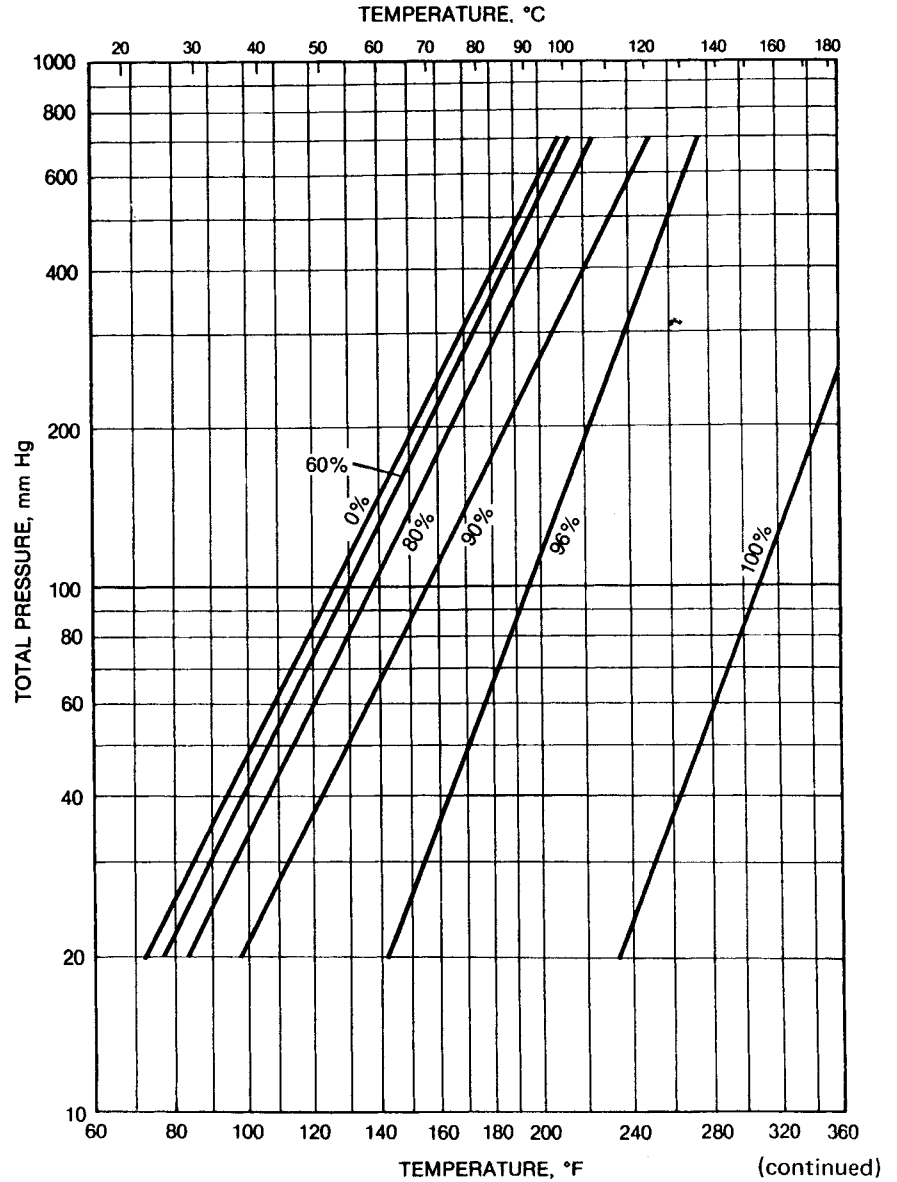


Table 14.57: (continued)

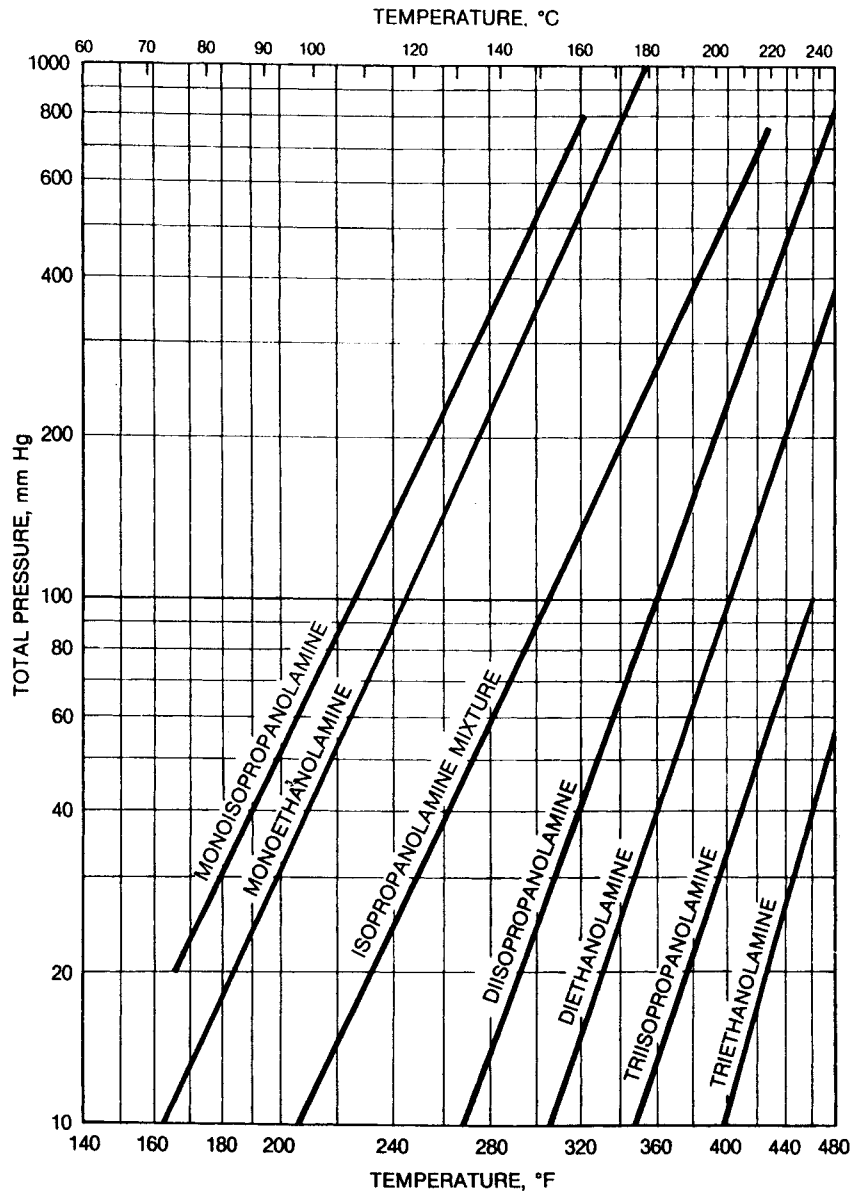Total Vapor Pressures of Alkanolamines



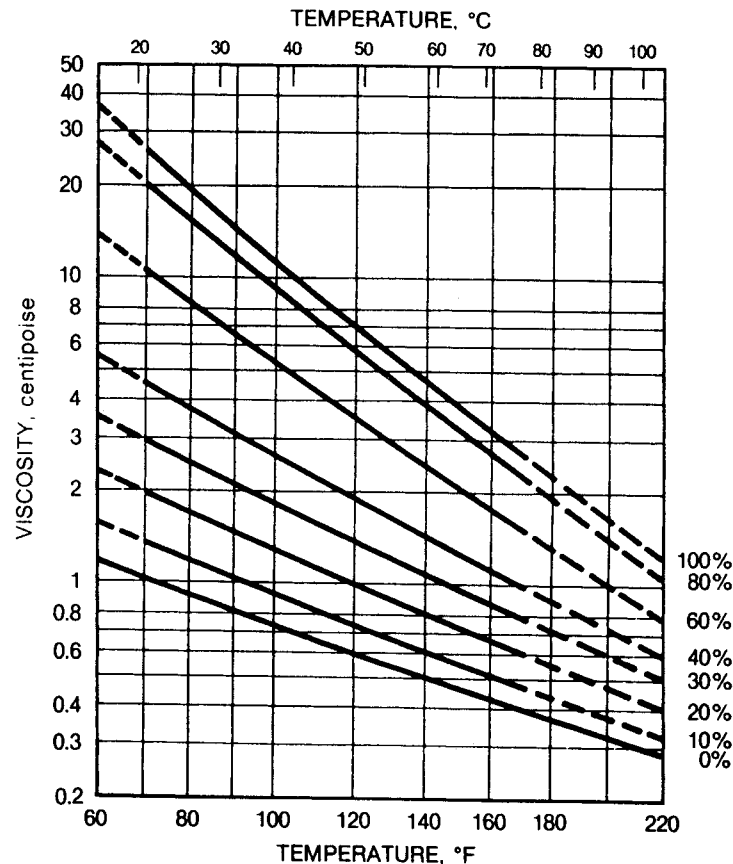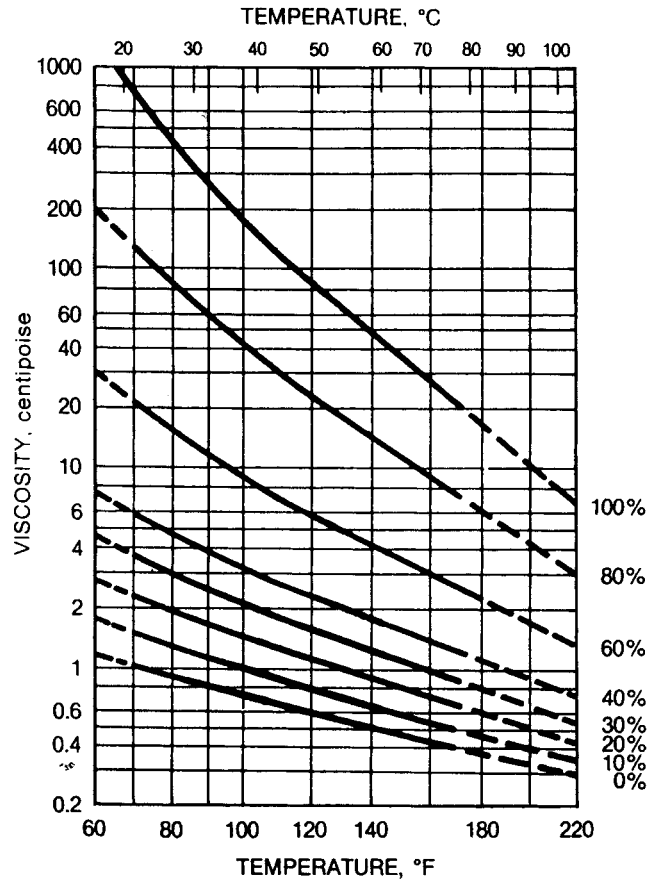
Viscosities of Aqueous Monoethanolamine Solutions (weight % of amine)




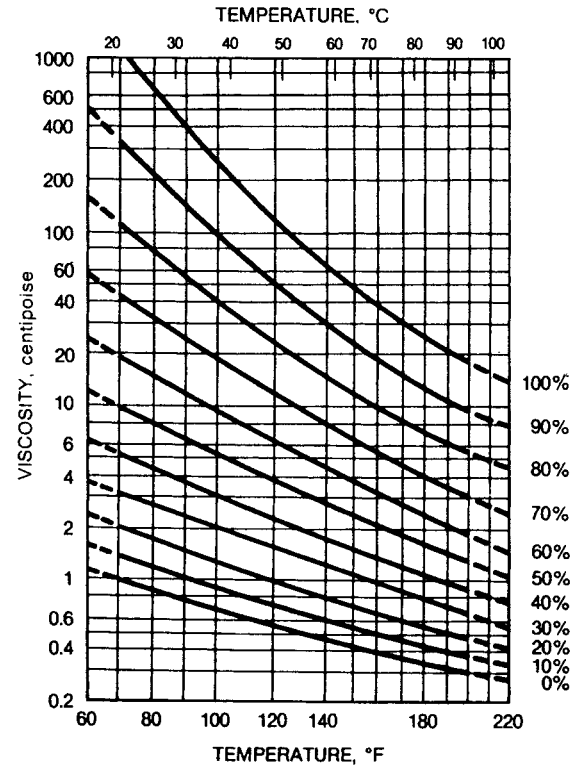
(continued)

Table 14.57: (continued)

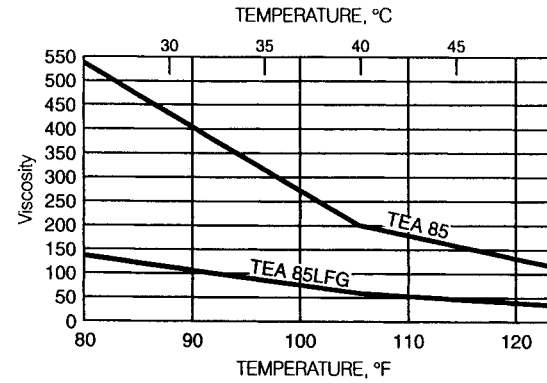Viscosities of Aqueous Diethanolamine Solutions
(weight % of amine)



Viscosities of Aqueous Triethanolamine Solutions
(weight % of amine)




(continued)

Table 14.57: (continued)


Viscosities of Aqueous Monoisopropanolamine Solutions
(weight % of amine)

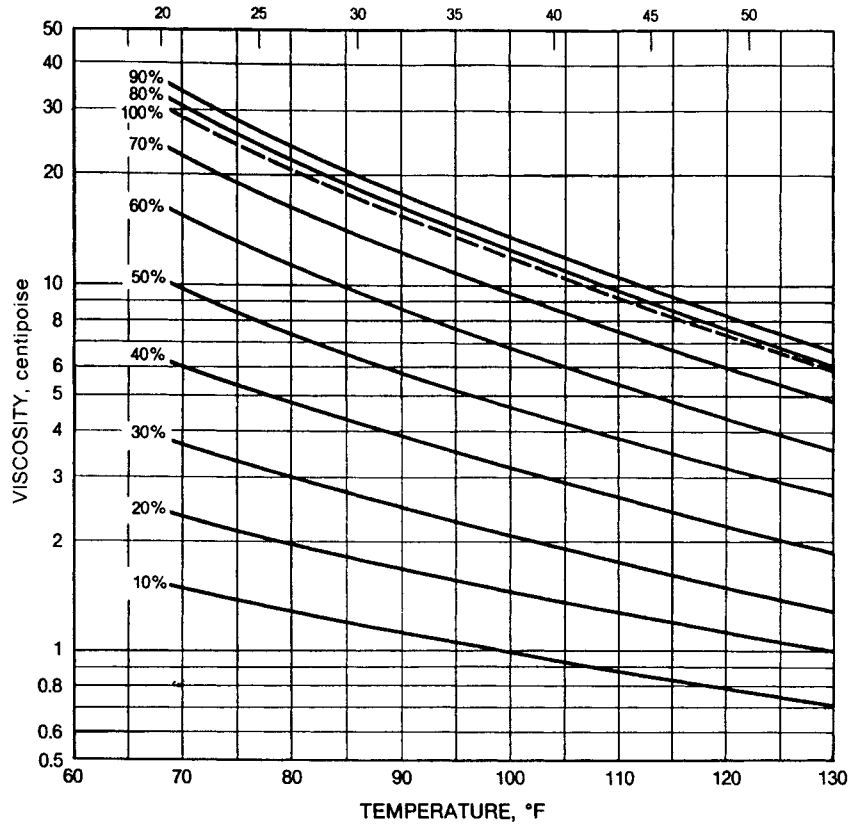TEMPERATURE, °C



Viscosities of Aqueous Diisopropanolamine Solutions
(weight % of amine)

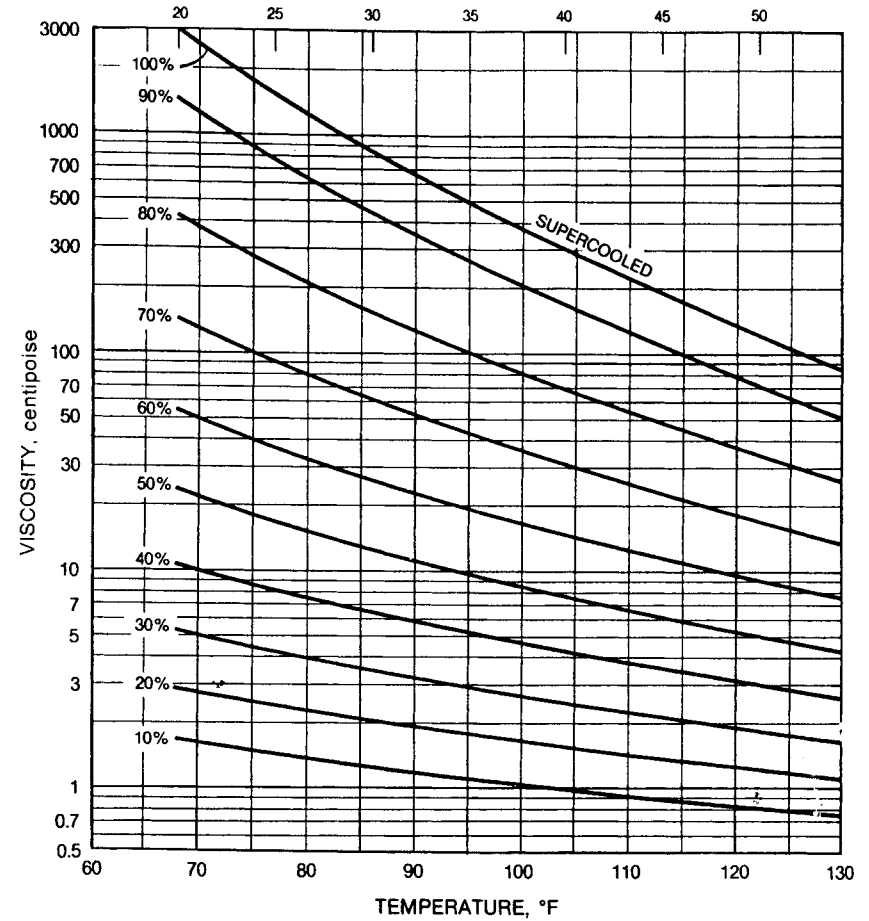TEMPERATURE, °C




(continued)

Table 14.57: (continued)


Viscosities of Aqueous Triisopropanolamine Solutions
(weight % of amine)

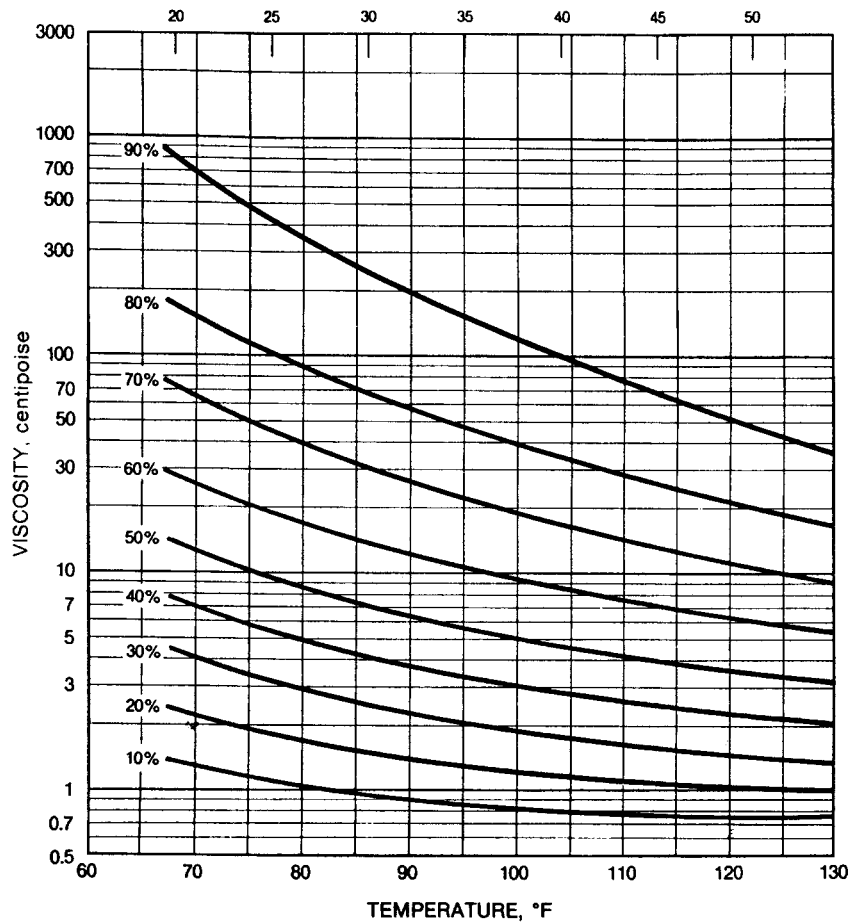TEMPERATURE, °C



Viscosities of Aqueous Isopropanolamine Mixture Solutions
(weight % of amine)

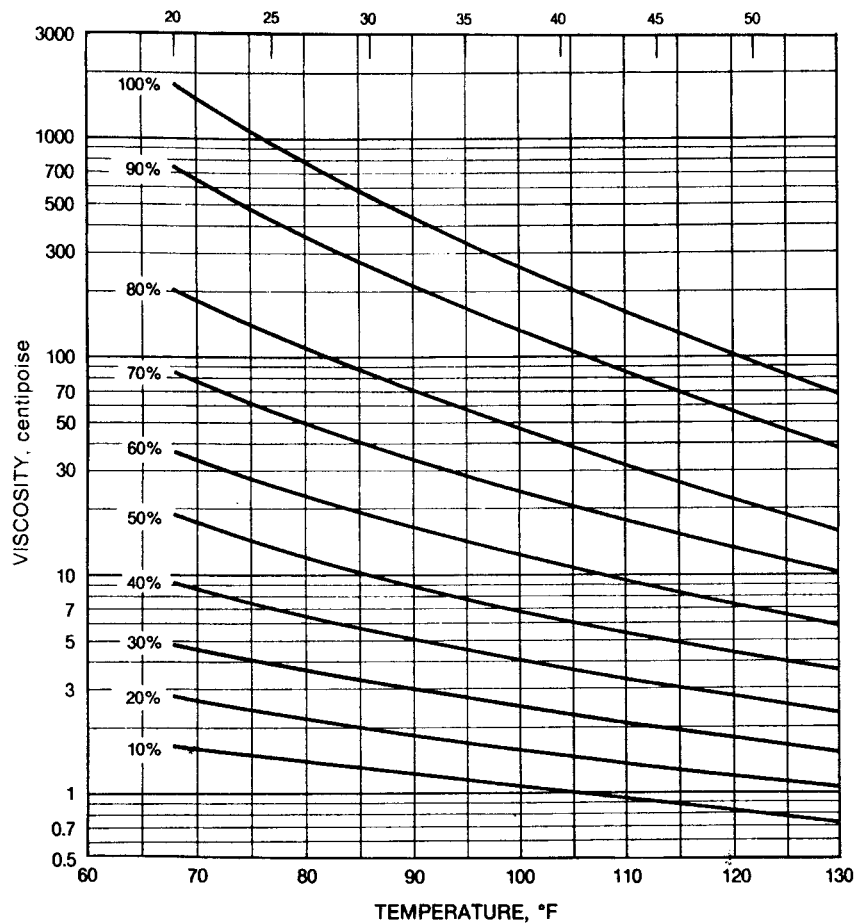
TEMPERATURE, °C



(continued)

Table 14.57: (continued)

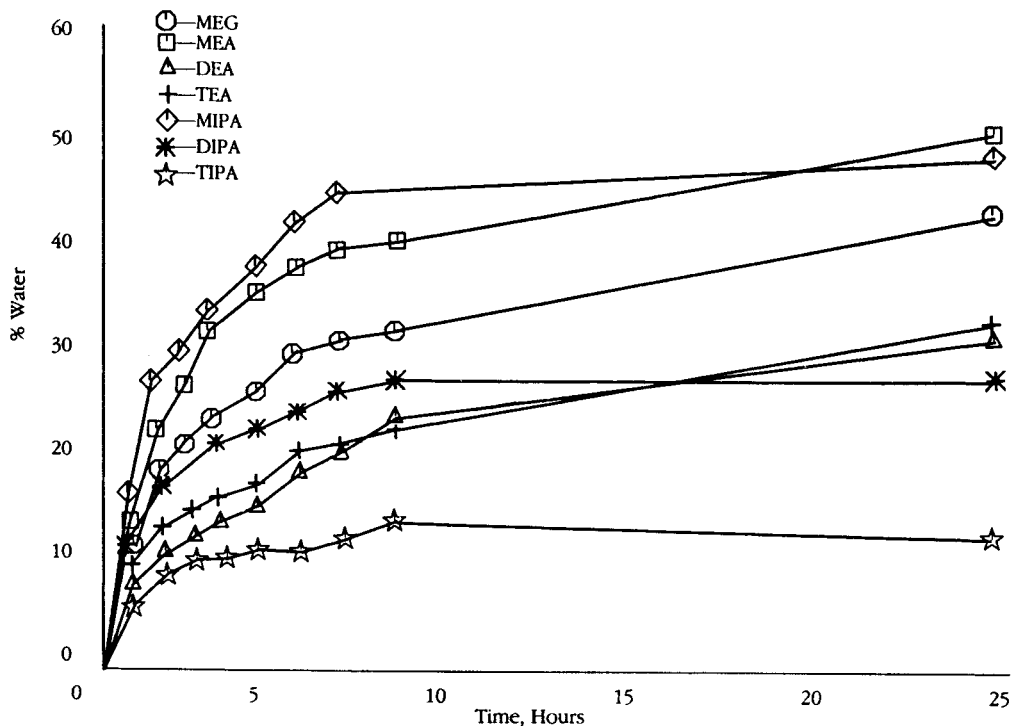Hygroscopicity
(Water Uptake)
MEG¹ vs ALKANOLAMINES
45°C/74% Relative Humidity



| Time | MEG | MEA | DEA | TEA | MIPA | DIPA | TIPA |
|------|------|------|------|------|------|------|------|
| 0 | 0.2 | 0.1 | 0.1 | 0.1 | 0.1 | 0.2 | 0.2 |
| 1 | 12.6 | 13.3 | 8.7 | 10.1 | 17.4 | 11.5 | 6.4 |
| 2 | 19.3 | 22.1 | 11.2 | 13.4 | 26.0 | 15.6 | 9.2 |
| 3 | 22.3 | 27.2 | 13.5 | 15.6 | 29.5 | 18.7 | 10.5 |
| 4 | 25.8 | 31.8 | 15.3 | 16.8 | 33.2 | 20.2 | 10.6 |
| 5 | 29.5 | 34.9 | 17.2 | 18.0 | 37.4 | 22.5 | 11.3 |
| 6 | 30.5 | 37.9 | 19.1 | 20.2 | 41.2 | 23.4 | 11.3 |
| 7 | 32.5 | 39.8 | 21.3 | 20.9 | 43.5 | 24.9 | 12.1 |
| 8 | 33.2 | 41.0 | 22.5 | 21.5 | 42.7 | 25.5 | 12.9 |
| 24 | 42.3 | 49.7 | 31.4 | 31.3 | 48.7 | 28.1 | 11.4 |

¹MEG is monoethylene glycol

Table 14.58: Humko Amines (25)

Primary Amines

| Product | Description (CTFA adopted name) | % Primary Min | Total amine value Min | Color Gardner, 1963 Max | % H ₂ O Max | Iodine value | Typical carbon chain composition | | | | | | | |
|------------------|--------------------------------------------------------------|---------------|-----------------------|-------------------------|------------------------|--------------|----------------------------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|-------------------|
| | | | | | | | Saturated | | | | | Unsaturated | | |
| | | | | | | | C ₁₀ | C ₁₂ | C ₁₄ | C ₁₆ | C ₁₈ | C _{18:1} | C _{18:2} | C _{18:3} |
| Kemamine P-650D | Distilled Coco | 97 | 270 | 1 | 0.5 | 12 Max | 2 | 58 | 20 | 10 | 5 | 5 | | |
| Kemamine P-970* | Technical Hydrogenated Tallow (Hydrogenated Tallow Amine) | 93 | 205 | 3 | 0.5 | 3 Max | | | 4 | 29 | 67 | | | |
| Kemamine P-970D* | Distilled Hydrogenated Tallow (Hydrogenated Tallow Amine) | 97 | 210 | 1 | 0.5 | 3 Max | | | 4 | 29 | 67 | | | |
| Kemamine P-974D | Distilled Tallow (Tallow Amine) | 97 | 210 | 1 | 0.5 | 38 Min | | | 4 | 29 | 25 | 38 | 4 | |
| Kemamine P-989D | Distilled Oleyl (Oleamine) | 97 | 205 | 1 | 0.5 | 70 Min | | | 4 | 14 | 10 | 65 | 7 | |
| Kemamine P-999 | Technical Oleic-Linoleic | 93 | 200 | 5 | 0.5 | 85 Min | | | | 15 | 6 | 52 | 25 | 2 |

*Available in flake form.

1,3-Propylenediamine

| Product | Description | % Diamine | Amine values | | | | Color Gardner, 1963 Max | % H ₂ O Max | Iodine value |
|----------------|-------------------------|-----------|--------------|---------|--------|---------|-------------------------|------------------------|--------------|
| | | | 1° | 2° | 3° | Total | | | |
| Kemamine D-190 | N-90% Behenyl-Arachidyl | 88 Typ | 150 Typ | 120 Typ | 10 Typ | 280 Min | 9 | 0.5 | 10 Max |
| Kemamine D-999 | N-Oleic-Linoleic | 88 Typ | 150 Min | 140 Min | 10 Max | 300 Min | 8 | 0.5 | 70 Min |

Tertiary Amines

| Product | Description (CTFA adopted name) | % Tertiary Min | Total amine value Min | Color Gardner, 1963 Max | % H ₂ O Max | Typical carbon chain composition | | | | | | | |
|------------------|------------------------------------------------|----------------|-----------------------|-------------------------|------------------------|----------------------------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|-------------------|
| | | | | | | Saturated | | | | | Unsaturated | | |
| | | | | | | C ₁₀ | C ₁₂ | C ₁₄ | C ₁₆ | C ₁₈ | C _{18:1} | C _{18:2} | C _{18:3} |
| Kemamine T-6502D | Distilled Dimethyl Coco | 95 | 230 | 1 | 0.5 | 2 | 61 | 22 | 8 | 3 | 2 | | |
| Kemamine T-9701 | Methyl Di-Hydrogenated Tallow | 95 | 103 | 3 | 0.5 | | | 4 | 29 | 67 | | | |
| Kemamine T-9892D | Distilled Dimethyl Oleyl | 95 | 180 | 1 | 0.5 | | | 4 | 14 | 10 | 65 | 7 | |
| Kemamine T-9902D | Distilled Dimethyl Stearyl Dimethyl Stearamine | 95 | 180 | 1 | 0.5 | | | | 10 | 90 | | | |
| Kemamine T-9992D | Distilled Dimethyl Oleic-Linolenic | 95 | 180 | 2 | 0.5 | | | | 15 | 7 | 53 | 22 | 3 |

Dimer Amines

| Product | Description | Total amine value Min | Primary amine value Min | Secondary amine value Min | Color Gardner, 1963 Max | % Moisture |
|-------------------|-----------------------|-----------------------|-------------------------|---------------------------|-------------------------|------------|
| Kemamine DP-3695* | Dimer Diprimary Amine | 185 | 175 | | 14 | 1 Max |
| Kemamine DP-3680* | Dimer Diprimary Amine | 175 | 165 | | 14 | 1 Max |
| Kemamine DD-3680* | Dimer Diamine | 280 | 135 | 135 | 14 | 1 Max |

*Semicommercial.

Table 14.59: Proctor & Gamble Tertiary Amines (39)

| Chemical Properties | AT-1295 | AT-1495 | AT-1695 | AT-1214 | AT-121416 |
|----------------------------|-------------------------|-------------------------|-------------------------|-------------------------|----------------------------------|
| % Total Amine | 97.3 min (98.5) | 97.3 min (98.4) | 97.3 min (98.2) | 97.3 min (98.4) | 97.3 min (98.4) |
| % Non-Terminal Amine | 6.0 max (5.2) | 6.0 max (5.0) | 6.0 max (5.6) | 6.0 max (5.1) | 6.0 max (5.0) |
| % Non-Amine Material | 2.0 max (1.5) | 2.0 max (1.5) | 2.0 max (1.7) | 2.0 max (1.5) | 2.0 max (1.5) |
| Amine Value | 254-264 (263) | 226-234 (232) | 203-211 (208) | 246-254 (252) | 236-244 (243) |
| % Moisture | 0.20 max (0.1) | 0.20 max (0.1) | 0.20 max (0.1) | 0.2 max (0.1) | 0.2 max (0.1) |
| Physical Properties | | | | | |
| Color-APHA | 35 max (15) | 25 max (19) | 35 max (29) | 35 max (17) | 35 max (19) |
| Appearance | Clear to slight haze | Clear to slight haze | Clear to slight haze | Clear to slight haze | Clear to slight haze |
| Equivalent Weight | (213) | (242) | (270) | (223) | (231) |
| Composition (%GC) | | | | | |
| C10 & Lower | 1.0 max (0.0) | | | | 1.0 max (0.0) |
| C12 | 95.0 min (98.2) | 3.0 max (1.0) | | 69.0+/-1.5 (68.7) | 41.5+/-1.5 (41.4) |
| C14 | (1.3) | 95.0 min (97.5) | 5.0 max (2.2) | 31.0+/-1.5 (30.5) | 49.0+/-1.5 (48.9) |
| C16 | 2.0 max (0.3) | 2.0 max (1.4) | 95.0 min (97.4) | 1.0 max (0.8) | 9.5+/-1.5 (9.7) |
| C18 & Higher | | | 1.0 max (0.3) | | 0.1 max (0.0) |
| CAS No. | 112-18-5 | 112-75-4 | 112-69-6 | 112-18-5 112-75-4 | 112-18-5 112-75-4 112-69-6 |

Table 14.60: Occidental Ethanolamines (27)

Ethanolamines Products, Grades and Specifications

| Specifications | MEA 99 | DEA 99 | TEA 85 | TEA 97 HC |
|----------------------------|-----------|-----------|-----------|-----------|
| Monoethanolamine, wt. % | 99.0 min. | 1.0 max. | 0.5 max. | 0.5 max. |
| Diethanolamine, wt. % | 0.5 max. | 98.5 min. | 15.0 max. | 3.0 max. |
| Triethanolamine, wt. % | - | 1.0 max. | 85.0 min. | 97.0 min. |
| Color (APHA), max. | 15 | 15 | 50 | 250 |
| Apparent equivalent wt. | 61.0-62.0 | 104-106 | 140-145 | 145-150 |
| Water, wt. % max. | 0.3 | 0.15 | 0.2 | 0.2 |
| Miscellaneous Grades | PEA 60 | PEA 85 | | |
| Monoethanolamine, wt. % | 5 max. | 2 max. | | |
| Diethanolamine, wt. % | 40 max. | 15 max. | | |
| Triethanolamine, wt. % | 60 min. | 85 min. | | |
| Ethylene glycol, wt. % | 5 max. | 2 max. | | |
| Heavy ends & others, wt. % | 4 max. | 4 max. | | |
| Color (APHA) | 1000 | 1000 | | |
| Water, wt. % max. | 2 | 1.5 | | |

Low Freeze Grades

Ethanolamines have relatively high freezing points, and in winter, especially in northern climates, they can become too viscous to pump. For customers in

these areas whose applications are not sensitive to water, Oxy-Chem offers each ethanolamine in a "Low Freeze" grade. Low freeze grade ethanolamines are produced by the addition of 15

percent by weight of deionized water. They are blended in the delivery vessels prior to each shipment, and therefore, are not stored as finished products.

| Low Freeze Grades | MEA 99 LFG | DEA 99 LFG | TEA 85 LFG | TEA 97 LFG |
|-------------------------|------------|------------|------------|------------|
| Monoethanolamine, wt. % | 84.0 min. | 0.9 max. | 0.5 max. | 0.5 max. |
| Diethanolamine, wt. % | 0.5 max. | 83.5 min. | 13.0 max. | 2.7 max. |
| Triethanolamine, wt. % | - | 0.9 max. | 72.0 min. | 83.0 min. |
| Color (APHA), max. | 25 | 25 | 50 | 250 |
| Water, wt. % max. | 15.5 | 15.5 | 15.5 | 15.5 |
| Freezing point, (°C) | -12 | 1 | -5.5 | -5.5 |

(continued)

Table 14.60: (continued)

Compatibility

| Acceptable Metals | Acceptable Non-Metals |
|-------------------------|----------------------------------------------------------|
| Carbon steel (to 80°F) | Butadiene-acrylonitrile (NBR, Buna-N®) (MEA only) |
| Copper (to 80°F) | Carbon-graphite, resin impregnated |
| Hastelloy B® | Chlorinated polyether (TEA only) |
| Hastelloy C® | Epoxy compounds |
| Inconel® | Ethylene propylene diene (EPDM) |
| Monel® | Ethylene-terefluoroethylene (ETFE, Tefzel®) |
| Nickel | Fluorinated ethylene propylene (FEP) |
| Nickel resist | Fluoroelastomers (FKM, Viton A®, Fluorel®) |
| 304 Stainless steel | Modified phenylene oxide (Noryl®) |
| 316 Stainless steel | Natural rubber |
| 20 Cb 3 Stainless steel | Polybutadiene (Isoprene) |
| Tantalum | Polyamides (Nylon® 12, Nylon® 66) |
| Titanium | Polychloroprene (Neoprene®) |
| | Polyester terephthalate (PET) |
| | Perfluoroalkoxy (PFA) |
| | Perfluoroelastomers (FPM, Kalrez®, Chemraz®, Kel-F®) |
| | Polypropylene (except TEA) |
| | Polysulfone (except TEA) |
| | Polyvinylidene fluoride (PVDF, Kynar®) (TEA only) |
| | Vinyl ester |

Technical Data

| Physical Properties | MEA | DEA | TEA |
|-----------------------------------------|------------------|--------------------|-------------------|
| Chemical formula | $H_2NCH_2CH_2OH$ | $HN(CH_2CH_2OH)_2$ | $N(CH_2CH_2OH)_3$ |
| Molecular weight, (g/mol) | 61.08 | 105.14 | 149.19 |
| Acidity/alkalinity, (pH) | 11.5-12.2 | 10-12 | 10-12 |
| Boiling point @ 760 mm Hg, (°C/°F) | 170/338 | 268/514 (decomp.) | 335/635 (decomp.) |
| Critical pressure, (Atmos.) | 44.1 | 32.3 | 24.2 |
| Critical temperature, (°C) | 341.3 | 442.1 | 514.3 |
| Coefficient of cubical expansion, (/°C) | 0.00078 | 0.00065 | 0.00055 |
| applicable range, (°C) | 20-30 | 30-40 | 20-30 |
| Density @ 20°C, (lbs/gal) | 8.487 | 9.104 (@30°C/20°C) | 9.354 |
| @ 25°C, (g/ml) | 1.008 | 1.093 | 1.120 |
| Dielectric constant - liquid | 37.7 | 22.81 | 29.36 |
| Equivalent weight, (g/mol) | 61-63 | 104-108 | 140-149 |
| Explosive limits in air, vol. % - lower | 5.5 | - | - |
| - upper | 17.0 | - | - |
| Evaporation rate @ 25 °C | | | |
| n-butyl acetate - (=1.00) | <0.001 | <0.005 | 0.015 |
| n-butyl acetate - (155 seconds) | | 8.5 hrs. | 2.9 hrs. |

(continued)


Table 14.60: (continued)

| Physical Properties | MEA | DEA | TEA |
|-------------------------------------------------------------------------------------|-------------|----------------------|---------------|
| Flammability rating | combustible | non-flammable | non-flammable |
| Flash point, (°C/°F) - Cleve. Open Cup | 91/195 | 138/280 | 191/375 |
| - Tag Closed Cup | 85/186 | 146/295 | 194/382 |
| - Pensky-Martin CC | - | 166/330 | 210/410 |
| Fire point, (°C/°F) | 93/200 | 149/300 | 210/410 |
| Freezing point, (°C/°F) | 10.3/50.5 | 28/82 | 21/70 |
| Heat of fusion, (BTU/lb ²) | 144.35 | 102.75 | 78.41 |
| Auto ignition temperature, (°C/°F) | 410/770 | 662/1224 | 350/662 |
| Kauri-butanol value | NA | NA | NA |
| Latent heat of vaporization @ B.P. | | | |
| - (cal/g) | 199 | - | - |
| - (BTU/lb) | 360 | 287 | 176 |
| | | (@166°C, 13.2 mm Hg) | |
| Refractive index - liquid N 20°D | 1.4540 | 1.4770 | 1.4835 |
| Solubility @ 20°C, (% by wt) - In H ₂ O | 100 | 95.4 | 100 |
| - H ₂ O In | 100 | - | 100 |
| Solubility parameter, [Hildebrand units, (cal/cm ³) ^{1/2}] | 13.9 | 14.3 | 15.4 |
| Specific gravity, (20°C/20°C) | 1.018 | 1.092 (@30°C/20°C) | 1.126 |
| Specific heat, (cal/gm/°C, BTU/lb/°F) - liquid, (20°C) _s | 0.644 | 0.593 | 0.555 |
| Surface tension, (dynes/cm), Air @ 25°C | 48.16 | 48.00 | 46.07 |
| Thermal conductivity, liquid @ 35°C (BTU-ft/ft ² /hr/°F) | 0.154 | 0.127 | - |
| Vapor density, (g/L) air=1, (lbs/ft ³) | 2.1 | 3.65 | 5.14 |
| Vapor pressure @ 20°C, (mm. Hg) | 0.67 | <0.01 | <0.01 |
| Viscosity, liquid @ 25°C, (cps) | 19 | 580 | 591 |
| Antoine constants -A | 8.02401 | 8.12303 | 8.2054 |
| -B | 1921.6 | 2315.46 | 2739.58 |
| -C | 203.2 | 173.3 | 175.7 |


(continued)

Table 14.60: (continued)

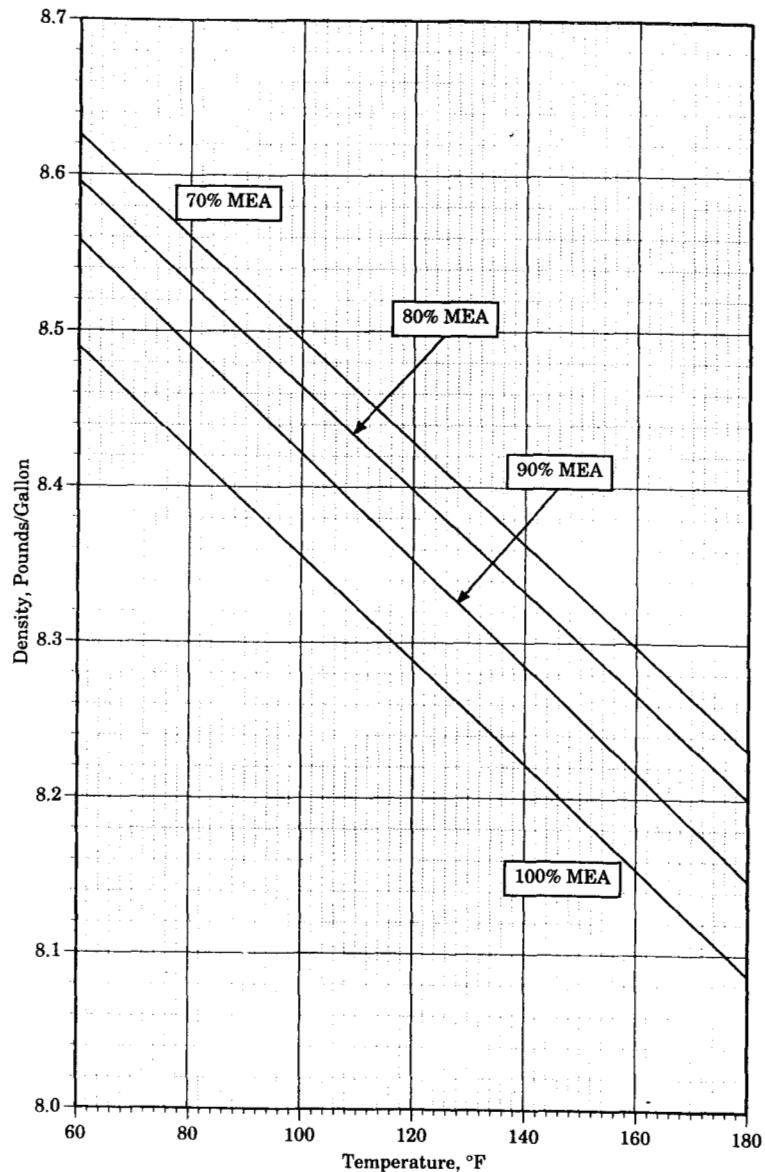Density vs. Temperature for Aqueous Solutions of Monoethanolamine



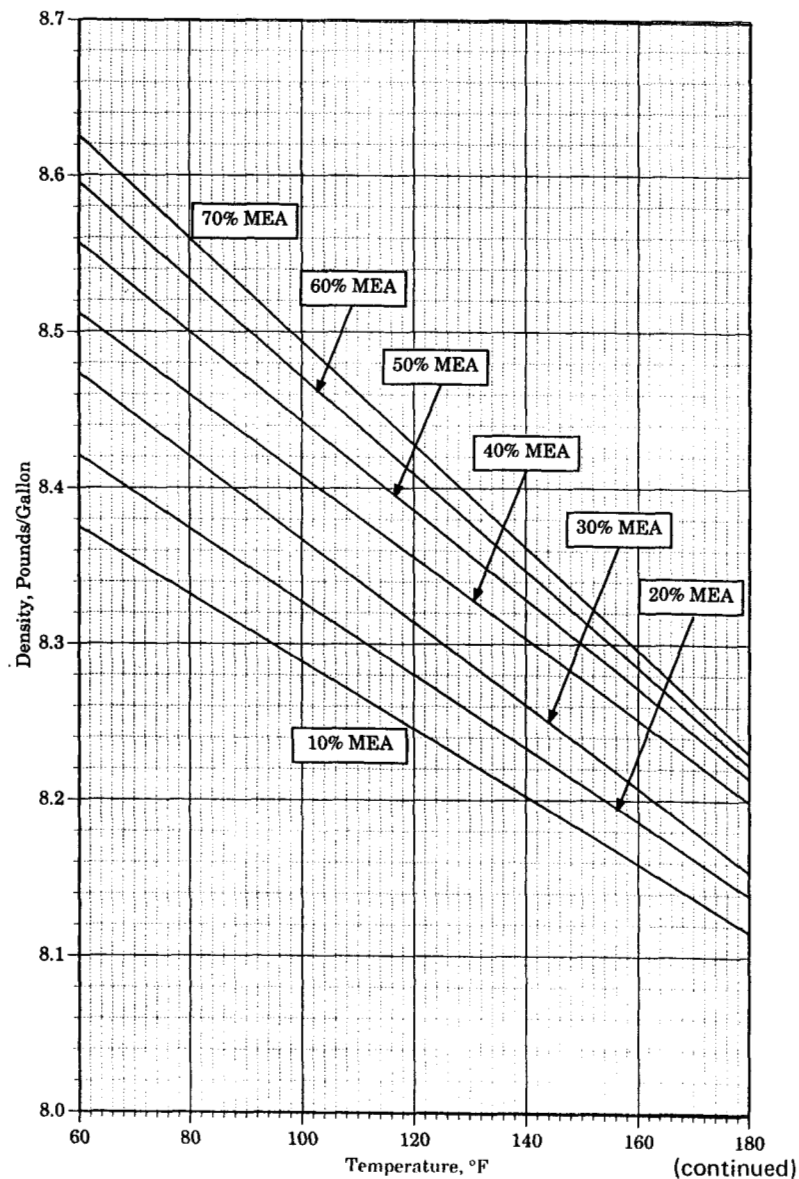
Density vs. Temperature for Aqueous Solutions of Monoethanolamine




(continued)

Table 14.60: (continued)

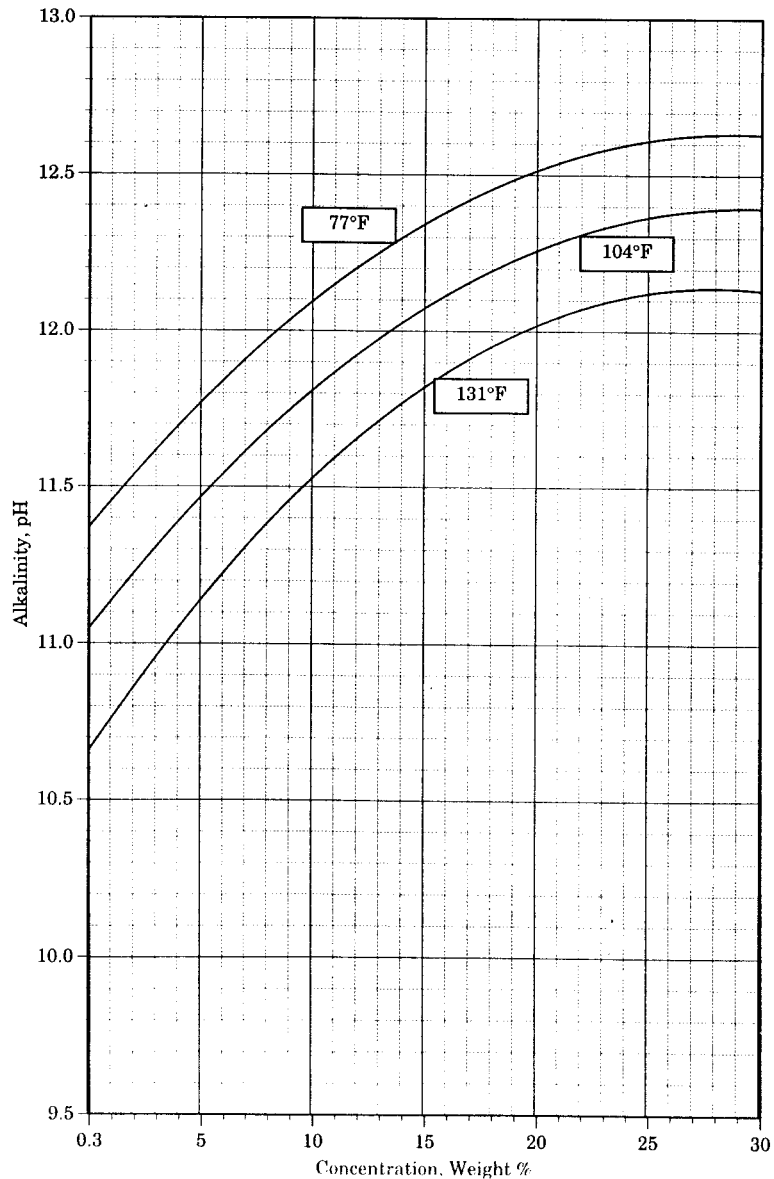pH vs. Concentration for Aqueous Solutions of Monoethanolamine



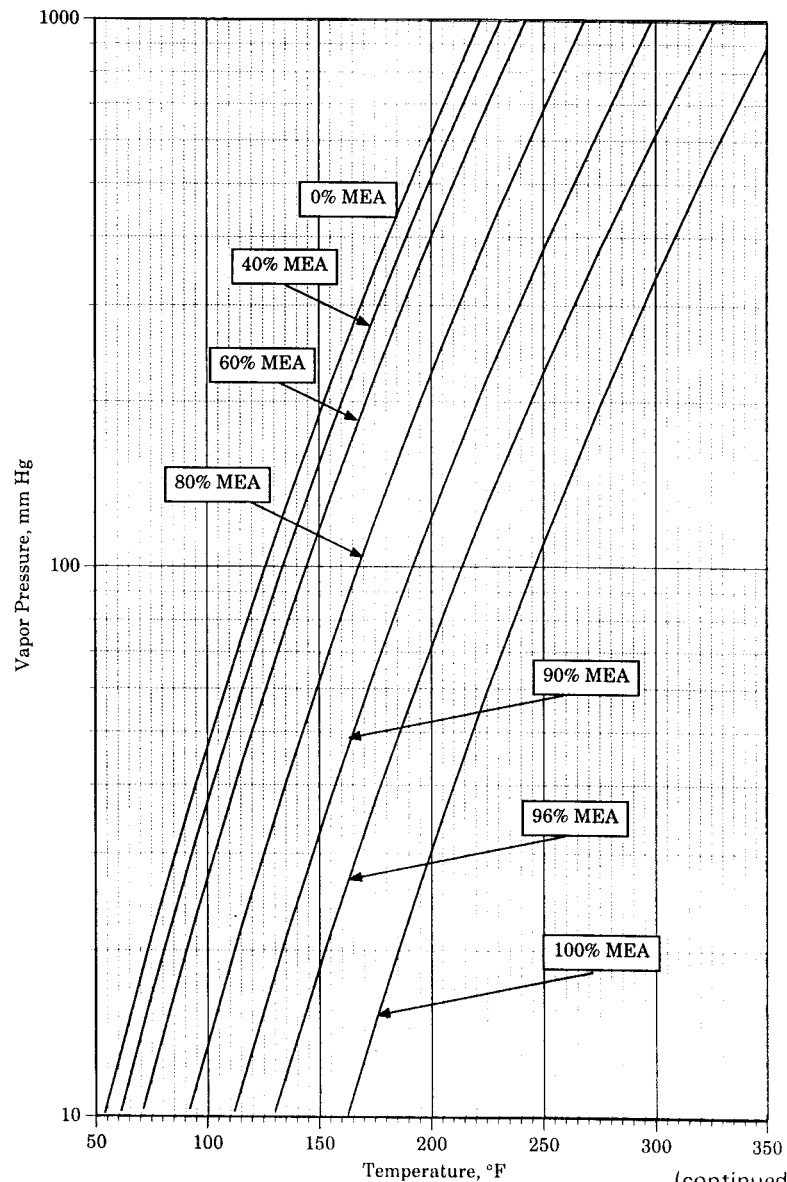
Vapor Pressure vs. Temperature for Aqueous Solutions of Monoethanolamine




(continued)

Table 14.60: (continued)

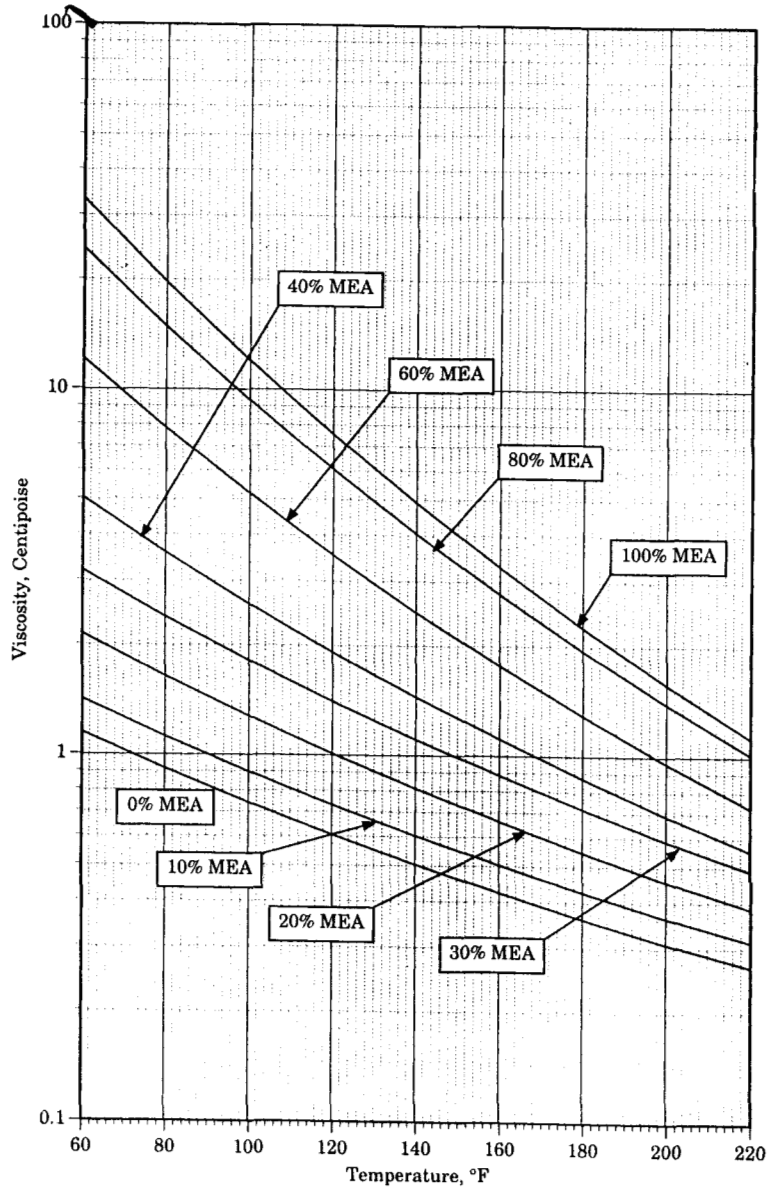Viscosity vs. Temperature for Aqueous Solutions of Monoethanolamine



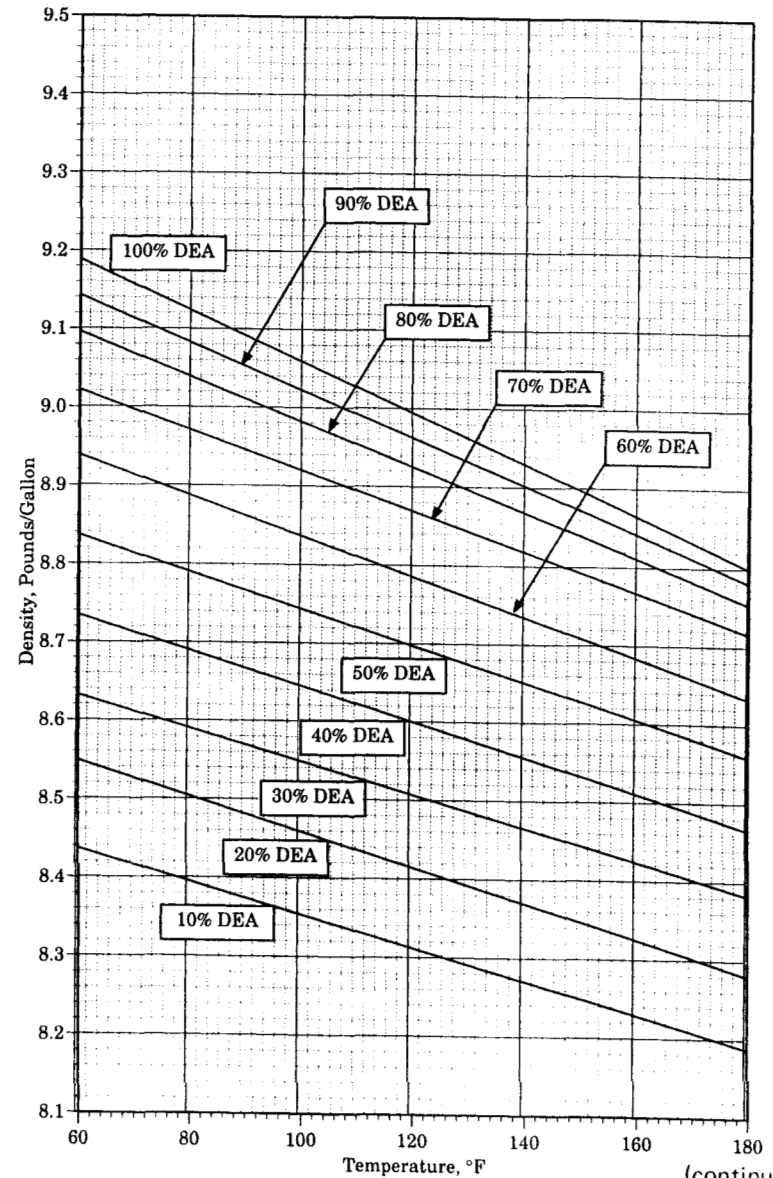
Density vs. Temperature for Aqueous Solutions of Diethanolamine




(continued)

Table 14.60: (continued)

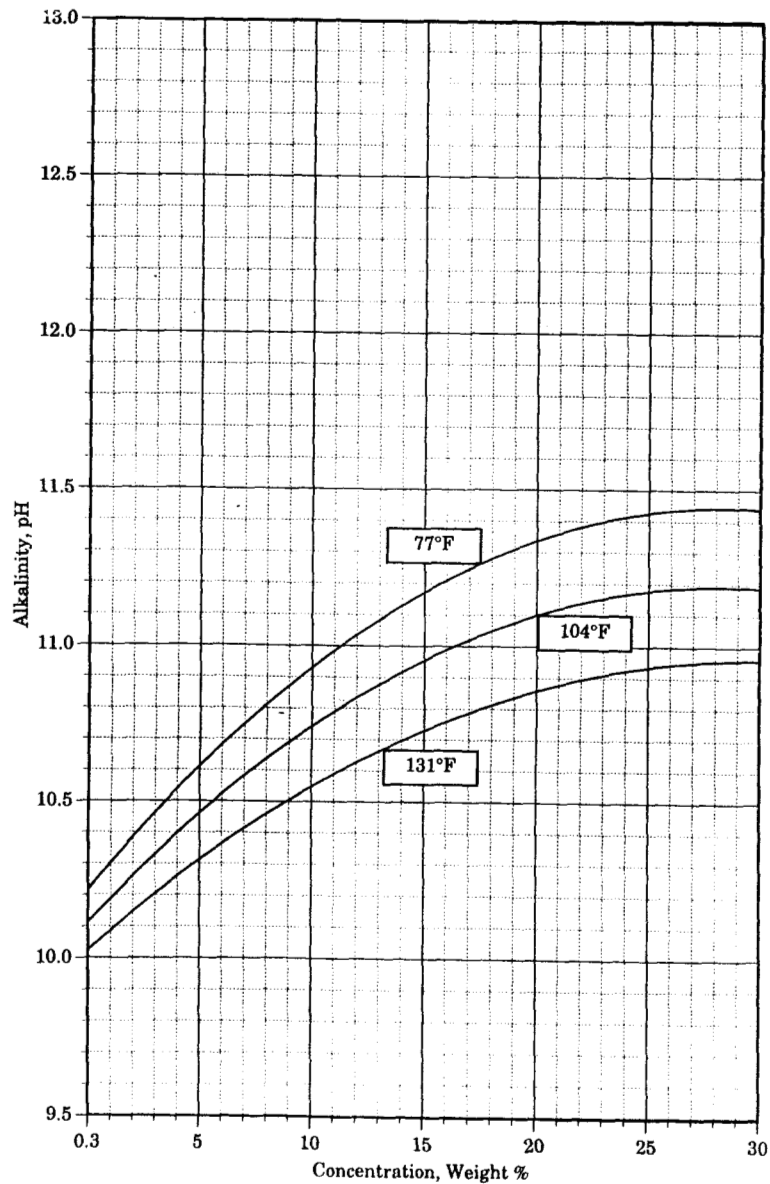pH vs. Concentration for Aqueous Solutions of Diethanolamine



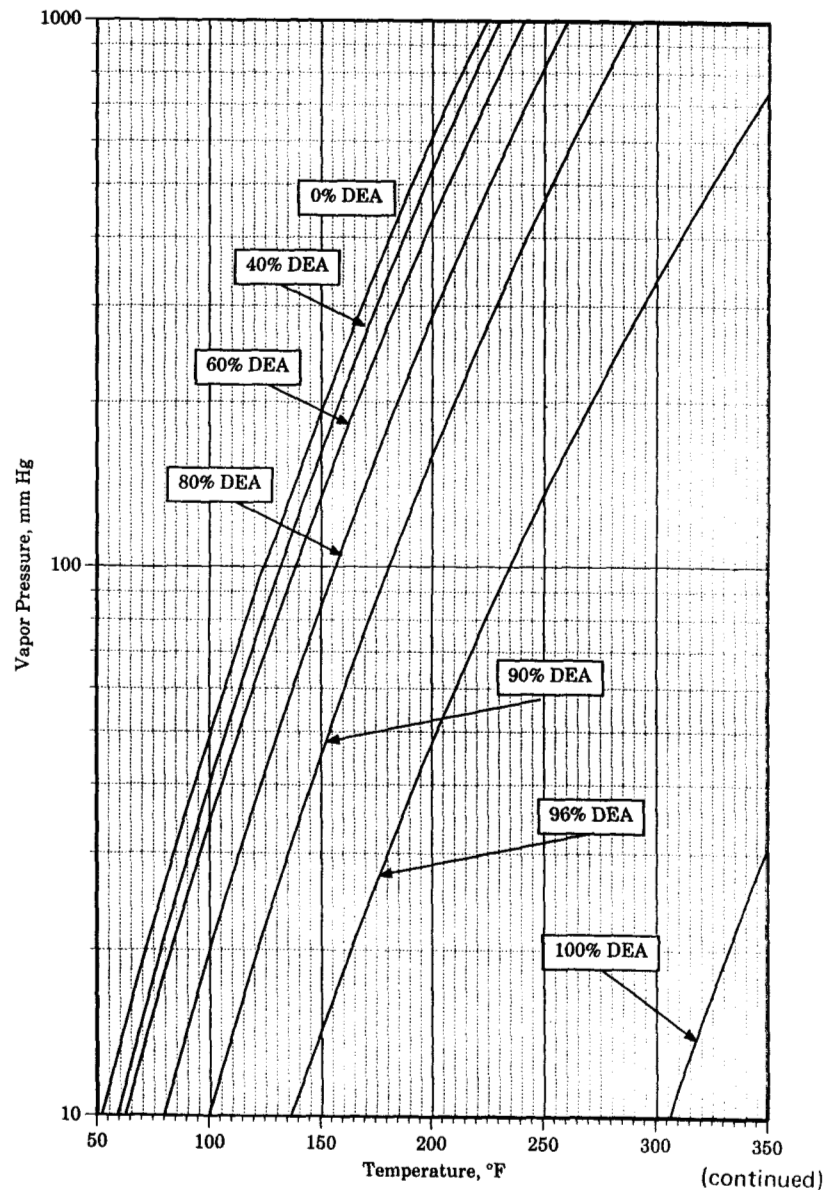
Vapor Pressure vs. Temperature for Aqueous Solutions of Diethanolamine




(continued)

Table 14.60: (continued)

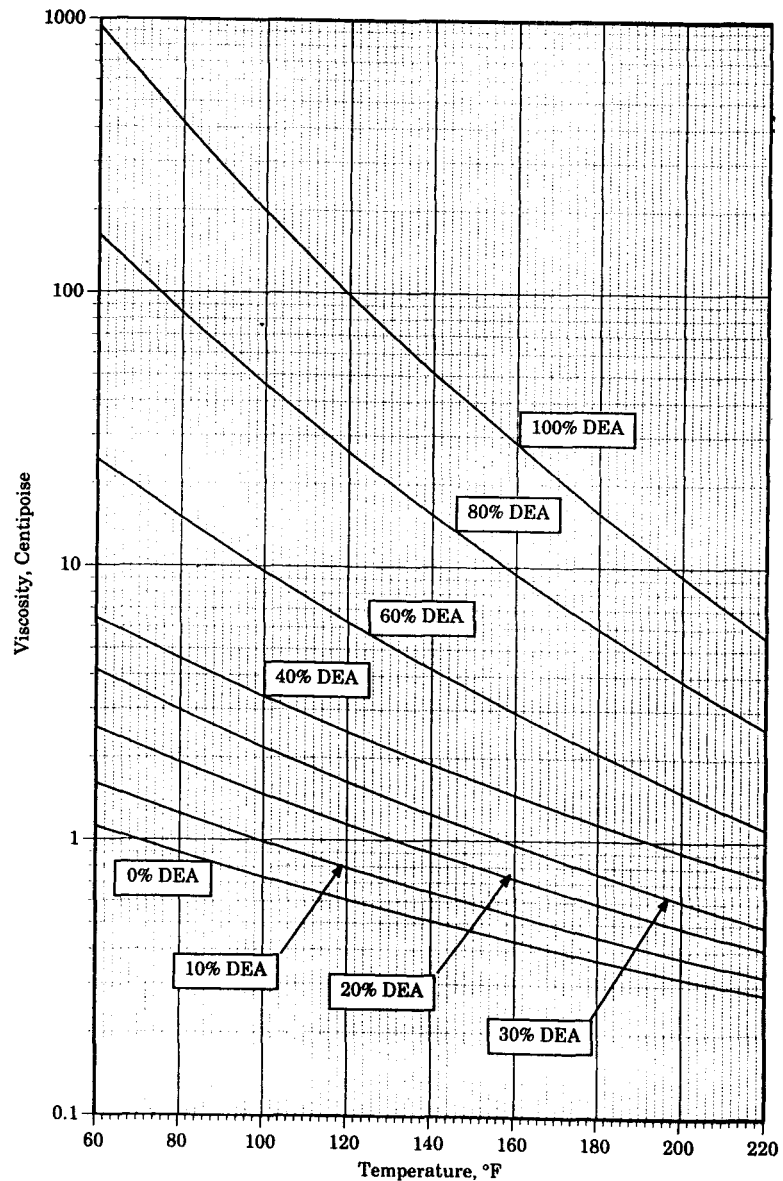Viscosity vs. Temperature for Aqueous Solutions of Diethanolamine



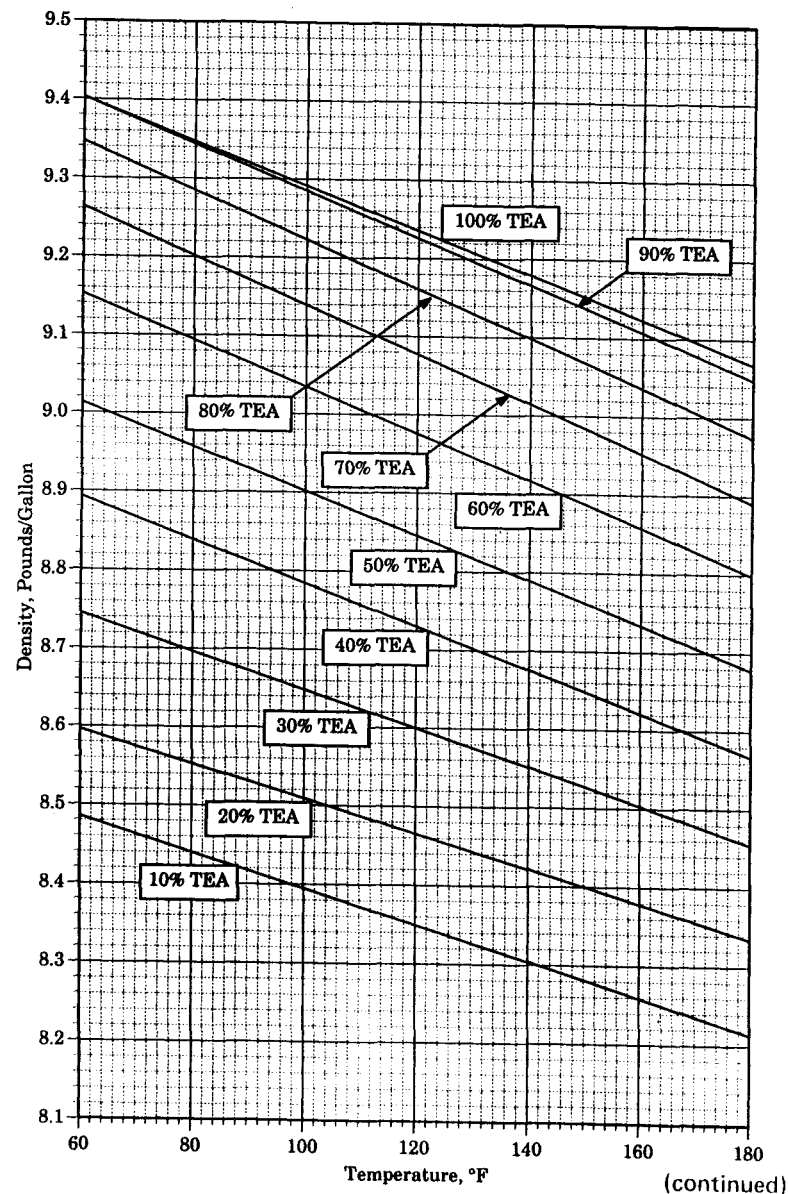
Density vs. Temperature for Aqueous Solutions of Triethanolamine




(continued)

Table 14.60: (continued)

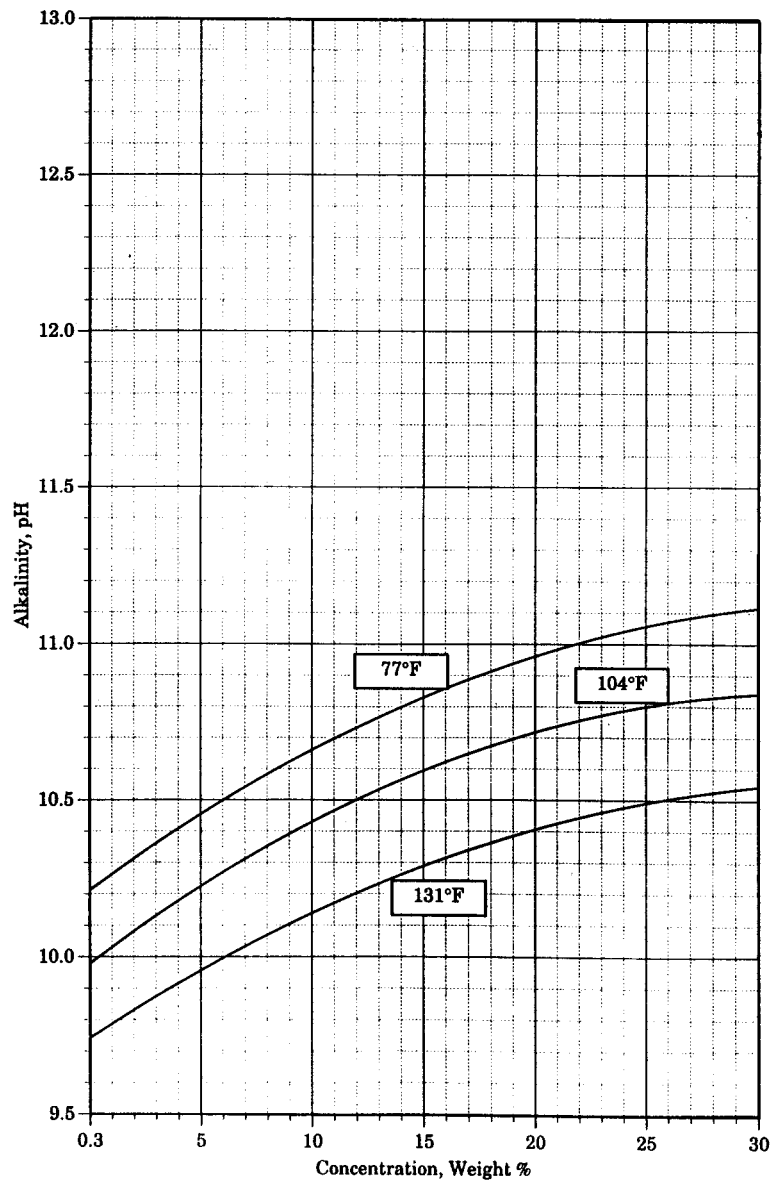pH vs. Concentration for Aqueous Solutions of Triethanolamine



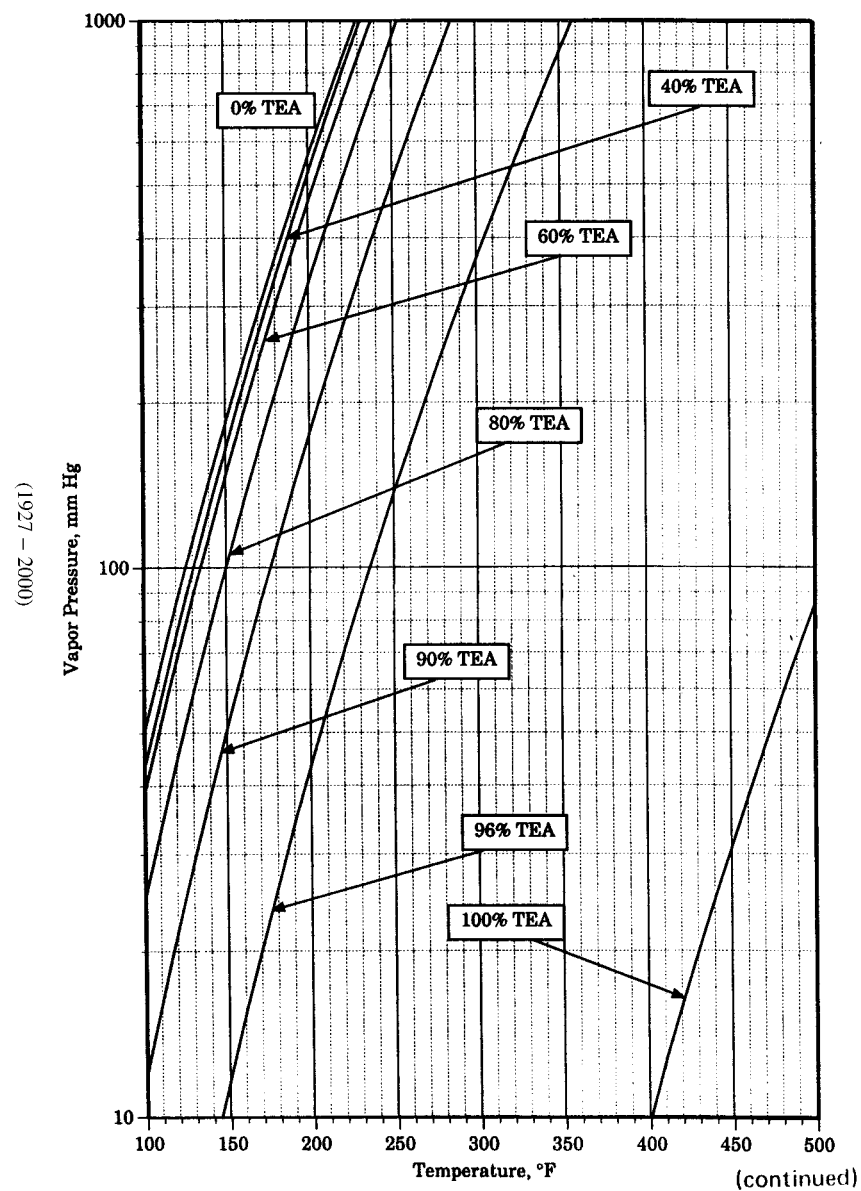
Vapor Pressure vs. Temperature for Aqueous Solutions of Triethanolamine



(continued)

Table 14.60: (continued)

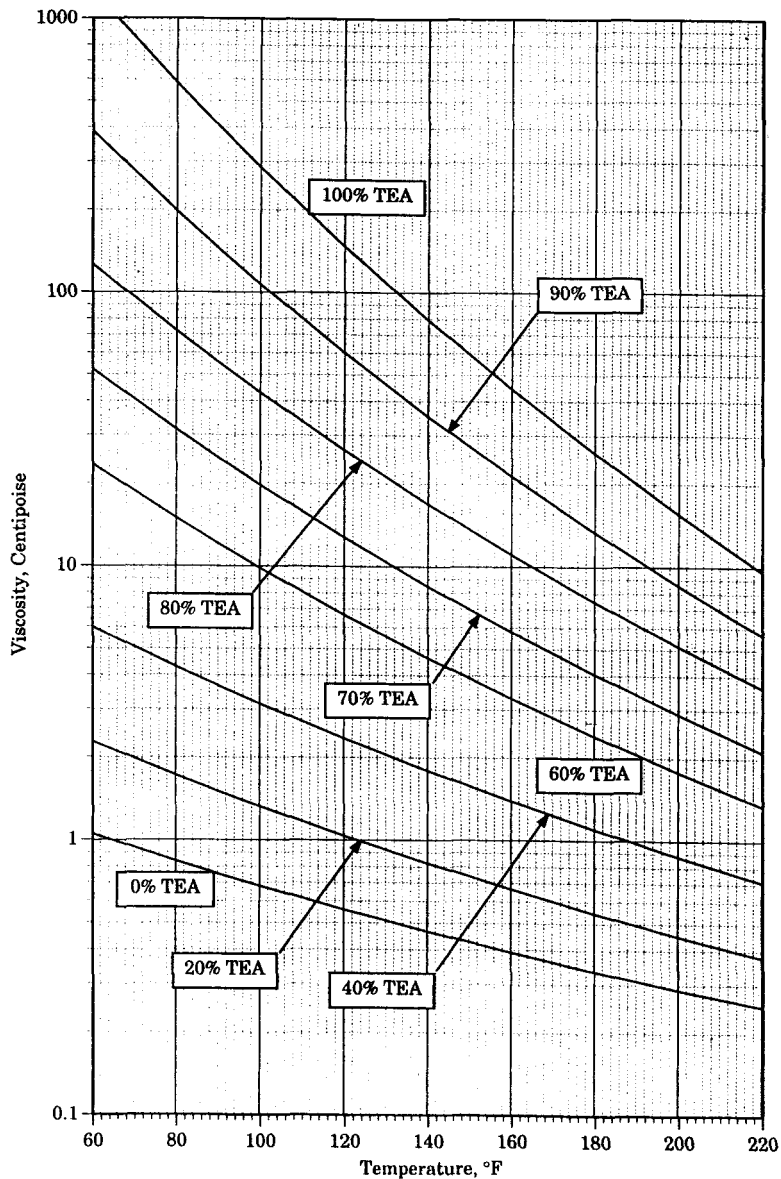Viscosity vs. Temperature for Aqueous Solutions of Triethanolamine



Freezing Point vs. Concentration for Aqueous Ethanolamine Solutions

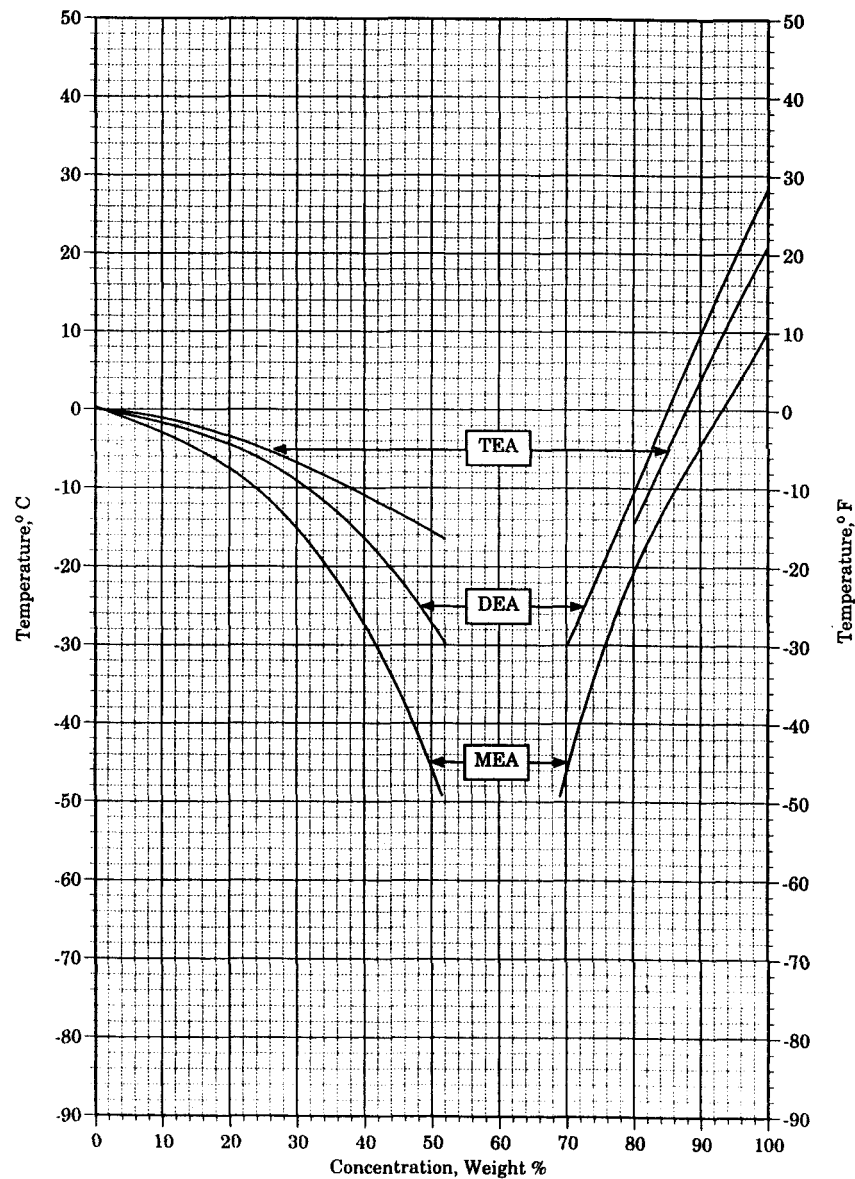


Table 14.61: Union Carbide Ethyleneamines (19)

Typical Physical Properties

| Ethyleneamine | Molecular Weight | Apparent Specific Gravity at 20/20°C | Freezing Point, °C | Vapor Pressure at 20°C, mm Hg |
|----------------------------|-----------------------|--------------------------------------|--------------------|-------------------------------|
| Ethylenediamine | 60.10 | 0.898 | 11 | 10.40 |
| Diethylenetriamine | 103.17 | 0.952 | -39 | 0.08 |
| Triethylenetetramine | 146.24 ⁽¹⁾ | 0.980 | -35 | <0.01 |
| Tetraethylenepentamine UHP | 189.30 ⁽¹⁾ | 0.994 | -46 ⁽⁶⁾ | <0.01 |
| Heavy Polyamine X | 275 ⁽²⁾ | 1.015 | -32 ⁽⁶⁾ | <0.01 |
| Piperazine, 65% | 86.14 ⁽³⁾ | 1.036 ⁽⁴⁾ | 41 | 6.28 |
| Piperazine, Anhydrous | 86.14 | 0.877 ⁽⁵⁾ | 110 | 0.10 ⁽⁷⁾ |
| Aminoethylpiperazine | 129.21 | 0.986 | -17 | <0.01 |
| Aminoethylethanolamine | 104.15 | 1.030 | -45 ⁽⁶⁾ | <0.01 |

| Ethyleneamine | Boiling Point, °C | | | Δ Boiling Point/Δp, 750-770 mm, °C per mm Hg | Absolute Viscosity at 20°C, cP |
|----------------------------|--------------------|--------------------|------------------|----------------------------------------------|--------------------------------|
| | 760 mm Hg | 50 mm Hg | 10 mm Hg | | |
| Ethylenediamine | 117.0 | 47.8 | 19.4 | 0.043 | 1.80 |
| Diethylenetriamine | 206.9 | 123.3 | 88.9 | 0.052 | 7.16 |
| Triethylenetetramine | 277 ⁽⁸⁾ | 183 | 144 | 0.058 | 26.0 |
| Tetraethylenepentamine UHP | 288 ⁽⁸⁾ | 215 | 184 | 0.045 | 83.1 |
| Heavy Polyamine X | — | 279 ⁽⁸⁾ | 236 | — | 460.7 |
| Piperazine, 65% | 116 | 54 | 27 | 0.036 | 22.5 ⁽¹⁰⁾ |
| Piperazine, Anhydrous | 146.1 | — ⁽⁹⁾ | — ⁽⁹⁾ | 0.037 | 0.73 ⁽¹¹⁾ |
| Aminoethylpiperazine | 221.0 | 134.3 | 100.9 | 0.056 | 15.4 |
| Aminoethylethanolamine | 242.8 | 161.3 | 127.0 | 0.049 | 140.6 |

| | Electrical Conductivity at 25°C, micromhos/cm | Ionization Constant, K ₁ , at 25°C in Water | Dielectric Constant at 23°C | Solubility in Water at 20°C, % by wt |
|----------------------------|-----------------------------------------------|--------------------------------------------------------|-----------------------------|--------------------------------------|
| Ethylenediamine | 7.52 | 0.73 x 10 ⁻⁴ | 13.29 | 100 |
| Diethylenetriamine | 0.86 | 0.65 x 10 ⁻⁴ | 12.22 | 100 |
| Triethylenetetramine | 0.24 | 0.63 x 10 ⁻⁴ ⁽²⁾ | 10.24 | 100 ⁽¹²⁾ |
| Tetraethylenepentamine UHP | 0.091 | 0.72 x 10 ⁻⁴ ⁽²⁾ | 9.32 | 100 ⁽¹²⁾ |
| Heavy Polyamine X | 0.092 | 0.95 x 10 ⁻⁴ ⁽²⁾ | 8.72 | 100 ⁽¹²⁾ |
| Piperazine, 65% | 49.4 ⁽¹⁰⁾ | 0.43 x 10 ⁻⁴ ⁽³⁾ | — ⁽⁹⁾ | 100 ⁽¹⁰⁾ |
| Piperazine, Anhydrous | — ⁽⁹⁾ | 0.43 x 10 ⁻⁴ | — ⁽⁹⁾ | 14 |
| Aminoethylpiperazine | 0.007 | 0.40 x 10 ⁻⁴ | 7.13 | 100 |
| Aminoethylethanolamine | 0.63 | 0.31 x 10 ⁻⁴ | 19.13 | 100 |

(continued)

Table 14.61: (continued)

| | Refractive Index, $n_D^{20^\circ\text{C}}$ | Specific Heat at 20°C , cal/g \cdot $^\circ\text{C}$ | Heat of Vaporization at 760 mm Hg, BTU/lb ⁽¹⁵⁾ | Heat of Combustion at 25°C , BTU/lb | Heat of Formation at 25°C , BTU/lb ⁽¹⁶⁾ |
|----------------------------|--------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------|
| Ethylenediamine | 1.457 | 0.68 | 270 | -13251 | -569 |
| Diethylenetriamine | 1.483 | 0.65 | 197 | -13910 | -403 |
| Triethylenetetramine | 1.499 | 0.63 | 162 | -14353 | -162 ⁽¹¹⁾ |
| Tetraethylenepentamine UHP | 1.505 | 0.61 | 162 | -14487 | -139 ⁽¹¹⁾ |
| Heavy Polyamine X | 1.513 | 0.58 | 99 | -14643 | — |
| Piperazine, 65% | — ⁽⁹⁾ | 0.78 ⁽¹³⁾ | 528 | -9261 | — |
| Piperazine, Anhydrous | — ⁽⁹⁾ | 0.63 ⁽¹⁴⁾ | 250 | -14696 | -304 |
| Aminoethylpiperazine | 1.501 | 0.52 | 152 | -14744 | -256 |
| Aminoethylethanolamine | 1.486 | 0.64 | 237 | -12395 | -1193 |

(1) Linear component only

(2) Typical molecular weight

(3) For Piperazine, Anhydrous

(4) At $42^\circ\text{C}/42^\circ\text{C}$ (5) At $130^\circ\text{C}/20^\circ\text{C}$

(6) Pour point

(7) Vapor pressure of the solid

(8) Extrapolated; with decomposition

(9) Solid at this condition

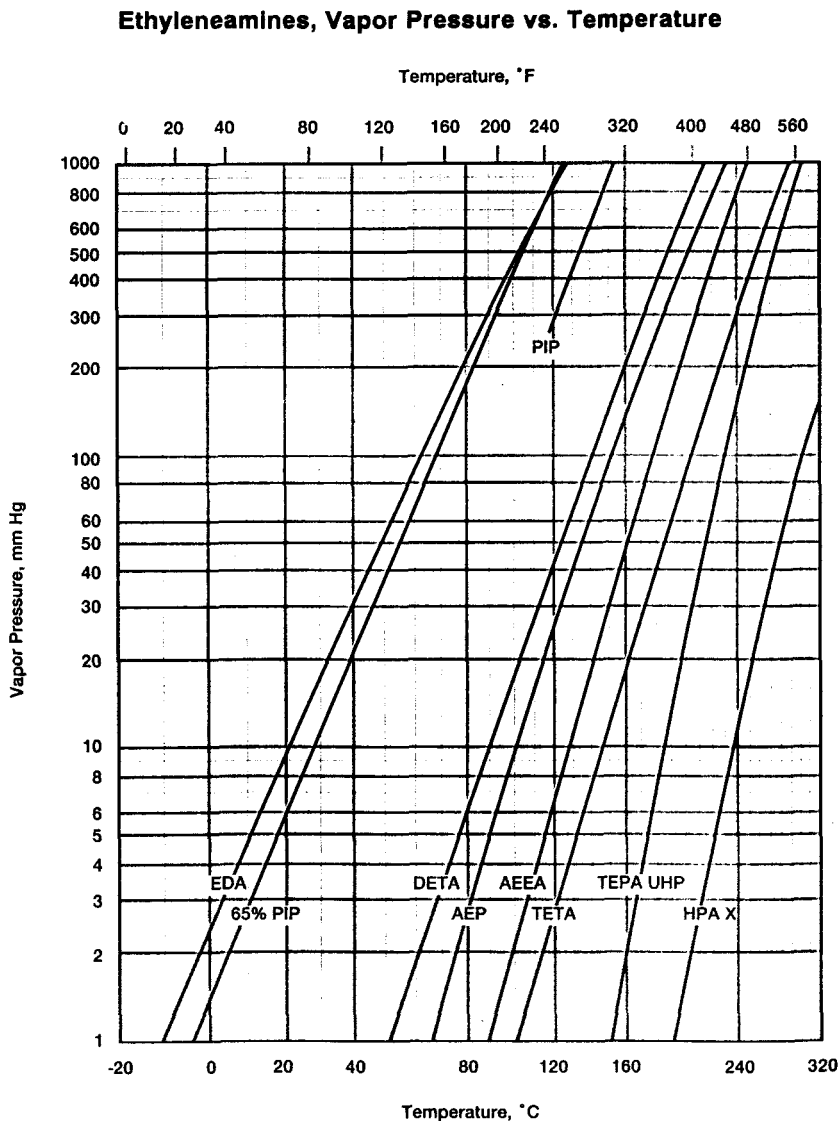
(10) At 42°C (11) At 130°C

(12) Forms hydrate with time

(13) At 42°C ; melting point 36°C , heat of fusion 50.74 cal/g(14) At 130°C ; melting point 109.6°C , heat of fusion 72.83 cal/g

(15) Estimated from vapor pressure using Clausius-Clapeyron equation


(16) Calculated from gross heat of combustion




(continued)

Table 14.61: (continued)

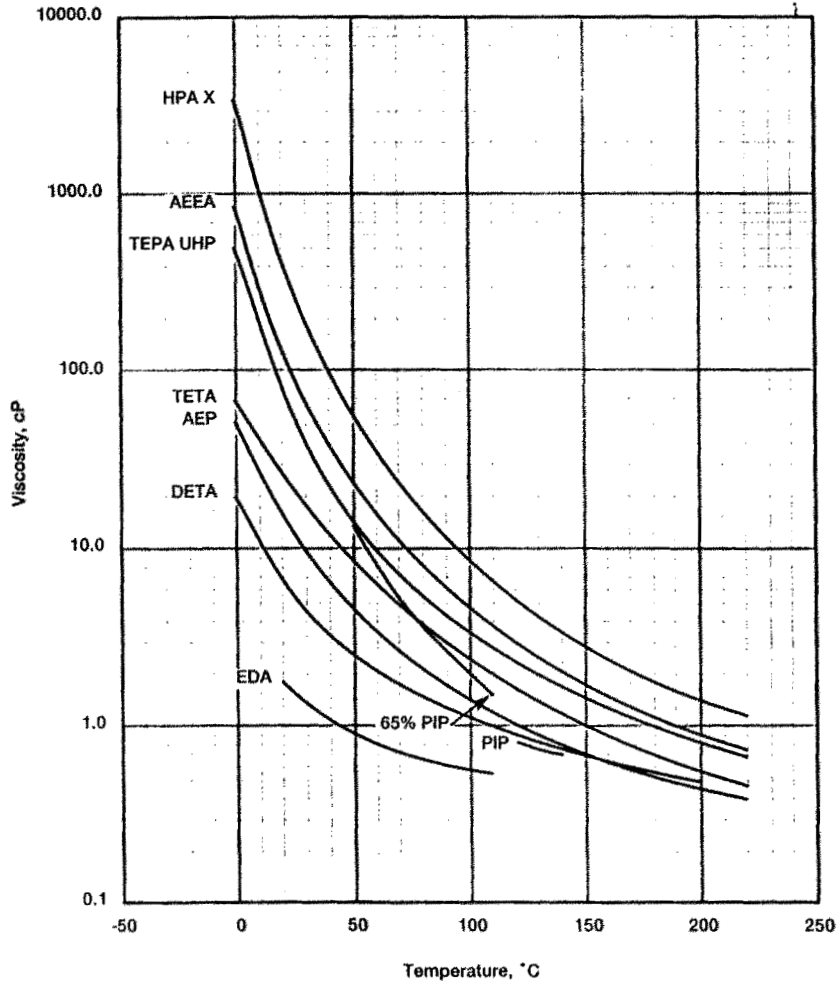Ethyleneamines, Viscosity vs. Temperature



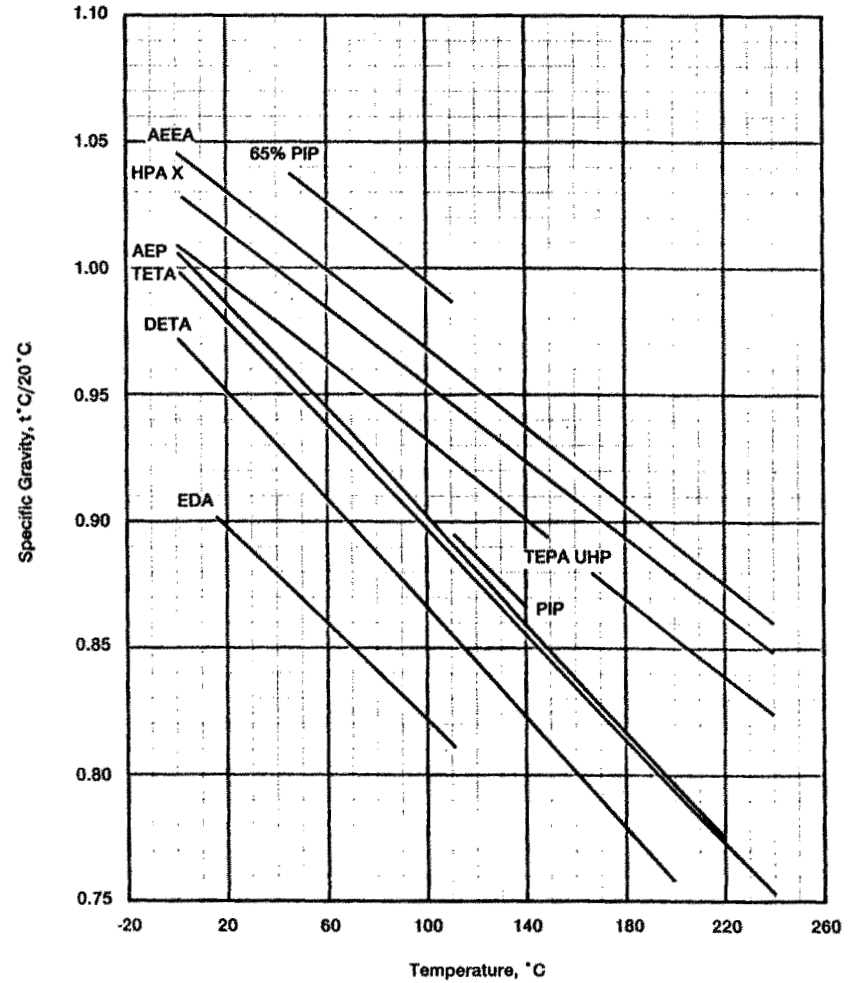
Ethyleneamines, Specific Gravity vs. Temperature




(continued)

Table 14.61: (continued)

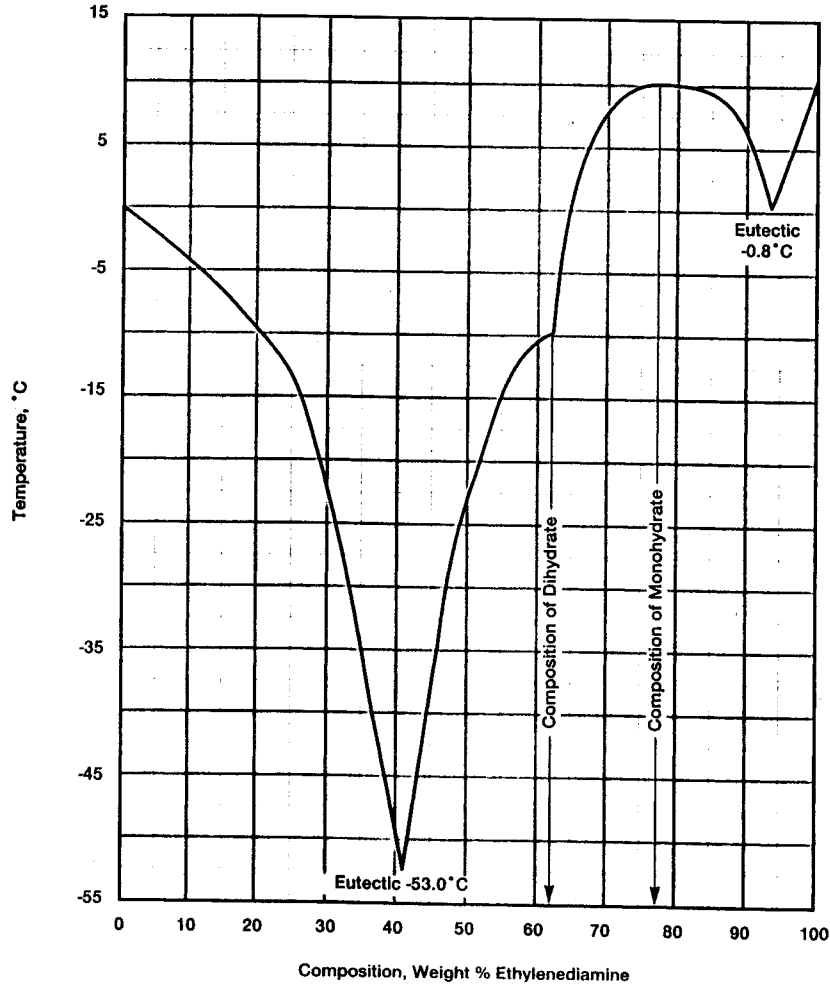Ethylenediamines Aqueous Solutions,
Freezing Point vs. Composition



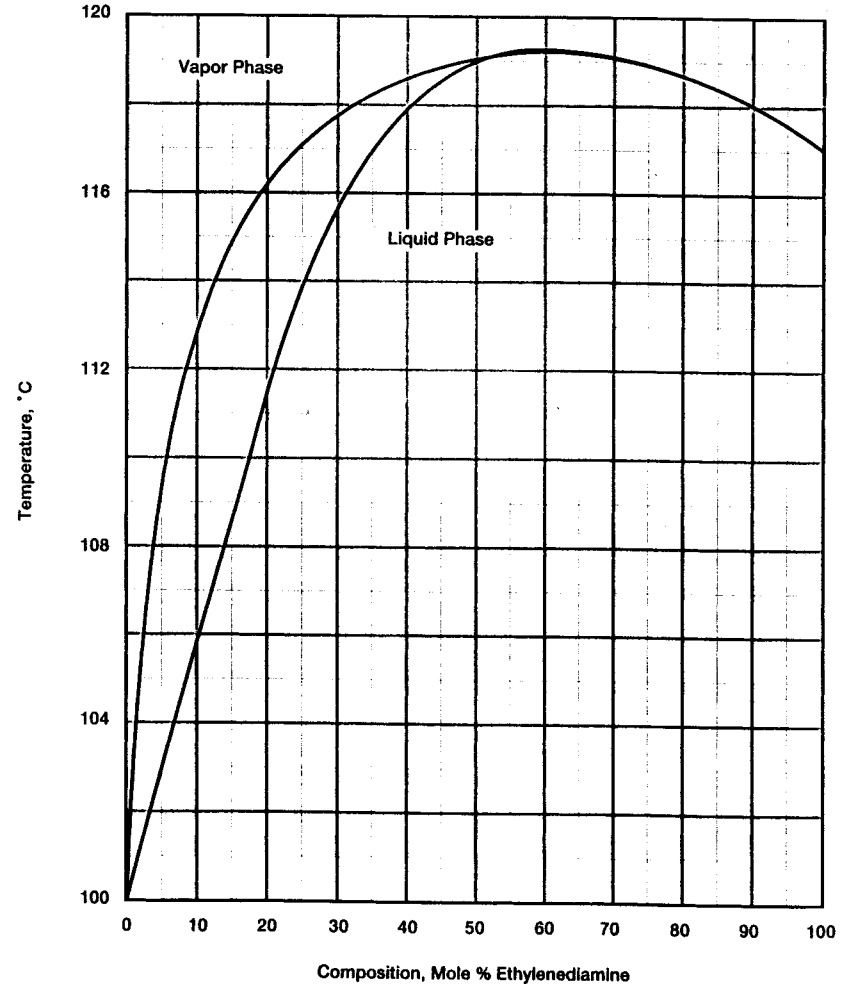
Ethylenediamine Aqueous Solutions,
Vapor-Liquid Equilibria at 760 mm HG




(continued)

Table 14.61: (continued)

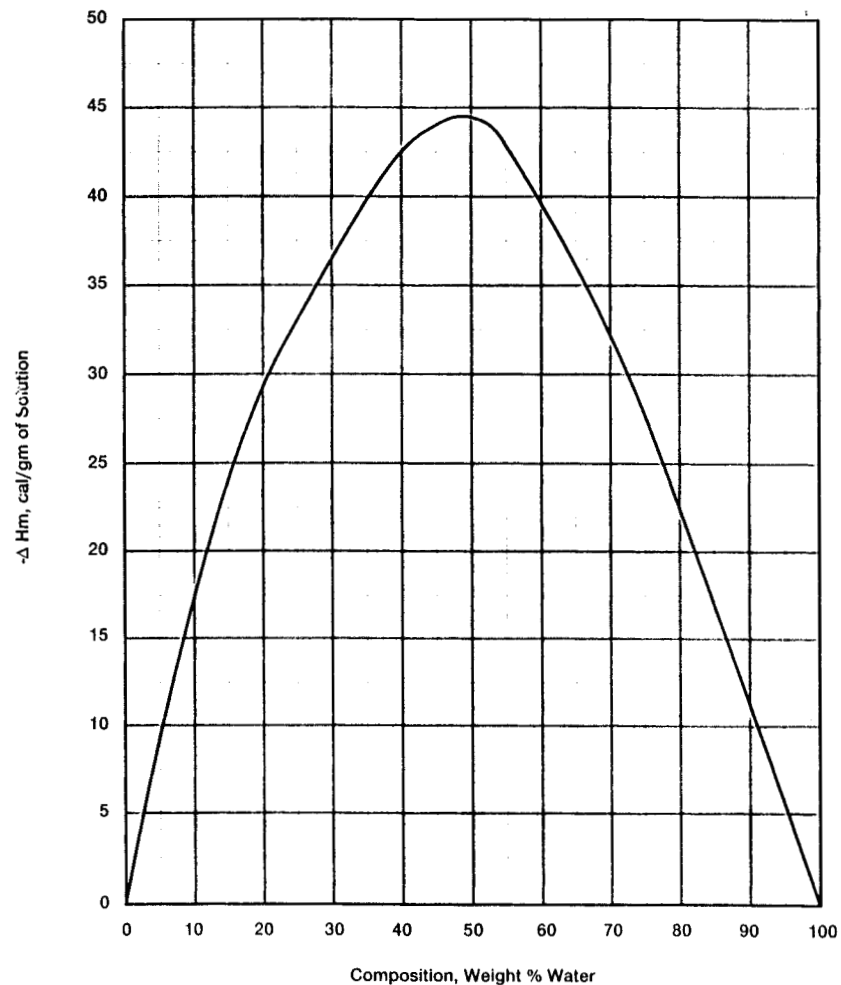Ethylenediamine Aqueous Solutions,
Heat of Solution at 22°C



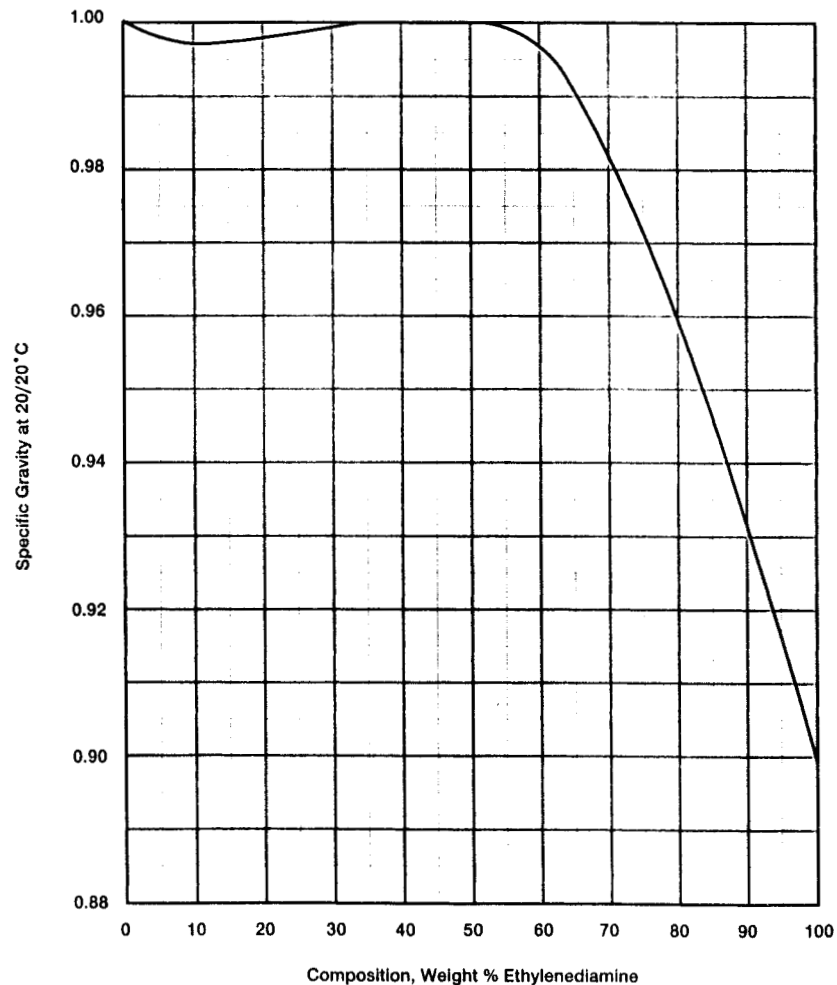
Ethylenediamine Aqueous Solutions,
Specific Gravity vs. Temperature



(continued)

Table 14.61: (continued)

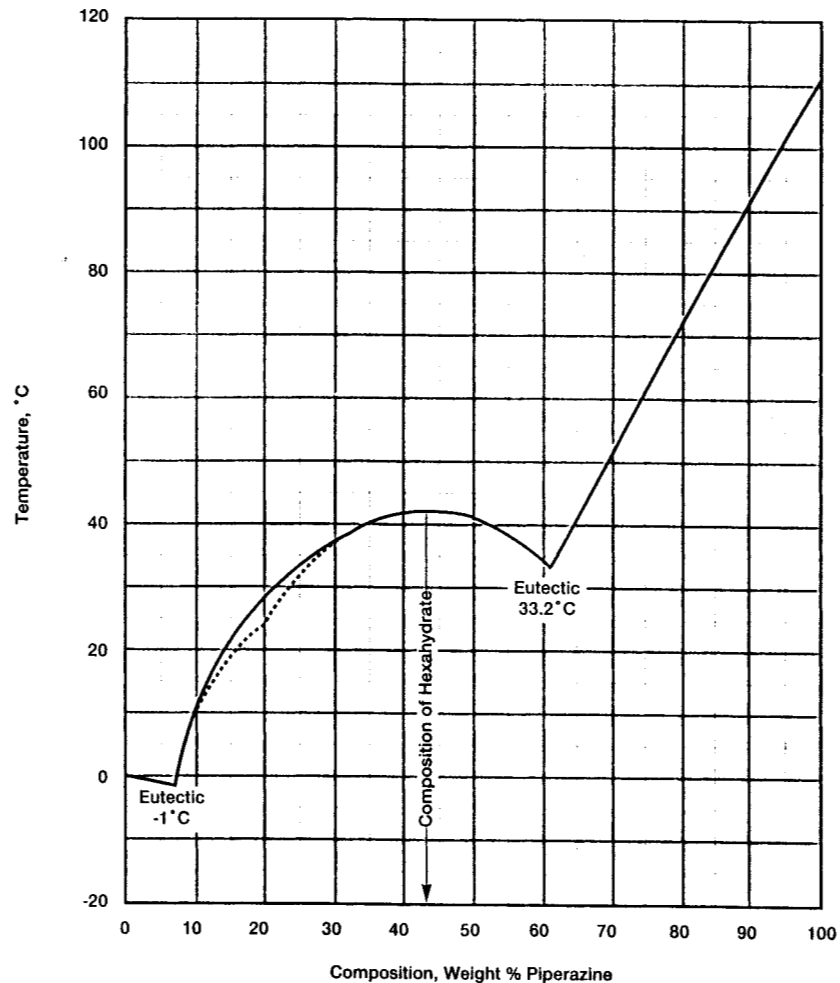**Piperazine Aqueous Solutions,
Freezing Point vs. Composition**



Studies show evidence of a metastable freezing point in the region of 20 wt.% piperazine

**Piperazine Aqueous Solutions,
Vapor-Liquid Equilibria at 760 mm Hg**

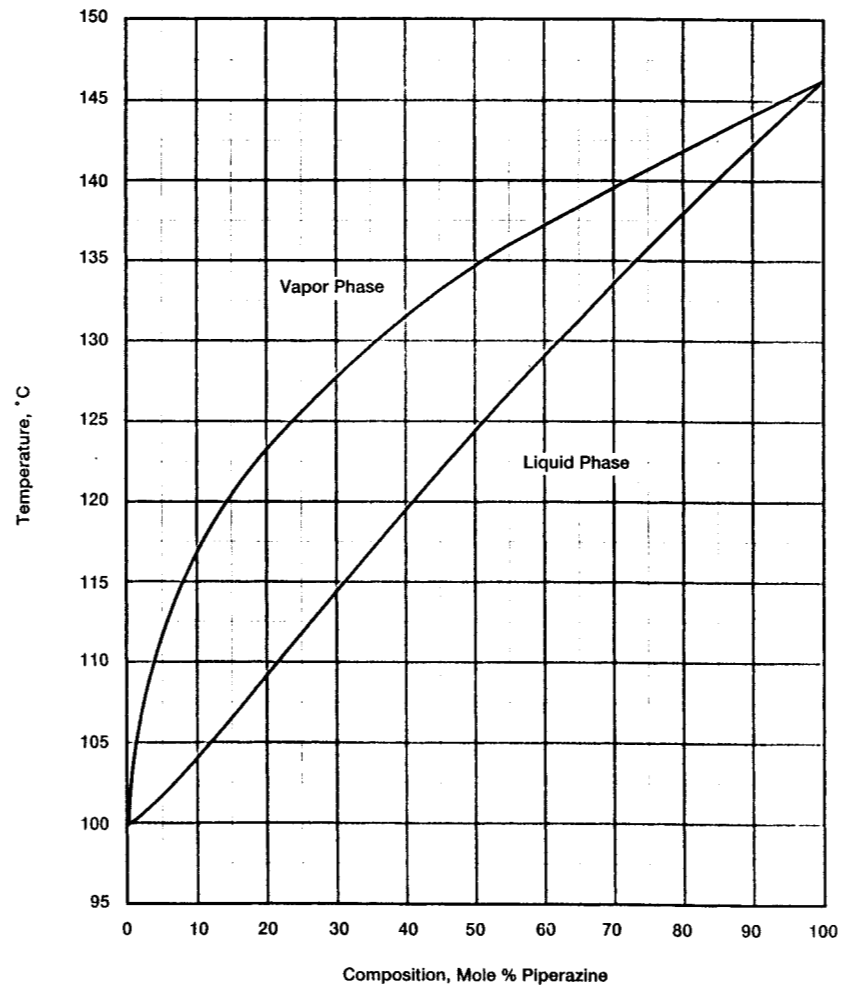


Table 14.62: Union Carbide Ethanolamines (19)

Typical Properties of Union Carbide Ethanolamines
(Determined on Purified Samples)

| | Monoethanolamine | Diethanolamine | Triethanolamine |
|---------------------------------------------------|---------------------|----------------------------|----------------------------|
| Formula | $H_2NCH_2CH_2OH$ | $HN(CH_2CH_2OH)_2$ | $N(CH_2CH_2OH)_3$ |
| Molecular Weight | 61.08 | 105.14 | 149.19 |
| Apparent Sp. Gr. at 20/20°C | 1.0179 | 1.09199 ^(a) | 1.1258 ^(f) |
| ΔSp. Gr./Δt at (20/30°C) | 0.00078 | 0.00065 ^(b) | 0.00055 |
| Boiling Point at 760mm Hg, °C | 170.8 | 268 ^(c) | 335.4 ^(c) |
| at 50mm Hg, °C | 101 | 187 | 245 |
| at 10mm Hg, °C | 71 | 151 | 205 |
| Vapor Pressure at 20°C, mm Hg | <1 | <0.01 | <0.01 |
| Absolute Viscosity at 20°C, cP | 24.1 | — | 921 ^(f) |
| at 30°C, cP | 16.2 | 380 | 404 |
| Freezing Point, °C(°F) | 10.5 (50.9) | 28.0 (82.4) ^(e) | 21.6 (70.9) ^(e) |
| Solubility at 20°C, % by wt | | | |
| In Water | Complete | 96.4 | Complete ^(f) |
| Water In | Complete | — | Complete ^(f) |
| Solubility in Organic Liquids at 25°C, % by wt | | | |
| Acetone | Complete | Complete ^(f) | Complete |
| Benzene | 0.6 | 0.03 | 2 |
| Carbon Tetrachloride | 0.1 | 0.01 | Complete |
| Ethyl Ether | 0.7 | 0.5 | 2 |
| Heptane | 0.1 | 0.03 | <0.03 |
| Methanol | Complete | Complete ^(f) | Complete |
| Surface Tension, Dynes/cm | 48.3 ^(d) | 48.5 ^(g) | 48.9 ^(d) |
| Refractive Index, n_D^{20} | 1.4539 | 1.4747 ^(g) | 1.4852 ^(f) |
| ΔN _D /Δt at 20 to 40°C per °C | 0.00034 | 0.00027 ^(b) | 0.00020 |
| Flash Point, °F | 185 ^(h) | 336 ⁽ⁱ⁾ | 407 ⁽ⁱ⁾ |

(a) At 30/20°C

(b) at 30 to 40°C

(c) Extrapolated (decomposes)

(d) At 25°C

(e) Supercools easily

(f) Supercooled liquid

(g) At 30°C


(h) Determined by ASTM Method D 56, using the Tag Closed Cup

(i) Determined by ASTM Method D 93, using the
Pensky-Martens Closed Cup

(continued)

Table 14.62: (continued)

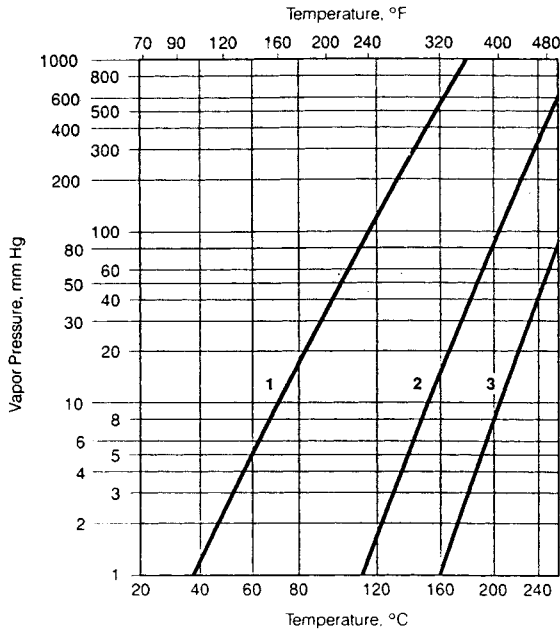
Vapor Pressure of Ethanolamines vs Temperature



NOTE:
Ethanolamines begin decomposing at temperatures above 200°C and can undergo self-sustained decomposition at temperatures above 260°C.


- 1 Monoethanolamine
- 2 Diethanolamine
- 3 Triethanolamine

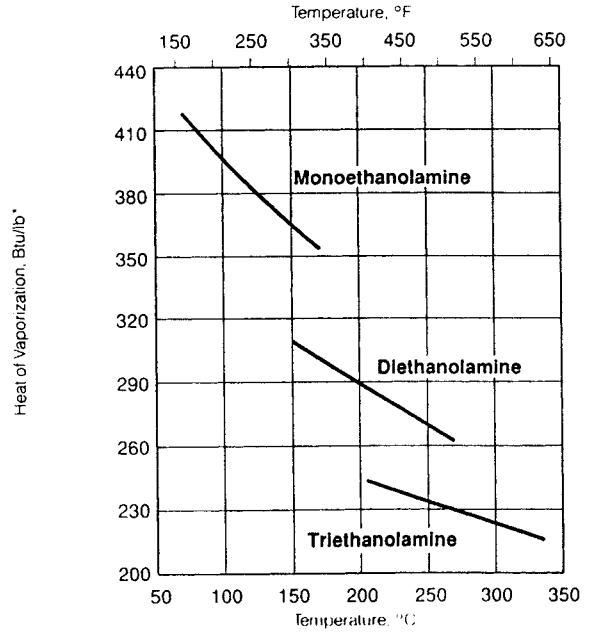Heat of Vaporization of Ethanolamines




* 1 Btu/lb = 0.55555556 cal/g

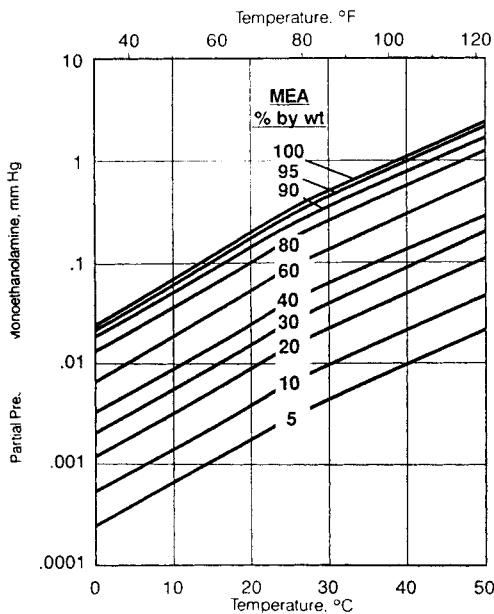Partial Pressures of Monoethanolamine in Aqueous Solutions at Various Contact Temperatures



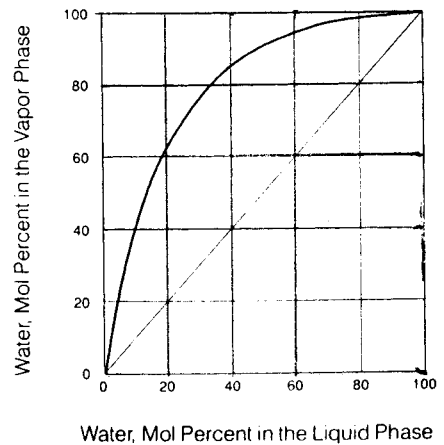
Liquid-Vapor Equilibria of Aqueous Monoethanolamine Solutions at 760 mm Hg




(continued)

Table 14.62: (continued)

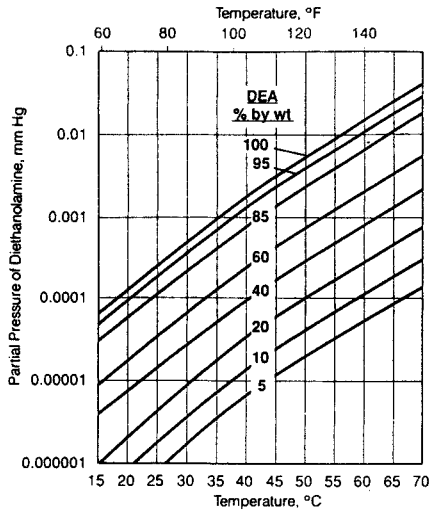
Partial Pressures of Diethanolamine in Aqueous Solutions at Various Contact Temperatures



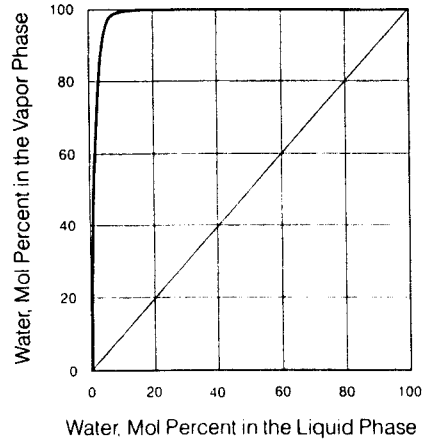
Liquid-Vapor Equilibria of Aqueous Diethanolamine Solutions at 760 mm Hg



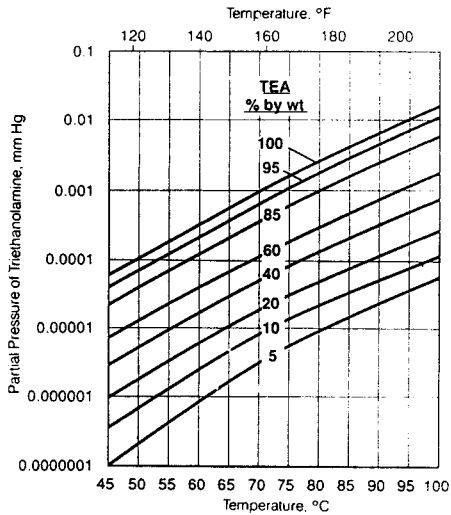
Partial Pressures of Triethanolamine in Aqueous Solutions at Various Contact Temperatures



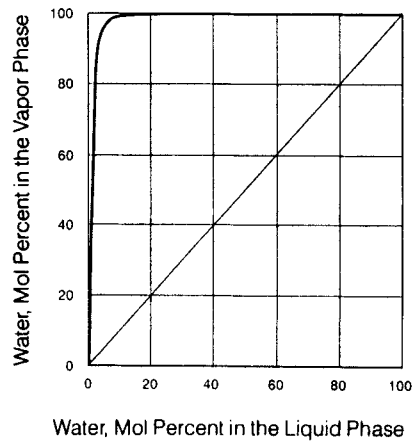
Liquid-Vapor Equilibria of Aqueous Triethanolamine Solutions at 760 mm Hg



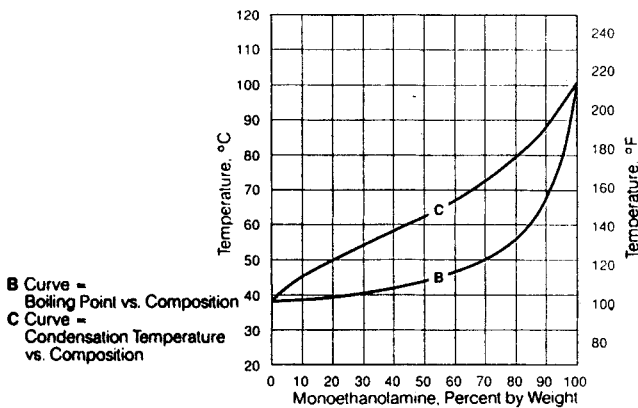Boiling Points and Condensation Temperatures of Aqueous Monoethanolamine Solutions at 50 mm Hg Absolute



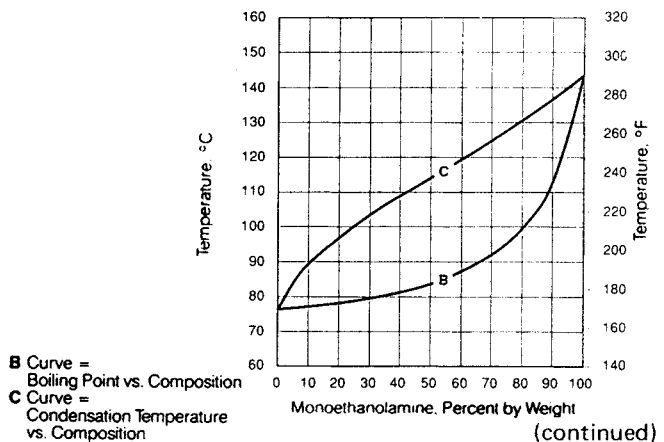
Boiling Points and Condensation Temperatures of Aqueous Monoethanolamine Solutions at 300 mm Hg Absolute




(continued)

Table 14.62: (continued)

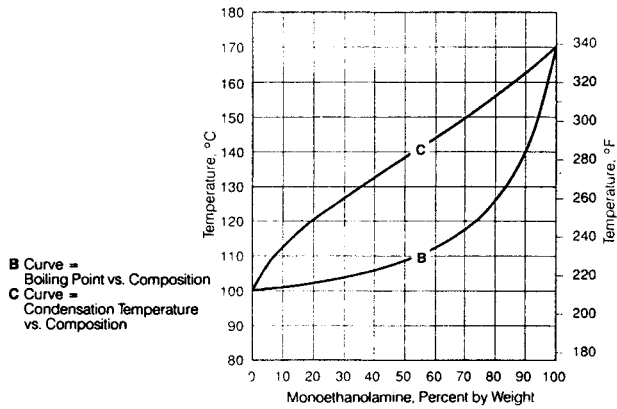
Boiling Points and Condensation Temperatures of Aqueous Monoethanolamine Solutions at 760 mm Hg Absolute



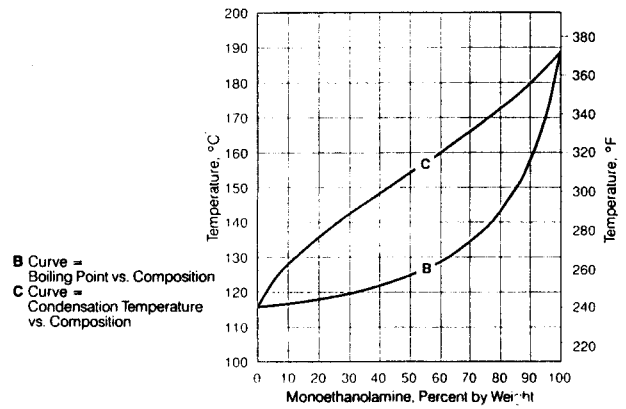
Boiling Points and Condensation Temperatures of Aqueous Monoethanolamine Solutions at 25 psi Absolute



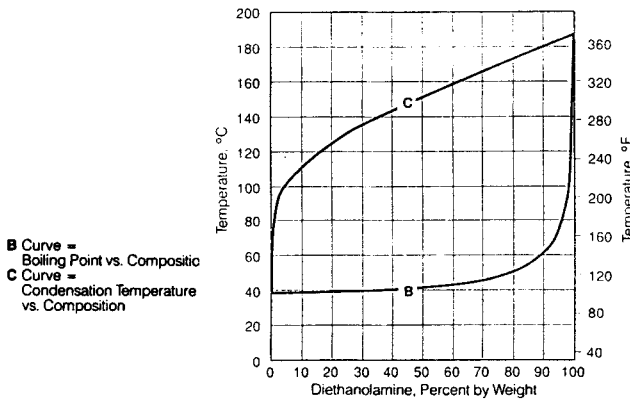
Boiling Points and Condensation Temperatures of Aqueous Diethanolamine Solutions at 50 mm Hg Absolute



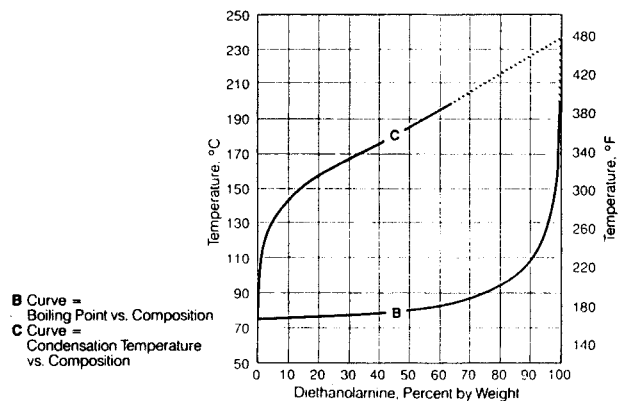
Boiling Points and Condensation Temperatures of Aqueous Diethanolamine Solutions at 300 mm Hg Absolute



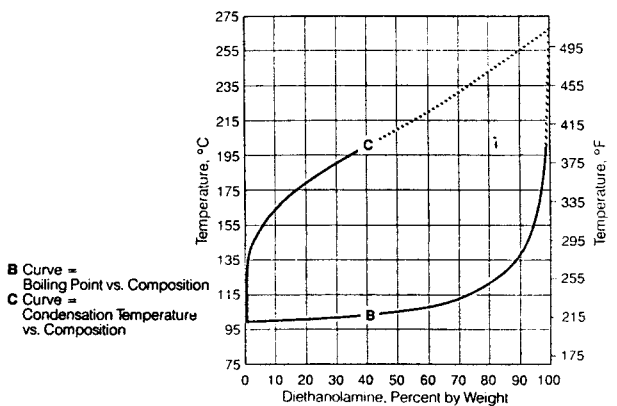Boiling Points and Condensation Temperatures of Aqueous Diethanolamine Solutions at 760 mm Hg Absolute



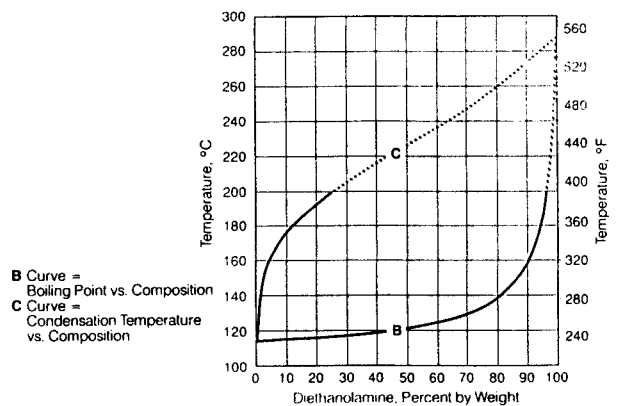Boiling Points and Condensation Temperatures of Aqueous Diethanolamine Solutions at 25 psi Absolute




NOTE: Ethanolamines can undergo decomposition reactions at temperatures above 200°C.


(continued)

Table 14.62: (continued)

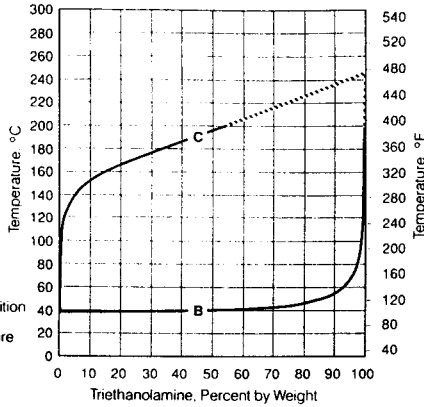
Boiling Points and Condensation Temperatures of Aqueous Triethanolamine Solutions at 50 mm Hg Absolute



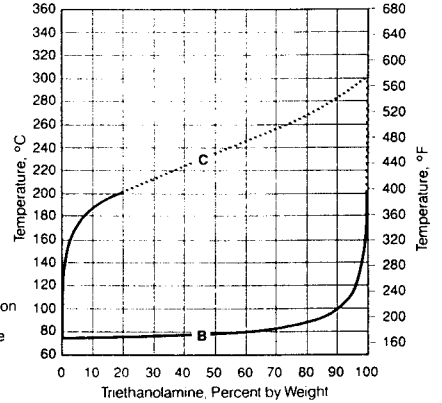
Boiling Points and Condensation Temperatures of Aqueous Triethanolamine Solutions at 300 mm Hg Absolute



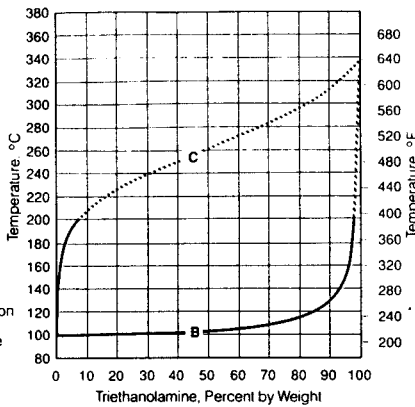Boiling Points and Condensation Temperatures of Aqueous Triethanolamine Solutions at 760 mm Hg Absolute




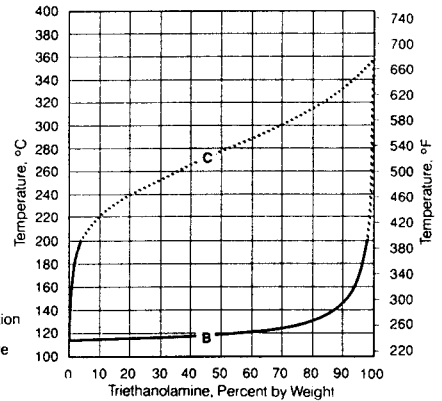Boiling Points and Condensation Temperatures of Aqueous Triethanolamine Solutions at 25 psi Absolute




NOTE:
 Ethanolamines can undergo decomposition reactions at temperatures above 200°C

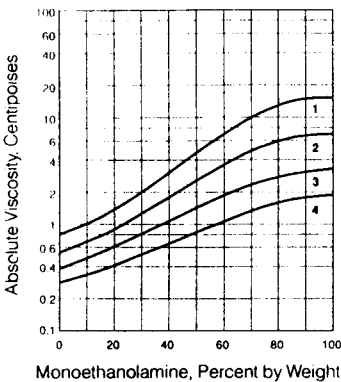
Absolute Viscosity of Aqueous Monoethanolamine Solutions



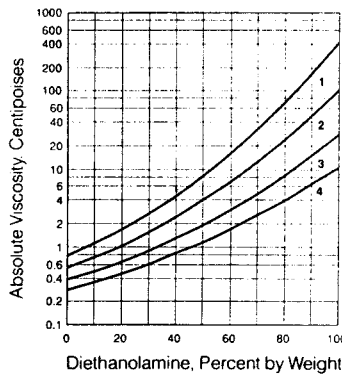Absolute Viscosity of Aqueous 2 Diethanolamine Solutions



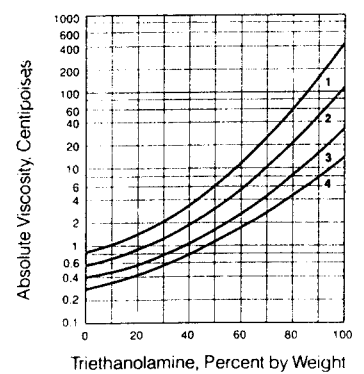Absolute Viscosities of Aqueous Triethanolamine Solutions




- 1 30°C (86°F)
- 2 50°C (122°F)
- 3 75°C (167°F)
- 4 100°C (212°F)

(continued)


Table 14.62: (continued)

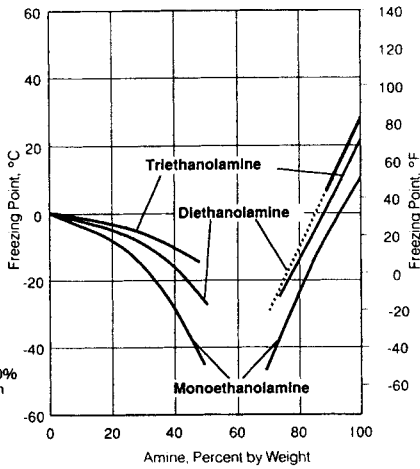Freezing Points of Aqueous Ethanolamine Solutions




NOTE: Freezing point data for 70% to 90% Diethanolamine in water are extrapolated.

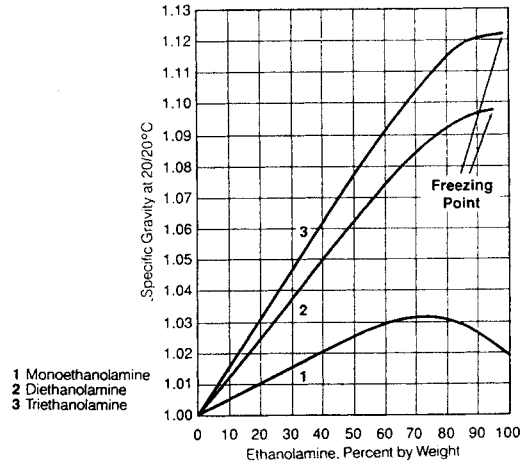
Specific Gravity of Aqueous Ethanolamine Solutions at 20°/20°C



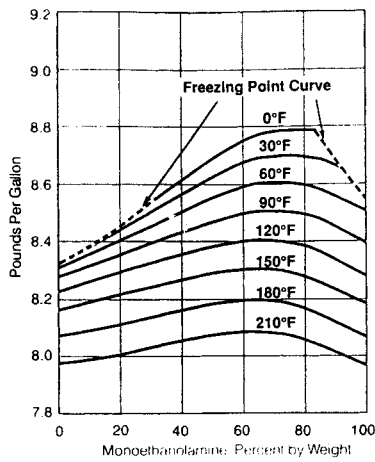Weight per Gallon of Aqueous Monoethanolamine Solutions at Various Temperatures



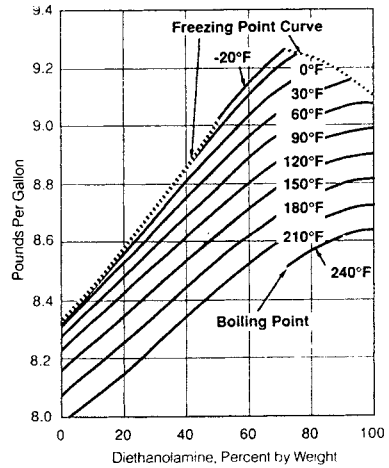Weight per Gallon of Aqueous Diethanolamine Solutions at Various Temperatures



Weight per Gallon of Aqueous Triethanolamine Solutions at Various Temperatures



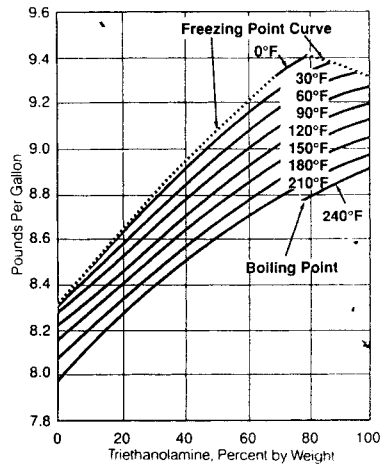


Table 14.62: (continued)

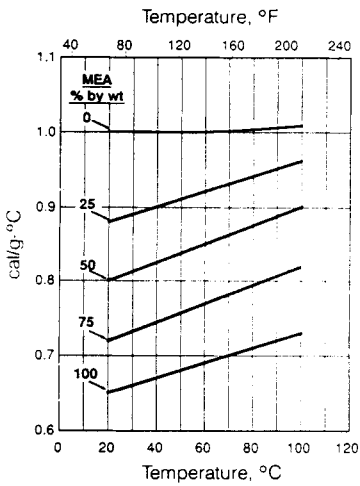
Specific Heats of Aqueous Monoethanolamine Solutions



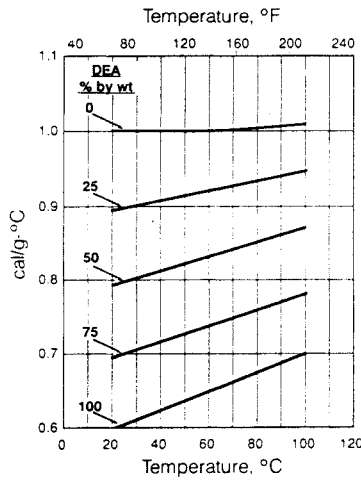
Specific Heats of Aqueous Diethanolamine Solutions



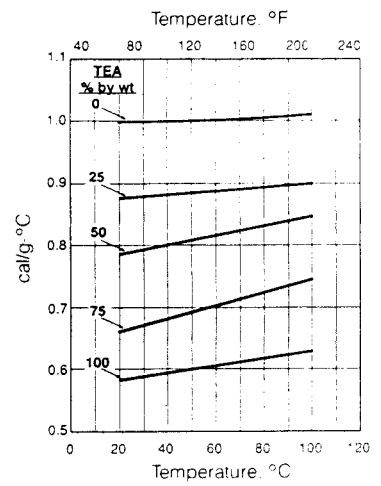
Specific Heats of Aqueous Triethanolamine Solutions



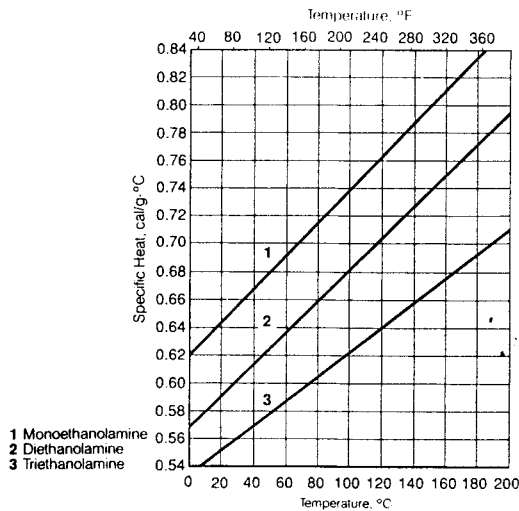
Specific Heat-Temperature Data for Ethanolamines



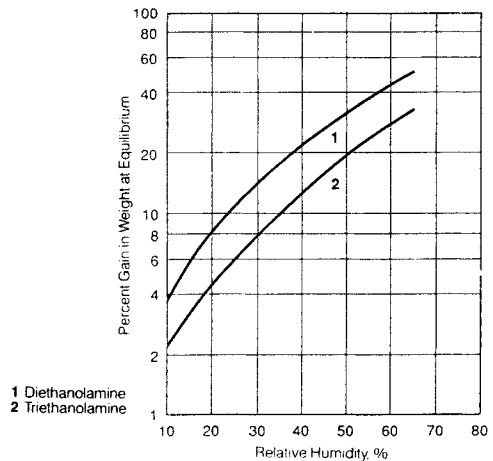
Comparative Hygroscopicities of Diethanolamine and Triethanolamine from 75° to 80°C



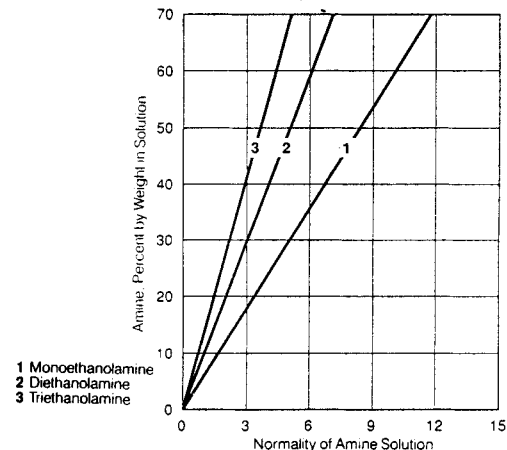Weight Percent Ethanolamine in Aqueous Solutions vs Normality of Solution



pH of Ethanolamines Solutions

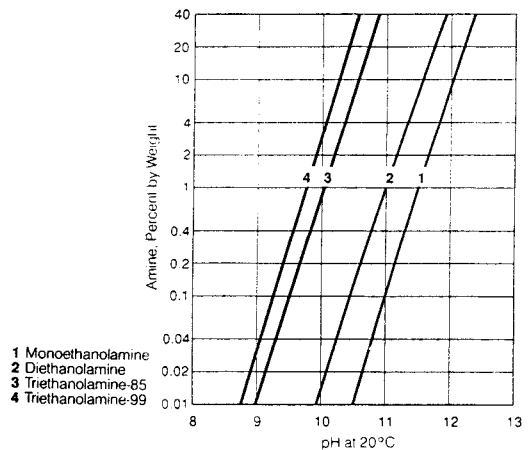


ALKANOL AMINES

The most important members of this group from a commercial standpoint are monoethanolamine, diethanolamine, and triethanolamine. Also available in commercial quantities are the aminohydroxy derivatives of nitroparaffins, which are 2-amino-1-butanol, 2-amino-2-methyl-1-propanol, 2-amino-2-methyl-1,3-propanediol, 2-amino-2-ethyl-1,3-propanediol, and tris(hydroxymethyl)aminomethane.

These compounds are used as emulsifiers for cosmetic lotions and creams, mineral oil and paraffin wax emulsions, textiles, leather dressings, cleaning compounds, polishes, and "soluble oils." They are also used in the manufacture of pharmaceuticals, surface-active and wetting agents, vulcanization accelerators, photographic developers, dyestuffs, and resins. Having the property of absorbing acidic gases, such as H₂S and CO₂ in cold aqueous solutions and releasing them when hot, these compounds suggest usefulness in gas recovery and purification. They also form the basis for chemical synthesis.

Table 14.63: Monoethanolamine (19)

2(Hydroxyethyl)amine
2-Aminoethanol
Colamine



Monoethanolamine is a somewhat viscous hygroscopic liquid with an ammoniacal odor. It is miscible with water and many organic solvents. Its molecule contains both a hydroxyl and an amine group, thus producing derivatives that have characteristics of both types of compounds. It is used as a softener and conditioning agent, and in the recovery and extraction of carbon dioxide and hydrogen sulfide from industrial gases. Its soaps with fatty acids are excellent emulsifiers for waxes. It is also utilized as an intermediate in the manufacture of rubber accelerators and dyestuffs.

Typical Properties and Specifications

| | |
|----------------------------------|----------------------------------------------|
| Boiling point | 172.2°C |
| Coefficient of expansion at 20°C | 0.000770 (per°C) |
| Dissociation constant at 20°C | 5×10^{-4} |
| Equivalent weight | 61 to 63 |
| Flash point (open cup) | 93°C (200°F) |
| Heat of evaporation at B.P. | 199 cal/g |
| Refractive index at 20°C | 1.4539 |
| Specific gravity at 20 (20°C) | 1.0180 |
| Specific heat at 30°C | 0.665 cal/g |
| Surface tension at 20°C | 51 dynes/cm |
| Viscosity at 20°C | 3.40 poises |
| Vapor pressure at 20°C | 0.67 mm Hg |
| Weight per gallon at 20°C | 8.472 lbs |
| Boiling range at 760 mm | Not less than 90% over between 165 and 173°C |
| Color | Water-white |
| pH 25% Solution at 25°C | 12.1 |
| Solubility in water | Complete |

Table 14.64: Boiling Point Composition Curves for Aqueous Monoethanolamine Solutions (19)

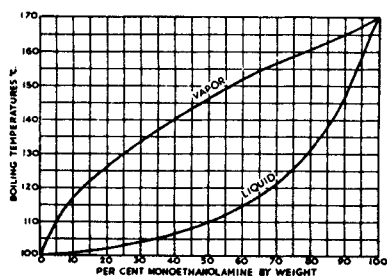


Table 14.65: Viscosity of Monoethanolamine at Various Temperatures (19)


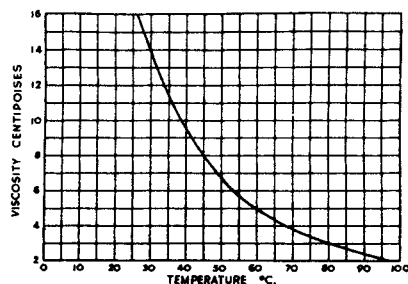


Table 14.66: Diethanolamine (2)

Di-2-Hydroxyethylamine



When pure, diethanolamine is a crystalline, white solid which has a melting point of 28°C., or just above room temperature. The commercial material has a mild, ammoniacal odor. Like other ethanolamines, diethanolamine enters into reactions characteristic of both amines and alcohols; its most important property is its ability to combine directly with acids and acidic gases. At normal temperatures, its aqueous solutions have a strong affinity for hydrogen sulfide and carbon dioxide; and at higher temperatures, this affinity decreases, with expulsion of the gases.


Diethanolamine finds wide use as an absorbent for acidic gases; especially for the removal, recovery, and concentration of carbon dioxide from flue and other waste gases as well as from hydrogen gas produced by cracking methane. Many industrial processes require pure hydrogen free of acidic gases. Diethanolamine is used to remove troublesome hydrogen sulfide from sour natural gas in transmission lines and natural gasoline plants. It is also used as a softening, moistening, and emulsifying agent; and in the synthesis of organic compounds by esterification of its hydroxyl groups.

It is an excellent agent for neutralizing the acidity which is developed by the high percentage of clays used in rubber compounding, and thus reduces the curing time considerably. It is also used in the production of powerful synthetic detergents and in certain synthetic resins.


Color and properties: Faintly colored, viscous liquid.

Constants: Sp.gr. 1.0985 at 20°C./20°C.; b. p. (760 mm.) 268.0°C.; vapor pressure < 0.01 mm. (20°C.); flash point 280°F.; wt. 91. lbs./gal. (20°C.). *Typical specifications:* Sp.gr. 1.088 to 1.095 at 30°C./20°C.; water not more than 1.5%; monoethanolamine not more than 2%; diethanolamine not less than 95%; triethanolamine not more than 2%; color (100-mm. tube) not more than 3 yellow and 1 red Lovibond; equivalent wt. 104 to 108; average wt. 9.08 lbs./gal. (30°C.).

Miscible with water and most organic solvents.

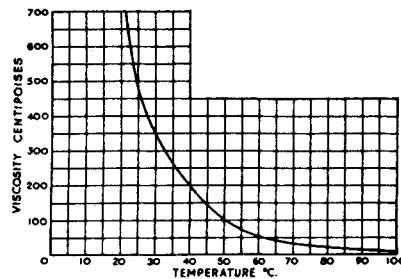Table 14.67: Viscosity of Diethanolamine at Various Temperatures (19)**Table 14.68: Triethanolamine (2)**

Tri-2-Hydroxyethylamine



Triethanolamine is a viscous and very hygroscopic liquid with a slight ammoniacal odor. It boils at 244°C. at 50 mm. (360°C. at 760 mm.) and is entirely soluble in water and alcohols, but only slightly soluble in hydrocarbons. It is a mild, organic base which like ammonia combines with acids and acidic materials. The alkalinity of pure triethanolamine is somewhat less than that of ammonia, its pH being 11.2 in 25% solution.

Three commercial grades of triethanolamine are available: 98%, "regular", and "SP." These differ only slightly in physical and chemical properties from the pure compound. The most significant variation is in equivalent weights. Pure triethanolamine has an equivalent weight of 149; "regular," 140; and "SP," about 130. This variation is due to increasing amounts of mono- and diethanolamine present in the respective commercial grades.

(continued)

Table 14.68: (continued)

With free fatty acids, triethanolamine forms soaps in direct molecular proportions. Triethanolamine oleate is a semi-liquid soap capable of forming solutions of marked detergent properties in water or in organic solvents such as gasoline. In water, triethanolamine oleate is soluble in all proportions; in gasoline, more than 2% soap is necessary to effect solution. The stearate is a hard, white product which finds use in cosmetic preparations. Only the 98% or regular grades should be used in cosmetic products. These soaps are practically neutral, their pH being approximately 8, and are thus free from irritating effect upon the skin or from injurious effect on fabrics. Very stable water emulsions of almost any oil, fat, or wax can in general be prepared with these soaps. The usual requirements for emulsification are between 2 and 4% triethanolamine and 5 to 15% oleic or stearic acid, each based on the weight of the oil to be emulsified. Triethanolamine emulsions are distinguished by their small particle size, non-corrosiveness, non-volatility, ease of preparation, and wide flexibility in formulation with fear of separation.

A small percentage of triethanolamine assists in the penetration of liquids into porous materials. Because of its pronounced hygroscopicity, it is employed as an economical softening agent, humectant, and plasticizing agent for such products as textiles, glues, leather coatings, as a penetrating agent in impregnating wood, paper, and cellulose products. Also, an ingredient of adhesives, rubber mixtures, and lacquers.

Viscous, pale yellow liquid intermediate in properties between alcohol and ammonia; slightly ammoniacal odor; excellent penetrating properties; forms soaps with fatty acids; hygroscopic. Commercial product contains 70-75% triethanolamine, 20-25% diethanolamine, 0-5% monoethanolamine. Soluble in water, alcohol and chloroform. Sp. gr. 1.1204-1.1284; b.p. 360°C; vapor pressure < 0.01 mm (20°C); flash point 355°F; wt./gal. 9.4 lbs. (20°C); coefficient of expansion 0.00048 (20°C); freezing point 21.2°C; viscosity 0.10 poise (20°C).

Typical specifications: Sp. gr. 1.1240-1.1300 (20/20°C); water not more than 1.0%; purity not more than 2.5% monoethanolamine, not more than 15% diethanolamine, not less than 80% triethanolamine; equivalent wt. 140-145; color (500-mm. tube) not more than 7 yellow and 2 red Lovibond; average wt./gal. 9.40 lbs. (20°C).

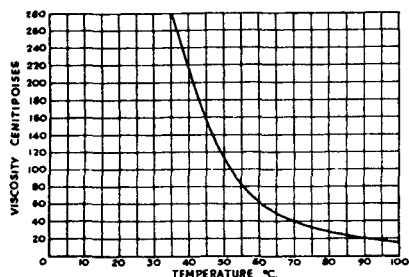
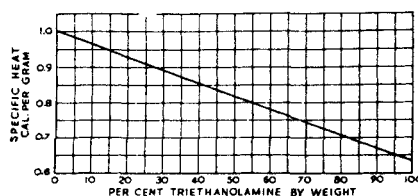
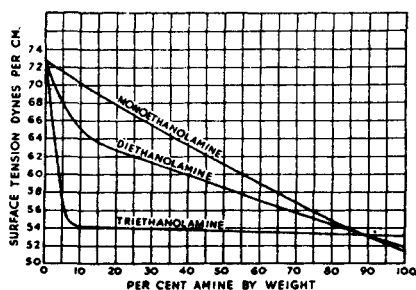
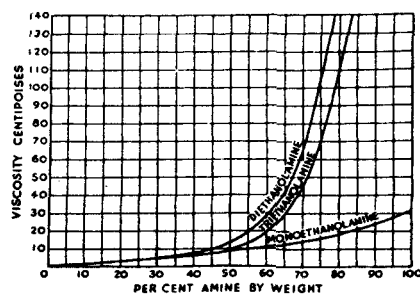
Table 14.69: Viscosity of Triethanolamine at Various Temperatures (19)**Table 14.70: Specific Heats of Aqueous Triethanolamine Solutions at 21°C (19)****Table 14.71: Surface Tension of Aqueous Ethanolamine Solutions at 20°C (19)****Table 14.72: Viscosity of Aqueous Ethanolamine Solutions at 20°C (19)**

Table 14.73: Isopropanolamines Mixed (2)

The mixed isopropanolamines are available as a liquid mixture of mono-, di-, and triisopropanolamine.

Uses: The isopropanolamine soaps may be employed in all uses now found for the ethanolamine soaps. Their excellent hydrocarbon solubility and color stability make them of special interest in soluble oils, dry cleaning soaps, cosmetics, and pharmaceutical preparations. Vinyl acetate resin emulsions of the oil-in-water type for coating fabrics and leather have excellent stability when prepared by stirring 80 parts by weight of "Vinylite" resin AYAF (30% solution in toluene) and 1 part oleic acid, into 20 parts of water containing 0.6 to 0.8 parts of mixed isopropanolamine.

Kerosene solubilized with 4% by weight of mixed isopropanolamine and 15% by weight of oleic acid produces stable emulsions with water upon mechanical agitation. Stable water emulsions of chlorinated hydrocarbons or naphtha may be prepared by a similar procedure. The addition of about 2% by weight of mixed isopropanolamine has been found to improve the penetration of starch glues into heavily sized envelope stock.

| | |
|-----------------------------|---------------|
| Purity | |
| Monoisopropanolamine | 14± 2% by wt. |
| Diisopropanolamine | 43± 4% by wt. |
| Triisopropanolamine | 43± 4% by wt. |
| Specific gravity at 20/20°C | 1.0040-1.0100 |


Table 14.74: Triisopropanolamine (2)

Tri-2-Hydroxyisopropylamine



This compound is a white, crystalline solid, completely soluble in water. It is used as a reactant in pharmaceutical syntheses. It is important in the oral treatment of syphilis. Combined with sodium bismuthate and propylene glycol, it produces a bismuth compound stable enough to withstand chemical action of the digestive system. Triisopropanolamine can be used for the preparation of cosmetic creams, "soluble" oils, and emulsions—where the good color stability of its soaps is of interest. Formulas containing lanolin may vary in color stability. Triisopropanolamine is especially suggested for "soluble" white paraffin oils for the rayon industry, where good color and low free fatty acid content are desirable.


| | |
|------------------------------|------------|
| Boiling point (760 mm) | 305.4°C |
| Flash point | 305°F |
| Latent heat of vaporization | 45°C |
| Melting point | 46°C |
| pH 25% Solution at 25°C | 10.7 |
| Equivalent weight | 188-192 |
| Specific gravity at 50/20°C | 0.9996 |
| Solubility in water at 20°C | Complete |
| Solubility of water in amine | Complete |
| Vapor pressure at 20°C | 0.01 mm Hg |
| Weight per gallon at 50°C | 8.32 lbs. |

Table 14.75: 2-Amino-2-Methyl-1-Propanol (2)


This is a water-white, syrupy, alkaline liquid, with a faint ammoniacal odor. It is soluble in water and many organic solvents. It forms soaps with higher fatty acids and these are useful as emulsifying agents in textile and leather materials, water-emulsion paints, and self-polishing waxes.

| | |
|-----------------------------|----------|
| Boiling point (760 mm) | 165°C |
| Melting point | 25°C |
| Specific gravity | 0.934 |
| pH (0.1 M solution at 20°C) | 11.27 |
| Solubility in 100 cc water | Complete |
| Vapor pressure at 20°C | 1.0 mm |
| Flash point (Tag. open cup) | 153°F |
| Refractive index at 20°C | 1.449 |
| Weight per Gallon at 68°F | 7.77 lbs |

Table 14.76: 2-Amino-2-Methyl-1,2-Propanediol (2) Table 14.77: 2-Amino-2-Ethyl-1,3-Propanediol (2)




| | |
|----------------------------------|-----------|
| Boiling point at 10 mm..... | 151°C |
| Melting point..... | 109-111°C |
| pH (0.1 M solution) at 20°C..... | 10.78 |
| Solubility in 100 cc water..... | 250 grams |




| | |
|--------------------------------------------|----------------|
| Boiling point at 10 mm..... | 153°C |
| Flash point (Tag. open cup)..... | 166°F |
| Melting point..... | 37.5 to 38.5°C |
| pH of 0.17 M aqueous solution at 20°C..... | 10.8 |
| Solubility in water at 20°C..... | Complete |
| Specific gravity at 20/20°C..... | 1.099 |
| Refractive index at 20°C..... | 1.490 |
| Weight per gallon at 68°F..... | 9.15 lbs. |

Table 14.78: 2-Amino-1-Butanol (2)



| | |
|------------------------------------------|---------------------|
| Boiling point at 760 mm..... | 178°C |
| Flash point (Tag. open cup)..... | 164°F |
| Melting point..... | -2°C |
| pH of 0.1M aqueous solution at 20°C..... | 11.1 |
| Specific gravity at 20°/20°C..... | 0.944 |
| Solubility in water at 20°C..... | Completely Miscible |
| Vapor pressure at 20°C (est)..... | 0.5 mm |
| Refractive index at 20°C..... | 1.453 |

Table 14.79: Tris(Hydroxymethyl)Aminomethane (2)



| | |
|------------------------------------------|---------------------|
| Boiling point at 10 mm..... | 219 to 220°C |
| Melting point..... | 171 to 172°C |
| pH of 0.1M aqueous solution at 20°C..... | 10.4 |
| Solubility in water at 20°C..... | 80 grams per 100 ml |

Table 14.80: 2-Aminoethylethanolamine (2)


Hydroxyethyl Ethylenediamine



This compound is a hygroscopic liquid with a mild ammoniacal odor; it is completely soluble in water. It is used in the manufacture of dyes, pharmaceuticals, textile specialties, flotation agents, resins, insecticides, and rubber products.

| | |
|-------------------------------------|------------|
| Boiling point at 760 mm..... | 243.7°C |
| Flash point..... | 275°C |
| Specific gravity at 20/20°C..... | 1.0304 |
| Solubility in water..... | Complete |
| Solubility of water in solvent..... | Complete |
| Vapor pressure at 20°C..... | 0.02 mm Hg |
| Weight per gallon at 20°C..... | 8.58 lbs. |
| Boiling range at 760 mm..... | 232-250°C |
| Purity..... | 99%, min |

Table 14.81: 1-Diethylamino-2,3-Propanediol (2)



This alkylol amine is a water-white to light-straw liquid with a faintly ammoniacal odor. It is soluble in water, methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic hydrocarbons, fixed oils, oleic and hot stearic acids, and hot carnauba wax, the latter solidifying when cooled. It is insoluble in mineral oil and paraffin wax.

| | |
|----------------------------------|-----------|
| Boiling range..... | 233-235°C |
| Flash point..... | 210°F |
| Specific gravity at 20/20°C..... | 0.973 |

Table 14.82: Aminoalcohol Compounds (34)

| | 2-Amino-2-methyl-1-propanol | | 2-Amino-2-ethyl-1,3-propanediol | Tris(hydroxymethyl)aminomethane | |
|-------------------------------------------------|-----------------------------|---------|---------------------------------|---------------------------------|----------------------------|
| | AMP Regular | AMP-95 | AEPD | TRIS AMINO Crystals | TRIS AMINO 40% Concentrate |
| Neutral equivalent | 88.5-91 | 93-97 | 121.5* | 121-122 | — |
| Water, % by wt (max.) | 0.8 | 5.8 | 3.8 | 0.5 | — |
| Melting point, °C (min.) | — | — | — | 160 | — |
| Color (max.) | 20 APHA | 20 APHA | 2 Gardner | — | 5 Gardner |
| Color of 20% aqueous solution (max.) | — | — | — | 40 APHA | — |
| Distillation range, °C | 156-177 | — | — | — | — |
| Nonvolatile matter, % by wt (max.) | 0.005 | 0.005 | — | — | — |
| Amine assay by titration, calc. as % TRIS AMINO | — | — | — | — | 40 ± 2 |

*Anhydrous basis (max)

Physical Properties of Purified Materials


| Formula | 2-Amino-2-methyl-1-propanol | 2-Amino-2-ethyl-1,3-propanediol | Tris(hydroxymethyl)aminomethane |
|---------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| | $\begin{array}{c} \text{NH}_2 \\ \\ \text{CH}_2\text{C}(\text{CH}_3)\text{CH}_2\text{OH} \end{array}$ | $\begin{array}{c} \text{NH}_2 \\ \\ \text{HOCH}_2\text{C}(\text{C}_2\text{H}_5)\text{CH}_2\text{OH} \end{array}$ | $\begin{array}{c} \text{NH}_2 \\ \\ \text{HOCH}_2\text{C}(\text{CH}_2\text{OH})_2 \end{array}$ |
| Molecular weight (calcd.) | 89.14 | 119.17 | 121.14 |
| Boiling point at 760 mmHg, °C | 165 | — | — |
| Boiling point at 10 mmHg, °C | — | 152-153 | 219-220 |
| Melting point, °C | 30-31 | 37.5-38.5 | 171-172 |
| Specific gravity at 40/40°C | 0.928 | 1.101 | — |
| pH of 0.1M aqueous solution at 20°C | 11.3 | 10.8 | 10.4 |
| Solubility in water at 20°C, g/100 ml | miscible | miscible | 80 |
| Weight per gallon at 20°C, lb | 7.78 | 9.15 | — |
| pK _a at 25°C | 8.72 | 8.80 | 8.03 |

Additional Properties of AMP

| | AMP Regular | AMP-95 |
|--------------------------------------------|-------------|---------|
| Viscosity at 10°C, cp | — | 561 |
| 25°C, cp | — | 147 |
| 30°C, cp | 102 | — |
| 50°C, cp | 24 | — |
| 70°C, cp | 9 | — |
| 80°C, cp | 4 | — |
| Vapor pressure at 100°C, mmHg | 59 | — |
| 150°C, mmHg | 457 | — |
| Specific gravity at 25/25°C | — | 0.942 |
| Coefficient of expansion per °C | 0.00095 | 0.00098 |
| Refractive index, n _D , at 20°C | 1.449 | — |
| Heat of vaporization at 110°C, kcal/mole | 13.2 | — |
| 130°C, kcal/mole | 12.5 | — |
| 150°C, kcal/mole | 12.3 | — |
| 165°C, kcal/mole | 12.1 | — |
| Heat of dissociation at 25°C, kcal/mole | 12.9 | — |

Table 14.83: 2-Diethylamino-2-Methyl-1-Propanol (34)

DMAMP-80



Specifications

| | |
|---------------------------------------|----------|
| DMAMP, % by wt. (as titratable amine) | 78-82 |
| Color, APHA | 100 max. |
| Water, % by wt. | 18-22 |

Typical Properties

| | DMAMP-80 |
|------------------------------|------------------|
| Neutral equivalent | ~148 |
| Specific gravity at 25/25°C | 0.95 |
| Weight per gallon at 25°C | 7.9 lb |
| Flash point, Tag open cup | 150°F |
| Tag closed cup | 153°F |
| Freezing point | -20°C |
| Boiling point at 760 mmHg | ~98°C |
| Viscosity at 25°C, Gardner | A-A ₂ |
| pH of 0.1 N aqueous solution | 11.6 |
| APHA color (max.) | 100 |

ALKYLALKANOL AMINES

This group of compounds, also referred to as alkylaminoethanols, have less odor than most alkylamines and possess both water and oil solubility. The solubility degree of each is determined by the number of alkyl or hydroxyl groups present in the molecule. A larger number of hydroxyl groups gives greater water solubility, whereas a predominance of alkyl groups gives greater oil solubility. The derivatives of these compounds are of particular interest. They form soaps with fatty acids which may be employed as emulsifying, penetrating, and wetting agents, and these uses can also be applied to the ester and acid amide derivatives. These amines also serve as intermediates in the manufacture of drugs and dyes.

Table 14.84: Properties of Various Alkylalkanol Amines (2)

Dimethylethanolamine [(CH₃)₂NCH₂CH₂OH]. Dimethylethanolamine is a water-white liquid with an amine odor. It resembles diethylethanolamine in chemical behavior and it is used as an intermediate in the synthesis of corrosion inhibitors, dyes, pharmaceuticals, and textile auxiliaries.

| | |
|-----------------------------|--------|
| Boiling point | 133°C |
| Equivalent weight | 89 |
| Specific Gravity at 20/20°C | 0.887 |
| Refractive index | 1.4300 |

Diethylethanolamine (Diethylaminoethanol, (C₂H₅)₂NC₂H₄OH). Diethylaminoethanol is a water-white, hygroscopic liquid which behaves chemically like the tertiary amines and alcohols. It is soluble in water, ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic hydrocarbons, fixed oils, mineral oil, oleic acid, hot stearic acid, and hot paraffin and carnauba waxes, the last two solidifying when cooled. It is used in the manufacture of certain pharmaceuticals, such as procaine and "atabrine". It forms amine soaps with higher fatty acids, which are oil-soluble and useful as emulsifiers and textile lubricants. Its mild alkalinity makes it applicable as a neutralizing agent and a corrosion inhibitor.

Di-*n*-butylethanolamine (Di-*n*-Butylaminoethanol, (C₄H₉)₂NCH₂CH₂OH). This alkylolamine is a water-white liquid with a faintly amine odor. It is insoluble in water but soluble in ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, aromatic hydrocarbons, fixed oils, mineral oil, oleic and hot stearic acids, and hot paraffin and carnauba waxes, the latter two solidifying when cooled. It is slightly soluble in paraffinic hydrocarbons.

***n*-Butyl diethanolamine** [C₄H₉N(CH₂CH₂OH)₂]. This alkylol amine is a light straw-colored liquid with a faintly amine odor. It is soluble in water, ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic hydrocarbons, castor oil, oleic and hot stearic acids, and hot carnauba wax, the latter solidifying when cooled. It is insoluble in linseed and cottonseed oils, mineral oil, and paraffin wax.

***n*-Butyl monoethanolamine** (C₄H₉NHCH₂CH₂OH). This alkylol amine is a water-white liquid with a faintly amine odor. It is soluble in water, ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic hydrocarbons, fixed oils, oleic and stearic acids, and hot carnauba and paraffin waxes, the latter two solidifying when cooled. It is only slightly soluble in paraffinic hydrocarbons.

Ethyl diethanolamine [C₂H₅N(CH₂CH₂OH)₂]. Ethyl diethanolamine is a water-white liquid with an amine odor and soluble in water, ethyl alcohol, methyl alcohol, acetone, aromatic hydrocarbons, some fixed oils, oleic and hot stearic acids. It is insoluble in linseed and cottonseed oils, mineral oil, paraffin and carnauba waxes. It is only slightly soluble in paraffinic hydrocarbons.

(continued)

Table 14.84: (continued)

Ethyl monoethanolamine ($C_2H_5NHCH_2CH_2OH$). This alkylolamine is a colorless liquid, with an amine odor. It is soluble in water, ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic hydrocarbons, fixed oils, mineral oil, oleic and stearic acids, and hot carnauba and paraffin waxes, the latter two solidifying when cooled. It is only slightly soluble in paraffinic hydrocarbons.

Tetraethanolammonium hydroxide [$N(C_2H_4OH)_4OH$]. This solvent is a white, crystalline, strongly basic solid, completely miscible with water. The commercial product is an aqueous methanol solution in which 40 to 41 per cent of this solvent is present. Although aqueous solutions of this solvent are stable at ordinary temperatures, it will decompose when heated to weakly basic tertiary amines. This property is utilized in processes where it is desired to destroy a strongly alkaline substance which is no longer needed. Tetraethanolammonium hydroxide is also a good solvent for certain types of dyes.

| | |
|--------------------------------------|-------------------|
| Color | White |
| Description | Crystalline solid |
| Melting point | 123°C |
| Solubility in water | Complete |
| Solubility of water in solvent | Complete |
| Vapor pressure at 20°C | 0.01 mm |

| | Diethylamino- ethanol | Ethyl Monoethanolamine | Ethyl Diethanolamine |
|----------------------------------|--------------------------|---------------------------|-------------------------|
| Color | Water-white | Water-white | Water-white |
| Specific gravity at 20°/20°C. | 0.88-0.89 | 0.92 | 1.02 |
| Minimum amine content | 99.5% | 98.5% | 98.5% |
| Initial boiling point | 158°C. | 161°C | 245°C. |
| Final boiling point | 163°C. | 174.5°C. | 260°C. |
| Flash point | 135°F. | 160°F. | 255°F. |
| Solidification point | < -70°C. | -8.8°C. | -50°C. |
| Refractive index at 20°C. | 1.440 | 1.444 | 1.466 |
| Viscosity at 25°C (centipoise) | 4.05 | 12.40 | 53 |
| Viscosity at 60°C (centipoise) | 1.50 | 3.22 | 11.2 |
| Coefficient of expansion per °C. | 0.0012 | 0.00091 | 0.00080 |
| Theoretical molecular weight | 117.19 | 89.14 | 133.19 |
| Average weight per gallon | 7.36 lbs. | 7.66 lbs. | 8.5 lbs. |

| | Di-n-Butyl- aminoethanol | n-Butyl- Monoethanolamine | n-Butyl Diethanolamine |
|----------------------------------|-----------------------------|------------------------------|-------------------------------|
| Color | Water-white | Water-white | Water-white to Light Straw |
| Specific gravity at 20°/20°C. | 0.860 | 0.89 | 0.97 |
| Minimum amine content | 98.5% | 96.0% | 95.0% |
| Initial boiling point | 222°C. | 192°C. | 262°C. |
| Final boiling point | 234°C. | 215°C. | 290°C. |
| Flash point | 200°F. | 170°F. | 245°F. |
| Solidification point | < -70°C. | -3.5°C. | < -70°C. |
| Refractive index at 20°C. | 1.444 | 1.444 | 1.462 |
| Viscosity at 25°C (centipoise) | 6.50 | 17.4 | 55 |
| Viscosity at 60°C (centipoise) | 1.94 | 4.02 | 10.6 |
| Coefficient of expansion per °C. | 0.00114 | 0.0010 | 0.00077 |
| Theoretical molecular weight | 173.29 | 117.19 | 161.24 |
| Average weight per gallon | 7.16 lbs. | 7.44 lbs. | 7.25 lbs. |

GLYCOL ETHER AMINES

Table 14.85: Properties of Various Glycol Ether Amines (47)


| Amine | Methoxyethyl | Dimethoxyethyl | Ethoxyethyl | Diethoxyethyl | Methoxyisopropyl |
|------------------------------|-----------------------------------------------|-------------------------------------------------|--------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Formula | $\text{CH}_3\text{OC}_2\text{H}_4\text{NH}_2$ | $(\text{CH}_3\text{OC}_2\text{H}_4)_2\text{NH}$ | $\text{C}_2\text{H}_5\text{OC}_2\text{H}_4\text{NH}_2$ | $(\text{C}_2\text{H}_5\text{OC}_2\text{H}_4)_2\text{NH}$ | $\text{CH}_3\text{OCH}_2\overset{\text{CH}_3}{\underset{ }{\text{C}}}\text{H}\text{NH}_2$ |
| Molecular Weight | 75 | 133 | 89 | 161 | 89 |
| Boiling Point, °C. | 91 | 172 | 107 | 194 | 98 |
| Vapor Pressure, mm. at 20°C. | -- | 1.0 | -- | 0.5 | -- |
| n_D at 25°C. | 1.4058 | 1.4190 | 1.4086 | 1.4205 | 1.4038 |
| Specific Gravity | 0.89 | 0.91 | 0.85 | 0.88 | 0.84 |
| pK _b | 4.62 | 5.49 | 7.74 | 5.53 | 4.60 |
| Flash Point, °F. | 60 | 155 | 70 | 185 | 60 |

| Formula | $(\text{C}_4\text{H}_9)_2\text{NH}$ | $(\text{CH}_3\text{OCH}_2\text{CH}_2)_2\text{NH}$ | $(\text{HOCH}_2\text{CH}_2)_2\text{NH}$ |
|-------------------------------------------|-------------------------------------|---------------------------------------------------|-----------------------------------------|
| Molecular Weight | 129 | 133 | 105 |
| Boiling Point, °C. | 160 | 172 | 270 |
| Vapor Pressure, (20°C.) | 1.9 | 1.0 | < 0.01 |
| Freezing Point, °C. | -62 | < -40 | 28.0 |
| Specific Gravity | 0.76 | 0.91 | 1.09 |
| pK _b | 2.7 | 5.5 | 5.2 |
| % Solubility in H ₂ O at 25°C. | 0.47 | ∞ | ∞ |

| Formula | $\text{C}_4\text{H}_9\text{CH}(\text{C}_2\text{H}_5)\text{CH}_2\text{NH}_2$ | $\text{CH}_3\text{OCH}_2\text{CH}(\text{CH}_3)\text{O}-\text{CH}_2\text{CH}(\text{CH}_3)\text{NH}_2$ |
|-------------------------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Molecular Weight | 129 | 147 |
| Boiling Point, °C. | 169 | 175 |
| Vapor Pressure, (20°C.) | 1.2 | 1.0 |
| Freezing Point, °C. | -- | -- |
| Specific Gravity | 0.79 | 0.85 |
| pK _b | 3.2 | 4.8 |
| % Solubility in H ₂ O at 25°C. | 0.25 | ∞ |

ARYL AMINES


Table 14.86: Aniline (2)

Aminobenzene
Phenylamine

Aniline is a colorless to straw-colored, toxic, highly refractive, oily liquid having a characteristic odor. It is soluble in ethyl alcohol, ethyl ether, carbon tetrachloride, and only slightly soluble in water. It is used in the production of such materials as indigo, aniline black, tetranitraniline, acetanilide, explosives, dyes, rubber chemicals, and pharmaceuticals.

| | |
|-----------------------------|---------------------------|
| Boiling point | 184.2°C |
| Flash point | 70°C |
| Freezing point | -6.3°C min. |
| Melting point | -6.2°C |
| Specific gravity at 25/25°C | 1.021 |
| Solubility in water at 25°C | 3.8 |
| 80°C | 6.0 |
| Weight per gallon at 25°C | 8.80 lbs. |
| Boiling range | 1.5°C |
| | 95% distills within 1.0°C |
| Nitrobenzene | None |


Table 14.87: Dimethylaniline (2)



Dimethylaniline is a pale yellow, highly refractive, toxic, oily liquid with a pungent odor. It is soluble in ethyl alcohol, ethyl ether, and carbon tetrachloride, but only very slightly soluble in water. It is used in the making of dyes and the explosive tetranitroaniline ("Tetryl").


| | |
|-----------------------------|---------------------------|
| Boiling point | 192.9°C |
| Freezing point | 1.5°C |
| Specific gravity at 25/25°C | 0.956 |
| Weight per gallon at 25°C | 7.95 lbs. |
| Boiling range within | 2.0°C |
| | 95% distills within 1.0°C |
| Color | Yellow to amber |
| Monomethylaniline | 0.5% max. |

Table 14.88: Diethylaniline (2)




Diethylaniline is a light-yellow, oily, toxic liquid with a pungent odor. It is soluble in ethyl alcohol, ethyl ether, and carbon tetrachloride, but only very slightly soluble in water. It is used in the preparation of dyes, pharmaceuticals, and other organic compounds.

| | |
|-----------------------------|--------------------------------|
| Boiling range | 216.3°C |
| Freezing point | -34.4°C |
| Specific gravity at 25/25°C | 0.933 |
| Weight per gallon at 25°C | 7.76 lbs. |
| Aniline | None |
| Boiling range | 5-95% within 2.5°C |
| | Boiling range includes 216.3°C |
| Color | Light yellow |
| Monoethylaniline | 0.2% max. |
| Purity | 99.8%, min. |
| Water | No visible separation |

Table 14.89: N-Mono-n-Butyl Aniline (2)

This secondary amine is a light straw to amber-colored liquid with an aniline odor. It is insoluble in water but soluble in ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic acid, and hot stearic acid. It is also soluble in hot paraffin and carnauba waxes which solidify upon cooling.

| | |
|---------------------------|-----------|
| Flash point | 225°F |
| Specific gravity at 20°C | 0.93 |
| Refractive index at 20°C | 1.5351 |
| Weight per gallon at 20°C | 7.71 lbs. |
| Boiling range | 234–242°C |
| Purity | 95%, min. |

Table 14.90: N,N-Di-n-Butyl Aniline (2)


N,N-Di-n-Butyl aniline is a light-straw colored liquid with a faintly aniline odor and is soluble in ethyl alcohol, aromatic hydrocarbons, ethyl ether, ethyl acetate, acetone, fixed oils, mineral oil, oleic acid and hot stearic acid. It is insoluble in water, methyl alcohol, and while soluble in hot paraffin and carnauba waxes, these solidify when cooled.

| | |
|---------------------------|-----------|
| Flash point | 230°F. |
| Specific gravity at 20°C | 0.904 |
| Refractive index at 20°C | 1.5197 |
| Weight per gallon at 20°C | 7.53 lbs. |
| Boiling range | 267–275°C |
| Purity | 95%, min. |

Table 14.91: n-Monoamyl Aniline (Mixed Isomers) (2)


n-Monoamyl aniline is a mixture of isomers. It is a light-straw colored liquid with a faintly aniline odor. It is insoluble in water but soluble in ethyl alcohol, methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic acid, and hot stearic acid. It is also soluble in hot paraffin and carnauba waxes which solidify on cooling.

| | |
|---------------------------|-----------|
| Flash point | 225°F |
| Specific gravity at 20°C | 0.92 |
| Refractive index at 20°C | 1.5285 |
| Weight per gallon at 20°C | 7.64 lbs. |
| Boiling range | 245–280°C |
| Purity | 95%, min. |

Table 14.92: p-tert-Amyl Aniline (2)


p-tert-Amyl aniline, an aryl amine, is a straw to deep red-colored liquid with a faintly aromatic odor. It is soluble in methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic acid and hot stearic acid. It is insoluble in water and while it dissolves hot carnauba and paraffin waxes, these solidify on cooling.

| | |
|-----------------------------|-----------|
| Flash point | 215°F |
| Specific gravity at 20/20°C | 0.948 |
| Boiling range | 253–259°C |

Table 14.93: DI-tert-Amyl Aniline (2)


Di-tert-amyl aniline, an aryl amine, is a red-colored, almost odorless liquid, soluble in ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic acid and hot stearic acid. It is insoluble in water and methyl alcohol, and dissolves hot carnauba and paraffin waxes, which solidify when cooled.

| | |
|-----------------------------|-----------|
| Flash point | 265°F |
| Specific gravity at 20/20°C | 0.923 |
| Boiling range | 280-321°C |

Table 14.94: N,N-Diamyl Aniline (Mixed Isomers) (2)

N,N-diamyl aniline is a dark-amber liquid with a faintly aniline odor. It is insoluble in methyl alcohol and water, but soluble in ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic acid, and hot stearic acid. It is also soluble in hot carnauba and paraffin waxes, which solidify on cooling.

| | |
|-----------------------------|-----------|
| Flash point | 260°F |
| Specific gravity at 20/20°C | 0.898 |
| Boiling range | 276-292°C |

Table 14.95: Diethylbenzylamine (2)

Diethylbenzylamine is a colorless liquid with an almond-like odor. It is soluble in ethyl and methyl alcohols, ethyl ether, ethyl acetate, acetone, aromatic hydrocarbons, fixed oils, mineral oil, oleic acid and hot stearic acid. It is insoluble in water and while soluble in hot paraffin and carnauba waxes, these solidify on cooling.

| | |
|---------------------------|-----------|
| Flash point | 170°F |
| Specific gravity at 20°C | 0.890 |
| Refractive index at 20°C | 1.5002 |
| Weight per gallon at 20°C | 7.41 lbs. |
| Boiling range | 207-215°C |
| Purity | 97%, min. |

Table 14.96: N-(n-Butyl)-α-Naphthylamine (2)


This solvent is a dark-red liquid with a faintly amine odor. It is a solvent for methyl alcohol, ethyl ether, ethyl acetate, acetone, aromatic and aliphatic hydrocarbons, fixed oils, mineral oil, oleic and hot stearic acid. It is insoluble in water, and soluble in hot paraffin and carnauba waxes which solidify on cooling.

| | |
|-----------------------------|-----------|
| Flash point | 295°F |
| Specific gravity at 20/20°C | 1.012 |
| Boiling range | 318-325°C |

IMINES**Table 14.97: Ethylene Imine (23)**

Ethylene imine is a colorless mobile liquid having an amine-like odor, with the above structure.

| | |
|--------------------------------------------|-------------------|
| Molecular Weight | 43.07 |
| Density, gm. ml. | -10° C. 0.865 |
| | 0° C. 0.856 |
| | 10° C. 0.846 |
| | 25° C. 0.832 |
| Boiling Point, °C. | 57 |
| Freezing Point, °C. | -78 |
| Index of Refraction, n_D at 25° C. | 1.4123 |
| Viscosity, cps. at 25° C. | 0.418 |
| Surface Tension, dynes/cm. | 32.8 |
| Flash Point, °F. | 12 |
| Heat of Formation, Kcal./mole | 21.95 |
| Heat of Vaporization, Kcal./mole at 20° C. | 7.9 |
| Dissociation Constant | 7.8×10^7 |

Table 14.98: Propylene Imine (41)

| | |
|-------------------------------------------------------------------------------------|----------------------------------|
| Molecular Weight | 57.09 |
| Density, g./ml. | |
| 25°C. | 0.8017 |
| 35°C. | 0.7908 |
| 45°C. | 0.7811 |
| $\Delta d/\Delta t$, g./ml. per °C. at 25°C. | 0.0011 |
| Boiling Point, °C. at 760 mm. Hg | 66.0 |
| $\Delta \text{B.P.}/\Delta p$, °C. per mm. Hg at 760 mm. Hg | 0.038 |
| Vapor Pressure at 25°C., mm. Hg | 140 |
| Refractive Index, n_D at 25°C. | 1.4084 |
| Absolute Viscosity, centipoises at 25°C. | 0.491 |
| pKa at 25°C. | 8.18 |
| Heat of Vaporization at 66°C. and 1 atm, cal. per g. | 139 |
| Integral Heat of Solution of P.I. in water, 5 wt. % P.I. final conc., kcal./mole | 4.5 |
| Heat of Vaporization at 66°C. and 1 atm, BTU per lb. | 250 |
| Solubility: | |
| Water | Soluble in all Proportions |
| Polar organic solvents | |
| Pentane | |

AMIDES

Table 14.99: Formamide (11)




Formamide is a water-white to light yellow, hygroscopic liquid. It is miscible in all proportions with the lower alcohols and glycols, but is insoluble in hydrocarbons, chlorinated solvents and ethers. Its high dielectric constant is an indication of its high ionizing power.

Formamide dissolves many metal chlorides, iodides, nitrates, phosphates, and some carbonates and is less soluble in sulfates and oxides. Proteins, saccharides, and polyvinyl alcohol dissolve or soften in formamide. Cellulose will swell in formamide as it does in water. Formamide is a nonaqueous solvent for electrolytes due to its ionizing solvent action on numerous inorganic salts.

| AVERAGE ANALYSIS | |
|-------------------------------------------------------|-----------------------|
| Formamide, % | 98.5 |
| Methanol, % | 1.0 |
| Color (as shipped), APHA | 7 |
| PHYSICAL PROPERTIES | |
| Molecular weight | 45.04 |
| Boiling point (760mm), °C | 210 |
| °F | 410 |
| Freezing point, °C | 2.6 |
| °F | 36.7 |
| Specific gravity, 25°/4°C (77°/39°F) | 1.1339 |
| Density, lb/gal, 60°F (15.6°C) | 9.5 |
| Refractive index, N_D^{20} | 1.4481 |
| Surface tension, dynes/cm, 20°C (68°F) | 58.35 |
| Viscosity, cp, 20°C (68°F) | 3.76 |
| Dielectric constant, 20°C (68°F) | 84 |
| Solubility parameter | 19.2 |
| Hydrogen bonding index | >16.2 |
| Specific conductance, ohm ⁻¹ , 25°C (77°F) | 18.9×10^{-5} |
| Specific heat of liquid, cal/g, 19°C | 0.55 |
| Btu/lb, 66°F | 0.99 |
| Latent heat of vaporization, cal/g, 210°C | .400 |
| Btu/lb, 410°F | .720 |
| Flash point (TOC), °F | 310 |
| °C | 154.4 |

Table 14.100: Dimethylformamide (11)

DMF



DMF, dimethylformamide, is a uniquely versatile and powerful solvent with the following general properties:

| | | | |
|--------------------------------------------|--------------------------|-------------------------------------------------|------------------|
| Appearance | Colorless, mobile liquid | Flash point, T.O.C., °C | 67 (153°F) |
| Molecular weight | 73.09 | Ignition temperature, °C | 445 (833°F) |
| Boiling point, 760mm, °C | 153 (307°F) | Flammability limits in air | |
| Freezing point, °C | -61 (-78°F) | lower | 2.2 vol % |
| Specific gravity 0°/4°C | 0.9683 | upper | 15.2 vol % |
| 25°/4°C | 0.9445 | Dielectric constant, 25°C | 36.71 |
| Density, lbs/gal, 20°C | 7.92 | Dipole moment, 20°C | 3.82 Debye Units |
| Refractive index, $N_D^{25^\circ\text{C}}$ | 1.4269 | Hygroscopicity, 30°C (300 hrs @ 50% RH) | 34% gain |
| Vapor pressure, 25°C | 3.7mm | Relative evaporation rate (butyl acetate = 100) | 17 |
| Viscosity, 25°C | 0.802 cp | Solubility parameter | 12.1 |
| Surface tension, 25°C | 35.2 dynes/cm | Ionization constant (@ 20°C) | 10^{-18} |
| Specific heat (liquid, 20°C) | 0.49 Btu/lb/°F | <i>Azeotropes:</i> | |
| Heat of vaporization | 248 Btu/lb | DMF (18.7 wt %), p-xylene (81.3%) | 135.1°C at 760mm |
| Heat of combustion | 457.5 kg cal/gm mol | DMF (69 wt %), formic acid (31 wt %) | 162.4°C at 760mm |
| | 11,280 Btu/lb | DMF (7 wt %), tetrachlorethylene (93.0 wt %) | 117.5°C at 730mm |
| Thermal conductivity (at 23.5°C) | 440 cal/sec cm°C | | |

(continued)

Table 14.100: (continued)

Evaporation Rate

Atmospheric conditions . . .

| % Evaporation | Time, Hours |
|---------------|-------------|
| 0 | 0 |
| 20 | 8 |
| 40 | 16 |
| 60 | 26 |
| 80 | 34 |
| 100 | 44 |

Heat of Mixing DMF-Water . . .

Temp 30°C . . .

| Wt % DMF in Aqueous Solution | Btu/lb DMF |
|------------------------------|------------|
| 5 | 89 |
| 10 | 82.5 |
| 15 | 75 |
| 20 | 73.5 |
| 25 | 70 |
| 30 | 66 |
| 35 | 64 |

Flash and Fire Point of DMF Water Solutions . . .

| Composition, DMF-H ₂ O Mixture—DMF % by Wt | Flash Point °F | Fire Point °F |
|-------------------------------------------------------|----------------|---------------|
| 100 | 145 | 150 |
| 90 | 165 | 170 |
| 70 | 215 | 230 |
| 65 | 210 | 225 |
| 60 | none | none |
| 50 | none | none |

Table 14.101: Surface Tension and Density of DMF-Water Mixtures (11)

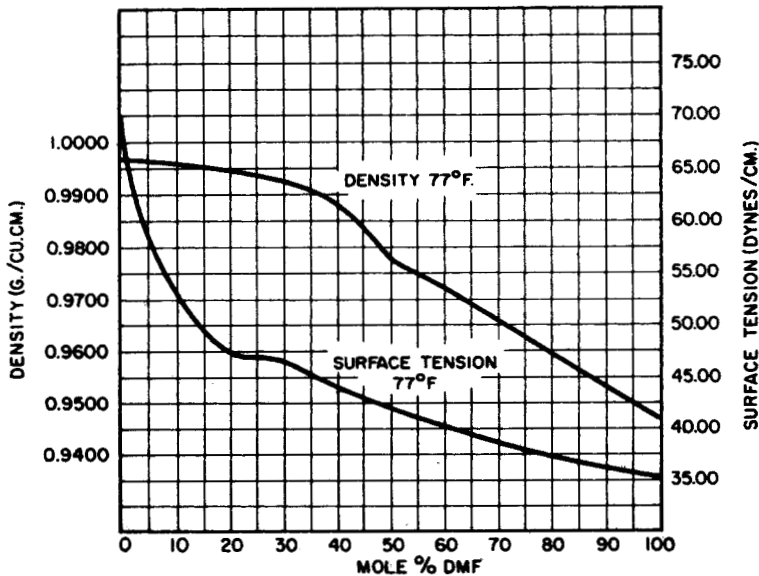


Table 14.102: Semi-Quantitative Solubilities of Inorganic Materials in DMF at 25°C (11)

| Salt | Solubility g/100g DMF | Salt | Solubility g/100g DMF |
|------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------|--------------------------|
| AgBr | 0.03 | LiH | 0.7 |
| AgCl | 0.01 | MgCl ₂ | moderate |
| AgI | 0.04 | MgSO ₄ | 0.13 ^u |
| AlCl ₃ | reaction | MnCl ₂ · 4H ₂ O | 15 |
| Al(NO ₃) ₃ · 9H ₂ O | 20 | NaB(OCH ₃) ₄ | 77.8 |
| Be(NO ₃) ₂ · 3H ₂ O | 20 | NaBH ₄ | 25.5 ^u |
| CaCl ₂ | Approx. 0.5 | NaCHO ₂ | 0.03 |
| CaF ₂ | 0.05 | NaC ₂ H ₃ O ₂ · 3H ₂ O | 1.5 |
| Ca(NO ₃) ₂ · 4H ₂ O | 20 | NaCl | 0.05 |
| CaSO ₄ · 2H ₂ O | 1.2 ^u | NaCN | 0.76 |
| Cd(NO ₃) ₂ | 20 | NaCNO | 0.05 |
| Co(C ₂ H ₃ O ₂) ₂ · 4H ₂ O | 20 | NaCNS | 29.2 |
| CoCl ₂ · 6H ₂ O | 20 | Na ₂ CO ₃ | 0.05 |
| Co(NO ₃) ₂ · 6H ₂ O | 20 | Na ₂ Cr ₂ O ₇ · 2H ₂ O | 20 |
| CoSO ₄ · 7H ₂ O | slight | Na ₂ Fe(CN) ₅ (NO) · 2H ₂ O | 25 |
| CrCl ₃ · 6H ₂ O | 40 | Na ₂ HPO ₄ | 0.05 |
| Cu(C ₂ H ₃ O ₂) ₂ | slight | Nal | 14.4 |
| CuCl ₂ · 2H ₂ O | 15 | NaIO ₃ | 0.05 |
| Cu(NO ₃) ₂ · 3H ₂ O | 20 | NaNO ₂ | 2.0* |
| CuSO ₄ | 1.8 | NaNO ₃ | 15.4 |
| FeCl ₃ | 20 | NaPO ₃ | 0.05 |
| Fe(NO ₃) ₃ · 6H ₂ O | 20 | Na ₂ S ₂ O ₃ | 0.08 |
| FeSO ₄ · 7H ₂ O | slight | NH ₄ Br | 12.7 ^u |
| HgCl ₂ | 25 | NH ₄ C ₂ H ₃ O ₂ | 0.1 |
| I ₂ | 25 | NH ₄ Cl | 0.1 |
| KBH ₄ | 1.2 | NH ₄ CNS | 15.2 |
| KC ₂ H ₃ O ₂ | 0.09 | (NH ₄) ₂ CO ₃ | 0.04 |
| KCl | 0.05 | NH ₄ NO ₃ | 55.1 |
| KCN | 0.22 | NiCl ₂ · 6H ₂ O | 5 |
| KCNO | 0.12 | Ni(NO ₃) ₂ · 6H ₂ O | 20 |
| KCNS | 18.2 | Pb(C ₂ H ₃ O ₂) ₂ · 3H ₂ O | 1.5 |
| K ₃ Fe(CN) ₆ | 0.05 | Pb(HCO ₂) ₂ | 0.1 |
| KI | 25 | PbO | 0.3 |
| KMnO ₄ | reaction | PbS | 0.15 |
| KNO ₂ | 0.7 ^{u*} | PbSO ₄ | 0.1 |
| KNO ₃ | 1.5 | | |
| KOH | 0.1 | | |
| LiBH ₄ | 3.5 ^u | | |
| LiCl | 11.40 | | |

*Urea increases solubility:
 4.7g NaNO₂ with 4.6g urea
 8.1g NaNO₂ with 9.3g urea
 3.7g KNO₂ with 7.5g urea

| | | |
|--------------------------------------------------|--------------------------------------------------------------|----|
| Cellulosic | Cellulose nitrate | S |
| | Cellulose acetate | S |
| | Cellulose acetate butyrate | S |
| | Cellulose acetate propionate | S |
| | Cellulose triacetate | PS |
| | Ethyl cellulose | S |
| | Cyanoethylated cellulose | S |
| Chlorinated Polyether ("Penton"—Hercules Powder) | | I |
| Nylon (polyamides) Types 6/6, 6, 6/10 | | I |
| | Type 8 (Belding-Corticelli Industries, B.C.I.) | S |
| Polyethylene | | I |
| Polypropylene | | I |
| Polycarbonate ("Lexan"—General Electric Company) | | PS |
| Fluorocarbons | Polytetrafluoroethylene ("Teflon"*) | I |
| Styrene | Polystyrene | S |
| | Styrene-acrylonitrile copolymer (Tyrl 767—Dow) | S |
| Vinyl Polymers and Copolymers | Polyvinyl chloride | S |
| | Polyvinyl chloride-acetate | S |
| | Polyvinyl alcohol | S |
| | Polyvinyl butyral ("Butacite"*)—DuPont | S |
| | Vinylidene chloride/vinyl chloride copolymer (Geon 200 x 20) | S |
| | Vinylidene chloride/vinyl chloride copolymer (Saran B-115) | I |
| | Polyvinyl acetate | S |
| | Polyvinyl formal | S |
| | Polyvinyl fluoride | S |
| Polyesters | Saturated ("Mylar"*) | I |
| | Alkyd | S |
| Phenolic | Phenol-formaldehyde pure resin | S |
| | Ester gum modified phenol-formaldehyde | S |
| | Urea formaldehyde | I |
| | Thiourea formaldehyde | S |
| Coumarone | Coumarone-indene | S |
| Natural | Garnet shellac | S |
| | Orange shellac | PS |
| | Ester gum | S |
| | Kauri gum | S |
| | Manila copal | S |
| | Esterified congo copal | I |
| | Wood resin | S |
| | Damar | I |
| | Soft albino asphalt | PS |
| Epoxy (cured) | | I |
| Polyurethanes | | S |

(continued)

Table 14.102: (continued)

Polymer Solvent

The principal use of DMF is as a solvent in the spinning of acrylic and polyurethane fibres. This is a specialised outlet but illustrates the solvent power of DMF for polymers of high molecular weight.

Various polymers which are soluble in DMF together with some which are insoluble are shown in the following lists:

| <i>Soluble</i> | <i>Insoluble</i> |
|----------------------------|--------------------------|
| polyacrylonitrile | polyethylene |
| polyurethanes | polypropylene |
| polymethylmethacrylate | polytetrafluoroethylene |
| cellulose acetate | saturated polyesters |
| cellulose nitrate | urea-formaldehyde resins |
| cellulose acetate butyrate | natural rubber |
| ethylcellulose | butyl rubber |
| cyanooethylated cellulose | styrene-butadiene rubber |
| polystyrene | nylon 66, 6, and 610 |
| polyvinyl chloride | |
| polyvinyl alcohol | |
| polyvinyl acetate | |
| alkyds | |
| phenol-formaldehyde resins | |
| coumarone-indene resins | |
| shellac | |
| ester gum | |
| kauri gum | |

Not only does DMF allow many polymers of sparing solubility to be brought into solution at economical concentrations, but when used either alone or as a booster solvent it yields solutions with lower viscosities and higher solids content than can be obtained with other solvents. It is therefore suggested as an attractive solvent for use in the formulation of protective coatings and films, adhesives, and printing inks.

Reaction Solvent and Catalyst

The use of DMF alone or as a component of a solvent system confers a number of advantages, the relative importance of which depends upon the particular application, but the following may be specially noted:

- (a) its high solvent power can increase the effective concentration of one of the reacting species;
- (b) it has a high dielectric constant;

Table 14.103: Dimethylacetamide (11)

DMAC

PHYSICAL PROPERTIES OF DIMETHYLACETAMIDE:

| | |
|---------------------------------------------------|--------------------------------------------------------------------|
| Formula | $\text{CH}_3\overset{\text{O}}{\parallel}\text{CN}(\text{CH}_3)_2$ |
| Molecular weight | 87.12 |
| Boiling point | 165.5°C |
| Vapor pressure at 25°C | 1.3 mm |
| Freezing point | -20°C |
| Specific gravity (15.5°C) | 0.9448 |
| Pounds per gallon (15.5°C) | 7.87 |
| Viscosity (25°) | 0.92 cp |
| Refractive index | 1.4356 |
| Dielectric constant | 37.8 |
| Dipole moment (in dioxane) | 3.79 |
| Flash point (Tag Open Cup) | 70°C |
| Thermal conductivity (22.2°C) | $416 \times 10^{-6} \text{ cal/sec/cm}^2/\text{°C}$ |
| Specific heat (liquid, 0 to 87°C) | 0.485 BTU/lb°F |
| Heat of vaporization at 165°C (cal'd) | 10,360 cal/g mol |
| Heat of combustion (20°C) | 608 k cal/g mol |
| Flammability limits in air at 740 mm Hg and 160°C | |
| Lower | 2.0% by vol |
| Upper | 11.5% by vol |

(continued)

Table 14.103: (continued)

| Vapor pressure:— | |
|------------------|-----------------|
| Temperature, °C | Pressure, mm Hg |
| 25 | 1.3 |
| 40 | 3.4 |
| 70 | 18 |
| 90 | 46 |
| 110 | 108 |
| 130 | 230 |
| 150 | 460 |
| 165.5 | 758 |

Azeotrope —

DMAC (77.2 wt %)—acetic acid (21.1 wt %)—170.8°C at 760 mm

Solubility—Completely miscible with water, ethers, esters, ketones, and aromatic compounds. Unsaturated aliphatics are highly soluble, but saturated aliphatics have limited solubility.

| | Solubility at 25°C g/100 g DMAC |
|----------------|------------------------------------|
| Iso-octane | 33 |
| Di-isobutylene | Compl Misc |
| N-hexane | “ “ |
| N-Heptane | 31 |
| Cyclohexane | Compl Misc |
| Cyclohexene | “ “ |
| Kerosene | 16 |

Table 14.104: Viscosities of Resins in DMAC (11)

| Viscosities of Surface Coating Resins in DMAC | |
|-----------------------------------------------|--------------------------------------------|
| | Viscosity at 25°C, 15 wt % Solution—cps |
| <i>Acrylic Resins</i> | |
| Acryloid ^(a) A-21 ^(b) | 23 |
| A-107 ^(b) | 23 |
| B-72 ^(b) | 20 |
| Lucite ^(c) 44 | 26 |
| 45 | 38 |
| 46 | 30 |
| <i>Epoxy Resins</i> | |
| Epon ^(d) 1001 | 5 |
| 1002 | 6 |
| 1004 | 7 |
| 1007 | 10 |
| <i>Cellulosic Resins</i> | |
| Half-Sec. Butyrate | 555 |
| EAB-500-1 ^(e) | 950 |
| EAB-171-2 ^(e) | 1275 |
| <i>Urea-Formaldehyde Resins</i> | |
| Uformite ^(a) F-222 ^(f) | 20 |
| <i>Melamine-Formaldehyde Resin</i> | |
| MM-55 | 18 |

Viscosities of Vinyl Resins in DMAC

| | Viscosity at 25°C, 15 wt % resin in 50/50 Solvent/ Toluene, cps |
|-------------------------|-----------------------------------------------------------------------|
| VYHH ^(g) | 52 |
| VAGH ^(g) | 53 |
| VMCH ^(g) | 48 |
| Geon ^(h) 121 | 230 |
| Geon ^(h) 101 | 3800 |

Viscosities of Nitrocellulose Solutions in DMAC

| | Viscosity at 25°C, 8 wt % resin in Solvent, cps |
|-------------------------------------|----------------------------------------------------|
| HB-14 Nitrocellulose ^(c) | 18 |

(a)—Rohm and Haas Company

(b)—Reduced to 5 wt % solids with DMAC

(c)—E. I. du Pont de Nemours & Co. (Inc.)


(d)—Shell Chemical Corporation

(e)—Eastman Chemical Products, Inc.

(f)—Reduced to 30 wt % solids with DMAC

(g)—Union Carbide Chemicals Company

(h)—B. F. Goodrich Chemicals Company

Table 14.105: 1-Formylpiperidine (78)

1-Formylpiperidine, an amide solvent, is a stable, highly ordered, dipolar aprotic liquid having a high boiling point and wide liquid range (-30.6° to 222°C), making this a favorable solvent for nonvolatile applications in gas absorption processes, ink and dye systems, and plastics modifiers and stabilizers. 1-Formylpiperidine is a strong solvent for both polar and nonpolar compounds. It is unusual for its solubility in both water and hexane. It is miscible with acyclic alkanes (C₆ and below), cycloalkanes, alcohols, esters, ketones, aldehydes, amines, carboxylic acids and hydrides, amides, alkyl halides beyond C₁₁, stearates, ethers, olefins, nitriles, nitro compounds, heterocyclics, aromatics, organo-phosphorus compounds, alkynes, organotin compounds, organosilicates and inorganic acids. The high solubility of many polymers in 1-formylpiperidine is of particular significance. 1-Formylpiperidine is a reactive solvent reacting at the carbonyl center and at the amide nitrogen.

| | |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------|
| Molecular Formula | C ₆ H ₁₁ NO |
| Molecular Weight | 113.16 |
| Density | 1.02 g/ml (8.51 lb/gal) |
| Index of Refraction (25.0°C) | 1.4823 |
| Freezing Point | -30.6°C |
| Boiling Point | 222°C |
| Vapor Pressure | |
| 25°C | 0.1 mm Hg (0.002 lb/in ² , 0.0001 atm) |
| 100°C | 14 mm Hg (0.27 lb/in ² , 0.02 atm) |
| Heat of Vaporization (ΔH _{vap}) | 16.5 kcal/mol (262 Btu/lb) |
| Heat of Fusion (ΔH _f) | 2.2 kcal/mol (35 Btu/lb) |
| Heat of Sublimation (ΔH _{sub}) | 18.7 kcal/mol (297 Btu/lb) |
| Entropy of Vaporization (ΔS _{vap}) | 33.4 cal/°mol |
| Molar Freezing Point Depression Constant | 5.7°C/mol |
| Corrosion of Metals at 222°C | |
| Mild Steel | 0.3 × 10 ⁻⁴ in/yr |
| Brass | 3.2 × 10 ⁻⁴ in/yr |
| Copper | 5.2 × 10 ⁻⁴ in/yr |
| Hydroscopicity (23°C, 100% RH, exposed surface area/volume = 1.67 cm ⁻¹) | 0.16% weight gain/hour (nearly linear to 100 hr) |

Solubilities of Gases (g/100 g, 23°C, 1 atm)

| | |
|-----------------|---------------|
| Ammonia | 1.1 |
| 1,3-Butadiene | 12.9 |
| 1-Butene | 6.8 |
| Carbon Dioxide | 0.8 |
| Methyl Chloride | 12.9 |
| Ethane | 0.2 |
| Methane | less than 0.1 |

Solubilities of Inorganic Solids (g/100 g, 23°C)


| | |
|------------------------|--------|
| Aluminum Chloride | Reacts |
| Potassium Acetate | 0.51 |
| Potassium Cyanide | 0.06 |
| Potassium Iodide | 18.9 |
| Potassium Permanganate | Reacts |
| Sodium Chloride | 0.08 |
| Ammonium Bromide | 2.4 |
| Sodium Iodide | 17.1 |
| Sodium Hydroxide | 0.02 |

ToxicityLD₅₀ in rats and mice (C5)

~1,100 mg/kg of body weight


(continued)

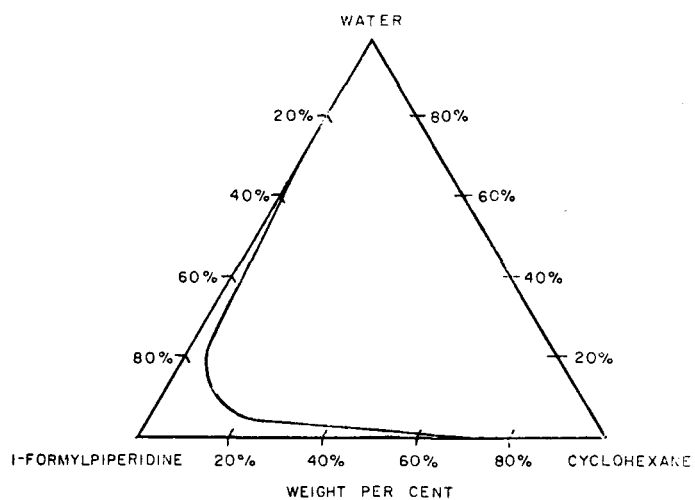Table 14.105: (continued)




PHASE DIAGRAM FOR THE
TERNARY SYSTEM

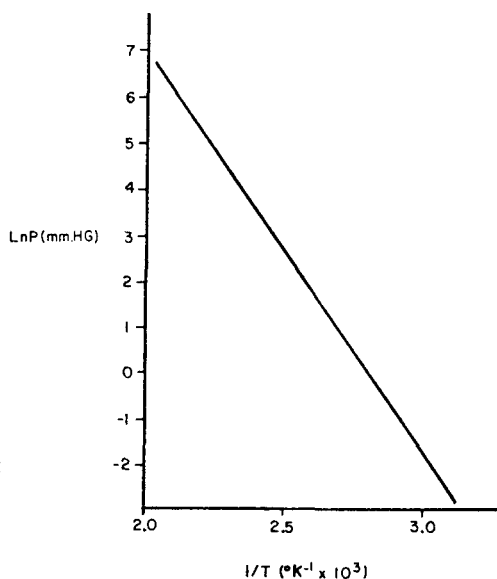I-FORMYLPYPERIDINE, WATER, CYCLOHEXANE
at 25°C, 1 ATMOSPHERE




CLAUSIUS-CLAPEYRON PLOT

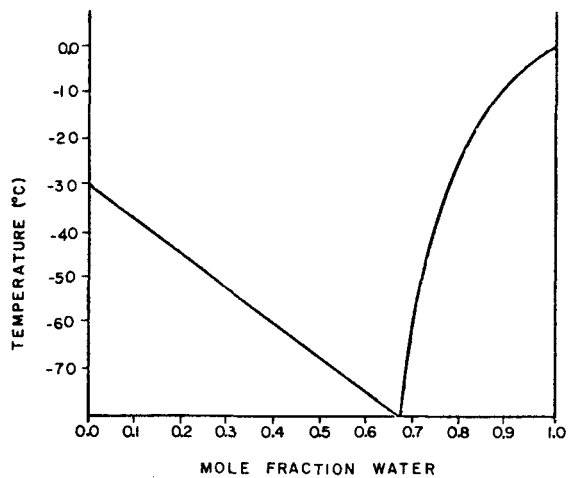
VAPOR PRESSURE I-FORMYLPYPERIDINE



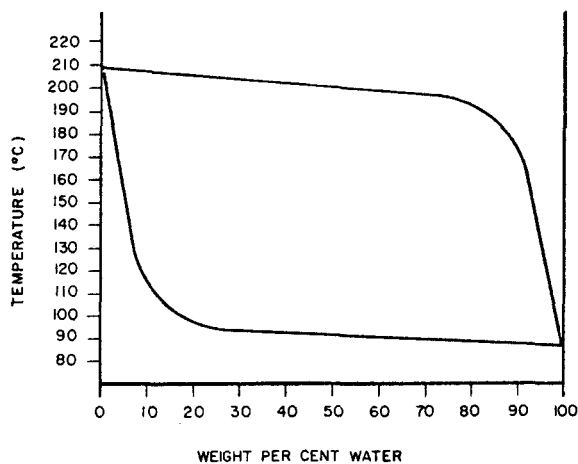FREEZING POINT-COMPOSITION DIAGRAM FOR
THE I-FORMYLPYPERIDINE, WATER SYSTEM



LIQUID-VAPOR COMPOSITION DIAGRAM FOR THE
I-FORMYLPYPERIDINE, WATER SYSTEM

NITRILES**Table 14.106: n-Butyronitrile (19)**

n-Butyronitrile is a clear, colorless liquid which is slightly soluble in water and completely miscible with common organic solvents. The product undergoes reactions typical of the aliphatic nitriles.

Physical Properties


| | |
|---------------------------------------|-------------|
| Molecular weight | 69.10 |
| Specific gravity, 20/20°C | 0.7920 |
| Boiling point, 760 mm | 117.5°C |
| 50 mm | 43°C |
| 10 mm | 13°C |
| Vapor pressure, 20°C. | 15 mm |
| Freezing point | -111.90°C |
| Solubility, in water, 20°C | 3.5% by wt. |
| water in, 20°C | 2.5% by wt. |
| Viscosity, 0°C | 0.8 cps. |
| 20°C | 0.6 cps. |
| 40°C | 0.5 cps. |
| Refractive index, n_{D}^{20} | 1.3841 |
| Weight per gallon, 20°C | 6.60 lbs. |
| Flash point | 79°F |

Shipping Data

| | |
|-------------------------|----------|
| Net Container Contents: | |
| 1-gallon tin can | 6.5 lbs. |
| 5-gallon iron drum | 30 lbs. |
| 55-gallon iron drum | 360 lbs. |

Typical Analysis of Current Production

| | |
|-------------------|--------------|
| Specific gravity | 0.7907 |
| Distillation, IBP | 115.7°C |
| 50 ml | 117.6°C |
| -DP | 118.4°C |
| n-Butyronitrile | 98.9% by wt. |
| Water | 0.09% by wt. |
| Alkalinity | 0.22 meq/gm |
| Color | 5 Pt-Co |

HETEROCYCLIC COMPOUNDS**Table 14.107: Pyrrole (49)**


| | |
|------------------|---------------------------------------|
| Appearance | Colorless liquid, darkens on standing |
| Odor | Mild, nonirritating |
| Molecular Weight | 67.09 |
| Boiling Point* | 129°C. (264°F.) at 760 mm. |

| | |
|-----------------------------------|---------------------|
| Freezing Point* | -24°C. (-11°F.) |
| Specific Gravity, 20/4°C.* | 0.968 |
| Index of Refraction, n_{20}/D^* | 1.5095 |
| Flash Point (Tag closed cup) | 39°C. (102°F.) |
| Modified Reid Vapor Pressure* | 0.25 p.s.i. (±0.05) |

*Determined on purified pyrrole

Table 14.108: 2-Pyrrolidone (49)

CHEMICAL STRUCTURE 2-PYROL®:



2-pyrrolidone

Molecular Weight 85

PHYSICAL PROPERTIES* Physical Characteristics of 2-PYROL:

| | |
|-----------------------------------|--------------------|
| Physical State | Liquid |
| Boiling Point at 760 mm | 245° C |
| Boiling Point at 400 mm | 226° C |
| Boiling Point at 200 mm | 202° C |
| Boiling Point at 100 mm | 181° C |
| Boiling Point at 60 mm | 170° C |
| Boiling Point at 40 mm | 155° C |
| Boiling Point at 20 mm | 138° C |
| Boiling Point at 10 mm | 122° C |
| Density at 25° C | 1.107 g/ml |
| Density at 50° C | 1.087 g/ml |
| Density at 75° C | 1.067 g/ml |
| Density at 100° C | 1.046 g/ml |
| Density at 125° C | 1.025 g/ml |
| Density at 150° C | 1.005 g/ml |
| Density at 175° C | 0.985 g/ml |
| Viscosity at 25° C | 12.0 cs or 13.3 cp |
| Refractive Index n_D^{25} | 1.486 |
| Flash Point (open cup) | 129.4° C (265° F) |
| Fire Point | 145° C (293° F) |
| pH (10% aqueous solution) | 8-10 |

As shipped, 2-PYROL meets a specification of 98.5% minimum purity, 0.5% maximum moisture.

Solubility: 2-PYROL is completely soluble in

| | | |
|---------------|------------|------------------|
| water | chloroform | ethyl acetate |
| ethyl alcohol | benzene | carbon disulfide |
| ethyl ether | | |

Dissolves polymers
 chlordane
 DDT
 d-sorbitol
 glycerine
 iodine
 sugars

*These data are typical of current production but are not specifications

Table 14.109: Phase Diagram for 2-Pyrrolidone-Water (49)

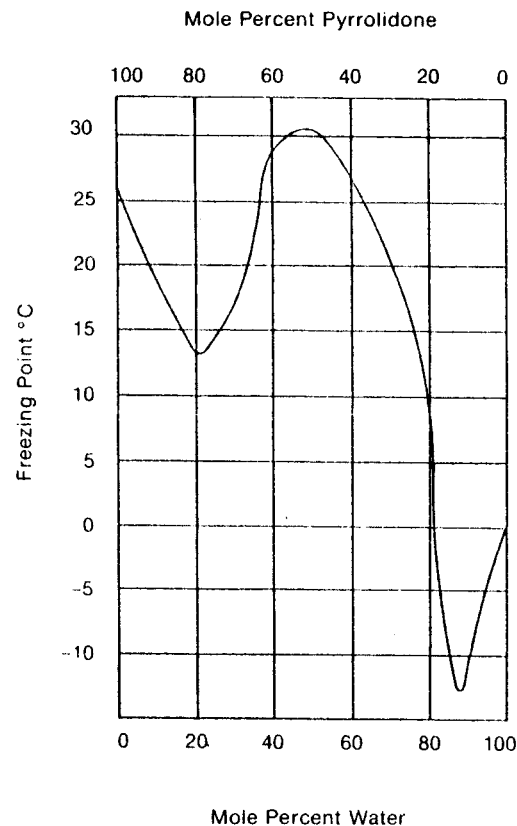



Table 14.110: N-Methyl-2-Pyrrolidone (49)

Structural Formula

M-PYROL

Empirical Formula

C₅H₉NO

| | | CGS | ENGLISH |
|--------------------------------------------------|---------|-----------------------------------------------|--------------------------------------|
| Molecular Weight | | 99.1 | 99.1 |
| Purity (N-methyl-2-pyrrolidone, area% VPC) | | 99.8% min | |
| Physical form | | liquid with mild amine-like odor | |
| Moisture Content | | 0.05% max | 0.05% max |
| Density - Liquid | (20°C) | 1.03 gm/cc | 64.3 lb/ft ³ |
| | (30°C) | 1.02 gm/cc | 63.8 lb/ft ³ |
| | (40°C) | 0.99 gm/cc | 61.8 lb/ft ³ |
| Boiling Point | @ 760mm | 202°C | 395°F |
| | @ 162mm | 150°C | 302°F |
| | @ 24mm | 100°C | 212°F |
| Freezing Point | | -29.4°C | -11.9°F |
| Viscosity | (20°C) | 1.7 cp | 4.11 lb/ft-hr |
| | (50°C) | 1.0 cp | 2.41 lb/ft-hr |
| | (80°C) | 0.9 cp | 2.17 lb/ft-hr |
| Specific Gravity (d ₄ ²⁵) | | 1.027 | |
| | @ 75°C | 0.987 | |
| | @ 100°C | 0.969 | |
| Interfacial Surface Tension (25°C) | | 40.7 dynes/cm | |
| Flash Point (ASTM D 93-72) | | 93°C | 199°F |
| Heat of Vaporization — 100°C | | 127.3 K cal/kg | 230 BTU/lb |
| Specific Heat - Liquid | (0°C) | 0.401 cal/g·°C | 0.401 BTU/lb·°F |
| | (50°C) | 0.465 cal/g·°C | 0.465 BTU/lb·°F |
| | (100°C) | 0.502 cal/g·°C | 0.502 BTU/lb·°F |
| Specific Heat - Vapor (25°C) | | 0.301 cal/g·°C | 0.301 BTU/lb·°F |
| Vapor Pressure - | (40°C) | 1.0 Torr | 0.02 psi |
| | (60°C) | 3.5 Torr | 0.07 psi |
| | (80°C) | 9.5 Torr | 0.19 psi |
| Refractive Index | | 1.4700 | 1.4700 |
| Heat of Combustion | | 7.29 kcal/g | 13,100 BTU/lb |
| Dipole Moment | | 4.09 ± 0.04 Debye | |
| Dielectric Constant (25°C) | | 32.2 | |
| Ignition Temperance (ASTM D 286-58 T) | | 270°C | 518°F |
| Flammable Limits in Air | Upper | 9.5 vol % | 9.5 vol. % |
| | Lower | 1.3 vol. % | 1.3 vol. % |
| Thermal Conductivity (25°C) | | 1.33 W/cm·°C | 1.13 BTU-in/ft. ² hr°F |
| Hansen Solubility parameters: | | | |
| | | δd 8.8 (cal/cm ³) ^{1/2} | |
| | | δp 6.0 (cal/cm ³) ^{1/2} | |
| | | δh 3.5 (cal/cm ³) ^{1/2} | |
| | | δt 11.2 (cal/cm ³) ^{1/2} | |
| Kauri-Butanol Value (ASTM D1138-83) | | >300 | |

Table 14.111: Acute Oral Toxicity (49)

M-Pyrol shows a low order of oral toxicity for each of the species investigated.

| LD ₅₀ | Species | Reference |
|------------------|----------------|-----------|
| 4.1 g/kg | Mouse | (1) |
| 7.5 g/kg | Mouse | (2) |
| 4.2 g/kg | Rat | (3) |
| 3.8 ml/kg | Rat | (2) |
| 3.5 ml/kg | Rat | (4) |
| 4.4 g/kg | Guinea Pig | (5) |
| 3.5 g/kg | Rabbit | (5) |
| 2.5-5.0 g/kg | Bobwhite Quail | (6) |

Table 14.112: Acute Dermal Toxicity (49)

M-Pyrol is readily absorbed through the skin and shows dermal toxicity of approximately the same magnitude as oral toxicity.

| LD ₅₀ | Species | Reference |
|------------------|-----------------------|-----------|
| 7.0 g/kg | Rat | (1) |
| 5-10 g/kg | Rat | (8) |
| 4-8 g/kg | Rabbit | (6) |
| 2-4 g/kg | Rabbit (abraded skin) | (6) |

Table 14.113: Injection Toxicity (49)

As might be expected, M-Pyrol is slightly more toxic by injection than by the other modes of application. Differences, however, are generally small so that toxicity is still low.

| Injection mode | LD ₅₀ | Species | Reference |
|-----------------|------------------|---------|-----------|
| Intraperitoneal | 4.3 ml/kg | Mouse | (2) |
| Intraperitoneal | 1.9 ml/kg | Mouse | (4) |
| Intraperitoneal | 2.4 ml/kg | Rat | (2) |
| Intravenous | 3.5 ml/kg | Mouse | (2) |
| Intravenous | 2.4 ml/kg | Rat | (2) |

Intravenous injection of M-Pyrol in rats was studied, monitoring arterial blood pressure, blood glucose levels and electrocardiograms. Doses of 50 mg/kg produced a slight and short-lived hypotension without altering the ECG; hyperglycemia was observed at the higher dosage only. At 500 mg/kg, hypotension, hyperglycemia, and ECG alterations were all produced.

Table 14.114: Toxicity to Aqueous Organisms (49)

M-Pyrol shows low toxicity for all of the aquatic animals tested.

| LC ₅₀ | Species | Reference |
|------------------|----------------|-----------|
| 0.8 ml/l | Sunfish | (6) |
| 1.1 ml/l | Fathead Minnow | (6) |
| 3.0 ml/l | Trout | (6) |
| 1.3 ml/l | Guppy | (1) |
| 4.9 ml/l | Daphnia | (6) |
| 4.7 ml/l | Scud | (6) |
| 1.6 ml/l | Mud Crab | (6) |
| 1.1 ml/l | Grass Shrimp | (6) |

Table 14.115: Infrared Absorption Spectrum (49)

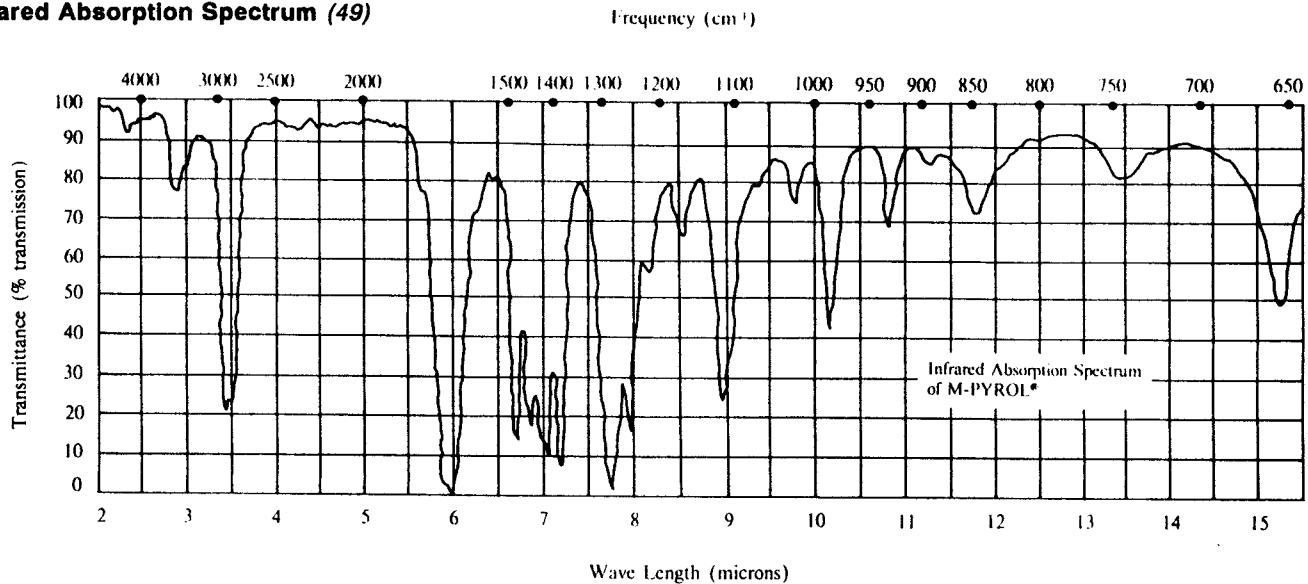


Table 14.116: Specific Heat (49)

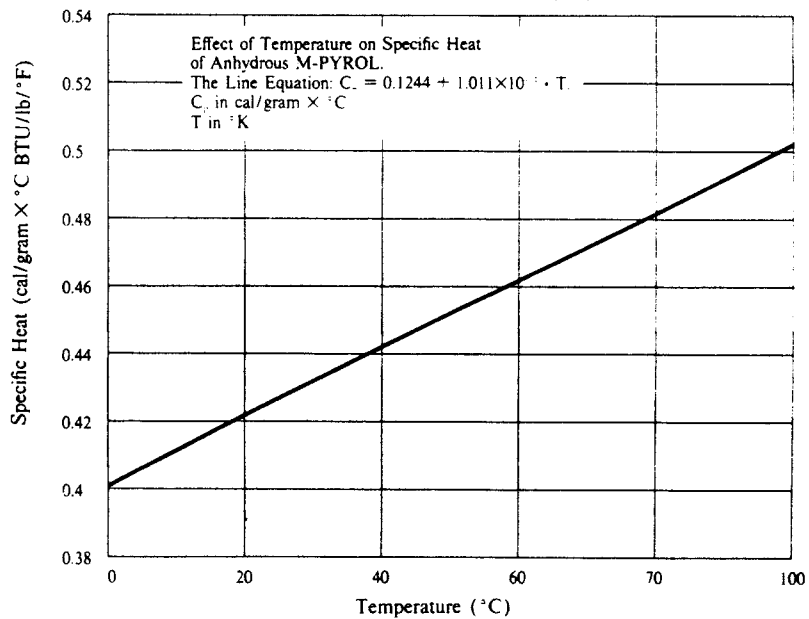


Table 14.117: Thermal Conductivity (49)

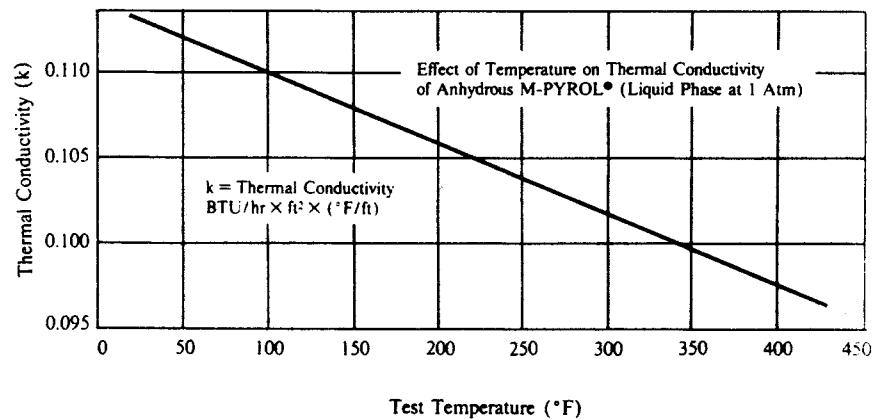


Table 14.118: Vapor Pressure (49)

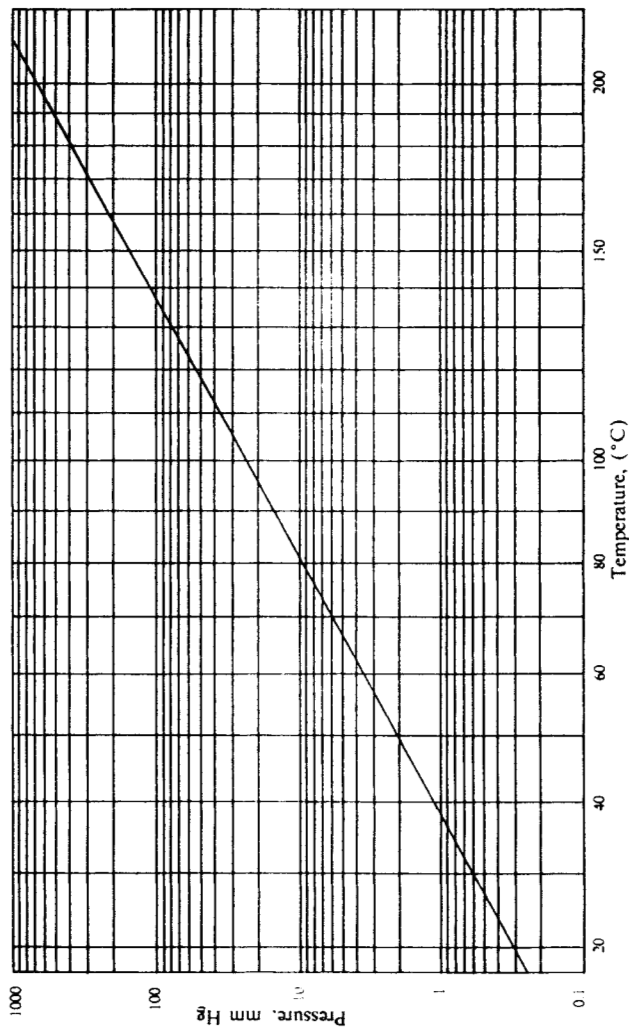


Table 14.119: Comparison of Vapor Pressures of M-PYROL and Other Aprotic Solvents (49)

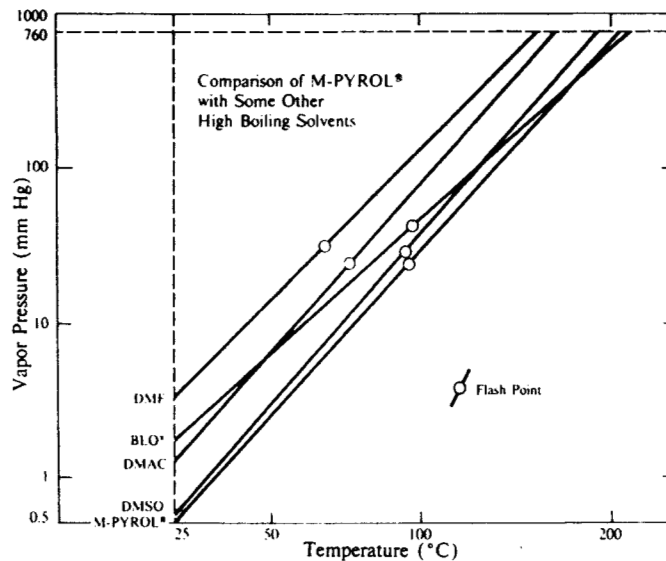


Table 14.120: Surface Tension (49)


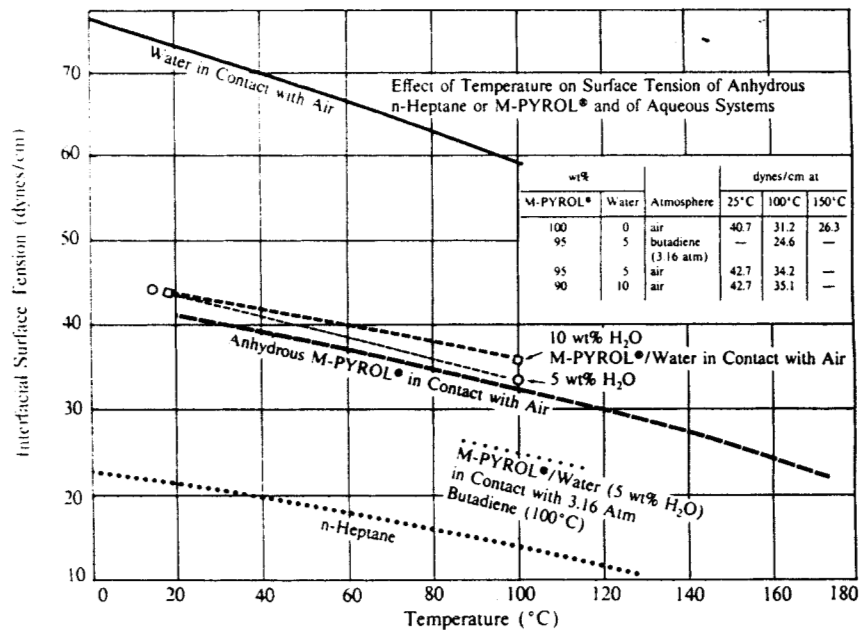


Table 14.121: Freezing Point Curve (49)

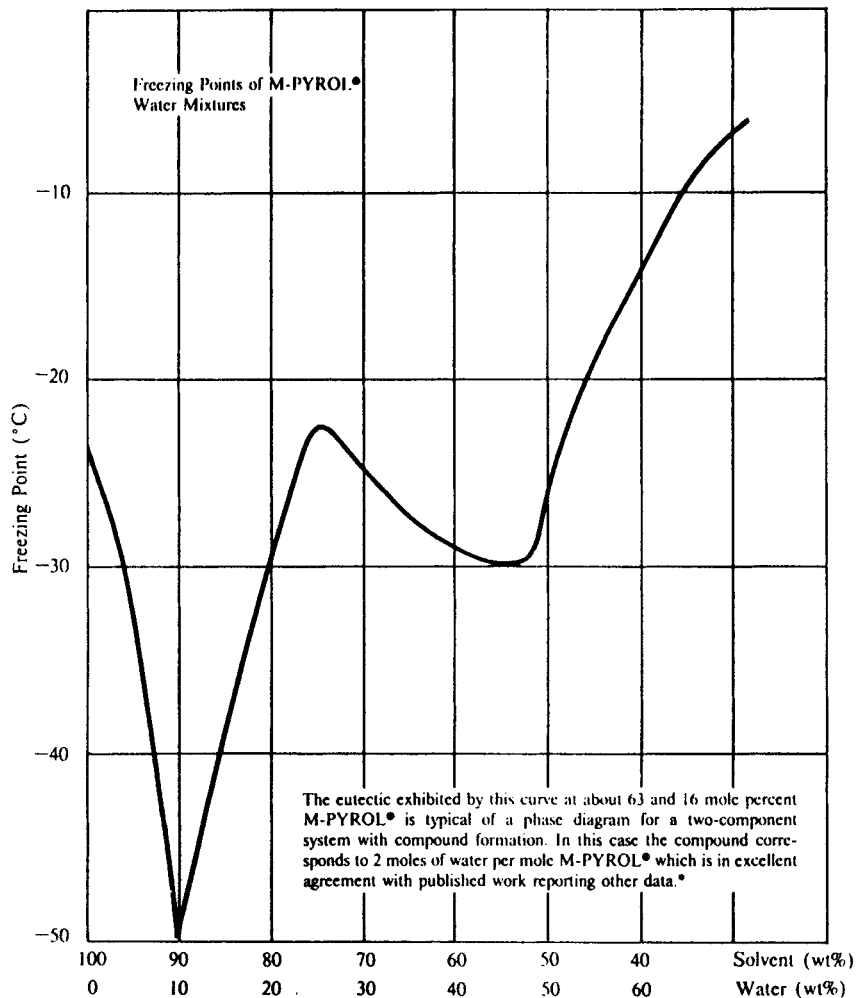

* Virtanen, P.O.I. and Korpela, J. *Suomen Kemistilehti* B40:99-103 (1967);
Virtanen, P.O.I. *ibid* B-40:241-9 (1967); *ibid* B40:313-16 (1967)

Table 14.122: Viscosity of Anhydrous M-Pyrol (49)

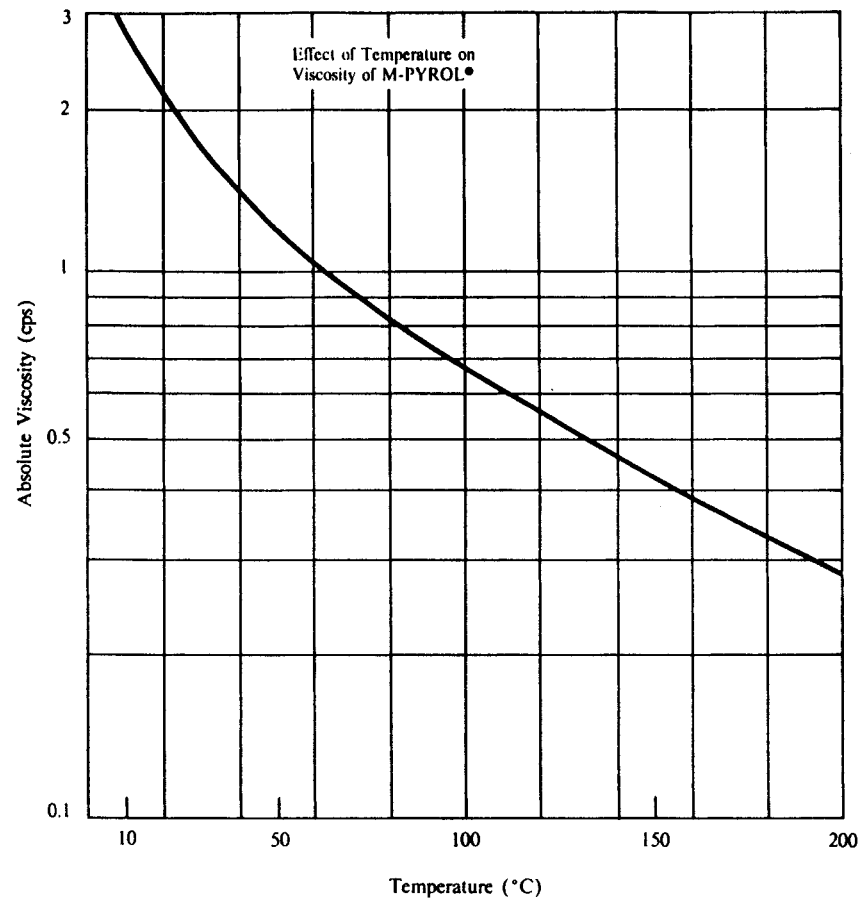


Table 14.123: Viscosity of Aqueous M-Pyrol (49)

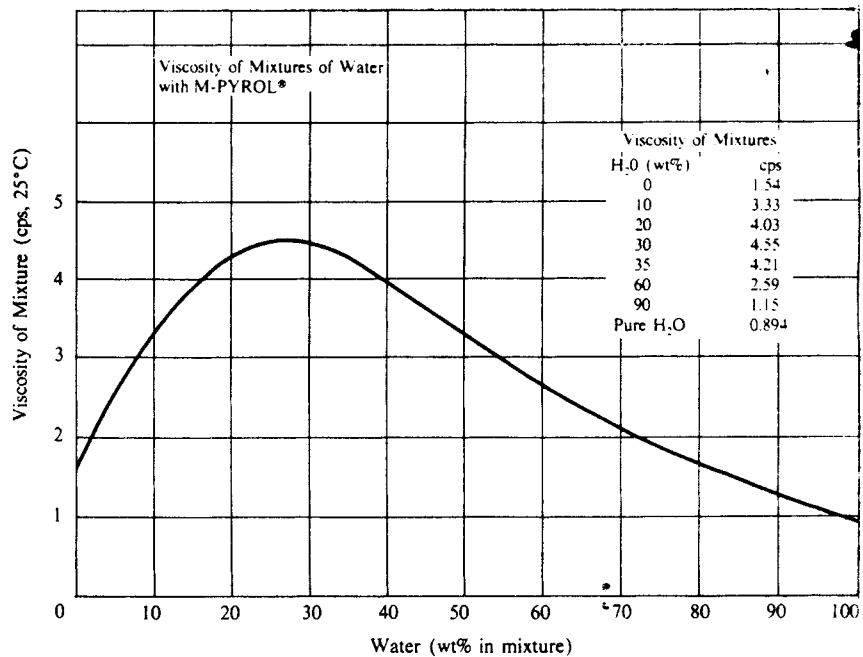


Table 14.125: Vapor/Liquid Equilibrium of M-Pyrol-Water Systems (49)


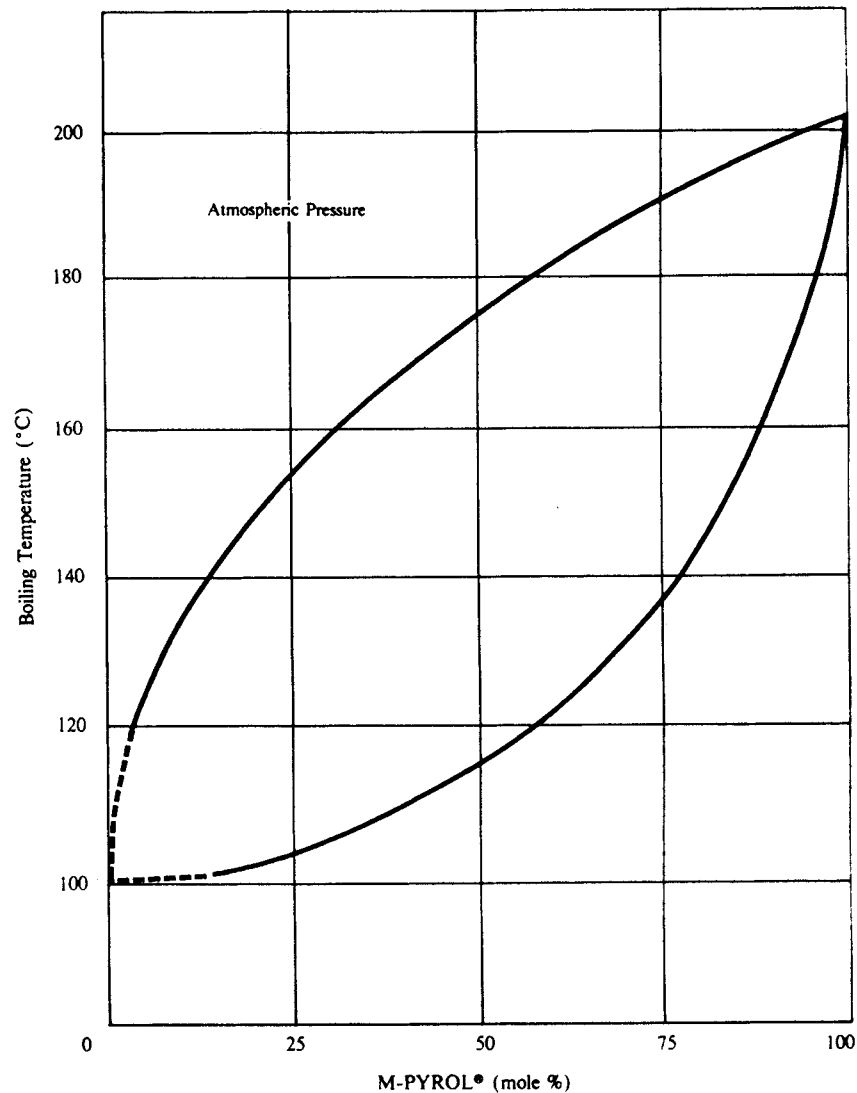


Table 14.124: Vapor/Liquid Equilibrium Data for M-Pyrol-Water System at Atmospheric and 400 mg Pressures (49)

| Boiling Pt. C | Pressure. mm | Mole-% M-PYROL* | | Weight-% M-PYROL* | |
|---------------|--------------|-----------------|-------|-------------------|-------|
| | | Liquid | Vapor | Liquid | Vapor |
| 202 | 757.2 | 99.6 | 95.7 | 99.9 | 99.2 |
| 190 | 761.8 | 95.9 | 70.8 | 99.2 | 93.0 |
| 186 | 758.2 | 96.7 | 68.6 | 99.4 | 92.3 |
| 135 | 757.2 | 72.4 | 10.0 | 93.5 | 37.9 |
| 108 | 755.5 | 34.7 | 1.9 | 74.5 | 9.5 |
| 102 | 756.0 | 17.4 | 1.0 | 53.7 | 5.3 |
| 168 | 400.0 | 97.6 | 77.1 | 99.6 | 94.9 |
| 165 | 399.0 | 97.3 | 68.1 | 99.5 | 92.1 |
| 162 | 400.4 | 96.6 | 63.8 | 99.4 | 90.6 |

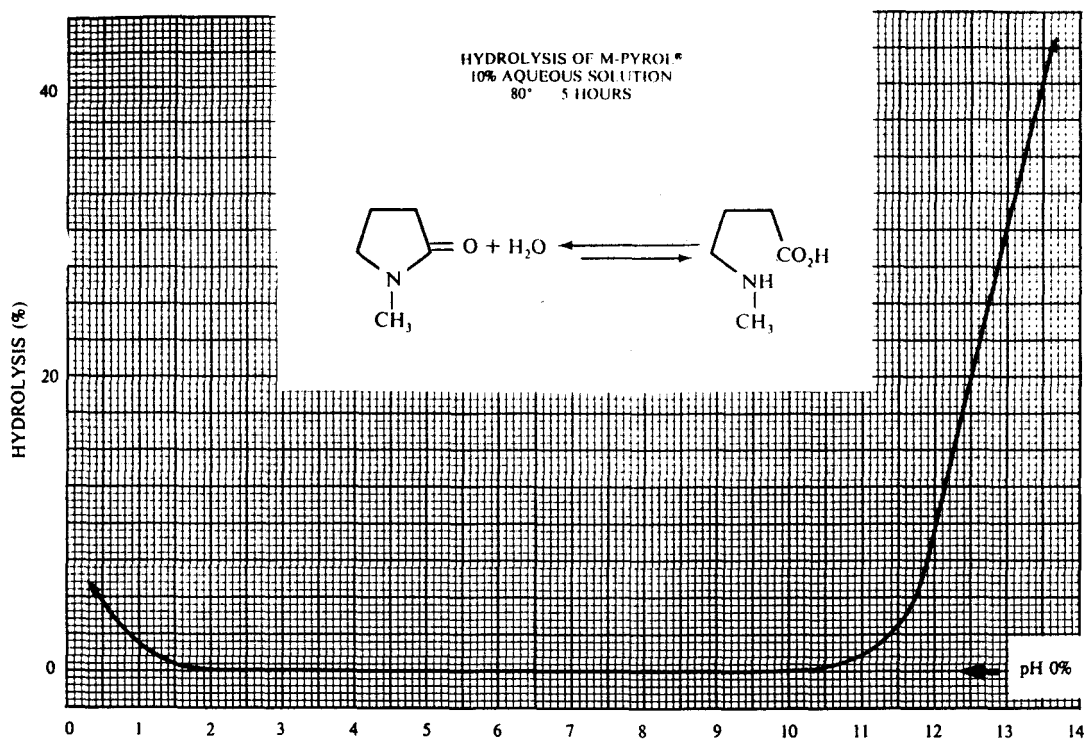

HALF LIFE ($t_{1/2}$) vs pH AT DIFFERENT TEMPERATURES FOR
HYDROLYSIS OF M-PYROL® - 1M IN AQUEOUS MEDIUM

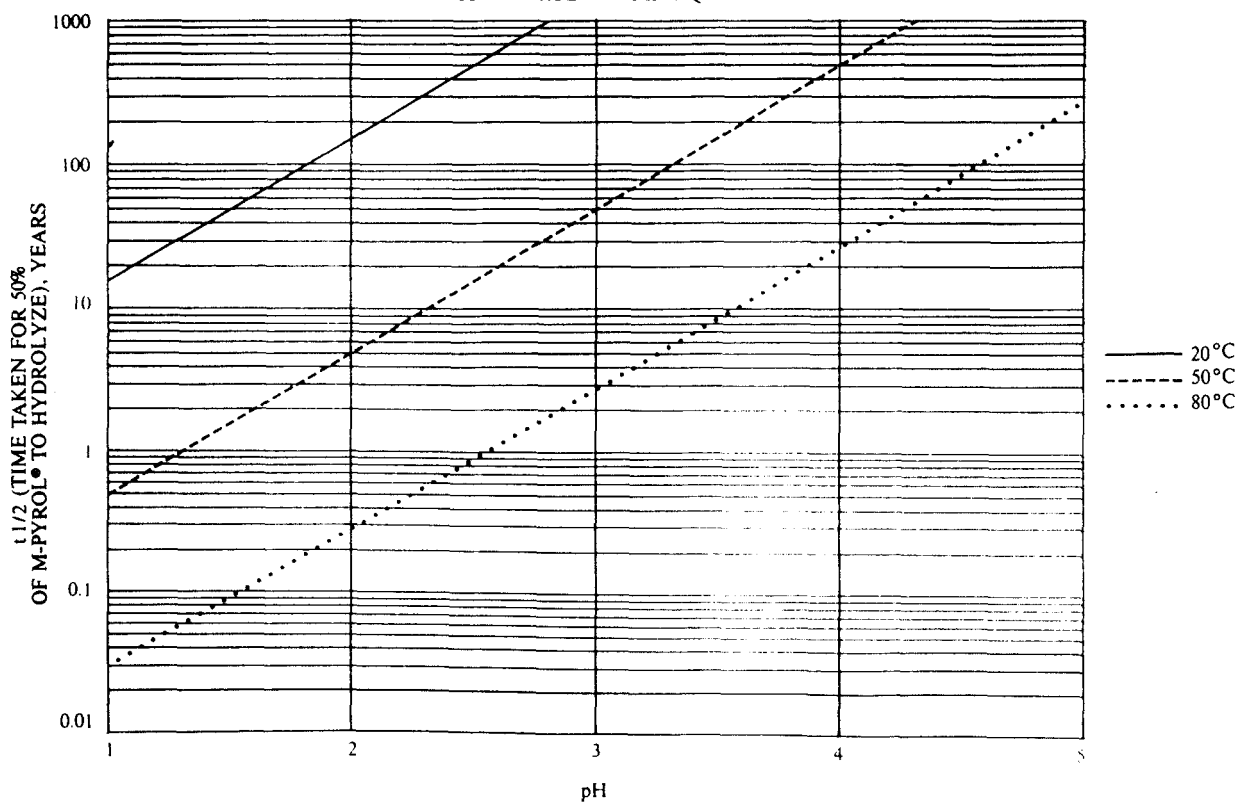


Table 14.126: Hydrolytic Stability of M-Pyrrol (49)


Table 14.127: Comparison of Hydrolysis of M-Pyrol and DMF (49)

| Reagent | Time, Hours | Temp., °C | Conc., M-PYROL* | mol/l DMF | Hydrolysis, % |
|-------------------------------------|-------------|-----------|-----------------|-----------|---------------|
| 0.5N NaOH | 24 | R.T. | 0.40 | 0 | 0 |
| 0.5N NaOH | 24 | R.T. | 0 | 0.39 | 90.4 |
| 0.5N H ₂ SO ₄ | 24 | R.T. | 0.45 | 0 | 0 |
| 0.5N H ₂ SO ₄ | 24 | R.T. | 0 | 0.42 | 0 |
| 0.25N NaOH | 1 | 80 | 0.21 | 0 | 5.4 |
| 0.25N NaOH | 1 | 80 | 0 | 0.22 | 100 |

Table 14.128: Hydrolysis of M-Pyrol in Alkaline Salt Solutions (49)

| Alkaline Salt | pH 1% Solution | % Hydrolysis |
|-------------------------|----------------|--------------|
| Sodium tripolyphosphate | 9.7 | 0.3 |
| Potassium pyrophosphate | 10.1 | 0.5 |
| Sodium carbonate | 11.4 | 1.5 |
| Trisodium phosphate | 12.0 | 4.7 |
| Sodium metasilicate | 12.6 | 18.3 |
| Sodium hydroxide | 13.2 | 39.7 |

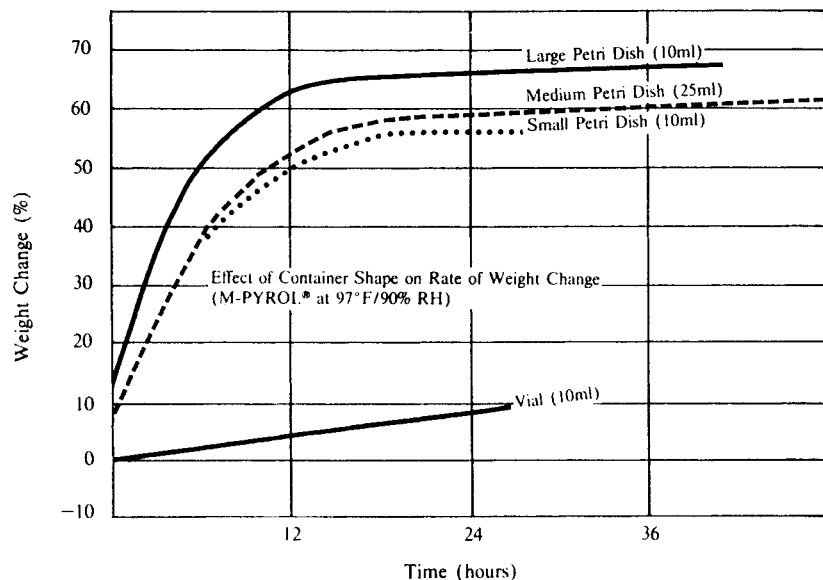Table 14.129: Hygroscopicity Data (49)



Note: Dynamic tests conducted in humidity cabinet having complete change of atmosphere every 3 minutes. Surface area to weight ratios of large Petri dish, small Petri dish, and vial were 17.0, 2.4, and 0.25, respectively.

Table 14.130: Hygroscopicity Data (49)

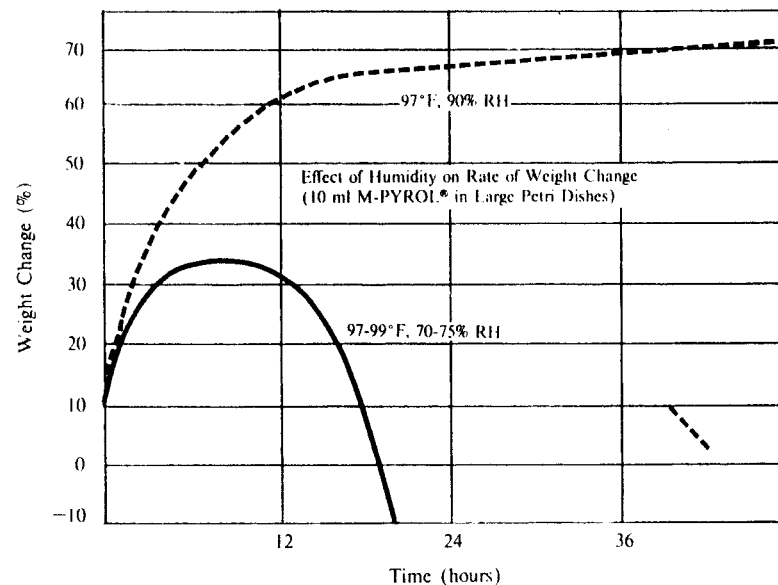


Table 14.131: Hygroscopicity Data (49)

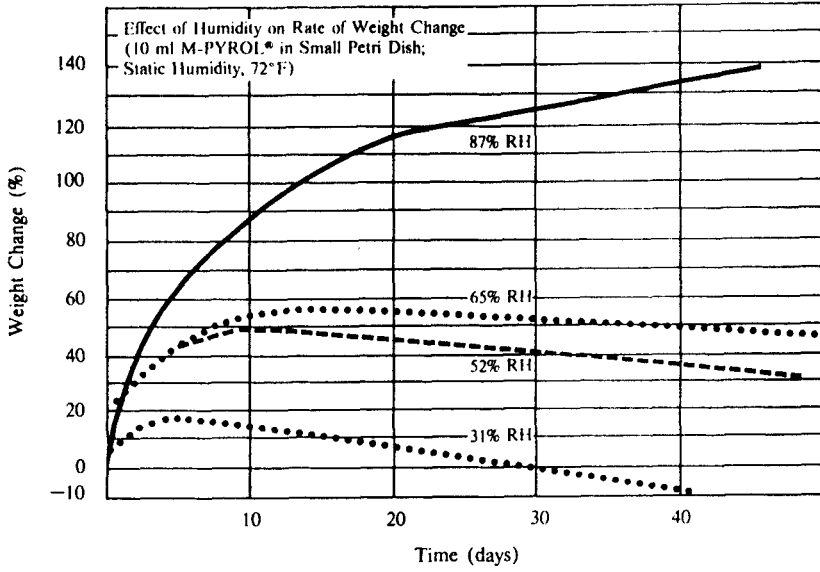


Table 14.132: Effect of Temperature on Hygroscopicity (49)

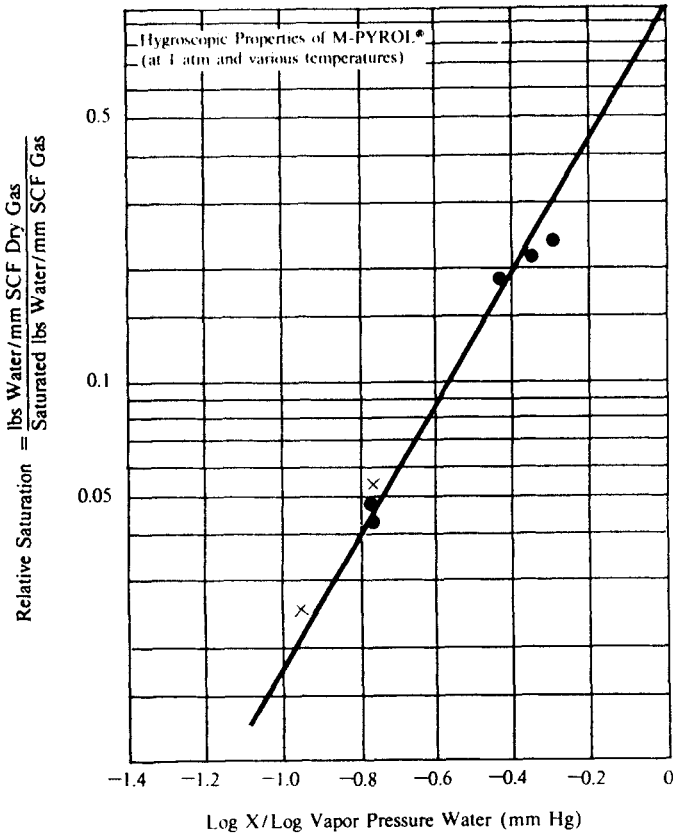


Table 14.133: Correlation of M-Pyrol and Water Vapor Data (49)

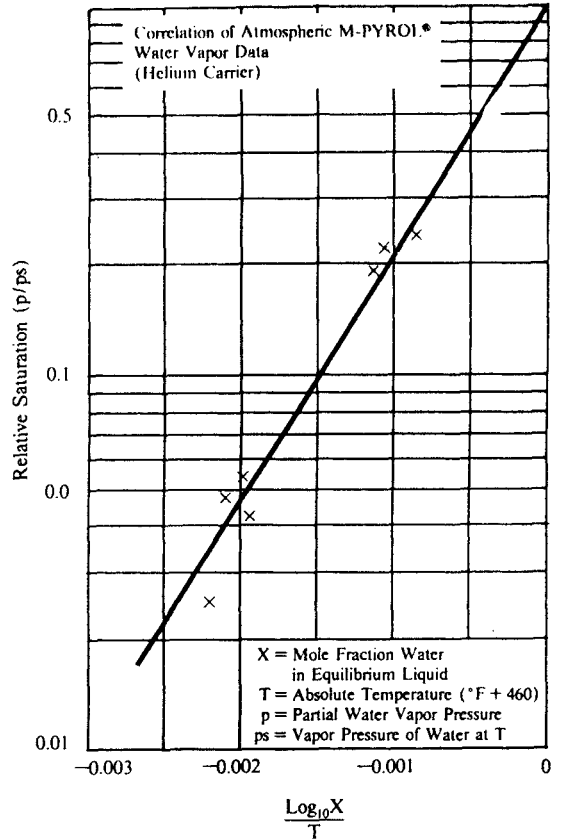
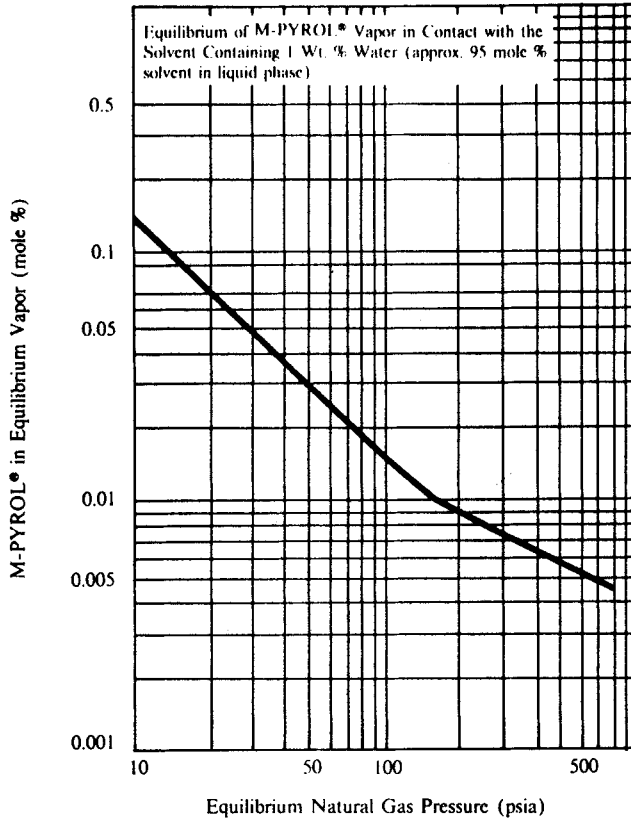


Table 14.134: Vapor/Liquid Equilibrium of M-Pyrol Containing 1% Water (49)

| Natural Gas Composition (mole %) | Temperature (F) | Vapor Composition (mole % Solvent) | |
|------------------------------------|-----------------|------------------------------------|--------|
| | | psia | |
| N ₂ 4.35 | 100 | 765 | 0.0050 |
| CH ₄ 90.04 | 100 | 797 | 0.0046 |
| C ₂ H ₆ 3.30 | 100 | 560 | 0.0045 |
| CO ₂ 1.84 | 100 | 435 | 0.0048 |
| C ₃ 0.47 | 100 | 417 | 0.0058 |
| | 100 | 190 | 0.0086 |
| | 100 | 50 | 0.0168 |
| | 100 | 14.7 | 0.095* |

*Calculated from 0.76 mm Hg vapor pressure.

Table 14.135: Solubility of Acetylene in Various Solvents (49)

| Solvent | K Value (20 °C, 1 atm) ml gas / ml solvent | Solvent B. P., °C |
|-------------------|-----------------------------------------------|-------------------|
| M-PYROL® | 43 | 202 |
| Dimethylformamide | 36 | 153 |
| Dioxane | 19.5 | 101 |
| Acetone | 17.5 | 56.5 |
| BLO | 17 | 204 |
| Cyclohexanone | 14 | 155 |

Table 14.136: Solubility of Sulfur Compounds and Carbon Dioxide in M-Pyrol Solvent (49)

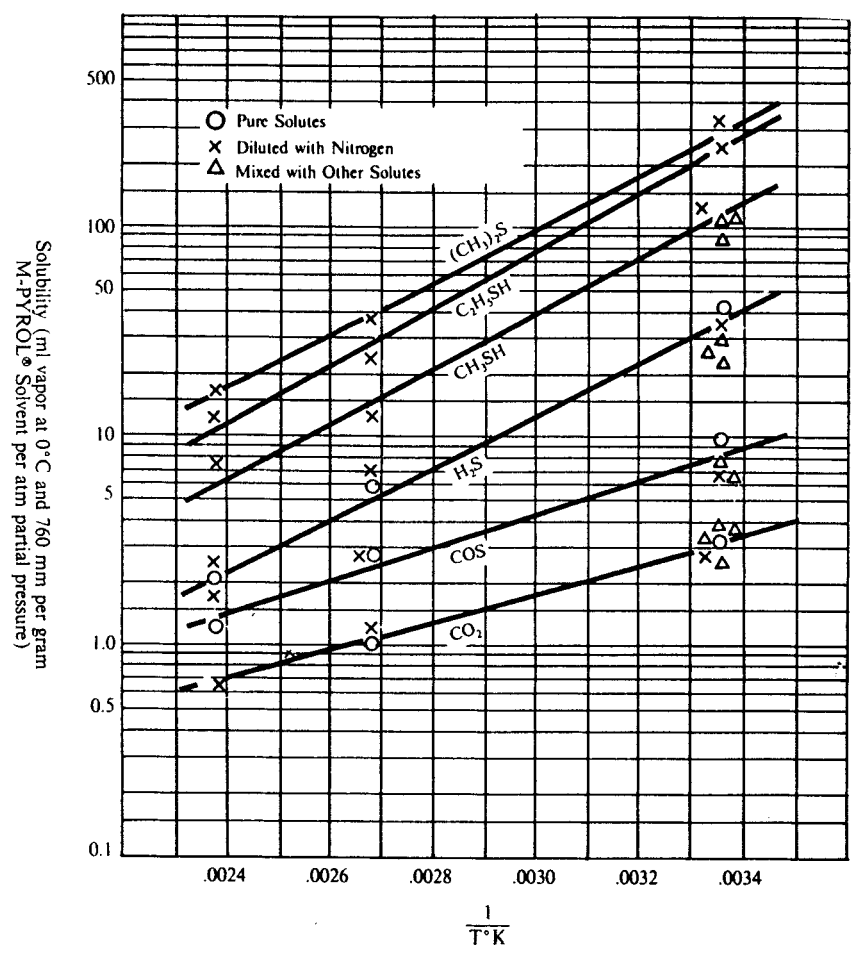


Table 14.137: Solubility of Paraffin Hydrocarbons in M-Pyrol Solvent (49)

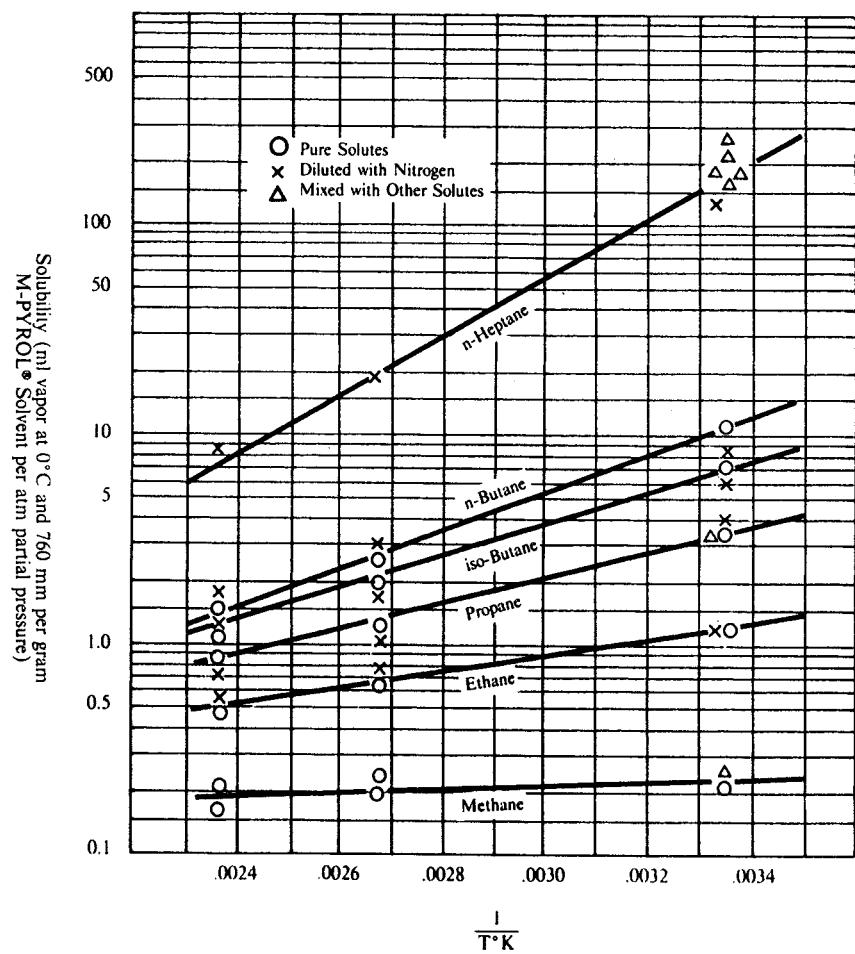


Table 14.138: Vapor-Liquid Equilibrium Distribution Coefficients for Sulfur Compounds and Carbon Dioxide in M-Pyrol Solvent (49)

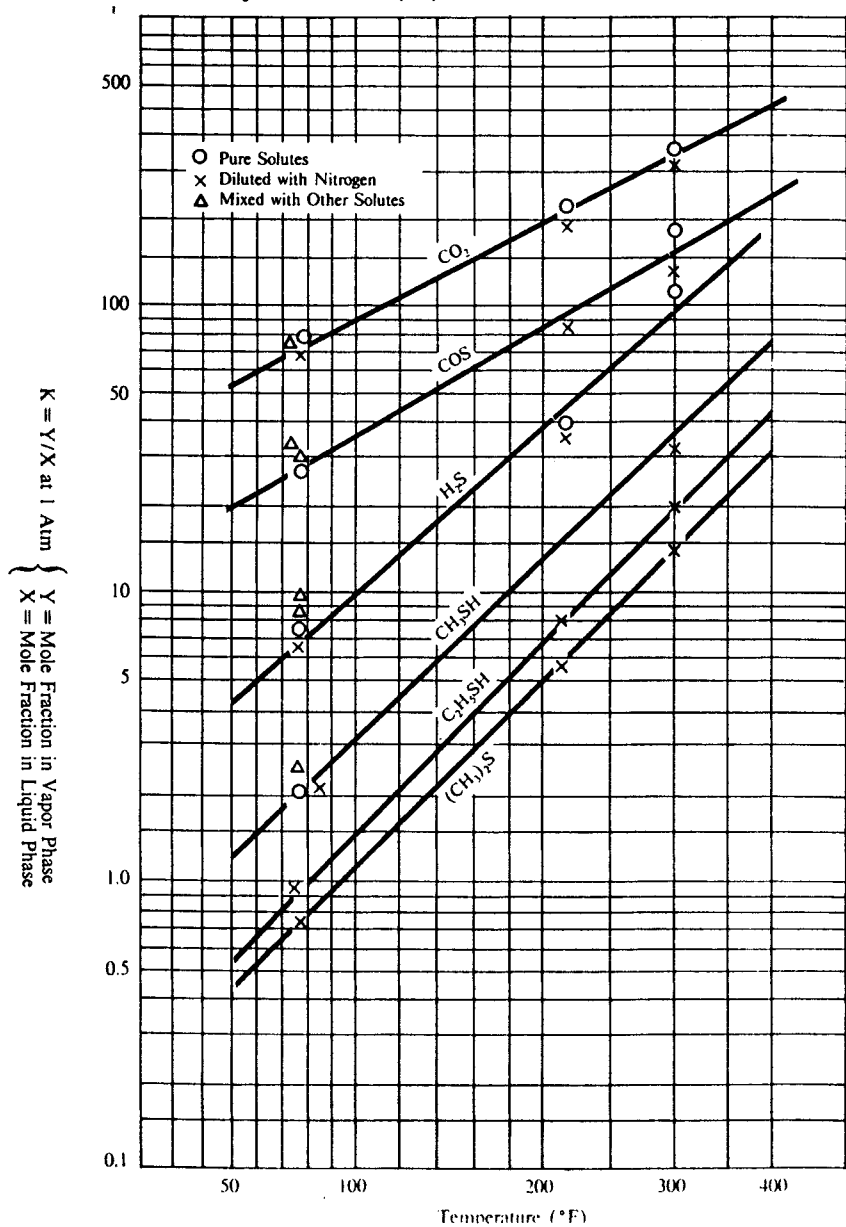


Table 14.139: Vapor-Liquid Equilibrium Distribution Coefficients for Paraffin Hydrocarbons in M-Pyrol Solvent (49)

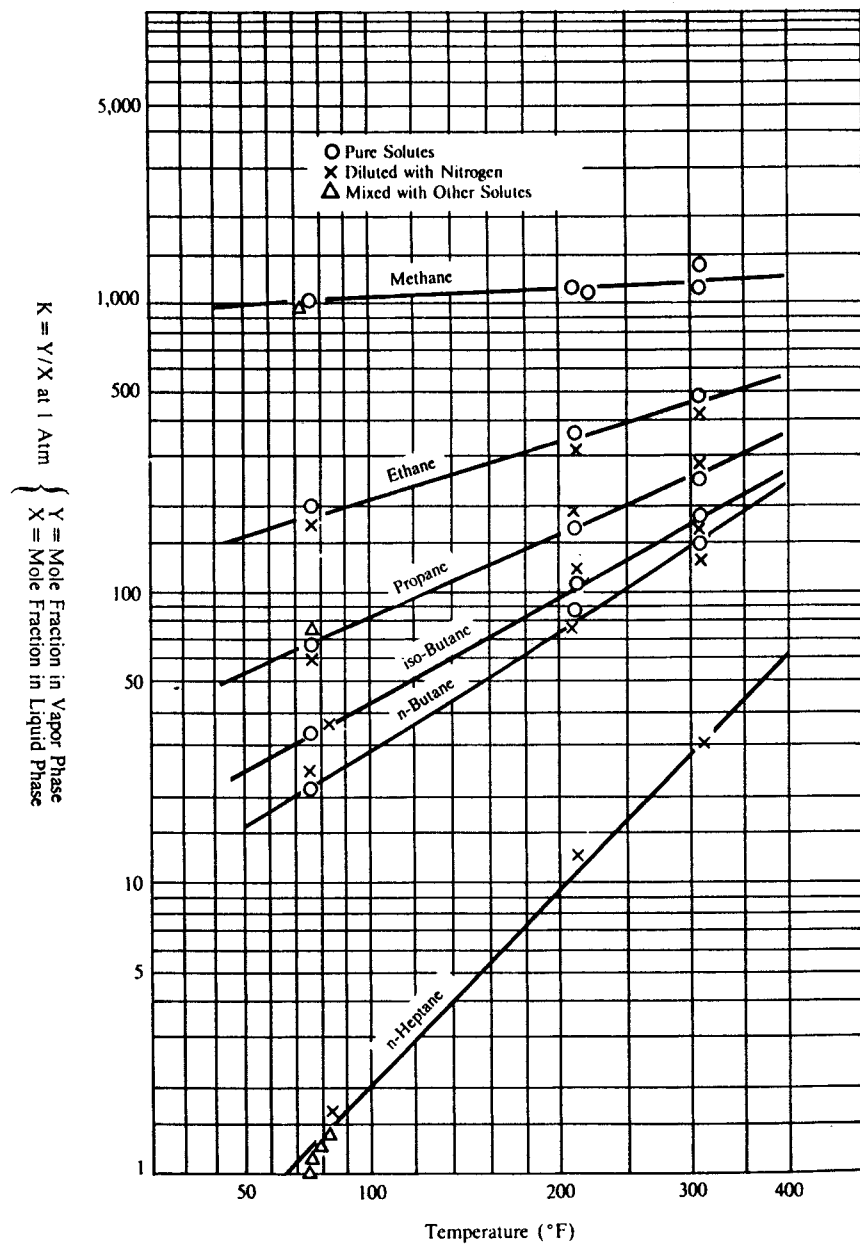


Table 14.141: Classification of Equilibria in M-Pyrol Showing Relationship Between Equilibrium Distribution Coefficients (K) and Solute Vapor Pressures (49)


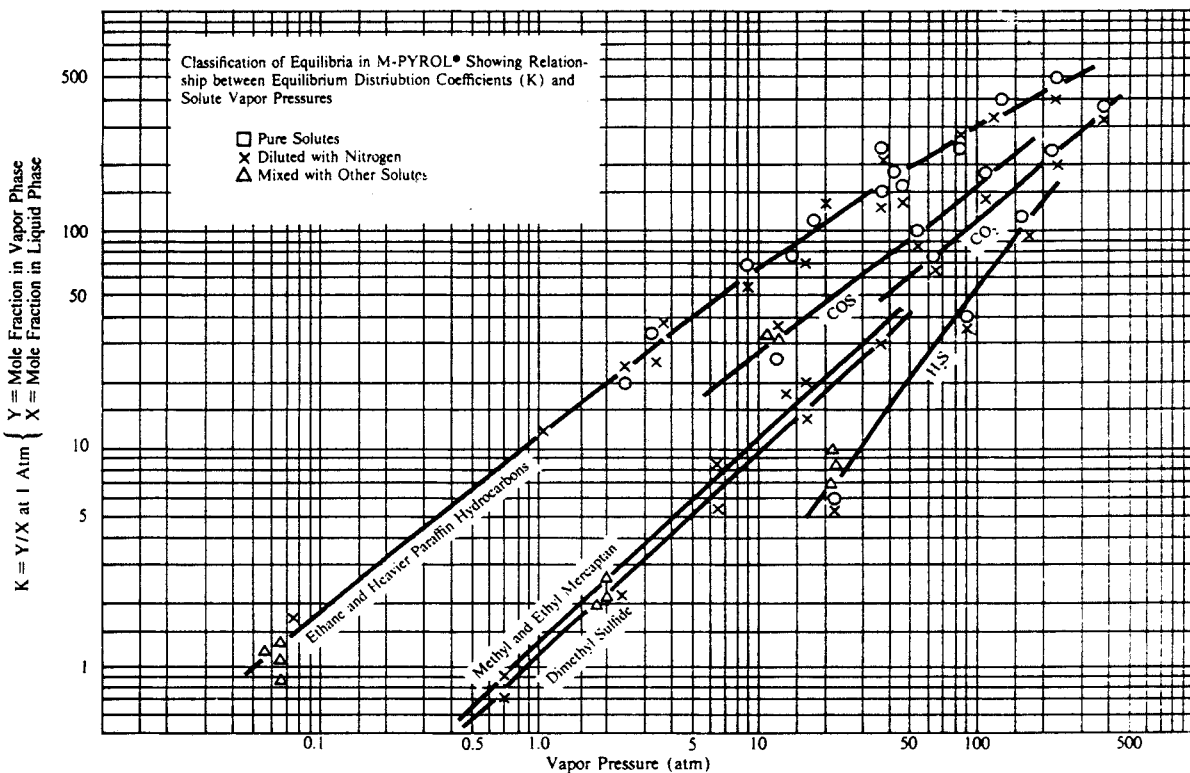


Table 14.140: Correlation of Equilibrium Distribution Coefficients for Ethane and Heavier Paraffin Hydrocarbons in M-Pyrol Solvent (49)

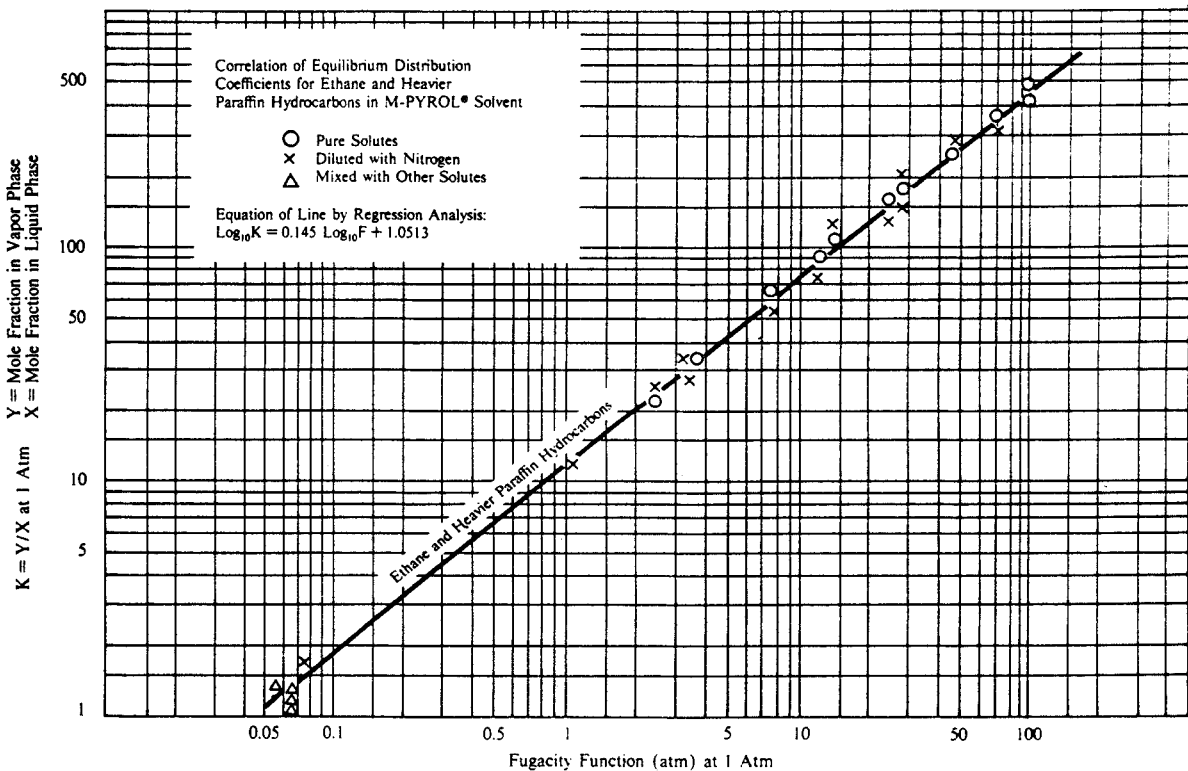

**Table 14.142: Solubilities of Carbon Monoxide and Olefins
In Anhydrous M-Pyrol Solvent (49)**

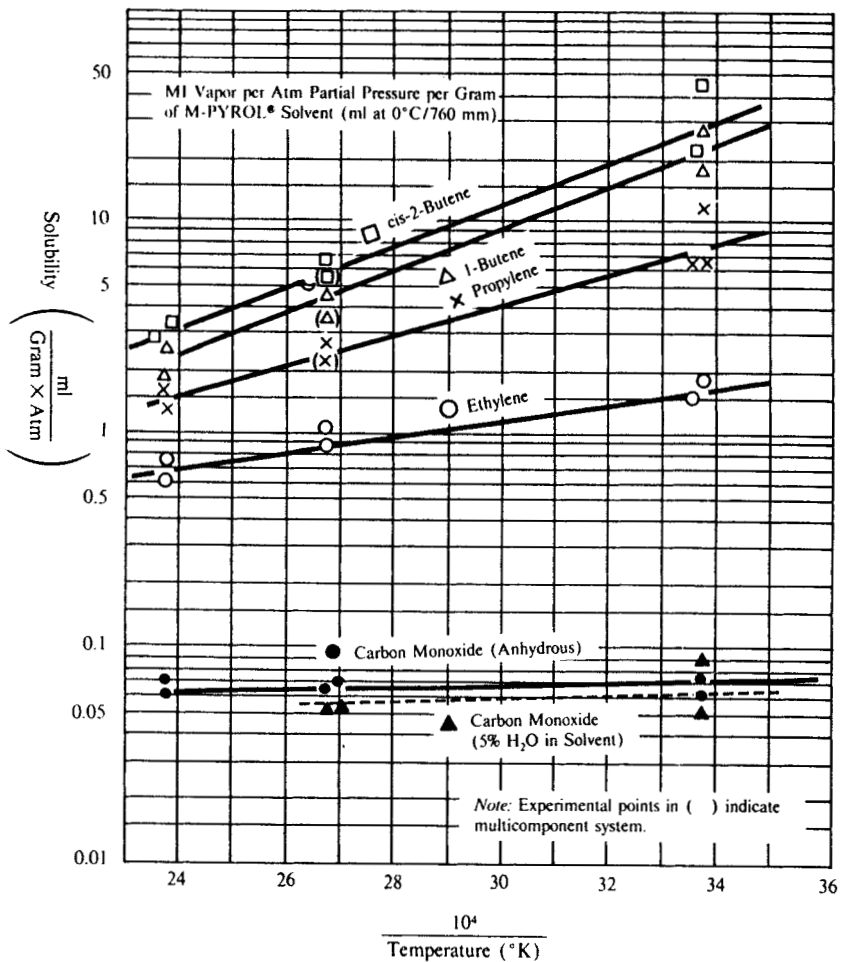


Table 14.143: Solubilities of Diolefins in Anhydrous M-Pyrol Solvent (49)

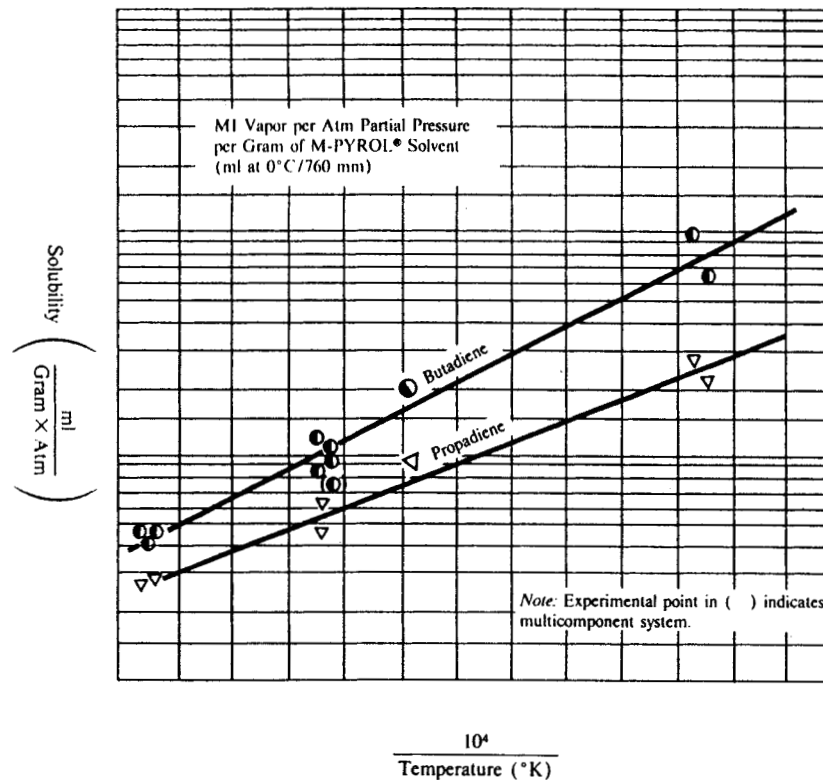


Table 14.144: Solubilities of Acetylenes in Anhydrous M-Pyrol Solvent (49)

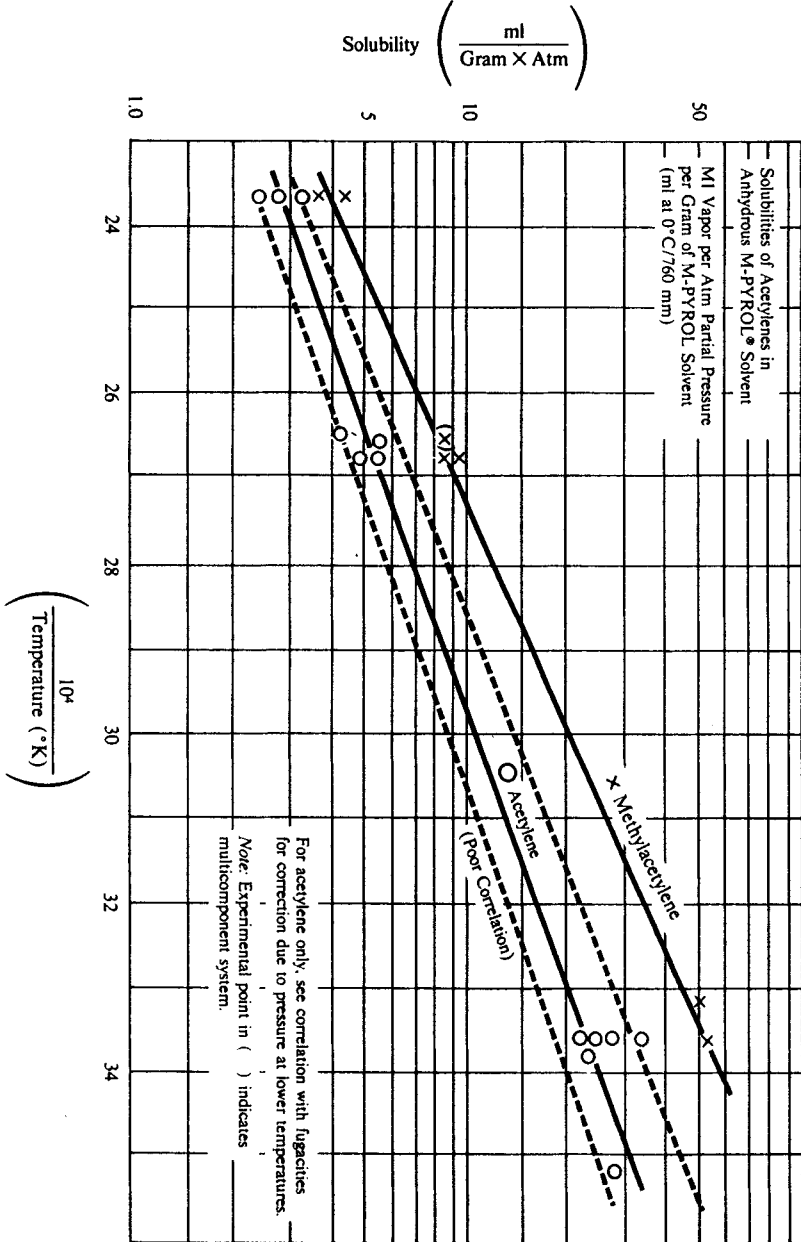


Table 14.145: Vapor-Liquid Equilibrium Distribution Coefficients for Olefins and Carbon Monoxide in M-Pyrol Solvent (49)

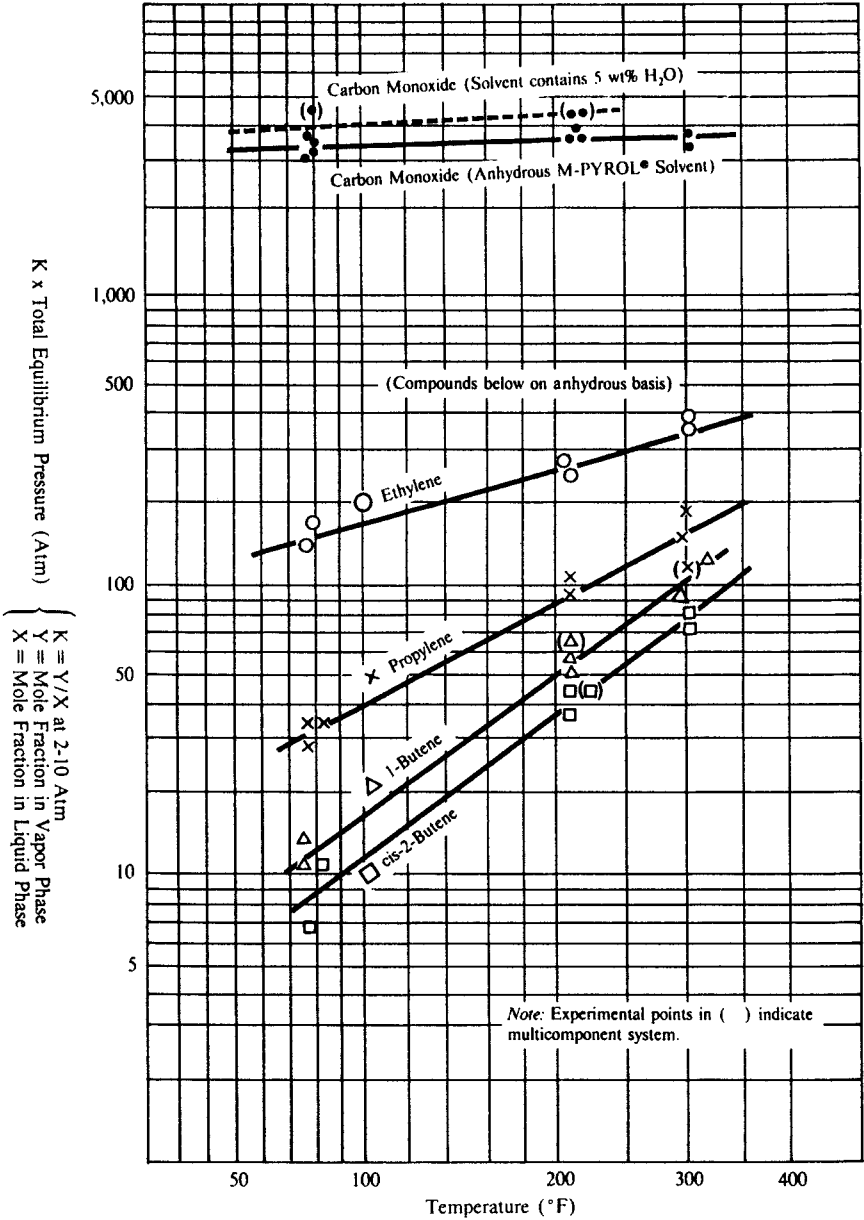


Table 14.146: Vapor-Liquid Equilibrium Distribution Coefficients for Diolefins in Anhydrous M-Pyrol Solvent (49)

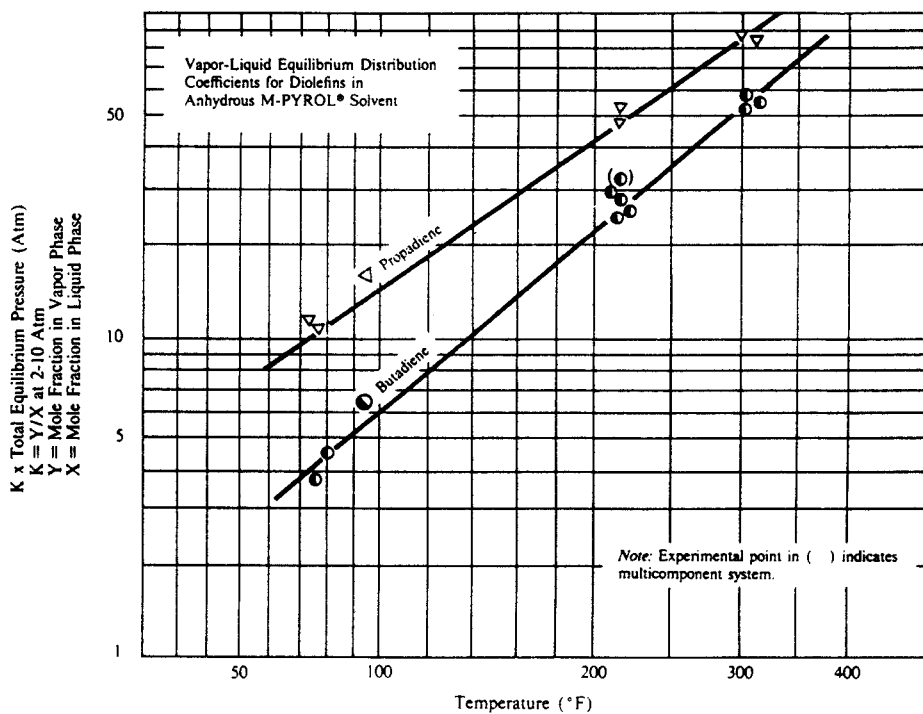


Table 14.147: Vapor-Liquid Equilibrium Distribution Coefficients for Acetylenes in Anhydrous M-Pyrol Solvent (49)

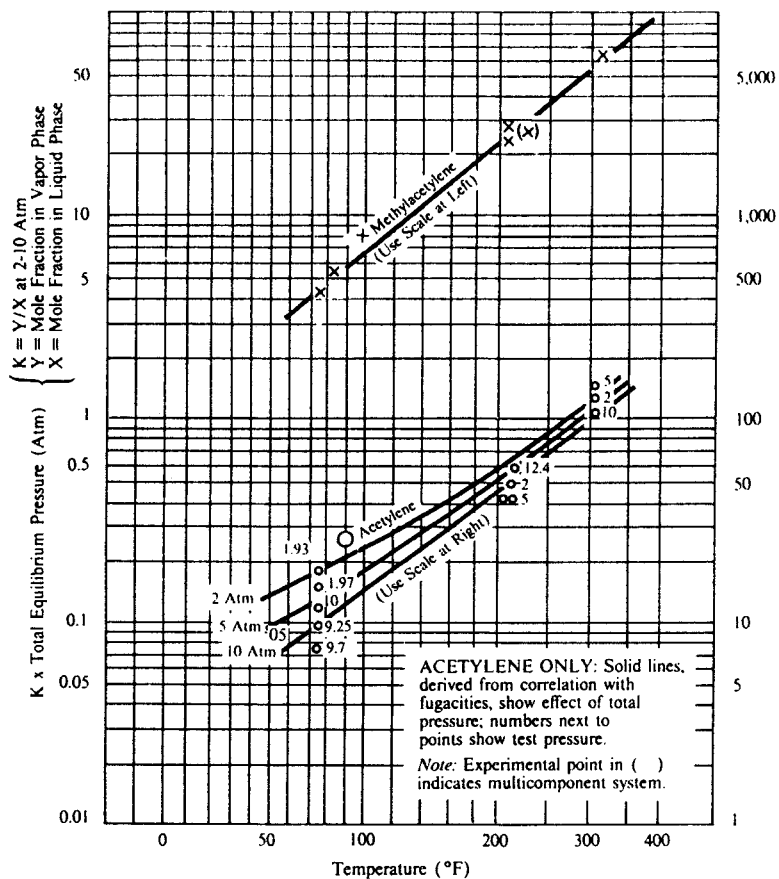


Table 14.148: Effect of Water (5 wt %) in M-Pyrol Solvent on Equilibrium Distribution Coefficients for Olefins (49)

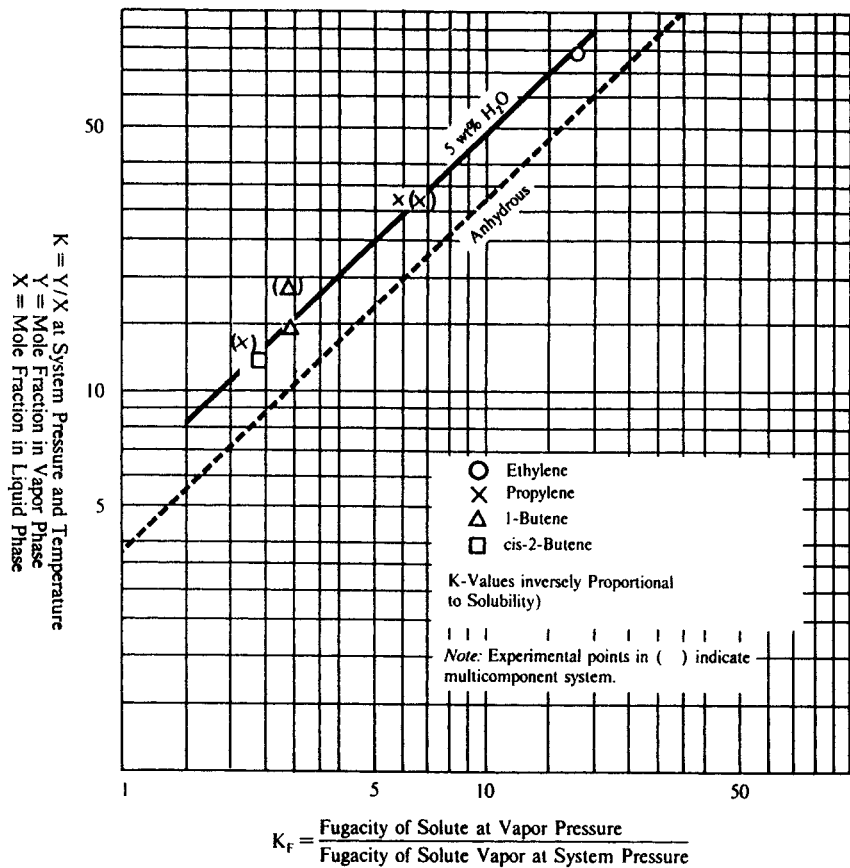


Table 14.149: Effect of Water (5 wt %) in M-Pyrol Solvent on Equilibrium Distribution Coefficients for Diolefins (49)

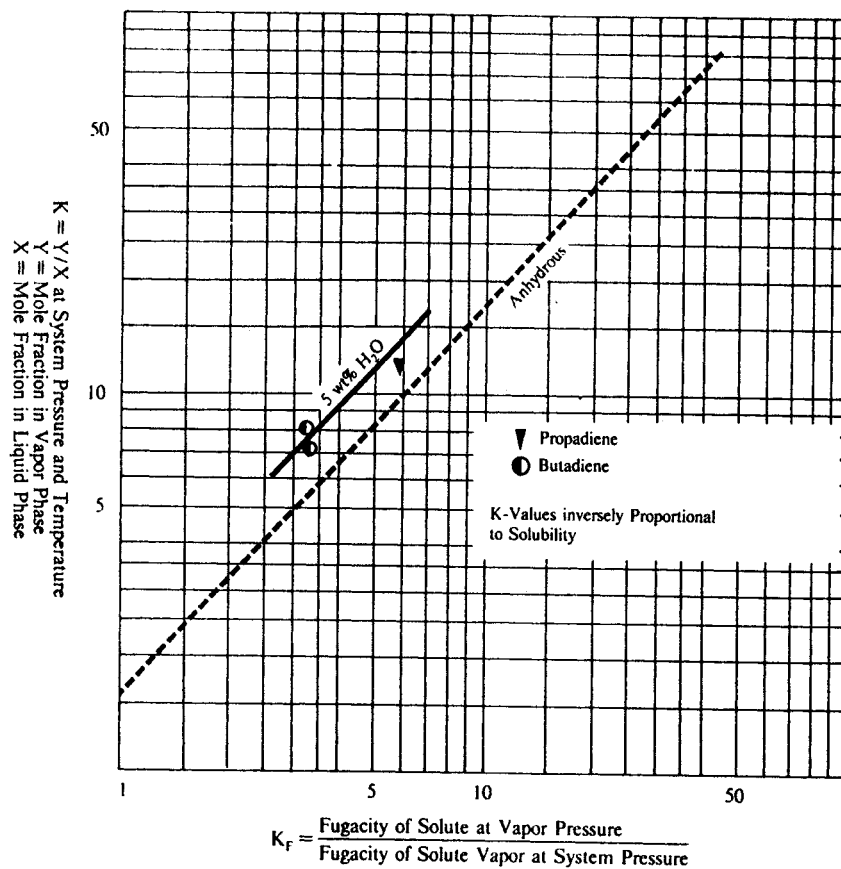


Table 14.150: Effect of Water (5 wt %) in M-Pyrol Solvent on Equilibrium Distribution Coefficient for Methylacetylene (49)

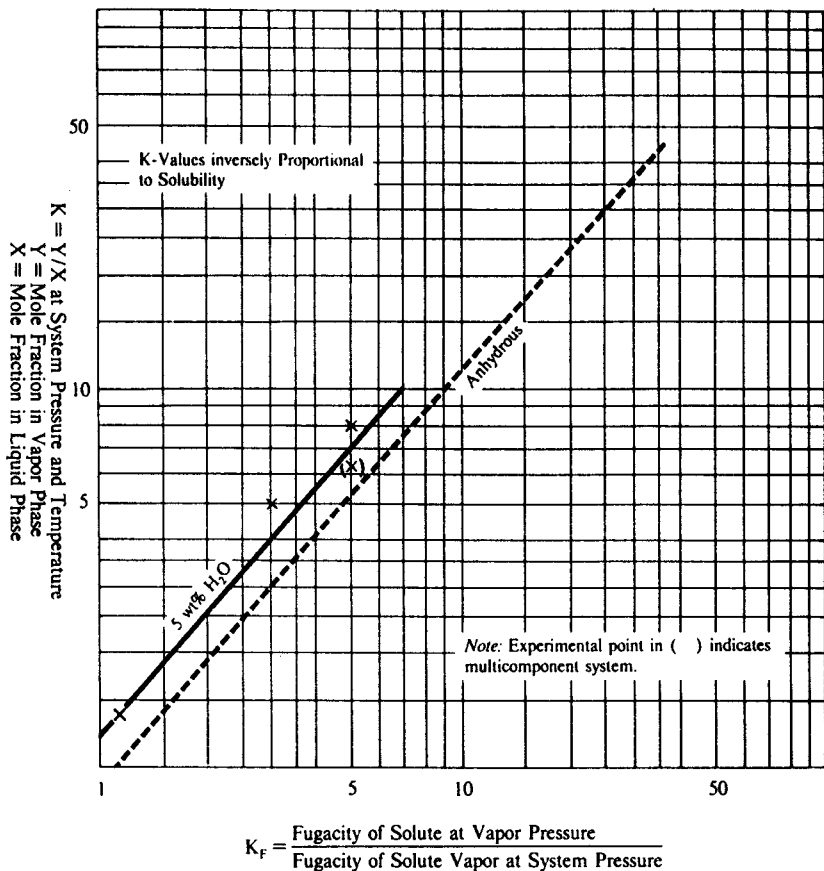


Table 14.151: Effect of Water (5 wt %) in M-Pyrol Solvent on Equilibrium Distribution Coefficient for Acetylene (49)

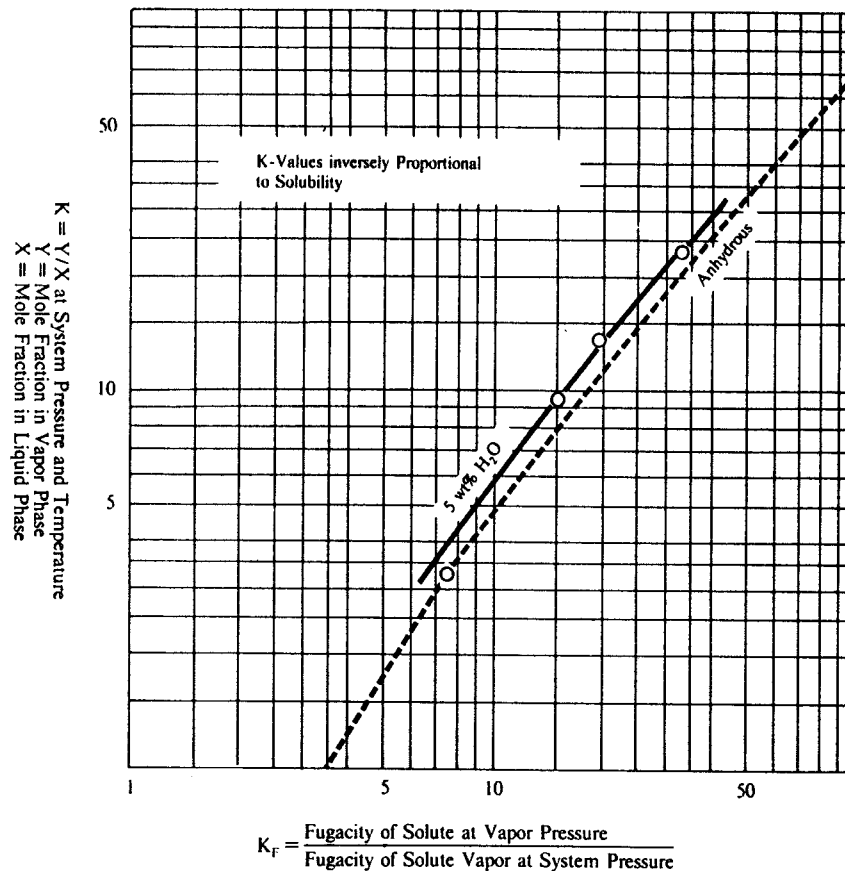


Table 14.152: Classification and Correlation of Equilibria of Unsaturated Hydrocarbons in Anhydrous M-Pyrol Solvent (2-10 atm, 25°-150°C range) (49)

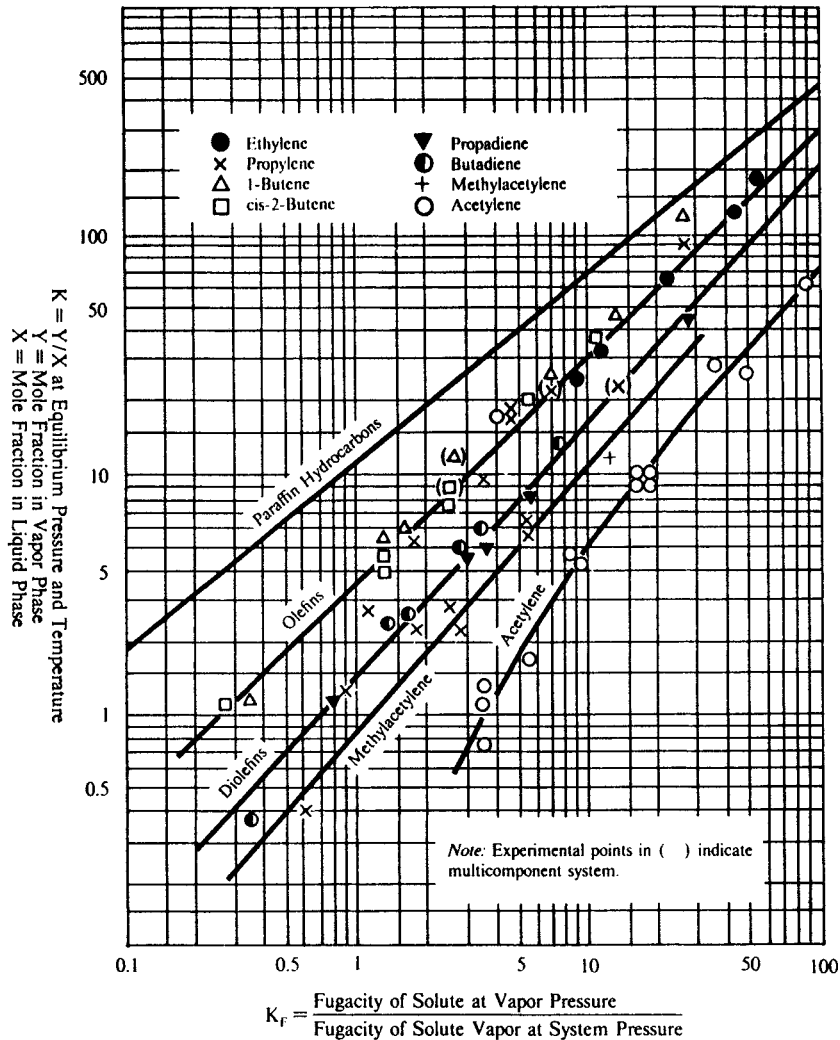


Table 14.153: Effect of Water and Elevated Pressure on Solubility of Hydrogen Sulfide in M-Pyrol Solvent (49)

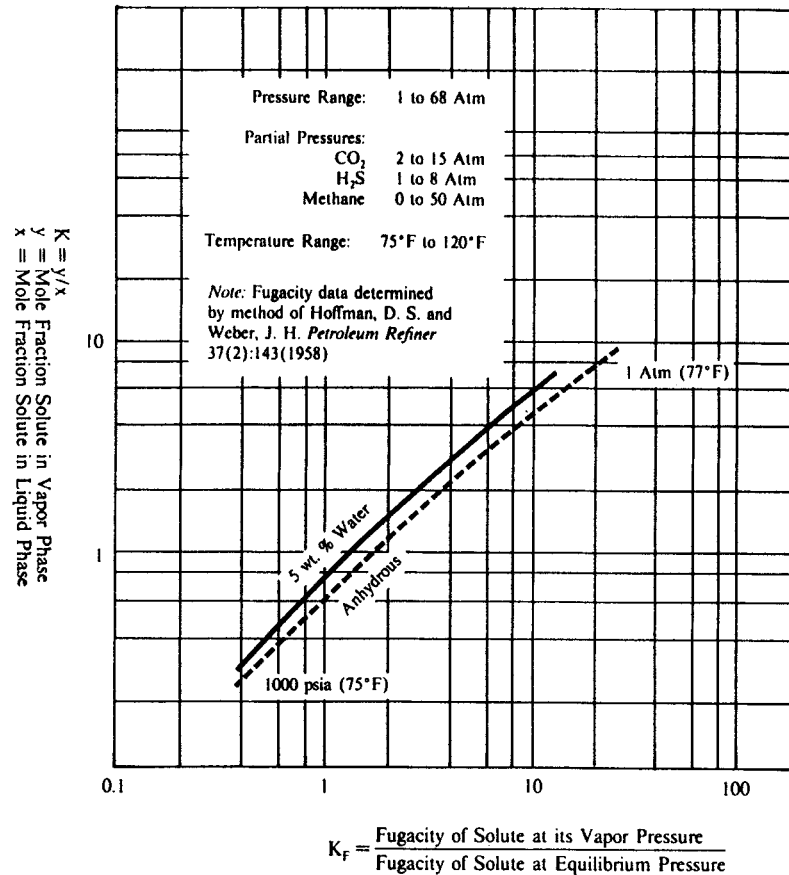


Table 14.154: Solubility of Polymers in M-Pyrol (49)


| Polymer | Solubility, %* |
|-----------------------------------------------------------|-----------------|
| Acrylonitrile/vinyl chloride copolymer | >10 |
| Adiprene B urethane rubber (duPont) | 10 ^a |
| Black Tervan wax (Exxon) | >10 |
| Cellulose triacetate | >10 |
| Chemigum butadiene/acrylonitrile copolymer (Goodyear) | sol |
| Delrin polyacetal resin (duPont) | insol |
| Epi Rez 510 epoxy resin (Interchemical) | sol |
| Epolene N polyethylene (Eastman) | insol |
| Epon 1000, 1004, 1007 epoxy resin (Shell) | sol |
| Estane 5740X1 and 5740X2 polyurethane (Goodrich) | >10 |
| Ethyl Cellulose N-100 (Hercules) | 25 |
| Formvar polyvinyl formal resin (Monsanto) | 5 |
| Gantrez AN methylvinylether/maleic anhydride copol. (GAF) | >10 |
| Geon 101 and 102 polyvinyl chloride (Goodrich) | 10 |
| Hycar OR butadiene/acrylonitrile copolymer (Goodrich) | sol |
| Kynar polyvinylidene fluoride (Pennwalt) | sol |
| Lexan polycarbonate (General Electric) | 10 ^b |
| Mekon 20 wax (Petrolite) | >10 |
| Multrathane MA-40 and MB-40 polyurethane (Mobay) | insol |
| Mylar polyester flim (duPont) | >10 |
| Nylon | >10 |
| Pentalyn M pentaerythritol ester of resin (Hercules) | 50 |
| Polyacrylonitrile, specific viscosity 2.1 ^c | 24 |
| | 3.1 |
| | 18 |
| | 8.7 |
| | 10 |
| | 31.9 |
| | 5 |
| Poly(methyl α -chloroacrylate) | >10 |
| Poly(methyl methacrylate) | >10 |
| Polybutene | sol |
| Polystyrene | 25 |
| Polyester-type polyurethane rubber (Mobay) | (at 80°C) 10 |
| Polyvinyl chloride | >10 |
| Polyvinyl pyrrolidone | >10 |
| Teflon fluorocarbon resin (duPont) | insol |
| Vinosol Ester Gum glycol ester of pine resin (Hercules) | 10 |
| Vinac polyvinyl acetate (Air Products) | 10 |
| Vynlite VYHH, VMCH, and VYNS VC/VAc copolymers (U. C.) | >10 |
| Vynlite NYGL vinyl resin (Union Carbide) | 25 |
| Vynlite VYNW vinyl chloride resin (Union Carbide) | 15 |
| Zytel nylon molding resin (duPont) | (at 200°C) 25 |

* ">10" shows that a 10g sample dissolves in 100g M-PYROL at room temperature; other numbers indicate the solubility limit for pourable viscosity. "Sol" indicates a qualitative test only, and "insol" indicates no solubility under test conditions.

^a Solubility 10% (room temperature) and 25% (80°C).

^b After 24 hours at 25°C or 1 hour at 60°C, gels.

^c Sp. Visc. of 1 g polymer in 100 ml M-PYROL at room temp.

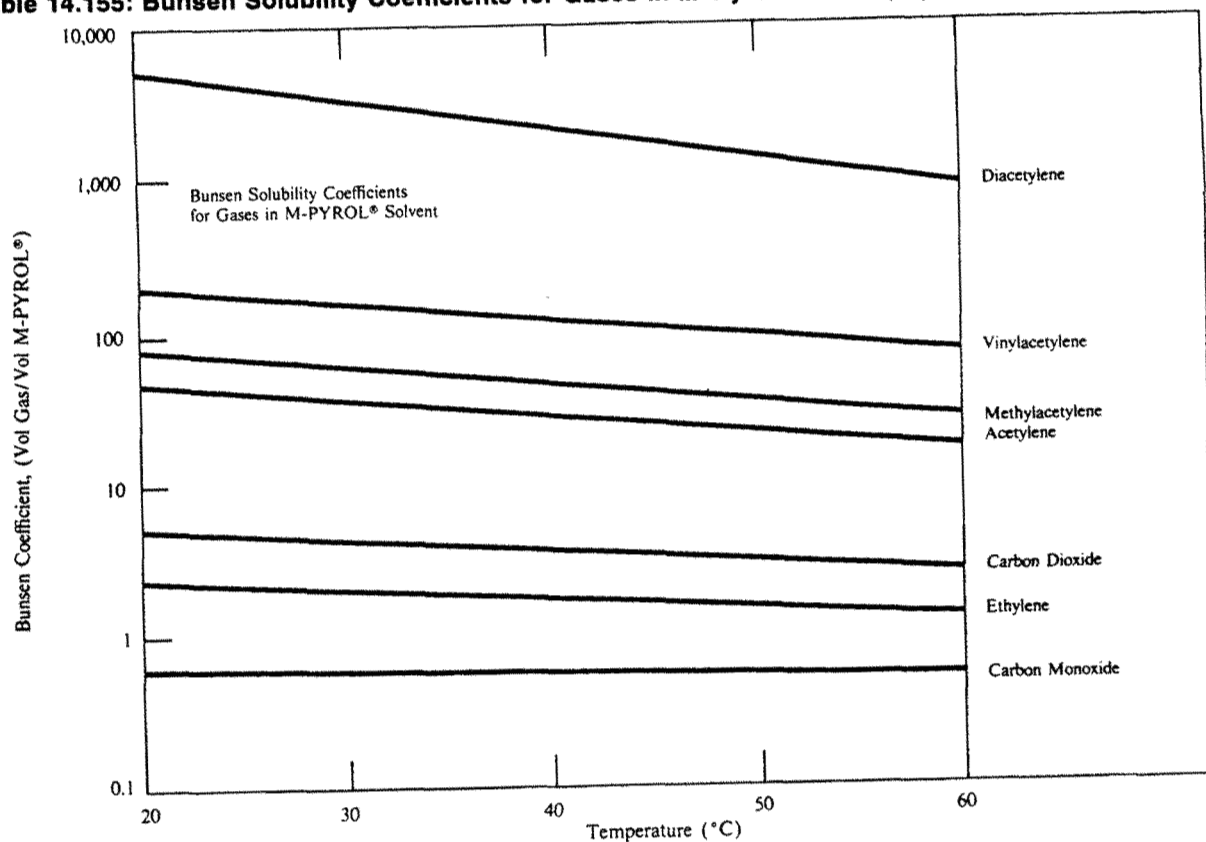Table 14.155: Bunsen Solubility Coefficients for Gases in M-Pyrol Solvent (49)**Table 14.156: Solubility in M-Pyrol (to nearest 5%) at Room Temperature (49)**

| | | | |
|------------------------------------------------|----------------------------------------|----------|----------|
| <i>Herbicides</i> | 2, 4-dichlorophenoxybutyric acid | | 25% |
| | butoxyethyl ester | | 75% |
| | butyl ester | | 75% |
| | isooctyl ester | | >80% |
| | isopropyl N-(3-chlorophenyl) carbamate | | >80% |
| | 2-methyl-4-chlorophenoxyacetic acid | | >80% |
| | 2, 4, 5-trichlorophenoxyacetic acid | | 50% |
| | butoxyethoxypropyl ester | | 75% |
| | butyl ester | | 75% |
| | isobutyl ester | | 75% |
| | isooctyl ester | | 75% |
| | <i>Insecticides</i> | aldrin | (cloudy) |
| chlordane | | | 60% |
| DDT | | | 65% |
| dieldrin | | | 35% |
| O, O-dimethyl-O-(2, 2-dichlorovinyl) phosphate | | | >80% |
| heptachlor | | (cloudy) | 30% |
| lindane | | | 50% |
| malathion | | | >80% |
| methyl parathion | | | >80% |
| parathion | | | 80% |
| Sevin (Union Carbide) | | | 55% |
| toxaphene | | 50% | |
| <i>Fungicides</i> | captan | (100°C) | 33% |
| | pentachlorophenol | | 10% |
| | phenylmercuric acetate | | 10% |

Table 14.157: M-Pyrol Solvent Effects at Ambient Temperature for 7 Days (49)

| Percent Change from Initial | | | | | |
|------------------------------------------------------------------------------------------------|-----------------------------------------------|--------|-------|-----------|--------------------|
| Substrate | Weight | Length | Width | Thickness | Comments |
| ABS | Coupons fragmented within 1 hr. of immersion | | | | |
| Buna-N | 66.99 | 17.19 | 13.47 | 22.23 | Note 1 |
| Butyl Rubber | 1.37 | 0.42 | -1.39 | 0.00 | Note 2 |
| EPDM-70 | 4.14 | 0.91 | -0.32 | 1.56 | Note 1 |
| Kynar | -11.72 | 3.85 | -2.99 | 19.30 | Coupons dissolving |
| Lexan | Coupons completely dissolved within 18 hours | | | | |
| Neoprene | 0.79 | -1.57 | -0.45 | 0.00 | Note 1 |
| Noryl EN-265 | Coupons completely delaminated within 72 hrs. | | | | |
| Nylon 101 | -0.59 | -0.16 | -0.19 | 4.17 | Note 2 |
| Polyethylene - Crosslinked | 0.09 | 0.07 | 0.003 | -0.25 | Note 2 |
| Polyethylene -Low Density | 0.39 | 0.10 | -0.26 | 0.00 | Note 2 |
| Polyethylene - High Density | 0.15 | 0.10 | 0.06 | -0.75 | Note 2 |
| Polypropylene | 0.02 | -0.53 | -0.85 | 1.62 | Note 2 |
| PVC | Coupons completely dissolved within 24 hrs. | | | | |
| Silicon Rubber | 1.09 | 0.16 | 0.45 | 0.93 | Note 2 |
| Teflon | -0.01 | -0.10 | 0.00 | -2.65 | Note 2 |
| Viton | 176.0 | 50.28 | 56.89 | 64.38 | Note 1 |
| Note 1: Coupons discolored, imbibed or continued to leach M-PYROL up to 24 hrs. after removal. | | | | | |
| Note 2: No visible effects | | | | | |

Table 14.158: M-Pyrol Solvent Effects at 70°C for 7 Days (49)

| Percent Change from Initial | | | | | |
|-------------------------------------------------------------------------------------------------------|--------|--------|-------|-----------|----------|
| Substrate | Weight | Length | Width | Thickness | Comments |
| Butyl Rubber | 6.25 | 1.60 | 1.44 | 0.00 | Note 1 |
| EPDM-70 | 5.88 | 0.62 | 1.92 | 0.00 | Note 1 |
| Neoprene | 1.71 | -0.42 | 0.78 | -2.86 | Note 1 |
| Nylon 101 | 1.65 | 0.23 | 0.00 | 3.03 | Note 2 |
| Polyethylene - Crosslinked | 1.40 | 0.13 | 0.13 | 1.24 | Note 2 |
| Polyethylene -Low Density | 1.63 | -0.09 | 0.26 | 0.00 | Note 2 |
| Polyethylene - High Density | 0.99 | 0.20 | -0.32 | -2.70 | Note 2 |
| Polypropylene | 1.94 | 0.30 | 0.33 | 1.64 | Note 2 |
| Silicon Rubber | 2.33 | 0.65 | 0.00 | 2.78 | Note 2 |
| Teflon | 0.01 | 0.30 | -0.06 | 0.00 | Note 2 |
| Note 1: Coupons discolored, imbibed or continued to leach M-PYROL solvent up to 24 hrs. after removal | | | | | |
| Note 2: No visible effects | | | | | |

Table 14.159: Solubility Parameters (49)

| Comparison of M-PYROL Solvent and Moderately Hydrogen-Bonded Solvents | |
|----------------------------------------------------------------------------------|-----------------------------------------|
| Resin | Solubility Parameter Range |
| | 7 8 9 10 11 12 13 14 15 |
| ACRYLICS | |
| "Acryloid" B-72, acrylic ester (Rohm and Haas) | → 9.0 — 13.5 |
| polymethyl acrylate | → 9.5 — 14.5 |
| polyethyl acrylate | → 8.5 — 13.5 |
| polybutyl acrylate | → 8.0 — 10.5 |
| polymethyl methacrylate | → 9.0 — 13.5 |
| polybutyl methacrylate | → 8.5 — 10.5 |
| ALKYDS | |
| glycerol alkyd, 45% soy | → 8.5 — 12.0 |
| glycerol alkyd, 30% soy | → 9.0 — 14.5 |
| glycerol alkyd, 45% linseed | → 8.5 — 12.0 |
| pentaerythritol alkyd, 45% soy | → 8.5 — 12.0 |
| soy oil | → 8.5 — 12.0 |
| AMINES | |
| "Uformite" MX-61 (Rohm and Haas) | → 8.5 — 11.0 |
| CELLULOSE DERIVATIVES | |
| cellulose acetate | → 9.5 — 14.5 |
| cellulose butyrate 0.5 sec. | → 9.0 — 14.5 |
| cellulose acetate/butyrate | → 9.0 — 14.5 |
| ethyl cellulose N-22 | → 8.5 — 11.0 |
| ethyl cellulose K-200 | → 9.0 — 11.0 |
| ethyl cellulose T-10 | → 8.5 — 10.0 |
| nitrocellulose RS 25 CPS | → 8.5 — 14.5 |
| nitrocellulose SS 0.5 sec. | → 8.5 — 14.5 |
| EPOXIES | |
| "Epon" 1001 (Shell Chemical) | → 9.0 — 13.5 |
| "Epon" 1004 (Shell Chemical) | → 9.0 — 13.5 |
| "Epon" 1007 (Shell Chemical) | → 9.0 — 13.5 |
| "Epon" 1009 (Shell Chemical) | → 9.0 — 10.0 |
| "Epon" 1004 DHC ester (Shell Chemical) | → 9.0 — 10.5 |
| PHENOLICS | |
| "Durez" 220 (Hooker Chemical) | → 8.5 — 10.0 |
| "Durez" 550 (Hooker Chemical) | → 8.5 — 10.0 |
| "Methylon" 75202 (General Electric) | → 9.0 — 12.5 |
| ROSIN DERIVATIVES | |
| "Amberol" F-7 (Rohm and Haas) | → 8.5 — 10.0 |
| "Amberol" 801 (Rohm and Haas) | → 8.5 — 10.0 |
| ester gum | → 8.5 — 11.0 |
| "Vinsol" (Hercules Powder) | → 8.5 — 13.5 |
| VINYLS | |
| "Geon" 12 (Goodrich) | → 9.0 — 10.5 |
| "Vinylite" AYAA (Union Carbide) | → 9.5 — 14.5 |
| "Vinylite" VAGH (Union Carbide) | → 8.5 — 10.5 |
| "Vinylite" VMCH (Union Carbide) | → 8.5 — 12.5 |
| "Vinylite" VYHH (Union Carbide) | → 8.5 — 13.5 |
| polyvinyl butyl ether | → 8.5 — 10.5 |
| polyvinyl ethyl ether | → 8.5 — 11.0 |
| polyvinyl formal | → 9.5 — 14.5 |
| polystyrene | → 9.0 — 10.0 |

NOTE: The value for M-PYROL solvent $d = 11.0$ is based on a total heat of vaporization of 12,200 cal/mol, reference temperature 65°C.

The solubility parameters for resins are based on figures published by Burrell (1957) and Hughes and Britt (1961).

Polystyrene seems to be a notable exception. It is known to be soluble in M-PYROL solvent yet the reported solubility parameter range is only 9.0 ± 0.9 (Burrell 1957).

Table 14.160: Typical Physical Properties of Pyrrolidone Solvents (49)




| | NEP® | CHP® | HEP® |
|--------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Physical Form | Liquid | Liquid | Liquid |
| Molecular Weight | 113 | 167 | 129 |
| Purity, Area % GC | 98% Minimum | 98% Minimum | 98% Minimum |
| Moisture, % | 0.5 Maximum | 0.5 Maximum | 0.5 Maximum |
| Boiling Point, °C | 200 | 284 | 295 |
| Freezing Point, °C | < -70 | 12 | 20 |
| Viscosity, cps 25°C | 3.5 | 11.5 | 53 |
| Refractive Index @ 25°C | 1.4664 | 1.4950 | 1.4951 |
| Specific Gravity @ 25°C | 0.993 | 1.026 | 1.139 |
| Flash Point, Closed Cup (°F) | 199 | 293 | 320 |
| Heat of Vaporization KCal/mole | 12.7 | 12.9 | 16 |
| Solubility, Parameter | 10.3 | 8.7 | 11.7 |
| CAS Registry No. | 2687-91-4 | 6837-24-7 | 3445-11-2 |
| Chemical Structure |  |  |  |

Table 14.161: Hydrolytic Stability of Alkyl Pyrrolidones (49)

**Pseudo First Order Rate Constant for Acid Hydrolysis
of Selected One Molar Pyrrolidones in Aqueous
One Molar HCl at 100°C pH 0.4 ± 0.1**

| Pyrrolidone Solvent | Pseudo First Order Rate Constant $K \times 10^{10} \text{ Sec}^{-1}$ | Hydrolysis Rate | |
|---------------------|----------------------------------------------------------------------------|------------------|-----------------|
| | | t(0.50) Years | t(0.05) Days |
| 2-PYROL® | 44.7 ± 10 | 1.96 | 53 |
| HEP® | 22.3 ± 5 | 3.9 | 105 |
| M-PYROL® | 15.2 ± 0.4 | 5.8 | 156 |
| NEP® | 7.45 ± 1.2 | 11.7 | 316 |
| CHP® | 1.35 ± 0.09 | 65 | 1745 |

Base Hydrolysis, 1 M NaOH, 100°C

| Pyrrolidone Solvent | % Hydrolyzed in 5 Hours |
|---------------------|-------------------------|
| HEP® | 64.9 |
| NEP® | 53.6 |
| CHP® | 0 |

Acid Hydrolysis of CHP (One Molar) in 2.5 Normal HCl at 80°C

| Time (Days) | % Hydrolysis |
|-------------|--------------|
| 0 | 0 |
| 0.9 | 1.24 |
| 2.0 | 6.45 |
| 4.3 | 13.44 |
| 5 | 15.32 |
| 6 | 17.92 |
| 8 | 22.80 |
| 12 | 31.90 |
| 16.2 | 40.50 |
| 20 | 47.4 |
| 22 | 50.8 |

Table 14.162: CHP/Water System (30:70) Minimum Critical Solution Temperature as a Function of Acid/Base Concentration (49)

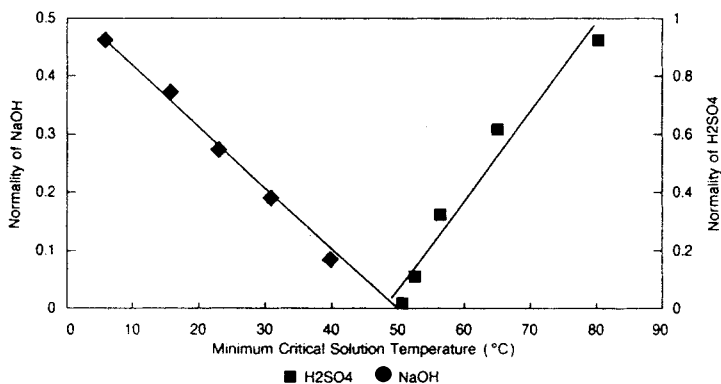


Table 14.163: Phase Diagram CHP Water (49)

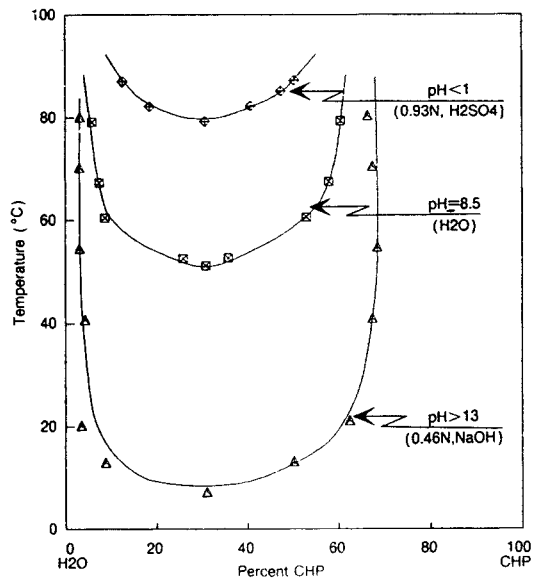



Table 14.164: Minimum Critical Solution Temperature of CHP Water System (30:70) as a Function of Acid/Base Concentration (49)

| Normality of H ₂ SO ₄ , pH < 1 | ¹ CST (°C) |
|------------------------------------------------------|-----------------------|
| 0.93 | 79.5 |
| 0.6 | 65.5 |
| 0.3 | 57.0 |
| 0.1 | 52.5 |
| 20 | 50.5 |
| Normality of NaOH, pH > 13 | ¹ CST (°C) |
| 20 | 50.5 |
| 0.09 | 40.0 |
| 0.185 | 32.0 |
| 0.275 | 23.5 |
| 0.37 | 15.5 |
| 0.46 | 6.0 |

¹CST is the minimum temperature below which the system is in one phase for all compositions.
²pH = 8.5

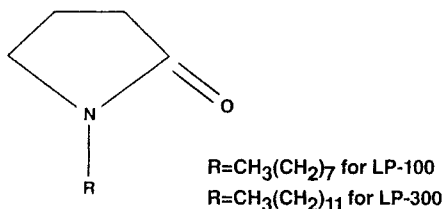Table 14.165: Comparison of NEP, HEP, CHP Solvents with Common Solvents (49)

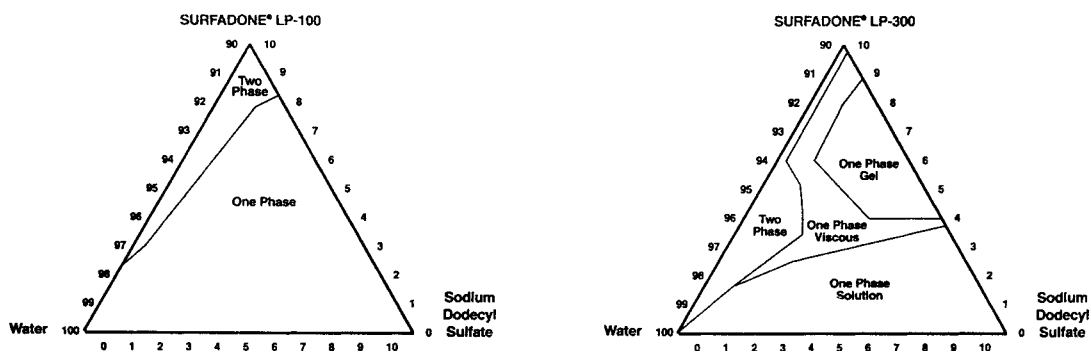
| | Freezing Point (°)C | Boiling Point (°)C | Surface Tension dynes/cm 20° cm | Flash Point (°)C | Solubility Parameter |
|-------------------------------------|---------------------|--------------------|---------------------------------|------------------|----------------------|
| HEP® (N-Hydroxyethyl-Pyrrolidone) | 20 | 295 | 49 | 160 | 11.7 |
| M-PYROL® (N-Methyl-Pyrrolidone) | -24 | 202 | 41 | 95 | 11.0 |
| NEP® (N-Ethyl-Pyrrolidone) | <-70 | 200 | 36 | 93 | 10.3 |
| CHP® (N-Cyclohexyl-Pyrrolidone) | 12 | 284 | 43 | 145 | 8.7 |
| DMAC® (Dimethyl-Acetamide) (DuPont) | -20 | 166 | 34 | 70 | 10.8 |
| DMF® (Dimethyl-Formamide) (DuPont) | -61 | 153 | 35 | 68 | 12.1 |

Table 14.166: Surfadone LP Specialty Solvent Structure (49)**Table 14.167: Physical Properties of Surfadone LP Products (49)**

| | SURFADONE* LP-100 | SURFADONE* LP-300 |
|--------------------------------------------------|-------------------------------|-------------------------------|
| Physical Form (25°C) | Clear to slightly hazy liquid | Clear to slightly hazy liquid |
| Boiling Point (°C) | 100 (0.3mm Hg) | 145 (0.2mm Hg) |
| Vapor pressure (mm Hg) | 0.5×10^{-3} | 0.1×10^{-4} |
| Density (g/cc) | 0.92 | 0.90 |
| Solubility Parameter | 9.2 | 8.9 |
| Flash Point (°C)(TCC) | 119 | 116 |
| Solidification Point(°C) | -25 | 10 |
| Thermal Gravimetric Analysis (°C) ⁽¹⁾ | 175 | 225 |
| Molecular Weight | 197 | 253 |
| Min. Surface Tension (dynes/cm) ⁽²⁾ | 28 | 26 |

(1) Temperature at which 10% weight loss occurs (by volatilization).

(2) Saturated solution

Table 14.168: Phase Diagrams (49)**Table 14.169: Solubilities of Surfadone LP 100 and LP-300 Nonionics in Various Solvents (49)**


| Solvent | SURFADONE* LP-100 | SURFADONE* LP-300 |
|-------------------|-------------------|-------------------|
| Water | < 0.1% or > 65% | < 0.002% or > 80% |
| Ethanol | S | S |
| Acetone | S | S |
| Xylene | S | S |
| Heptane | S | S |
| Paraffin Oil | S | S |
| Stoddard Solvent | S | S |
| Perchloroethylene | S | S |

S = soluble at 10%


Table 14.170: Surfactant Properties of Surfadone LP Products (49)

| Solvent | SURFADONE® LP-100 | SURFADONE® LP-300 |
|---------------------------------------------------|-------------------|-------------------|
| Maximum concentration in H ₂ O (%) | 0.124 | 0.002 |
| Minimum static surface tension (dynes/cm) | 28 | 26 |
| Draves wetting time (sec.) | 4 | 300 |
| Dynamic surface tension (dynes/cm) ⁽¹⁾ | 29 | N/A |
| HLB | 6 | 3 |

(1) at a surface age of one second

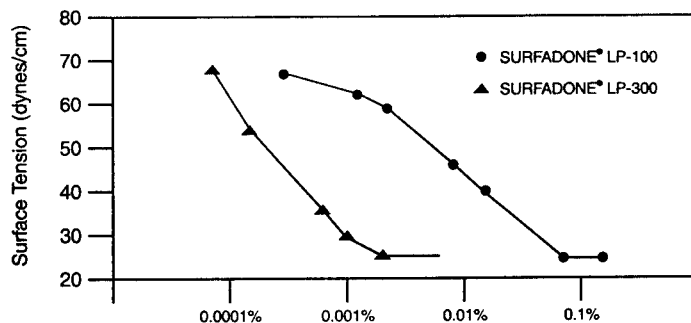Table 14.171: Low Concentrations of Surfadone LP Products Lower Surface Tension of Water (49)**Table 14.172: Draves Wetting Time for Surfadone LP Products with SDS (seconds) (49)**

| | 0.1% Solution | with 0.008% SDS | with 0.018% SDS |
|-------------------|---------------|-----------------|-----------------|
| SURFADONE® LP-100 | 3.5 | 2.4 | <1 |
| SURFADONE® LP-300 | >300 | 5.4 | 4.4 |
| SDS | 17 | — | — |

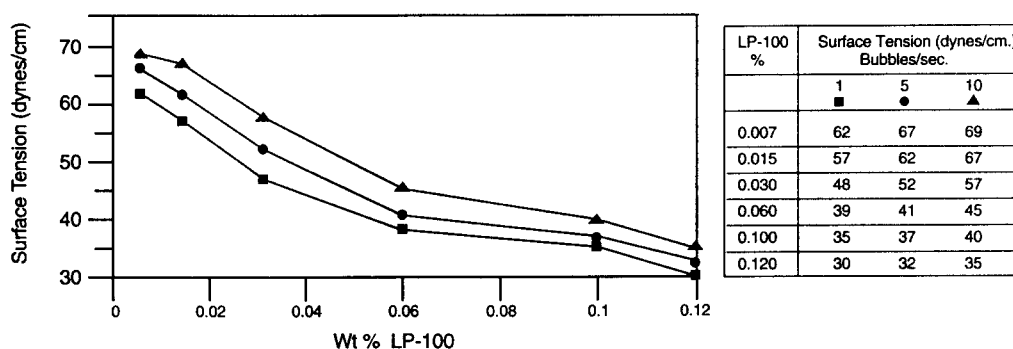Table 14.173: Low Concentrations of Surfadone LP Products Reduce Dynamic and Equilibrium Surface Tension (49)**Table 14.174: Surfadone LP Products Effectively Wet Difficult-to-Wet Substrates (49)**

(Contact Angles in 0.1% Solutions in Water)

| | Aluminum | Silicone | Polypropylene | Teflon |
|-------------------|----------|----------|---------------|--------|
| Water | 84 | 95 | 95 | 113 |
| SURFADONE® LP-100 | <5 | 56 | 34 | 54 |
| SURFADONE® LP-300 | 36 | 53 | 33 | 54 |

Table 14.175: Surfadone LP/SDS Ratio (49)

| | Pure | 3:1 | 1:1 | 1:3 |
|------------------------------|---------|---------|---------|---------|
| SURFADONE® LP-100 | 25/5 | 159/159 | 164/161 | 58/157 |
| SURFADONE® LP-300 | 13/11 | 139/139 | 135/135 | 151/151 |
| Sodium Dodecyl Sulfate (SDS) | 156/156 | — | — | — |

Foam Height (mm), initial/5 min
Total concentration, 0.1%

Table 14.176: Elastomer Mechanical Properties—Results of Material Resistance to NMP (47)

(6 Weeks Immersion @ 120°F)

| MATERIAL | INITIAL WT. (G) | FINAL WT. (G) | Δ WEIGHT | % Δ WEIGHT | DIMENSION BEFORE (CM) | DIMENSION AFTER (CM) | TOTAL LOSS | TOTAL GAIN |
|---------------------|-----------------|---------------|----------|------------|-----------------------|-----------------------|----------------------|----------------------|
| 1) CELCON* | 95.8334 | 96.7680 | 0.9346 | 0.98 | 3.0 × 11.5 × 1.93 | 3.0 × 11.5 × 1.56 | — | 0.026 |
| 2) TEFLON* | 16.8372 | 16.8394 | 0.0022 | 0.013 | 3.2 × 10.1 × 0.241 | 3.2 × 10.1 × 0.241 | — | — |
| 3) NYLON (ROD) | 15.8448 | 15.9256 | 0.0808 | 0.51 | 1.3 × 10.2 × 1.300 | 1.3 × 10.2 × 1.290 | 0.01 | — |
| 4) TIVAR* | 28.9250 | 29.1876 | 0.2626 | 0.91 | 2.6 × 10.2 × 1.204 | 2.6 × 10.3 × 1.209 | — | — × 0.1 × 0.005 |
| 5) NYLON (SHEET) | 31.0453 | 31.1811 | 0.1358 | 0.44 | 3.6 × 10.5 × 0.711 | 3.6 × 10.5 × 0.714 | — | 0.1 × — × 0.003 |
| 6) PVC | 17.3684 | — | — | — | 3.5 × 11.7 × 0.301 | — | — | — |
| 7) EPDM | 13.5350 | 12.4198 | -1.1152 | -8.2 | 3.8 × 10.2 × 0.331 | 3.6 × 9.8 × 0.309 | 0.2 × 0.4 × 0.022 | — |
| 8) NEOPRENE (R-30) | 17.7365 | 23.5720 | 6.8355 | 39.0 | 4.0 × 10.4 × 0.354 | — | — | — |
| NEOPRENE (R-30) | 17.7365 | 18.2105 | 0.4740 | 2.7 | 4.0 × 10.4 × 0.354 | 3.9 × 10.4 × 0.324 | 0.1 × — × 0.03 | — |
| 9) GUM RUBBER | 27.2070 | 31.9650 | 4.7580 | 17.5 | 4.0 × 10.3 × 0.683 | 4.3 × 10.3 × 0.719 | — | 0.3 × 0.5 × 0.036 |
| 10) NEOPRENE (R-41) | 8.2889 | 9.1755 | 0.8866 | 10.7 | 3.9 × 10.1 × 0.165 | — | — | — |
| NEOPRENE (R-41) | 8.2889 | 7.1048 | -1.1841 | -14.3 | — | 3.6 × 9.5 × 0.160 | 0.3 × 0.6 × 0.005 | — |
| 11) BUTYL RUBBER | 39.1515 | 40.8792 | 1.7277 | 4.4 | 4.4 × 10.2 × 0.640 | 4.4 × 10.3 × 0.665 | — | — × 0.1 × 0.025 |
| 12) MYLAR* | 0.6565 | 0.7224 | 0.0659 | 10.0 | 3.9 × 10.1 × 0.013 | 3.8 × 10.2 × 0.013 | — | — |
| 13) VITON* | 12.2540 | 25.5317 | 13.2777 | 108.0 | 4.0 × 10.3 × 0.162 | — | — | — |
| VITON* | 12.2540 | 14.2267 | 1.9727 | 16.1 | 4.0 × 10.3 × 0.162 | 4.4 × 11.0 × 0.134 | — | 0.4 × 0.7 × 0.03 |
| 14) HYPALON* | 9.0964 | 10.3928 | 1.2964 | 14.3 | 3.9 × 10.2 × 0.170 | — | — | — |
| HYPALON* | 9.0964 | 8.2690 | -0.8274 | -9.1 | 3.9 × 10.2 × 0.170 | 3.7 × 9.8 × 0.167 | 0.2 × 0.4 × 0.003 | — |
| 15) SILICONE | 8.1632 | 8.2814 | 0.1182 | 1.45 | 4.2 × 10.3 × 0.158 | 4.2 × 10.3 × 0.157 | 0.001 | — |

Detailed information is available in a separate technical report.


Table 14.177: Pyridine (2)

Pyridine is a liquid miscible with water, alcohol, ether, benzene and many organic liquids. It is an excellent solvent for organic materials and will dissolve many metallic salts giving comparatively stable compounds (without substitution). It is used in the preparation of water-proofing chemicals, rubber accelerators, and pharmaceuticals. It is also used as an extractant and in distilling and purifying operations. The less pure grade is used as a denaturant for industrial alcohol.

| | |
|----------------------------|-------|
| Boiling point | 115°C |
| Melting point | -42°C |
| Specific gravity at 25/4°C | 0.978 |

Table 14.178: Alpha-Picoline (2)

2-Methyl Pyridine




Alpha-picoline is a liquid which is very soluble in water, forming a constant-boiling mixture with it. It is also soluble in ethyl alcohol and ethyl ether. It may be used in the manufacture of alkaloids, pharmaceuticals, antioxidants, and rubber accelerators.

| | |
|----------------------------|-----------------------|
| Boiling point | 128°C |
| Melting point | -69.9°C |
| Specific gravity at 15/4°C | 0.950 |
| Distillation Range | Completely within 2°C |

Table 14.179: Beta-Picoline (2)

3-Methyl Pyridine




Beta-picoline is similar to the alpha compound. It is soluble in water with which it forms a constant-boiling mixture; it is also soluble in ethyl alcohol and ethyl ether. Suggested uses for it are in the manufacture of alkaloids, pharmaceuticals and rubber accelerators. It is also a starting material for the production of nicotinic acid and nicotinic acid amide.

| | |
|----------------------------|-----------|
| Boiling point | 143.5°C |
| Melting point | -18.3°C |
| Purity | 95%, min. |
| Specific gravity at 15/4°C | 0.961 |

Table 14.180: Gamma-Picoline (2)

4-Methyl Pyridine




The solubility and uses for this solvent are similar to those of the alpha and beta compounds.

| | |
|----------------------------|-----------|
| Boiling point | 143.1°C |
| Melting point | +3.8°C |
| Purity | 95%, min. |
| Specific gravity at 15/4°C | 0.957 |

Table 14.181: 2,4-Lutidine (2)

2,4-Dimethyl Pyridine




2,4-Lutidine is a liquid, very soluble in alcohols, ketone, ethers, hydrocarbons, and most organic solvents, but only 15% soluble in water. It is recommended for use in the synthesis of drugs, dyes, and other chemicals.

| | |
|----------------------------|-------------------------|
| Boiling point | 158.3°C |
| Distillation | 90% distills within 2°C |
| Freezing point | Below -60°C |
| Specific gravity at 25/4°C | 0.927 |


Table 14.182: 2,6-Lutidine (2)

2,6-Dimethyl Pyridine



2,6-Lutidine is a liquid, very soluble in water, alcohols, ethers, ketones, hydrocarbons, and most organic solvents. It is recommended for use in the manufacture of resins, dyes, drugs, insecticides, rubbers, and organic chemicals.

| | |
|----------------------------|-----------|
| Boiling point | 142.9°C |
| Freezing point | -6.0°C |
| Purity | 95%, min. |
| Specific gravity at 25/4°C | 0.928 |

Table 14.183: Quinoline (2)

Quinoline is a liquid, soluble in alcohol, ether, carbon disulfide, and in most of the common organic solvents, but only partially soluble in water. It is a solvent for cellulose esters and ethers when used with other solvents. It is used in the manufacture of dyes, photographic sensitizers, nicotinic acid, and drugs. It is also used as an extraction agent and in organic synthesis.

| | |
|----------------------------|-------------------------|
| Boiling point | 237.7°C |
| Melting point | -19.5°C |
| Specific gravity at 20/4°C | 1.095 |
| Distillation range | 95% distills within 2°C |

Table 14.184: 2-Methyl-5-Vinyl Pyridine (4)

| FORMULA | $\text{CH}_2 = \text{CH} - \text{C} \begin{array}{l} \nearrow \text{CH} \\ \searrow \text{CH} \\ \text{HC} \nearrow \text{N} \searrow \text{C} - \text{CH}_3 \end{array}$ | |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| PROPERTIES | | |
| Purity, mol percent (water-free basis) | 95.1 | 94.0 min * • |
| Boiling point, at 50 mm Hg, F | 212 | |
| at 160 mm Hg, F | 358 | |
| Freezing point, C (water-free basis) | -14.16 | -15.14 min |
| Water content, weight percent | 0.20 | 0.5 max |
| Refractive index at 25 C | 1.541 | |
| Specific gravity of liquid at 60/60 F | 0.962 | |
| Density of liquid at 60 F, lbs/gal | 8.01 | |
| Color, Gardner | 1 | 2 max |
| Appearance | Clear | |
| Polymer content (Hexane Dilution) | Negative | Negative min |
| Flash point, F (TOC) | 165 | |
| Inhibitor content, weight percent (Tertiary Butyl Catechol) | 0.1 | 0.05 min - 0.15 max |

Table 14.185: 1,2,4-Trimethylpiperazine (47)

TYPICAL PHYSICAL PROPERTIES

| | |
|--------------------------------|---------------|
| Form | Liquid |
| Viscosity at 25°C. | 1.037 cps. |
| pH, 1% Aqueous Solution | 10.3 |
| Boiling Point (746 mm) | 149° - 151°C. |
| Freezing Point | <-50°F. |
| Specific Gravity 25/25°C. | 0.851 |
| Refractive Index at 25°C. | 1.4480 |
| Fire Point, Cleveland Open Cup | 125°F. |
| Pour Point | <-50°F. |

SOLUBILITY

Soluble in water, acetone, methanol and benzene.

AVAILABILITY

1,2,4-trimethylpiperazine is available in semi-commercial quantities.

Table 14.186: 1,4-Bis(2-Hydroxypropyl)-2-Methylpiperazine (DHP-MP) (47)

TYPICAL PHYSICAL PROPERTIES

| | |
|----------------------------------------------|--------------|
| Form | Liquid |
| Viscosity, 25°C. | 752 cps. |
| Boiling Point (3 mm.) | 145°C. |
| Pour Point | 10°F. |
| Specific Gravity 25/25°C. | 1.001 |
| Refractive Index, 25°C. | 1.4803 |
| Flash Point, Open Cup | 300°F. |
| Color | Light Yellow |
| Molecular Weight | 216 |
| pH, 1% Aqueous Solution | 10.0 |
| Analysis, based on tertiary nitrogen content | 97% |


SOLUBILITY

Miscible in all proportions with water, acetone, ethanol, benzene, heptane, and carbon tetrachloride.

Table 14.187: Morpholine (48)

Tetrahydro-p-Oxazine

Molecular weight: 87.12



This commercially important secondary amine is a water-white, mobile liquid having an ammoniacal odor. It is very soluble in water and forms a stable solution which exhibits a constant composition during evaporation and distillation as well as preserving a constant alkalinity. The ring structure of this solvent, as well as its ether and amine groups, gives it unique solvent power for a greater than usual variety of organic substances, among which are resins, dyes, waxes, shellac, and casein.

It is used in permanent wave solutions for its mild alkalinity; in soaps which are emulsifying agents for paper coatings; in rubless polishes, lacquers, paints, insecticides, etc. It imparts water-resistance after drying. Its water-soluble salts have high phenol coefficients. Morpholine may also be used in photographic developing.

| | |
|-----------------------------------------------|--------------------|
| Color, Pt - Co scale | 15 max. |
| Boiling range, °C | |
| IBP | 125.0 min. |
| DP | 132.0 max. |
| Purity, wt. % | 98.0 min. |
| Specific gravity, 20/20°C | 0.999 - 1.004 |
| Suspended matter | Substantially free |
| Freezing point, °C | -4.9 |
| Boiling point, °C | 128.9 |
| Flash point, (TOC) °C | 38 |
| °F | 100 |
| Density, g./cc. at 20°C | 0.9994 |
| Refractive index, n_D^{20} | 1.4545 |
| Surface tension, dynes/cm. at 20°C | 37.5 |
| Viscosity, centipoises at 20°C | 2.23 |
| Conductivity, mho/cm. x 10 ¹⁰ | 6 |
| pK _b | 9.61 |
| Dielectric constant | 7.33 |
| Dipole moment, Debyes | 1.58 |
| Molar polarization, P _∞ in benzene | 75.3 |
| Heat capacity, cal./mol./deg. at 25°C | 41.6 |
| Heat of vaporization, cal./mol. (45-129°C) | 9510 |

Table 14.188: Boiling Point Composition Curves for Aqueous Morpholine Solutions (19)

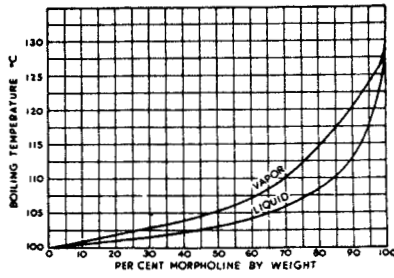


Table 14.189: pH of Aqueous Morpholine Solutions at 25°C (19)

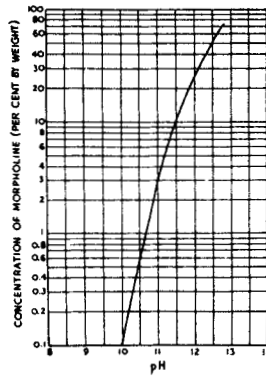


Table 14.190: Viscosity of Aqueous Morpholine Solutions at 20°C (19)

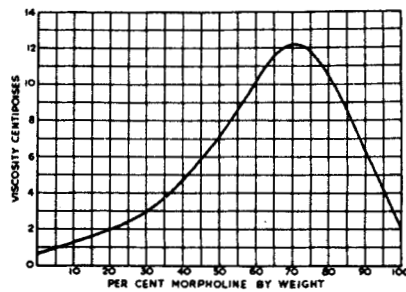



Table 14.191: Solubility of Various Substances in Morpholine (48)


| <u>Substance</u> | <u>g. Solute in 100 g. Morpholine at 25°C</u> | <u>Substance</u> | <u>g. Solute in 100 g. Morpholine at 25°C</u> |
|-------------------|-----------------------------------------------|--------------------|-----------------------------------------------|
| Acetone | ∞ | 2-Hexanone | ∞ |
| Beeswax | < 1 | Linseed oil | ∞ |
| Benzene | ∞ | Methanol | ∞ |
| Benzyl cellulose | > 5 | Methylamine | 33 |
| Butyl ether | ∞ | Methylcyclohexanol | ∞ |
| Castor oil | ∞ | Naphtha | > 5 |
| Cellulose acetate | > 5 | Paraffin oil | < 1 |
| Cellulose nitrate | > 5 | Paraffin wax (hot) | > 5 |
| Copal gum | > 5 | Pine oil | ∞ |
| Dimethylamine | 109 | Resin | > 5 |
| Ester gum | > 5 | Shellac | > 5 |
| Ethanol | ∞ | Sulfur | < 5 |
| 2-Ethylbutanol | ∞ | Trimethylamine | 34 |
| Ethylene glycol | ∞ | Turpentine | ∞ |
| Ethyl ether | ∞ | Polyvinyl acetate | > 5 |
| Glycol ether | ∞ | Polyvinyl butyral | > 5 |
| | | Polyvinyl chloride | > 5 |

Table 14.192: N-Ethyl Morpholine (2)

This cyclic tertiary amine is a water-white liquid miscible with water. It may be used as a solvent for oils, dyes and resins, and as an intermediate in the synthesis of rubber accelerators, emulsifying agents, drugs, and dyes.

Boiling Point 138°C.

Specific Gravity at 20/20°C. 0.916

Table 14.193: N-Phenyl Morpholine (2)

Boiling Point at 760 mm. 268°C.

Melting Point 57°C.

Esters

FORMATES

Table 15.1: Methyl Formate (2)



Methyl formate is a colorless flammable liquid with a pleasant ethereal odor. It will dissolve cellulose ethers and esters but will dissolve them more readily when mixed with other solvent esters or the less volatile halogenated hydrocarbons.

| | |
|-----------------------------------------|---------------------------------------------------------------------------|
| Acidity | Neutral to methyl orange (methyl formate hydrolyzes in presence of water) |
| Boiling point | 31.8° C |
| Color | Water-white |
| Distillation range | Below 31.5°C None Above 35.0°C None |
| Electrical conductivity at 25°C | 3.6×10^{-8} reciprocal ohms |
| Flash point | -32°C |
| Melting point | -99.8°C |
| Odor initial | Pleasant, ethereal |
| Odor residual | Non-residual |
| Purity | 95% to 100% ester, by wt |
| Refractive index at 20°C | 1.3431 |
| Solubility in water at 20°C | 30% by vol |
| Solubility of water in solvent at 25° C | 24% by vol |
| Specific gravity at 20/20°C | 0.950 to 0.980 |
| Vapor pressure | |
| 0°C | 195.0 mm of Mercury |
| 10°C | 309.4 mm of Mercury |
| 16°C | 400.0 mm of Mercury |
| 20°C | 476.4 mm of Mercury |
| 25.8°C | 600.0 mm of Mercury |
| 30°C | 707.9 mm of Mercury |

Table 15.2: Ethyl Formate (2)

Formosol




Ethyl formate is a water-white, highly volatile and unstable liquid with a pleasant odor resembling peach kernels. It is partly soluble in water and miscible with benzene. It is a powerful solvent for cellulose nitrate and acetate, yielding solutions of unusual low viscosity which have a tendency to chill. It is an important fumigant and larvicide for the treatment of tobacco, cereals, dried fruit and similar products. It is used as a chemical intermediate in the manufacture of such medicinals as sulfadiazine, thiamin (Vitamin B₁), and perfumes and synthetic flavors.

Table 15.2: (continued)

| | |
|----------------------------------------|-------------------------------------------------------------------|
| Acidity | Neutral to methyl orange (it hydrolyzes in the presence of water) |
| Boiling point | 54.3°C |
| Color | Water-white |
| Distillation range | 51°-55°C |
| Electrical conductivity at 25°C | Less than 1.45×10^{-9} recip ohms |
| Flash point | -19°C |
| Freezing point | -80.5°C |
| Purity | 95% to 100% |
| Refractive index at 20°C | 1.3604 |
| Specific gravity at 20/20°C | 0.900 to 0.930 |
| Solubility in water at 20°C | 10% by vol |
| Solubility of water in solvent at 20°C | 17% by vol |
| Vapor pressure at 20.6°C | 200 mm of Hg |
| at 30.2°C | 300 mm of Hg |
| Weight per gal at 68°F | 7.61 lbs |

Table 15.3: Butyl Formate (2)



Butyl formate is a colorless liquid, miscible with alcohols, ethers, oils, hydrocarbons and so forth. It will dissolve cellulose nitrate, some types of cellulose acetate, and many cellulose ethers. Butyl formate will also dissolve many natural and synthetic resins such as copals, dammar, elemi, mastic, shellac, cumar resins, ester gum and alkyds in the presence of ethyl alcohol. It is used as an intermediate and in perfumes.

| | |
|------------------|--------------|
| Acidity | 0.02% max. |
| Ester content | 85% min. |
| Boiling range | 96°-110°C. |
| Specific gravity | 0.885-0.9108 |

Table 15.4: Amyl Formate (2)



Commercial amyl formate is an anhydrous, colorless liquid composed of a mixture of isomeric amyl formates with the iso-amyl formate in predominance. This mixture is miscible with oils, hydrocarbons, alcohols, ketones and so forth. It is a solvent for cellulose esters, "Cumar", copal, gum esters, etc. It is able, when mixed with an alcohol, to dissolve shellac and alkyd resin. It is a less odoriferous and more energetic solvent than amyl acetate. It also has both a lower boiling point and a greater speed of evaporation. n-Butyl acetate and amyl formate have similar volatility and have substantially the same solvent power which permit free interchange of these only as far as these properties allow.

| | |
|------------------|-------------|
| Acidity | 0.05% max. |
| Boiling point | 130.4°C. |
| Boiling range | 110°-130°C. |
| Flash point | 80°F. |
| Specific gravity | 0.880-0.885 |

ACETATES

Table 15.5: Methyl Acetate (2)



Methyl acetate is a water-white flammable, readily hydrolyzable liquid, with a fragrant odor. This low-boiling solvent was first prepared in 1835 by reacting acetic acid and methanol. It is miscible with most organic solvents and will completely dissolve cellulose nitrate and acetate, ethyl cellulose, resins such as ester gum, rosin, "Cumar", elemi, phenolics, and oils such as corn, linseed, castor, neatsfoot, chinawood and cottonseed. It will only partially dissolve shellac, manila, dammar, pontianac, Beckacites and alkyds. In many respects, methyl acetate resembles acetone as a solvent, particularly as to its boiling point, solvent power and miscibility, but its tendency to hydrolyze to methanol and acetic acid, in the presence of water, limits its wider use in the industries. Methyl acetate is usually admixed with higher boiling solvents. It is used in lacquers, paints, varnishes, enamels, perfumes, dyes, dopes, plastics, and synthetic finishes as well as a substitute for acetone.

| | | | |
|-------------------------------------------|----------------------------|----------------------------------------|----------------------------|
| Acidity (as acetic) | 0.005%, max | Freezing point | -98.1°C |
| Boiling point | 56.9°C | Heat of combustion | 5371 cal/g |
| Distillation range | 55-58°C | Heat of vaporization | 104.4 cal/g |
| Coefficient of expansion (per °C) at 20°C | 0.001390 | Non-volatile matter | 0.005 gram per 100 cc, max |
| Color | Water-white | Refractive index at 20°C | 1.3593 |
| Critical temperature | 233.7°C | Solubility in water at 20°C | 24% by wt |
| Critical pressure | 46-3 atm | Solubility of water in solvent at 20°C | 8% by wt |
| Dielectric constant at 20°C | 7.3 ± 0.2 | Specific gravity at 20/20°C | 0.9353 |
| Dilution ratios | | Surface tension at 20°C | 24.6 dynes/cm |
| Toluene | 2.9 | Vapor pressure at 20°C | 173 mm Hg |
| Petroleum naphtha | 0.9 | Viscosity at 20°C | 0.00381 poises |
| Electrical conductivity at 25°C | 3.4 × 10 ⁻⁴ mho | Weight per gal at 20°C | 7.783 lbs |
| Flash point (A.S.T.M. Open Cup) | -15°C | | |

Table 15.6: Ethyl Acetate (2)

Acetic Ether



Ethyl acetate is a water-white, flammable liquid with a pleasant, fruity odor. The 85 to 88 per cent grade of ethyl acetate suitably denatured is generally used for commercial purposes but 95 and 99 percent grades are also available. It is miscible with most organic solvents such as alcohols, ketones, esters, aromatic, aliphatic and halogenated hydrocarbons. It dissolves such materials as nitrocellulose, camphor, oils, fats, waxes, gums and natural and synthetic resins. It will tolerate fairly large amounts of lacquer diluents and like methyl acetate it not only has a wide range of solubilities but it possesses the unique property of dissolving nitrocellulose, cellulose acetate and cellulose ethers yielding solutions of low viscosity. Its solvent power for cellulose derivatives is much improved, however, by adding a small quantity of alcohol.

| | | | |
|--------------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------------------------------------------|
| | (85 to 88%) | | |
| Acidity (as acetic acid) | 0.01% by wt, max | Flash point | -5°C (23°F) |
| Blush resistance at 90°F (10% ½ sec. R.S. nitrocellulose solution) | Clear 45% Relative humidity Bluish 50% | Freezing point | -82.4°C |
| Coefficient of cubical expansion (ordinary temperatures) | 0.00073 per °F 0.00132 per °C | Non-volatile matter | 0.003 gram per 100 cc, max |
| Color | Water-white | Refractive index at 20°C | 1.3725 |
| Critical temperature | 250.1°C | Solubility in water at 25°C | 9.7% by vol |
| Critical pressure | 37.8 atmospheres | Solubility of water in solvent at 25°C | 9.8% by vol |
| Dilution ratio | | Specific gravity at 20/20°C | 0.883 to 0.888 |
| Toluol | 3.5 | Viscosity at 20°C | 4.546 millipoises |
| Petroleum naphtha | 1.1 | Weight per gal at 68°F | 7.36 lbs |
| Distillation range | Below 70°C None Below 72°C Not more than 10% Above 80°C None | | |
| Dryness | Miscible without turbidity with 20 volumes 60° Bé gasoline at 20°C | | (95 to 98%) |
| Electrical conductivity at 25°C | Less than 1 × 10 ⁻⁹ reciprocal ohms | Acidity (as acetic) | 0.01% by wt, max |
| Evap. rate at 95°F (in min.) | | Blush resistance at 90°F (10% ½ sec. R.S. nitrocellulose solu- tion) | Clear 50% Relative humidity Bluish 55% |
| 5% | ½ | Coefficient of expansion per 1°F per 1°C | 0.00074 0.00133 |
| 25% | 1½ | Color | Water-white |
| 50% | 3½ | Dilution ratio | |
| 75% | 6½ | Toluol | 3.2 |
| 90% | 9½ | Petroleum hydrocarbon | 1.0 |
| 95% | 11½ | Distillation range | 74 to 80°C |
| | | Dryness at 20°C | Miscible without turbidity with 20 vol 60° Bé gasoline |

(continued)

Table 15.6: (continued)

| (95 to 98%) | | | |
|--------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------|-----------------------------------|
| Evap. rate at 95°F (in min.) | | Color | Water-white |
| 5% | ½ | Dilution ratio | |
| 25% | 1½ | Toluol | 3.0 |
| 50% | 3½ | Petroleum naphtha | 1.0 |
| 75% | 6 | Distillation range | 75 to 80°C |
| 90% | 7½ | Electrical conductivity at 25°C | 3.2 × 10 ⁻⁷ recip ohms |
| 95% | 8½ | Evap. rate at 95°F (in min.) | |
| Flash point | 26°F (approximate) | 5% | ½ |
| Non-volatile matter | 0.003 gm per 100 cc, max | 25% | 1½ |
| Solubility of water in solvent at 25°C | 4% by vol | 50% | 3½ |
| Specific gravity at 20/20°C | 0.895 to 0.900 | 75% | 6½ |
| Viscosity (10% ½ sec. nitrocellulose solution) | 33 centipoises | 90% | 9½ |
| Water | No turbidity when mixed with 19 volumes of 60° Bé gasoline at 20°C | 95% | 10½ |
| Weight per gal at 20°C | 7.47 lbs | Explosive limits | 2.26-11.4% |
| | | Flash point | 0.5°C |
| | | Freezing point | -82.4°C |
| | | Heat of combustion | 538 kg. cal/mole |
| | | Heat of vaporization at 0°C | 102 cal/gm |
| | | at 80°C | 102.9 cal/gm |
| | | Non-volatile matter | 0.003 gram when 100 cc, max |
| (99 to 100%) acetic ether grade | | | |
| Acidity (as acetic) | 0.01% by wt, max | | |
| Blush resistance at 90°F (10% ½ sec. R.S. nitrocellulose solution) | Clear 55% Relative humidity Blush 60% | | |
| Coefficient of expansion per 1°F | 0.00074 | | |
| per 1°C | 0.000133 | | |

Table 15.7: n-Propylacetate (41)



The properties of n-propyl acetate are, approximately, intermediate between those of ethyl and n-butyl acetates. It is miscible with alcohols, ketones, esters, oils and hydrocarbons and is a good solvent for nitrocellulose and a wide range of cellulose derivatives, especially when it is admixed with the aromatic hydrocarbons or the lower aliphatic alcohols. It will also dissolve natural and synthetic resins like elemi, "Cumar" resins, ester gum, manila, mastic, rosin and sandarac. It is used principally as a low-boiling component in nitrocellulose lacquer formulations.

| | | | |
|----------------------------------------|--------|-------------------------------------------------|------------------|
| Molecular Weight (Theoretical) | 102.08 | Boiling Range, 760 mm. °C | |
| Color (Pt-Co Scale), max | 15 | Initial Boiling Point, min | 99 |
| Weight/Vol, 20°C, | | Dry Point, max | 103 |
| lb/gal (U.S.) | 7.39 | Freezing Point, °F (°C) | -131 (-93) |
| kg/liter | 0.89 | Flash Point, Tag Closed Cup, °F (°C) | 55 (13) |
| lb/gal (Imperial) | 8.87 | Tag Open Cup, °F (°C) | 58 (14) |
| Solubility, 20°C, wt % | | Fire Point, °F (°C) | 70 (21) |
| In water | 2.3 | Flammable Limits in Air, % by volume | |
| Water in | 2.6 | Lower, at 100°F (38°C) | 1.71 |
| Evaporation Rate (n-butyl acetate = 1) | 2.3 | Upper, at 200°F (93°C) | 7.95 |
| Dilution Ratio, toluene | 3.2 | Autoignition Temperature (ASTM D-2155), °F (°C) | 855 (457) |
| VM & P naphtha | 1.5 | NFPA Classification 30: | IB |
| Refractive Index, 20°C | 1.3844 | ICC Labels Required | Red |
| Vapor Pressure, 20°C, mm Hg | 23 | Bureau of Explosives Classification | Flammable Liquid |
| Specific Gravity, 20°/20°C | 0.885 | | |


Table 15.8: Isopropyl Acetate (2)

Isopropyl acetate is a water-white pleasant-odored liquid with properties intermediate between ethyl and butyl acetates. It is miscible with most of the common organic solvents such as alcohols, ketones, esters, oils, hydrocarbons, etc., and it is a solvent for nitrocellulose, cellulose acetate (of low viscosity) and a wide range of oils, fats, waxes, gums and natural and synthetic resins. Like *n*-propyl acetate, its solvent power for cellulose esters is increased when lower aliphatic alcohols are added. It is largely used in the lacquer industry where its slow evaporation rate and blush resistance are of importance. It is also used in the manufacture of plastics, artificial leather, dopes, films, cements, and in the recovery of acetic acid from aqueous solutions.

| | | | |
|---------------------------------------|---------------------------------|--------------------------------|----------------------|
| Acidity (as acetic) | 0.02% by wt, max | Flash point (Tag Closed Cup) | 39°F |
| Boiling point at 760 mm | 88.6°C | Freezing point | -73.4°C |
| Coefficient of expansion per °F | 0.000727 | Heat of vaporization | 79.4 cal/gm |
| Color | Water-white | Non-volatile matter | 2 mg per 100 cc, max |
| Dilution ratios | | Refractive index, N 20/D | 1.3772 |
| Toluene | 2.7 | Solubility of water in solvent | 3.2% by wt |
| V.M. and P. naphtha | 0.92 | Specific gravity at 20/20°C | 0.866 to 0.871 |
| Distillation range | 84.5-90°C | Specific heat at 15-25°C | 0.521 cal/gm |
| Electrical conductivity at 25°C | 5.7×10^{-7} recip ohms | Surface tension at 25°C | 24.5 dynes/cm |
| Evaporation rate at 95°F (in minutes) | | Vapor pressure at 10°C | 26.2 mm Hg |
| 5% | ½ | 20°C | 45.7 mm Hg |
| 25% | 1½ | 30°C | 76.1 mm Hg |
| 50% | 4½ | 40°C | 121.8 mm Hg |
| 75% | 7½ | Viscosity at 20°C | 0.00525 poises |
| 90% | 10½ | Weight per gallon at 20°C | 7.23 lbs |
| 95% | 11½ | | |

Constant Boiling Mixtures

| | | % by Wt | B.P. -C |
|-------------------|------|-------------|---------|
| Isopropyl Acetate | 47.7 | Isopropanol | 52.3 |
| Isopropyl Acetate | 89.4 | Water | 10.6 |
| | | | 76.6 |


Table 15.9: *n*-Butyl Acetate (2)

This ester is a water-white liquid with a characteristic fruity odor which is less pronounced than the odor of amyl acetate. It is miscible with alcohols, ketones, esters and most of the common organic solvents. It is a solvent for nitrocellulose and cellulose ethers, especially when previously mixed with active or latent solvents. It will dissolve oils, fats, waxes, metallic resinates, camphor, "Cumar" resins, dammar, ester gum, elemi, kauri, manila, mastic, pontianac, rosin, sandarac, chlorinated rubber, and such synthetic resins as the vinyls, polystyrene, and acrylates. In combination with 20 per cent of butyl alcohol, butyl acetate will dissolve the less highly polymerized alkyd resins and shellac. Owing to its power of imparting low viscosity, gum compatibility, and good working qualities, it is classed among the best medium boiling solvents for nitrocellulose. Its volatility meets the demands of a lacquer solvent because it is sufficiently high to leave the film readily and at the same time low enough to prevent blushing. When combined with butyl alcohol it will prevent gum-blush, cotton-blush and chilling. Its largest use is as a solvent in the manufacture of nitrocellulose lacquers for protective coatings, artificial leather and coated paper, plastics, polishes, safety glass, in perfumes, and flavoring materials.

(continued)

Table 15.9: (continued)

| | 88-92% | | 98-100% | | | |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------|--------------------|---------|-------|
| Acidity (as acetic) | 0.01% by wt, max | Acidity (as acetic) | 0.01% by wt, max | | | |
| Boiling point at 760 mm Hg | 126.5°C | Boiling point | 126.5°C | | | |
| Coefficient of cubical expansion (ordinary temperatures) | 0.00067 per°F 0.00121 per°C | Coefficient of expansion per 1°F per 1°C | 0.006 0.0011 | | | |
| Color | Water-white | Color (A.P.H.A.) | 10 max | | | |
| Dielectric constant at 20°C | 5.0 | Dilution ratio | | | | |
| Dilution ratio | | Toluol | 3.05 | | | |
| Toluol | 2.9 | Petroleum naphtha | 1.40 | | | |
| Petroleum naphtha | 1.4 | Distillation range | 123°-128°C | | | |
| Distillation range | Below 115°C None Below 120°C Not more than 8% Above 130°C Not more than 5% Above 135°C None | Electrical conductivity at 25°C | 13 × 10 ⁻⁹ recip ohms | | | |
| Evaporation rate at 95°F (in minutes) | | Flash point | 82°F approx | | | |
| 5% | 1½ | Fractionation: I.P. | 114.3° | | | |
| 25% | 6½ | 10% | 116.0 | | | |
| 50% | 13½ | 25% | 116.9 | | | |
| 75% | 22½ | 50% | 117.4 | | | |
| 90% | 3½ | 75% | 117.6 | | | |
| 95% | 34½ | 90% | 117.6 | | | |
| Flash point | 28°C | E.P. | 118.1 | | | |
| Heat of vaporization | 73.8 calories per gm | Heat of vaporization | 73.8 cal/gm | | | |
| Freezing point | -76.8°C | Non-volatile matter | Negligible | | | |
| Non-volatile matter | 0.005 gram per 100 cc, max | Refractive index at 20°C | 1.3951 | | | |
| Residue | None | Solubility in water at 25°C | 0.78% by wt | | | |
| Refractive index at 20°C | 1.3947 | Solubility of water in solvent at 25°C | 2.88% by wt | | | |
| Solubility in water at 25°C | 0.5% by vol | Specific gravity at 20/20°C | 0.879 to 0.883 | | | |
| Solubility of water in solvent at 25°C | 1.6% by vol | Specific heat at 21-27°C | 0.505 cal/gm | | | |
| Specific gravity at 20/20°C | 0.872 to 0.880 | Surface tension at 27°C | 27.6 dynes/cm | | | |
| Vapor pressure at 0° C | 3.0 mm Hg | Vapor pressure at 20°C | 9.0 mm Hg | | | |
| 25°C | 15.0 mm Hg | Viscosity at 25°C | 0.00693 poises | | | |
| 50°C | 45.0 mm Hg | Weight per gallon | 7.76 lbs | | | |
| Viscosity at 25°C | 0.671 centipoises | | | | | |
| Weight per gallon at 20°C | 7.28 lbs | | | | | |
| | | <i>Constant Boiling Mixtures</i> | | | | |
| | | % by Wt | | % by Wt | B.P. °C | |
| | | <i>n</i> -Butyl acetate | 54.0 | <i>n</i> -Butanol | 46.0 | 118.0 |
| | | <i>n</i> -Butyl acetate | 60.0 | <i>n</i> -Propanol | 40.0 | 94.2 |
| | | <i>n</i> -Butyl acetate | 48.0 | Isopropanol | 52.0 | 80.1 |
| | | <i>n</i> -Butyl acetate | 71.3 | Water | 28.7 | 90.2 |
| | | <i>Ternary Mixtures</i> | | | | |
| | | | | | B.P. | |
| | | <i>n</i> -Butyl acetate | 35.3% | | | |
| | | <i>n</i> -Butanol | 27.4% | | 89.4°C | |
| | | Water | 37.3% | | | |

Table 15.10: *sec*-Butyl Acetate (2)


sec-Butyl acetate is a colorless, flammable liquid with a fruity odor. It is miscible with castor and linseed oils and hydrocarbons, and will dissolve nitrocellulose, cumarone, elemi, ester gum, kauri, mastic, manila, pontianac, asphalt and tar. It has only partial solubility for dammar and shellac. Its solvency is very similar to *n*-butyl acetate but it has a lower boiling range, less blush resistance and will evaporate with greater rapidity. For this reason, to replace *n*-butyl acetate it is necessary that this solvent should be mixed with slower evaporating solvents that can make up for its quicker rate of evaporation. It is largely used in the manufacture of nitrocellulose lacquers and similar types of coatings used in airplane dopes, artificial leather, celluloid products, coated paper, patent leather, and textile sizing and printing compounds.

| | |
|------------------------------------------|------------------------------------------|
| Acidity (as acetic) | 0.03% by wt, max |
| Blush resistance at 60°F | Clear 75% Relative humidity Blush 80% |
| Coefficient of expansion per 1°F per 1°C | 0.00063 0.00113 |
| Color | Water-white |
| Distillation range: | |
| Below 104°C | None |
| Below 111°C | Not more than 10% |
| Below 114°C | Not more than 60% |
| Below 118°C | Not less than 90% |
| Above 130°C | None |

(continued)

Table 15.10: (continued)

| | | | |
|---------------------------------------|------|----------------------------------------|--------------------------|
| Evaporation rate at 95°F (in minutes) | | Non-volatile matter | 0.005 gm per 100 cc, max |
| 5% | ½ | Residue | None |
| 25% | 3¼ | Refractive index, N 25.3/D | 1.3866 |
| 50% | 8½ | Specific gravity at 20/20°C | 0.862-0.866 |
| 75% | 13½ | Solubility in water | 0.74% by wt |
| 90% | 16½ | Solubility of water in solvent at 25°C | 2.1% by wt |
| 95% | 18 | Weight per gal at 20°C | 7.19 lbs (approx.) |
| Flash point | 66°F | | |

Table 15.11: Isobutyl Acetate (41)

Isobutyl acetate is a medium-boiling solvent, colorless and with a mild, fruity ester odor. The commercial grade has an ester content of 88 to 92 percent, the balance being substantially isobutyl alcohol. The solvent power of this ester is similar to the normal and secondary acetates. It is miscible with most organic solvents and will dissolve a large number of oils, waxes and natural and synthetic resins. With the limitation set by Rule 66 on the use of branched chain ketones and aromatic solvents, isobutyl acetate is an economical replacement for MIBK and by having a similar evaporation rate, can be formulated in toluene replacements.

| | | | |
|-------------------------------------------------------------------|--------|-------------------------------------------------|------------------|
| Molecular Weight (C ₈ H ₁₂ O ₂) | 116.2 | Boiling Range, 760 mm, °C | |
| Color (Pt-Co Scale), max | 10 | Initial Boiling Point, min | 112 |
| Weight/Vol, 20°C | | Dry Point, max | 119 |
| lb/gal (U.S.) | 7.25 | Freezing Point, °F (°C) | -146 (-99) |
| kg/liter | 0.87 | Flash Point, Tag Closed Cup, °F (°C) | 69 (20) |
| lb/gal (Imperial) | 8.70 | Tag Open Cup, °F (°C) | 75 (24) |
| Solubility, 20°C, wt % | | Fire Point, °F (°C) | 88 (31) |
| In water | 0.7 | Flammable Limits in Air, % by volume | |
| Water in | 1.6 | Lower, at 200°F (93°C) | 1.27 |
| Evaporation Rate (n-butyl acetate = 1) | 1.4 | Upper, at 200°F (93°C) | 7.5 |
| Dilution Ratio, toluene | 2.7 | Autoignition Temperature (ASTM D-2155), °F (°C) | 800 (427) |
| VM & P naphtha | 1.1 | NFPA Classification 30: | 1B |
| Refractive Index, 20°C | 1.3997 | DOT Labels Required | Red |
| Vapor Pressure, 20°C, mm Hg | 12.5 | DOT Classification | Flammable Liquid |
| Specific Gravity, 20°/20°C | 0.870 | | |

Table 15.12: Amyl Acetate (2)

Banana Oil
Amyl Acetic Ether
Isoamyl Acetate



Amyl acetate is a colorless, flammable liquid with an odor resembling bananas or pears. Its exceptional solvent power places it among the first solvents in the nitrocellulose lacquer industry. The amyl acetates are made by the acetylation of fusel oil or synthetic amyl alcohols. Amyl acetate is miscible with oils, hydrocarbons, alcohols, ethers and esters, and will dissolve such substances as camphor, elemi, ester gums, copal ester, copals, dammar, kauri, rosin, sandarac, tannins, waxes, zanzibar and "Cumar" resins, and when it is mixed with alcohol it will dissolve some alkyd resins. It is a good solvent for cellulose esters and ethers, the solvency of which is increased when combined with ethyl alcohol. Amyl acetate is used extensively as a solvent in nitrocellulose lacquers, both for its solvency and its power to impart blush resistance, good flow, gloss and toughness. It is also used in making smokeless powder, artificial leather and pearls, airplane dopes, waterproofing compositions, varnishes, dry cleaning compounds, bronzing liquid, films, celluloid, rayon, linoleum, oilcloth, fruit flavors, soft drinks, food preparations, confectionery, perfumes, soap solvent, and in photo-engraving.

85-88% technical grade


| | |
|-------------------------------------------------------------------|------------------------------------------|
| Acidity (as acetic) | 0.03% by wt, max |
| Blush resistance at 90°F (10% ¼ sec R.S. nitrocellulose solution) | Clear 80% Relative humidity Blush 85% |
| Coefficient of expansion per 1°F per 1°C | 0.00066 0.00119 |
| Color | Water-white |
| Dilution ratio | |
| Toluol | 2.7 |
| Petroleum naphtha | 1.4 |

(continued)

Table 15.12: (continued)

| <u>85-88% technical grade</u> | | <u>(High Test 85-88%)</u> | |
|--------------------------------------------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------|
| Distillation range | | Non-volatile matter | Not more than 0.005 gm per 100 cc |
| Below 110°C | Not more than 15% | Odor | Mild |
| Below 120°C | Not more than 30% | Odor residual | Non-residual |
| Below 130°C | Not more than 55% | Purity | Ester content as amyl acetate 85-88% |
| Below 140°C | Not less than 80% | Solubility of water in solvent at 25°C | 100 cc solvent dissolves 1.8 cc water |
| Above 150°C | None | Specific gravity at 20/20°C | 0.859-0.863 |
| Dryness | Miscible without turbidity with 20 vols 60° Bé gasoline at 20°C | Viscosity (10% $\frac{1}{2}$ sec. R.S. nitrocellulose solution) | 61 centipoises |
| Evaporation rate at 95°F (in minutes) | | Weight per gal at 20°C | 7.17 lbs |
| 5% | 1 | <u>90-95% grade</u> | |
| 25% | 6 | Acidity (as acetic) | 0.035% by wt, max |
| 50% | 15 $\frac{1}{2}$ | Blush resistance at 90°F (10% $\frac{1}{2}$ sec. R.S. nitrocellulose solution) | Clear 85% Relative humidity Blush 90% |
| 75% | 28 $\frac{1}{2}$ | Coefficient of expansion per 1°F | 0.00061 |
| 90% | 41 $\frac{1}{2}$ | per 1°C | 0.00110 |
| 95% | 47 $\frac{1}{2}$ | Color | Water-white |
| Flash point | 63°F | Dilution ratio | |
| Non-volatile matter | 0.005 gm per 100 cc, max | Toluol | 2.6 |
| Solubility of water in solvent at 25°C | 2.4% by vol | Petroleum naphtha | 1.4 |
| Specific gravity at 20/20°C | 0.857-0.865 | Evaporation rate at 95°F (in minutes) | |
| Viscosity (10% $\frac{1}{2}$ sec. R.S. nitrocellulose solution) | 43 centipoises | 5% | 1 $\frac{1}{2}$ |
| Weight per gal at 20°C | 7.17 lbs | 25% | 7 |
| <u>(High Test 85-88%)</u> | | 50% | 15 $\frac{1}{2}$ |
| Acidity (as acetic) | Not more than 0.03% | 75% | 25 $\frac{1}{2}$ |
| Blush resistance at 90°F (10% $\frac{1}{2}$ sec. R.S. nitrocellulose solution) | Clear 85% Relative humidity Blush 90% | 90% | 35 |
| Coefficient of expansion per 1°F per 1°C | 0.00066 0.00119 | 95% | 40 |
| Color | Water-white | Flash point | 79°F |
| Dilution ratio | | Distillation range | |
| Toluol | 2.5 | Below 110°C | None |
| Petroleum naphtha | 1.4 | Below 120°C | Not more than 10% |
| Distillation range | | Below 130°C | Not more than 70% |
| Below 110°C | None | Below 140°C | Not less than 90% |
| Below 120°C | Not more than 10% | Above 150°C | None |
| Below 130°C | Not more than 40% | Non-volatile matter | 0.005 gram per 100 cc, max |
| Below 140°C | Not less than 60% | Residue | None |
| Below 150°C | None | Solubility in water at 25°C | 2% by vol |
| Evaporation rate at 95°F (in minutes) | | Solubility of water in solvent at 25°C | 2% by vol |
| 5% | 1 $\frac{1}{2}$ | Specific gravity at 20/20°C | 0.868 to 0.872 |
| 25% | 8 $\frac{1}{2}$ | Viscosity (10% $\frac{1}{2}$ sec. R.S. nitrocellulose solution) | 60 centipoises |
| 50% | 18 $\frac{1}{2}$ | Weight per gal at 20°C | 7.22 lbs |
| 75% | 30 | | |
| 90% | 45 | | |
| 95% | 51 $\frac{1}{2}$ | | |
| Flash point | 84°F | | |

Table 15.13: sec-Amyl Acetate (2)



This medium boiling solvent is a water-white liquid made by acetylation from the secondary amyl alcohols (pentanol-2 and pentanol-3). Although its solvent power is not equal to that of amyl acetate because it has a lower tolerance for diluents, as well as a less desirable odor, it has many similar properties and it is used as a nitrocellulose and ethyl cellulose solvent.

| | |
|--------------------------------------------------------------------------------|------------------------------------------|
| Acidity (as acetic) | 0.03% by wt, max |
| Blush resistance at 90°F (10% $\frac{1}{2}$ sec. R.S. nitrocellulose solution) | Clear 85% Relative humidity Blush 90% |
| Coefficient of Expansion per 1°F per 1°C | 0.00060 0.00108 |
| Color | Water-white |
| Dilution ratio | |
| Toluol | 2.1 |
| Petroleum naphtha | 1.1 |

(continued)

Table 15.13: (continued)

| | |
|------------------------------------------------------|--------------------------|
| Distillation range | |
| Below 123°C | None |
| Below 126°C | Not more than 10% |
| Below 132°C | Not more than 60% |
| Below 140°C | Not less than 90% |
| Above 145°C | None |
| Evaporation rate at 95°F (in minutes) | |
| 5% | 1½ |
| 25% | 7½ |
| 50% | 15½ |
| 75% | 24½ |
| 90% | 30½ |
| 95% | 33½ |
| Flash point | 89° F |
| Non-volatile matter | 0.005 gm per 100 cc, max |
| Residue | None |
| Specific gravity at 20/20°C | 0.862-0.866 |
| Solubility of water in solvent at 25°C | 0.8% by vol |
| Viscosity (10% ½ sec. R.S. nitro-cellulose solution) | 75 centipoises |
| Weight per gal at 20°C | 7.19 lbs |

Table 15.14: Pentacetate (2)


Pentacetate made from synthetic amyl alcohol is a mixture of five isomeric amyl acetates with some free amyl alcohol. It is soluble in methanol, ethyl ether, ethyl acetate, fixed oils, acetone, oleic acid, hot stearic acid, and aromatic and aliphatic hydrocarbons. It is soluble in hot paraffin and carnauba waxes but these congeal on cooling. It is insoluble in water. The solvent power of this mixture being similar to that of amyl acetate, pentacetate finds its most important use in the manufacture of nitrocellulose lacquers. It is also used as an extractant in the production of penicillin. It also finds use in various types of poison bait.

Some of the esters to be found in Pentacetate are:

| | |
|-------------------------------------------------------------------------|----------------------------------------------|
| | B.P. |
| $\text{CH}_3\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{OOCCH}_3$ | 148°C |
| $(\text{CH}_3)_2\text{CHCH}_2\text{CH}_2\text{OOCCH}_3$ | 142°C |
| $\text{CH}_3\text{CH}_2\text{CH}(\text{CH}_3)\text{CH}_2\text{OOCCH}_3$ | 142°C |
| $\text{CH}_3\text{CH}(\text{OOCCH}_3)\text{CH}_2\text{CH}_2\text{CH}_3$ | 134°C |
| $\text{CH}_3\text{CH}_2\text{CH}(\text{OOCCH}_3)\text{CH}_2\text{CH}_3$ | 132°C |
| Acidity (as acetic) | 0.03% by wt max |
| Coefficient of expansion at 10 to 35°C | 0.00110 per °C |
| Color | Water-white |
| Distillation range | |
| 100% | Above 126°C |
| 95% | Above 130°C |
| 75% | Above 135°C |
| 25% | Above 140°C |
| End point | Not above 150°C |
| Dilution ratio | |
| Toluol | 2.1 |
| Petroleum naphtha | 1.3 |
| Evaporation rate at 114.8°F | |
| Minutes 3.92 | 25% |
| Minutes 7.92 | 50% |
| Minutes 12.50 | 75% |
| Minutes 20.00 | 100% |
| Flash point (Open Cup) | 107°F |
| Heat of vaporization | 68.5 cal/gm |
| Non-volatile | 0.005 gm/100 cc max |
| Refractive index at 20°C | 1.4013 |
| Specific gravity at 20/20°C | 0.860-0.870 |
| Solubility in water | 1% by vol |
| Solubility of water in solvent | 1.5% by vol |
| Viscosity at +40°C | 0.683 centipoises |
| -40°C | 3.464 centipoises |
| Water azeotropic mixture at 92-95°C | 67% Pentacetate (approx) 33% water by vol |
| Water content | None |
| Weight per gal | 7.21 lbs |

Table 15.15: Methyl Amyl Acetate (2)

Methyl Isobutyl Carbinol Acetate



Methyl amyl acetate is a colorless liquid with a mild and pleasant odor. This medium boiling solvent is used in nitrocellulose lacquer fabrication producing such advantages as blush resistance, reduction of "orange peel" in the lacquer film, and no swelling of oilbase undercoats.

| | | | |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------------------------------------|
| Acidity (as acetic) | 0.02% by wt, max | Color | Water-white |
| Boiling range at 760 mm | Below 140°C None Above 150°C None Not more than 5% distills below 143°C Not less than 95% distills below 148°C | Dryness | Miscible with 19 vol 60° Bé gasoline at 20°C |
| | | Purity | 95% by wt, max |
| | | Specific gravity at 20/20°C | 0.855 to 0.860 |
| | | Weight per gal at 20°C | 7.14 lbs |

Table 15.16: 2-Ethyl Butyl Acetate (2)

2-Ethyl butyl acetate is a colorless liquid having a mild odor. It is a solvent for nitrocellulose, gums and resins, and is employed as a high-boiling solvent in lacquers.

| | | | |
|---------------------|------------------------|----------------|-------------------------------------------|
| Acidity (as acetic) | 0.01% by wt, max | Boiling range | 155°-164°C |
| Color | Water-white | Purity | 90% min |
| Specific gravity | 0.875 to 0.881 at 20°C | Dryness | Miscible with 19 vols Bé gasoline at 20°C |
| | | Average weight | 7.33 lbs/gal (20°C) |


Table 15.17: 2-Ethylhexyl Acetate (41)

Ethylhexyl acetate is a water-white, stable liquid. It will dissolve nitrocellulose and many of the natural and synthetic resins. It is used in slow-evaporating preparations such as brushing and dipping lacquers, mist coatings, baking finishes and lacquer emulsions.

| | | | |
|--------------------------------------------------------------------|------------|-------------------------------------------------|---------------------|
| Molecular Weight (C ₁₀ H ₂₀ O ₂) | 172.26 | Fire Point, °F (°C) | 187 (86) |
| Color (Pt-Co Scale), max | 15 | Flammable Limits in Air, % by volume | |
| Weight/Vol, 20°C. | | Lower, at 200°F (93°C) | 0.76 |
| lb/gal (U. S.) | 7.26 | Upper, at 300°F (149°C) | 8.14 |
| kg/liter | 0.87 | Autoignition Temperature (ASTM D-2155), °F (°C) | 515 (268) |
| lb/gal (Imperial) | 8.71 | NFPA Classification 30 | IIIA |
| Solubility, 20°C, wt % | | DOT Labels Required | None |
| In water | 0.03 | DOT Classification | Nonhazardous Liquid |
| Water in | 0.55 | Color (Pt-Co Scale), ppm, max | 15 |
| Evaporation Rate (n-butyl acetate = 1) | 0.03 | Specific Gravity, 20°/20°C | 0.870 - 0.875 |
| Dilution Ratio, toluene | 1.4 | Acidity, as acetic acid, wt %, max | 0.02 |
| VM & P naphtha | 0.9 | Boiling Range, 760 mm, °C | |
| Refractive Index, 20°C | 1.4103 | Initial boiling point, min | 192.0 |
| Vapor Pressure, 20°C, mm Hg | 0.4 | Dry point, max | 205.0 |
| Specific Gravity, 20°/20°C | 0.872 | Ester Content, wt %, min | 95.0 |
| Boiling Range, 760 mm, °C | | Water, wt %, max | 0.2 |
| Initial Boiling Point, min | 192.0 | Odor | Mild |
| Dry Point, max | 205.0 | | |
| Freezing Point, °F (°C) | -135 (-93) | | |
| Flash Point, Tag Closed Cup, °F (°C) | 160 (71) | | |
| Tag Open Cup, °F (°C) | 175 (79) | | |

Table 15.18: Cyclohexyl Acetate (2)

Hexalin Acetate
Hexahydrophenyl Acetate
Adronol Acetate



Cyclohexyl acetate is a colorless, water-insoluble liquid with an odor resembling that of amyl acetate. It is miscible in all proportions with most of the lacquer solvents and diluents, with halogenated and hydrogenated hydrocarbons, and will completely dissolve waxed dammar and unrun congo copal. It is a good solvent for cellulose ethers and nitrocellulose and has powerful solvency for basic dyes, blown oils, raw rubber, metallic soaps, driers, shellac, bitumens, and a wide range of natural and synthetic resins and gums. It is used in spraying and brushing lacquers imparting blush resistance and good flow.

(continued)

Table 15.18: (continued)


| | |
|-----------------------------|-------------|
| Boiling range | 160-180°C |
| Color | Water-white |
| Flash point | 64°C |
| Freezing point | -65°C |
| Purity | 88-95% min |
| Residue | None |
| Refractive index | 1.435-1.445 |
| Specific gravity at 20°C | 0.968-0.972 |
| Water | None |
| Viscosity (S.U.V. at 100°F) | 32 |

Table 15.19: Methyl Cyclohexanyl Acetate (2)

Sextate
Methyl Hexalin Acetate
Hexahydroresol Acetate
Hexahydromethylphenol Acetate


Methyl cyclohexanyl acetate is a colorless high-boiling liquid having an ester-like odor. Its miscibility and solvent action are quite similar to those of cyclohexanyl acetate but it is slower acting. It is a solvent for nitrocellulose, basic dyes, rubber, bitumens, oils, fats and waxes, and for such resins as dammar, elemi, manila, mastic, rosin, ester gum, phenolic and vinyl resins. It will dissolve, in a lesser degree, shellac, kauri and cellulose acetate. It is used as a high-boiling solvent in nitrocellulose lacquers for both spraying and brushing purposes. Its solvency and slow rate of evaporation impart resistance to blushing and good working qualities and produce films that are smooth, homogeneous and glossy. Its dilution ratio with various diluents are as follows:

| | |
|------------------|--------------|
| Xylene | 2.5 |
| Toluene | 2.5 |
| Benzene | 2.0 |
| White spirits | 1.5 |
| Acidity | 4.04% (max.) |
| Ester content | 80-90% |
| Boiling range | 175°-190°C. |
| Flash point | 66°-69°C. |
| Specific gravity | 0.95 |

Table 15.20: Ethylene Glycol Monoacetate (2)

Ethylene glycol monoacetate is a colorless, odorless liquid and is structurally a primary alcohol and an ester. It is made by combining a dihydric alcohol and a monocarboxylic acid. It will mix completely with water and many of the lacquer solvents. Ethylene glycol monoacetate will dissolve cellulose esters and ethers and many of the resins.

| | |
|------------------|---------------|
| Boiling point | 181°C. |
| Specific gravity | 1.109 (20°C.) |
| Flash point | 102°C. |

Table 15.21: Ethylene Glycol Diacetate (2)

Glycol diacetate is a colorless liquid having a faint odor resembling that of ethyl acetate. It will dissolve a wide range of cellulose esters, camphor, dammar, ester gum, elemi, mastic, rosin and sandarac. When it is mixed with active solvents its range of solubility is increased for a wide variety of cellulose esters and ethers and for natural and synthetic resins.

(continued)

Table 15.21: (continued)

| | |
|-------------------------------------------------------------------|---------------------|
| Molecular Weight (C ₆ H ₁₀ O ₄) | 146.15 |
| Color (Pt-Co Scale), max | 15 |
| Weight/Vol, 20°C | |
| lb/gal (U.S.) | 9.21 |
| kg/liter | 1.11 |
| lb/gal (Imperial) | 11.04 |
| Solubility, 20°C, wt % | |
| In water | 16.4 |
| Water in | 7.6 |
| Evaporation Rate (n-butyl acetate = 1) | 0.02 |
| Dilution Ratio, toluene | 1.4 |
| Refractive Index, 20°C | 1.4159 |
| Vapor Pressure, 20°C, mm Hg | 0.2 |
| Specific Gravity, 20°/20°C | 1.107 |
| Boiling Range, 760 mm, °C | |
| Initial Boiling Point, min | 187.0 |
| Dry Point, max | 193.0 |
| Freezing Point, °F (°C) | -43 (-42) |
| Flash Point, Tag Closed Cup, °F (°C) | 191 (88) |
| Cleveland Open Cup, °F (°C) | 210 (99) |
| Fire Point, °F (°C) | 210 (99) |
| Flammable Limits in Air, % by volume | |
| Lower, at 275°F (135°C) | 1.6 |
| Upper, at 310°F (154°C) | 8.4 |
| Autoignition Temperature (ASTM D-2155), °F (°C) | 900 (482) |
| NFPA Classification 30: | IIIA |
| DOT Labels Required | None |
| DOT Classification | Nonhazardous Liquid |

Table 15.22: Ethylene Glycol Monomethyl Ether Acetate (19)

Methyl CELLOSOLVE Acetate
ARCOSOLV EMA


Typical Properties

| | |
|-----------------------------------------|----------|
| Formula Molecular Weight | 118.14 |
| Apparent Specific Gravity at 20/20°C | 1.0055 |
| Pounds per Gallon at 20°C | 8.37 |
| Boiling Point at 760 mm Hg, °C | 145.0 |
| Vapor Pressure at 20°C, mm Hg | 2 |
| Freezing Point, °C | -65.1 |
| Absolute Viscosity at 20°C, cP | 1.1 |
| Solubility at 20°C, % by wt | |
| In Water | Complete |
| Water In | Complete |
| Flash Point, Closed Cup, °F* | 121 |
| Relative Evaporation Rate (nBuAc = 100) | 31 |
| Heat of Vaporization, Btu/lb | |
| At 1 Atm | 147 |
| At 300 mm Hg | 156 |

*Determined by Tag Closed Cup, ASTM Method D56.

Table 15.23: Ethylene Glycol Monoethyl Ether Acetate (41)

CELLOSOLVE Acetate
Eastman EE Acetate
ARCOSOLV EEA
Glycol Ether EEA



This is a water-white liquid with a mild, characteristic odor. It is widely used as a solvent in nitrocellulose lacquers where it imparts gloss, flow, and prevents blush.


(continued)

Table 15.23: (continued)

| | | Typical Properties | |
|-------------------------------------------------------------------|--------|-------------------------------------------------|--------------------|
| Molecular Weight (C ₈ H ₁₆ O ₂) | 132.16 | Boiling Range at 760 mm, °C | 150 |
| Color (Pt-Co Scale), max | 15 | Initial Boiling Point, min | 160 |
| Weight/Vol at 20°C, | | Dry Point, max | 160 |
| lb/gal (U.S.) | 8.11 | Freezing Point, °F (°C) | -78 (-61) |
| kg/L | 0.98 | Flash Point, Tag Closed Cup, °F (°C) | 130 (54) |
| lb/gal (Imperial) | 9.73 | Tag Open Cup, °F (°C) | 139 (59) |
| Solubility at 20°C, wt % | | Fire Point, °F (°C) | 144 (62) |
| In water | 23.8 | Flammable Limits in Air, % by volume | |
| Water in | 6.5 | Lower, at 200°F (93°C) | 1.24 |
| Evaporation Rate (n-butyl acetate = 1) | 0.2 | Upper, at 275°F (135°C) | 12.7 |
| Dilution Ratio, toluene | 2.5 | Autoignition Temperature (ASTM D 2155), °F (°C) | 720 (382) |
| VM & P naphtha | 0.9 | NFPA Classification 30 | II |
| Refractive Index at 20°C | 1.4030 | DOT Classification | Combustible Liquid |
| Vapor Pressure at 20°C, mm Hg | 1.7 | DOT Labels Required | None |
| Specific Gravity at 20/20°C | 0.973 | | |

Table 15.24: Ethylene Glycol Monobutyl Ether Acetate (41)

Butyl CELLOSOLVE Acetate
 SOLV EB Acetate
 Eastman EB Acetate
 Glycol Ether EB Acetate
 ARCOSOLV EBA
 Glycol Ether EBA




This is a high boiling glycol ether ester solvent particularly useful as a coalescing aid for latex paint. With its limited water solubility and its general solvent properties, it is found useful in multicolor lacquers and lacquer emulsions.

| Typical Properties | |
|-------------------------------------------------------------------|--------------------|
| Molecular Weight (C ₈ H ₁₆ O ₃) | 160.21 |
| Color (Pt-Co Scale), max | 15 |
| Evaporation Rate (n-butyl acetate = 1) | 0.03 |
| Weight/Vol, 20°C, | |
| lb/gal (U. S.) | 7.84 |
| kg/litre | 0.94 |
| lb/gal (Imperial) | 9.42 |
| Solubility, 20°C, wt % | |
| In water | 1.1 |
| Water in | 1.6 |
| Dilution Ratio, toluene | 1.8 |
| VM & P naphtha | 1.2 |
| Refractive Index, 20°C | 1.4200 |
| Vapor Pressure, 20°C, mm Hg | 0.29 |
| Specific Gravity, 20°/20°C | 0.942 |
| Boiling Range, 760 mm, °C | |
| Initial Boiling Point, min | 186 |
| Dry Point, max | 194 |
| Freezing Point, °F (°C) | -83 (-64) |
| Flash Point, Tag Closed Cup, °F (°C) | 160 (71) |
| Tag Open Cup, °F (°C) | 177 (81) |
| Fire Point, °F (°C) | 180 (82) |
| Flammable Limits in Air, % by volume | |
| Lower, at 200°F (93°C) | 0.88 |
| Upper, at 275°F (135°C) | 8.54 |
| Autoignition Temperature (ASTM D-2155), °F (°C) | 645 (340) |
| NFPA Classification 30 | IIIA |
| DOT Classification | Combustible Liquid |
| DOT Labels Required | None |

Table 15.25: Diethylene Glycol Monoethyl Ether Acetate (41)

SOLV DE Acetate
 Eastman DE Acetate
 Glycol Ether DE Acetate
 ARCOSOLV DEA




This is primarily used as a coalescing aid in latex paints. Both its solvency and slow evaporation rate are effective in producing slow drying characteristic brushing lacquers.

Typical Properties

| | |
|-----------------------------------------------------|---------------------|
| Molecular Weight (C ₈ H ₁₈ O) | 176.21 |
| Color (Pt-Co Scale), max | 15 |
| Evaporation Rate (n-butyl acetate = 1) | < 0.01 |
| Weight/Vol, 20°C, | |
| lb/gal (U. S.) | 8.41 |
| kg/litre | 1.01 |
| lb/gal (Imperial) | 10.09 |
| Solubility, 20°C, wt % | |
| In water | Complete |
| Water in | Complete |
| Dilution Ratio, toluene | 2.2 |
| VM & P naphtha | 0.6 |
| Refractive Index, 20°C | 1.4230 |
| Vapor Pressure, 20°C, mm Hg | 0.05 |
| Specific Gravity, 20°/20°C | 1.011 |
| Boiling Range, 760 mm, °C | |
| Initial Boiling Point, min | 214 |
| Dry Point, max | 221 |
| Freezing Point, °F (°C) | -13 (-25) |
| Flash Point, Cleveland Open Cup, °F (°C) | 225 (107) |
| Fire Point, °F (°C) | 230 (110) |
| Flammable Limits in Air, % by volume | |
| Lower, at 275°F (135°C) | 0.98 |
| Upper, at 365°F (185°C) | 19.4 |
| Autoignition Temperature (ASTM D-2155), °F (°C) | 680 (360) |
| NFPA Classification 30 | IIIB |
| DOT Classification | Nonhazardous Liquid |
| DOT Labels Required | None |

Table 15.26: Diethylene Glycol Monobutyl Ether Acetate (41)

SOLV DB Acetate
 Eastman DB Acetate
 ARCOSOLV DBA
 Glycol Ether DBA



This very high-boiling glycol ester is used primarily as a solvent in printing inks and high-bake enamels, and as a coalescing aid in latex paints. The very slow evaporation rate and the limited water solubility of this solvent are especially applicable in silk screen inks and as a component in polystyrene coatings for decals. Also it is a selective solvent in the separation of alcohols and ketones by distillation.

| | | | |
|----------------------------------------|--------|------------------------------------|-------------|
| Molecular Weight (theoretical) | 204.27 | Solubility, 20°C, wt %, | |
| Weight/Vol, 20°C, lb/gal (U. S.) | 8.16 | In water | 6.5 |
| kg/liter | 0.98 | Water in | 3.7 |
| lb/gal (Imperial) | 9.79 | Color (Pt-Co Scale), ppm, max | 15 |
| Evaporation Rate (n-butyl acetate = 1) | < 0.01 | Acidity, as acetic acid, wt %, max | 0.03 |
| Dilution Ratio, toluene | 1.8 | Boiling Range, 760 mm, °C | |
| VM & P naphtha | 0.9 | Initial boiling point, min | 235.0 |
| Flash Point (Cleveland open cup), °F | 240 | Dry point, max | 250.0 |
| °C | 116 | Specific Gravity, 20°/20°C | 0.975-0.985 |
| Freezing Point, °F | -26 | Ester Content, wt %, min | 97.0 |
| °C | -32 | Water, wt %, max | 0.2 |
| Vapor Pressure, 20°C, mm Hg | 0.04 | | |

Table 15.27: Propylene Glycol Monomethyl Ether Acetate (41)

ARCOSOLV PM Acetate
DOWANOL PMA
Methyl PROPASOL Acetate

Eastman PM Acetate
Glycol Ether PM Acetate
ARCOSOLV PMA

Typical Properties

| | |
|-------------------------------------------------------------------|--------------------|
| Molecular Weight (C ₅ H ₁₀ O ₃) | 132.2 |
| Color (Pt-Co Scale) | 15 |
| Evaporation Rate (n-butyl acetate = 1) | 0.39 |
| Weight/Vol at 20° C, | |
| lb/gal (U.S.) | 8.06 |
| kg/L | 0.97 |
| lb/gal (Imperial) | 9.68 |
| Solubility at 20° C, wt % | |
| In water | 20 |
| Water in | 5.9 |
| Dilution Ratio, | |
| Toluene | 2.6 |
| VM & P naphtha | 0.8 |
| Refractive Index at 20° C | 1.40 |
| Vapor Pressure at 20° C, mm Hg | 3.7 |
| Specific Gravity at 20°/20° C | 0.97 |
| Boiling Range at 760 mm, ° C | |
| Initial Boiling Point, min. | 140 |
| Dry Point, max. | 150 |
| Flash Point by Setflash, ° C (° F) | 45 (114) |
| Flammable Limits in Air, % by volume | |
| Lower at 76° C (173° F) | 1.3 |
| Upper at 139° C (283° F) | 13.1 |
| Autoignition Temperature (ASTM D 2155), ° C (° F) | 354 (670) |
| DOT Classification | Combustible Liquid |
| DOT Labels Required | None |

Table 15.28: Propylene Glycol Monoethyl Ether Acetate (70)

ARCOSOLV PEA

| ACETATES | ARCO TRADENAME | CHEMICAL NAME | CHEMICAL STRUCTURE | CAS# | MOL. WT. | BOILING PT. °C 760mm | SPECIFIC GRAVITY 20/20 | LBS/GAL 20° C | BETA FLASH °F | EVAPORATION RATE (n-BuAc=100) |
|----------|----------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|------------|----------|----------------------|------------------------|---------------|------------------------------------|-------------------------------|
| | | | | | | | | | | |
| E-Series | PMA | Propylene Glycol Methyl Ether Acetate | CH ₃ OCH ₂ CHCH ₃ OOCC ₃ H ₇ | 108-65-6 | 132.2 | 145.8 | 0.969 | 8.03 | 114 | 34 |
| | PEA | Propylene Glycol Ethyl Ether Acetate | CH ₃ CH ₂ OCH ₂ CHCH ₃ OOCC ₃ H ₇ | 98516-30-4 | 146.2 | 158 | 0.941 | 7.83 | 129 | 19 |
| | DPMA | Dipropylene Glycol Methyl Ether Acetate | CH ₃ (OCH ₂ CHCH ₃) ₂ OOCC ₃ H ₇ | 88917-22-0 | 190.2 | 209.3 | 0.976 | 8.18 | 186 | <1 |
| | EMA | Ethylene Glycol Methyl Ether Acetate | CH ₂ OC ₂ H ₄ OOCC ₃ H ₇ | 110-49-6 | 118.14 | 145 | 1.006 | 8.37 | 120 TCC ² | 35 |
| | EEA | Ethylene Glycol Ethyl Ether Acetate | C ₂ H ₅ OC ₂ H ₄ OOCC ₃ H ₇ | 111-15-9 | 132.16 | 150 | 0.973 | 8.11 | 130 TCC ² | 20 |
| E-Series | EBA | Ethylene Glycol Butyl Ether Acetate | C ₄ H ₉ OC ₂ H ₄ OOCC ₃ H ₇ | 112-07-2 | 160.21 | 186 | 0.941 | 7.84 | 160 TCC ² | 3 |
| | DEA | Diethylene Glycol Ethyl Ether Acetate | C ₂ H ₅ (OC ₂ H ₄) ₂ OOCC ₃ H ₇ | 112-15-2 | 176.21 | 214 | 1.012 | 8.42 | 225 C ³ OC ³ | 0.8 |
| | DBA | Diethylene Glycol Butyl Ether Acetate | C ₄ H ₉ (OC ₂ H ₄) ₂ OOCC ₃ H ₇ | 124-17-4 | 204.27 | 235 | 0.980 | 8.16 | 240 C ³ OC ³ | 0.2 |

| ACETATES | ARCO TRADENAME | % SOL. IN H ₂ O 20° C | REF. INDEX 25° C | SURF. TENSION DYNES/CM 25° C | VAPOR PRESS mmHg 25° C | Visc. cps. 25° C | HANSEN SOLUBILITY PARAMETERS | | | | HEAT OF VAPORIZ. CAL/g 25° C | SPECIFIC HEAT Cal/g °C 25° C | H B DAVIES |
|----------|----------------|----------------------------------|------------------|------------------------------|------------------------|------------------|------------------------------|--------------|--------------|------------------|------------------------------|------------------------------|------------|
| | | | | | | | CSB HANSEN D | CSB HANSEN F | CSB HANSEN H | CSB TOTAL HANSEN | | | |
| E-Series | 34 | 18 | 1.400 | 27.4 | 3.8 | 1.1 | 7.5 | 2.3 | 4.2 | 8.9 | 87.0 | 0.42 | 8.3 |
| | 19 | 10 | 1.401 | 26.3 | 1.5 | 1.3 | 7.5 | 2.0 | 3.9 | 8.7 | 69.0 | 0.44 | 7.9 |
| | <1 | 12 | 1.414 | 28.3 | 0.05 | 2.1 | 7.3 | 2.3 | 3.9 | 8.6 | 59.1 | 0.42 | 8.2 |
| | 35 | 100 | 1.4025 | 34.0 | 2 | 1.1 | 7.2 | 4.8 | 4.4 | 9.9 | 81.7 | | 8.8 |
| | 20 | 24 | 1.4030 | 28.2 | 1.7 | 1.3 | 7.8 | 2.3 | 5.2 | 9.7 | | | 8.3 |
| | 3 | 1 | 1.4142 | 30.3 | 0.29 | 1.8 | 7.5 | 2.2 | 4.3 | 8.9 | | | 7.4 |
| | 0.8 | 100 | 1.4220 | 31.7 | 0.05 | 2.8 | 7.9 | 2.5 | 4.5 | 9.4 | | | 8.7 |
| | 0.2 | 6 | 1.4239 | 30.0 | 0.04 | 3.2 | 7.8 | 2.0 | 4.0 | 9.0 | | | 7.7 |

(continued)

Table 15.28: (continued)

| | | Regulatory Information | | | | | | 1990 CAAA HAP ¹ | 8/16 TITLE III SEC. 313 ² | |
|----------|-------------------|------------------------|--------|--------|-------------|--------|--------|----------------------------|--------------------------------------|-----|
| | | HMIS CODES | | | NFPA CODES | | | | | |
| | | HEALTH | FLAMM. | REACT. | PERB. PROT. | HEALTH | FLAMM. | REACT. | | |
| ACETATES | ARCOSOLV P-Series | 2 | 2 | 0 | B | 0 | 2 | 0 | no | |
| | | 2 | 2 | 0 | X | 1 | 2 | 0 | no | |
| | | 1 | 2 | 0 | B | 0 | 2 | 0 | no | |
| | E-Series | | | | | 1 | 2 | | yes | yes |
| | | | | | | 1 | 2 | | yes | yes |
| | | | | | | 1 | 2 | 0 | yes | yes |
| | | | | | 1 | 1 | 0 | yes | yes | |
| | | | | 1 | 1 | 0 | yes | yes | | |

Table 15.29: Dipropylene Glycol Monomethyl Ether Acetate (DPMA) (70)

ARCOSOLV DPMA
DOWANOL DPMA

Glycol Ether DPM Acetate

| ARCO Chemical Company Nomenclature | Chemical Name | Molecular Weight | Boiling Point °C (760 mm Hg) | Flash Point °F | Specific Gravity at 25 °C | Evaporation Rate BuAc 100 | Vapor Pressure at 25 °C mm Hg | Lbs/Gal at 25 °C |
|------------------------------------|------------------------------------------------|------------------|------------------------------|----------------|---------------------------|---------------------------|-------------------------------|------------------|
| ARCOSOLV* DPM Acetate | Dipropylene Glycol Methyl Ether Acetate (DPMA) | 190.2 | 210 | 186 | .972 | <1 | 0.2 | 8.14 |

| ARCO Chemical Company Nomenclature | Viscosity (centistokes) at 25 °C | Surface Tension (dynes/cm) at 25 °C | Freeze Point °F | Solubility Parameter ³ | Solubility in Water ml/100 ml | Union Carbide | Eastman |
|------------------------------------|----------------------------------|-------------------------------------|-----------------|-----------------------------------|-------------------------------|---------------|---------|
| ARCOSOLV* DPM Acetate | 2.2 | 28.3 | <-67 | 8.3 | 12.3 | - | - |

1. Values should not be regarded as specifications, maxima or minima.
2. Flash points below 200°F by Tag Closed Cup. Flash points above 200° by Pensky-Martens Closed Cup.
3. For a discussion of solubility parameters, see H. Burrell, Interchemical Review, Vol. 14, No. 1.


Table 15.30: Propylene-Based Glycol Ether Acetate (23)

DOWANOL BC-300


| DOWANOL | CHEMICAL NAME | STRUCTURAL FORMULA | Molecular Weight | Boiling Pt. °C 760 mm Hg | Flash Point °F | Evap. Rate BuAc = 1.00 | Specific Gravity 25/25°C |
|---------|--------------------------------------|--------------------|------------------|--------------------------|------------------|------------------------|--------------------------|
| BC-300 | Propylene-Based Glycol Ether Acetate | | — | 145.0-210.0 | 108 ³ | 0.21 | 0.97 |

| Lb/Gal 25°C | Viscosity Centi-stokes 25°C | Vapor Pressure at 25°C (mm Hg) | Surface Tension (dynes/cm) | DILUTION RATIO | | SOLVENT CONSTANTS | | | |
|-------------|-----------------------------|--------------------------------|----------------------------|----------------|---------|------------------------------------|-------------------------------|-----------------------|-------------------------------|
| | | | | Toluene | Naphtha | Solubility Parameters ¹ | Hydrogen Bonding ² | Dipole Moment (Debye) | Solubility in Water ml/100 ml |
| 8.09 | 1.28 | ~3.7 | 27.9 | 2.4 | 0.5 | 9.1 | 9.6 | 1.8 | 20.3 |

¹ Solubility Parameters are useful as a guide in determining the ability of a solvent or solvent mixture to dissolve resins. A discussion of solubility parameters and the basis for these values are contained in an article by H. S. Burrell in the Spring 1955 issue of *Interchemical Review*.
² A discussion of the hydrogen bonding parameter is contained in an article by Allen A. Orr in the August 1975 issue of *Journal of Paint Technology*, Vol. 47, No. 607, pages 45-49. This particular article was the basis of the listed values of the hydrogen bonding parameter.

PROPIONATES

The propionic esters are very similar to the acetic esters in physical and chemical properties with the difference that the former have a higher boiling point, lower evaporation rate and a lesser power of solubility. They are miscible with many of the lacquer solvents and diluents and possess a distinctive but not a disagreeable odor. The consumption of these esters for solvent purposes is relatively small compared to the highly developed acetate esters.

Table 15.31: Methyl Propionate (2)

Methyl propionate has been advocated as a solvent for cellulose derivatives. When it is admixed with other propionates (such as ethyl, propyl, butyl and amyl) the mixture will dissolve cellulose ethers and esters.

| | |
|------------------|--------------|
| Boiling point | 91°C. |
| Specific gravity | 0.937 (4°C.) |


Table 15.32: Ethyl Propionate (2)

Propionic Ether
Propionic Ester




Ethyl propionate is a colorless liquid with an odor resembling that of pineapples. It is a solvent for cellulose ethers and esters and for a variety of natural and synthetic resins. It is used principally as an ingredient in soft drinks and fruit syrups.

| | | | |
|------------------------|---------------------------------------|---------------------------|---------------------------|
| Acidity (as propionic) | 0.02% by wt, max | Evaporation rate | Slower than ethyl acetate |
| Distillation range | 90 to 100% between 80 and 120°C | Purity | 85 to 90% |
| Color | Water-white | Residue | None |
| Toluene dilution ratio | 2.5-3.0 | Specific gravity at 15½°C | 0.876-0.886 |
| Dryness | No turbidity with 19 volumes gasoline | Weight per gal | 7.35 lbs |

Table 15.33: n-Butyl Propionate (2)

n-Butyl propionate is a water-white liquid with an apple-like odor. It is miscible with most of the lacquer solvents and diluents and with oils but not miscible with water. It is a solvent for nitrocellulose and many of the natural and synthetic resins. When an active solvent is added to it, butyl propionate will dissolve many of the cellulose esters and ethers. It may be used as a solvent in lacquer fabrication where it imparts gloss, adhesion and prevents blushing. It is also used to replace butyl and amyl acetate when lower volatility and slower evaporation are desired.

| | | | |
|--------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------|----------------------|
| Acidity (as propionic) | 0.35% by wt, max | Evaporation rate at 95°F (in minutes) | |
| Blush resistance at 90°F (10% ½ sec. R.S. nitrocellulose solution) | Clear 85% Relative humidity Blush 90% | 5% | 2½ |
| | | 25% | 12 |
| | | 50% | 24½ |
| | | 75% | 41½ |
| | | 90% | 56½ |
| | | 95% | 63½ |
| Distillation range | 120-175°C | Flash point | 63°F |
| Coefficient of expansion per 1°F | 0.00060 | Non-volatile matter | 0.005 gm/100 cc, max |
| per 1°C | 0.001 | Purity | 90-92% |
| Color | Water-white | Residue | None |
| Dilution ratio | | Solubility of water in solvent at 25°C | 1.2% by vol |
| Toluol | 2.1 | Specific gravity at 20/20°C | 0.868-0.872 |
| Petroleum naphtha | 1.2 | Viscosity (10% ½ sec. R.S. nitrocellulose solution) | 5.9 centipoises |
| Distillation range: | | Weight per gal at 20°C | 7.24 lbs |
| Below 120°C | None | | |
| Below 140°C | Not more than 50% | | |
| Below 150°C | Not less than 85% | | |
| Above 160°C | None | | |
| Dryness at 20°C | Miscible without turbidity with 20 volumes 60° Bé gasoline | | |

Table 15.34: Amyl Propionate (2)

Amyl propionate is a colorless, volatile liquid with an apple-like odor. It will dissolve cumar resins, elemi, ester gum, mastic, copal, kauri, sandarac, and nitrocellulose and it is miscible with most lacquer solvents and oils. It has a slow solvent action upon cellulose ethers thus acting as a latent solvent and this latency can be overcome when acetone or ethyl alcohol is added to it. It has similar solvent properties to amyl acetate but is not as rapid and its solutions are more viscous, it has a slower rate of evaporation, and it has a more agreeable odor. It is used as a desirable high-boiling lacquer solvent imparting gloss, blush resistance and a reduction in "orange peel" effect. It is also used in flavoring and perfumery.


| | |
|----------------------------------------------------------------------------|------------------------------------------|
| Acidity (as propionic) | 0.030% by wt, max |
| Blush resistance at 90°F (10% ‡ sec. R.S. nitrocellulose so- lution) | Clear 90% Relative humidity Blush 95% |
| Coefficient of expansion per 1°F | 0.00060 |
| per 1°C | 0.00108 |
| Color | Water-white |
| Dilution ratio | |
| Toluol | 1.4 |
| Petroleum naphtha | 0.7 |
| Distillation range: | |
| At or below 110°C | None |
| At or below 150°C | Not more than 40% |
| At or below 170°C | Not less than 90% |
| Above 175° C | None |
| Non-volatile matter | Not more than 0.006 gms per 100 cc |
| Residue | None |
| Solubility of water in solvent at 25°C | 0.3% by vol |
| Specific gravity at 20/20°C | 0.869-0.873 |
| Viscosity (10% ‡ sec. R.S. ni- trocellulose solution) | 106 centipoises |
| Weight per gal at 20°C | 7.25 lbs |

Table 15.35: Ethyl 3-Ethoxypropionate (19)

| Typical Properties | |
|----------------------------------------------|--------|
| Molecular Weight | 146.19 |
| Boiling Point at 760 mm Hg, °C | 170.1 |
| Vapor Pressure at 20°C, mm Hg | <1 |
| Relative Evaporation Rate (BuAc = 100) | 11 |
| Apparent Specific Gravity at 20/20°C | 0.950 |
| Solubility Parameters | |
| Total | 9.0 |
| Polar | 4.1 |
| Hydrogen Bonding | 4.0 |
| Solubility of Pure Material at 20°C, % by wt | |
| In water | 1.6 |
| Water In | 1.9 |
| Pounds per Gallon at 20°C | 7.91 |
| Flash Point, Closed Cup, °F | 136 |
| Surface Tension at 25°C, dynes/cm | 27.3 |


BUTYRATES

Butyrates do not find extensive use in the solvent industry because of their relatively unpleasant odor and higher price.

Table 15.36: Methyl Butyrate (2)


Methyl butyrate is a solvent for ethyl cellulose and when it is mixed with active solvents it will dissolve nitrocellulose.

| | |
|------------------|---------------|
| Boiling point | 102°C. |
| Specific gravity | 0.898 (20°C.) |

Table 15.37: Ethyl Butyrate (2)

Ethyl butyrate is a nontoxic liquid having an odor suggestive of pineapples. Its solvent properties lie between those of ethyl acetate and *n*-butyl acetate, and when mixed with other solvents it will dissolve cellulose esters and ethers, and many of the natural and synthetic resins. It is used in flavors.

| | |
|------------------|---------------|
| Boiling point | 120°C. |
| Flash point | 23°C. |
| Specific gravity | 0.879 (20°C.) |


Table 15.38: *n*-Butyl Butyrate (2)

Butyl butyrate is a water-white, neutral liquid with an apple-like odor. The commercial grade is composed of a mixture of the isomeric esters. It is a solvent for nitrocellulose, "Cumar" resins, dammar, ester gum, elemi, shellac, and metallic resinates.

| | |
|-----------------------------|----------------------------------------------------------------|
| Acidity (as butyric) | 0.02% by wt, max |
| Boiling point | 156.9° C |
| Distillation range | 95-100% between 140-170°C |
| Critical temperature | 338°C |
| Toluene dilution ratio | 1.8-2.0 |
| Dryness | No turbidity with 19 vol 60° Bé gasoline |
| | Complete, standing at least 19 vols gasoline without turbidity |
| Flash point | 51°C |
| Purity | 90-95% |
| Refractive index | 1.4035 |
| Residue | None |
| Specific gravity at 20/20°C | 0.8717 |
| Specific heat at 20°C | 0.458 |
| Surface tension at 157°C | 12.0 |
| Vapor pressure at 20°C | 113 mm Hg |
| Viscosity at 25°C | 0.84 centipoises |
| Weight per gal | 7.25 lbs |

Table 15.39: Ethyl Hydroxy-Isobutyrate (2)


Ethyl Oxybutyrate



Ethyl hydroxy-isobutyrate is a water-white, stable liquid of a mild odor. It is a solvent for cellulose nitrate and acetate and when mixed with other solvents it will also dissolve cellulose ethers. Its solvent action is somewhat comparable with that of ethyl lactate, differing in the following aspects:

- Its solvent action is slower and requires the presence of an active solvent to accentuate it.
- Its solutions of nitrocellulose are more viscous.
- Its tolerance for hydrocarbons is about the same as far as it concerns nitrocellulose and is lower in the presence of acetyl cellulose.
- Its volatility is higher.

| | |
|------------------|---------------------|
| Ester content | 96-100% |
| Boiling range | 142°-146°C. |
| Specific gravity | 0.978-0.986 (20°C.) |

Table 15.40: Isobutyl Isobutyrate (41)

Isobutyl isobutyrate is a slow evaporating solvent with blush resistance, good flow and leveling which are favorable properties in formulating cellulose nitrate. Its solvent activity is equivalent to methyl amyl acetate and is therefore used as a direct substitute in many formulations.

| | | | |
|-------------------------------------------------------------------|--------|-------------------------------------------------|---------------------|
| Molecular Weight (C ₈ H ₁₆ O ₂) | 144.22 | Boiling Range, 760 mm, °C | |
| Color (Pt-Co Scale), max | 15 | Initial Boiling Point, min | 144 |
| Weight/Vol, 20°C, | | Dry Point, max | 151 |
| lb/gal (U.S.) | 7.13 | Freezing Point, °F (°C) | -112 (-80) |
| kg/liter | 0.86 | Flash Point, Tag Closed Cup, °F (°C) | 101 (38) |
| lb/gal (Imperial) | 8.56 | Tag Open Cup, °F (°C) | 111 (44) |
| Solubility, 20°C, wt % | | Fire Point, °F (°C) | 115 (46) |
| In water | <0.1 | Flammable Limits in Air, % by volume | |
| Water in | <0.2 | Lower, at 200°F (93°C) | 0.96 |
| Evaporation Rate (n-butyl acetate = 1) | 0.4 | Upper, at 200°F (93°C) | 7.59 |
| Dilution Ratio, toluene | 1.5 | Autoignition Temperature (ASTM D-2155), °F (°C) | 810 (432) |
| VM & P naphtha | 0.8 | NFPA Classification 30: | II |
| Refractive Index, 20°C | 1.3913 | DOT Labels Required | None |
| Vapor Pressure, 20°C, mm Hg | 3.2 | DOT Classification | Nonhazardous Liquid |
| Specific Gravity, 20°/20°C | 0.855 | | |

Table 15.41: 2,2,4-Trimethylpentanediol-1,3-Monoisobutyrate (41)

| | Evaporation Rate | Lb/ Gal @ 20°C | Color Pt-Co Max | Specific Gravity @ 20°/20°C | Acidity, as Acetic Acid Max Wt % | Boiling Range °C | Freezing Point °C | Flash Point COC (°F) | Fire Point °C (°F) |
|--------------------------------------------------------------------------|------------------|----------------|-----------------|-----------------------------|----------------------------------|------------------|-------------------|----------------------|--------------------|
| TEXANOL® Ester Alcohol (2,2,4-Trimethyl-1,3-pentanediol Monoisobutyrate) | 0.002 | 7.90 | 20 | 0.950 | 0.2 | 244-247 | -50 | 120 (248) | 132 (270) |
| C ₁₂ H ₂₄ O ₃ | | | | | (isobutyric) | | | | |

COMPARATIVE DATA

Table 15.42: ARCOSOLV PM Acetate and ARCOSOLV PE Acetate (70)

ARCOSOLV PMA is a colorless, combustible liquid with low toxicity. It has a characteristic ester odor and is soluble in water to the extent of 18% at 20°C. It has excellent solvency for a variety of substances including acrylic, nitrocellulose and urethane coating resins. ARCOSOLV PMA is a substitute for ethylene glycol (E-series) ether acetates, particularly EEA and EMA.

Product Identification

Chemical Name.....1-Methoxy-2-Propanol Acetate
 Chemical FamilyPropylene Glycol Ether Acetate
 Other NamesMethoxy Propanol Acetate
Propylene Glycol Methyl Ether Acetate
1-Methoxy Propanol Acetate
 Chemical FormulaC₆H₁₂O₃

Product Specifications¹

| Property | Specification | Test Method |
|--------------------------------------------------|----------------|-------------|
| Specific Gravity @ 25/25°C | 0.963 – 0.966 | ASTM D-891 |
| Distillation @ 760mm Hg IBP, min. DP, max. | 140°C 150°C | ASTM D-1078 |
| Acidity, wt. % as acetic acid, max. | 0.02 | ASTM D-1613 |
| Water, wt. %, max. | 0.05 | ASTM E-203 |
| Color, APHA, max. | 10 | ASTM E-1209 |
| GC Purity, wt. %, min. | 99.0 | ACC 8314 |

¹ 50-75 ppm BHT is added to control peroxides.

Typical Properties

- * Autoignition temperature (°F)522
- * Density (pounds per gallon at 25°C)8.0
- * Evaporation Rate (BuAc = 100).....34
- * Flammability Limits (Lower/Upper Vol. %)1.5/10
- * Flash Point (Tag Closed Cup) °C (°F).....47 (116)
- * Solubility by weight in water at 20°C18
- * Solubility by weight of water in at 20°C6
- * Solubility Parameter (Total Hansen)9.2
- * Surface Tension (Dynes/cm) @ 25°C (77°F)27
- Refractive Index @ 25°C (77°F).....1.40
- * Viscosity (centistokes) @ 25°C (77°F)1.1
- * Vapor Pressure @ 25°C (mm Hg).....3.8

(continued)

Table 15.42: (continued)

ARCOSOLV PEA is a colorless, liquid with a low order of toxicity. It has a mild, ether-like odor. It is slightly soluble in water but miscible with a number of organic solvents and has good solvency for a number of substances.

Product Identification

CHEMICAL NAME

■ Ethoxy Propanol Acetate

OTHER NAMES

■ Propylene Glycol Monoethyl Ether Acetate

CHEMICAL FAMILY

■ Propylene Glycol Ether Acetate

CHEMICAL FORMULA

■ $C_7H_{14}O_3$

Product Specifications

| Property | Specifications | Test Method |
|-------------------------------------|----------------------------|-------------|
| Specific Gravity @ 20/20°C | 0.942 – 0.948 ¹ | ASTM D-891 |
| Distillation @ 760mm Hg | | |
| IBP, Initial Boiling Point, min. | 148°C | ASTM D-1078 |
| DP, Dry Point, max. | 168°C | |
| Acidity, wt. % as acetic acid, max. | 0.02 | ASTM D-1613 |
| Water, wt. %, max. | 0.05 | ASTM E-203 |
| Color, APHA, max. | 15 | ASTM D-1209 |

¹ Equivalent specific gravity range at 25°/25°C is 0.934 – 0.940

Typical Properties

| | |
|----------------------------------------------|-----------|
| ■ Boiling Point °C (°F)..... | 158 (316) |
| ■ Density (pounds per gallon at 20°C)..... | 7.5 |
| ■ Evaporation Rate (nBuAc = 1)..... | 0.19 |
| ■ Flash Point (SETA) °C (°F)..... | 54 (129) |
| ■ Formula Molecular Weight..... | 146 |
| ■ Refractive Index @ 25°C..... | 1.40 |
| ■ Solubility by weight in water..... | 10% |
| ■ Viscosity (centistokes) @ 20°C (68°F)..... | 1.3 |
| ■ Vapor Pressure @ 20°C (68°F) (mm Hg)..... | 1.5 |

Table 15.43: Ashland Ester Solvents (69)

| PRODUCT | LB./GAL. | SP. GR. | BOILING RANGE | | FL. PT. | EVAP. |
|--------------------------|----------|-----------|---------------|---------|------------------|-------------------|
| | 20° C | 20°/20° C | °C | °F | °F TCC | RATE ¹ |
| Ethyl Acetate 99% | 7.51 | 0.902 | 75.5-78.0 | 168-172 | 24 | 4.1 |
| Isopropyl Acetate 99% | 7.27 | 0.872 | 85-90 | 185-194 | 42 | 3.0 |
| n-Propyl Acetate | 7.39 | 0.888 | 99-103 | 210-217 | 55 | 2.3 |
| Ethyl Propionate | 7.42 | 0.892 | 99- | 210- | 61 | 3.1 |
| Isobutyl Acetate | 7.25 | 0.870 | 112-119 | 234-246 | 63 | 1.6 |
| n-Butyl Acetate 99% | 7.35 | 0.882 | 120-128 | 248-262 | 81 | 1.0 |
| Glycol Ether PM Acetate | 8.06 | 0.970 | 140-150 | 284-302 | 114 | 0.4 |
| Amyl Acetate (primary) | 7.29 | 0.876 | 142-152 | 288-306 | 101 | 0.49 |
| Isobutyl Isobutyrate | 7.13 | 0.855 | 144-151 | 291-304 | 104 | 0.45 |
| n-Butyl Propionate | 7.29 | 0.876 | 145- | 292- | 97 | 0.45 |
| Ester Solvent EEP | 7.91 | 0.950 | 165-172 | 329-342 | 136 | 0.12 |
| n-Pentyl Propionate | 7.27 | 0.872 | 168- | 334- | 138 | 0.18 |
| Glycol Ether EB Acetate | 7.84 | 0.942 | 186-194 | 367-381 | 165 | 0.03 |
| 2-Ethylhexyl Acetate | 7.26 | 0.872 | 192-205 | 378-401 | 160 | 0.03 |
| Glycol Ether DPM Acetate | 8.12 | 0.976 | 193-205 | 379-401 | 186 | <0.01 |
| Dibasic Ester | 9.10 | 1.092 | 196-212 | 385-414 | 212 ^g | <0.01 |
| Glycol Ether DE Acetate | 8.41 | 1.011 | 214-221 | 417-430 | 225 ^g | <0.01 |
| Glycol Ether DB Acetate | 8.16 | 0.980 | 235-250 | 455-482 | 221 ^g | <0.01 |

¹n-Butyl Acetate = 1 ^gPMCC

Table 15.44: Chemcentral Esters (67)

| ESTERS | CAS | Mole Weight | % Purity Comm. Prod. | Spec. Grav. @ 20/20°C | Lbs./Gal. @ 20°C | Coeff. of Expan. Per °C | Δ Sp. Gr Per °C | Refractive Index @ 20°C | Distillation Range @ 760 mm Hg | | Vapor Press. @ 20°C mm Hg |
|---------------------------------|----------|-------------|----------------------|-----------------------|------------------|-------------------------|-----------------|-------------------------|--------------------------------|---------|---------------------------|
| | | | | | | | | | °C | °F | |
| AMYL ACETATE (Primary) | 628-63-7 | 130.18 | 95 | 0.876 | 7.29 | 0.00115 | 0.0080 | 1.4018 | 104-150 | 284-302 | 4.0 |
| iso-BUTYL ACETATE | 110-19-0 | 116.16 | 90 | 0.868 | 7.26 | 0.00137 | 0.0098 | 1.3892 | 112-119 | 233-246 | 12.5 |
| n-BUTYL ACETATE | 123-86-4 | 116.16 | 98 | 0.882 | 7.35 | 0.00113 | 0.0082 | 1.3947 | 120-128 | 248-262 | 7.8 |
| GLYCOL ETHER DB ACETATE | 124-17-4 | 204.26 | 95 | 0.980 | 8.16 | 0.00097 | 0.0072 | 1.4265 | 235-259 | 455-482 | <0.001 |
| GLYCOL ETHER EB ACETATE | 112-07-2 | 160.22 | 99 | 0.942 | 7.84 | 0.00104 | 0.0076 | 1.4200 | 188-192 | 370-378 | 0.29 |
| GLYCOL ETHER DE ACETATE | 112-15-2 | 176.21 | 97 | 1.011 | 8.41 | 0.00101 | 0.0078 | 1.4230 | 214-221 | 417-430 | 0.05 |
| GLYCOL ETHER EE ACETATE | 111-15-9 | 132.16 | 95 | 0.974 | 8.11 | 0.00112 | 0.0086 | 1.4058 | 145-166 | 293-331 | 1.7 |
| GLYCOL ETHER EM ACETATE | 110-49-6 | 146 | 99 | 1.006 | 8.37 | 0.00109 | 0.0084 | 1.4025 | 140-147 | 284-297 | 2.0 |
| GLYCOL ETHER PM ACETATE | 108-65-6 | 132.16 | 99 | 0.969 | 8.07 | | | 1.400 | 140-150 | 284-302 | 3.7 |
| ETHYL ACETATE (85-88%) | 141-78-6 | 88.11 | 85-88 | 0.886 | 7.38 | 0.00139 | 0.0102 | 1.3698 | 71-79 | 160-174 | 88.0 |
| ETHYL ACETATE (99%) | 141-78-6 | 88.11 | 99 | 0.902 | 7.51 | 0.00139 | 0.0104 | 1.3710 | 76-77.5 | 169-172 | 76.0 |
| ETHYL 3 ETHOXY PROPIONATE (EEP) | 763-69-9 | 146.19 | 99 | 0.944 | 7.84 | | | | 163-166 | 320-330 | 1.11 |
| iso-PROPYL ACETATE | 108-21-4 | 102.14 | 99 | 0.872 | 7.26 | 0.00115 | 0.0094 | 1.3779 | 85-90 | 185-194 | 47.5 |
| n-PROPYL ACETATE | 109-60-4 | 102.14 | 96 | 0.886 | 7.39 | 0.0013 | 0.0090 | | 99-103 | 210-217 | 23.0 |
| ISOBUTYL ISOBUTYRATE | 97-85-8 | 144.21 | 99 | 0.855 | 7.13 | | | | 144-151 | 291-304 | 3.2 |
| DIBASIC ESTER (DBE) | | 160.0 | 99 | 1.086 | 9.0 | | | | 196-225 | 385-437 | |

| ESTERS | Evap. Rate vs. B. Acet. = 1 | Solubility % by Wt. @ 20°C | | Dilution Ratio | | Bl. Res. % Rel. Hum. @ 80°F | V. 8% NC @ 25°C CPS | Freeze Point °C | Flash Point T.C.C. | Explosive Limits % by Vol. In Air | | Solubility Parameter |
|---------------------------------|-----------------------------|----------------------------|----------------------|----------------|--------|-----------------------------|---------------------|-----------------|--------------------|-----------------------------------|-------|----------------------|
| | | In H ₂ O | Oil H ₂ O | Toluol | Lactol | | | | | Lower | Upper | |
| AMYL ACETATE (Primary) | 0.4 | 0.2 | 0.9 | 2.3 | 1.3 | 92 | 41 | -100 | 106 | 1.1 | 7.5 | 8.5 |
| iso-BUTYL ACETATE | 1.45 | 0.75 | 1.64 | 2.7 | 1.1 | 80 | 35 | -97.1 | 69 | 2.4 | 10.5 | 8.4 |
| n-BUTYL ACETATE | 1.0 | 0.7 | 1.6 | 2.7 | 1.2 | 83 | 33 | -73.5 | 76 | 1.7 | 7.6 | 8.7 |
| GLYCOL ETHER DB ACETATE | <0.01 | 6.5 | 3.7 | 1.8 | 0.9 | 96 | 201 | -32.2 | 240 ^a | 0.8 | 5.0 | 8.5 |
| GLYCOL ETHER EB ACETATE | 0.03 | 1.1 | 1.8 | 1.8 | 1.2 | 96 | 92 | -63.5 | 160 | | | 8.5 |
| GLYCOL ETHER DE ACETATE | <0.01 | ∞ | ∞ | 2.2 | 0.6 | 92 | 158 | 25 | 230 ^a | 1.0 | 6.9 | 8.5 |
| GLYCOL ETHER EE ACETATE | 0.2 | 23.8 | 8.5 | 2.5 | 0.9 | 94 | 65 | -61.7 | 130 | 1.7 | | 8.7 |
| GLYCOL ETHER EM ACETATE | 0.2 | ∞ | ∞ | 2.3 | 0.6 | 80 | 63 | -65.1 | 120 | | | 9.2 |
| GLYCOL ETHER PM ACETATE | 0.39 | 20 | 5.9 | 2.6 | 0.8 | 92 | 65 | | 114 ^b | 1.3 | 13.1 | 8.8 |
| ETHYL ACETATE (85-88%) | 4.2 | 7.4 | 3.1 | 3.3 | 1.2 | 38 | 23 | <-83.6 | 26 | 2.05 | 11.0 | 9.1 |
| ETHYL ACETATE (99%) | 4.1 | 7.4 | 3.3 | 3.1 | 1.1 | 39 | 23 | -83.6 | 24 | 2.2 | 11.0 | 9.1 |
| ETHYL 3 ETHOXY PROPIONATE (EEP) | 0.12 | 2.9 | | 1.8 | | | 52 | | 136 ^b | 1.05 | | 9.1 |
| iso-PROPYL ACETATE | 3.1 | 2.9 | 1.8 | 3.0 | 1.2 | 69 | 25 | 69 | 35 | 1.8 | 8.0 | 8.6 |
| n-PROPYL ACETATE | 2.3 | 2.3 | 2.6 | 3.2 | 1.5 | 65 | 25 | -95 | 55 | 2.0 | 8.0 | 8.8 |
| ISOBUTYL ISOBUTYRATE | 0.43 | <0.1 | <0.2 | 1.5 | 0.8 | 92 | 56 | -81 | 97 ^a | | | 8.0 |
| DIBASIC ESTER (DBE) | | | | | | | | 20 | 212 | | | |

^a Tag Open Cup^b Seal Closed Cup

Table 15.45: CPS Chemical Esters (15)

SALES SPECIFICATIONS:

| | Butyl Lactate | Ethyl Lactate* |
|----------------------------------|----------------|----------------|
| Purity, % ester | 95.0 minimum | 98.0 minimum |
| Specific Gravity, 20/20 °C | 0.970 to 0.990 | 1.032 to 1.035 |
| Acid value | 0.5 maximum | 0.5 maximum |
| Water, wt. % | 0.2 maximum | 0.3 maximum |
| Color, APHA | 25 maximum | 25 maximum |
| *Electronic grade also available | | |

PHYSICAL PROPERTIES:

| | Butyl Lactate | Ethyl Lactate |
|--------------------------------------------------|--------------------|--------------------|
| Flash point, °C | 76 | 48 |
| Freezing point, °C | -46 | -25 |
| Boiling point, °C @ 760 mm Hg | 188 | 154 |
| Vapor pressure mm Hg @ 20°C | 0.4 | 2 |
| Vapor density (air = 1) | 5.04 | 1.03 |
| Relative evaporation rate (butyl acetate = 1) | 0.044 | 0.29 |
| Molecular weight | 146.2 | 118.1 |
| Pounds per gallon | 8.15 | 8.59 |
| Odor | mild | mild |
| Appearance | water white liquid | water white liquid |

Table 15.46: Eastman Glycol Ether Esters (41)

| NOMENCLATURE OF GLYCOL ETHERS AND GLYCOL ETHER ESTERS | | | | | | | | |
|-------------------------------------------------------|-------------------------------------|---------------------------------------|----------------------------------------|---------------------------------------|---------------------------------------|----------------------------------------|---------------------------------------|---------------------------------------|
| GLYCOL ETHERS | | | | | | | | |
| Company Name | Ethylene Glycol Propyl Ether | Ethylene Glycol Butyl Ether | Ethylene Glycol 2-Ethylhexyl Ether | Diethylene Glycol Methyl Ether | Diethylene Glycol Ethyl Ether | Diethylene Glycol Propyl Ether | Diethylene Glycol Butyl Ether | Propylene Glycol Methyl Ether |
| Eastman | Eastman EP | Eastman EB | Eastman EEH | Eastman DM | Eastman DE | Eastman DP | Eastman DB | Eastman FM |
| Union Carbide | Propyl Cellosolve | Butyl Cellosolve | — | Methyl Carbitol | Carbitol (low gravity) | Propyl Carbitol | Butyl Carbitol | Methyl Propasol |
| Dow | — | Dowanol EB | — | Dowanol DM | Dowanol DE | — | Dowanol DB | Dowanol FM |
| Shell | — | Butyl Oxitol | — | — | — | — | Butyl Dioxitol | — |
| Occidental | — | EB | — | — | DE | — | DB | — |
| Arco | — | — | — | — | — | — | — | Arcosolve FM |
| GLYCOL ETHER ESTERS | | | | | | | | |
| Company Name | Ethylene Glycol Butyl Ether Acetate | Diethylene Glycol Ethyl Ether Acetate | Diethylene Glycol Propyl Ether Acetate | Diethylene Glycol Butyl Ether Acetate | Diethylene Glycol Ethyl Ether Acetate | Diethylene Glycol Propyl Ether Acetate | Diethylene Glycol Butyl Ether Acetate | Propylene Glycol Methyl Ether Acetate |
| Eastman | Eastman EB acetate | Eastman DE acetate | — | Eastman DB acetate | — | — | — | Eastman PM acetate |
| Union Carbide | Butyl Cellosolve acetate | — | — | Butyl Carbitol acetate | — | — | — | Methyl Propasol acetate |
| Arco | — | — | — | — | — | — | — | Arcosolve PM acetate |
| Dow | — | — | — | — | — | — | — | Dowanol PM acetate |
| Occidental | EB acetate | — | — | DB acetate | — | — | — | PM acetate |

Table 15.47: Hoechst Celanese Esters (42)

Ethyl Acetate

(Acetic Acid, Ethyl Ester, Ethyl Acetic Ester, Ethyl Ethanoate, Acetidin)

Physical Properties

| | |
|---------------------------------------------------------|---------|
| Autoignition Temperature, °C | 426.7 |
| Boiling Point at 760 mm Hg, °C | 77 |
| Boiling Point at 760 mm Hg, °F | 171 |
| Coefficient of Thermal Expansion per °C (at 20°C) | 0.00141 |
| Critical Pressure, atmospheres (est) | 37.8 |
| Critical Temperature, °C (est) | 250 |
| Evaporation Rate (BuAc = 1) | 4.5 |
| Flammable Limits (lower limit, vol %) | 2.0 |
| (upper limit, vol %) | 11.4 |
| Flash Point, Tag Open Cup, °F | 56 |
| Tag Closed Cup, °F | 24 |
| Freezing Point, °C | -83 |
| Heat of Combustion, kcal/mole (liquid, 25°C) | 534.3 |
| Heat of Formation, kcal/mole(liquid, 25°C) | -115.2 |
| Heat of Fusion, cal/gm | 28.43 |
| Heat of Vaporization, btu/lb at normal boiling point | 158 |
| Molecular Weight | 88.11 |
| Refractive Index n_D^{20} | 1.3719 |
| Solubility at 20°C, wt % in water | 8.7 |
| wt % water in | 3.3 |
| Specific Gravity, 20/20°C | 0.9019 |
| Specific Heat of Liquid, cal/gm°C at 20°C | 0.459 |
| Surface Tension in Air at 20°C dynes/cm | 23.7 |
| Vapor Density (air = 1) | 3.0 |
| Vapor Pressure, mm Hg, 20°C | 73 |
| Viscosity at 20°C, centipoise | 0.46 |
| Weight, pounds per gallon at 20°C | 7.51 |

Isopropyl Acetate

(Acetic Acid, Isopropyl Ester)

Physical Properties

| | |
|-------------------------------------------------|--------------|
| Autoignition Temperature, °C | 460 |
| Critical Properties: | |
| Temperature, °C | 257.85 |
| Pressure, atm | 35.7 |
| Volume, cm ³ /mol | 312 |
| Compressibility Factor (Z_c) | 0.255 |
| Density: | |
| Liquid (20°C) | 0.8718 |
| Vapor (air = 1.0) | 3.5 |
| Explosive Limits (25°C), vol % | |
| Lower (LEL) | 1.76 |
| Upper (UEL) | 7.20 |
| Flash Point (TCC), °C | 22 |
| Latent Heat of Vaporization (25°C), kcal/mol | 8.89 |
| Liquid Specific Heat (25°C), cal/g°C | 0.460 |
| Liquid Viscosity (20°C), centipoise | 0.60 |
| Melting Point, °C | -73.4 |
| Molecular Weight | 102.134 |
| Normal Boiling Point, (n-bp), °C | 88.6 |
| Refractive Index, (n_d) at 20°C | 1.3791 |
| Standard Net Heat of Combustion, kcal/mol | -632.9 (gas) |
| Surface Tension (20°C), dyne/cm | 22.3 |
| Vapor Pressure (20°C), mm Hg | 47 |

(continued)

Table 15.47: (continued)

n-Propyl Acetate
 (Acetic Acid, Propyl Ester, Normal Propyl Acetate)
Physical Properties

| | |
|------------------------------------------------------|--------|
| Autoignition Temperature, °C | 450.0 |
| Boiling Point at 760 mm Hg, °C | 101.6 |
| Boiling Point at 760 mm Hg, °F | 214.9 |
| Evaporation Rate (BuAc = 1) | 2.2 |
| Flammable Limits | |
| (lower limit, vol %) | 2.0 |
| (upper limit, vol %) | 8.0 |
| Flash Point, Tag Open Cup, °F | 70 |
| Tag Closed Cup, °F | 55 |
| Freezing Point, °C | -92.5 |
| Heat of Vaporization, btu/lb at normal boiling point | 145 |
| Molecular Weight | 102.13 |
| Solubility at 20°C, wt % in water | 2.3 |
| Specific Gravity, 20/20°C | 0.8870 |
| Specific Heat of Liquid, cal/gm°C at 20° | 0.459 |
| Vapor Density (air = 1) | 3.5 |
| Vapor Pressure, 20°C, mm Hg | 25 |
| Viscosity at 20°C, centipoise | 0.59 |
| Weight, pounds per gallon at 20°C | 7.39 |

Isobutyl Acetate
 (Acetic Acid, Isobutyl Ester, 2-Methyl-1-Propyl Acetate, B-Methylpropyl Ethanoate)
Physical Properties

| | |
|------------------------------------------------------------|-------------------------|
| Boiling Point at 760 mm Hg, °C | 118 |
| Boiling Point at 760 mm Hg, °F | 244 |
| Coefficient of Thermal Expansion per °C at 55°C | 1.26 x 10 ⁻³ |
| Distillation Range, °C | 114.0-119.0 |
| Evaporation Rate (BuAc = 1) | 1.6 |
| Flammable Limits (lower limit, vol %) | 2.4 |
| (upper limit, vol %) | 10.5 |
| Flash Point, Tag Open Cup, °F | 83 |
| Tag Closed Cup, °F | 64 |
| Freezing Point, °C | -99 |
| Heat of Vaporization, k joules/mol at normal boiling point | 36.7 |
| Molecular Weight | 116.16 |
| Refractive Index, n _D ²⁰ | 1.3900 |
| Solubility at 20°C, wt % in water | 0.63 |
| Specific Gravity, 20/20°C | 0.8724 |
| Specific Heat of Liquid, cal/gm°C at 20°C | 0.459 |
| Vapor Density (air = 1) | 4.0 |
| Vapor Pressure at 20°C, mm Hg | 13.0 |
| Viscosity, 20°C, centipoise | 0.70 |
| Weight, pounds per gallon at 20°C | 7.26 |

Table 15.47: (continued)

n-Butyl Acetate
(Acetic Acid, Butyl Ester, Butyl Ethanoate,
Normal Butyl Acetate)

Physical Properties

| | |
|----------------------------------------------------|-------------------------|
| Boiling Point (760 mm Hg): | 126.5°C (259.7°F) |
| Coefficient of Thermal Expansion per °C (at 20°C): | 1.13 x 10 ⁻³ |
| Critical Pressure: | 31.7 atm |
| Critical Temperature: | 306.2 °C |
| Distillation Range: | 120-128°C |
| Evaporation Rate (BuAc = 1): | 1.0 |
| Flammability Limits in Air (% by vol): | |
| Upper: | 7.6 |
| Lower: | 1.7 |
| Flash Point: | |
| Tag Open Cup: | 93°F |
| Tag Closed Cup: | 76°F |
| Freezing Point: | -73.5°C |
| Heat of Combustion (liquid, 25°C): | -847 kcal/mole |
| Heat of Formation (liquid, 25°C): | -5.17 kcal/mole |
| Heat of Vaporization (at normal boiling point): | 139 btu/lb |
| Molecular Weight: | 116.16 |
| Refractive Index n _D ²⁰ : | 1.3947 |
| Solubility at 20°C, wt%, in water: | 0.68 |
| water in: | 1.175 |
| Specific Gravity (20/20°C): | 0.8820 |
| Specific Heat of Liquid (at 20°C): | 0.503 cal/gm°C |
| Surface Tension (in Air at 20°C): | 24.0 dynes/cm |
| Vapor Density (Air = 1): | 4.0 |
| Vapor Pressure (20°C): | 18.4 mm Hg |
| Viscosity (at 20°C, centipoise): | 0.74 |
| Weight (pound per gallon at 20°C): | 7.35 |

Methyl Formate - 97.5%
(Formic Acid, Methyl Ester)

Physical Properties

| | |
|------------------------------------------------------------|----------------------------|
| Autoignition Temperature, °C | 449.0 |
| Boiling Point at 760 mm Hg, °C | 32.1 |
| Boiling Point at 760 mm Hg, °F | 89.8 |
| Critical Pressure, atmospheres | 59.25 |
| Critical Temperature, °C | 214 |
| Evaporation Rate (Ether = 1) | 1.6 |
| Flammable Limits (lower limit, vol %) (upper limit, vol %) | 5.0 ⁽¹⁾ 23.0 |
| Flash Point, Tag Open Cup, °F Tag Closed Cup, °F | -2 -26 |
| Freezing Point, °C | -100.2 |
| Heat of Vaporization, btu/lb at normal boiling point | 202.3 |
| Molecular Weight | 60.05 |
| Refractive Index, n _D ²⁰ | 1.3434 |
| Solubility at 20°C, wt % in water | 33.0 |
| Specific Gravity, 20/20°C | 0.980 |
| Specific Heat of Liquid, btu/lb°F at 68°F | 0.493 |
| Surface Tension in air at 25°C, dynes/cm | 24.62 |
| Vapor Density (air = 1) | 2.07 |
| Vapor Pressure, 20°C, mm Hg | 476.4 |
| Viscosity at 25°C, centipoise | 0.355 |
| Weight, pounds per gallon at 20°C (68°F) | 8.17 |

Table 15.48: Mobil Oil Esters (64)

| Typical Characteristics | N-Butyl Acetate | Cyclohexyl Acetate | Ethyl Acetate | EGMEEA |
|-----------------------------------------|-----------------|--------------------|---------------|------------|
| Density kg/l at 15 °C | 0.887 | 0.973 | 0.905 | 0.975 |
| Distillation °C, IBP | 124.0 | 173 | 76.6 | 156 |
| DP | 126.7 | 179 | 77.4 | 165 |
| Color, APHA | 5 | 5 | 10 | 10 |
| Flash Point °C (TCC) | 23 | 58 | -1 | 58 |
| Water Content % Wt. | 0.1 | 0.09 | 0.1 | — |
| Acidity as Acetic, ppm | 70 | 140 | 50 | 100 |
| Properties of Pure Material | | | | |
| Molecular Wt. | 116.16 | 142.19 | 88.10 | 132.09 |
| Coefficient of Cubical Expansion/°C | 0.00121 | 0.00095 | 0.00139 | 0.00111 |
| Density Correction/°C | 0.00104 | 0.00090 | 0.00123 | 0.00106 |
| Solubility of Water in, at 20 °C, % w/w | 1.37 | 0.80 | 3.0 | 6.5 |
| Solubility in Water, at 20 °C, % w/w | 1.0 | 0.33 | 7.9 | 23 |
| Viscosity at 20 °C, cP | 0.69 | 2.0 | 0.45 | 1.21 |
| Refractive Index at 20 °C | 1.3951 | 1.441 | 1.3725 | 1.4058 |
| Specific Heat at 20 °C, kJ/kg °C | 1.92 | 1.72 | 2.00 | 2.07 |
| Latent Heat of Evaporation, kJ/kg | 310 | 313 | 367 | 339 |
| Vapor Pressure at 20 °C, mm Hg | 10 | 1.0 | 73 | 1.2 |
| Explosive Range, % vol in air. | 1.7 - 15 | 1.0 - ? | 2.2 - 11.0 | 1.7 - 10.1 |
| Sat. Vapor Explosive in range, °C | 23 - 70 | — | -7 - +33 | — |
| Autoignition Temperature, °C | 425 | 330 | 426 | 379 |

Table 15.49: Union Carbide Esters (19)

| | MOLECULAR WEIGHT | BOILING POINT at 760 mm Hg, °C | VAPOR PRESSURE at 20°C, mm Hg | RELATIVE EVAPORATION RATE (BuAc = 100) | APPARENT SPECIFIC GRAVITY at 20/20°C | SOLUBILITY PARAMETERS | | | SOLUBILITY of Pure Material at 20°C, % by weight | | POUNDS PER GALLON at 20°C | FLASH POINT, Closed Cup, °F | SURFACE TENSION at 25°C, dynes/cm | SURFACE TENSION at 25°C of 20% Solution in Water, dynes/cm |
|--------------------------|------------------|--------------------------------|-------------------------------|----------------------------------------|--------------------------------------|-----------------------|-------|------------------|--------------------------------------------------|----------|---------------------------|-----------------------------|-----------------------------------|------------------------------------------------------------|
| | | | | | | Total | Polar | Hydrogen Bonding | In Water | Water In | | | | |
| ESTERS | | | | | | | | | | | | | | |
| Ethyl Acetate (99.5%) | 88.11 | 77.2 | 76 | 747 | 0.902 | 8.91 | 4.20 | 4.35 | 8.7 | 3.3 | 7.51 | 30 | 23.7 | 24.5 (a) |
| CELLOSOLVE Acetate | 132.16 | 156.3 | 2 | 20 | 0.975 | 9.35 | 4.41 | 4.33 | 22.9 | 6.5 | 8.10 | 126 | 28.0 | 33.5 |
| Methyl PROPASOL Acetate | 132.16 | 145.7 | 3 | 34 | 0.969 | 9.10 | 4.50 | 3.86 | 18.5 | 5.6 | 8.06 | 116 | 28.2 | — |
| Ester EEP | 146.19 | 170.1 | <1 | 11 | 0.950 | 9.0 | 4.1 | 4.0 | 1.6 | 1.9 | 7.91 | 136 | 27.3 | — |
| Butyl CELLOSOLVE Acetate | 160.21 | 192.3 | <1 | 3 | 0.942 | 8.91 | 3.92 | 3.83 | 1.5 | 1.7 | 7.84 | 165 | 27.4 | 41.0 (b) |
| Butyl CARBITOL Acetate | 204.27 | 246.7 | <1 | <1 | 0.980 | 9.05 | 3.97 | 4.25 | 6.5 | 3.7 | 8.16 | 221 | 30.0 | 39.2 (c) |
| Filmer IBT | 216.30 | 169.7 | <1 | <1 | 0.95 | 8.5 | — | — | <1 | 0.9 | 7.91 | 248 | — | — |

(a) 5 percent aqueous solution.

(b) 1 percent aqueous solution.

(c) 2 percent aqueous solution.

Resin Solubilities

| Solvent | Cellulose Acetate, 41% Acetyl | Cellulose Acetate Butyrate, | | Ethyl Cellulose, 47-49% Ethoxyl | Polystyrene | Poly(methyl Methacrylate) | Vinyl Resins | | |
|---------------------------|-------------------------------|-----------------------------|------------|---------------------------------|-------------|---------------------------|---------------------------------------------|------------------------|-----------------------|
| | | 17% Butyrl | 37% Butyrl | | | | VYHH Vinyl Chloride/Vinyl Acetate Copolymer | AYAF Polyvinyl Acetate | XYHL Polyvinyl Butyrl |
| Butyl CARBITOL® Solvent | I | I | G | S* | I | I | PS | S | S |
| Butyl CELLOSOLVE® Solvent | I | I | I | S | I | I | I | PS | S |
| Butyl CELLOSOLVE Acetate | I | I | S | S | S | I | SI.S | S | I |
| Butyl PROPASOL® Solvent | I | I | I | S-G | I | I | I | SW | S-G |
| CARBITOL Solvent PM-600 | I | SW | PS | PS | I | I | I | PS | S |
| CELLOSOLVE Acetate | SI.S | PS | S | S | S | S | S | S | G |
| CELLOSOLVE Solvent | I | I | S | S | I | I | I | S | S |
| Methyl CARBITOL Solvent | S-G | SW | S | PS | I | I | I | S | S |
| Methyl CELLOSOLVE Solvent | S | I | S | S | I | S | PS | S | S |
| Methyl CELLOSOLVE Acetate | S | S | S | S | S | S | S | S | G |
| Methyl PROPASOL Acetate | I | SW | S | PS | S | S | S | S | SW |
| Methyl PROPASOL Solvent | I | I | S | PS | I | S | I | S | PS |
| Propyl CARBITOL Solvent | I | I | G | S | I | I | PS | S | S |
| Propyl CELLOSOLVE Solvent | I | I | S | S | I | I | I | S | S |
| Propyl PROPASOL Solvent | I | I | I | S-G* | I | I | I | SI.S | S-G |
| UCAR® Ester EEP | — | S | — | S | PS | PS | S | — | — |

Concentration = 0.5 g resin to 4.5 ml of solvent

* = 0.5 g resin to 9.5 ml solvent

S = Soluble

I = Insoluble

G = Gel

SW = Swelling

SI.S = Slightly soluble

PS = Partly soluble

S-G = Soluble, tendency to gel

PS-G = Partly soluble, tendency to gel

SI.S-G = Slightly soluble, tendency to gel

(continued)

Table 15.49: (continued)

Coating Performance Properties

| Solvent | Solubility Parameters | | | Blush Resistance | Dilution Ratios | | | Relative Evaporation Rate (nBuAc = 100) | Surface Tension at 25°C, dynes/cm | |
|---------------------------------------|-----------------------|-------|------------------|------------------|-----------------|---------|--------|-----------------------------------------|-----------------------------------|--------------------------------------|
| | Total | Polar | Hydrogen Bonding | | Toluene | Naphtha | Xylene | | Solvent | 20% Solution in Water ^(a) |
| | | | | | | | | | | |
| Butyl CARBITOL [®] Solvent | 9.79 | 3.94 | 6.16 | — | 3.9 | 1.9 | 4.2 | <1 | 31.0 | 35.2 |
| Butyl CELLOSOLVE [®] Acetate | 8.91 | 3.92 | 3.85 | 96+ | 1.8 | 1.2 | — | 3 | 27.4 | 41.0 ^(b) |
| Butyl CELLOSOLVE Solvent | 9.87 | 3.88 | 6.35 | 96+ | 3.5 | 2.3 | 3.2 | 6 | 28.6 | 28.9 |
| Butyl PROPASOL [®] Solvent | 9.31 | 3.67 | 5.63 | 96+ | 1.9 | 0.9 | — | 8 | 27.4 | 32.3 ^(c) |
| CARBITOL Solvent, Low Gravity | 10.34 | 4.35 | 6.89 | 78 | 4.7 | 0.5 | — | <1 | 35.2 | 49.6 |
| CARBITOL Solvent PM 600 | 10.3 | — | — | 76 | 1.9 | Imm. | 1.2 | <1 | | |
| CELLOSOLVE Acetate | 9.35 | 4.41 | 4.33 | 94 | 2.5 | 0.9 | 2.5 | 20 | 28.0 | 33.5 |
| CELLOSOLVE Solvent | 10.71 | 4.43 | 7.42 | 59 | 4.9 | 1.1 | 4.3 | 32 | 29.4 | 47.1 |
| Hexyl CARBITOL Solvent | 9.70 | 3.08 | 5.84 | — | 2.9 | 1.8 | — | <1 | 29.6 | — |
| Hexyl CELLOSOLVE Solvent | 9.63 | 3.53 | 5.90 | 96+ | 2.4 | 1.5 | — | 1 | 30.3 | 28.5 |
| Methyl CARBITOL Solvent | 11.15 | 4.70 | 7.70 | 76 | 2.3 | Imm. | 1.0 | <1 | 35.9 | 49.6 |
| Methyl CELLOSOLVE Acetate | 9.9 | — | — | 80 | 2.3 | 0.6 | 1.9 | 31 | — | — |
| Methyl CELLOSOLVE Solvent | 11.7 | — | — | 42 | 4.0 | Imm. | 2.9 | 47 | 28.2 | — |
| Methyl PROPASOL Acetate | 9.10 | 4.50 | 3.86 | — | 2.5 | 0.8 | — | 34 | | |
| Methyl PROPASOL Solvent | 10.42 | 4.48 | 6.98 | — | 5.2 | 0.9 | — | 60 | 28.3 | 46.8 |
| Propyl CARBITOL Solvent | 9.99 | 4.11 | 6.46 | — | — | — | — | <1 | — | — |
| Propyl CELLOSOLVE Solvent | 10.16 | 4.10 | 6.77 | 69 | 4.0 | 2.0 | — | 22 | 26.7 | — |
| Propyl PROPASOL Solvent | 9.55 | 3.89 | 5.89 | — | — | 1.1 | — | 22 | 27.0 | 30.4 |
| UCAR [®] DPM Solvent | 9.4 | — | 13.3 | — | 4.2 | 0.8 | — | 3 | 28.8 | — |
| UCAR Ester EEP | 9.0 | 4.1 | 4.0 | — | 1.4 | 0.7 | — | 11 | 27.3 | — |

(a) All solutions are percent by volume

(b) 1 percent aqueous solution

(c) 5 percent aqueous solution

Constant Boiling Azeotropic Mixtures of Glycol Ether Esters with Water

| Solvent | Components | | | Azeotrope | | | Relative Volume of Layers ^(a) at 20°C | Sp. Gr. 20/20°C of Azeotrope Layer ^(a) |
|-----------------------------------|-----------------------------|--------------------------------|--------------------------------|-------------------------------|----------------|----------------|--------------------------------------------------|---------------------------------------------------|
| | Specific Gravity at 20/20°C | Boiling Point, °C at 760 mm Hg | Boiling Point, °C at 760 mm Hg | Composition, % by Wt. at 20°C | | | | |
| | | | | In Azeotrope | In Upper Layer | In Lower Layer | | |
| Butyl CELLOSOLVE Acetate Water | 0.9442 | 191.5 | 98.8 | 28.1 | 98.4 | 1.1 | U 71.0 | U 0.941 |
| | 1.0000 | 100.0 | — | 71.9 | 1.6 | 98.9 | L 29.0 | L 0.999 |
| CELLOSOLVE Acetate Water | 0.9748 | 156.4 | 97.5 | 45.5 | 93.3 | 24.5 | U 31.2 | U 0.972 |
| | 1.0000 | 100.0 | — | 54.5 | 6.7 | 75.5 | L 68.8 | L 1.011 |
| Methyl CELLOSOLVE Acetate Water | 1.0067 | 145.5 | 97.1 | 48.2 | — | — | — | — |
| | 1.0000 | 100.0 | — | 51.8 | — | — | — | 1.03 |
| UCAR [®] Ester EEP Water | 0.9496 | 170.1 | 97 | 38.6 | 97.2 | 5.3 | U 38 | U 0.94 |
| | 1.0000 | 100.0 | — | 61.4 | 2.8 | 94.7 | L 62 | L 0.99 |

(a) U = Upper; L = Lower

(continued)

Table 15.49: (continued)

Relative Viscosities of Lacquers at 25 °C

| | N Formula | | | ND Formula | | | NRAD Formula | | | NRMD Formula | | |
|---------------------------|------------|-----|-----|------------|-----|-----|--------------|-----|-----|--------------|-----|-----|
| | 100 | 200 | 300 | 100 | 200 | 300 | 100 | 200 | 300 | 100 | 200 | 300 |
| Butyl CELLOSOLVE® Solvent | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |
| Butyl CELLOSOLVE Acetate | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |
| Butyl PROPASOL® Solvent | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |
| CARBITOL® Solvent PM-600 | ██████████ | | | ██████████ | | | ██████████ | | | Insoluble | | |
| CELLOSOLVE Acetate | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |
| CELLOSOLVE Solvent | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |
| Methyl CARBITOL Solvent | ██████████ | | | ██████████ | | | ██████████ | | | Insoluble | | |
| Methyl CELLOSOLVE Acetate | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |
| Methyl CELLOSOLVE Solvent | ██████████ | | | ██████████ | | | ██████████ | | | Insoluble | | |
| Methyl PROPASOL Acetate | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |
| Methyl PROPASOL Solvent | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |
| Propyl PROPASOL Solvent | ██████████ | | | ██████████ | | | ██████████ | | | ██████████ | | |

| Composition of Formulas | N Formula | | | ND Formula | | | NRAD Formula | | | NRMD Formula | | |
|---------------------------------------|-----------|-----|-----|------------|-----|-----|--------------|-----|-----|--------------|-----|-----|
| | 100 | 200 | 300 | 100 | 200 | 300 | 100 | 200 | 300 | 100 | 200 | 300 |
| R.S. 1/2-s Nitrocellulose (dry) | 8.0 | | | 8.0 | | | 8.0 | | | 8.0 | | |
| Nonoxidizing Alkyd Resin (100% basls) | - | | | - | | | 12.0 | | | - | | |
| Maleic Hard Resin | - | | | - | | | - | | | 12.0 | | |
| Dibutyl Phthalate | - | | | - | | | - | | | 4.0 | | |
| Ethanol | - | | | 4.3 | | | 4.3 | | | 4.3 | | |
| Solvent | 92.0 | | | 41.7 | | | 35.7 | | | 33.7 | | |
| Toluene | - | | | 23.0 | | | 20.0 | | | 19.0 | | |
| Xylene | - | | | 23.0 | | | 20.0 | | | 19.0 | | |
| Total Parts by Weight | 100.0 | | | 100.0 | | | 100.0 | | | 100.0 | | |

(Butyl Acetate = 100)

UCAR® Ester EEP as a Polymerization Solvent for an Acrylic Resin

Electrostatic Application

Monomer Composition

| Ingredient | Weight Percent |
|--------------------------|----------------|
| Styrene | 30.8 |
| Butyl Acrylate | 38.2 |
| Hexoxy Ethyl Acrylate | 15.7 |
| Acrylic Acid | 3.2 |
| Initiator ⁽¹⁾ | 4.4 |
| Solvent | 7.7 |
| Total | 100.0 |

Glycol Ether Esters

| | Resistivity, megohms |
|---------------------------|----------------------|
| Methyl CELLOSOLVE Acetate | 0.2 |
| Butyl PROPASOL Solvent | 0.45 |
| Methyl PROPASOL Acetate | 1.8 |
| Butyl CELLOSOLVE Acetate | 3.0 |
| CELLOSOLVE Acetate | 4.0 |
| UCAR Ester EEP | 20.0 |

Results

| Polymerization Solvent | Polymerization Temperature, °C | Average Molecular Weight | Solids, ⁽²⁾ % by Wt | Viscosity, ⁽³⁾ cP |
|-----------------------------|--------------------------------|--------------------------|--------------------------------|------------------------------|
| Methyl n-Amyl Ketone | 155 | 19,480 | 70 | 3440 |
| UCAR® Ester EEP | 175 | 13,739 | 70 | 3150 |
| "Exxate" ⁽⁴⁾ 600 | 171 | 17,592 | 70 | 3850 |

(1) "Luperox" 500R (Pennwalt)

(2) Polymerization solids were ~81%, reduced to 70% for viscosity studies

(3) Brookfield model LVT

(4) Exxon

Table 15.49: (continued)

Vapor Pressures of Esters vs Temperature

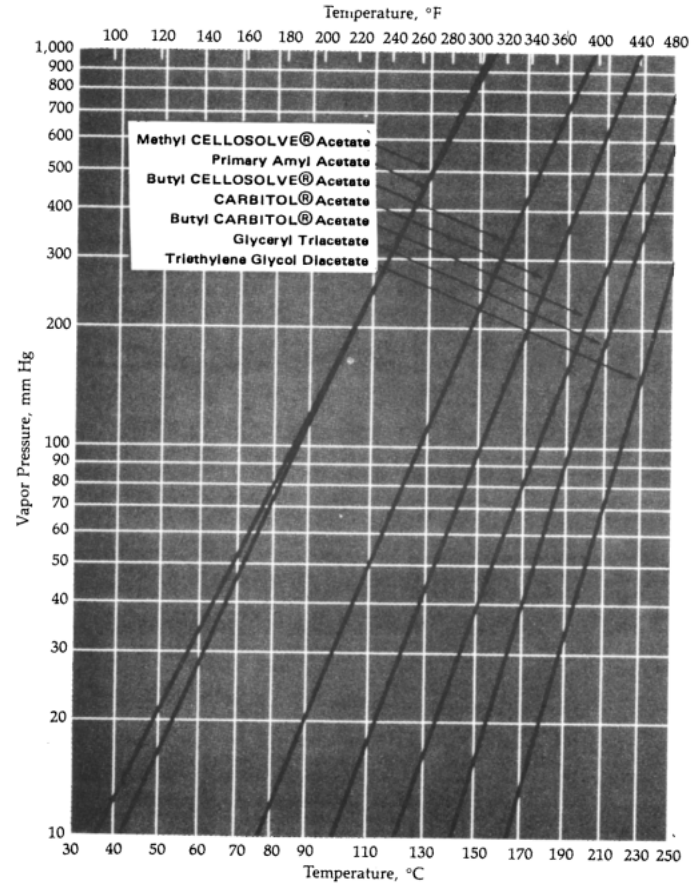
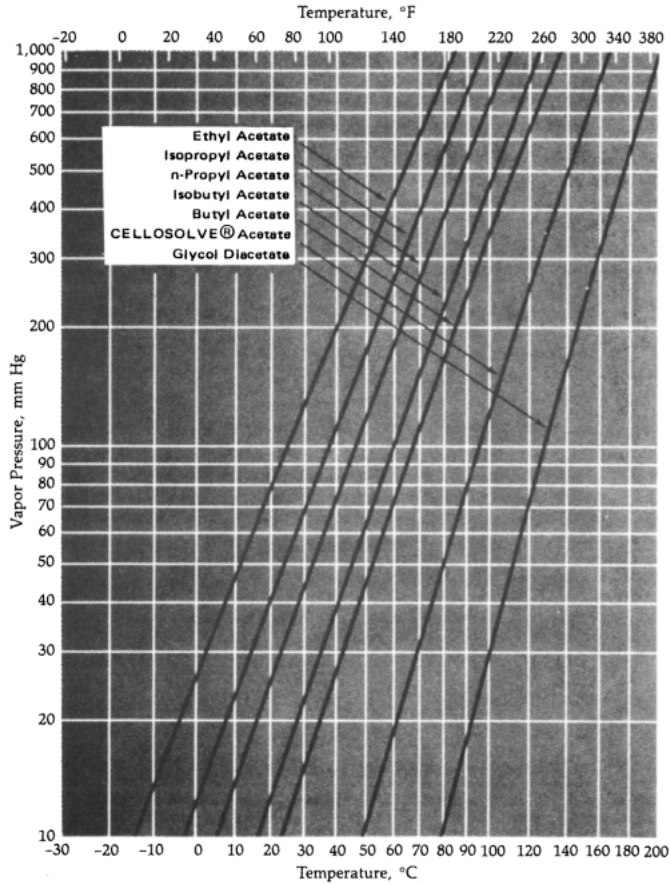


Table 15.49: (continued)

Solubilities of Water in Esters

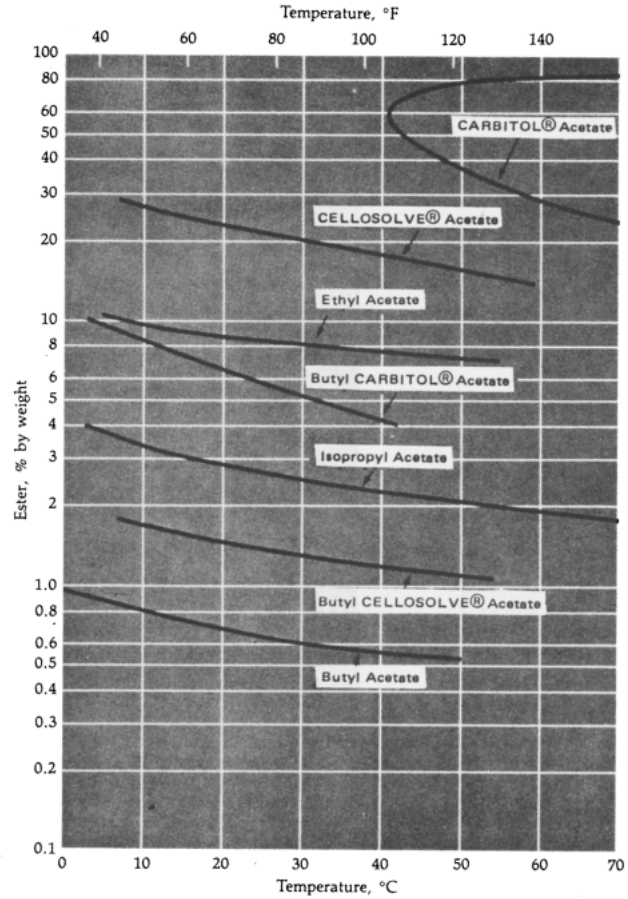
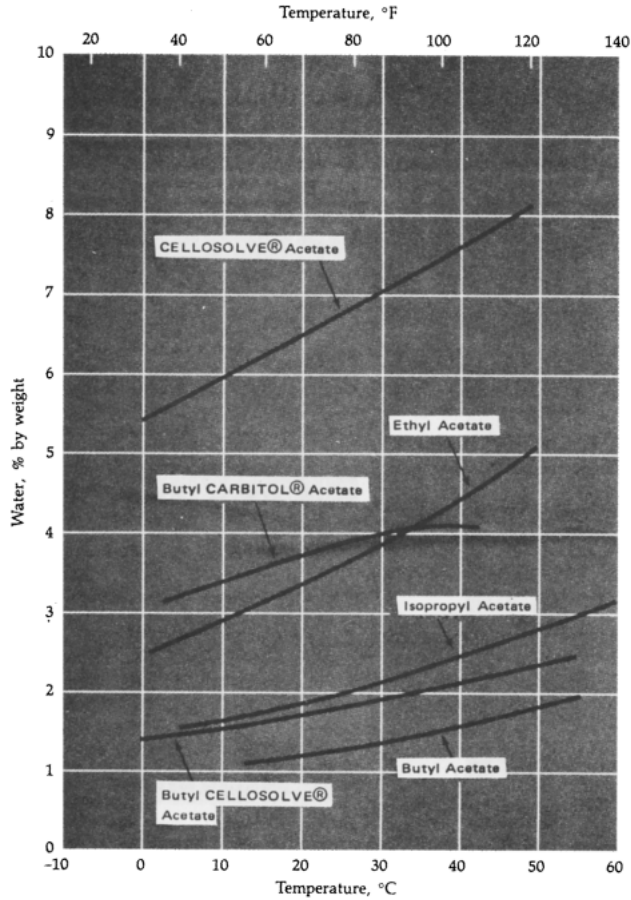


Table 15.49: (continued)

Relative Evaporation of Solvents

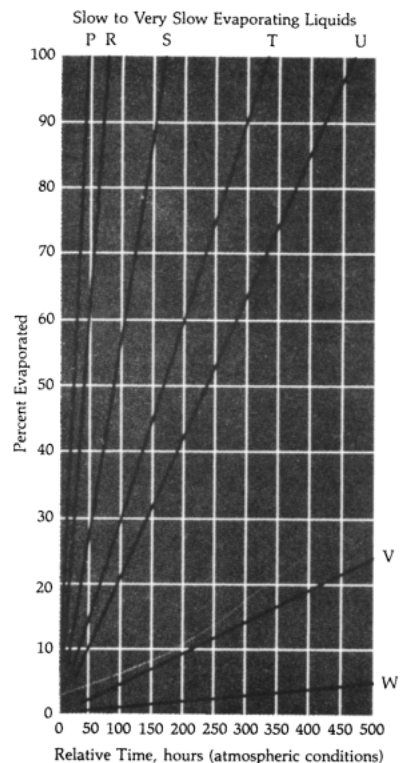
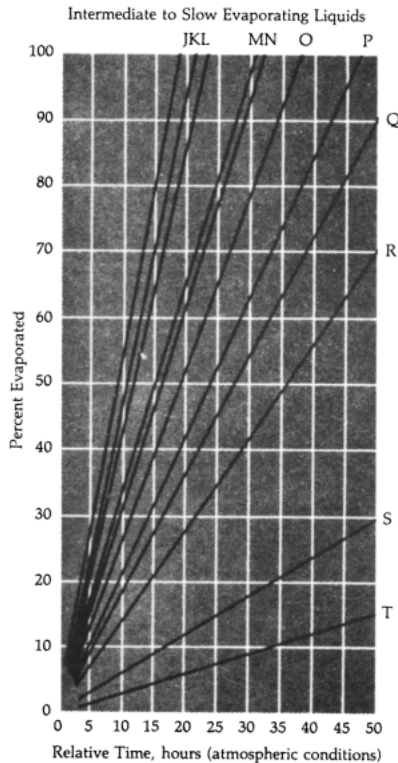
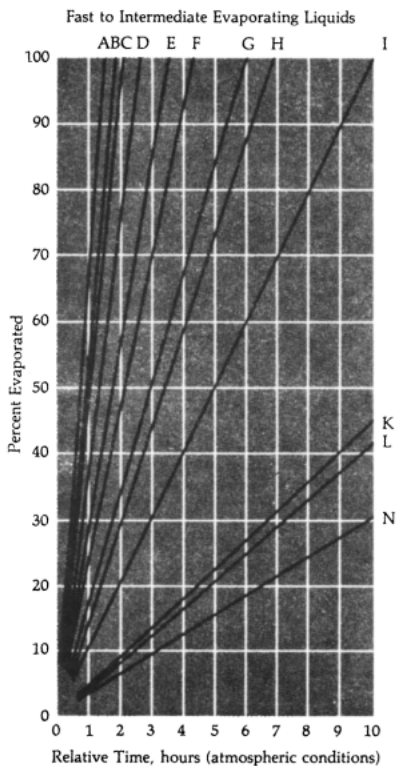



CHART KEY

- A Ethyl Acetate
- B Methyl Ethyl Ketone
- C Isopropyl Acetate
- D Ethanol, Anhydrous
- E Propyl Acetate
- F Isopropanol, Anhydrous
- G Methyl Isobutyl Ketone
- H Isobutyl Acetate
- I Butyl Acetate
- J Isobutanol
- K Butanol
- L Primary Amyl Acetate
- M CELLOSOLVE Solvent
- N Methyl CELLOSOLVE Acetate
- O Primary Amyl Alcohol
- P CELLOSOLVE Acetate
- Q Diisobutyl Ketone
- R Diacetone Alcohol (A/F)
- S Butyl CELLOSOLVE
- T Butyl CELLOSOLVE Acetate
- U Glycol Diacetate
- V CARBITOL Acetate
- W Butyl CARBITOL Acetate


(continued)

Table 15.49: (continued)

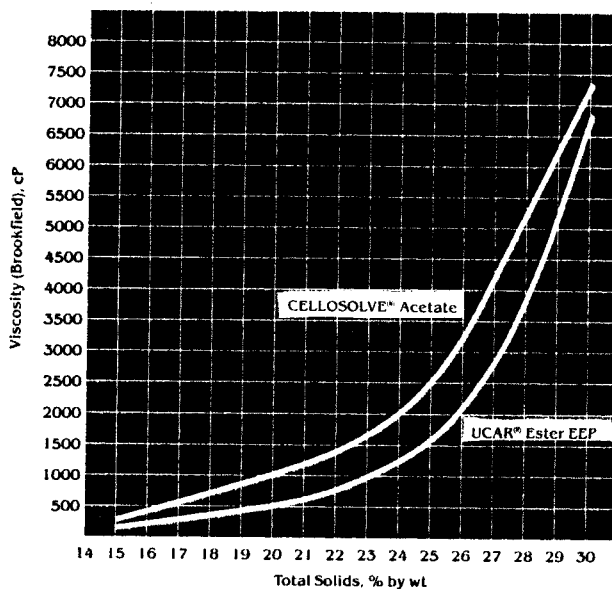Viscosity of UCAR[®] Phenoxy Resin PKHH Solutions



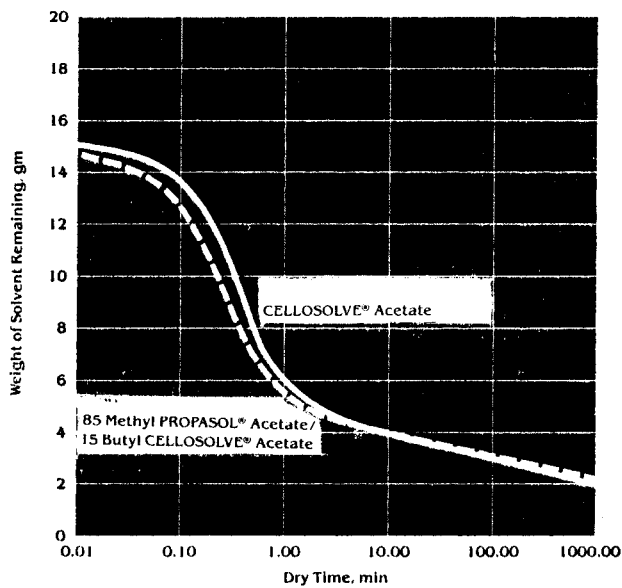Evaporation Profiles in an Automotive Refinish Thinner



HIGHER FATTY ACID ESTERS

Table 15.50: Emery Methyl Esters (63)

| | SPECIFICATIONS | | | | | TYPICAL COMPOSITION ¹ | | | | | | | | |
|-----------------------------------------|----------------|------------|---------------------------|---------------------------------|---------------------------|----------------------------------|--------------------------|-------------------------|-------------------------|---------------------------|---------------------------|--------------------------|------------------------|---------------------------|
| | Acid Value Max | Sap. Value | Iodine Value max. (range) | Color % Trans 440/550 nm., min. | Typical Melting Point, °C | Saturated Esters | | | | | | Unsaturated Esters | | |
| | | | | | | Caproate C ₆ | Caprylate C ₈ | Caprate C ₁₀ | Laurate C ₁₂ | Myristate C ₁₄ | Palmitate C ₁₆ | Stearate C ₁₈ | Oleate C ₁₈ | Linoleate C ₁₈ |
| EMERY® 2209 Methyl Caprylate-Caprate | 0.5 | 330-336 | 0.4 | 95/- | -30 | 3 | 55 | 40 | 2 | | | | | |
| EMERY® 2296 Methyl Laurate 96 | 0.5 | 258-263 | 0.5 | 95/- | 5 | | | 2 | 96 | 2 | | | | |
| EMERY® 2290 Methyl Laurate 90 | 0.5 | 258-262 | 0.5 | 95/- | 2 | | | 2 | 90 | 8 | | | | |
| EMERY® 2270 Methyl Laurate 70 | 0.5 | 251-255 | 0.5 | 95/- | -1 | | | 1 | 70 | 28 | 1 | | | |
| EMERY® 2214 Methyl Myristate 95 | 1.0 | 230-234 | 0.6 | 92/- | 17 | | | | 3 | 95 | 2 | | | |
| EMERY® 2216 Methyl Palmitate 95 | 0.2 | 206-210 | 0.2 | 92/- | 27 | | | | | 2 | 95 | 3 | | |
| EMERY® 2218 Methyl Stearate 95 | 0.5 | 186-192 | 1 | 71/98 | 36 | | | | | 4 | 95 | | 1 | |
| EMERY® 2219 Methyl Oleate | 4.0 | 188-192 | (68-88) | 71/98 | 18 | | | | | 4 | 24 | 58 | 14 | |
| EMERY® 2252 Methyl Coconate | 1.0 | 250-260 | 4-11 | 85/min | 4 | | 8 | 7 | 48 | 17 | 9 | 2 | 7 | 2 |
| EMERY® 2253 Methyl Coconate | 0.5 | 250-260 | (7-11) | 71/98 ² | 4 | | 8 | 7 | 48 | 17 | 9 | 2 | 7 | 2 |
| EMERY® 2254 Stripped Methyl Coconate | 1.0 | 237-247 | (5-10) | 90/- | — | | | Tr | 54 | 22 | 11 | 3 | 8 | 2 |
| EMERY® 2255 Methyl Palm Kernalate | 1.0 | 230-240 | 14-20 | 90/- | | | .25 | 1.5 | 50 | 17 | 9.5 | 3 | 16 | 3 |

¹ Typical compositions determined by GLC analysis, AOCS Ce 1-62. These compositions are not manufacturing specifications.² Not a specification.³ Color. Gardner 1963, max.

Table 15.51: Procter & Gamble Methyl Esters (39)

| Chemical Properties | CE-688* | CE-810 | CE-1095 | CE-1218 | CE-1270 | CE-1290 | CE-1295 | CE-1688 | CE-1897 |
|---------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|---------|---------|
| Saponification Value | | | 295-305 (302) | | | | | | 195-205 |
| Acid Value | 1.0 max (0.6) | 0.5 max (0.2) | 0.5 max (0.3) | 1.0 max (0.7) | 0.5 max (0.2) | 0.5 max (0.1) | 0.3 max (0.1) | 1.5 max | 1.0 max |
| Iodine Value | 14 max (5) | 0.6 max (0.2) | 0.6 max (0.3) | (8.9) | 0.8 max (0.1) | 0.8 max (0.1) | 0.10 max (0.07) | 60-70 | 85-95 |
| Moisture, (% KF) | 0.1 max (0.05) | 0.15 max (0.06) | 0.15 max (0.04) | 0.1 max (0.04) | 0.05 max (0.03) | 0.10 max (0.04) | 0.05 max (0.03) | 0.1 max | 0.1 max |
| Physical Properties | | | | | | | | | |
| Specific Gravity 25/25 C | 25 C (0.864) 25 C | 25 C (0.870) 25 C | 25 C (0.874) 25 C | 25 C (0.866) 25 C | 25 C (0.877) 25 C | 25 C (0.867) 25 C | 25 C (0.866) 25 C | | |
| Melting Point (C) | (-4) | (-29) | (-14) | (10) | (0) | (5) | (6) | | |
| %Transmittance @ 460 nm | 90 min (94) | 95 min (99) | 95 min (98) | 85 min (94) | 96 min (98) | 95 min (99) | 95 min (99) | 80 min | 90 min |
| Composition (GC%) | | | | | | | | | |
| C6 | (0.5) | 6.0 max (4) | | | | | | | |
| C8 | 7-9.5 (7.2) | 51-58 (55.9) | (0.4) | | (0.0) | (0.0) | 0.3 max (0.0) | | |
| C10 | (6.2) | 34-42 (39.3) | 95.0 min (96.6) | 0-3 (0.4) | 1.0 max (0.3) | 1.5 max (0.4) | 2.5 max (0.5) | | |
| C12 | 44.0-49.9 (47.3) | 1.0 max (0.5) | (1.7) | 52-57 (55.6) | 70.5-74.5 (73.0) | 90-94 (91.7) | 95 min (98.1) | 0.5 max | |
| C14 | (17.3) | | (0.2) | 19-24 (20.9) | 24-29 (26.3) | 6-9 (7.8) | 2.5 max (1.4) | 1.0 max | 1.0 max |
| C16 | 5.5-10.0 (9.7) | | | 8-12 (10.2) | 1.0 max (0.2) | 0.8 max (0.0) | 0.5 max (0.0) | 25-32 | 0.2 |
| C18 | (7.8) | | | 9-15 (12.3) | | | | 8 | 11 |
| C18=1 | | | | | | | | 53 | 73 |
| C18=2 | | | | | | | | 11 | 14 |
| CAS No. | 67762-37-2 | 67762-39-4 | 110-42-9 | 67762-26-9 | 67762-40-7 | 67762-40-7 | 111-82-0 | | |

*Not inventoried, requires negotiated lead time

Table 15.52: Stepan Esters (68)

| PRODUCT | INCI NOMENCLATURE | FORM @ 25°C | APPLICATIONS |
|---------------------------------------|--------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALCOHOL ESTERS | | | |
| KESSCO IPM | ISOPROPYL MYRISTATE | Liquid | IPM has a dry, velvety, non-oily feel due to its ready absorption into skin. Generally used in premium formulations for velvety emolliency. |
| KESSCO IPP | ISOPROPYL PALMITATE | Liquid | IPP is a dry, soft non-oily emollient generally used in economical formulations. Excellent solvent for mineral oil, silicone and lanolin. |
| KESSCO OCTYL PALMITATE | OCTYL PALMITATE | Liquid | Dry, light, silky emollient. Enhances gloss in hair grooming products. Can be used as a binder in pressed powder makeup. |
| KESSCO OCTYL ISONONANOATE | OCTYL ISONONANOATE | Liquid | Very dry, non-oily properties that allow the skin to breathe. Has the lowest freeze point (-30°C) of all alcohol esters. May be used in antiperspirants, hair sprays and creams/lotions. |
| KESSCO ICS | ISOCETYL STEARATE | Liquid | Premium emollient recommended for make-up formulations seeking a dry velvety feel. |
| KESSCO BS | BUTYL STEARATE | Liquid | Wetting agent for pigments and a fragrance solubilizer. |
| KESSCO 653 | CETYL PALMITATE | Flake | Cetyl Palmitate is a waxy ester that imparts good skin feel properties to cosmetics. It is used as a base in stick cosmetics and as an emollient thickener in creams and lotions. |
| KESSCO 654 | CETYL MYRISTATE | Flake | Similar to Kessco 653 but lower melting point (47-53°C). |
| GLYCEROL ESTERS | | | |
| KESSCO GMO | GLYCERYL OLEATE | Liquid | Effective water-in-oil emulsifier. Often used in bath oils as a lubricant and spreading agent. Imparts slip to creams. |
| KESSCO GDL | GLYCERYL DILAUATE | Solid | Semi-solid ester recommended for free flowing lotions. Imparts slight emolliency. |
| KESSCO GMS PURE | GLYCERYL STEARATE | Flake | High purity ester containing no soaps. Acts simultaneously as an emulsifier, opacifier and bodying agent. Used in creams, lotions, antiperspirants, hair care products and sunscreens. |
| KESSCO GMS 63F | GLYCERYL STEARATE | Flake | Emulsifier for creams and lotions |
| KESSCO GMS, S.E./A.S. | GLYCERYL STEARATE (and) PEG 100 STEARATE | Flake | Excellent emulsifier for low pH (3-5) systems. Is relatively insensitive to electrolytes in antiperspirants and cream rinses. |
| KESSCO GMS S.E. KESSCO GMS 24 S.E. | GLYCERYL STEARATE S.E. GLYCERYL STEARATE S.E. | Flake Flake | The S.E. grade allows the formulator to utilize GMS as a primary emulsifier for oil-in-water systems at a pH of 5-9. Anionic modified for broader emulsification properties. |
| KESSCO GDS | GLYCERYL DISTEARATE | Flake | Emulsifier with extremely low HLB compared to KESSCO GMS PURE, but with similar functionality. |
| SPECIALTIES | | | |
| STEPAN TAB-2 FLAKE | DI(HYDROGENATED) TALLOW PHTHALIC ACID AMIDE | Flake | Emulsion and suspension product for triglycerides, mineral oil, and silicones. |
| STEPAN SAB-2 | DI-STEARYL PHTHALIC ACID AMIDE | Flake | |
| KESSCO CETYL ALCOHOL | CETYL ALCOHOL | Flake | Emollient, emulsion stabilizer, and viscosity modifier for skin and hair conditioners. |

(continued)

Table 15.52: (continued)


| PRODUCT | INCI NOMENCLATURE | FORM @ 25°C | APPLICATIONS |
|------------------------------------------------|----------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GLYCOL ESTERS | | | |
| KESSCO EGMS | GLYCOL STEARATE | Flake | Excellent pearlizing agent for shampoos and liquid hand soap. |
| KESSCO EGMS 70 | GLYCOL STEARATE | Flake | Excellent pearlizing agent recommended for use in low solids formulations because it tends to increase viscosity. |
| KESSCO EGDS | GLYCOL DISTEARATE | Flake | Pearlizing agent for shampoos, handsoaps and bubble baths where no additional viscosity is required. |
| KESSCO EGAS | GLYCOL STEARATE (and) STEARAMIDE AMP | Flake | Pearlizing and bodying agent that imparts a soft, smooth skin feel to formulations due to the presence of a small amount of amide. |
| KESSCO DGMS KESSCO DGDS | PEG-2 STEARATE PEG-2 DISTEARATE | Flake Flake | Generally used as opacifiers in shampoos and lotions. Imparts emolliency and adds body to these types of formulations. |
| KESSCO DGS NEUTRAL | PEG-2 STEARATE | Flake | Used as an emulsifier and opacifier in creams and lotions. |
| KESSCO DGS S.E. | PEG-2 STEARATE (and) STEARIC ACID | Flake | Emulsifier for hair care products, creams, lotions, antiperspirants and sunscreens. |
| KESSCO PGMS PURE | PROPYLENE GLYCOL STEARATE | Flake | Good auxiliary emulsifiers and opacifiers. Has a melting point near body temperature and is used in suppositories, lipsticks and sunscreens. |
| KESSCO PGML E | PROPYLENE GLYCOL LAURATE | Liquid | Emollient and auxiliary emulsifier. Imparts a soft, velvety feel to cosmetic products. |
| KESSCO PGMS 8615 | PROPYLENE GLYCOL STEARATE S.E. | Flake | Emulsifier for creams and lotions. |
| KESSCO PGMS 534F | PROPYLENE GLYCOL STEARATE | Flake | Food grade auxiliary emulsifier. Also used in creams, lotions and suppositories. |
| POLYETHYLENE GLYCOL ESTERS | | | |
| KESSCO PEG 200-6000 MONO AND DILAURATES | PEG-4 to PEG-150 LAURATE AND DILAURATE | Liquids to Solids | Non-toxic and non-irritating nonionic emulsifiers that cover a wide HLB range. They act as viscosity modifiers, emollients, opacifiers, spreading agents, wetting and dispersing agents. They may be used in lotions, creams, make-up, bath oils, ointments, shampoos, conditioners, suppositories and sunscreen products. |
| KESSCO PEG 200-6000 MONO AND DIOLATES | PEG-4 to PEG-150 OLEATE AND DIOLATE | Liquids to Solids | |
| KESSCO PEG 200-6000 MONO AND DISTEARATES | PEG-4 and PEG-150 STEARATE AND DISTEARATE | Solids | |
| DREWPOL 3-1-0 | POLYGLYCERYL-3 OLEATE | Liquid | The DREWPOL polyglycerol esters comprise a relatively new class of emulsifiers for the cosmetic industry. These products range from hydrophilic monoesters to lipophilic deca-esters. The polyglycerol esters are effective nonionic emulsifiers in both oil-in-water and water-in-oil emulsions. |
| DREWPOL 6-1-0 | POLYGLYCERYL-6 OLEATE | Liquid | |
| DREWPOL 10-4-0 | POLYGLYCERYL-10 TETRAOLEATE | Liquid | |
| DREWPOL 10-10-0 | POLYGLYCERYL-10 DECAOLEATE | Liquid | |
| SPECIALTY OILS | | | |
| NEOBEE M-5 COSMETIC | CAPRYLIC/CAPRIC TRIGLYCERIDE | Liquid | The Neobee and Wecobee oils are derived from edible vegetable oils. The Neobee's are used as emollients in creams and lotions. The Wecobee's are used as a replacement for cocoa butter in cosmetic products. |
| WECOBEE S | HYDROGENATED VEGETABLE OIL | Flake | |
| WECOBEE M | HYDROGENATED VEGETABLE OIL | Solid | |

KESSCO®, DREWPOL®, NEOBEE®, and WECOBEE® are registered trademarks of the Stepan Company.

ADIPATES**Table 15.53: Mixture of Dimethyl Adipate and Dimethyl Glutarate (11)**

This mixture of dibasic esters is used as a high boiling solvent and as an intermediate.

| | | | |
|---------------------------------------|-------|--------------------------------|-------------------------|
| DIESTER CONTENT, WT. % MINIMUM | 99 | WATER CONTENT, WT. % MAXIMUM | 0.5 |
| DIMETHYL ADIPATE, WT. % | 30-45 | AVERAGE MOLECULAR WEIGHT | 165 |
| DIMETHYL GLUTARATE, WT. % | 55-70 | SPECIFIC GRAVITY | 1.082 - 1.090 @ 25/25°C |
| DIMETHYL SUCCINATE, WT. % MAX. | 3 | DISTILLATION RANGE, °C | 210 -225 |
| SOLUBILITY PARAMETERS (HANSEN SYSTEM) | | EVAPORATION RATE BuAc = 100 | <1 |
| POLAR BONDING | 3.29 | VISCOSITY @ 25°C, CENTIPOISE | 2.38 |
| HYDROGEN BONDING | 4.02 | FREEZING POINT | -13°C (APPROX.) |
| NON-POLAR BONDING | 7.03 | FLASH POINT | 219°F CLOSED CUP |
| SOLUBILITY PARAMETER | 8.75 | | |

Table 15.54: Mixture of Dimethyl Adipate, Dimethyl Glutarate and Dimethyl Succinate (11)

This dibasic ester mixture is used as a high boiling solvent in industrial and automotive coatings.

| | |
|---------------------------------------|-------------------------|
| DIESTER CONTENT, WT. % MINIMUM | 99 |
| DIMETHYL ADIPATE, WT. % | 20-30 |
| DIMETHYL GLUTARATE, WT. % | 40-60 |
| DIMETHYL SUCCINATE, WT. % | 20-30 |
| SOLUBILITY PARAMETERS (HANSEN SYSTEM) | |
| POLAR BONDING | 3.4 |
| HYDROGEN BONDING | 4.1 |
| NON-POLAR BONDING | 8.5 |
| SOLUBILITY PARAMETER | 10.1 |
| WATER CONTENT, WT. % MAXIMUM | 0.5 |
| AVERAGE MOLECULAR WEIGHT | 160 |
| SPECIFIC GRAVITY | 1.082 - 1.090 @ 25/25°C |
| DISTILLATION RANGE, °C | 196 - 225 |
| EVAPORATION RATE BuAc = 100 | <1 |
| VISCOSITY @ 25°C, CENTIPOISE | 2.39 |
| FREEZING POINT | -20°C (APPROX.) |
| FLASH POINT | 212°F TAG CLOSED |

Table 15.55: Dialkyl Adipate (75)

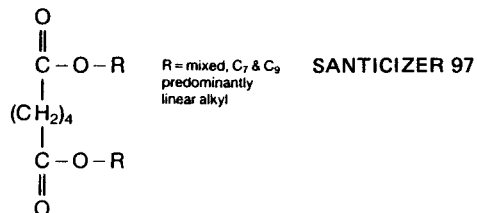


Table A. Properties

| | |
|----------------------------------------|--------------------|
| Molecular Weight | 370 |
| • Acidity (meq/100 gm. max) | 0.25 |
| • Appearance | Clear, oily liquid |
| • Color (APHA) [max.] | 50 |
| • Moisture (KF in Methanol) %, max. | 0.10 |
| • Refractive Index (@25°C) | 1.441 – 1.447 |
| • Specific Gravity (25°/25°C) | 0.916 – 0.924 |
| Density (@ 25°C) ca. lbs./gal. | 7.7 |
| Crystallizing Point (°C) | – 13 |
| Boiling Point @ 10mm Hg, °C | 224 |
| Vapor Pressure (mm Hg) @ 200°C | 3.3 |
| @ 250°C | 27 |
| Viscosity (Centistokes) @ 25°C | 12.8 |
| Surface Tension @ 25°C (dynes/cm) | 30.3 |
| Flash Point (C.O.C.) [°F.] | 400 |
| Fire Point (C.O.C.) [°F.] | 450 |
| Solubility In Water @ 25°C, % | <0.01 |
| CAS Number | 68515-75-3 |

• Specification

Table B. Comparison of Seven Commercial Low-temperature Plasticizers at Three Levels in PVC

| | Sant 97 | DOA | DNODA | DINA | DIDA | DOZ | DOS |
|-------------------------------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|---------|
| Flex Temperature, °C., Clash-Berg Method | | | | | | | |
| 35 PHR | -33.5 | -29.1 | -33.4 | -27.0 | -26.7 | -32.0 | -32.2 |
| 50 PHR | -56.7 | -52.9 | -55.0 | -48.8 | -49.4 | -54.4 | -54.7 |
| 67 PHR | -67.5 | -64.3 | -61.0 | -62.0 | -62.2 | -66.3 | -68.5 |
| Carbon Volatility, % Plasticizer lost, 24 hrs. at 87°C. | | | | | | | |
| 35 PHR | 10.2 | 13.2 | 9.8 | 5.5 | 3.2 | 4.3 | 2.1 |
| 50 PHR | 9.7 | 13.3 | 9.6 | 5.4 | 3.5 | 3.8 | 2.1 |
| 67 PHR | 9.8 | 13.1 | 9.7 | 5.0 | 3.0 | 3.8 | 2.1 |
| Shore A Hardness, 10 sec. reading | | | | | | | |
| 35 PHR | 92 | 91 | 93 | 95 | 96 | 92 | 94 |
| 50 PHR | 82 | 81 | 83 | 86 | 90 | 82 | 85 |
| 67 PHR | 71 | 71 | 72 | 76 | 80 | 73 | 74 |
| Water Sensitivity, 24 hrs. at 50°C., % water absorbed/% soluble matter lost | | | | | | | |
| 35 PHR | .32/.07 | .35/.07 | .36/.08 | .35/.05 | .37/.08 | .32/.04 | .31/.02 |
| 50 PHR | .31/.18 | .31/.16 | .31/.20 | .34/.13 | .32/.16 | .25/.09 | .23/.08 |
| 67 PHR | .33/.20 | .33/.25 | .32/.22 | .36/.15 | .31/.15 | .31/.09 | .26/.07 |
| Kerosene Extract, % Plasticizer lost, 24 hrs. at 23°C. | | | | | | | |
| 35 PHR | 24.6 | 13.5 | 30.4 | 23.4 | 49.8 | 19.4 | 31.4 |
| 50 PHR | 74.2 | 42.5 | 68.3 | 71.8 | 73.0 | 71.8 | 74.7 |
| 67 PHR | 77.0 | 72.7 | 76.3 | 75.7 | 80.4 | 74.9 | 82.8 |
| Loop Compatibility – Degree of exudation: 0 = dry, no exudation; 10 = dripping wet | | | | | | | |
| 35 PHR 4 hours | 5 | 4 | 5 | 5 | 5 | 5 | 5 |
| 1 day | 7 | 5 | 7 | 7 | 7 | 7 | 7 |
| 1 week | 5 | 0 | 5 | 7 | 7 | 7 | 7 |
| 50 PHR 4 hours | 7 | 5 | 7 | 7 | 7 | 7 | 7 |
| 1 day | 7 | 7 | 8 | 8 | 8 | 8 | 8 |
| 1 week | 0 | 0 | 0 | 7 | 8 | 5 | 5 |
| 67 PHR 4 hours | 7 | 6 | 7 | 7 | 7 | 7 | 7 |
| 1 day | 6 | 5 | 6 | 7 | 8 | 7 | 7 |
| 1 week | 0 | 0 | 0 | 0 | 6 | 0 | 0 |
| Cumulative rating (lower is better) | 44 | 32 | 45 | 55 | 63 | 53 | 53 |

Table C. Adipate Performance in Plastisols (65 PHR)

| Brookfield viscosity, poises, 50 RPM (HAT #6 Spindle) | | | |
|-------------------------------------------------------|---------|----------------|------------------|
| | | Santicizer® 97 | Diocetyl adipate |
| 23°C | Initial | 8 | 12 |
| | 7 days | 10 | 20 |
| | 28 days | 12 | 26 |
| 40°C | Initial | 8 | 10 |
| | 7 days | 17 | 32 |
| | 28 days | 24 | 43 |
| 50°C | Initial | 8 | 11 |
| | 7 days | 31 | 42 |
| | 28 days | 51 | 62 |
| Severs | 10 psi | 8 | 8 |
| Viscosity | 50 psi | 7 | 7 |
| poises | 100 psi | 7 | 6 |

Table 15.56: Dioctyl Adipate (75)




Table A. Properties

| | |
|----------------------------------------------------------------|--------------------|
| Molecular Weight | 371 |
| • Acidity (meq/100 gm. max) | 0.25 |
| • Appearance | Clear, oily liquid |
| • Color (APHA) [max.] | 25 |
| • Moisture (KF in Methanol) %, max. | 0.10 |
| • Odor | Mild |
| • Refractive Index (@25°C) | 1.444 – 1.448 |
| • Specific Gravity (25°/25°C) | 0.921 – 0.927 |
| Density (@ 25°C) ca. lbs./gal. | 7.72 |
| Crystallizing Point (°C) | < – 70 |
| Pour Point (°C) | – 65 |
| Boiling Point @ 10mm Hg, °C | 224 |
| Vapor Pressure (mm Hg) @ 200°C @ 250°C | 2.3 32 |
| Viscosity (Centistokes) @ 37.8°C @ 98.9°C | 8.2 2.4 |
| Surface Tension @ 20°C (dynes/cm) | 29 |
| Thermal Expansion Coefficient @ 10° – 40°C (cc/cc/°C) | 0.00078 |
| Flash Point (C.O.C.) [°F.] | 377 |
| Fire Point (C.O.C.) [°F.] | 450 |
| Solubility in Water @ 25°C, % | < 0.01 |
| CAS Number | 103-23-1 |

• Specification

Table B. Dioctyl Adipate Performance in PVC (40 Mil Sheet)

| | (30%) 43 PHR | (40%) 67 PHR | (50%) 100 PHR |
|--------------------------------------------------------------------------|-----------------|-----------------|------------------|
| Volatility (% Lost) (Activated Carbon) | 14 | 13 | 14 |
| Low-temperature Flex, Tf °C | – 46 | – 66 | < – 70 |
| Water immersion (24 hours): % soluble matter lost % water absorbed | 0.05 0.40 | 0.10 0.66 | 0.07 0.82 |
| Kerosene extraction (% plasticizer lost) | 19 | >70 | >70 |
| Shore "A" Hardness | 83 | 67 | 48 |
| Migration, Linde Silica: | | | |
| 1 day | 5.1 | 7.5 | 11.0 |
| 3 days | 9.5 | 13.5 | 22.0 |
| 7 days | 14.6 | 21.0 | 28.0 |
| Tensile, p.s.i. | 2560 | 1870 | 1090 |
| Elongation, % | 390 | 450 | 460 |
| Modulus @ 100% Elongation | 1390 | 730 | 380 |
| Flammability (Limiting O ₂ Index)* | 22.6 | 21.0 | 19.6 |
| Heat Stability | Good | Good | Good |
| Migration Resistance to Nitrocellulose | Poor | Poor | Poor |
| Fluxing Rate | Fair | Fair | Fair |
| Electrical Properties | Fair | Fair | – |

*The Oxygen Index Test results are not intended to reflect performance of these or any other materials under actual fire conditions. Each user should determine independently whether potential fire hazards are associated with the finished product and whether DOA is suitable for the particular use.

Table C. Dioctyl Adipate Performance in Plastisol Formulation


| Viscosity, poises Brookfield HAT #6 Spindle 50 PRM | | 65 PHR |
|----------------------------------------------------|---------|--------|
| 23° | Initial | 12 |
| | 7 Days | 20 |
| | 28 Days | 26 |
| 40° | Initial | 10 |
| | 7 Days | 32 |
| | 28 Days | 43 |
| 50° | Initial | 11 |
| | 7 Days | 42 |
| | 28 Days | 62 |
| Severs | 10 psi | 8 |
| | 50 psi | 7 |
| | 100 psi | 6 |
| Yield value, dynes/cm ² | | 20 |
| Flow Index | | 0.6 |
| Gel Temperature, °C | | 80 |
| Fusion, Relative Temperature, °C | | 175 |
| *Air-release Rate | | Fast |
| *Resilience, steel ball, inches | | 10.9 |

*Efficiency Conc. Adj. to "60" Shore A Hardness

OXALATES

Table 15.57: Diethyl Oxalate (2)

Ethyl Ethanedioate



Diethyl oxalate is a water-white liquid with a mild odor. It is used as a slow-evaporating nitrocellulose solvent, in special lacquers for fixing rare salts on the cathode of radio tubes and in organic synthesis.

| | |
|-----------------------------------------------------------------------------|---------------------------------------------------------------|
| Acidity (as oxalic) | 0.05% by wt, max |
| Blush resistance at 60° F (10% ‡ sec. R.S. nitrocellulose so- lution) | Clear 90% Relative humidity Blush |
| Coefficient of expansion per 1°F | 0.00056 |
| per 1°C | 0.00101 |
| Color | Water-white |
| Dilution ratio | |
| Toluol | 3.5 |
| Petroleum naphtha | 0.7 |
| Distillation range | |
| Below 180°C | None |
| Below 182°C | Not more than 10% |
| Below 188°C | Not less than 90% |
| Above 190°C | None |
| Dryness at 20°C | Miscible without turbidity with 20 volumes 60° Bé gasoline |
| Flash point (Open Cup) | 168°F |
| Non-volatile matter | 0.005 gm per 100 cc, max |
| Odor | Mild, non-residual |
| Purity | 99% min |
| Specific gravity at 20/20°C | 1.075-1.079 |
| Water solubility at 25°C | 10 cc solvent dissolves 1.5 cc water |
| Viscosity (10% ‡ sec. R.S. ni- trocellulose solution) | 380 centipoises |
| Weight per gal at 20°C | 8.96 lbs (approx) |

Table 15.58: Dibutyl Oxalate (2)




Dibutyl oxalate is a high-boiling, water-white liquid with a mild odor and having a tendency to hydrolyze and split off oxalic acid. It is miscible with most alcohols, ketones, oils and hydrocarbons, and is a solvent for benzyl abietate, cellulose esters and ethers, "Cumar" resins, ester gum, copal ester, "Glyptal" resins and mastic. It is used in nitrocellulose lacquers as a plasticizing solvent for the purpose of fixing rare earth salts on cathode elements, and in organic synthesis.

| | |
|----------------------------------------------------------------------------|---------------------------------------------------------------|
| Acidity (as oxalic) | 0.05% by wt, max |
| Blush resistant at 90°F (1.0% R.S. ‡ sec. nitrocellulose so- lution) | Clear 90 Relative humidity Blush |
| Coefficient of expansion per 1°F | 0.00053 |
| per 1°C | 0.00095 |
| Color | Water-white |
| Dilution ratio | |
| Toluol | 2.3 |
| Petroleum naphtha | 1.0 |
| Distillation range: | |
| Below 240°C | Not more than 5% |
| Below 248°C | Not less than 90% |
| Above 255°C | None |
| Dryness at 20°C | Miscible without turbidity with 20 volumes 60° Bé gasoline |
| Freezing point | -30.0°C |
| Non-volatile matter | 0.005 gm/100 cc, max |
| Solubility of water in solvent at 25°C | 0.5% by vol |
| Specific gravity at 20/20°C | 0.989-0.993 |
| Viscosity (10% ‡ sec. nitrocellu- lose solution) | 800 centipoises |
| Weight per gal at 20°C | 8.24 lbs |

Table 15.59: Diamyl Oxalate (2)


Diamyl oxalate is a colorless, oily liquid miscible with most lacquer solvents, oils and hydrocarbons. It is a solvent for ester gum, copal ester, "Cumar" resins, alkyd resins, mastic, nitrocellulose and shellac. It is used as a plasticizer and in paint and varnish removers. Like other oxalates, it has a tendency to hydrolyze.

| | |
|------------------|--------|
| Boiling point | 265°C. |
| Flash point | 116°C. |
| Specific gravity | 0.97 |

LACTATES**Table 15.60: Methyl Lactate (2)**

Methyl lactate is a water-white liquid, completely miscible with water and most organic liquids. It is a solvent for nitrocellulose, cellulose acetate, cellulose acetobutyrate and cellulose acetopropionate. It is used in the manufacture of lacquers and dopes where it contributes high tolerance for diluents, good flow and bluish resistance.

| | |
|-----------------------------|------------------------------------------------------------|
| Acidity (as lactic) | 0.15% by wt, max |
| Boiling point | 144.8°C |
| Color | Water-white |
| Distillation range: | |
| Below 115°C | None |
| Between 141°C and 145°C | Not less than 60% |
| Above 155°C | None |
| Flash point | 51.7°C |
| Heat of combustion | 4778 calories per gram |
| Freezing point | Approx 66°C |
| Non-volatile matter | 0.01 gram per 100 cc, max |
| Purity | 95% min |
| Refractive index at 20°C | 1.4131 |
| Specific gravity at 20/20°C | 1.067 to 1.067 |
| Water at 20°C | No turbidity when mixed with 19 volumes of 60° Bé gasoline |
| Weight per gal at 68°F | 9.09 lbs |

Table 15.61: Ethyl Lactate (2)

Ethyl lactate is a colorless and almost odorless liquid, which, upon evaporation, will sometimes develop a disagreeable odor. This is owing to the lactides, or inner anhydrides, contained in the lactic acid made by fermentation. It is miscible with water, alcohols, ketones, esters, hydrocarbons and oils. Ethyl lactate will dissolve cellulose acetate and nitrate and many of the ethers of cellulose. It is also a solvent for basic dyes, alkyd resins, kauri, manila, pontianac, rosin, shellac and vinyl resins. Ethyl lactate has high solvent power and equally high tolerance for nonsolvents and diluents. These exceptional properties are accounted for by the existence of both an alcohol and an ester group in its molecule.


Its rate of evaporation is slow but this is desirable for brushing lacquers. The presence of ethyl lactate in a solvent mixture imparts good working qualities and good flow, and permits the application of a thin coat on almost any surface. The resulting films are smooth and uniform, although at times the film will remain soft for a longer period than is anticipated. Its solvent action is slower than that of butyl or amyl acetate and the resulting solution has a high viscosity. However, it will tolerate two or three times as much nonsolvent or diluent. In fact, a solution of pyroxylin in ethyl lactate will tolerate the addition of 25 percent water without precipitation. As far as water tolerance is concerned it has no rival in the field of solvents. Ethyl lactate is useful as a lacquer solvent for cellulose nitrate, acetate and ethers. It is used in the preparation of stencil sheets, incandescent mantle lacquers and in laminated glass.

(continued)

Table 15.61: (continued)

| <i>Physical Properties and Specifications</i> | |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------|
| Acidity (as lactic) | 0.08%, max |
| Color | Water-white |
| Distillation range: | |
| Below 102°C | None |
| Below 139°C | Not more than 10% |
| Below 155°C | Not less than 90% |
| Above 173°C | None |
| Dryness | Miscible without turbidity with 20 vols 60° Bé gasoline at 20°C |
| Non-volatile matter | 0.005 g/100 cc, max |
| Odor | Mild, non-residual |
| Purity | 96% min |
| Specific gravity at $\frac{20^\circ\text{C}}{20^\circ\text{C}}$ | 1.020-1.036 |
| Blush resistance at 90°F (10% $\frac{1}{4}$ -sec. R.S. nitrocellulose sol.) | Clear 80% Relative humidity Blush 85% |
| Coefficient of expansion | { 0.00058/1°F { 0.00104/1°C |
| Dilution ratio | 5.5 with toluene 0.8 with petroleum naphtha |
| Evaporation rate at 95°F | |
| Per cent | 5 25 50 75 90 95 |
| Minutes | 4 23 47½ 73 92½ 101 |
| Flash point | 129°F. (approx) |
| Viscosity (10% $\frac{1}{4}$ -sec. R.S. nitrocellulose solution) | 195 centipoises |
| Water solubility | Soluble in all proportions (25°C) |


Table 15.62: Butyl Lactate (2)



Butyl lactate is a colorless liquid having a mild odor. The commercial grade contains condensation products and its physical and chemical properties will vary. It is miscible with many of the lacquer solvents, diluents and oils. It will dissolve such substances as cellulose esters, "Cumar" resins, ester gum, copal ester, alkyd resins, mastic and shellac. It has a high tolerance for nonsolvents and it evaporates slowly. Its presence in a solvent mixture will impart brilliance, gloss, adhesion, flexibility and tenacity to the film. It is used as a solvent in lacquers, in stencil manufacture and in lithographic and printing inks. It is also used as an anti-skinning agent, as an intermediate, and in perfumes.

| | |
|-----------------------------------------------------------------|-----------------------------------------------------------------|
| Purity | 96% ester by wt, min |
| Specific gravity at $\frac{20^\circ\text{C}}{20^\circ\text{C}}$ | 0.974 to 0.984 |
| Acidity (as lactic) | 0.15% max |
| Water | No turbidity when mixed with 19 vols of 60° Bé gasoline at 20°C |
| Non-volatile matter | 0.01 g per 100 cc, max |
| Color | Water-white |
| Distillation range | |
| Below 140°C | None |
| Between 155°C and 195°C | Not less than 60 per cent |
| Between 187°C and 189°C | Not less than 90 per cent |
| Dry point | Not above 200°C |
| Molecular weight | 146.11 |
| Odor | Mild (No residual odor) |
| Flash point | 71°C (159.8°F) |
| Freezing point | -43°C |
| Weight per gallon | 8.15 lbs. (68°F) |
| Solubility in water | 3.4% by vol (25°C) |
| Solubility of water in butyl lactate | 13.0% by vol (25°C) |
| Refractive index | 1.42162 (20°C) |
| Vapor pressure | 0.4 mm Hg (20°C) |
| Heat of vaporization | 77.4 cal/g (20°C) |

Table 15.63: Amyl Lactate (2)



Amyl lactate is a colorless to pale yellow nontoxic liquid with an odor like that of brandy. Its composition varies containing lacticides among other things. It is miscible with alcohols, ketones, esters, hydrocarbons, oils, and so forth. It is a solvent for cellulose ethers, "Cumar" resins, copal esters, mastic, nitrocellulose and shellac, and will dissolve alkyl resins when combined with alcohol. It is used as a plasticizer for cellulose derivatives.

| | |
|-------------------------------|-------------------------|
| Acidity (as lactic) | 0.05% by wt., max. |
| Color | Water-white |
| Distillation range at 20. mm. | 100% between 75°-150°C. |
| Flash point | 175°F. |
| Purity | At least 95%, min. |
| Specific gravity at 20°C. | 0.954-0.966 |
| Weight per gal. | 7.99 lbs. |

Table 15.64: Physical Properties of Lactates (2)

| | B.P. | | SP. GR. | REFRACTIVE INDEX | SAPONIFICATION VALUE | | B.P. | | SP. GR. | REFRACTIVE INDEX | SAPONIFICATION VALUE | | |
|------------------------|---------------------|-----|----------------------|--------------------------------|----------------------|--------------------------|---------------------------------------------------|-------|---------|----------------------|--------------------------------|-------|-----|
| | °C | Mm. | | | Calcd. | Found | °C | Mm. | | | Calcd. | Found | |
| Lactic Esters | | | | | | Acetoxypropionate Esters | | | | | | | |
| Methyl | 144.8 | 760 | d_{20}^{25} 1.0898 | n_D^{20} 1.4132 ^b | | | Methyl | 171.5 | 760 | d_{20}^{25} 1.088 | n_D^{20} 1.4111 | | |
| Ethyl | 154.5 | 760 | d_{20}^{25} 1.0308 | n_D^{20} 1.4121 ^b | | | Ethyl | 177 | 733 | d_{20}^{25} 1.0458 | n_D^{20} 1.4065 ^a | | |
| n-Propyl | 86 | 40 | d_{20}^{25} 0.996 | n_D^{20} 1.4167 ^b | | | n-Propyl | 195-6 | 766 | d_{20}^{25} 1.0163 | n_D^{20} 1.4123 | | |
| Isopropyl | 166-8 | 760 | d_{20}^{25} 0.998 | n_D^{20} 1.4082 ^b | | | Isopropyl | 182-3 | 765 | d_{20}^{25} 0.9920 | n_D^{20} 1.4058 | | |
| n-Butyl | 185 | 760 | d_{20}^{25} 0.973 | n_D^{20} 1.4214 ^b | | | n-Butyl | 213-4 | 767 | d_{20}^{25} 1.0001 | n_D^{20} 1.4147 | | |
| Isobutyl | 96 | 40 | d_{20}^{25} 0.971 | n_D^{20} 1.4183 ^b | | | Isobutyl | 205 | 763 | d_{20}^{25} 0.9952 | n_D^{20} 1.4140 | | |
| sec-Butyl ^c | 180 | 760 | d_{20}^{25} 0.974 | | | | n-Amyl | 226-7 | 763 | d_{20}^{25} 0.9822 | n_D^{20} 1.4199 | | |
| n-Amyl | 112 | 40 | d_{20}^{25} 0.952 | n_D^{20} 1.4254 ^b | | | Isoamyl | 221-2 | 763 | d_{20}^{25} 0.9838 | n_D^{20} 1.4190 | | |
| Isoamyl | 82 | 7 | d_{20}^{25} 0.9614 | n_D^{20} 1.4240 | 350 | 353 | n-Hexyl | 135 | 17 | d_{20}^{25} 0.9770 | n_D^{20} 1.4232 | 519 | 519 |
| n-Hexyl | 75 | 2 | d_{20}^{25} 0.9533 | n_D^{20} 1.4290 | 322 | 322 | 2-Ethyl butyl | 127 | 14 | d_{20}^{25} 0.9822 | n_D^{20} 1.4245 | 519 | 522 |
| 2-Ethyl butyl | 104 | 12 | d_{20}^{25} 0.9615 | n_D^{20} 1.4307 | 322 | 321 | 2-Ethyl hexyl | 145 | 13 | d_{20}^{25} 0.9829 | n_D^{20} 1.4298 | 480 | 462 |
| 2-Ethyl hexyl | 112 | 3.6 | d_{20}^{25} 0.9405 | n_D^{20} 1.4358 | 277 | 278 | Lauryl | 165 | 4 | d_{20}^{25} 0.9304 | n_D^{20} 1.4373 | 373 | 370 |
| Lauryl | 150-3 | 4 | d_{20}^{25} 0.9108 | n_D^{20} 1.4433 | 217 | 212 | Phenyl ethyl | 139 | 4 | d_{20}^{25} 1.0983 | n_D^{20} 1.4896 | 475 | 476 |
| Phenyl ethyl | 124 | 4 | d_{20}^{25} 1.0979 | n_D^{20} 1.5073 | 289 | 293 | Acetoxyethyl (glycol mono- lactate diacetate) | 145 | 10 | d_{20}^{25} 1.1489 | n_D^{20} 1.4297 | | |
| Glycol ^d | 140 | 10 | d_{20}^{25} 1.1967 | n_D^{20} 1.4452 | 419 | 413 | Benzyl | 145.8 | 4 | d_{20}^{25} 1.1227 | n_D^{20} 1.4874 | | |
| Glycerol ^d | 175-80 ^e | 2 | | | | | Glycerol monolactate tri- acetate ^e | | | | | | |
| Benzyl | 134 | 4 | d_{20}^{25} 1.1355 | n_D^{20} 1.5049 | | | | | | | | | |
| Stearyl | 180 ^e | 2 | | | | | | | | | | | |

^a Where no reference is given, the properties were determined by the authors.

^b Properties not given in the reference but determined by the authors.

^c Compounds not prepared by authors.

^d Monolactate.


^e Decomposed.

CARBONATES

Table 15.65: Diethyl Carbonate (2)

Ethyl Carbonate


DIATOL (contains 90% diethyl carbonate)



| | | | |
|-----------------------------------------------------------------------|---------------------------------------------------------|----------------------------------------|-----------------------------------|
| Acidity (as carbonic) | 0.02% by wt, max | Evaporation rate at 95°F (in minutes) | |
| Blush resistance at 90°F (10% ‡ sec. R.S. nitrocellulose solution) | Clear 85% Blush 90% | 5% | 1‡ |
| | | 25% | 7‡ |
| | | 50% | 14‡ |
| | | 75% | 24 |
| | | 90% | 31‡ |
| | | 95% | 34‡ |
| Boiling point | 180°C | Flash point | 89°F |
| Coefficient of expansion per 1°F | 0.00066 | Freezing point | 48.2°C |
| per 1°C | 0.00119 | Non-volatile matter | Not more than 0.005 gm per 100 cc |
| Color | Water-white | Purity | 98-100% |
| Dilution ratio | | Solubility in water | 69% by wt |
| Toluol | 0.6 | Solubility of water in solvent at 25°C | 1.4% by vol |
| Petroleum Naphtha | 0.4 | Specific gravity at 20/20°C | 0.973-0.977 |
| Distillation range: | | Vapor pressure at 103°C | 54 mm Hg |
| Below 120°C | None | Weight per gal at 20°C | 8.11 lbs (approx) |
| Below 128°C | Not less than 90% | | |
| Above 130°C | None | | |
| Dryness at 20°C | Miscible without turbidity with 20 vols 60° Bé gasoline | | |

Table 15.66: JEFFSOL Carbonates (48)

JEFFSOL Ethylene Carbonate
(CAS 96-49-1)

STRUCTURE

Mol. wt. 88.06

DESCRIPTION

A low-melting point solid, practically odorless and colorless.

SALES SPECIFICATIONS


| | |
|---------------------------|----------------------------------------------------------------|
| Appearance | Melt shall be clear and substantially free of suspended matter |
| Color, Pt-Co | 40 max. (supercooled liquid) |
| Assay, wt. % ¹ | 99.5 min. |
| Ethylene glycol, wt. % | 0.2 max. |
| Water, wt. % ² | 0.1 max. |

TYPICAL PROPERTIES

| | |
|------------------------------|-----------|
| Boiling point, 760 mm Hg, °C | 248.2 |
| Flash point, PMCC, °C | 160 |
| Melting point, °C | 36.4 |
| Weight, lb/gal, 20°C | 11.0 |
| UEL, (v/v) at 200°C | 26.8% |
| LEL, (v/v) at 200°C | 4.5% |
| Autoignition temp. | 447-450°C |

¹GC Assay on water free basis²Karl Fisher Assay

JEFFSOL Propylene Carbonate
(CAS 108-32-7)

STRUCTURE

Mol. wt. 102.09

TYPICAL PROPERTIES

| | |
|-----------------------------|--------------------------|
| Boiling point, 760 mm, °C | 242 |
| Flash point, PMCC, °F | 275 |
| Melting point, °C | -49.2 |
| Vapor pressure, mm Hg, 20°C | 0.02 |
| Weight, lb/gal, 20°C | 10.1 |
| Ash, wt. % | 0.01 max. |
| Specific gravity, 20/20°C | 1.203 min. 1.210 max. |
| UEL, (v/v) at 200°C | 26.8% |
| LEL, (v/v) at 200°C | 4.5% |
| Autoignition temperature | 430°C |

DESCRIPTION

A clear, mobile, hygroscopic liquid at room temperature.

SALES SPECIFICATIONS

| | |
|---------------------------|--------------------------------------------------|
| Appearance | Clear and substantially free of suspended matter |
| Color, Pt-Co | 40 max. |
| Assay, wt. % ¹ | 99.7 min. |
| PG, wt. % | 0.2 max. |
| Water, wt. % ² | 0.1 max. |

(continued)

Table 15.66: (continued)

| Solvent | Temperature | Dielectric Constants of Mixtures | | | | | |
|------------|-------------|----------------------------------|------|------|------|------|-------|
| | | JEFFSOL EC, WT % | | | | | |
| | | 0 | 20 | 40 | 60 | 80 | 100 |
| Benzene | 25°C | 2.27 | 9.47 | 21.2 | 38.6 | 62.8 | Solid |
| | 40°C | 2.24 | 9.03 | 20.0 | 36.1 | 58.5 | 89.1 |
| Methanol | 25°C | 32.6 | 39.1 | 47.4 | 58.6 | 74.0 | Solid |
| | 40°C | 29.8 | 35.9 | 43.7 | 54.0 | 68.5 | 89.1 |
| JEFFSOL PC | 25°C | 65.0 | 69.1 | 74.6 | 80.5 | 87.2 | Solid |
| Water | 25°C | 78.5 | 80.5 | 81.6 | 83.3 | 86.4 | Solid |

JEFFSOL PC Solubility

| Substance | g Solute in 100 g JEFFSOL PC at 25°C | Substance | g Solute in 100 g JEFFSOL PC at 25°C |
|---------------------------------------------------|--------------------------------------------|-------------------------------------------------------|--------------------------------------------|
| Acetone | ∞ | Carbon tetrachloride | 100 |
| Benzene | ∞ | Castor oil | <1 |
| n-Butanol | ∞ | Cellulose acetate | >10(30°C) |
| 2-Butoxyethanol | ∞ | Cellulose acetate butyrate | >10(30°C) |
| Chloroform | ∞ | CoCl ₂ · 6H ₂ O | 3.0(40°C) |
| Dibutyl sebacate | ∞ | Co(NO ₃) ₂ · 6H ₂ O | 25.4(40°C) |
| Diethylene glycol | ∞ | Coumarone-indene | >10(110°C) |
| Diethylene glycol monobutyl ether | ∞ | DDT | 17 |
| Diethylene glycol monomethyl ether | ∞ | Diocetyl sebacate | 2 |
| Diethyl ether | ∞ | Epichlorohydrin-bisphenol | >10(30°C) |
| Di(2-ethylhexyl) phthalate | ∞ | Ester gum | >10(120°C) |
| Dimethylformamide | ∞ | Ethyl cellulose | >10(145°C) |
| Ethanol | ∞ | Gum shellac | >10(175°C) |
| Ethyl acetate | ∞ | n-Heptane | 4.1 |
| Ethylene dichloride | ∞ | HgCl ₂ | 21.0(40°C) |
| Ethylene glycol | ∞ | Lignin | >10(30°C) |
| Methanol | ∞ | Lindane | 18 |
| 2-Methoxyethanol | ∞ | Methyl chloride | 4.1(40°C) |
| Methyl ethyl ketone | ∞ | NiCl ₂ · 6H ₂ O | 0.4(40°C) |
| Nonylphenol | ∞ | Ni(NO ₃) ₂ · 6H ₂ O | 5.8(40°C) |
| Ortho-nitrobiphenyl | ∞ | Nitrocellulose | >10(30°C) |
| Polyoxyethylene glycols (mol. wt. 400 and 600) | ∞ | Nylon | >10(190°C) |
| Propylene oxide | ∞ | Polyacrylonitrile | 10(90°C) |
| JEFFSOL EC | ∞ | Polyoxyethylene glycols (mol. wt. 1000 and 4000) | >100 |
| Toluene | ∞ | Polyvinyl chloride | >10(100°C) |
| Tricresyl phosphate | ∞ | Polyvinyl chloride- polyvinyl acetate | 10(30°C) |
| Triethylene glycol di-2-ethyl hexoate | ∞ | Polyvinyl chloride- polyvinylidene chloride | 10(130°C) |
| Xylene | ∞ | Polyvinylidene chloride- polyacrylonitrile | 10(110°C) |
| Acetylene | 0.6(40°C) | Rosin, dibasic acid modified | >10(120°C) |
| Alkyd resin, long oil- nonoxidizing | >10(60°C) | Tri(2-ethylhexyl) phosphate | 5 |
| Camphor | 80 | Urea | <1 |
| | | Water | 8.3 |


(continued)

Table 15.66: (continued)

JEFFSOL EC Solubility

| Substance | g Solute in 100 g JEFFSOL EC at 40°C | Substance | g Solute in 100 g JEFFSOL EC at 40°C |
|-------------------------------------------------------|--------------------------------------------|-------------------------------------------------------|--------------------------------------------|
| Benzene | ∞ | Coumarone-indene | >10(190°C) |
| Butyl acetate | ∞ | Dibutyl sebacate | <2 |
| Chloroform | ∞ | Diocetyl sebacate | <1 |
| Dichloroethyl ether | ∞ | Di(2-ethylhexyl) phthalate | <2 |
| Ethanol | ∞ | Epichlorohydrin-bisphenol | >10 |
| Ethyl acetate | ∞ | Ester gum | >10(200°C) |
| Ethylene dichloride | ∞ | Gum shellac | >10(160°C) |
| Formamide | ∞ | HgCl ₂ | 49 |
| Methanol | ∞ | Lignin | >10 |
| Methylene dichloride | ∞ | Naphthalene | 15 |
| Nonylphenol | ∞ | Ni(NO ₃) ₂ · 6H ₂ O | 74 |
| JEFFSOL PC | ∞ | Nitrocellulose | >10 |
| Toluene | ∞ | Nylon, Type 8 | |
| Tricresyl phosphate | ∞ | molding powder | >10(130°C) |
| Water | ∞ | Polyacrylonitrile | >10 |
| | | Polyoxyethylene glycols | 100 |
| | | Rosin, dibasic acid | |
| Acetylene | 0.6 | modified | >10(205°C) |
| Alkyd resin, long oil-nonoxidizing | >10(160°C) | Sulfur dioxide | 26 |
| Camphor, USP | 55-60 | Triethylene glycol | |
| Castor oil, USP | <1 | di-2-ethyl hexoate | 5-7 |
| Cellulose acetate | >10(100°C) | Tri(2-ethylhexyl) phosphate | <2 |
| Cellulose acetate butyrate | >10(130°C) | Urea | 1.5 |
| CoCl ₂ · 6H ₂ O | 33 | Vinylidene chloride- acrylonitrile | 10(110°C) |
| Co(NO ₃) ₂ · 6H ₂ O | 37 | ZnCl ₂ | 33 |

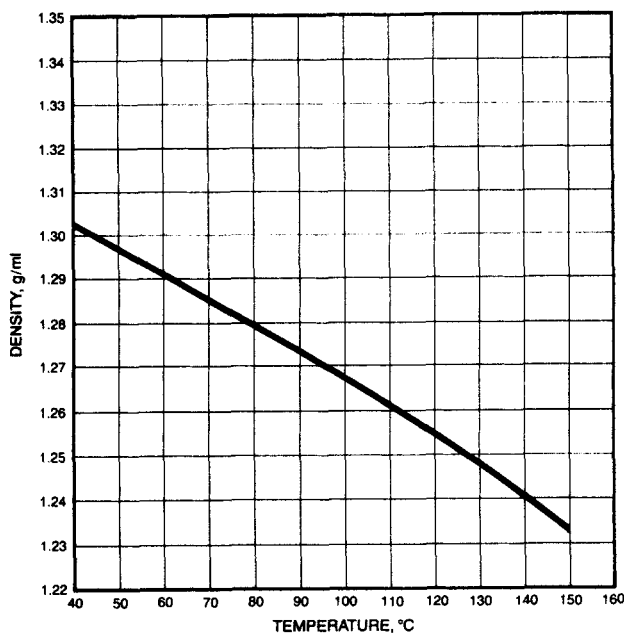
Density of JEFFSOL EC




(continued)

Table 15.66: (continued)

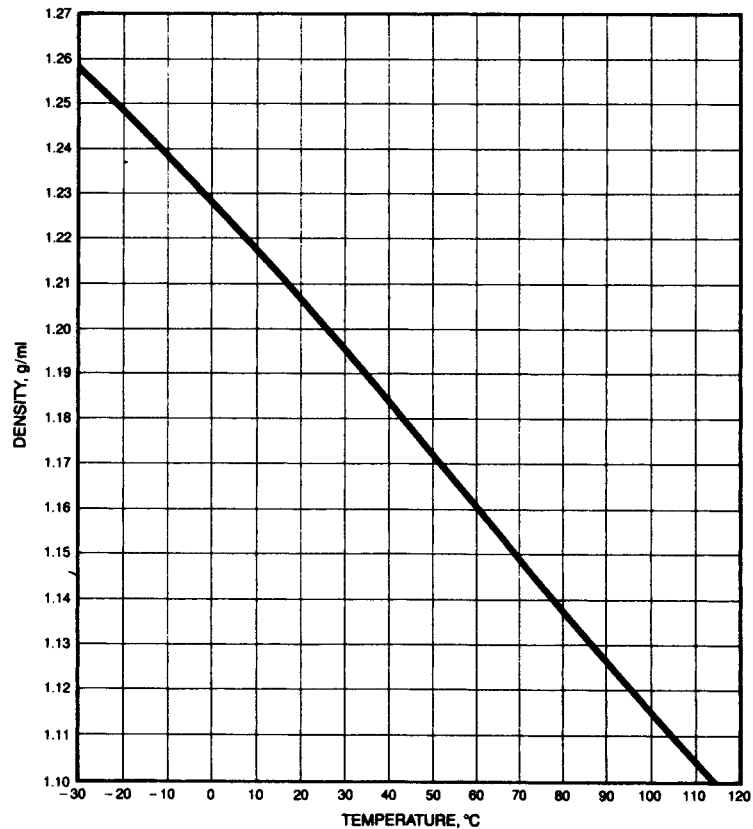Density of JEFFSOL PC



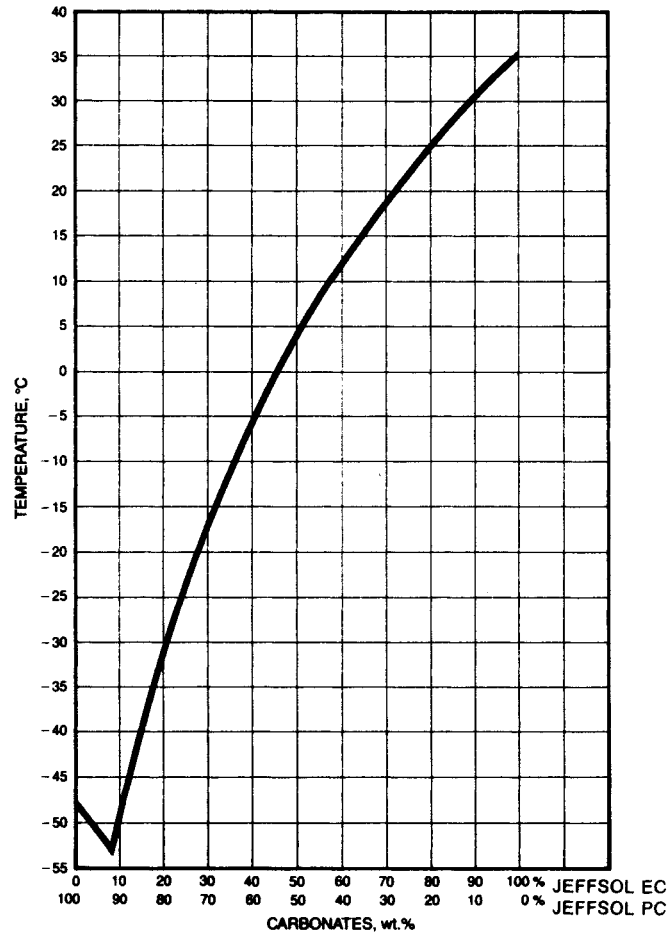
Freezing Points of JEFFSOL EC-JEFFSOL PC Mixtures




(continued)

Table 15.66: (continued)

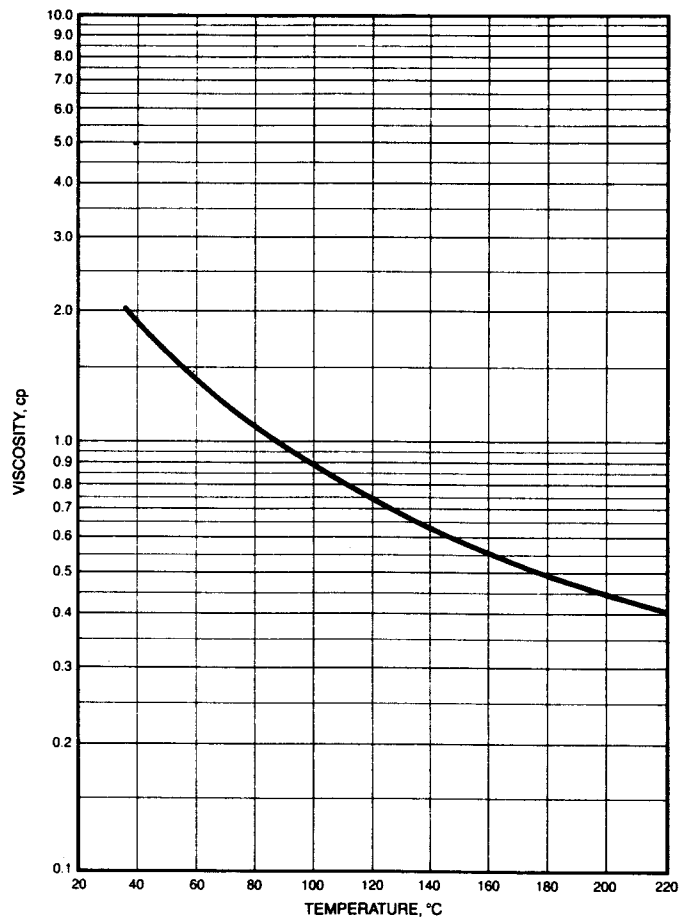Viscosity of JEFFSOL EC




Viscosity of JEFFSOL PC

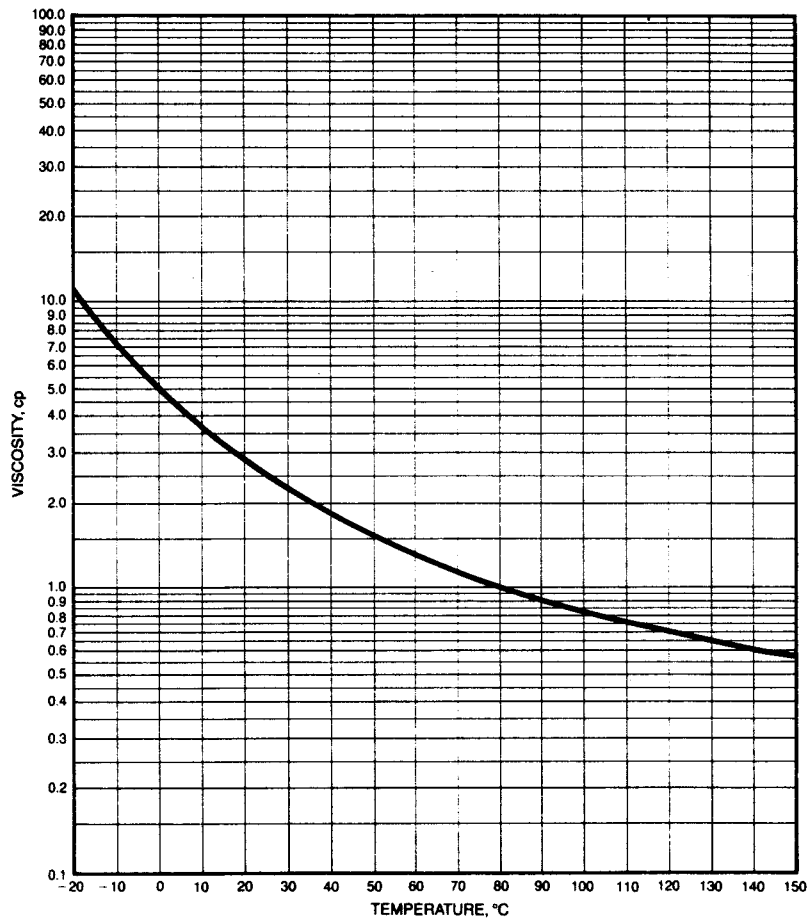


(continued)

Table 15.66: (continued)

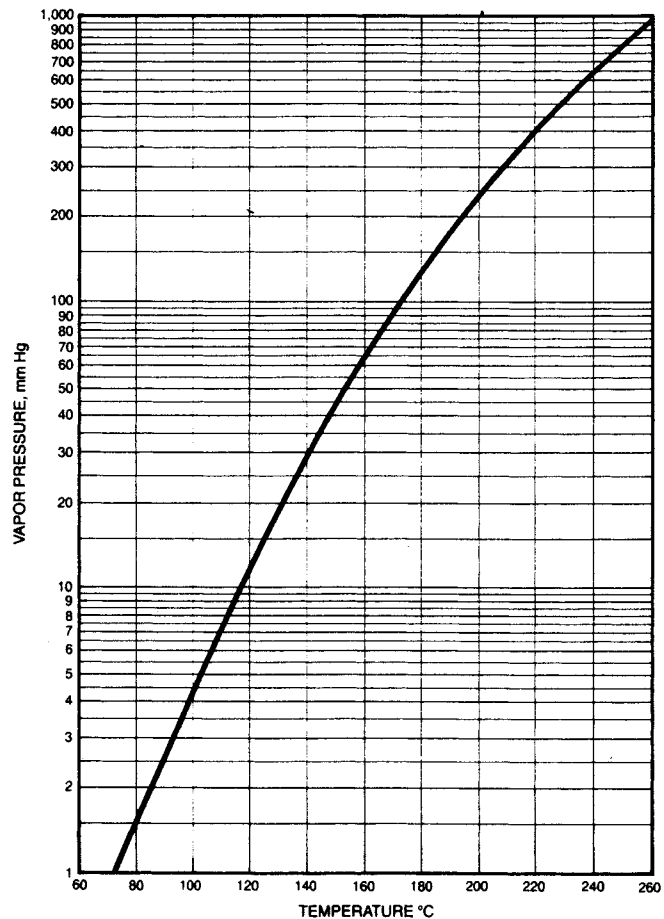Vapor Pressure of JEFFSOL EC



Vapor Pressure of JEFFSOL PC

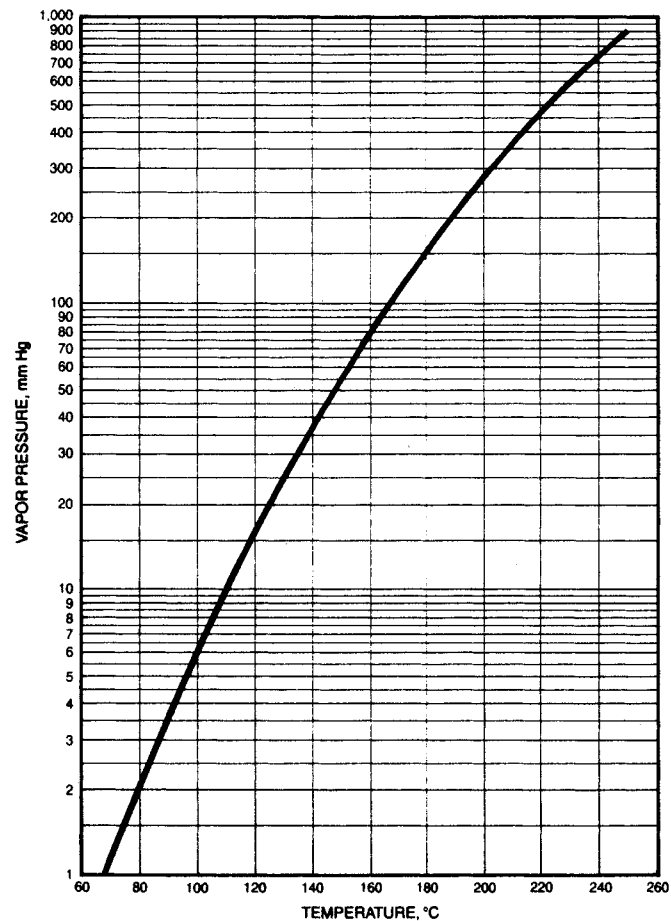

PHTHALATES

Table 15.67: Alkyl Benzyl Phthalates (75)

SANTICIZER 261

Table A. Properties

| | |
|----------------------------------------|------------------------|
| Molecular Weight | 368 |
| • Acidity (meq/100 gm. max) | 0.37 |
| • Appearance | Clear, oily liquid |
| • Color (APHA) [max.] | 75 |
| • Moisture (KF in Methanol) %, max. | 0.15 |
| Odor | Slight, characteristic |
| • Refractive Index (@ 25°C) | 1.523 – 1.529 |
| • Specific Gravity (25°/25°C) | 1.065 – 1.074 |
| Density (@ 25°C) ca. lbs./gal. | 8.9 |
| Pour Point (°C) | – 45 |
| Boiling Point @ 10mm Hg, °C | 252 |
| Vapor Pressure (mm Hg) @ 200°C | 0.5 |
| @ 250°C | 9.7 |

| | |
|---------------------------------------------------------------|------------|
| Viscosity (Centistokes) @ 25°C | 53 |
| @ 98.9°C | 4.2 |
| Surface Tension @ 24°C (dynes/cm) | 35.3 |
| Thermal Expansion Coefficient @ 10° – 40°C (cc/cc°C) | 0.00059 |
| Flash Point (C.O.C.) [°F.] | 445 |
| Solubility In Water @ 25°C, % | 0.00003 |
| Hydroxyl number | <3 |
| CAS Number | 68515-40-2 |

• Specification

Table B. Santicizer®261 – Properties of Acrylic Lacquers

| Plasticizer (at 29%) | Hard- ness ¹ | Weatherometer Gloss/ Reflectance | | Fog ² Value | Ad- hesion ³ | Solvent 5°C. | Craze ⁴ 10°C. | Water ⁵ Immurs. |
|-------------------------|----------------------------|----------------------------------------|------|---------------------------|----------------------------|-----------------|-----------------------------|-------------------------------|
| Santicizer®160 | F/H | Std. | Std. | 37 SR | 4 | checked | checked | Std. |
| Santicizer 261 | F/H | + | + | 66 SR | 6 | checked | OK | Equiv. |

1. Pencil Hardness – The film is harder than the top letter, softer than the bottom letter.

2. Specular Reflection (SR) or plate glass covers over breakers in which the plasticized films were heated for 1 hr. @ 110°C.

3. Cellophane tape method.

4. Coated panels conditioned at 5 and 10° C. – a drop of methyl ethyl ketone was applied and allowed to dry. Cracking determined by visual observation (with magnifying lens).

5. Panels immersed in water at 40°C. for 100 hours – rated by ASTM test D-714.

Table C. Santicizer®261 – Performance in PVC

| | (30%) 43 PHR | (40%) 67 PHR | (50%) 100 PHR |
|-----------------------------------------|-----------------|-----------------|------------------|
| Volatility, 24 hours at 87°C in carbon | 2.1 | 2.1 | 2.3 |
| Low-temperature flex, T ₁ °C | – 7 | – 26 | – 40 |
| Water extraction, 24 hours at 50°C | 0.02 | 0.07 | 0.08 |
| Kerosene extraction, 24 hours at 23°C | 1.0 | 3.8 | 8.8 |
| Shore "A" hardness, 10 second reading | 89 | 71 | 54 |


Table D. Santicizer®261 – Performance in Plastisol Formulation

| Viscosity, poises Brookfield HAT #6 Spindle 60 RPM | | 65 PHR |
|-------------------------------------------------------|---------|--------|
| 23°C | Initial | 63 |
| | 7 Days | 74 |
| | 28 Days | 86 |
| 40°C | Initial | 32 |
| | 7 Days | 110 |
| | 28 Days | 170 |
| 50°C | Initial | 36 |
| | 7 Days | 150 |
| | 28 Days | Gel |
| Severs | 10 psi | 160 |
| | 50 psi | 230 |
| | 100 psi | 180 |
| Yield Value, dynes/cm ² | | 28 |
| Flow Index | | 3.6 |
| Gel Temperature, °C | | 67 |
| Fusion, Relative Temperature, °C | | 159 |

(continued)

Table 15.67: (continued)

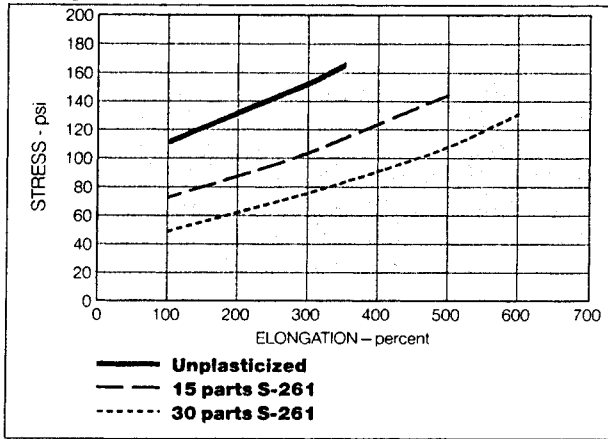Table E. Plasticizer Effect on Polysulfide Polymer Strength



Data Courtesy of Morton Thiokol, Inc.

Table F. Polysulfide Strength at Break as a Function of Plasticizer Level


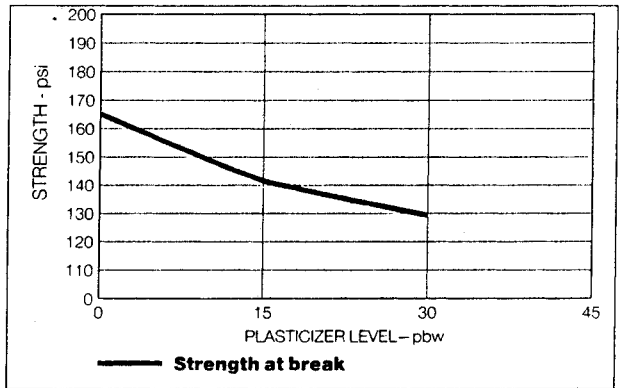


Table G. Polysulfide Elongation at Break as a Function of Plasticizer Level¹

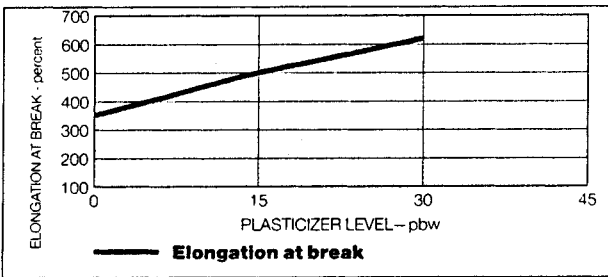


¹Plasticizer Effect on Calcium Carbonate Filled Polysulfide Composition. (Cast sheets cured 7 days at 70-72°F and 44-48% Relative Humidity.)

Formulation (parts by weight-pbw)

| Part A | |
|------------------------------------------|------|
| LP-32 Polymer | 100 |
| Ultrafine precipitated CaCO ₃ | 50 |
| Stearic Acid | 0.5 |
| Sulfur | 0.1 |
| Santicizer® 261 | 0-30 |
| Part B | |
| MnO ₂ | 7.5 |
| Santicizer 278 | 7.5 |

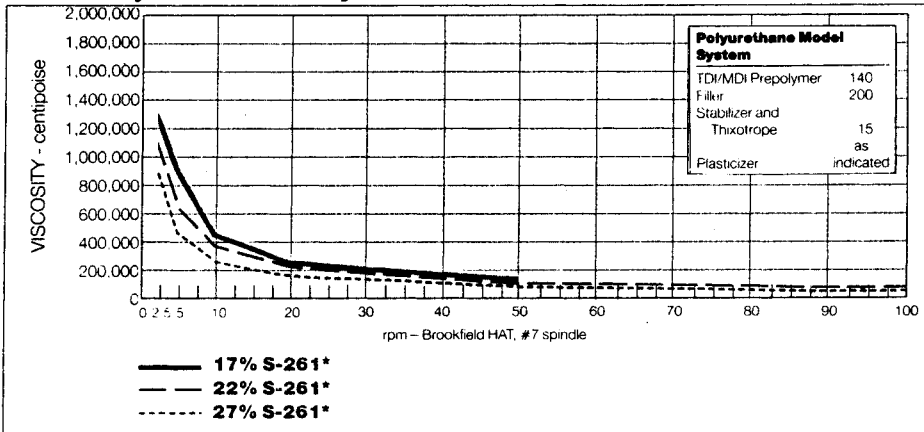Table H. Polyurethane Viscosity as a Function of Plasticizer Level



*Plasticizer as % of total system.

(continued)

Table 15.67: (continued)

SANTICIZER 278

Table A. Properties

| | | | | |
|---------------------------------------|------------------------|----------------------------------|-----------------------|----------------------------|
| Molecular Weight | 455 | Viscosity (Centistokes) | @ 0°C | ca. 10,000 |
| • Acidity (meq/100 gm. max) | 0.37 | | @ 25°C | 860 |
| • Appearance | Clear, oily liquid | @ 98.9°C | 11.5 | Surface Tension |
| • Color (APHA) [max.] | 175 | @ 25°C (dynes/cm) | 34.8 | |
| • Moisture (KF in Methanol) % max. | 0.15 | Thermal Expansion Coefficient | 0.00073 | Flash Point (C.O.C.) [°F.] |
| Odor | Slight, characteristic | @ 10° – 40°C (cc/cc/°C) | 440 | |
| • Refractive Index (@25°C) | 1.516 – 1.520 | Fire Point (C.O.C.) [°F.] | 535 | Solubility In Water |
| • Specific Gravity (25°/25°C) | 1.093 – 1.100 | @ 25°C, % | Practically insoluble | |
| Density (@ 25°C) ca. lbs./gal. | 9.1 | CAS Number | 16883-83-3 | |
| Boiling Point @ 10mm Hg, °C | 243 | | | |
| Vapor Pressure (mm Hg) | | | | |
| @ 200°C | 0.5 | | | |
| @ 250°C | 15 | | | |

* Specification

Table B. Santicizer® 278 – Performance in PVC (40 Mil Sheet)

| | (30%) 43 PHR | (40%) 67 PHR | (50%) 100 PHR |
|----------------------------------------------------------------|-----------------|-----------------|------------------|
| Volatility (% Lost) (Activated Carbon 24 hours at 87°C) | 0.7 | 0.7 | 0.7 |
| Low-temperature Flex, Tr °C | + 19 | + 2 | - 14 |
| Water immersion (24 hours at 50°C) | | | |
| % soluble matter lost | 0.01 | 0.02 | 0.04 |
| % water absorbed | 0.28 | 0.33 | 0.36 |
| Kerosene extraction (24 hours at 23°C) (% plasticizer lost) | 0.3 | 0.5 | 1.3 |
| Shore "A" Hardness, 10 second reading | 97 | 85 | 65 |
| Migration, Linde Silica: | | | |
| 1 day | 0.0 | 0.0 | 0.0 |
| 3 days | 0.04 | 0.08 | 0.3 |
| 7 days | 0.05 | 0.14 | 0.5 |
| Tensile, p.s.i. | 3180 | 2600 | 2030 |
| Elongation, % | 258 | 340 | 410 |
| Modulus @ 100% Elongation | 3140 | 1850 | 840 |
| Heat Stability | Good | Good | Good |
| Migration Resistance to Nitrocellulose | Good | Good | Good |
| Fluxing Rate | Good | Good | Good |

Table C. Santicizer® 278 – Performance in Plastisol Formulation

| Viscosity, poises Brookfield HAT Spindle 50 RPM | | 65 PHR |
|----------------------------------------------------|---------|--------|
| 23°C | Initial | 1370 |
| | 7 Days | 1420 |
| | 28 Days | 1400 |
| 40°C | Initial | 380 |
| | 7 Days | 560 |
| | 28 Days | 640 |
| 50°C | Initial | 160 |
| | 7 Days | 600 |
| | 28 Days | 900 |
| Severs | 10 psi | 3400 |
| | 50 psi | 3900 |
| | 100 psi | 1900 |
| Yield value, dynes/cm ² | | 0 |
| Flow Index | | 2.8 |
| Gel Temperature, °C | | 79 |
| Fusion, Relative Temperature, °C | | 156 |

(continued)

Table 15.67: (continued)

| | Santicizer® 278 | High M.W. Polyester |
|-----------------------------------------------------------|-----------------|---------------------|
| Shore "A" Hardness, 10 second reading | 84 | 77 |
| Volatility, % Plasticizer Lost 6 days @ 87°C in carbon | 3.9 | 2.0 |
| Tf. °C | -1 | -18 |
| Extraction, % Plasticizer Lost | | |
| 5% Caustic, 96 hours @ 23°C | 0.1 | 0.6 |
| 1% Ivory Soap, 96 hours @ 50°C | 3.0 | 9.2 |
| Hexane, 4 hours @ 23°C | 1.6 | 1.3 |
| Hexane, 24 hours @ 23°C | 3.2 | 2.7 |
| Humidity Compatibility 100% R.H. | | |
| Days to exude @ 60°C | Pass* | 70 |
| Days to exude @ 80°C | Pass* | 18 |
| Water Sensitivity, 24 hours @ 50°C | | |
| % Soluble Matter Lost | 0.05 | 0.08 |
| % Absorption | 0.69 | 1.28 |
| Viscosity, stokes @ 23°C | | |
| Gardner Bubble | 7 | 47 |
| Fusion, via Fisher-Johns Clear Point, °C | 115 | 153 |

Formulation

| | |
|-------------|-----|
| PVC | 100 |
| Plasticizer | 67 |
| Mark WS | 1 |

*Test terminated at 126 days (18 weeks) with no exudation.

Table E. Adhesive Migration Resistance


| | Peel Strength lbs./in. ¹ | Failure Mode |
|--------------------------|----------------------------------------|-----------------|
| Emulsion Type PSA | | |
| Santicizer® 278 | 6.2 | Cohesive |
| High M.W. Polyester | 5.9 | Cohesive |
| Solution Type PSA | | |
| Santicizer 278 | 5.0 | Cohesive |
| High M.W. Polyester | 4.2 | Cohesive |

Formulation

| | |
|------------------|-----|
| PVC | 100 |
| Plasticizer | 25 |
| Processing Aid | 5 |
| Stabilizer | 3 |
| TiO ₂ | 10 |

¹24 Hours @ Room TemperatureTable F. Performance of Santicizer® 278 in Moisture Cured Urethane Sealants¹

| | Plasticizer Concentration | | |
|---------------------------|---------------------------|-----|-----|
| | 17% | 22% | 27% |
| Modulus, psi | | | |
| 200% | 135 | 130 | 125 |
| 400% | 200 | 190 | 190 |
| % Elongation | 540 | 490 | 490 |
| Tensile Strength, psi | 240 | 205 | 210 |
| Shore A Hardness @ 5 sec. | 29 | 29 | 30 |

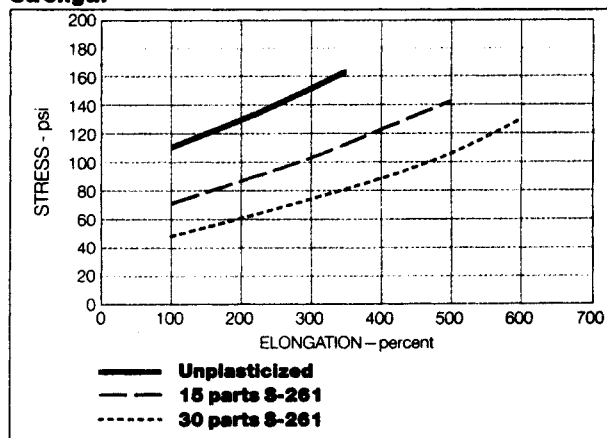¹Cured 2 Weeks at 25°C/50% Relative HumidityTable G. Plasticizer Effect on Polysulfide Polymer Strength¹**Formulation** (parts by weight - pbw)

| | |
|------------------------------------------|------|
| Part A | |
| LP-32 Polymer | 100 |
| Ultrafine precipitated CaCO ₃ | 50 |
| Stearic acid | 0.5 |
| Sulfur | 0.1 |
| Santicizer® 261 | 0-30 |
| Part B | |
| MnO ₂ | 7.5 |
| Santicizer 278 | 7.5 |

¹Plasticizer Effect on Calcium Carbonate Filled Polysulfide Composition. (Cast sheets cured 7 days at 70-72°F and 44-48% Relative Humidity). Data courtesy of Morton Thiokol Inc.

Table 15.68: Butyl Benzyl Phthalate (75)**SANTICIZER 160**

| Table A. Properties | |
|----------------------------------------|------------------------|
| Molecular Weight | 312 |
| • Acidity (meq/100 gm. max) | 0.37 |
| • Appearance | Clear, oily liquid |
| • Color (APHA) [max.] | 40 |
| • Moisture (KF in Methanol) %, max. | 0.15 |
| • Odor | Slight, characteristic |
| • Refractive Index (@ 25°C) | 1.535 – 1.540 |
| • Specific Gravity (25°/25°C) | 1.115 – 1.123 |
| Density (@ 25°C) ca. lbs./gal. | 9.3 |
| Hydroxyl No. | < 1 |
| Crystallizing Point (°C) | < – 35 |
| Pour Point (°C) | – 45 |
| Boiling Point @ 10mm Hg, °C | 240 |
| Vapor Pressure (mm Hg) | |
| @ 150°C | 0.16 |
| @ 200°C | 1.9 |
| @ 250°C | 14.4 |
| Viscosity (Centistokes) | |
| @ 0°C | 230 |
| @ 25°C | 39.5 |
| @ 98.9°C | 3.42 |
| Surface Tension @ 25°C (dynes/cm) | 39.9 |
| Thermal Expansion Coefficient | 0.00069 |
| @ 10° – 40°C (cc/cc/°C) | |
| Flash Point (C.O.C.) [°F.] | 390 |
| Fire Point (C.O.C.) [°F.] | 450 |
| Solubility In Water @ 25°C, % | 0.0003 |
| CAS Number | 85-68-7 |

• Specification

Table B. Performance of Santicizer® 160 in PVC (40 Mil Sheet)

| | (30%) 43 PHR | (40%) 67 PHR | (50%) 100 PHR |
|----------------------------------------------------------------|-------------------------|-------------------------|--------------------------|
| Volatility (% Lost) (Activated Carbon; 24 hours at 87°C) | 7.0 | 7.7 | 8.1 |
| Low-Temperature Flex, Tf °C | – 3.8 | – 24 | – 39 |
| Water immersion (24 hours at 23°C) | | | |
| % soluble matter lost | 0.06 | 0.07 | 0.08 |
| % water absorbed | 0.35 | 0.30 | 0.43 |
| Kerosene extraction (24 hours at 23°C) (% plasticizer lost) | 1.0 | 3.4 | 8.2 |
| Shore "A" Hardness, 10 second reading | 86 | 68 | 52 |
| Migration, Linde Silica: | | | |
| 1 day | 0.2 | 1.2 | 4.0 |
| 3 days | 0.4 | 2.5 | 7.8 |
| 7 days | 0.7 | 4.1 | 11.4 |
| Tensile, p.s.i., ASTM D-412 | 3090 | 2270 | 1420 |
| Elongation, %, ASTM D-412 | 350 | 450 | 460 |
| Modulus @ 100% Elongation, ASTM D-412 | 1960 | 1000 | 510 |

(continued)

Table 15.68: (continued)

Table C. Effect of Additive Use of Santicizer® 160 with GPP Based Plastisols on Gel and Fusion Properties


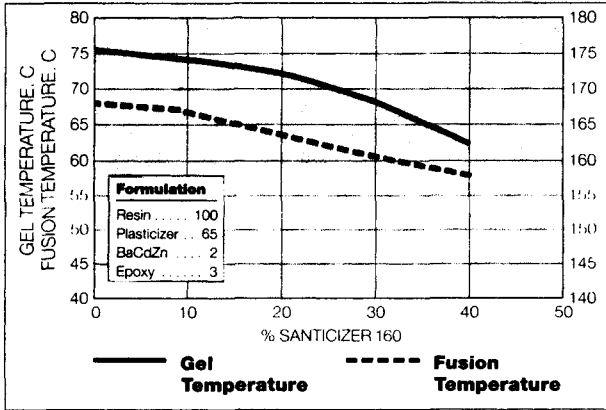


Table D. Effect of Benzyl Phthalates on Fusion BANBURY SIZE "B" 116 rpm—240°F. JACKET TEMP.

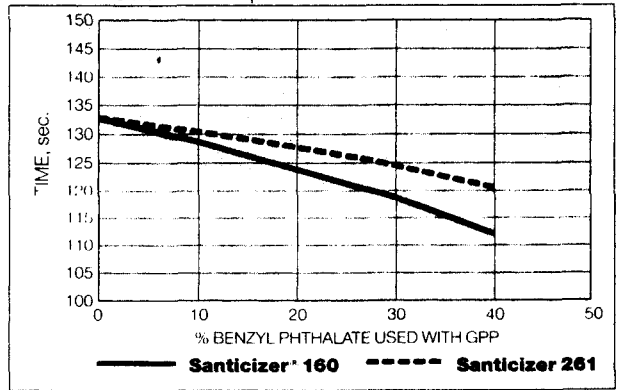

PVAc ADHESIVE APPLICATION DATA


Table E. Performance of Plasticizers in Acrylic Automotive Lacquers

20% Plasticizer Concentration

| Plasticizer | Humidity ¹ Stability | Volatility ² | Sward Hardness |
|-------------------------------|---------------------------------|-------------------------|----------------|
| Santicizer® 160 | 1 | 46 | 44 |
| Dipropylene Glycol Dibenzoate | 8 | 51 | 52 |
| DBP | 1 | >70 | 46 |


¹Visual Rating 1-10; 1 = best; 10 = worst
²% Plasticizer lost (at 170°F 3 mil coating)

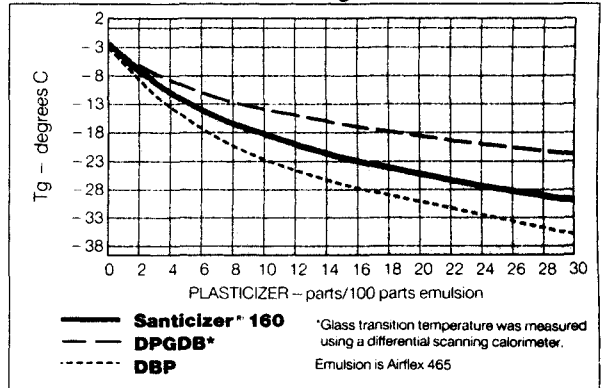Table G. Plasticizer Effect of Tg* of PVAc Emulsion




Data Courtesy Air Products and Chemicals Inc.

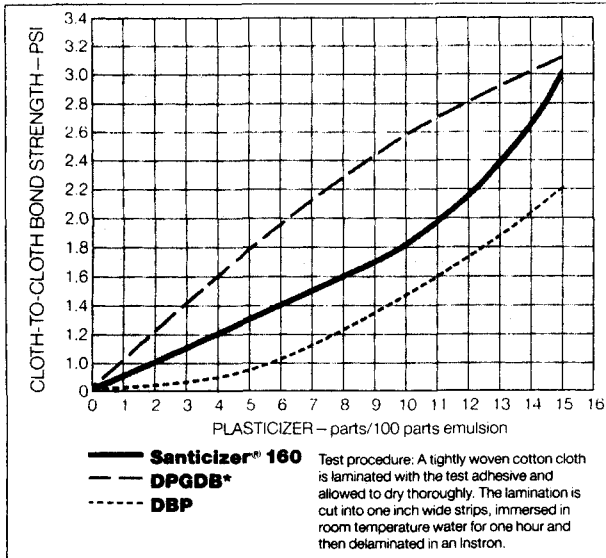Table F. Effect of Plasticizers on Water Resistance of Airflex 320 Emulsion



Data Courtesy Air Products and Chemicals Inc.

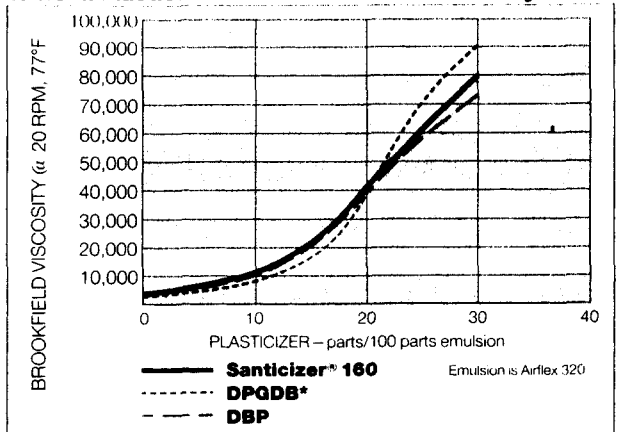Table H. Plasticizer Effect on Emulsion Viscosity



Data Courtesy Air Products and Chemicals Inc.

*Dipropylene Glycol Dibenzoate

Table 15.69: Dibutyl Phthalate (75)

DBP

| Table A. Properties | |
|----------------------------------------------------------------|----------------------------------------------------|
| Molecular Weight | 278 |
| Acidity (meq/100 gm.) | 0.12 |
| Appearance | Clear, oily liquid |
| Color (APHA) max. | 20 |
| Moisture (KF in Methanol) % | 0.15 |
| Odor | Slight, characteristic |
| Refractive Index (@25°C) | 1.4895 – 1.4915 |
| Specific Gravity (25°/25°C) | 1.044 – 1.048 |
| Density (@ 25°C) ca. lbs./gal. | 8.72 |
| Crystallizing Point (°C) | < – 35 |
| Pour Point (°C) | – 40 |
| Boiling Point @ 10mm Hg, °C | 192 |
| Vapor Pressure (mm Hg) @ 150°C @ 200°C @ 250°C | 0.8 14 100 |
| Viscosity (Centistokes) @ 0°C @ 25°C @ 98.9°C | 55.0 15.6 2.4 |
| Surface Tension @ 30°C (dynes/cm) | 35 |
| Thermal Expansion Coefficient @ 10° – 40°C (cc/cc/°C) | 0.00078 |
| Flash Point (C.O.C.) [°F.] | 340 |
| Fire Point (C.O.C.) [°F.] | 395 |
| Solubility In Water @ 30°C, % | 0.001 |
| General Solubility | Soluble in all common organic solvents and oils |
| CAS Number | 84-74-2 |

Table B. Dibutyl Phthalate – Evaluation in Polyvinyl Acetate Adhesives

| Formulation: Gelva® S-55 90% resin Plasticizer 10% | | |
|----------------------------------------------------------------------------|------------------------------|----------------------------|
| Room Temperature Viscosity, cps. (Brookfield LVT #3 Spindle, 30 rpm) | Dibutyl Phthalate | Senticizer® 100 |
| Initial | 2070 | 2000 |
| 1 Day | 2080 | 1900 |
| 1 Week | 2480 | 2170 |
| 2 Weeks | 2520 | 2490 |
| 4 Weeks | 4080 | 3970 |
| Wet Tack (sec.) | 15 | 14 |
| Open Time (min.:sec.) | 3:45 | 3:30 |
| Elongation, % | 385 | 335 |
| 100% Modulus, psi | 300 | 430 |
| Tensile Strength, psi | 690 | 920 |

Table 15.70: Di-2-Ethylhexyl Phthalate (Dioctyl Phthalate) (75)

DOP

Table A. Properties

| | |
|-----------------------------------|------------------------|
| Molecular Weight | 391 |
| Acidity (meq/100 gm. max) | 0.12 |
| Appearance | Clear, oily liquid |
| Color (APHA) | 25 |
| Moisture (KF in Methanol) % | 0.10 |
| Odor | Slight, characteristic |
| Refractive Index (@25°C) | 1.4845 – 1.4858 |
| Specific Gravity (25°/25°C) | 0.980 – 0.985 |
| Density (@ 25°C) ca. lbs./gal. | 8.18 |
| Crystallizing Point (°C) | – 55 (very stiff gel) |
| Pour Point (°C) | – 47 |
| Boiling Point @ 10mm Hg, °C | 236 |
| Vapor Pressure (mm Hg) @ 200°C | 1.2 |
| @ 250°C | 18 |

| | |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Viscosity (Centistokes) @ 0°C | 348.0 |
| @ 25°C | 58.0 |
| @ 98.9°C | 4.3 |
| Surface Tension @ 25°C (dynes/cm) | 33 |
| Thermal Expansion Coefficient @ 10° – 40°C (cc/cc/°C) | 0.00074 |
| Flash Point (C.O.C.) [°F.] | 425 |
| Fire Point (C.O.C.) [°F.] | 480 |
| Solubility In Water @ 25°C, % | <0.005 |
| General Solubility | Miscible with most common solvents and with most primary and secondary plasticizers for polyvinyl chloride |
| CAS Number | 117-81-7 |

Table B. Performance in PVC (40 Mil Sheet)

| | (30%) 43 PHR | (40%) 67 PHR | (50%) 100 PHR |
|------------------------------------------------------|-----------------|-----------------|------------------|
| Volatility (% Lost) (Activated Carbon) | 4.2 | 4.0 | 4.0 |
| Low-temperature Flex, T ₁ °C | – 17 | – 39 | – 55 |
| Water immersion (24 hours): % soluble matter lost | 0.01 | 0.03 | 0.04 |
| % water absorbed | 0.22 | 0.25 | 0.27 |
| Kerosene extraction (% plasticizer lost) | 8.3 | 44 | >70 |
| Shore "A" Hardness | 87 | 70 | 53 |
| Tensile, p.s.i. | 2910 | 2230 | 1390 |
| Elongation, % | 360 | 460 | 480 |
| Modulus @ 100% Elongation, psi | 1950 | 990 | 500 |
| Flammability, Limiting O ₂ Index * | 23.1 | 21.8 | 20.3 |

*The Oxygen Index Test results are not intended to reflect performance of these or any other materials under actual fire conditions. Each user should determine independently whether potential fire hazards are associated with the finished product, and whether DOP is suitable for the particular use.

Table C. DOP Performance in Plastisol Formulation

Viscosity, poises Brookfield HAT #6 Spindle

| 50 RPM | | 65 PHR |
|------------------------------------|---------|----------|
| 23°C | Initial | 36 |
| | 7 Days | 65 |
| | 28 Days | 82 |
| 40°C | Initial | 25 |
| | 7 Days | 94 |
| | 28 Days | 102 |
| 80°C | Initial | 28 |
| | 7 Days | 210 |
| | 28 Days | 260 |
| Severs | 10 psi | 58 |
| | 50 psi | 50 |
| | 100 psi | 41 |
| Yield value, dynes/cm ² | | 0 |
| Flow Index | | 1.4 |
| Gel Temperature, °C | | 75 |
| Fusion, Relative Temperature, °C | | 167 |
| * Air-Release Rate | | Moderate |
| * Resilience, steel ball, inches | | 4.5 |

*Efficiency Conc. Adj. to "60" Shore A hardness

PHOSPHATES

Table 15.71: *t*-Butylphenyl Diphenyl Phosphate (75)

SANTICIZER 154

Table A. Properties

| | |
|----------------------------------|----------------------|
| Molecular Weight (avg.) | 371 |
| Phosphorus, % | 8.4 (Calc) |
| * Acidity (meq/100g.) max. | 0.20 |
| * Appearance | Clear, mobile liquid |
| * Color (APHA) [max.] | 100 |
| * Moisture, % max. | 0.15 |
| * Odor | Essentially odorless |
| Refractive Index (@25°C) | 1.5535 - 1.5565 |
| Sp. Grav. 25°C/25°C | 1.175 - 1.185 |
| Density (@ 25°C lbs./gal. | 9.8 |
| Crystallizing Point (°C) | < -20 |
| Pour Point (°C) | -25 |
| Boiling Point (@ 10mm Hg, °C) | 258 |
| Vapor Pressure | |
| (@ 200°C) | 1.0 |
| (@ 250°C) | 7.4 |
| (@ 300°C) | 41 |

| | |
|--------------------------------------------------------------|-------------|
| Viscosity (Centistokes) | |
| @ 0°C | 475 |
| @ 25°C | 58 |
| @ 100°C | 4.1 |
| Flash Point (COC, °F.) | 505 |
| Fire Point (COC °F.) | 590 |
| Sol. in Water (@ 25°C) | <0.001% |
| Coefficient of Thermal Expansion (@ 10-40°C (cc/cc°C)) | 0.000703 |
| Surface Tension (Dynes/cm) | 38.6 @ 23°C |
| CAS Number | 56803-37-3 |

* Specification

Table B. Santicizer® 154 Comparative Performance in Plasticized, Flame-retarded Compounds

| VINYL FILM | | | | | |
|-------------------------------------------|-------------------|----------------------|-------------------------|------------------|------------------------|
| Physical Properties in PVC, 67 PHR | | | | | |
| Plasticizer | T _r °C | Volatility % Lost | Shore Hard- ness "A" | Water Ext/Abs | Kerosene Extraction |
| Santicizer® 154 | -10.5 | 3.1 | 78 | .08/.49 | 1.4 |
| Tricresyl phosphate | -14.2 | 1.3 | 72 | .03/.26 | 2.4 |
| Isopropylated triphenyl phosphate | -14.6 | 2.9 | 77 | .07/.40 | 1.9 |
| Blend (70/30) of Santicizer 154/148 | -17.2 | 3.0 | 75 | .07/.47 | 3.0 |

| Flame-retardant Properties | | | |
|-----------------------------------------|--------------------------------------------------|-------------------------|-----------------|
| Plasticizer | Flame Spread (Monsanto Two-foot Tunnel Test)* | % Light Transmission | Oxygen Index |
| Santicizer® 154 | 3.0 | 9 | 29.5 |
| Tricresyl phosphate | 3.0 | 7 | 29.3 |
| Isopropylated triphenyl phosphate | 3.0 | 10 | 29.3 |
| Blend (70/30) of Santicizer 154/148 | 3.3 | 15 | 28.7 |

| Formulation | PHR |
|-------------------------------------------------|-----|
| Geon ¹ 102 vinyl resin | 100 |
| Plasticizer (as indicated) | 50 |
| Drapex ² 10.4 epoxidized linseed oil | 3 |
| Mark ³ WS stabilizer | 2 |
| Atomite ⁴ calcium carbonate filler | 30 |

| NITRILE RUBBER SHEET | | | | |
|-----------------------------------------|----------------------------------------------------------------|-----------------------|---------|-----------------|
| Physical Properties | | | | |
| Plasticizer | Monsanto Rehemeter (350°F, 100 CPM, 4" arc) T 90% (min.) | 100% Modulus (PSI) | Tensile | Elongation % |
| Santicizer® 154 | 5.5 | 610 | 995 | 345 |
| Isopropylated triphenyl phosphate | 5.6 | 570 | 875 | 330 |
| Santicizer 148 | 6.0 | 490 | 815 | 385 |

| Flame-retardant Properties | | |
|-----------------------------------------|-----------------------------|---------------|
| Plasticizer | Vertical Burn Test (UL 94)* | Oxygen Index* |
| Santicizer® 154 | V-O | 42.0 |
| Isopropylated triphenyl phosphate | V-O | 41.5 |
| Santicizer 148 | V-O | 39.9 |

| Formulation | PHR |
|-------------------------------------------------|-----|
| Paracril ⁵ OZO nitrile PVC polyblend | 75 |
| Phovic ⁶ M50 vinyl chloride resin | 25 |
| Hydra ⁷ 710 alumina hydrate | 100 |
| Hard Dixie clay | 25 |
| MagCarb ⁸ L | 5 |
| Thermogard ⁹ antimony trioxide | 4 |
| Dyphos ¹⁰ stabilizer | 3 |
| Steanic acid | 1 |
| Drapex ² 10.4 epoxidized linseed oil | 3 |
| Zinc oxide | 3 |
| Spider ¹⁰ sulfur | 1.5 |
| Thiofile ¹⁰ MBTS accelerator | 1.5 |
| Thiurad ¹⁰ TMTD accelerator | 0.2 |
| Plasticizer (as indicated) | 35 |

*The Oxygen Index, UL 94, and the Two-foot Tunnel Test results are not intended to reflect performance of these or any other materials under actual fire conditions. Each user should determine independently whether potential fire hazards are associated with the finished product and whether Santicizer 154 is suitable for the particular use.

Trademarks of

- (1) B. F. Goodrich Inc.
- (2) Argus Chemical Corp.
- (3) Thompson Weinman's Co.
- (4) Uniroyal Inc.
- (5) Goodyear Tire & Rubber Co.
- (6) Aluminum Company of America
- (7) Merck & Co., Inc.
- (8) M & T Chemicals Inc.
- (9) NL Industries Inc.
- (10) Stauffer Chemical Co.

Table C. Autoignition Temperature

| (ASTM D-2155-66) | |
|-----------------------------------------|------------|
| Fluid | A.I.T., °F |
| Santicizer® 154 | 1,050 |
| Butylated triphenyl phosphate | 1,025 |
| Isopropylated triphenyl phosphate | 1,010 |
| Hydrocarbon (typical) | 700-750 |

Table 15.72: 2-Ethylhexyl Diphenyl Phosphate (75)**SANTICIZER 141****Table A. Properties**

| | |
|----------------------------------------|----------------------|
| Molecular Weight | 362 |
| Phosphorus, % | 8.6 (Calc) |
| • Acidity (meq/100 gm. max) | 0.20 |
| • Appearance | Clear, oily liquid |
| • Color (APHA) [max.] | 40 |
| • Moisture (KF in Methanol) %, max. | 0.10 |
| • Odor | Essentially odorless |
| • Refractive Index (@25°C) | 1.508 – 1.511 |
| • Specific Gravity (25°/25°C) | 1.0880 – 1.093 |
| Density (@ 25°C) ca. lbs./gal. | 9.1 |
| Pour Point (°C) | – 54 |
| Boiling Point @ 10mm Hg, °C | 239 (decomposes) |

| | |
|----------------------------------|-----------|
| Vapor Pressure | |
| @ 150°C | 0.2 |
| @ 200°C | 1.6 |
| Viscosity (Centistokes) | |
| @ 0°C | 61.0 |
| @ 25°C | 16.4 |
| @ 98.9°C | 2.5 |
| Surface Tension | 33.4 |
| @ 22°C (dynes/cm) | |
| Flash Point (C.O.C.) [°F.] | 435 |
| Fire Point (C.O.C.) [°F.] | 460 |
| Solubility In Water @ 25°C, % | 0.002 |
| CAS Number | 1241-94-7 |

* Specification

Table B. Flow Index and Fusion Points of Various Plasticizers

| Plasticizer | Gel Point, °C | Fusion Point, °C | Flow Index* |
|-----------------------|---------------|------------------|-------------|
| Santicizer® 160 | 89 | 148 | 9.5 |
| CDP | 100 | 143 | 13.0 |
| Santicizer 141 | 105 | 151 | 2.4 |
| DOP | 127 | 167 | 1.4 |
| 7-9-11 Phthalate | 128 | 172 | 1.2 |
| DOA | 139 | 175 | 0.6 |
| Santicizer 97 | 143 | 177 | 1.0 |

*Ratio of Severs visc. (50 psi) to Brookfield visc. (50 RPM).

Table C. Plastisol Viscosity Stability (Formulated With 100 PHR Geon® 121)

| Plasticizer | PHR | Temp., °C | Brookfield Viscosity – Poises | | | | |
|------------------------------|-------------------------|------------------------------------|----------------------------------------------|-----------------------------------------------|-------|--------|---------|
| | | | RPM | Initial | 1 Day | 7 Days | 28 Days |
| DOP | 65 | 23 | 5 | 64 | 98 | 93 | 109 |
| | | | 50 | 58 | 86 | 80 | 96 |
| | | 40 | 5 | 57 | 80 | 115 | 147 |
| | | | 50 | 40 | 59 | 86 | 109 |
| Santicizer® 141 | 65 | 23 | 5 | 94 | 147 | 208 | 259 |
| | | | 50 | 56 | 84 | 112 | 154 |
| | | 40 | 5 | 128 | 896 | 7,040 | Gelled |
| | | | 50 | 71 | 368 | 2,509 | Gelled |
| DOP and Santicizer 141 | 60/5 | 23 | 5 | 64 | 70 | 86 | 112 |
| | | | 50 | 54 | 59 | 67 | 94 |
| | | 40 | 5 | 48 | 104 | 147 | 224 |
| | | | 50 | 34 | 66 | 101 | 133 |
| DOP and Santicizer 141 | 50/15 | 23 | 5 | 96 | 112 | 128 | 173 |
| | | | 50 | 62 | 66 | 74 | 100 |
| | | 40 | 5 | 64 | 186 | 352 | 480 |
| | | | 50 | 42 | 93 | 162 | 216 |
| Severs Viscosity Data | | | | | | | |
| | DOP (65 PHR) | Santicizer 141 (65 PHR) | DOP and Santicizer 141 (60/5 PHR) | DOP and Santicizer 141 (50/15 PHR) | | | |
| 10 psi | 84* | 58 | 86 | 77 | | | |
| 50 psi | 80 | 64 | 81 | 76 | | | |
| 100 psi | 62 | 58 | 60 | 54 | | | |

(continued)

Table 15.72: (continued)

Table D. Effect of Plasticizers and Thickness on Weatherability of PVC Film


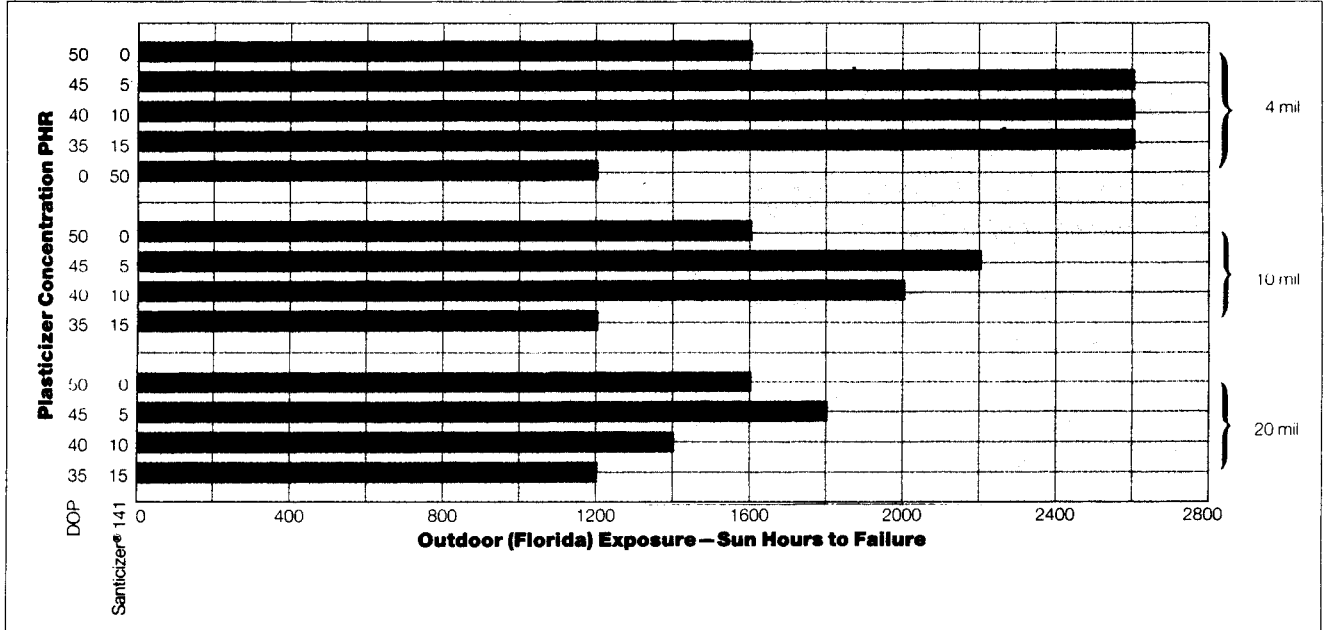


Table E. Comparison of Film Formulations in Florida Exposure Tests (4 Mil Unbacked Film)

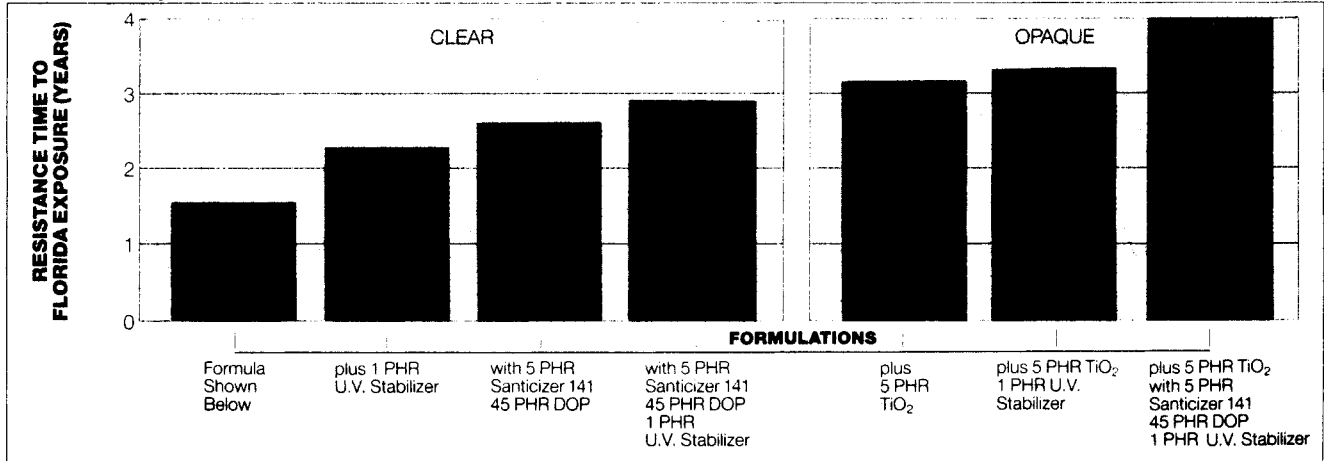

Formulation

| | |
|---------------------------------------------------|------|
| PVC | 100 |
| DOP | 50 |
| Epoxidized soya oil | 3 |
| Liquid Ba/Cd | 2 |
| Liquid Zn | 0.25 |
| Stearic Acid | 0.5 |
| U.V. Stabilizer: 2-Hydroxy-4-Methoxy Benzophenone | |

(continued)

Table 15.72: (continued)

Table F. Santicizer® 141 – Performance in PVC (40 Mil Sheet)

| | (30%) 43 PHR | (40%) 67 PHR | (50%) 100 PHR |
|---------------------------------------------------------------------|-----------------|-----------------|------------------|
| Volatility (% Plasticizer Lost) (Activated Carbon 24 hours at 87°C) | 6.8 | 7.4 | 8.4 |
| Low-temperature Flex, Tr°C (Clash-Berg Method) | -17 | -39 | -58 |
| Water immersion (24 hours at 50°C) | | | |
| % soluble matter lost | 0.02 | 0.06 | 0.25 |
| % water absorbed | 0.24 | 0.36 | 0.50 |
| Kerosene extraction (24 hours at 23°C) (% plasticizer lost) | 3.0 | 7.3 | 24 |
| Shore "A" Hardness, 10 second reading | 84 | 68 | 50 |
| Migration, Linde Silica: | | | |
| 1 day | 0.3 | 1.5 | 4.2 |
| 3 days | 1.2 | 4.6 | 12.3 |
| 7 days | 2.1 | 9.0 | 22.4 |
| Tensile, p.s.i. | 2930 | 2210 | 1310 |
| Elongation, % | 320 | 440 | 510 |
| Modulus @ 100% Elongation | 1810 | 820 | 450 |
| Flammability (Limiting O ₂ Index)* | 27.0 | 25.4 | 24.9 |
| Heat Stability | Fair | Fair | Fair |
| Migration Resistance to Nitrocellulose | Poor | Poor | Poor |
| Fluxing Rate | Excellent | Excellent | Excellent |

*The Oxygen Index Test results are not intended to reflect performance of these or any other materials under actual fire conditions. Each user should determine independently whether potential fire hazards are associated with the finished product and whether Santicizer 141 is suitable for the particular use.

Table G. Santicizer® 141 – Performance in Plastisol Formulation

| Viscosity, poises Brookfield HAT #6 Spindle 50 PRM | | 65 PHR |
|----------------------------------------------------|---------|----------|
| 23°C | Initial | 24 |
| | 7 Days | 59 |
| | 28 Days | 88 |
| 40°C | Initial | 26 |
| | 7 Days | 640 |
| | 28 Days | Gel |
| 50°C | Initial | 170 |
| | 7 Days | Gel |
| | 28 Days | Gel |
| Severs | 10 psi | 47 |
| | 50 psi | 58 |
| | 100 psi | 54 |
| Yield value, dynes/cm ² | | 12 |
| Flow Index | | 2.4 |
| Gel Temperature, °C | | 64 |
| Fusion, Relative Temperature, °C | | 151 |
| *Air-release Rate | | Moderate |
| *Resilience, steel ball, inches | | 5.8 |

*Efficiency Conc. Adj. to "60" Shore A Hardness

Table 15.73: Isodecyl Diphenyl Phosphate (75)**SANTICIZER 148****Table A. Properties**

| | |
|----------------------------------------|----------------------|
| Molecular Weight | 390 |
| Phosphorus, % | 7.9 (Calc) |
| • Acidity (meq/100 gm. max) | 0.20 |
| • Appearance | Clear, oily liquid |
| • Color (APHA) [max.] | 100 |
| • Moisture (KF in Methanol) %, max. | 0.10 |
| • Odor | Essentially odorless |
| • Refractive Index (@25°C) | 1.504 – 1.510 |
| • Specific Gravity (25°/25°C) | 1.069 – 1.079 |
| Density (@ 25°C) ca. lbs./gal. | 8.94 |
| Crystallizing Point (°C) | < –35 |
| Pour Point (°C) | < –50 |
| Boiling Point @ 10mm Hg, °C | 245 (decomposes) |

| | |
|----------------------------------------------------------------|------------|
| Vapor Pressure (mm Hg) @ 150°C | <0.1 |
| @ 200°C | 0.5 |
| Viscosity (Centistokes) @ 0°C | 95 |
| @ 25°C | 22.5 |
| @ 98.9°C | 3.0 |
| Flash Point (C.O.C.) [°F.] | 465 |
| Fire Point (C.O.C.) [°F.] | 500 |
| Thermal Expansion Coefficient @ 10° – 40°C (cc/cc/°C) | 0.00071 |
| Solubility In Water @ 25°C, % | <0.0008 |
| CAS Number | 29761-21-5 |

* Specification

Table B. Effect of Type of Filler

(25% Phosphate Ester as Shown Blended With 711 Phthalate)

| 30 PHR Atomite | Monsanto Two-foot Tunnel* Test Inches of Flame Spread | | Oxygen Index % O ₂ to Sustain Burning | |
|------------------------------------------|----------------------------------------------------------|--------------------------------------|-----------------------------------------------------|--------------------------------------|
| | No Sb ₂ O ₃ | 4 PHR Sb ₂ O ₃ | No Sb ₂ O ₃ | 4 PHR Sb ₂ O ₃ |
| Control (No phosphate ester) | 11.9 | 6.7 | 23.2 | 26.7 |
| Triarylphosphate** | 7.4 | 6.8 | 25.6 | 27.6 |
| Santicizer® 148 | 8.6 | 6.8 | 24.4 | 26.8 |
| 30 PHR Hydral*** 710 | | | | |
| Triarylphosphate** | 3.3 | 2.9 | 29.4 | 30.3 |
| Santicizer 148 | 4.3 | 3.3 | 28.6 | 29.8 |
| 30 PHR Atomite/Magcarb**** L(2/1) | | | | |
| Triarylphosphate** | 6.6 | 4.4 | 26.1 | 28.9 |
| Santicizer 148 | 4.7 | 3.6 | 24.7 | 28.2 |

*For a description of the Two-foot Tunnel and its operation, see "The Use of a Small Flame Tunnel For Evaluating Fire Hazard" by H.L. Vandersall, Journal of Paint Technology, Vol. 39, No. 11, August 1967.

**Isopropylated triphenylphosphate.

***Trademark of Aluminum Company of America.

****Trademark of Merck & Co. Inc. For details see Monsanto U.S. Pat. 3,869,420.

Table C. Vertical Burn Performance of Antimony Trioxide Vs. All Phosphate Ester (50 PHR) Plasticizer

| | Federal Specification CCC-T-191b, Method 5903 | | |
|------------------------------------------------------|-----------------------------------------------|--------------------|------------|
| | Char Length (in.) | After-flame (sec.) | After-glow |
| 711 Phthalate + 4 PHR Sb ₂ O ₃ | 3.2 | 9.0 | 0 |
| Triarylphosphate* | 2.5 | 1.0 | 0 |
| Santicizer® 148 | 2.9 | 1.0 | 0 |

*Isopropylated triphenylphosphate.

(continued)

Table 15.73: (continued)

Table D. Comparison of Smoke Generation (50 PHR Plasticizer; Atomite Filler) Monsanto Two-foot Tunnel Results

| | % Light Transmission at Maximum Smoke Density* |
|---------------------------------------------------------------------------------------------|---------------------------------------------------|
| (a) 711 Phthalate (control) | 12 |
| (b) 50 PHR Phosphate Ester Triarylphosphate** Santicizer® 148 | 4 29 |
| (c) 25% Phosphate Ester blend with 711 Phthalate Triarylphosphate** Santicizer 148 | 10 25 |

*Monsanto Two-foot Tunnel (as used for plastic) equipped with smoke box.

**Isopropylated triphenylphosphate.

Table E. Comparison of Smoke Generation (50 PHR Plasticizer; Atomite Filler) NBS Smoke Chamber*

| | Specific Optical Density at Maximum Smoke Density in Chamber Dm Corrected | | |
|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------------|------------|
| | Flaming | Smoldering | Average |
| (a) 711 Phthalate (control) (50 PHR) | 165 | 194 | 180 |
| (b) 50 PHR Phosphate Ester Triarylphosphate** Santicizer® 148 | 346 173 | 209 94 | 278 139 |
| (c) 25% Phosphate Ester Blend with 711 Phthalate Triarylphosphate** Santicizer 148 | 235 177 | 209 153 | 222 165 |

*See N.B.S. Technical Note 708: ASTM E-662

**Isopropylated triphenylphosphate.

Table F. Santicizer® 148—Performance in PVC Fire Retardant Plastisol Formulation

| Brookfield HAT #6 Spindle 50 rpm | | 65 PHR |
|------------------------------------|----------------|-----------|
| Viscosity Poises @ 23°C | Initial | 25 |
| | 1 Day | 53 |
| | 7 Days | 74 |
| @ 40°C | Initial | 24 |
| | 1 Day | 185 |
| | 7 Days | Gel |

Table G. Santicizer® 148—Performance in PVC (40 Mil Sheet)

| | (30%) 43 PHR | (40%) 67 PHR | (50%) 100 PHR |
|---------------------------------------------------------------------|------------------------|-----------------|------------------|
| Volatility (% Plasticizer Lost) (Activated Carbon 24 hours at 87°C) | 2.9 | 2.8 | 3.1 |
| Low-temperature Flex, T _i °C (Clash-Berg Method) | -13 | -34 | -50 |
| Water Immersion (24 hours at 50°C) | Soluble Matter Lost, % | 0.05 | 0.16 |
| | Water Absorbed % | 0.33 | 0.53 |
| Kerosene Extraction (% Plasticizer Lost 24 hours at 23°C) | 1.7 | 6.4 | 14.6 |
| Shore "A" Hardness, 10 second reading | 83 | 69 | 52 |
| Tensile, p.s.i. | 2930 | 2210 | 1380 |
| Ultimate Elongation % | 370 | 460 | 500 |
| Modulus @ 100% Elongation | 1940 | 980 | 490 |
| Heat Stability | Fair | Fair | Fair |
| Fluxing Rate | Excellent | Excellent | Excellent |
| *Flammability (Limiting O ₂ Index) | 26.9 | 25.1 | 24.7 |
| Smoke Generation | Low | Low | Low |

*For formulation, see Section III, Performance in PVC.

*The Oxygen Index Test results are not intended to reflect performance of these or any other materials under actual fire conditions. Each user should determine independently whether potential fire hazards are associated with the finished product and whether Santicizer 148 is suitable for the particular use.

Table 15.74: Emulsifiable Triaryl Phosphate (76)

Reofos 1884 Emulsifiable triaryl phosphate

| Introduction | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Reofos 1884 is a water-dispersible phosphate ester product which combines the excellent flame retardance of triaryl phosphates with convenient dispersibility in aqueous systems. | Reofos 1884 is based on FMC's Reofos 65, a triaryl phosphate flame retardant which has found wide acceptance in vinyl, rubber, and other polymer systems. Reofos 1884 contains no water because it is a homogeneous mixture of Reofos 65 and a nonionic emulsifying agent. | |
| Typical properties | | |
| Acid number | 0.26 mg KOH/g | |
| Color (APHA) | 150-200 | |
| Specific gravity (20°/20°C) | 1.145-1.161 | |
| Weight loss, % (neat) | 105° C | 155° C |
| 2 hours | 0.224 | 0.40 |
| 4 hours | 0.235 | 0.77 |
| 24 hours | 0.466 | 3.82 |

Table 15.75: Proprietary Triaryl Phosphate Ester (75)

SANTICIZER 143

| Table A. Properties | |
|----------------------------------------------------|--------------------------|
| Phosphorus, % | 8.2 (Calc) |
| • Acidity (meq/100g) max. | 0.20 |
| • Appearance | Clear, oily liquid |
| • Color (APHA) [max.] | 100 |
| • Moisture % max. | 0.15% |
| • Refractive Index (@25°C) | 1.539 – 1.545 |
| • Specific Gravity (25°/25°C) | 1.144 – 1.158 |
| Density lbs./gal. | 9.58 |
| Viscosity (Centistokes) | |
| @ 0°C | 297 |
| @ 25°C | 44.2 |
| @ 100°C | 3.87 |
| Coefficient of Thermal Exp. @10-40°C (cc/cc/°C) | 0.00070 |
| Flash Point (C.O.C.) [°F.] | 475 |
| Fire Point (C.O.C.) [°F.] | 525 |
| Sol. In Water @ 25°C, % | <0.001 |
| CAS Number | 56803-37-3 29761-21-5 |

• Specification

(continued)

Table 15.75: (continued)

Table B. Comparative Performance Data of Santicizer® 143 in Clear Polyvinyl Chloride Film*

| | Phosphate Ester | | | | | | |
|---------------------------------------|-----------------|------|------|-----------------|------|----------------------------------------------|-----------------|
| | Santicizer® 143 | | | Santicizer® 148 | | Isopropylated Triphenyl (K-100) ³ | Tricresyl (TCP) |
| | 30 | 40 | 50 | 40 | 50 | 50 | 50 |
| PHR Plasticizer | | | | | | | |
| Hardness (Shore A) | 96 | 90 | 84 | 86 | 78 | 84 | 80 |
| Brittle Temp. (°C) | 20 | 9 | -2 | -10 | -20 | -2 | -3 |
| Low-temp. Flex. (°C) | 15 | 4 | -8 | -13 | -28 | -7 | -8 |
| Volatility (% Plast. Lost) | 2.7 | 3.0 | 3.5 | 2.8 | 3.3 | 3.3 | 1.5 |
| Oil Extraction (% Lost) | 1.2 | 1.5 | 2.0 | 1.8 | 2.3 | 1.5 | 0.5 |
| Tensile Strength (PSI) | 3570 | 3350 | 3135 | 3200 | 2805 | 3120 | 3220 |
| % Elongation at Break | 235 | 290 | 325 | 320 | 365 | 320 | 330 |
| 100% Modulus (PSI) | 3800 | 3040 | 2380 | 2500 | 1690 | 2475 | 1990 |
| Oxygen Index | 32.6 | 31.6 | 30.4 | 29.0 | 27.8 | 31.5 | 31.4 |
| Monsanto Two-foot Tunnel | | | | | | | |
| Flame Spread (in.) | 3.1 | 3.2 | 3.3 | 3.4 | 3.5 | 3.5 | 3.0 |
| % Light Transmittance | 18 | 16 | 15 | 33 | 32 | 10 | 5 |
| Vertical Burn (CCT 191B, 5903) | | | | | | | |
| After-flame (sec.) | 32 | 17 | 10 | 1.5 | 0.4 | 17 | 13 |
| Char Length (in.) | 3.0 | 2.6 | 2.2 | 1.8 | 1.7 | 2.2 | 2.0 |
| NBS Smoke Chamber | | | | | | | |
| Dm Flaming Mode | 236 | 275 | 305 | 155 | 171 | 345 | 303 |
| Dm Smoldering Mode | 128 | 141 | 157 | 85 | 98 | 188 | 163 |

Formulation

Geon¹ 102 EP 100 Parts
 Plasticizer as given
 Drapex² 10.4 3 Parts
 Mark³ WS 2 Parts

¹B. F. Goodrich Inc.²Argus Chemical Corp.³FMC Corp.

*These flammability test results are not intended to reflect performance of these or any other materials under actual fire conditions. Each user should determine independently whether potential fire hazards are associated with the finished products and whether Santicizer 143 is suitable for the particular use.

Table 15.76: Tributyoxyethyl Phosphate (76) KP-140®

KP-140 is tributyoxyethyl phosphate.
 Its CAS number is 78-51-3.

Formula

The formula of KP-140 is
 $(C_4H_9OC_2H_4O)_3 PO$

Specifications

| | |
|--------------------------|-----------------------------|
| Specific gravity at 20°C | 1.016-1.023 (ASTM D263-69) |
| Moisture | 0.2% w/w max (ASTM D364-64) |
| Colour (Pt-Co: APHA) | 75 max (ASTM D1209-69) |

Typical properties

The properties shown in the following tables are typical and do not represent specification limits

| Property | KP-140 |
|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Odour | mild, butyl type |
| Total acid number | <0.5 mgKOH/g |
| Boiling range at 4 mm Hg (533 Pa), Mid-boiling point at 4 mm Hg (533 Pa) | 215 to 228°C 222°C |
| Freezing point | <-70°C (viscous liquid) |
| Pour point | <-70°C |
| Flash point (PMCC) | 224°C (435°F) |
| Fire point | 252°C (485°F) |
| Viscosity at 20°C | 12.2 cp (mPa.s) |
| Vapour pressure | |
| at 150°C | <0.10 mm Hg (13.3 Pa) |
| at 200°C | 1.6 mm Hg (213 Pa) |
| Surface tension at 20°C | 30 dynes/cm (mN/m) |
| Refractive index N_D^{25} | 1.434 ± 0.002 |
| Specific heat at 50 to 150 | 0.58 average |
| Solubility | |
| in water at 25°C | 0.11% by weight |
| in water at 25°C | approx. 7.3% by volume |
| in mineral oil at 25°C | approx. 7.0% by volume |
| in gasoline at 25°C | complete |
| General solubility | Insoluble or limited solubility in glycerine, glycols, and certain amines. Soluble in most other organic liquids. |
| Thermal expansion at 10-40°C, | 0.00081 per °C |
| Density at 20°C | 1018 kg/m ³ (8.50 lb/US gallon) |

Table 15.77: Tributyl Phosphate (76)

Reomol TBP

| Formula | (C ₄ H ₉ O) ₃ PO | MW (mol) 266 |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|--------------|
| Specifications | | |
| Specific gravity @ 20°/20°C | 0.977-0.983 (ASTM D268-62/3) | |
| Moisture, % by weight | 0.20 max (ASTM D1364-62) | |
| Color Pt-Co (APHA) | 50 max (ASTM D1209-82) | |
| Typical properties | | |
| Odor | normal characteristic | |
| Acidity, % as acetic acid | 0.05 (ASTM D1613-61T) | |
| Boiling range @ 4 mm Hg (533 Pa), °C | 137-145 | |
| Mid-boiling range @ 4 mm Hg (533 Pa), °C | 139 | |
| Freezing point, °C | < -80 | |
| Pour point, °C | < -80 | |
| Flash point, °C (°F), PMCC | 115 (239) | |
| Fire point, °C (°F) | 182 (360) | |
| Viscosity, cp (mPa-s) @ 20°C | 3.7 | |
| Vapor pressure @ 150° C, mm Hg (kPa) | 7.3 (0.97) | |
| @ 200° C, mm Hg (kPa) | >500 (66.6) | |
| Surface tension @ 20° C, dyne/cm (m N/m) | 29 | |
| Refractive index, N _D ²⁵ | 1.423 ± 0.001 | |
| Solubility, in water @ 25°C | 0.1% | |
| water in @ 25°C | 7.0% | |
| in mineral oil @ 25°C | complete | |
| in gasoline @ 25°C | complete | |
| General solubility | Insoluble or limited solubility in glycerine, glycols, and certain amines. Soluble in most other organic liquids. | |
| Thermal expansion @ 10 to 40°C | 0.00086 per °C | |
| Lb/U.S. gal (kg/m ³) @ 20°C | 8.14 (975) | |

Table 15.78: Triphenyl Phosphate (75)

| Table A. Properties | |
|-----------------------------------|----------------------|
| Molecular Weight | 326 |
| Phosphorus, % | 9.5 (Calc) |
| • Acidity (meq/100 gm. max) | 0.10 |
| • Appearance | White flakes |
| • Color (APHA) [max.] | 20 (molten) |
| • Odor (max.) | Very faint, aromatic |
| Refractive index (@ 60°C) | 1.550 |
| Specific Gravity (60°/20°C) | 1.268 |
| Density (@ 60°C) ca. lbs./gal. | 10.5 |
| Crystallizing Point (°C) | 49 |
| Boiling Point (@ 10mm Hg, °C) | 238 |
| Vapor Pressure (mm Hg) @ 150°C | >0.1 |
| @ 200°C | 1.3 |
| @ 250°C | 18.2 |
| Viscosity (Centistokes) @ 55°C | 7.8 |
| @ 98.9°C | 2.9 |
| Flash Point (C.O.C.) [°F.] | 437 |
| Solubility In Water @ 34°C, % | 0.002 |
| CAS Number | 115-86-6 |

• Specification

(continued)

Table 15.78: (continued)

| | (PHR) |
|------------------------------|--------------|
| Polyvinyl chloride | 20 |
| Polyvinyl acetate | 80 |
| Nitrocellulose | 75 |
| Cellulose acetate | 35 |
| Cellulose acetate-propionate | 50 |
| Cellulose acetate-butyrate | 50 |
| Ethyl cellulose | 30 |
| Acrylics | 25 |
| Santolite® MHP resin | 100 |
| Neoprene | 50 |
| Nitrile rubber | 50 |
| Phenolic | 50 |

Table C. Triphenyl Phosphate Performance in Cellulosic Resins

| Resin | Cellulose Acetate | | Ethyl Cellulose | | Nitro-Cellulose | | Cellulose Acetate-Butyrate |
|-----------------------------|--------------------------|------|------------------------|------|------------------------|------|-----------------------------------|
| | | | | | | | |
| PHR | 42.5 | 0 | 15 | 0 | 50 | 33 | |
| Solution Temperature °C. | 180 | — | — | — | — | — | — |
| Yield, p.s.i. | — | 6755 | 4550 | — | — | — | — |
| Tensile, p.s.i. | — | 8960 | 6685 | 8533 | 4410 | 2500 | |
| Elongation, % | — | 30 | 30 | 6 | 8 | 10 | |
| Hardness | 81 | 100 | 70 | — | — | — | |
| Sward Hardness | — | — | — | — | — | 40 | |
| Volatility | — | E | E | — | — | — | |
| Flexibility | | | | | | | |
| Schopper Fold Cycles | — | — | — | 20 | 24 | — | |
| Flexural Strength, p.s.i. | 9020 | — | — | — | — | — | |
| Moisture Permeability, % | — | — | — | 100 | 56 | — | |
| % Water Absorbed in 24 hrs. | 1.17 | — | — | — | — | — | |

PHOSPHITES

Table 15.79: Dialkyl Hydrogen Phosphites (64)







| Property | <u>PHYSICAL PROPERTIES</u> | | | |
|------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|-----------------------------------------------------------------|
| | <u>Dimethyl Hydrogen Phosphite</u> | <u>Diethyl Hydrogen Phosphite</u> | <u>Dibutyl Hydrogen Phosphite</u> | <u>Bis(2-ethylhexyl) Hydrogen Phosphite</u> |
| Formula | $(\text{CH}_3\text{O})_2\text{P}(\text{O})\text{H}$ | $(\text{C}_2\text{H}_5\text{O})_2\text{P}(\text{O})\text{H}$ | $(\text{C}_4\text{H}_9\text{O})_2\text{P}(\text{O})\text{H}$ | $(\text{C}_8\text{H}_{17}\text{O})_2\text{P}(\text{O})\text{H}$ |
| Molecular Weight | 110.1 | 138.1 | 194.2 | 306.4 |
| Appearance | colorless liquid | colorless liquid | colorless liquid | colorless liquid |
| Odor | mild, characteristic | mild, pleasant | mild, pleasant | mild, suggestive of octyl alcohol |
| Boiling Point | 72-3° C/25 mm | 65-66° C/6 mm | 118-9° C/7 mm | 163-4° C/3 mm |
| Specific Gravity 20°/4° | 1.200 | 1.079 | 0.995 | 0.937 |
| Index of Refraction, n_D^{20} | 1.4016 | 1.4073 | 1.4238 | 1.4423 |
| Flash Point, Cleveland, open cup | 205° F | 195° F | 250° F | 330° F |
| Fire Point, Cleveland, open cup | 220° F | 220° F | 300° F | 400° F |
| Viscosity (Centistokes) 77° F | 1.08 | 1.21 | 2.36 | 6.54 |
| 100° F | 0.92 | 1.03 | 1.90 | 4.72 |
| 210° F | 0.51 | 0.56 | 0.89 | 1.59 |
| Toxicity (single dose oral LD ₅₀ , rats), mg/kg | 3,050 | 1,000 | 3,900 | 11,900 |
| Acidity | neutral | neutral | neutral | neutral |
| Solubility in water: | sol., hydrolyzes | sol., hydrolyzes | sl. sol., slowly hydrolyzes | insol., very slowly hydrolyzes |
| in other solvents: | miscible with alcohol, ether, acetone and most common organic solvents. | | | |

Table 15.80: Trialkyl Phosphites (64)

PHYSICAL PROPERTIES

| <u>Property</u> | <u>Trimethyl Phosphite</u> | <u>Triethyl Phosphite</u> | <u>Tris(2-chloroethyl) Phosphite</u> | <u>Triisopropyl Phosphite</u> | <u>Tributyl Phosphite</u> | <u>Triisooctyl Phosphite</u> | <u>Tris(2-ethylhexyl) Phosphite</u> |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|----------------------------------------------------|--------------------------------------------------|--------------------------------------------------|---------------------------------------------------|---------------------------------------------------|
| Formula | (CH ₃ O) ₃ P | (C ₂ H ₅ O) ₃ P | (ClC ₂ H ₄ O) ₃ P | (C ₃ H ₇ O) ₃ P | (C ₄ H ₉ O) ₃ P | (C ₈ H ₁₇ O) ₃ P | (C ₈ H ₁₇ O) ₃ P |
| Molecular Weight | 124.08 | 166.2 | 269.5 | 208.2 | 250.3 | 418.6 | 418.6 |
| Appearance | colorless liquid | colorless liquid | colorless liquid | colorless liquid | colorless liquid | colorless liquid | colorless liquid |
| Odor | penetrating | sweet, characteristic | mild, characteristic | sweet, characteristic | mild, not unpleasant | mild, not unpleasant | mild, not unpleasant |
| Boiling Point | 111-112°C | 65°C/24 mm | 119°C/0.15 mm | 94-6°C/50 mm | 118-25°C/7 mm | 161-4°C/0.3 mm | 163-4°C/0.3 mm |
| Specific Gravity 20°/4° | 1.046 | 0.969 | 1.353 | 0.914 | 0.925 | 0.891 | 0.902 |
| Index of Refraction, n_D^{20} | 1.4076 | 1.4131 | 1.4878 | 1.4101 | 1.4327 | 1.4498 | 1.4494 |
| Flash Point, Cleveland, open cup | 100° F | 130° F | 375° F | 165° F | 250° F | 385° F | 365° F |
| Fire Point, Cleveland, open cup | 100° F | 160° F | 410° F | 195° F | 275° F | 410° F | 400° F |
| Viscosity (Centistokes) 77° F | 0.58 | 0.74 | 5.22 | 1.18 | 2.08 | 9.49 | 8.35 |
| 100° F | 0.52 | 0.65 | 4.11 | 0.99 | 1.65 | 6.85 | 5.86 |
| 210° F | 0.32 | 0.40 | 1.45 | 0.57 | 0.86 | 2.24 | 1.90 |
| Toxicity (single dose oral LD ₅₀ , rats), mg/kg | 2,000 | 3,160 | 250 | 2,300 | 3,000 | 9,200 | ----- |
| Solubility in water: | insol. but reacts with | sl. sol., hydrolyzes | insol., slowly hydrolyzes | insol., slowly hydrolyzes | insol., slowly hydrolyzes | insol., very slowly hydrolyzes | insol., very slowly hydrolyzes |
| In other solvents: | miscible with alcohol, acetone, benzene, ether, heptane, carbon tetrachloride, and most of the common organic solvents. | | | | | | |

Table 15.81: Tertiary Phosphites (27)

| Name | Formula | Molecular Weight | Oral Toxicity LD50 Microliters per Kg of Rat Wt. | Color and Form | Phosphorus Content % P | Melting Point °C | Boiling Point °C | Refractive Index n _D ²⁵ | Specific Gravity 25/15°C | Flash Point (°C/°F) | Viscosity Centistokes | | | Vapor Pressure |
|----------------------------------------------------------|-----------------------------------------------------------------------------------|------------------|--------------------------------------------------------|--------------------------------------|------------------------------|------------------------|------------------------|-----------------------------------------------------|--------------------------------|---------------------------|-----------------------|--------|--------|---------------------------------|
| | | | | | | | | | | | 68° F | 100° F | 210° F | |
| Trimethyl Phosphite | (CH ₃ O) ₃ P | 124 | 2000 | Water-white liquid | 24.97 | < -78 | 111 ± 1 | 1.404 | 1.045 | 130 | — | 0.51 | 0.30 | 10 mm at 12°C 100 mm at 55°C |
| Triethyl Phosphite | (C ₂ H ₅ O) ₃ P | 166 | 3160 | Water-white liquid | 18.67 | — | 154 ± 1 | 1.413 | 0.954 | — | — | — | — | — |
| Tri(2-ethylhexyl) Phosphite | (C ₈ H ₁₇ O) ₃ P | 418 | — | Straw-colored liquid | 7.45 | glass at low temp. | — | 1.451 | 0.897 | 340 | 8.5 | 5.03 | — | — |
| Tridecyl Phosphite (iso) | (C ₁₃ H ₂₇ O) ₃ P | 502 | > 10000 | Water-white liquid | 6.17 | < 0 | 180 at 0.1 mm | 1.454 | 0.886 | 455 | — | 11.24 | 2.90 | — |
| Trilauryl Phosphite | (C ₁₂ H ₂₅ O) ₃ P | 586 | > 3160 | Water-white liquid | 5.29 | < 10 | — | 1.456 | 0.866 | — | — | — | — | — |
| Trioctadecyl Phosphite | (C ₁₈ H ₃₇ O) ₃ P | 838 | > 10000 | White waxy solid | 3.70 | 45-47 | — | — | 0.940* | — | — | — | — | — |
| Trilauryl Trithiophosphite | (C ₁₂ H ₂₅ S) ₃ P | 634 | > 10000 | Light straw-colored liquid | 4.89 | 20 | — | 1.502 | 0.915 | 430 | — | 24.7 | 5.7 | 0.01 mm at 200°C |
| Triphenyl Phosphite |  | 310 | Approx. 2800 | Water-white to pale yellow liquid | 10.0 | 22-25 | 155-160 at 0.1 mm | 1.589 | 1.184 | 425 | — | 8.34 | 2.07 | — |
| Diphenyldodecyl Phosphite (iso) |  | 374 | > 10000 | Water-white liquid | 8.28 | 18 | — | 1.516 | 1.024 | 425 | — | 7.82 | 2.26 | — |
| Phenyldodecyl Phosphite (iso) |  | 438 | > 10000 | Water-white liquid | 7.07 | < 0 | — | 1.478 | 0.940 | 425 | — | 8.95 | 2.42 | — |
| "Pentite" — [tetra (diphenyl phosphito) pentaerythritol] |  | 989 | 1500 | White waxy solid | 12.4 | 30-60 | — | — | 1.240 | — | — | — | — | — |
| "Dipentite" — [diphenyl pentaerythritol diphosphite] |  | 380 | 5000 | White solid | 16.3 | 70-80 | 190-200 at 0.1 mm | — | — | — | — | — | — | — |
| Phenylneopentyl Phosphite |  | 226 | 1780 | Water-white liquid | 13.70 | 19 | 138-140 at 10 mm | 1.517 | 1.135 | — | — | — | — | — |
| 1620 Polymeric Phosphite | Bisphenol A-Pentaerythritol Phosphite | Av 1100 | > 3160 | White solid | 16.1 ± 0.2 | 100-110 | — | — | — | — | — | — | — | — |

*Density


Table 15.82: Organophosphites (27)

| | PHYSICAL DATA | | | |
|----------------------------------------------|---------------|---------------|-------------|----------|
| | Triphenyl | Diphenyldecyl | Phenyldecyl | Tridecyl |
| Phosphorus Content | 10% | 8.28% | 7.07% | 6.17% |
| Melting Point | 22°-25°C. | 18°C. | < 0°C. | < 0°C. |
| Boiling Point at 0.1 mm. | 155°-160°C. | — | — | 180°C. |
| Refractive Index, n ₂₅ /D | 1.589 | 1.5160 | 1.4785 | 1.4560 |
| Flash Point (Cleveland open cup) | 425°F. | 425°F. | 425°F. | 455°F. |
| Fire Point (Cleveland open cup) | 470°F. | 455°F. | 470°F. | 485°F. |
| Specific Gravity, 25°/15.5°C. | 1.184 | 1.023 | 0.940 | 0.891 |
| Specific Gravity Correction Factor, per 1°C. | 0.00085 | 0.00077 | 0.00073 | 0.00066 |
| Pounds per Gallon at 25°C. | 9.86 | 8.520 | 7.829 | 7.421 |
| Viscosity in Centistokes: | | | | |
| at 100°F. | 8.34 | 7.82 | 8.95 | 11.24 |
| at 210°F. | 2.07 | 2.26 | 2.42 | 2.90 |

SILICATES

Table 15.83: Ethyl Silicate (2)

Silicon Tetraethyl Ester
Ortho-Silicic Acid Ethyl Ester



Ethyl silicate is a water-white liquid, soluble in alcohol. It hydrolyzes in water to an adhesive form of silicic acid and alcohol. It is used in lacquers and paint as a pigment binder giving films that are resistant to fire and chemicals and are weatherproof. A less pure, higher silica ester, Ethyl Silicate 40, is also available commercially.

Specifications—Tetraethyl Silicate

| | |
|-----------------------------------------|-------------------|
| Acidity (as HCl) | 0.05% by wt, max |
| Available silica (as SiO ₂) | 28.8% |
| Boiling point | 165.5°C |
| Boiling range at 760 mm | |
| Below 160°C | Not more than 5% |
| Below 170°C | Not less than 95% |
| Color | Water-white |
| Purity | 97%, min |
| Specific gravity at 20/20°C | 0.933 to 0.938 |
| Weight per gal at 20°C | 7.78 lbs |

Specifications—Ethyl Silicate

| | |
|-----------------------------------------|------------------|
| Acidity, maximum acidity (as HCl) | 0.1% |
| Available silica (as SiO ₂) | 34-42% |
| Boiling point | 165°C |
| Boiling range at 760 mm | |
| Below 80°C | None |
| Below 110°C | Not more than 5% |
| Color | Light brown |
| Odor initial | Mild |
| Specific gravity at 20/20°C | 1.050 to 1.070 |
| Weight per gal at 20°C | 8.82 lbs |

PLASTICIZERS

Table 15.84: Summary of Typical Properties of Plasticizers (75)

| | Phthalates | | | | | Adipates | |
|-------------------------------------------|------------------------|-------------------------|-------------------------|-------------------------|------------------------|---------------------|---------------------|
| | Diocetyl* | Santicoizer® 160 | Santicoizer 261 | Santicoizer 278 | Dibutyl* | Santicoizer 97 | Diocetyl |
| Molecular Weight | 391 | 312 | 368 | 455 | 278 | 370 | 371 |
| Acidity** (meq./100 gm. max.) | 0.12 | •0.37 | •0.37 | •0.37 | 0.12 | •0.25 | •0.25 |
| Appearance | Clear, oily liquid | •Clear, oily liquid | •Clear, oily liquid | •Clear, oily liquid | Clear, oily liquid | •Clear, oily liquid | •Clear, oily liquid |
| Color (APHA) (max.) | 25 | •40 | •75 | •175 | 20 | •50 | •25 |
| Moisture (KF in Methanol) % max. | 0.10 | •0.15 | •0.15 | •0.15 | 0.15 | •0.10 | •0.10 |
| Odor | Slight, characteristic | •Slight, characteristic | •Slight, characteristic | •Slight, characteristic | Slight, characteristic | | •Mild |
| Refractive Index (at 25°C) | 1.4845-1.4858 | •1.535-1.540 | •1.523-1.529 | •1.516-1.520 | 1.4895-1.4915 | •1.441-1.447 | •1.444-1.448 |
| Specific Gravity (25°/25°C) | 0.980-0.985 | •1.115-1.123 | •1.065-1.074 | •1.093-1.100 | 1.044-1.048 | •0.916-0.924 | •0.921-0.927 |
| Density (at 25°C) ca. lbs./gal. | 8.18 | 9.3 | 8.9 | 9.1 | 8.72 | 7.7 | 7.72 |
| Crystallizing Point (°C)*** | -55 (very stiff gel) | <-35 | - | - | <-35 | -13 | <-70 |
| Pour Point (°C) | -47 | -45 | -45 | -6.5 | -40 | - | -65 |
| Flash Point (C.O.C.) (°F) | 425 | 390 | 445 | 440 | 340 | 400 | 377 |
| Fire Point (C.O.C.) (°F) | 480 | 450 | - | 535 | 395 | 450 | 450 |
| Boiling Point @ 10 mm Hg. °C | 236 | 240 | 252 | 243 | 192 | 224 | 224 |
| Vapor Pressure | | | | | | | |
| @ 150°C | - | 0.14 | - | - | .08 | - | - |
| @ 200°C | 1.2 | 1.9 | 0.5 | 0.5 | 14.0 | 3.3 | 2.3 |
| @ 250°C | 18 | 14.4 | 9.7 | 15 | 100 | 27 | 32 |
| % VOC, EPA method 24**** | 1.5 | 2.3 | 0.7 | 1.1 | 14.8 | 2.8 | 4.2 |
| Viscosity (centistokes) | | | | | | | |
| @ 0°C | 348.0 | 230 | - | ca 10,000 | 55.0 | - | - |
| @ 25°C | 58.0 | 39.5 | 53 | 800 | 15.6 | 12.8 | 12.3 |
| @ 98.9°C | 4.3 | 3.42 | 4.2 | 11.5 | 2.4 | 2.6 | 2.4 |
| Surface Tension @ 20°C (dynes/cm.) | 33 (25°C) | 39.9 (25°C) | 35.3 (24°C) | 34.8 (25°C) | 35 (30°C) | 30.3 (25°C) | 29 |
| Solubility in Water @ 25°C (%) | <0.005 | 0.0003 (30°C) | 0.00003 | Practically insol. | <0.001 (30°C) | <0.01 | <0.01 |
| Hydroxyl # | - | <1 | 2 | 2-4 | - | - | - |

(continued)

Table 15.84: (continued)

| | Phosphates | | | | | Specialty Modifiers | |
|-------------------------------------------|-----------------------|-----------------------|-----------------------|---------------------|-----------------------|-----------------------------|-------------------------------------------|
| | Santizer 141 | Santizer 148 | Santizer 2148 | Santizer 143 | Santizer 184 | HB-40 | |
| Molecular Weight | 362 | 390 | - | - | 368 | - | Molecular Weight |
| Acidity** (meq./100 gm. max.) | •0.20 | •0.20 | •0.20 | •0.20 | •0.25 | - | Acidity** (meq./100 gm. max.) |
| Appearance | •Clear, oily liquid | •Clear, oily liquid | •Clear, oily liquid | •Clear, oily liquid | •Clear, oily liquid | Clear, oily liquid | Appearance |
| Color (APHA) (max.) | •40 | •100 | •200 | •100 | •60 | •450 | Color (APHA) (max.) |
| Moisture (KF in Methanol) % max. | •0.10 | •0.10 | •0.10 | •0.15 | •0.15 | •150 ppm | Moisture (KF in Methanol) % max. |
| Odor | •Essentially odorless | •Essentially odorless | •Essentially odorless | - | •Essentially odorless | Faint, characteristic | Odor |
| Refractive Index (at 25°C) | •1.506-1.510 | •1.501-1.507 | •1.494-1.502 | •1.539-1.545 | •1.5535-1.5565 | •1.560-1.575 | Refractive Index (at 25°C) |
| Specific Gravity (25°/25°C) | •1.085-1.091 | •1.061-1.071 | •1.028-1.044 | •1.144-1.158 | •1.175-1.185 | 1.001-1.009 (25°/15.5°C) | Specific Gravity (25°/25°C) |
| Density (at 25°C) ca. lbs./gal. | 9.1 | 8.94 | 8.65 | 9.6 | 9.8 | 8.4 | Density (at 25°C) ca. lbs./gal. |
| Crystallizing Point (°C)*** | - | <-35 | 0 | - | <-20 | - | Crystallizing Point (°C)*** |
| Pour Point (°C) | -54 | <-50 | - | - | -25 | -26 | Pour Point (°C) |
| Flash Point (C.O.C.) (°F) | 435 | 465 | 445 | 475 | 505 | 345 | Flash Point (C.O.C.) (°F) |
| Fire Point (C.O.C.) (°F) | 460 | 500 | 500 | 525 | 590 | 385 | Fire Point (C.O.C.) (°F) |
| Boiling Point @ 10 mm Hg. °C | 239 (dec) | 245 (dec) | 230 (dec) | - | 258 | 180 | Boiling Point @ 10 mm Hg. °C |
| Vapor Pressure | | | | | | | Vapor Pressure |
| @ 150°C | 0.2 | <0.1 | - | - | - | 2.6 | @ 150°C |
| @ 200°C | 1.6 | 0.5 | <0.2 | - | 1.0 | 22 | @ 200°C |
| @ 250°C | - | - | - | - | 7.4 | 95 | @ 250°C |
| % VOC, EPA method 24**** | 2.5 | 1.6 | 0.4 | - | 0.7 | - | % VOC, EPA method 24**** |
| Viscosity (centistokes) @ 0°C | 61.0 | 95 | - | 297 | 475 | 1,200-2,000 | Viscosity (centistokes) @ 0°C |
| @ 25°C | 16.4 | 22.5 | 24 | 44.2 | 58 | 75-200 | @ 25°C |
| @ 98.9°C | 2.5 | 3.0 | 3.5 | - | - | 3.9-4.4 | @ 98.9°C |
| Surface Tension @ 20°C (dynes/cm.) | 33.4 (22°C) | - | 36.4 | - | 38.6 (23°C) | 40.1 | Surface Tension @ 20°C (dynes/cm.) |
| Solubility in Water @ 25°C (%) | 0.003 | <0.003 | <0.2 | <0.001 | <0.001 | Practically insol. | Solubility in Water @ 25°C (%) |
| Hydroxyl # | <3 | <3 | >4 | <3 | <1 | <1 | Hydroxyl # |

*Specification.

*Registered Trademark of Monsanto Co.

*This product is no longer manufactured by Monsanto. Data is included for reference only.

**To convert from meq/100 gram, multiply by 0.559 to obtain "acid no." (milligrams KOH per gram of sample).

***Crystallizing point is NOT a valid predictor of low temperature performance in a polymer system.

****Tested per ASTM-2369 as specified in EPA method 24. Tested WITH toluene solvent as specified in ASTM method. Testing without toluene reduces measured VOC 10-50% below values reported here.

HPLC and UV Data

GC-FID CHROMATOGRAMS

Table 16.1: Methylene Chloride (56)

These capillary GC-FID Chromatograms show the significant decrease in impurity content from raw material to finished product.

Raw Material: Methylene Chloride
500 → 5 concentration


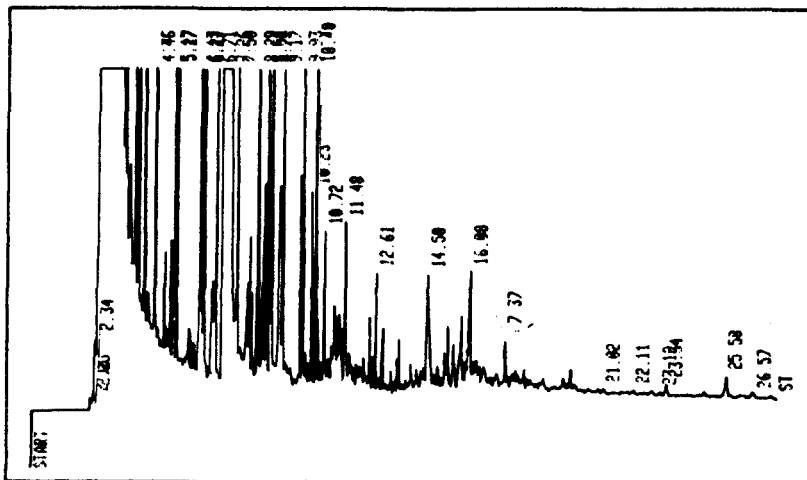


Table 16.1: (continued)

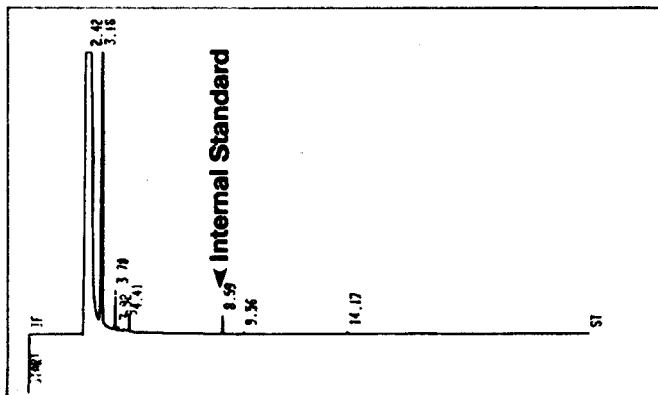
Finished Product: HPLC Methylene Chloride
 #9315
 500 → 5 concentration



HPLC GRADIENT CHROMATOGRAMS

Table 16.2: Water vs Methanol (56)

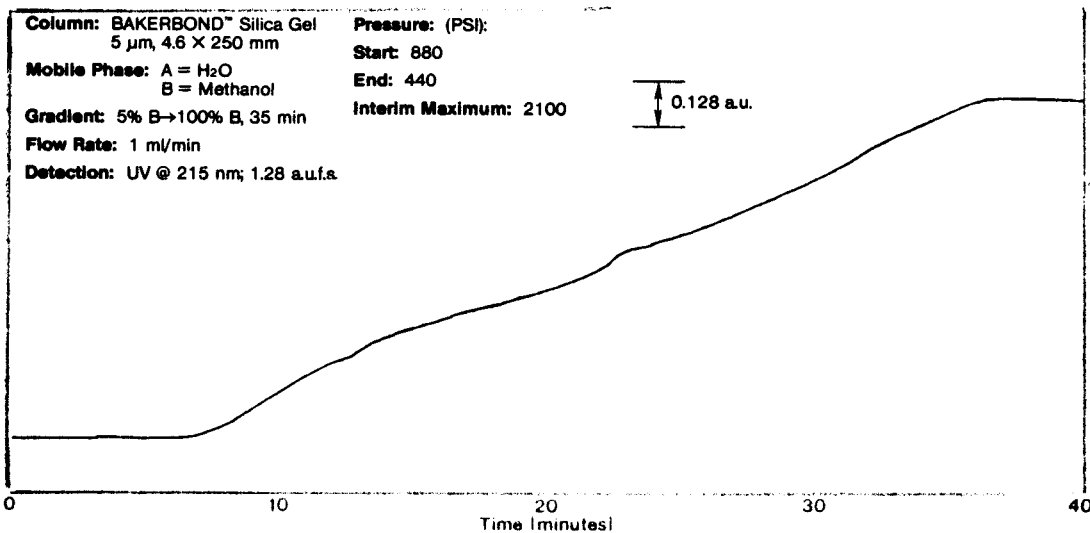Water Versus Methanol - 215nm



Water Versus Methanol - 254nm

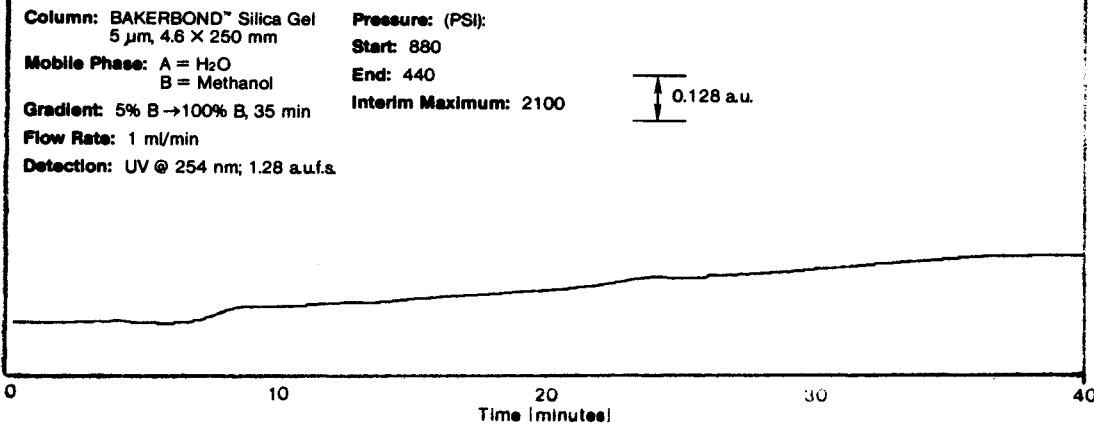



Table 16.3: Water vs Acetonitrile (56)

Water Versus Acetonitrile - 200nm

Column: BAKERBOND™ Silica Gel 5 μm, 4.6 X 250 mm
 Mobile Phase: A = H₂O
 B = Acetonitrile
 Gradient: 5% B → 100% B, 35 min
 Flow Rate: 1 ml/min
 Detection: UV @ 200 nm; 1.28 a.u.f.s

Pressure: (PSI):
 Start: 880
 End: 150
 Interim Maximum: N/A

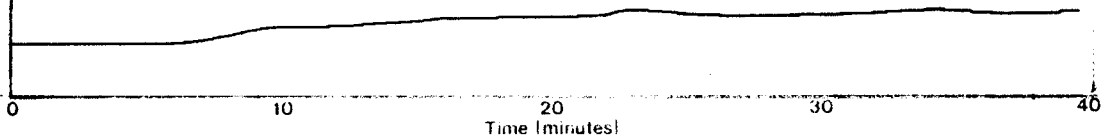0.128 a.u.




Water Versus Acetonitrile - 215nm

Column: BAKERBOND™ Silica Gel 5 μm, 4.6 X 250 mm
 Mobile Phase: A = H₂O
 B = Acetonitrile
 Gradient: 5% B → 100% B, 35 min
 Flow Rate: 1 ml/min
 Detection: UV @ 215 nm; 1.28 a.u.f.s

Pressure: (PSI):
 Start: 880
 End: 150
 Interim Maximum: N/A

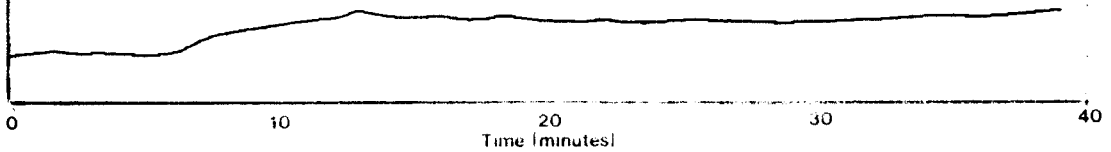0.128 a.u.



Water Versus Acetonitrile - 254nm

Column: BAKERBOND™ Silica Gel 5 μm, 4.6 X 250 mm
 Mobile Phase: A = H₂O
 B = Acetonitrile
 Gradient: 5% B → 100% B, 35 min
 Flow Rate: 1 ml/min
 Detection: UV @ 254 nm; 0.64 a.u.f.s

Pressure: (PSI):
 Start: 880
 End: 150
 Interim Maximum: N/A

0.064 a.u.

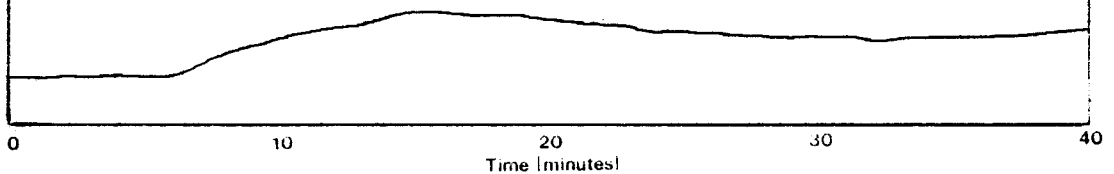


Table 16.4: Water vs 2-Propanol (56)


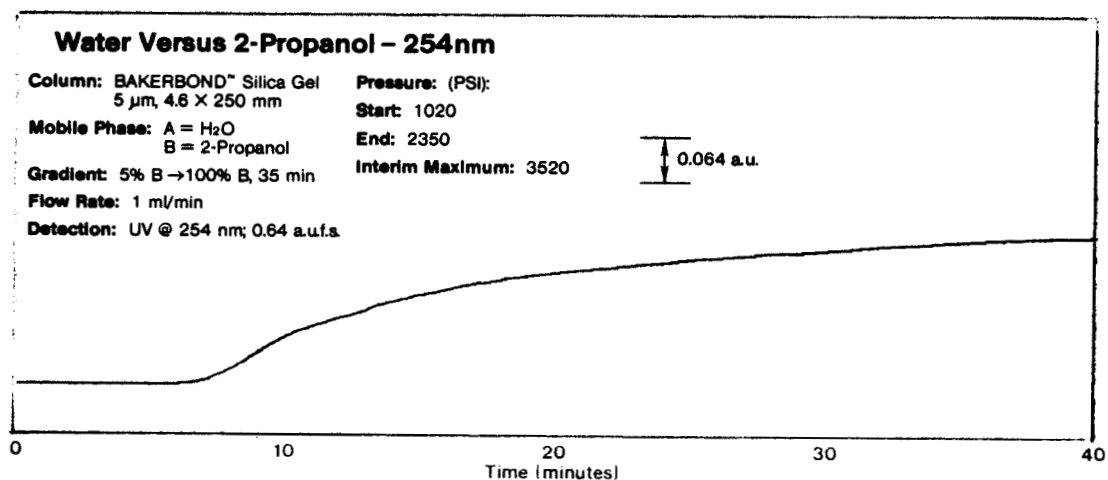
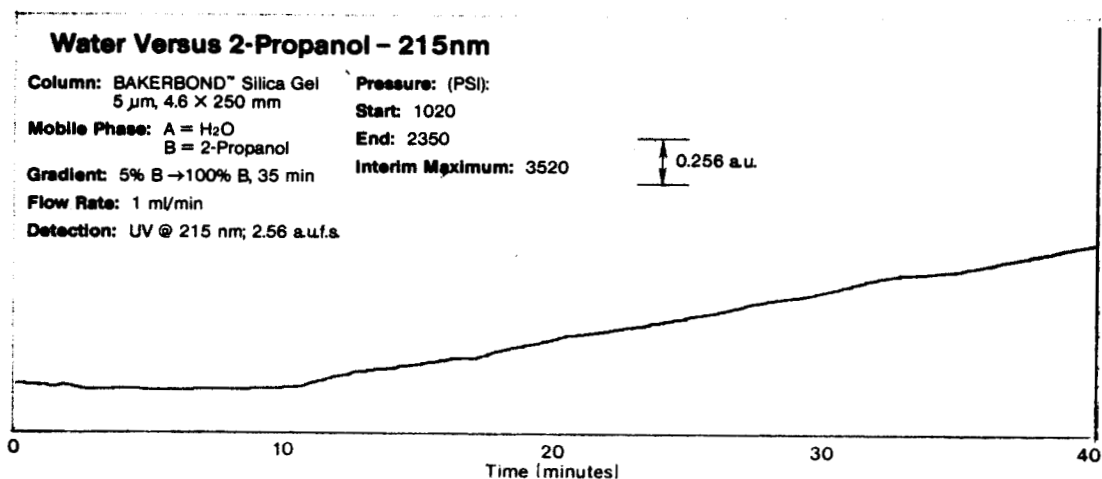


Table 16.5: Water vs Tetrahydrofuran (56)

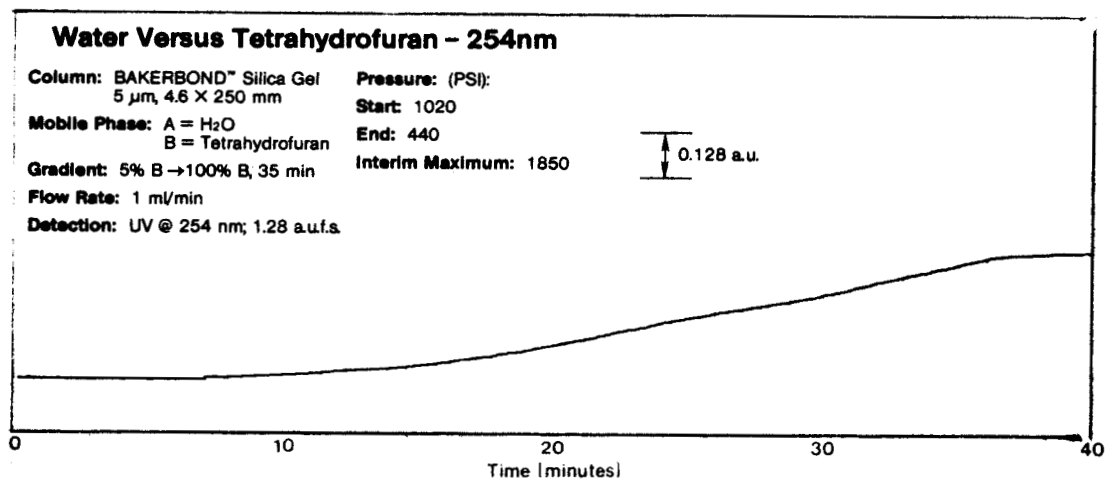

(continued)

Table 16.5: (continued)


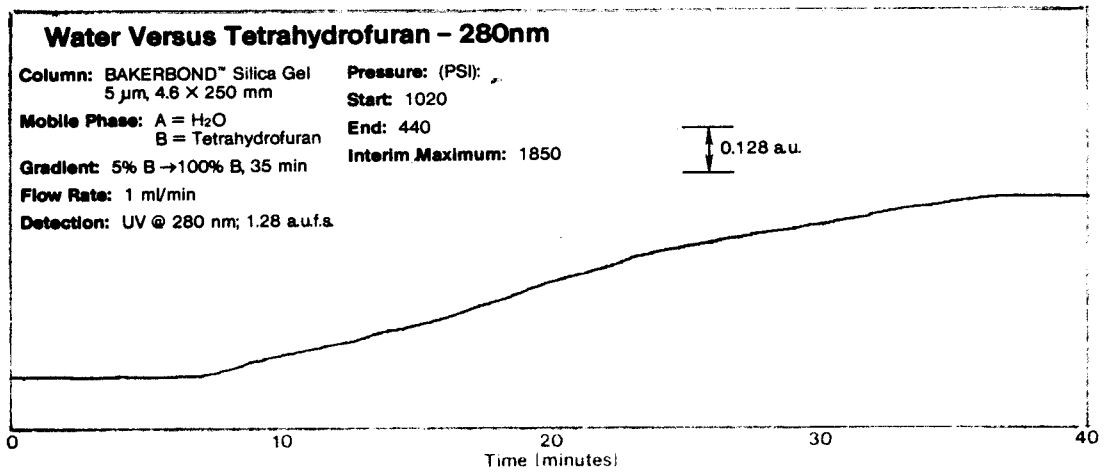
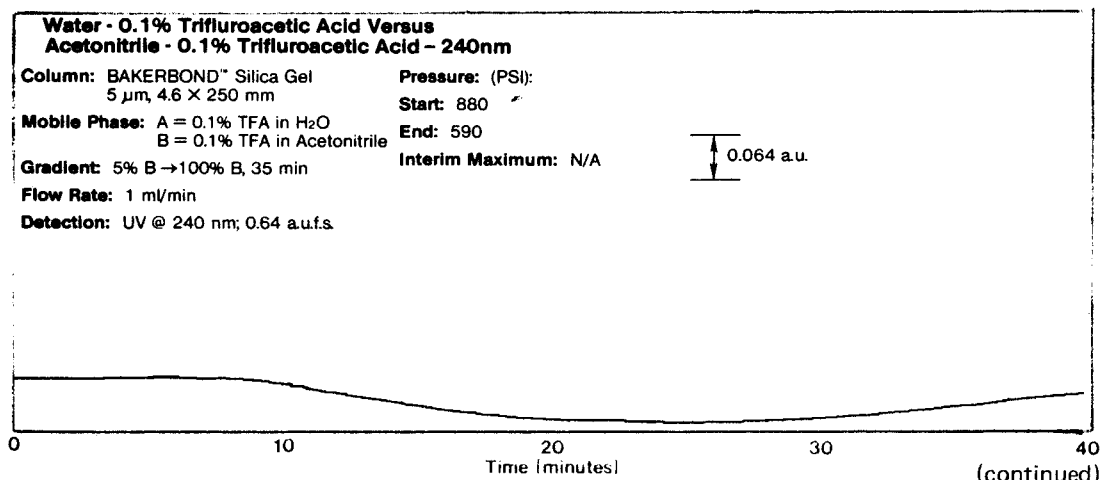


Table 16.6: Water-0.1% Trifluoroacetic Acid vs Acetonitrile-0.1% Trifluoroacetic Acid (56)

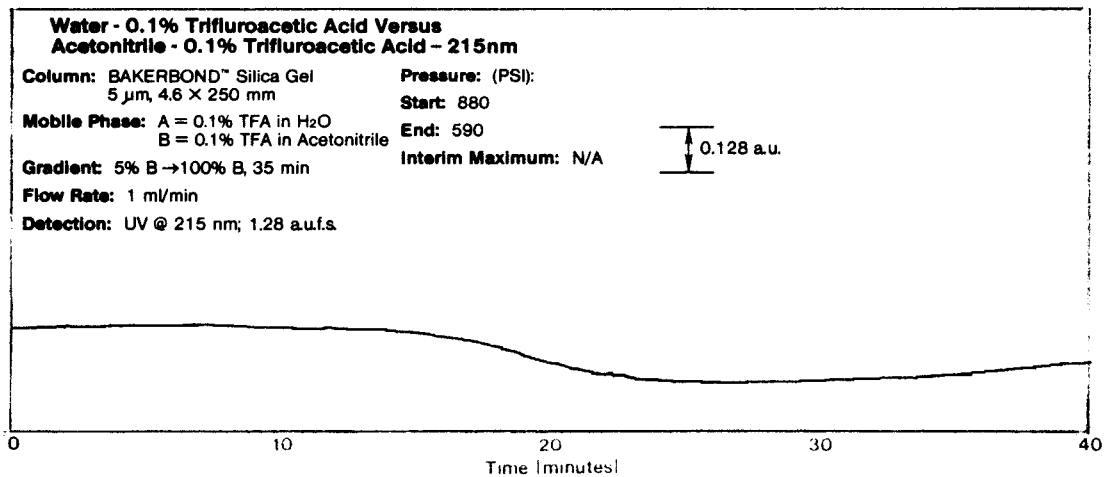

(continued)

Table 16.6: (continued)

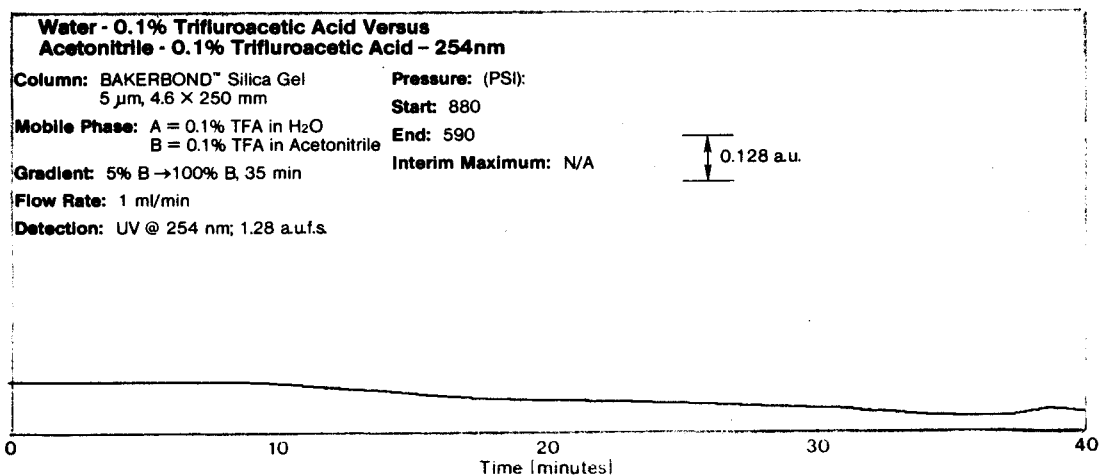


Table 16.7: 0.1 M Potassium Phosphate vs Acetonitrile (56)

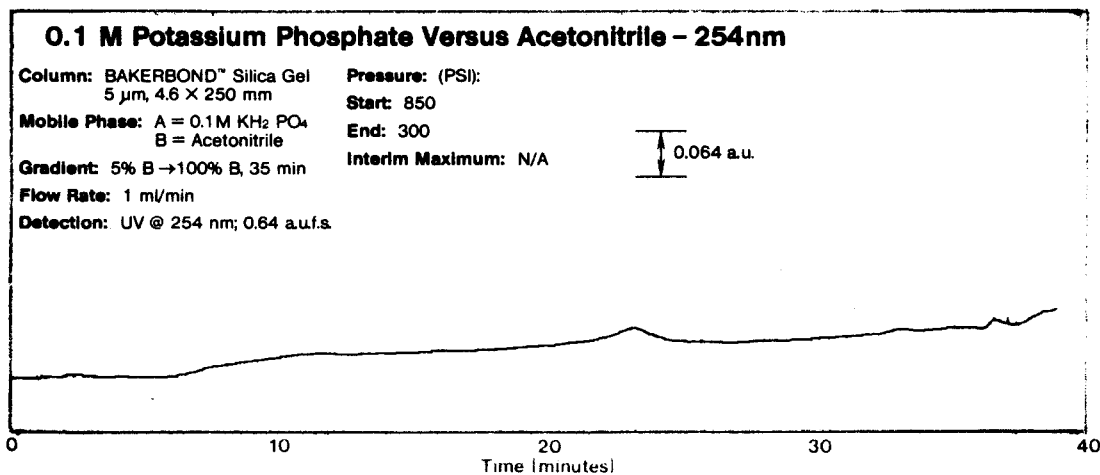
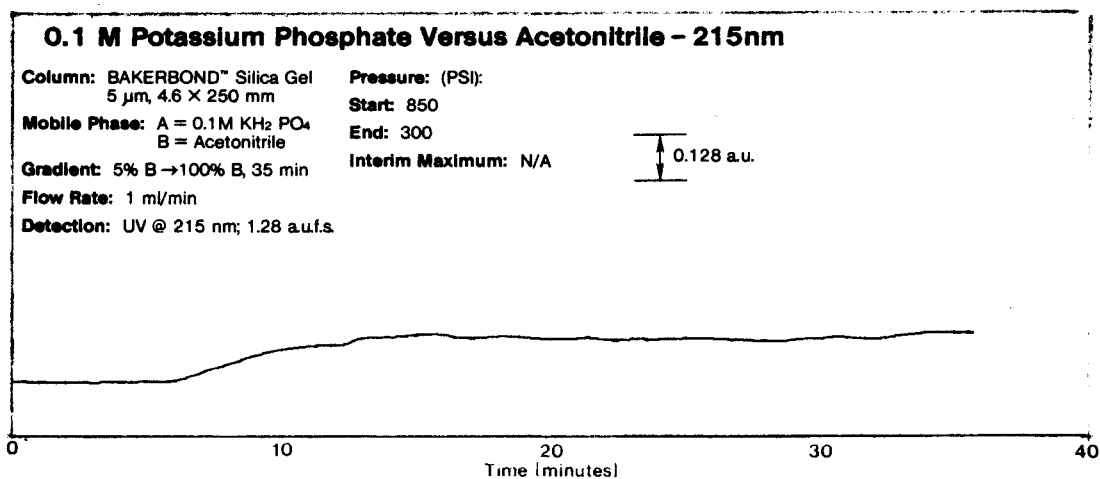


Table 16.8: 0.1 M Potassium Phosphate vs Methanol (56)


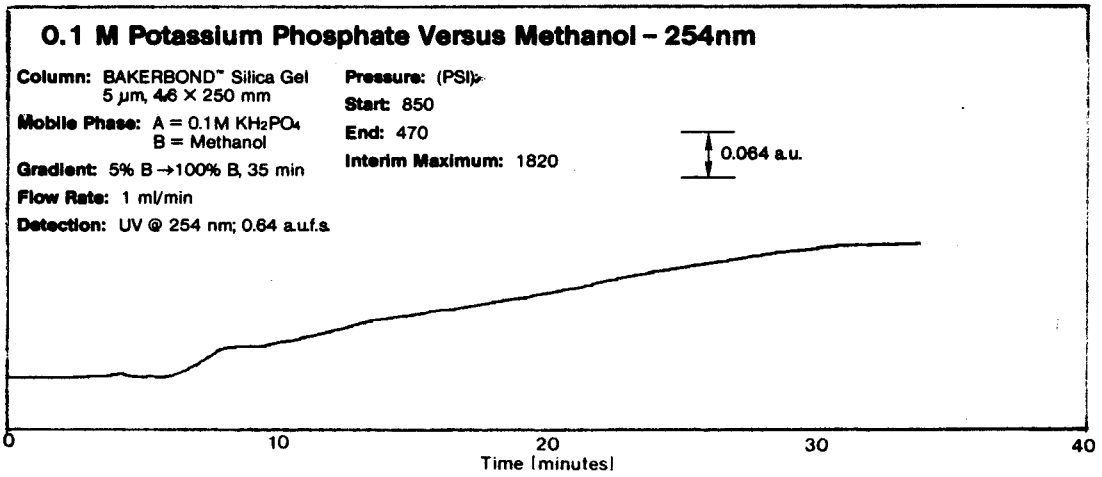
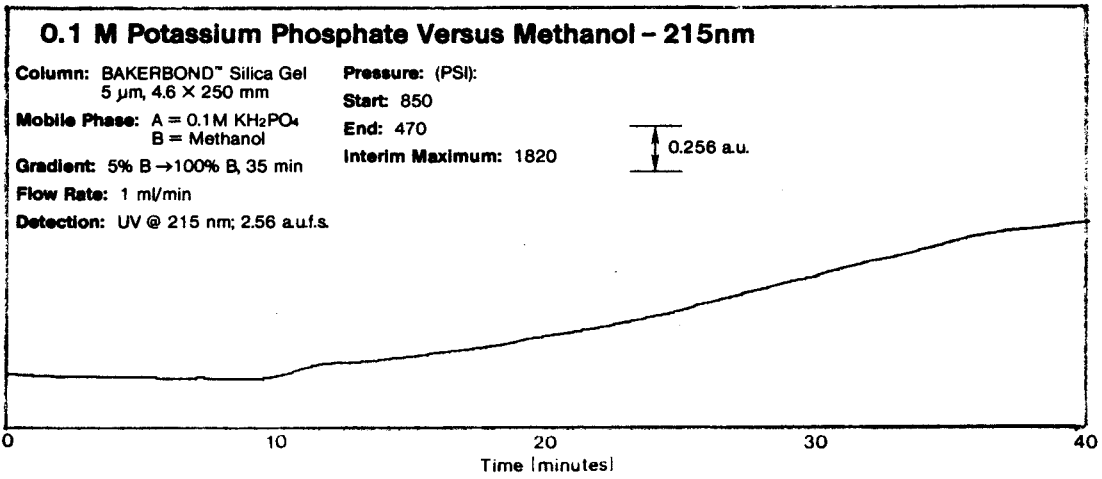


Table 16.9: 0.05 M Potassium Phosphate vs Acetonitrile (56)

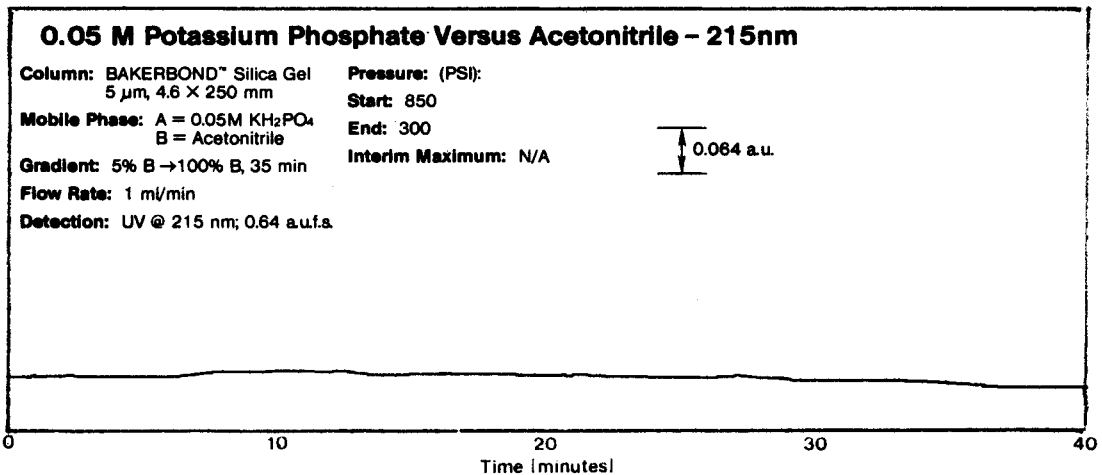

(continued)

Table 16.9: (continued)

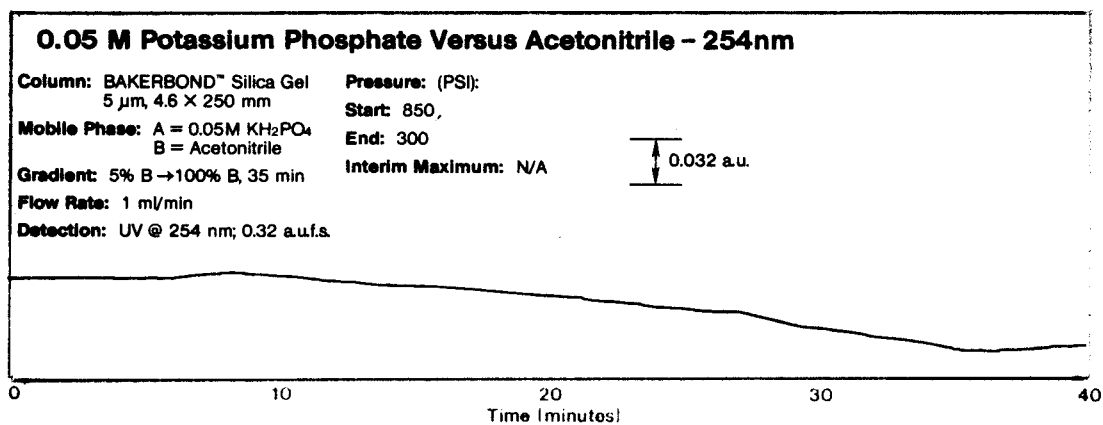


Table 16.10: 0.05 M Potassium Phosphate vs Methanol (56)

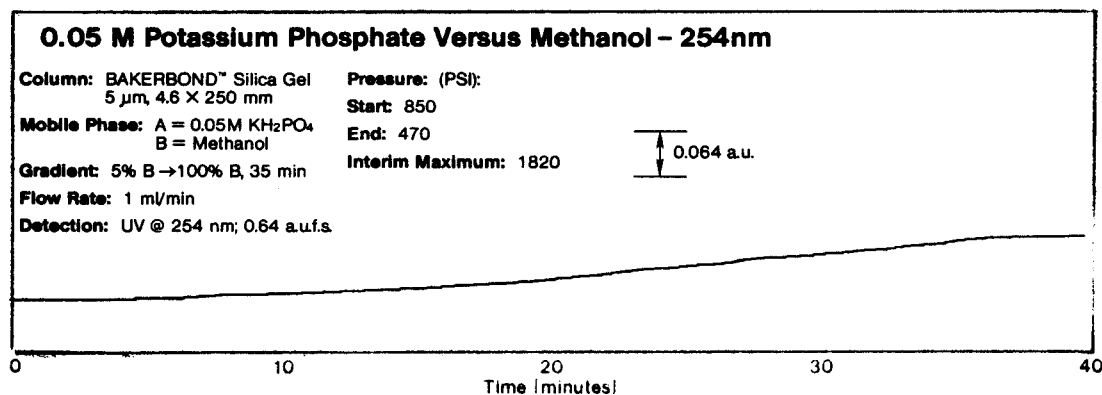
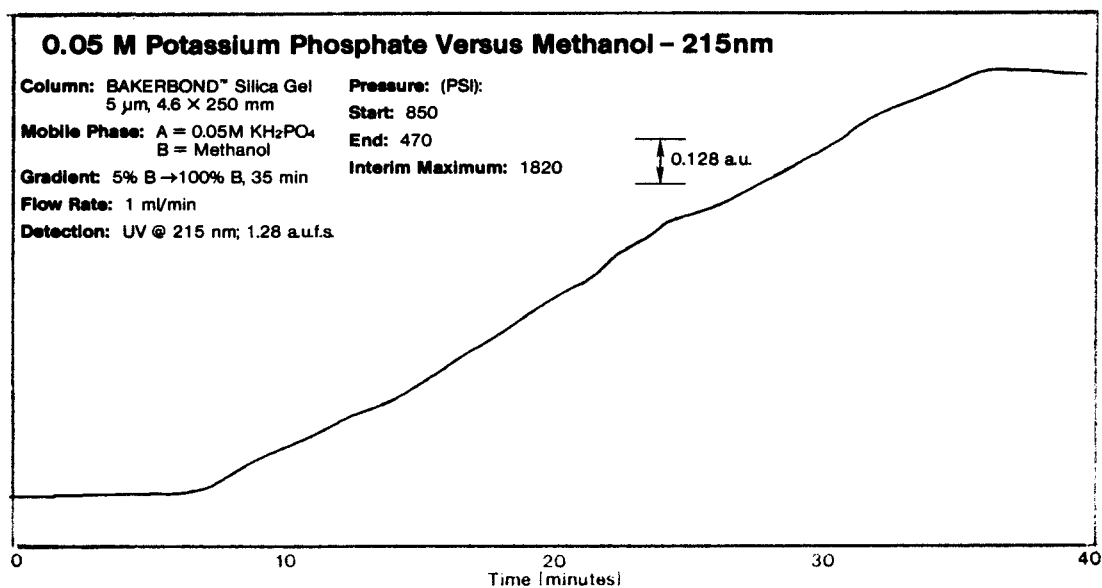


Table 16.11: 0.01 M Potassium Phosphate vs 0.5 M Potassium Phosphate pH 6.8/6.4 (56)

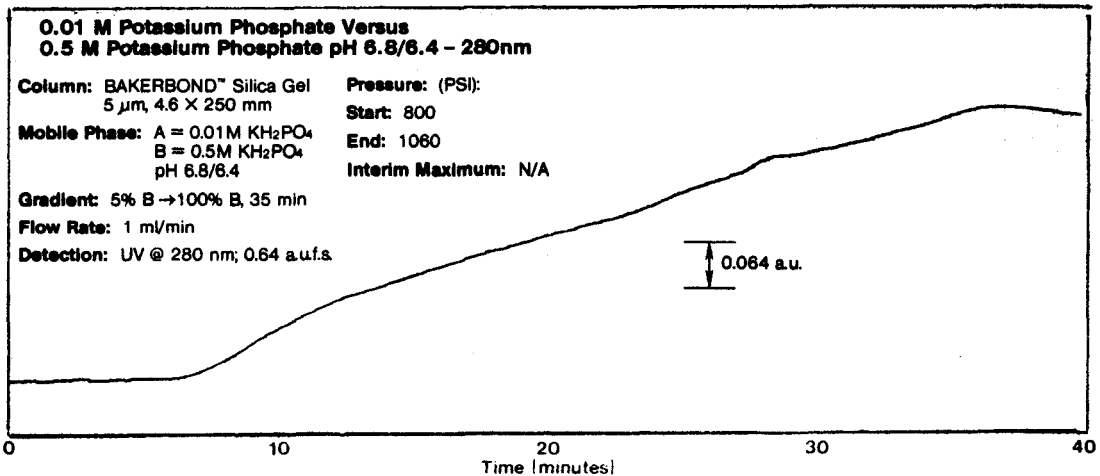
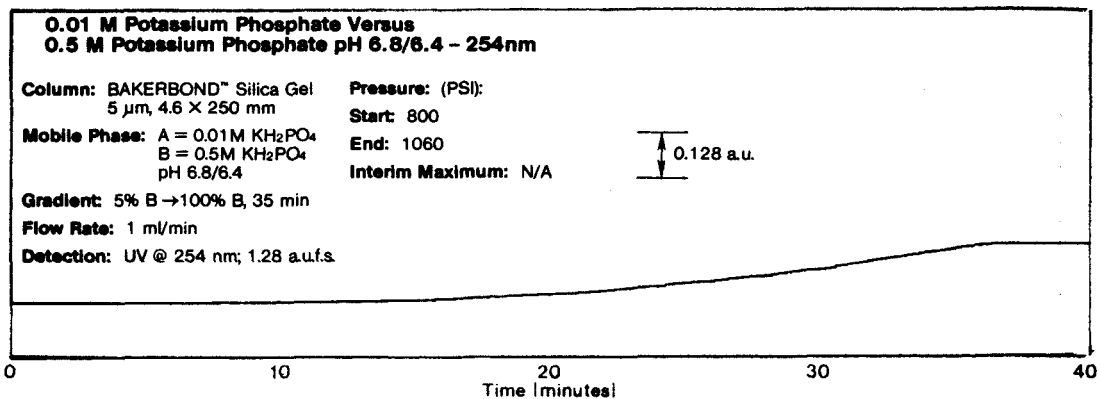
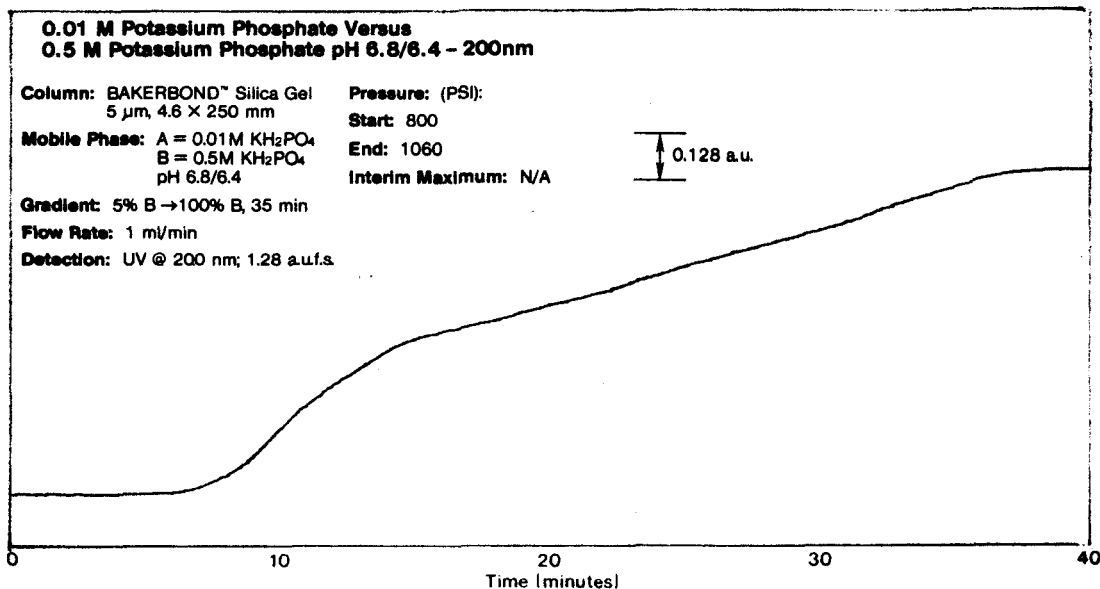


Table 16.12: Hexane vs Chloroform (56)

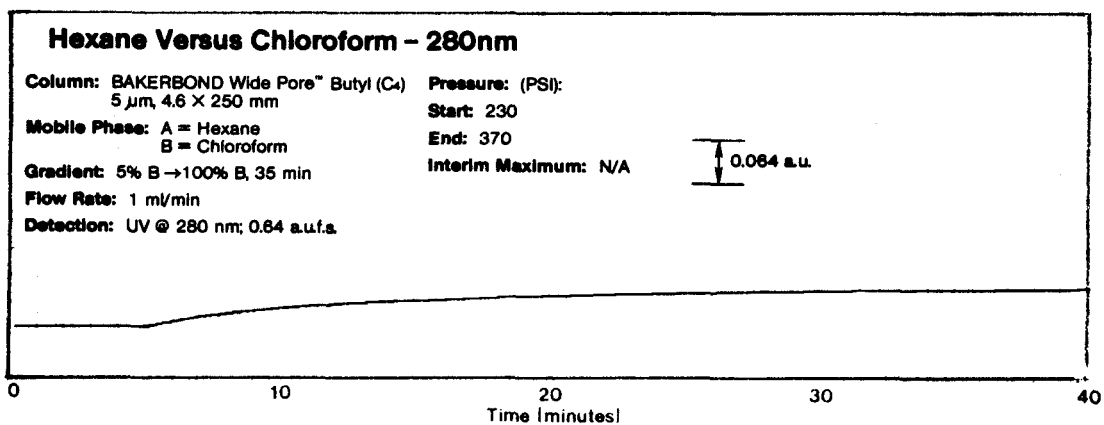
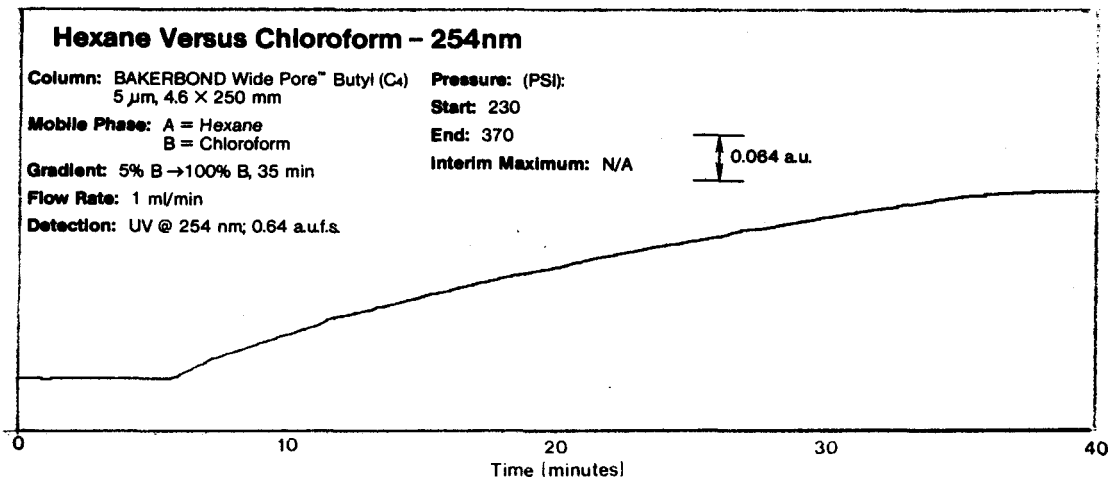


Table 16.13: Hexane vs Methylene Chloride (56)

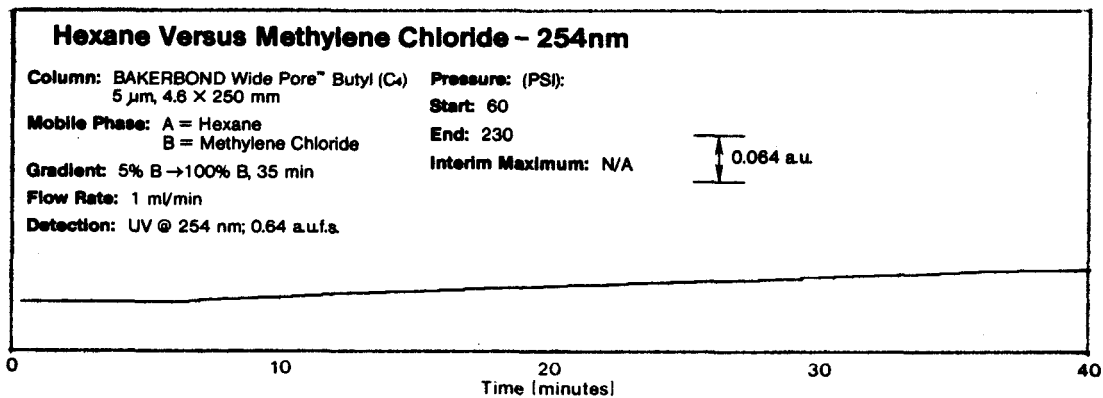


Table 16.14: Hexane vs Ethyl Acetate (56)


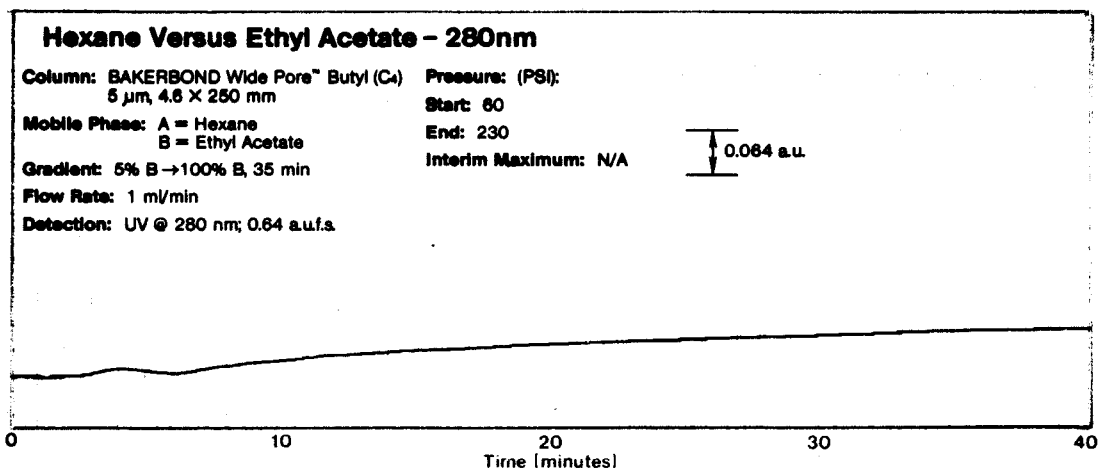
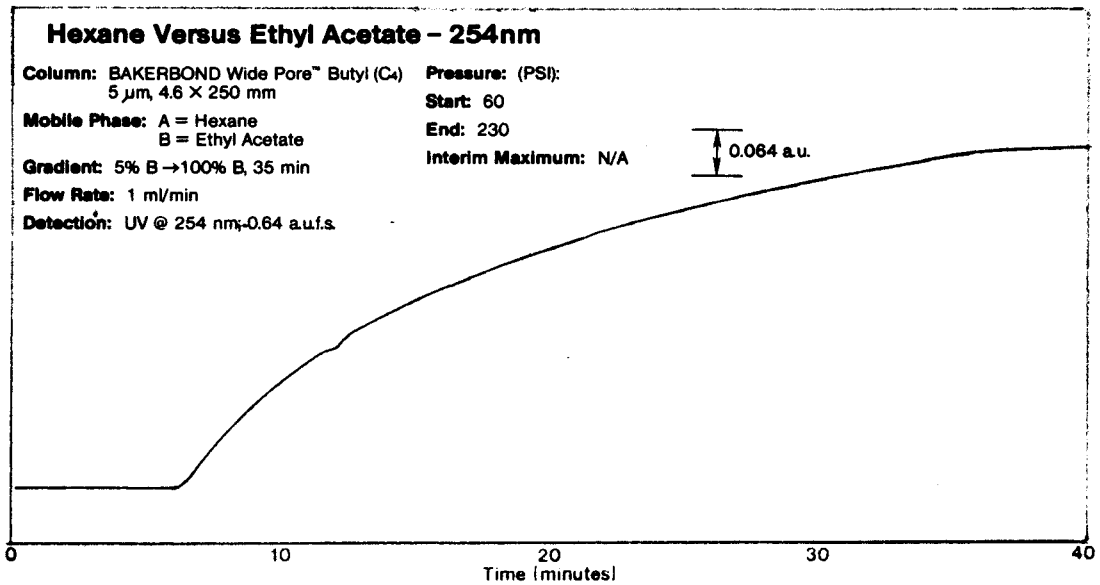


Table 16.15: Hexane vs 2-Propanol (56)

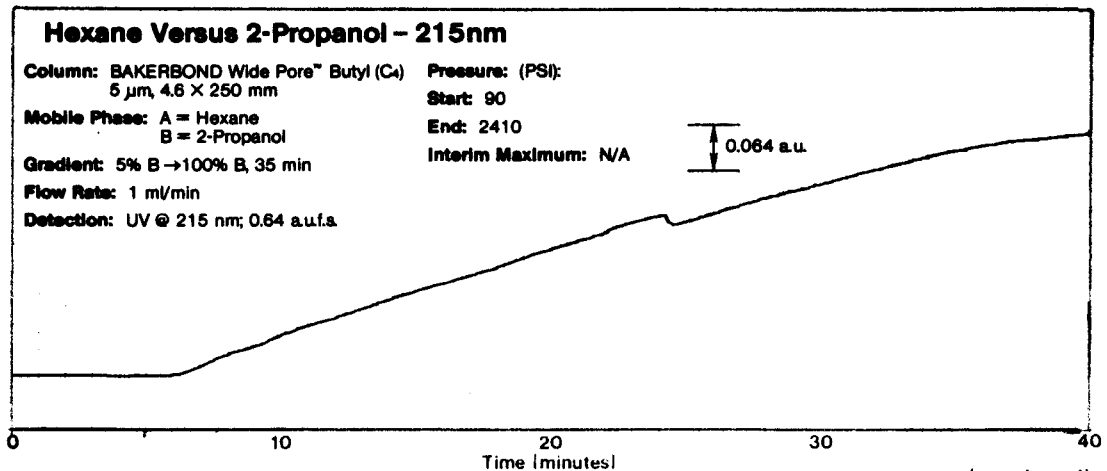

(continued)

Table 16.15: (continued)

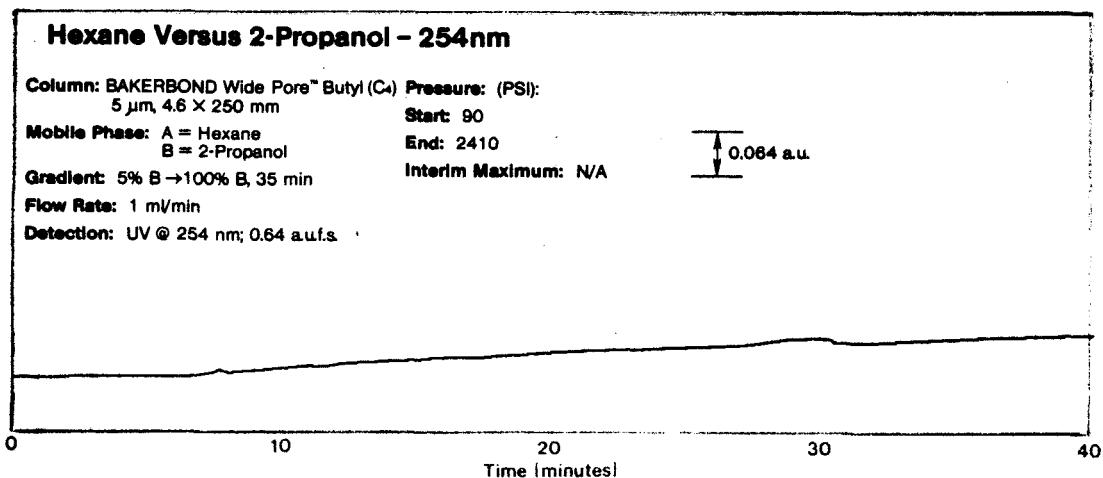


Table 16.16: Hexane vs Ether (Anhydrous) (56)

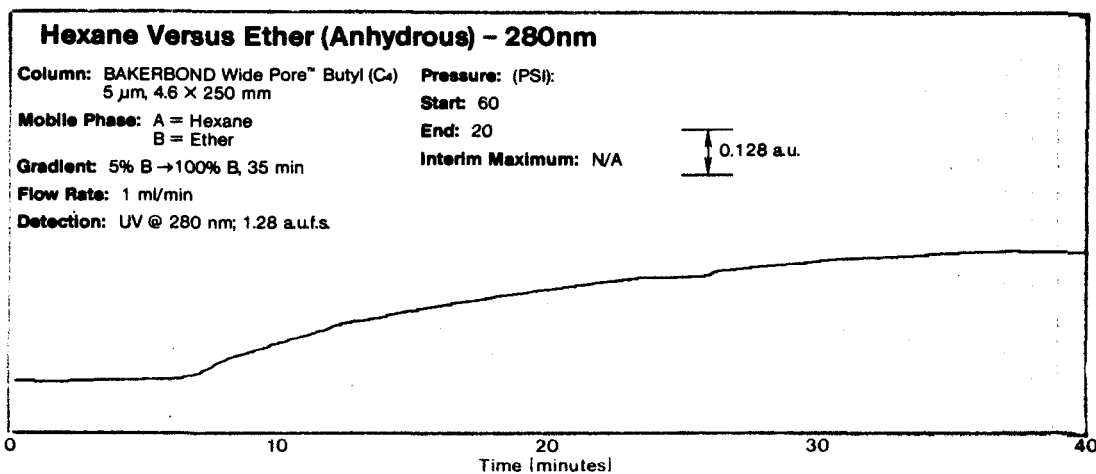
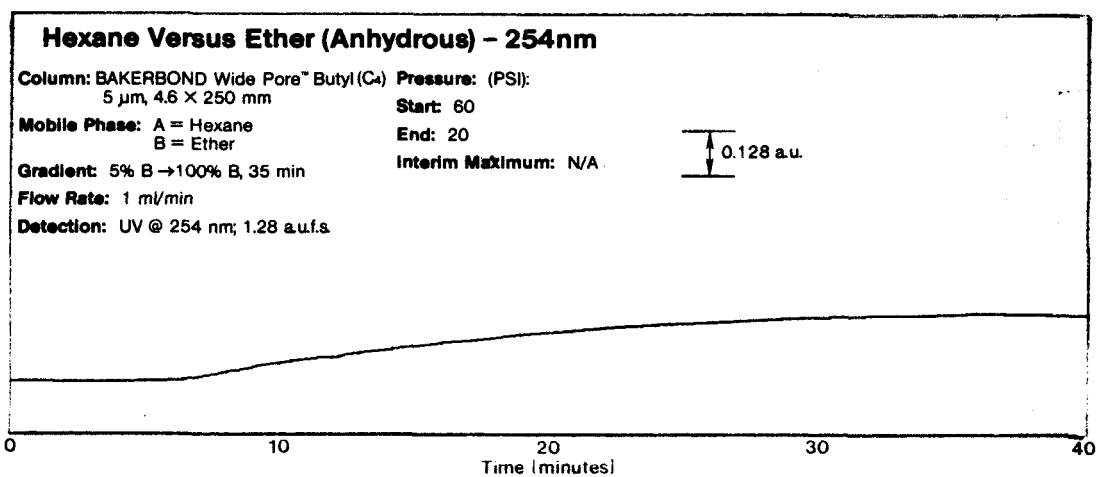


Table 16.17: 2,2,4-Trimethylpentane vs Chloroform (56)

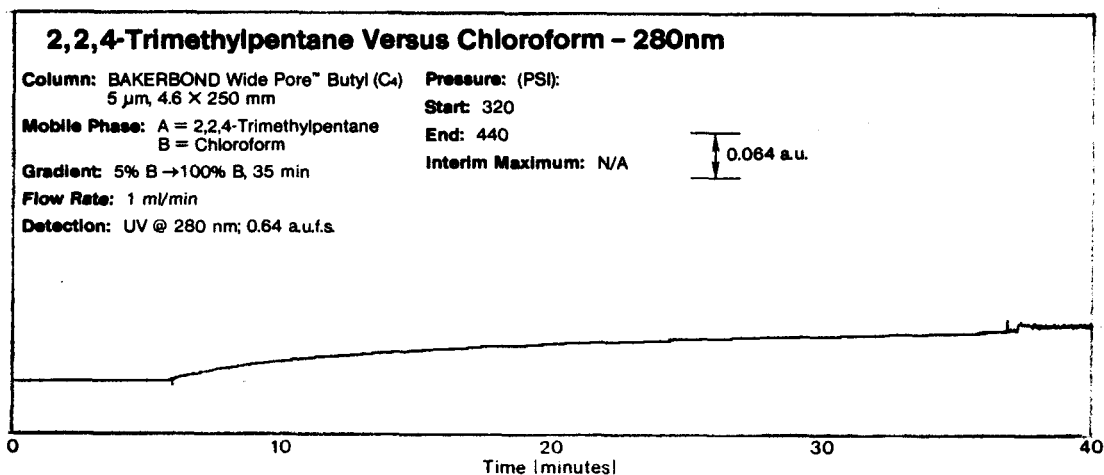
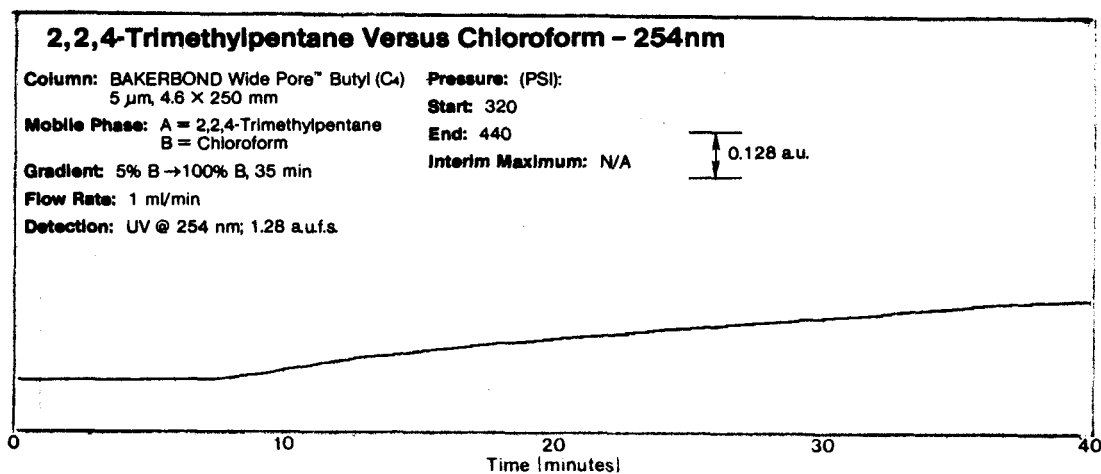


Table 16.18: 2,2,4-Trimethylpentane vs Methylene Chloride (56)

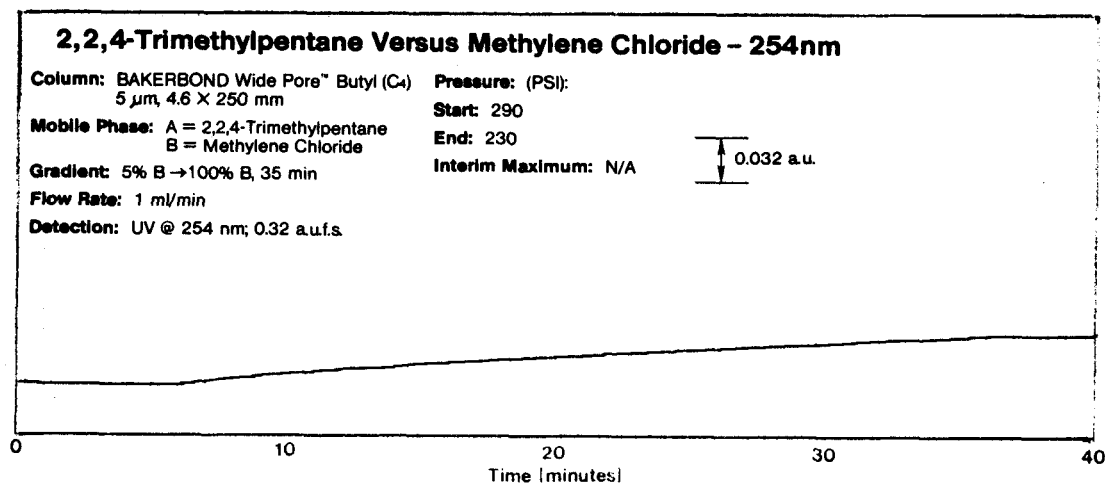


Table 16.20: (continued)

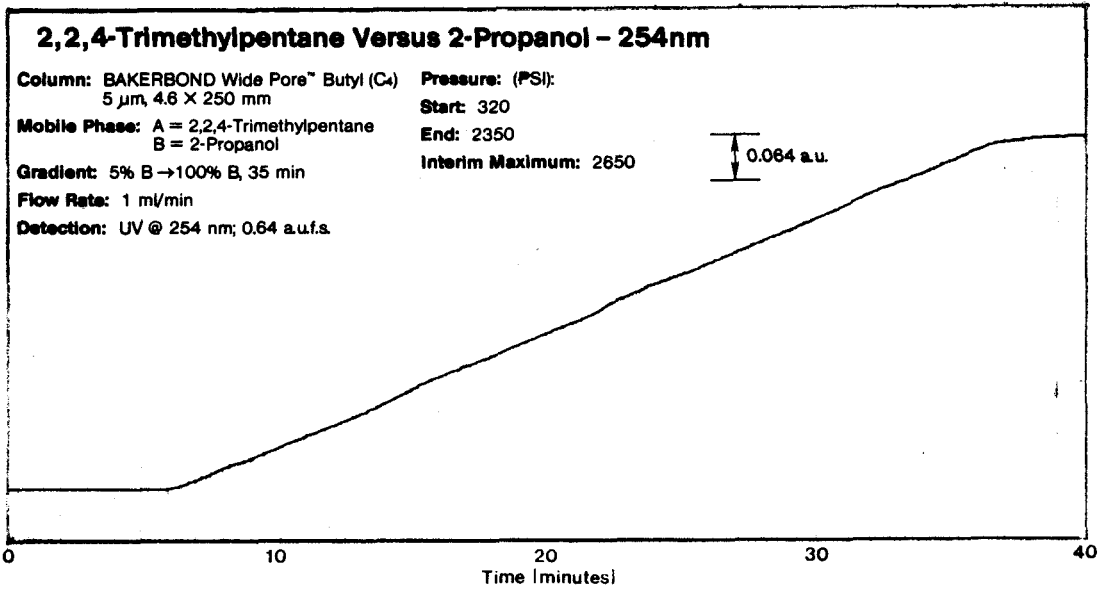


Table 16.21: Methylene Chloride vs Methanol (56)

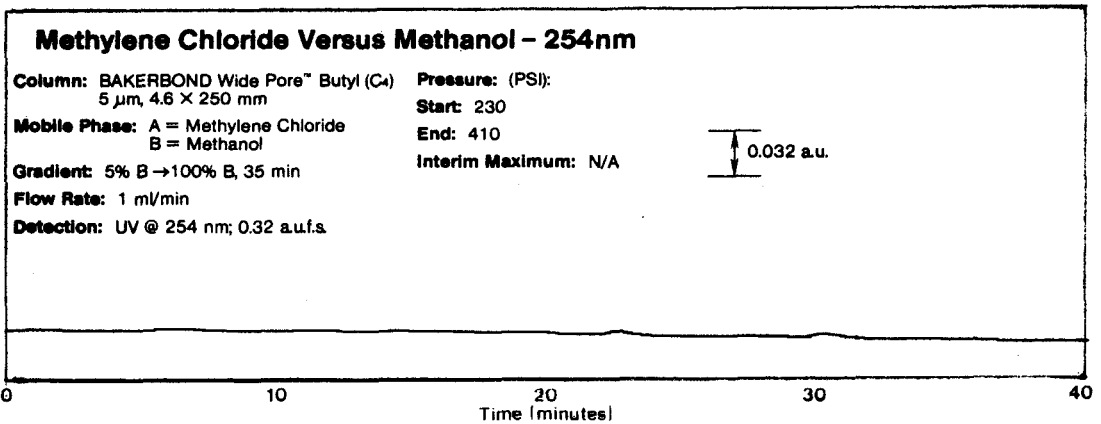


Table 16.22: Methylene Chloride vs 2-Propanol (56)

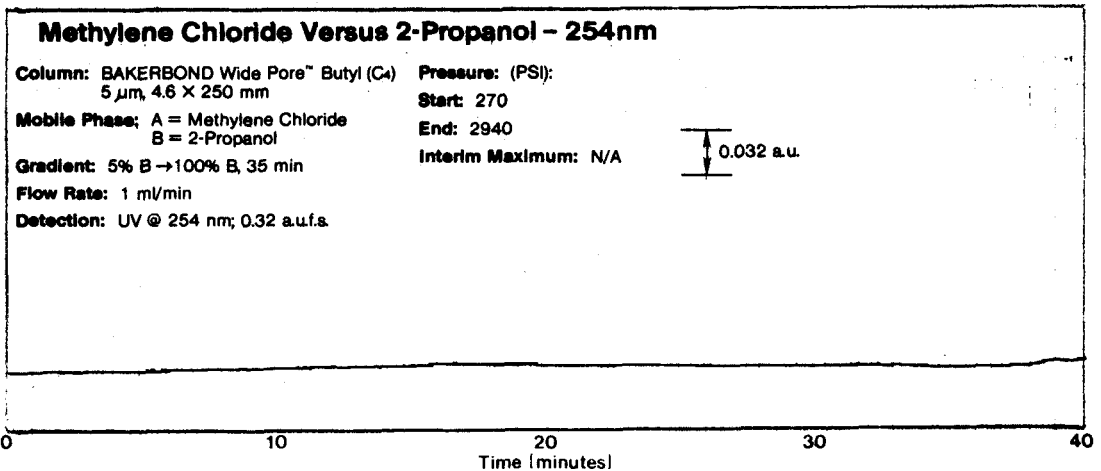


Table 16.23: Methylene Chloride vs Ethyl Acetate (56)



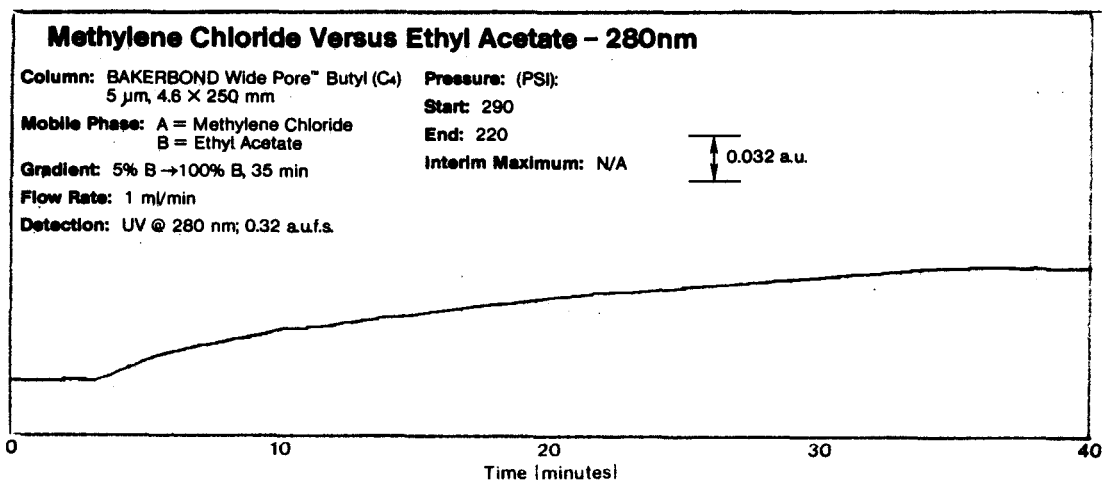
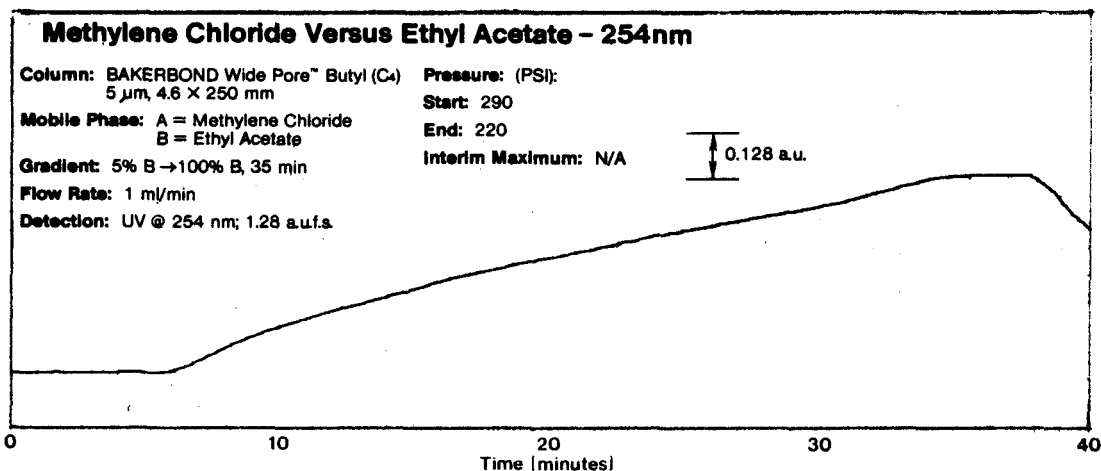


Table 16.24: Methylene Chloride vs Ether (Anhydrous) (56)

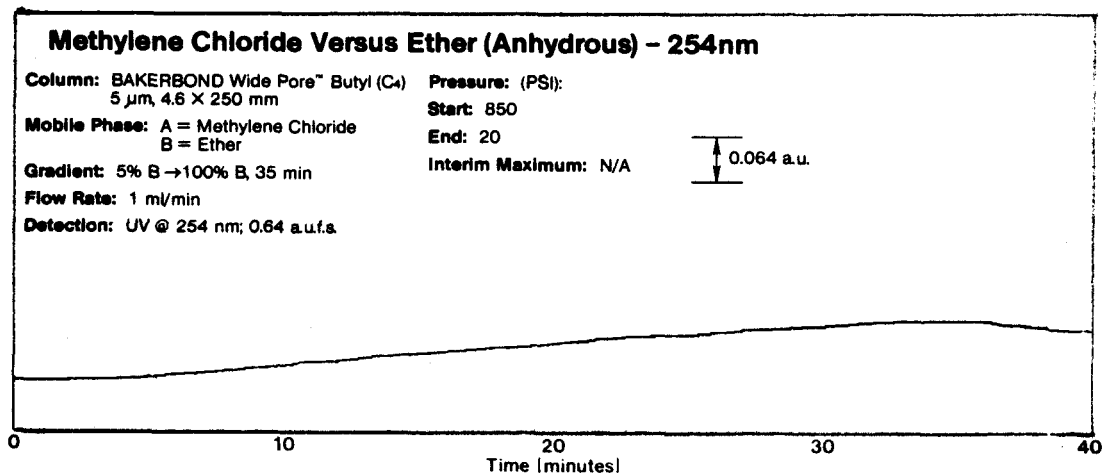

(continued)

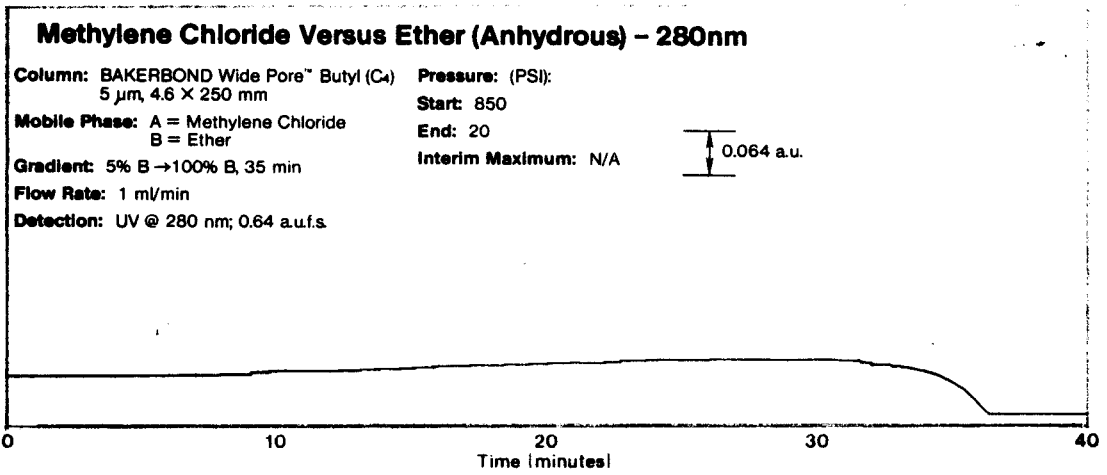Table 16.24: (continued)



ULTRAVIOLET SPECTRA

Table 16.25: Acetic Acid, Glacial (56)


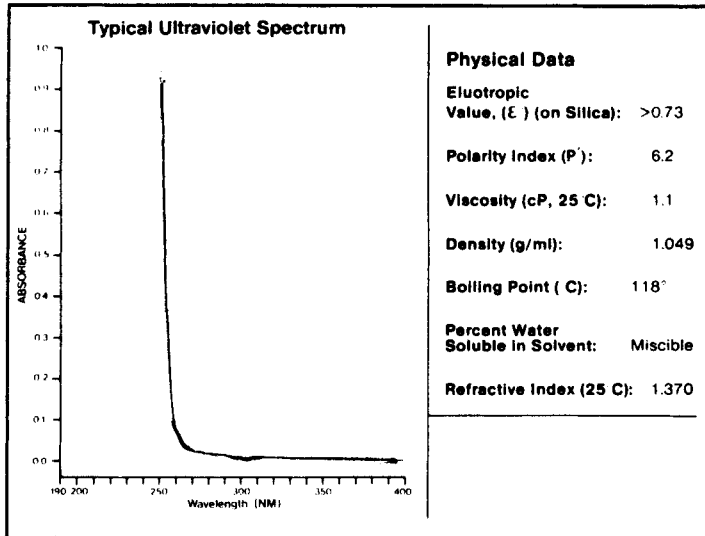


Table 16.26: Acetone (56)(61)

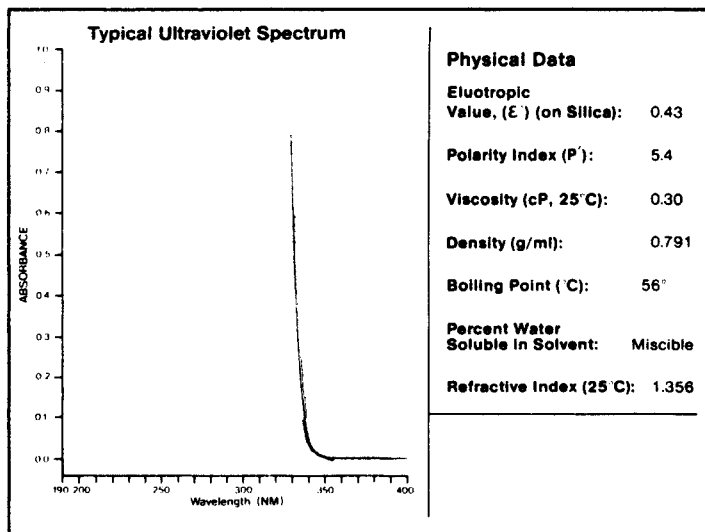

(continued)

Table 16.26: (continued)

SPECIFICATIONS (61)

Packed under nitrogen

Water: Less than 0.50% by infrared spectroscopy

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 330 | 1.000 |
| 340 | 0.060 |
| 350 | 0.010 |
| 375 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3586 ± 0.0003 at 20°C


Boiling range: 56-57°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

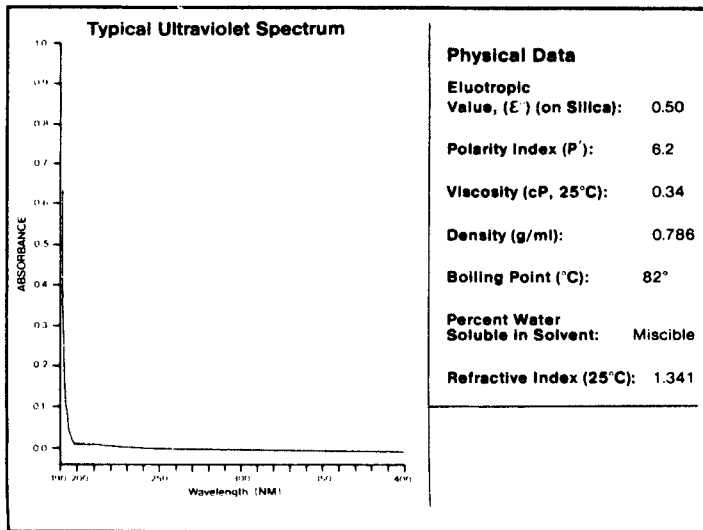Table 16.27: Acetonitrile (56)(61)

**ACETONITRILE NON-SPECTRO (61)****SPECIFICATIONS**

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance: Optical transparency is not controlled. For spectrophotometric applications use Acetonitrile UV.

Refractive index: 1.3440 ± 0.0006 at 20°C

Boiling range: 81-82°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide, based on a 1:1 petroleum ether extract.

(continued)

Table 16.27: (continued)

ACETONITRILE UV (61)SPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 190 | 1.000 |
| 200 | 0.050 |
| 225 | 0.010 |
| 250 | 0.005 |
| 350 | 0.005 |

Refractive index: 1.3440 ± 0.0006 at 20°C

Boiling range: 81-82°C


Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide, based on a 1:1 petroleum ether extract.

Purity by liquid chromatography: No UV absorbing peak greater than 0.001 absorbance unit (1 cm path length) at 254 nm, or 0.005 absorbance unit at 205 nm in a gradient from 100% water to 100% acetonitrile on a 15 x 0.46 cm column with 5 μ M C-18 packing. No fluorescent peak greater than that equivalent to 20 pg of benzo(a)-pyrene under the above conditions using 350 nm excitation, 450 nm emission.

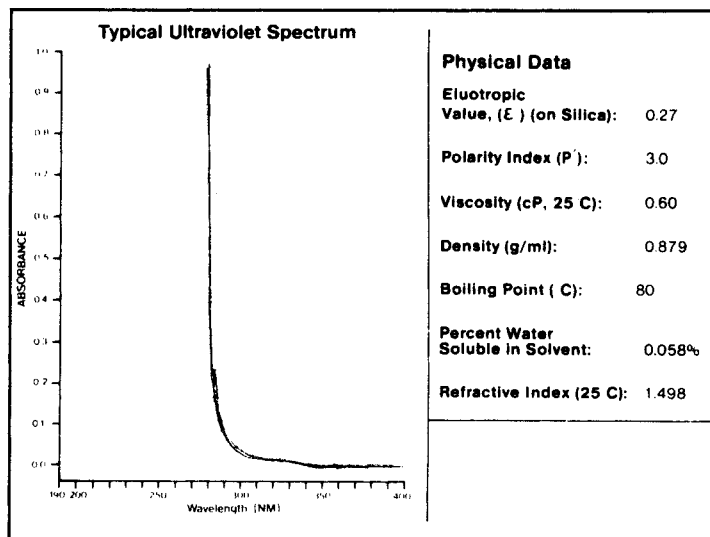Table 16.28: Benzene (56)(61)

SPECIFICATIONS (61)

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 278 | 1.000 |
| 300 | 0.020 |
| 325 | 0.010 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.5006 ± 0.0006 at 20°C

Boiling range: 80-81°C

Residue: Less than one mg/l

Purity: Greater than 99.5% by gc analysis

Substances darkened by sulfuric acid: Passes ACS test

Color with hot sulfuric acid: Passes test (colorless)

Thiophene: Passes ACS test (limit one mg/l)

Electron capture gc: No residue peak greater than 4 μ g/l as heptachlor epoxide.

Table 16.29: 2-Butanol (61)SPECIFICATIONS

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 260 | 1.000 |
| 275 | 0.300 |
| 300 | 0.010 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3970 ± 0.0008 at 20°C

Boiling range: 99-100°C

Residue: Less than five mg/l

Purity: Greater than 98% by gc analysis

Table 16.30: n-Butyl Acetate (61)SPECIFICATIONS

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 254 | 1.000 |
| 275 | 0.050 |
| 300 | 0.010 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3937 ± 0.0010 at 20°C

Boiling range: 124-126°C

Residue: Less than five mg/l

Purity: Greater than 99.0% by gc analysis

Table 16.31: n-Butyl Alcohol (61)SPECIFICATIONS

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 215 | 1.000 |
| 225 | 0.500 |
| 250 | 0.040 |
| 275 | 0.010 |
| 300 | 0.005 |

Refractive index: 1.3990 ± 0.0004 at 20°C

Boiling range: 117-118°C

Residue: Less than five mg/l

Purity: Greater than 99.8% by gc analysis

Table 16.32: n-Butyl Chloride (61)

SPECIFICATIONS

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 220 | 1.000 |
| 225 | 0.300 |
| 250 | 0.010 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4017 ± 0.0008 at 20°C

Boiling range: 78-79°C

Residue: Less than one mg/l

Chloride: Not detectable (limit 10 mg/l)

Purity: Greater than 99.5% by gc analysis

Table 16.33: tert-Butyl Methyl Ether (56)


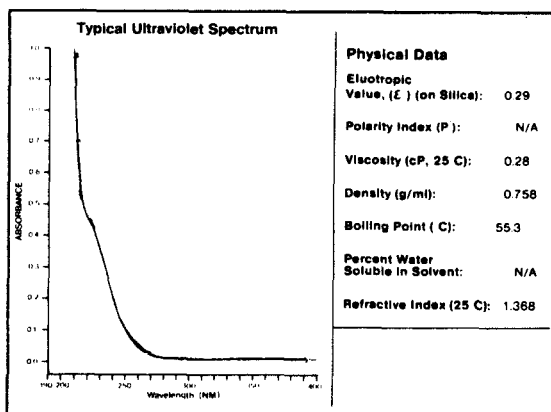


Table 16.34: Carbon Tetrachloride (56)(61)

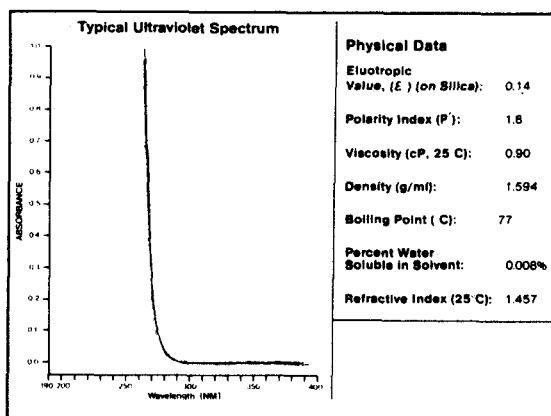

(continued)

Table 16.34: (continued)

SPECIFICATIONS (61)

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 263 | 1.000 |
| 275 | 0.100 |
| 300 | 0.005 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4601 ± 0.0003 at 20°C

Boiling range: 76-77°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Substances darkened by sulfuric acid: Passes ACS test

Acidity: Not detectable (limit one mg/l as HCl)

Chloride: Not detectable (limit 10 mg/l)

Infrared absorbance: C-H and C=O free. Shows no extraneous absorbance bands in the 3.1-3.6 and 5.6-6.0 micron ranges when observed in a 25 mm path length liquid cell.

Table 16.35: Chlorobenzene (61)

SPECIFICATIONS

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 287 | 1.000 |
| 300 | 0.050 |
| 325 | 0.040 |
| 350 | 0.020 |
| 400 | 0.005 |

Refractive index: 1.5249 ± 0.0007 at 20°C


Boiling range: 131-132°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Table 16.36: Chloroform (56)(61)

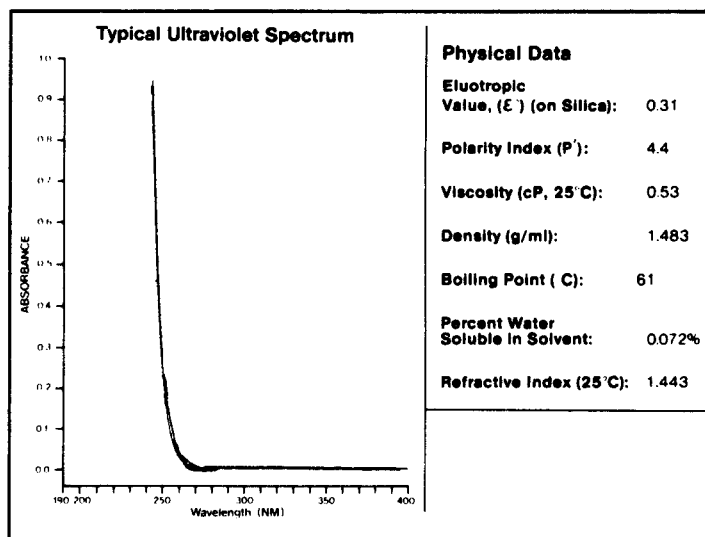
(Alcohol Stabilized) (56)



(continued)

Table 16.36: (continued)

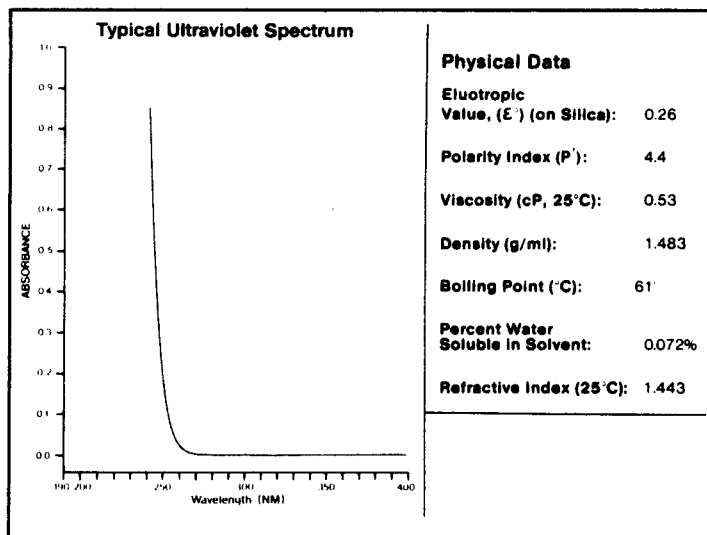(Hydrocarbon Stabilized) (56)



(Without Ethanol) (61)

SPECIFICATIONS

Packed under nitrogen

Preservative: Amylene

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 245 | 1.000 |
| 250 | 0.300 |
| 275 | 0.005 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4457 ± 0.0003 at 20°C

Boiling range: 61-62°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis (excluding preservative)

Suitability for use in dithizone tests: Passes ACS test

Substances darkened by sulfuric acid: Passes ACS test

Acidity: Not detectable (limit one mg/l as HCl)

Chloride: Not detectable (limit 10 mg/l)

Alkaline extraction: Absorbance of aqueous alkaline extract not more than 0.10 at 240 nm.

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

(With 1% Ethanol) (61)

SPECIFICATIONS

Packed under nitrogen

Contains 1% ethanol.

Preservative: Amylene

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 245 | 1.000 |
| 250 | 0.300 |
| 275 | 0.005 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4447 ± 0.0004 at 20°C

Boiling range: 61-62°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis (excluding preservative)

Suitability for use in dithizone tests: Passes ACS test

Substances darkened by sulfuric acid: Passes ACS test


Acidity: Not detectable (limit one mg/l as HCl)

Chloride: Not detectable (limit 10 mg/l)

Alkaline extraction: Absorbance of aqueous alkaline extract not more than 0.10 at 240 nm.

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

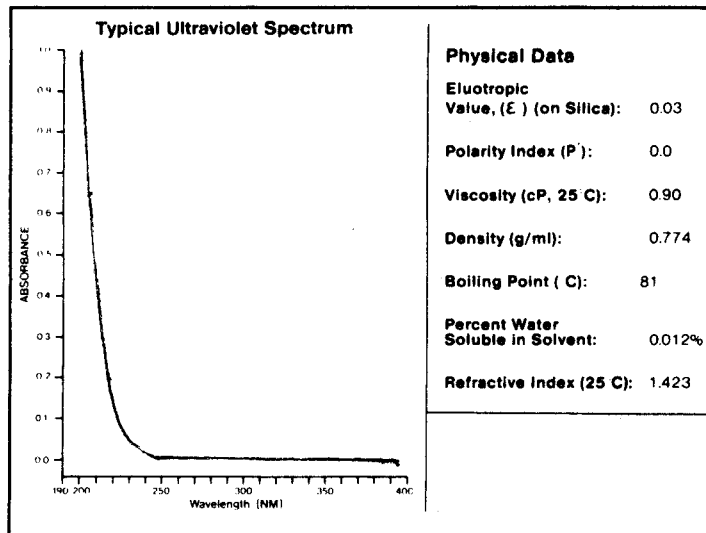Table 16.37: Cyclohexane (56)(61)

**SPECIFICATIONS (61)**

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 200 | 1.000 |
| 225 | 0.170 |
| 250 | 0.020 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4240 ± 0.0020 at 20°C

Boiling range: 80-81°C

Residue: Less than one mg/l

Purity: Greater than 99.5% by gc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Table 16.38: Cyclopentane (61)

SPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 200 | 1.000 |
| 215 | 0.300 |
| 225 | 0.020 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4065 ± 0.0005 at 20°C

Boiling range: 49-50°C

Residue: Less than one mg/l

Purity: Greater than 75% cyclopentane and 99% cyclopentane and saturated C₅ hydrocarbons by gc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Table 16.39: Decahydronaphthalene (Decalin) (61)

SPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance (under nitrogen):


| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 200 | 1.000 |
| 225 | 0.500 |
| 250 | 0.050 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4766 ± 0.0015 at 20°C

Residue: Less than 10 mg/l

Purity: Greater than 99.0% by gc analysis

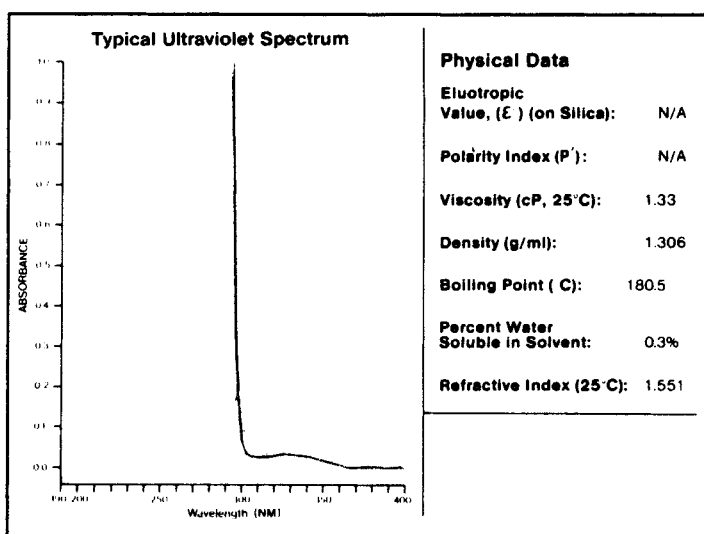Table 16.40: o-Dichlorobenzene (56)(61)

**SPECIFICATIONS (61)**

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 295 | 1.000 |
| 300 | 0.300 |
| 325 | 0.100 |
| 350 | 0.050 |
| 400 | 0.005 |

Refractive index: 1.5517 ± 0.0008 at 20°C

Residue: Less than five mg/l

Purity: Greater than 98.0% by gc analysis

Table 16.41: Diethyl Carbonate (61)SPECIFICATIONS

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 256 | 1.000 |
| 265 | 0.150 |
| 275 | 0.050 |
| 300 | 0.040 |
| 400 | 0.010 |

Refractive index: 1.384 ± 0.0010 at 20°C

Boiling range: 125-126°C

Residue: Less than five mg/l

Purity: Greater than 99.0% by gc analysis

Table 16.42: Dimethyl Acetamide (61)SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 268 | 1.000 |
| 275 | 0.300 |
| 300 | 0.080 |
| 350 | 0.005 |
| 400 | 0.005 |

Residue: Less than one mg/l

Purity: Greater than 99.5% by glc analysis

Gc impurities eluting before solvent: None greater than five mg/l

Table 16.43: Dimethyl Formamide (61)SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 268 | 1.000 |
| 275 | 0.300 |
| 300 | 0.050 |
| 350 | 0.005 |
| 400 | 0.005 |

Residue: Less than two mg/l

Purity: Greater than 99.9% by glc analysis

Gc impurities eluting before solvent: None greater than five mg/l

Table 16.44: Dimethyl Sulfoxide (61)

SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.04% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 268 | 1.000 |
| 275 | 0.500 |
| 300 | 0.200 |
| 350 | 0.020 |
| 400 | 0.005 |

Refractive index: 1.4775 ± 0.0015 at 20°C

Residue: Less than one mg/l

Purity: Greater than 99.5% by gc analysis

Table 16.45: 1,4-Dioxane (61)

SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 215 | 1.000 |
| 250 | 0.300 |
| 300 | 0.020 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4216 ± 0.0010 at 20°C

Boiling range: 101-102°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Peroxides: Less than two mg/l as H₂O₂ at time of packaging

Table 16.46: Ether, Anhydrous (56)

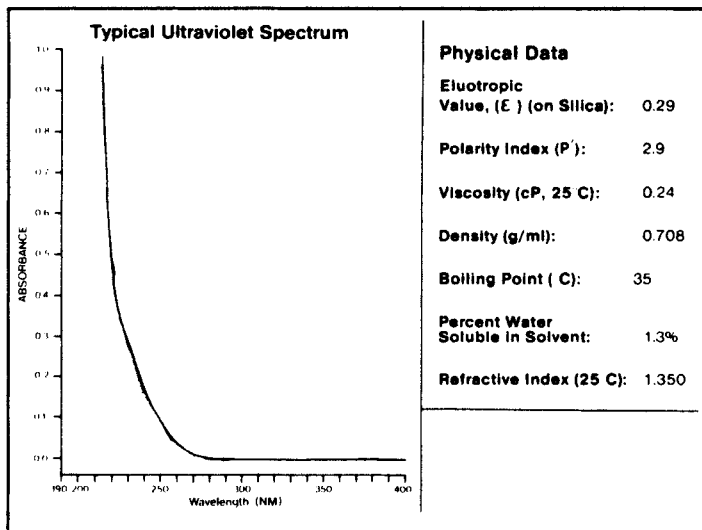


Table 16.47: 2-Ethoxyethanol (61)**SPECIFICATIONS**

Packed under nitrogen

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:


| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 210 | 1.000 |
| 225 | 0.500 |
| 250 | 0.200 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4074 ± 0.0005 at 20°C

Boiling range: 134-136°C

Residue: Less than one mg/l

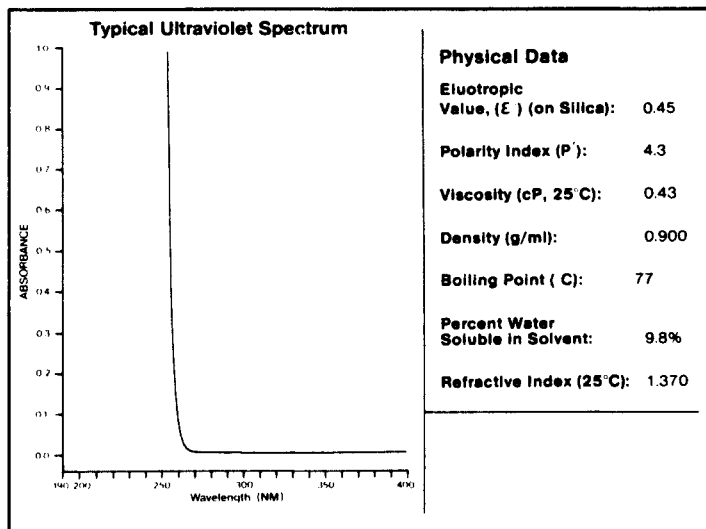Purity: Greater than 99.5% by gc analysis

Peroxides: Less than two mg/l as H₂O₂ at time of packaging**Table 16.48: Ethyl Acetate (56)(61)****SPECIFICATIONS (61)**

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 256 | 1.000 |
| 275 | 0.050 |
| 300 | 0.030 |
| 325 | 0.005 |
| 350 | 0.005 |

Refractive index: 1.3721 ± 0.0003 at 20°C

Boiling range: 77-78°C

Residue: Less than one mg/l

Purity: Greater than 99.5% by gc analysis. A special grade free of trace aldehyde, ketone, acid, and alcohol (less than 0.005A at 275 nm) is available at extra cost.

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Table 16.48: (continued)

ETHYL ACETATE - Ketone Free

Purified for applications requiring solvent free of trace aldehyde, ketone, acid or alcohol.

SPECIFICATIONS

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 256 | 1.000 |
| 275 | 0.005 |
| 300 | 0.005 |

Refractive index: 1.3721 ± 0.0003 at 20°C

Boiling range: 77-78°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis.

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Color with sulfuric acid: Passes ACS test

Substances reducing permanganate: Passes 24 hour test

Table 16.49: Ethylene Dichloride (61)

SPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 228 | 1.000 |
| 240 | 0.300 |
| 250 | 0.100 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4444 ± 0.0006 at 20°C

Boiling range: 83-84°C

Residue: Less than one mg/l

Acidity: Not detectable (limit one mg/l as HCl)

Chloride: Not detectable (limit 10 mg/l)

Purity: Greater than 99.9% by gc analysis

Table 16.50: Ethyl Ether (61)

ETHYL ETHER
WITH 2% ETHANOLSPECIFICATIONS

Packed under nitrogen

Preservative: 2% ethanol

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 215 | 1.000 |
| 250 | 0.080 |
| 275 | 0.010 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive Index: 1.3528 ± 0.0005 at 20°C

Boiling range: 34-35°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis (excluding preservative)

Peroxides: Less than one mg/l as H₂O₂ at time of packaging

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

(continued)

Table 16.50: (continued)

ETHYL ETHER
WITHOUT PRESERVATIVE

SPECIFICATIONS

Packed under nitrogen

Contains no preservatives

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 215 | 1.000 |
| 250 | 0.080 |
| 275 | 0.010 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive Index: 1.3521 ± 0.0005 at 20°C

Boiling range: 34-35°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Peroxides: Less than one mg/l as H₂O₂ at time of packaging

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Table 16.51: GLYME (61)

SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.08% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 220 | 1.000 |
| 250 | 0.250 |
| 300 | 0.050 |
| 350 | 0.010 |
| 400 | 0.005 |

Refractive index: 1.3790 ± 0.0010 at 20°C


Boiling range: 84-85°C

Residue: Less than five mg/l

Purity: Greater than 99.5% by gc analysis

Peroxides: Less than two mg/l as H₂O₂ at time of packaging

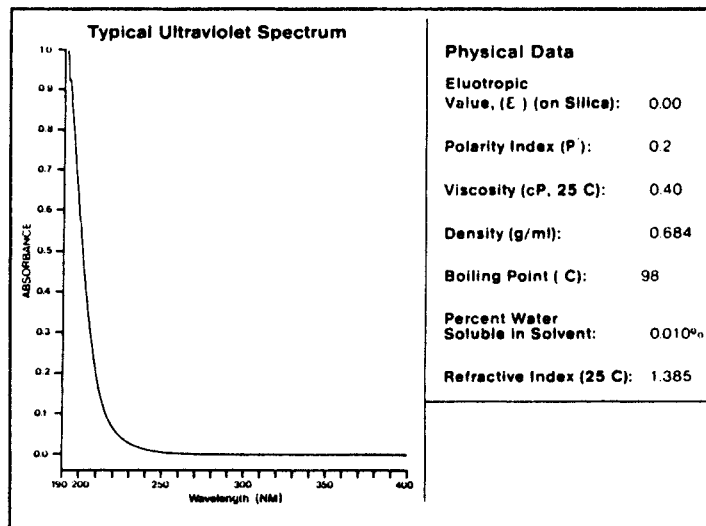Table 16.52: n-Heptane (56)(61)



(continued)

Table 16.52: (continued)

SPECIFICATIONS (61)

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 200 | 1.000 |
| 225 | 0.100 |
| 250 | 0.010 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3878 ± 0.0006 at 20°C

Boiling range: 98-99°C

Residue: Less than one mg/l

Purity: Greater than 96% n-heptane and 99.9% n-heptane and saturated C₇ hydrocarbons by gc analysis

Electron capture gc: No residue peak greater than 4 ug/l of heptachlor epoxide.

Table 16.53: Hexadecane (61)

SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 190 | 1.000 |
| 200 | 0.500 |
| 250 | 0.020 |
| 300 | 0.005 |
| 400 | 0.005 |


Refractive index: 1.4340 ± 0.0006 at 20°C

Residue: Less than five mg/l

Purity: Greater than 99.9% by gc analysis

Table 16.54: Hexane (56)(61)

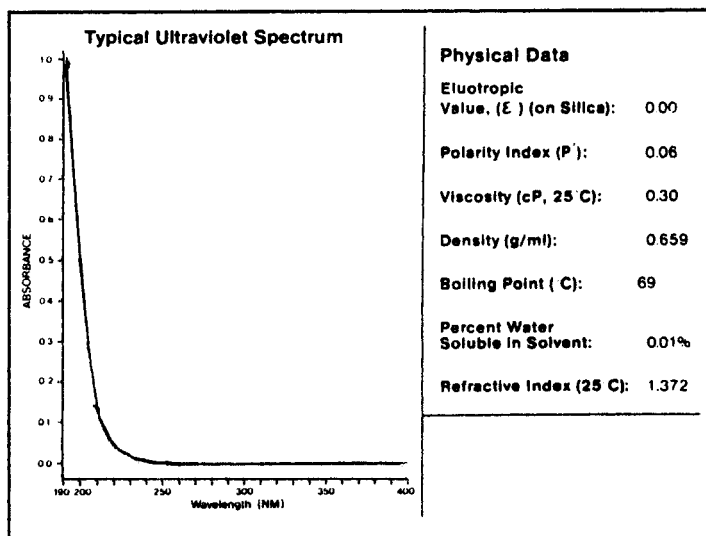
97% n-Hexane (56)




(continued)

Table 16.54: (continued)

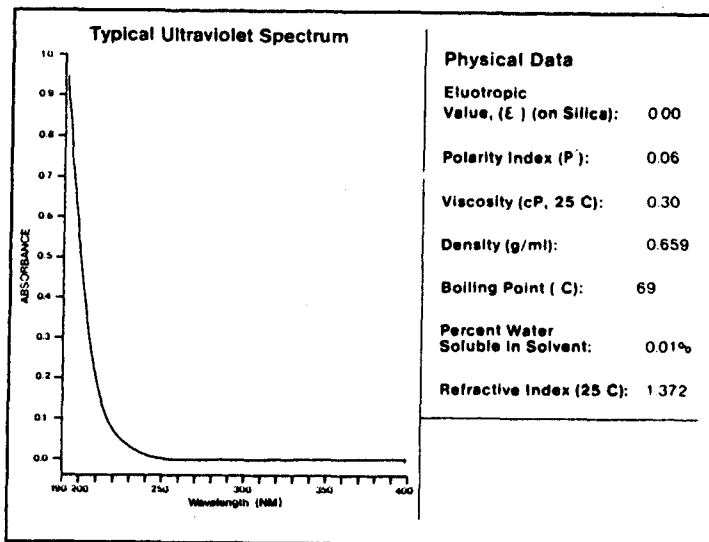95% n-Hexane (56)



85% n-Hexane (56)

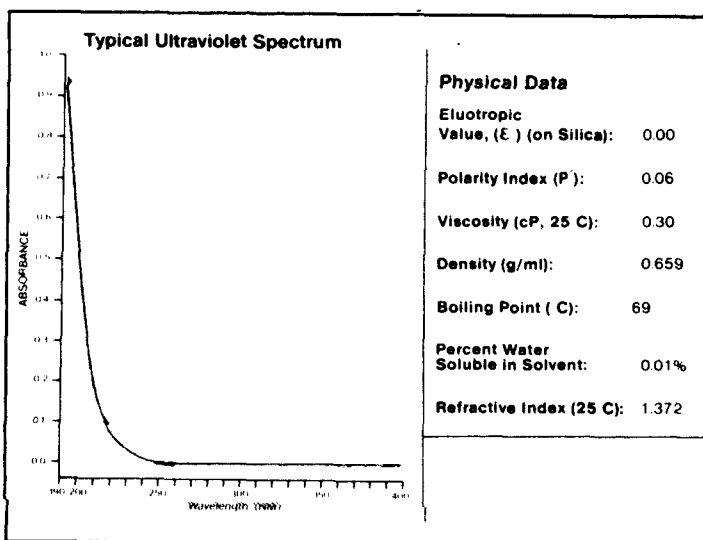

Hexane Non-Spectro (61)

SPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance: Optical transparency is not controlled. For spectrophotometric applications use Hexane UV.

Refractive index: 1.3770 ± 0.0020 at 20°C

Boiling range: 68-69°C

Residue: Less than one mg/l

Benzene: Less than 10mg/l

Purity: Greater than 85% n-hexane and 99.5% n-hexane and saturated C₆ hydrocarbons by glc analysis.

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

(continued)

Table 16.54: (continued)

Hexane UV (61)

SPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 195 | 1.000 |
| 225 | 0.050 |
| 250 | 0.010 |
| 275 | 0.005 |
| 300 | 0.005 |

Refractive index: 1.3770 ± 0.0020 at 20°C


Residue: Less than one mg/l

Benzene: Less than one mg/l

Purity: Greater than 85% n-hexane and 99.9% n-hexane and saturated C₆ hydrocarbons by glc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

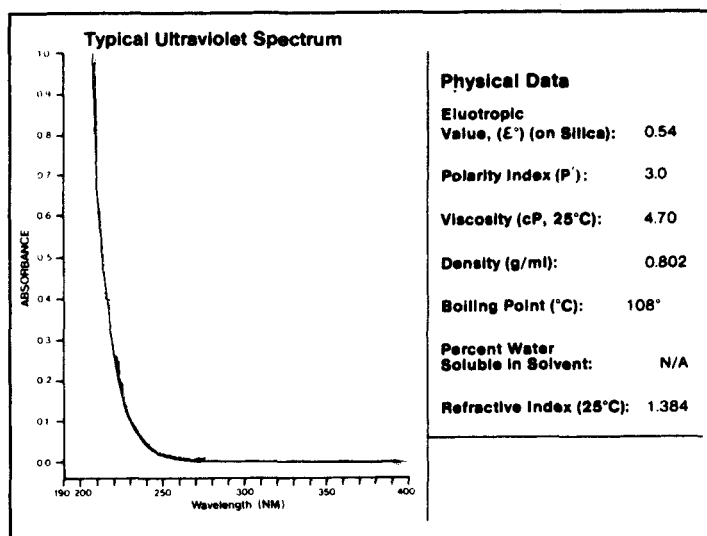Table 16.55: Isobutyl Alcohol (56)(61)

SPECIFICATIONS (61)

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 220 | 1.000 |
| 250 | 0.050 |
| 275 | 0.030 |
| 300 | 0.020 |
| 400 | 0.010 |

Refractive index: 1.3959 ± 0.0011 at 20°C

Boiling range: 108-109°C

Residue: Less than five mg/l

Purity: Greater than 99.0% by gc analysis

Table 16.56: Iso-Octane (2,2,4-Trimethylpentane) (61)SPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 215 | 1.000 |
| 225 | 0.100 |
| 250 | 0.020 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3915 ± 0.0008 at 20°C

Boiling range: 99-100°C

Residue: Less than one mg/l

Purity: Greater than 99.0% by gc analysis

Halomethanes: Less than one ppb available on special order

Electron capture gc: No residue peaks greater than 4 ug/l as heptachlor epoxide.

Table 16.57: Isopropyl Alcohol (61)SPECIFICATIONS

Water: Less than 0.06% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 205 | 1.000 |
| 225 | 0.160 |
| 250 | 0.020 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3766 ± 0.0006 at 20°C

Boiling range: 82-83°C

Residue: Less than two mg/l

Purity: Greater than 99.9% by gc analysis

Electron capture gc: No residue peak greater than 4 ug/l as heptachlor epoxide.

ISOPROPYL ALCOHOLLow WaterSPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 205 | 1.000 |
| 225 | 0.160 |
| 250 | 0.020 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3766 ± 0.0006 at 20°C

Boiling range: 82-83°C

Residue: Less than two mg/l

Purity: Greater than 99.9% by gc analysis

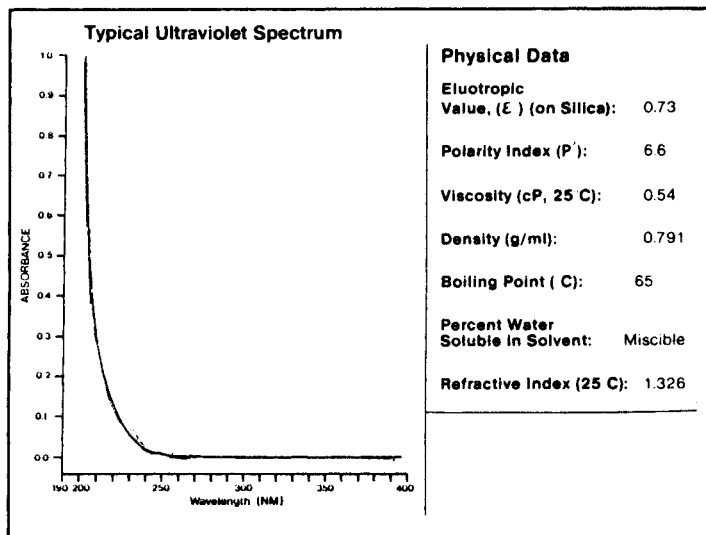
Electron capture gc: No residue peak greater than 4 ug/l as heptachlor epoxide.

Table 16.58: Isopropyl Myristate (61)

A specially purified solvent intended for sterility testing of ophthalmic ointments.

SPECIFICATIONS

pH of Water extract: Greater than 6.5
 Appearance: Clear, colorless liquid
 Infrared absorbance: Equivalent to standard

Table 16.59: Methanol (56)(61)**SPECIFICATIONS (61)**

Water: Less than 0.05% by Karl Fischer titration
 Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 205 | 1.000 |
| 225 | 0.160 |
| 250 | 0.020 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3284 ± 0.0004 at 20°C

Boiling range: 64-65°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Purity by liquid chromatography: No UV absorbing peak greater than 0.005 absorbance unit (1 cm path length) at 254 nm in a gradient from 100% water to 100% methanol on a 15 x 0.46 cm column with 5 μM C-18 packing. No fluorescent peak greater than that equivalent to 20 pg of benzo(a)pyrene under the above conditions using 350 nm excitation, 450 nm emission.

METHANOL**For Purge and Trap Analysis****SPECIFICATIONS (61)**

Water: Less than 0.05% by Karl Fischer titration

Refractive index: 1.3284 ± 0.0004 at 20°C

Boiling range: 64-65°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Volatile Organics: Suitable for GC-MS analysis of volatile organics in water and soil/sediment samples according to the EPA purge and trap Methods 601, 624, and 8240 (2-Butanone: less than 10 ug/l).

Table 16.60: 2-Methoxyethanol (61)**SPECIFICATIONS**

Packed under nitrogen

Water: Less than 0.08% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 210 | 1.000 |
| 250 | 0.130 |
| 275 | 0.030 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4020 ± 0.0010 at 20°C

Boiling range: 123-124°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Suitability for use in ninhydrin assay: Passes test

Peroxides: Less than two mg/l as H₂O₂ at time of packaging**Table 16.61: 2-Methoxyethyl Acetate (61)****SPECIFICATIONS**

Packed under nitrogen

Preservative: Available with or without 0.1% *para*-methoxyphenol

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 254 | 1.000 |
| 275 | 0.150 |
| 300 | 0.050 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4015 ± 0.0010 at 20°C

Boiling range: 143-144°C

Residue: Less than five mg/l

Purity: Greater than 98% by gc analysis

Peroxides: Less than two mg/l as H₂O₂ at time of packaging**Table 16.62: Methyl t-Butyl Ether (61)****SPECIFICATIONS**

Packed under nitrogen

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 210 | 1.000 |
| 225 | 0.500 |
| 250 | 0.100 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3690 ± 0.0010 at 20°C

Boiling range: 55-56°C


Residue: Less than one mg/l

Purity: Greater than 99.0% by gc analysis

Peroxide: Less than one mg/l as H₂O₂

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

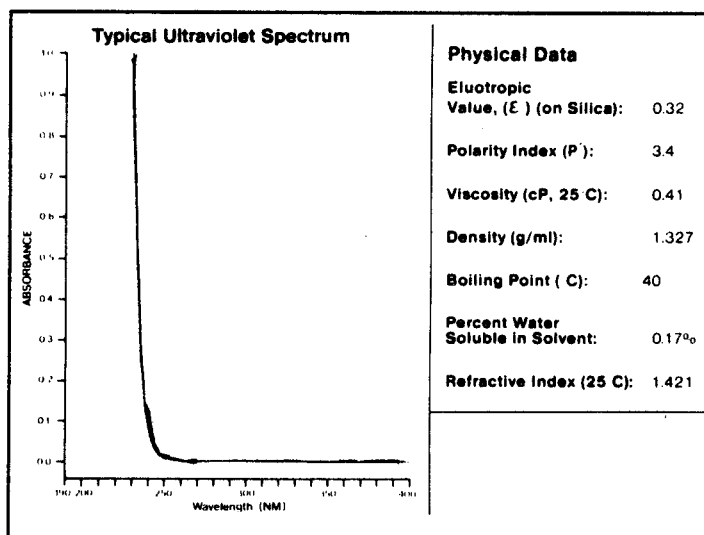Table 16.63: Methylene Chloride (56)(61)

**SPECIFICATIONS (61)**

Preservative: Cyclohexene

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 233 | 1.000 |
| 240 | 0.100 |
| 250 | 0.010 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4241 ± 0.0005 at 20°C

Boiling range: 40-41°C

Residue: Less than one mg/l

Acidity: Not detectable (limit one mg/l as HCl)

Chloride: Not detectable (limit 10 mg/l)

Purity: Greater than 99.9% by gc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Table 16.64: Methyl Ethyl Ketone (56)(61)

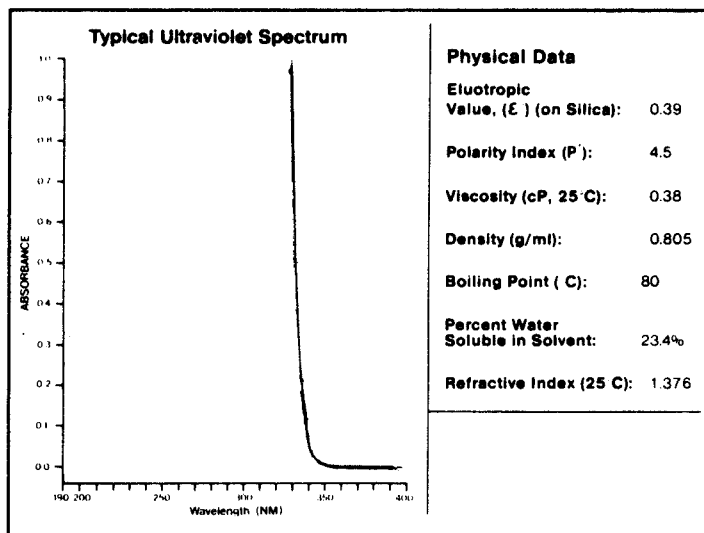


Table 16.64: (continued)SPECIFICATIONS (61)

Packed under nitrogen

Water: Less than 0.05% by Karl Fischer titration

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 329 | 1.000 |
| 340 | 0.100 |
| 350 | 0.020 |
| 375 | 0.010 |
| 400 | 0.005 |

Refractive index: 1.3783 ± 0.0007 at 20°C

Boiling range: 79-80°C

Residue: Less than one mg/l

Purity: Greater than 99.5% by gc analysis

Table 16.65: Methyl Isoamyl Ketone (61)SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 330 | 1.000 |
| 340 | 0.100 |
| 350 | 0.050 |
| 375 | 0.010 |
| 400 | 0.005 |

Refractive index: 1.4072 ± 0.0005 at 20°C

Boiling range: 142-144°C

Residue: Less than five mg/l

Purity: Greater than 99.0% by gc analysis

Table 16.66: Methyl Isobutyl Ketone (61)SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 334 | 1.000 |
| 340 | 0.500 |
| 350 | 0.250 |
| 375 | 0.050 |
| 400 | 0.005 |

Refractive index: 1.3954 ± 0.0006 at 20°C

Boiling range: 115-116°C

Residue: Less than five mg/l

Purity: Greater than 99.0% by gc analysis

Table 16.67: Methyl n-Propyl Ketone (61)

SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 331 | 1.000 |
| 340 | 0.150 |
| 350 | 0.020 |
| 375 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3903 ± 0.0008 at 20°C

Boiling range: 101-102°C

Residue: Less than two mg/l

Purity: Greater than 90.0% methyl n-propyl ketone and greater than 99.0% methyl n-propyl ketone and methyl isobutyl ketone by gc analysis

Table 16.68: N-Methylpyrrolidone (61)

SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 285 | 1.000 |
| 300 | 0.500 |
| 325 | 0.100 |
| 350 | 0.030 |
| 400 | 0.010 |

Refractive index: 1.4700 ± 0.0020 at 20°C

Purity: Greater than 99.5% by gc analysis

Table 16.69: Pentane (56)(61)

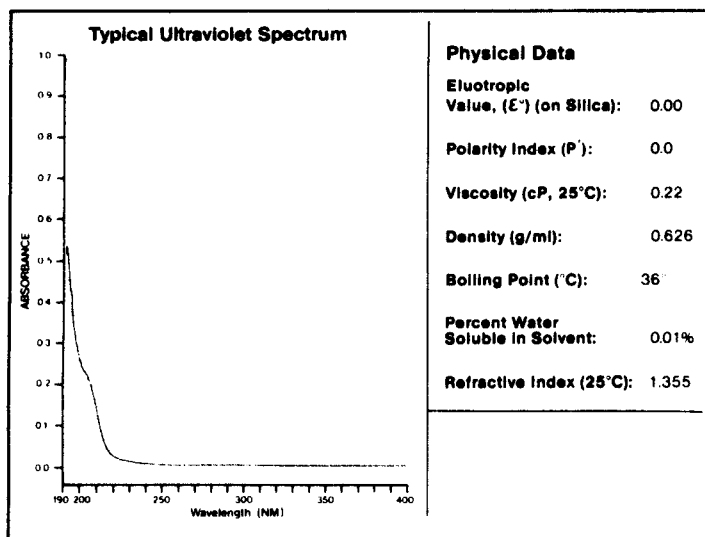


Table 16.69: (continued)SPECIFICATIONS (61)

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 190 | 1.000 |
| 200 | 0.600 |
| 250 | 0.010 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3576 ± 0.0003 at 20°C

Boiling range: 35-37°C

Residue: Less than one mg/l

Purity: Greater than 98% n-pentane and 99.9% n-pentane and saturated C₅ hydrocarbons by gc analysis

Halomethanes: Less than one ppb available on special order

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Table 16.70: Petroleum Ether (61)SPECIFICATIONS

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance: Optical transparency is not controlled. Typical ultraviolet absorption spectrum is shown for information only.

Refractive index: 1.3650 ± 0.0050 at 20°C

Boiling range: 30-60°C

Residue: Less than one mg/l

Purity: Greater than 99% total pentane and hexane isomers by gc analysis

Electron capture gc: No residue peaks greater than 10 ng/l as heptachlor epoxide.

Table 16.71: beta-Phenethylamine (61)SPECIFICATIONS

Packed under nitrogen

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 285 | 1.000 |
| 300 | 0.300 |
| 325 | 0.100 |
| 350 | 0.050 |
| 400 | 0.005 |

Purity: Greater than 98% by gc analysis

Table 16.72: 2-Propanol (56)

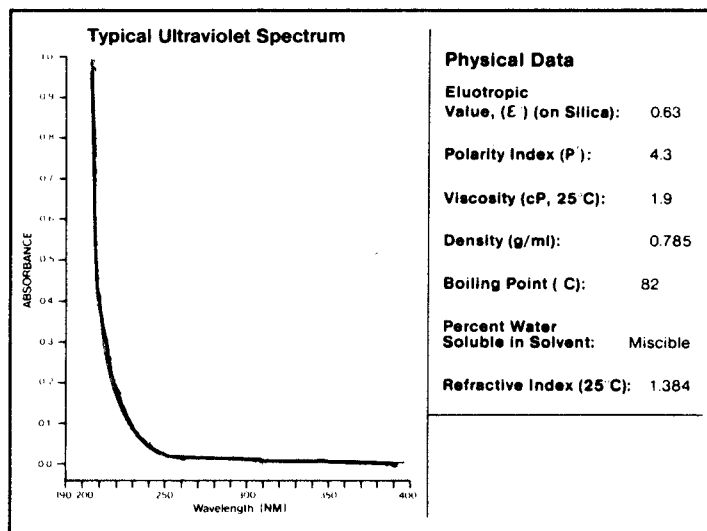


Table 16.73: n-Propyl Alcohol (61)

SPECIFICATIONS

Water: Less than 0.05% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 210 | 1.000 |
| 225 | 0.500 |
| 250 | 0.050 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3849 ± 0.0008 at 20°C

Boiling range: 97-98°C

Residue: Less than three mg/l

Purity: Greater than 99.5% by gc analysis

Table 16.74: Propylene Carbonate (61)

SPECIFICATIONS

Water: Less than 0.04% by Karl Fischer titration

Ultraviolet absorbance:


| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 280 | 1.000 |
| 300 | 0.500 |
| 350 | 0.050 |
| 375 | 0.030 |
| 400 | 0.020 |

Refractive index: 1.4212 ± 0.0008 at 20°C

Residue: Less than five mg/l

Purity: Greater than 99% by gc analysis

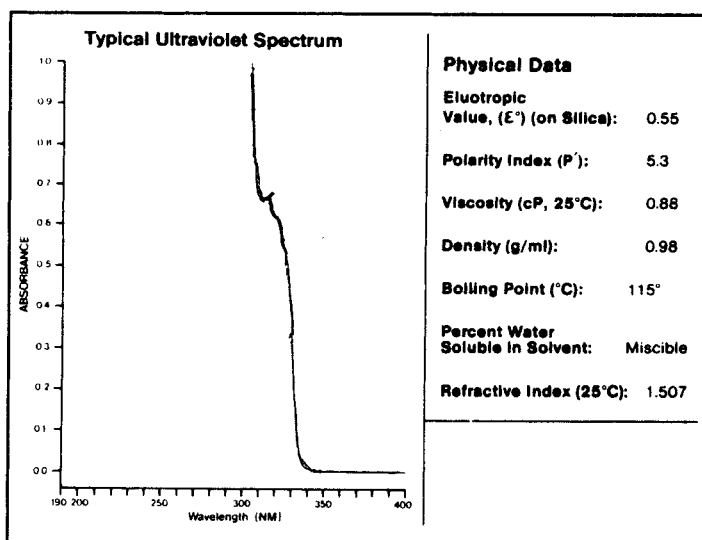Table 16.75: Pyridine (56)(61)

**SPECIFICATIONS (61)**

Packed under nitrogen

Water: Less than 0.05% by Karl Fischer titration

Primary and secondary amines by ninhydrin test: Less than 10 ppm


Refractive index: 1.5093 ± 0.0008 at 20°C

Boiling range: 115-116°C

Residue: Less than two mg/l

Purity: Greater than 99.8% by gc analysis

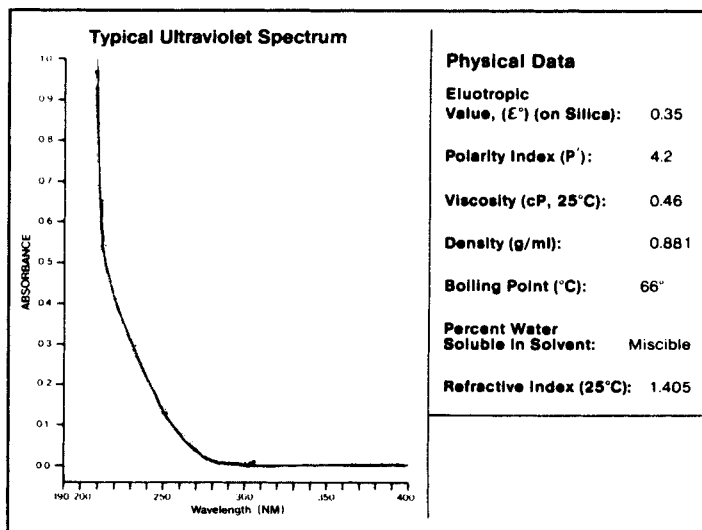Table 16.76: Tetrahydrofuran (56)(61)



(continued)

Table 16.76: (continued)

TETRAHYDROFURAN NON-SPECTRO (61)SPECIFICATIONS

Packed under nitrogen

Preservative: 250 mg/l butylated hydroxytoluene.

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance: Optical transparency is not controlled. For spectrophotometric applications use Tetrahydrofuran UV.

Refractive index: 1.4070 ± 0.0005 at 20°C

Boiling range: 66-67°C

Purity: Greater than 99.9% by gc analysis

Peroxides: Less than two mg/l as H₂O₂ at time of packagingTETRAHYDROFURAN UV (61)SPECIFICATIONS

Packed under nitrogen

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 212 | 1.000 |
| 250 | 0.180 |
| 300 | 0.020 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4070 ± 0.0005 at 20°C


Boiling range: 66-67°C

Residue: Less than one mg/l

Purity: Greater than 99.9% by gc analysis

Peroxides: Less than two mg/l as H₂O₂ at time of packaging

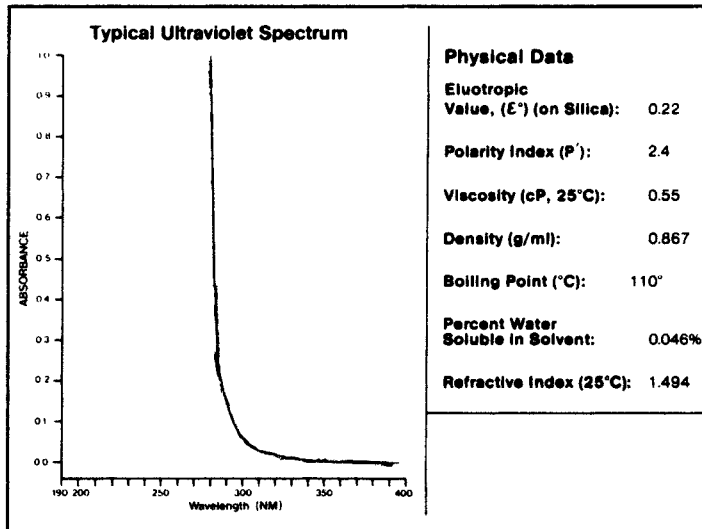Table 16.77: Toluene (56)(61)



(continued)

Table 16.77: (continued)

SPECIFICATIONS (61)

Water: Less than 0.03% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 284 | 1.000 |
| 300 | 0.120 |
| 325 | 0.020 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.4967 ± 0.0004 at 20°C

Boiling range: 110-111°C


Residue: Less than one mg/l

Benzene: Less than 500 mg/l

Purity: Greater than 99.8% by gc analysis

Electron capture gc: No residue peak greater than 4 ug/l as heptachlor epoxide.

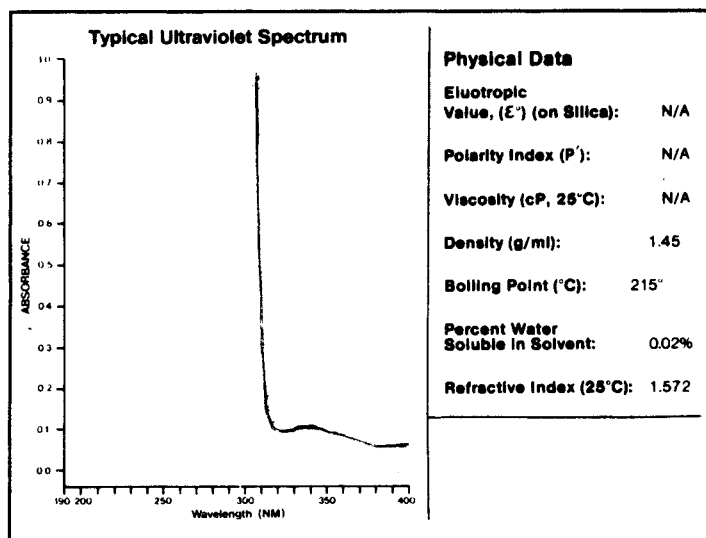Table 16.78: 1,2,4-Trichlorobenzene (56)(61)

SPECIFICATIONS (61)

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 308 | 1.000 |
| 310 | 0.500 |
| 350 | 0.050 |
| 375 | 0.010 |
| 400 | 0.005 |

Refractive index: 1.5716 ± 0.0005 at 20°C

Purity: Greater than 98.0% by gc analysis

Particulate matter: Filtered through a 0.5 micron filter

Residue: Less than 10 mg/l

Table 16.79: Trichloroethylene (61)

SPECIFICATIONS

Preservative: 1,2-Butylene oxide

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 273 | 1.000 |
| 300 | 0.100 |
| 325 | 0.080 |
| 350 | 0.060 |
| 400 | 0.060 |

Refractive index: 1.4767 ± 0.0008 at 20°C

Boiling range: 86-87°C


Residue: Less than one mg/l

Acidity: Not detectable (limit one mg/l as HCl)

Chloride: Not detectable (limit 10 mg/l)

Purity: Greater than 99% by gc analysis

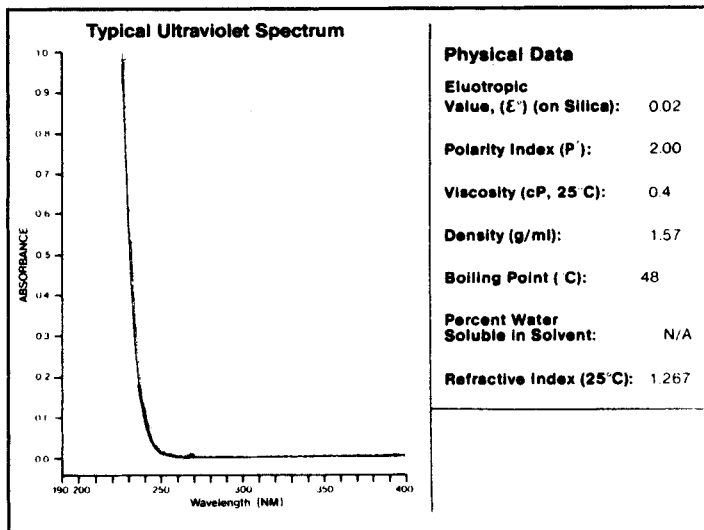Table 16.80: 1,1,2-Trichlorotrifluoroethane (56)(61)

**SPECIFICATIONS (61)**

Water: Less than 0.01% by Karl Fischer titration

Ultraviolet absorbance:

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 231 | 1.000 |
| 250 | 0.050 |
| 300 | 0.005 |
| 350 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3583 ± 0.0003 at 20°C

Boiling range: 47-48°C

Residue: Less than one mg/l


Acidity: Not detectable (limit one mg/l as HCl)

Chloride: Not detectable (limit 10 mg/l)

Purity: Greater than 99.5% by gc analysis

Infrared absorbance: C-H free. Shows no extraneous absorbance bands in the 3.1-3.6 micron range when observed in a 25mm path length liquid cell.

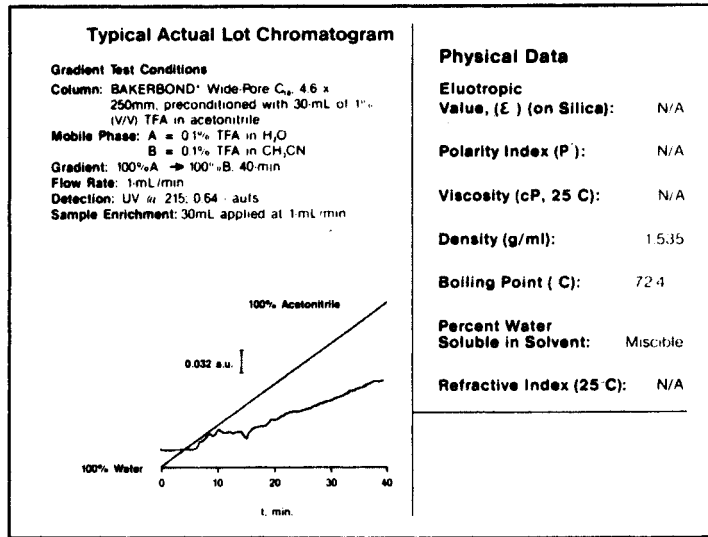Table 16.81: Trifluoroacetic Acid (56)(61)



SPECIFICATIONS (61)

Water: Less than 0.05%

Ultraviolet absorbance (0.1% solution in water):

| Wavelength, nm | Maximum Absorbance |
|----------------|--------------------|
| 210 | 1.000 |
| 230 | 0.150 |
| 250 | 0.010 |
| 300 | 0.005 |

Purity: Greater than 99.9% by titration

Table 16.82: Trimethylpentane (56)

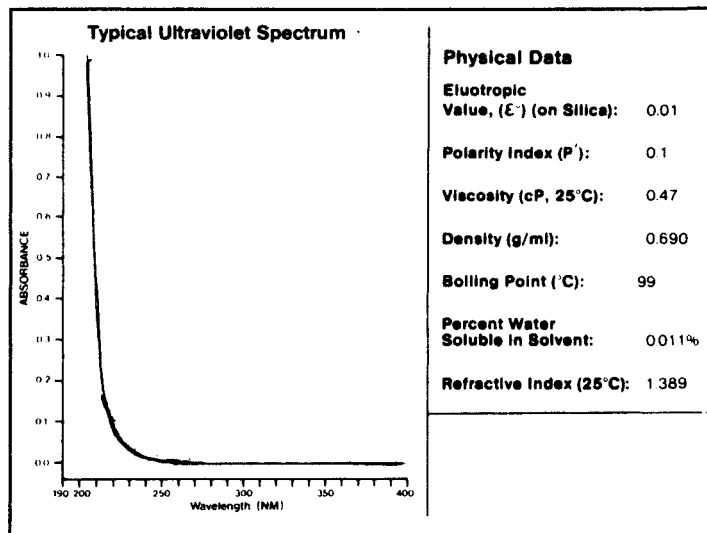
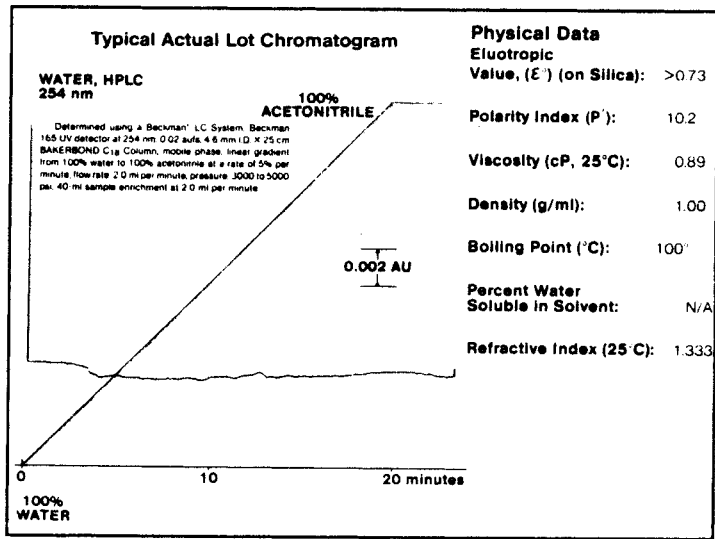


Table 16.83: Water (56)(61)

HIGH PURITY WATER (61)SPECIFICATIONS

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 190 | 0.010 |
| 200 | 0.010 |
| 250 | 0.005 |
| 300 | 0.005 |
| 400 | 0.005 |

Refractive index: 1.3330 ± 0.0010 at 20°C

Residue: Less than one mg/l

Purity by liquid chromatography: No UV absorbing peak greater than 0.001 absorbance unit (1 cm path length) at 254 nm, or 0.005 absorbance unit at 205 nm in a gradient from 100% water to 100% acetonitrile on a 15 x 0.46 cm C-18 column with 5 μ m packing after an initial loading of 20 mL water. No fluorescent peak greater than that equivalent to 20 μ g of benzo(a)pyrene under the above conditions using 350 nm excitation, 450 nm emission.

Table 16.84: ortho-Xylene (61)

SPECIFICATIONS

Water: Less than 0.02% by Karl Fischer titration

Ultraviolet absorbance:

| <u>Wavelength, nm</u> | <u>Maximum Absorbance</u> |
|-----------------------|---------------------------|
| 288 | 1.000 |
| 300 | 0.200 |
| 325 | 0.050 |
| 350 | 0.010 |
| 400 | 0.005 |

Refractive index: 1.5050 ± 0.0010 at 20°C

Boiling range: 144-145°C

Residue: Less than five mg/l

Purity: Greater than 95.0% o-xylene and 99.0% xylenes by gc analysis

Appendix—Comparative Data for Various Solvents

Physical Properties of Some Selected Solvents (10)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|-------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| WATER | 18.02 | 0.9971 | 25.0 | 1.3329 | 0.0 | 760. | 100.0 | 78.54 | 1 |
| METHANOL | 32.04 | 0.7866 | 25.0 | 1.3265 | -97.7 | 0. | 64.7 | 32.70 | 2 |
| ACETONITRILE | 41.05 | 0.7766 | 25.0 | 1.3416 | -43.8 | 0. | 81.6 | 37.50 | 3 |
| ETHYLENIMINE | 43.07 | 0.8320 | 25.0 | 1.4123 | -78.0 | 0. | 57.0 | 18.30 | 4 |
| ACETALDEHYDE | 44.05 | 0.7780 | 20.0 | 1.3311 | -123.0 | 0. | 20.4 | 21.10 | 5 |
| FORMAMIDE | 45.04 | 1.1334 | 20.0 | 1.4475 | -2.6 | 0. | 210.5 | 109.00 | 6 |
| FORMIC ACID | 46.03 | 1.2141 | 25.0 | 1.3694 | 8.3 | 0. | 190.6 | 58.50 | 7 |
| ETHANOL | 46.07 | 0.7850 | 25.0 | 1.3594 | -114.1 | 0. | 78.3 | 24.55 | 8 |
| ACRYLONITRILE | 53.06 | 0.8004 | 25.0 | 1.3888 | -83.6 | 0. | 77.3 | 33.00 | 9 |
| 1,2-BUTADIENE | 54.09 | 0.6760 | 1.0 | 1.4205 | -136.3 | 0. | 10.9 | 6.0 | 10 |
| 2-BUTYNE | 54.09 | 0.6910 | 20.0 | 1.3921 | -32.3 | 760. | 27.0 | 0.0 | 11 |
| PROPIONITRILE | 55.08 | 0.7818 | 20.0 | 1.3681 | -92.8 | 0. | 97.4 | 27.20 | 12 |
| PROPIONITRILE | 55.08 | 0.7768 | 25.0 | 1.3636 | -92.8 | 0. | 97.4 | 27.20 | 13 |
| ACROLEIN | 56.06 | 0.8389 | 20.0 | 1.4017 | -87.0 | 0. | 52.7 | 0.0 | 14 |
| PROPARGYL ALCOHOL | 56.06 | 0.9450 | 25.0 | 1.4300 | -51.8 | 0. | 113.6 | 24.50 | 15 |
| ALLYLAMINE | 57.10 | 0.7629 | 20.0 | 1.4205 | -88.2 | 0. | 53.3 | 0.0 | 16 |
| ACETONE | 58.05 | 0.7900 | 20.0 | 1.3587 | -94.7 | 0. | 56.3 | 20.70 | 17 |
| ACETONE | 58.08 | 0.7844 | 25.0 | 1.3560 | -94.7 | 0. | 56.3 | 20.70 | 18 |
| ALLYL ALCOHOL | 58.08 | 0.8540 | 20.0 | 1.4135 | -129.0 | 0. | 97.0 | 0.0 | 19 |
| 2-PROPENE-1-OL | 58.08 | 0.8421 | 30.0 | 1.4090 | -129.0 | 0. | 97.1 | 21.60 | 20 |
| PROPIONALDEHYDE | 58.08 | 0.7912 | 25.0 | 1.3593 | -80.0 | 0. | 48.0 | 18.50 | 21 |
| PROPYLENE OXIDE | 58.08 | 0.8287 | 20.0 | 1.3660 | -111.9 | 0. | 33.9 | 0.0 | 22 |
| N-ME FORMAMIDE | 59.07 | 0.9988 | 25.0 | 1.4300 | -3.8 | 0. | 182.5 | 182.40 | 23 |
| ISOPROPYLAMINE | 59.11 | 0.6821 | 25.0 | 1.3711 | -95.2 | 0. | 32.4 | 5.45 | 24 |
| N-PROPYLAMINE | 59.11 | 0.7173 | 20.0 | 1.3882 | -83.0 | 0. | 48.5 | 5.31 | 25 |
| ACETIC ACID | 60.05 | 1.0492 | 20.0 | 1.3719 | 16.7 | 0. | 117.9 | 6.15 | 26 |
| METHYL FORMATE | 60.05 | 0.9742 | 20.0 | 1.3433 | -99.0 | 0. | 31.5 | 8.50 | 27 |
| ETHYLENEDIAMINE | 60.10 | 0.8859 | 30.0 | 1.4513 | 11.3 | 0. | 117.3 | 12.90 | 28 |
| PROPANOL-1 | 60.10 | 0.8038 | 20.0 | 1.3856 | -126.2 | 0. | 97.2 | 20.33 | 29 |
| PROPANOL-1 | 60.10 | 0.7998 | 25.0 | 1.3837 | -126.2 | 0. | 97.2 | 20.33 | 30 |
| PROPANOL-2 | 60.10 | 0.7854 | 20.0 | 1.3772 | -88.0 | 0. | 82.3 | 19.92 | 31 |
| NITROMETHANE | 61.04 | 1.1312 | 25.0 | 1.3796 | -28.5 | 0. | 101.2 | 35.87 | 32 |
| 2-AMINOETHANOL | 61.08 | 1.0116 | 25.0 | 1.4521 | 10.5 | 0. | 170.0 | 37.72 | 33 |
| 1,2-ETHANEDIOL | 62.07 | 1.1135 | 20.0 | 1.4318 | -13.2 | 0. | 197.3 | 37.70 | 34 |
| ETHANETHIOL | 62.13 | 0.8391 | 20.0 | 1.4311 | -144.4 | 760. | 35.0 | 0.0 | 35 |
| METHYL SULFIDE | 63.13 | 0.8423 | 25.0 | 1.4323 | -98.3 | 0. | 37.3 | 6.20 | 36 |
| CHLOROETHANE | 64.52 | 0.9039 | 20.0 | 1.3790 | -136.4 | 0. | 12.3 | 9.45 | 37 |
| 3-BUTENITRILE | 67.09 | 0.8329 | 20.0 | 1.4060 | -84.0 | 760. | 119.0 | 0.0 | 38 |
| TRANS-CRITONONITRILE | 67.09 | 0.8239 | 20.0 | 1.4225 | -51.5 | 760. | 120.5 | 0.0 | 39 |
| METHYLACRYLONITRILE | 67.09 | 0.8001 | 20.0 | 1.4007 | -35.8 | 0. | 90.3 | 0.0 | 40 |
| PYRROLE | 67.09 | 0.9699 | 21.0 | 1.5002 | -23.4 | 0. | 129.8 | 8.13 | 41 |
| FURAN | 68.08 | 0.9378 | 20.0 | 1.4214 | 0.0 | 0. | 31.4 | 2.94 | 42 |
| 1,3-PENTADIENE | 68.11 | 0.6830 | 0.0 | 1.4280 | 0.0 | 0. | 41.8 | 0.0 | 43 |
| ISOPRENE | 68.13 | 0.6810 | 20.0 | 1.4219 | -146.0 | 760. | 34.0 | 2.10 | 44 |
| 1,2-PENTADIENE | 68.13 | 0.6926 | 20.0 | 1.4209 | -137.3 | 760. | 44.9 | 0.0 | 45 |
| 1,4-PENTADIENE | 68.13 | 0.6608 | 20.0 | 1.3888 | -148.3 | 760. | 0.0 | 0.0 | 46 |
| 2,3-PENTADIENE | 68.13 | 0.6950 | 20.0 | 1.4284 | -125.7 | 760. | 48.3 | 0.0 | 47 |
| BUTYRONITRILE | 69.11 | 0.7954 | 15.0 | 1.3860 | -111.9 | 0. | 117.9 | 20.30 | 48 |
| BUTYRONITRILE | 69.11 | 0.7865 | 25.0 | 1.3820 | -111.9 | 0. | 117.9 | 20.30 | 49 |
| ISOBUTYRONITRILE | 69.11 | 0.7656 | 25.0 | 1.3712 | -71.5 | 0. | 103.9 | 20.40 | 50 |
| PROPANOIC ACID | 70.05 | 1.1380 | 20.0 | 1.4306 | 18.0 | 0. | 144.0 | 0.0 | 51 |
| CROTONALDEHYDE | 70.09 | 0.8516 | 20.0 | 1.4373 | -76.5 | 0. | 104.1 | 0.0 | 52 |
| CYCLOPENTANE | 70.13 | 0.7454 | 0.0 | 1.4065 | -93.8 | 0. | 49.3 | 1.96 | 53 |
| 1-PENTENE | 70.13 | 0.6405 | 20.0 | 1.3715 | -165.2 | 0. | 30.0 | 2.02 | 54 |
| 2-PENTENE | 70.13 | 0.6545 | 20.0 | 1.3798 | -138.0 | 0. | 36.7 | 0.0 | 55 |
| CIS-2-PENTENE | 70.13 | 0.6556 | 20.0 | 1.3830 | -151.4 | 0. | 36.9 | 0.0 | 56 |
| TRANS-2-PENTENE | 70.13 | 0.6482 | 20.0 | 1.3793 | -140.2 | 0. | 36.4 | 0.0 | 57 |
| 2-METHYL-1-BUTENE | 70.14 | 0.6504 | 20.0 | 1.3378 | -137.6 | 760. | 31.2 | 2.20 | 58 |
| 2-METHYL-2-BUTENE | 70.14 | 0.6623 | 20.0 | 1.3874 | -133.8 | 760. | 38.6 | 0.0 | 59 |
| 2-CYANOETHANOL | 71.08 | 1.0404 | 25.0 | 0.0 | -46.0 | 0. | 220.0 | 0.0 | 60 |
| 3-HYDROXY PROPIONITRILE | 71.08 | 1.0588 | 20.0 | 1.4240 | 0.0 | 760. | 230.0 | 0.0 | 61 |
| LACTONITRILE | 71.08 | 0.9877 | 20.0 | 1.4058 | -40.0 | 0. | 183.0 | 0.0 | 62 |
| PYRROLIDINE | 71.12 | 0.8520 | 22.0 | 1.4270 | 0.0 | 0. | 88.7 | 0.0 | 63 |
| ACRYLIC ACID | 72.06 | 1.0511 | 20.0 | 1.4224 | 13.5 | 0. | 141.2 | 0.0 | 64 |
| PROPIOLACTONE | 72.06 | 1.1460 | 20.0 | 1.4131 | -33.4 | 0. | 155.0 | 0.0 | 65 |
| ALLYL METHYL ETHER | 72.11 | 0.7610 | 25.0 | 1.3786 | 0.0 | 0. | 41.5 | 0.0 | 66 |
| 2-BUTANONE | 72.11 | 0.8049 | 20.0 | 1.3788 | -86.7 | 0. | 79.6 | 18.51 | 67 |
| 2-BUTANONE | 72.11 | 0.7997 | 25.0 | 1.3764 | -86.7 | 0. | 79.6 | 18.52 | 68 |
| 2-BUTENEOL-1 (CIS) | 72.11 | 0.8540 | 20.0 | 1.4342 | -89.4 | 760. | 123.6 | 0.0 | 69 |
| 1,2-BUTYLENE OXIDE | 72.11 | 0.8297 | 20.0 | 1.3840 | -150.0 | 0. | 63.2 | 6.0 | 70 |
| BUTYRALDEHYDE | 72.11 | 0.8016 | 20.0 | 1.3791 | -96.4 | 0. | 74.8 | 13.40 | 71 |
| ISO-BUTYRALDEHYDE | 72.11 | 0.7891 | 20.0 | 1.3727 | -65.0 | 0. | 64.1 | 0.0 | 72 |
| ETHYL VINYL ETHER | 72.11 | 0.7531 | 20.0 | 1.3754 | -115.8 | 0. | 35.7 | 0.0 | 73 |
| METHALLYL ALCOHOL | 72.11 | 0.8574 | 19.0 | 1.4255 | 0.0 | 0. | 114.5 | 0.0 | 74 |
| TETRAHYDROFURAN | 72.11 | 0.8892 | 20.0 | 1.4050 | -108.5 | 0. | 66.0 | 7.58 | 75 |
| TETRAHYDROFURAN | 72.11 | 0.8811 | 25.0 | 1.4050 | -108.5 | 0. | 66.0 | 7.58 | 76 |
| 1,2-EPOXY-2-ME PROPANE | 72.12 | 0.8650 | 0.0 | 1.3712 | 0.0 | 760. | 52.0 | 0.0 | 77 |
| 2,2-DIMETHYL PROPANE | 72.15 | 0.6135 | 20.0 | 1.3476 | -20.0 | 0. | 9.5 | 0.0 | 78 |
| 2-METHYL BUTANE | 72.15 | 0.6197 | 0.0 | 1.3537 | -159.9 | 0. | 27.9 | 1.84 | 79 |
| PENTANE | 72.15 | 0.6262 | 20.0 | 1.3579 | -129.7 | 0. | 36.1 | 0.0 | 80 |
| NN-DIMETHYLFORMAMIDE | 73.10 | 0.9440 | 25.0 | 1.4282 | -60.4 | 760. | 153.0 | 36.71 | 81 |
| METHYL ISOTHIOCYANATE | 73.12 | 1.0691 | 37.0 | 1.5258 | 36.0 | 758. | 119.0 | 0.0 | 82 |
| METHYL THIOCYANATE | 73.12 | 1.0678 | 25.0 | 1.4669 | -5.1 | 757. | 132.9 | 0.0 | 83 |
| SEC-BUTYL AMINE (D) | 73.14 | 0.7240 | 20.0 | 1.3440 | -104.5 | 0. | 63.0 | 0.0 | 84 |
| SEC-BUTYL AMINE (DL) | 73.14 | 0.7271 | 17.0 | 1.3950 | -72.0 | 772. | 67.0 | 0.0 | 85 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|-------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| N-BUTYLAMINE | 73.14 | 0.7346 | 25.0 | 1.3987 | -49.1 | 0. | 77.4 | 4.88 | 86 |
| SEC-BUTYLAMINE | 73.14 | 0.7246 | 20.0 | 1.3934 | 0.0 | 0. | 62.5 | 0.0 | 87 |
| DIETHYLAMINE | 73.14 | 0.7070 | 20.0 | 1.3854 | -49.8 | 0. | 55.5 | 3.58 | 88 |
| ISOBUTYLAMINE | 73.14 | 0.7346 | 20.0 | 1.3972 | -84.6 | 0. | 67.7 | 4.43 | 89 |
| TERT-BUTYLAMINE | 73.14 | 0.6908 | 25.0 | 1.3761 | -72.7 | 0. | 44.4 | 0.0 | 90 |
| DIOXOLANE | 74.08 | 1.0600 | 20.0 | 1.3974 | -95.0 | 765. | 78.0 | 0.0 | 91 |
| ETHYL FORMATE | 74.08 | 0.9289 | 15.0 | 1.3625 | -79.4 | 0. | 54.1 | 7.16 | 92 |
| HYDROXY ACETONE | 74.08 | 1.0824 | 20.0 | 1.4295 | -17.0 | 0. | 145.5 | 0.0 | 93 |
| 3-HYDROXYPROPYLENEOXIDE | 74.08 | 1.1110 | 22.0 | 1.4350 | 0.0 | 0. | 166.5 | 0.0 | 94 |
| METHYL ACETATE | 74.08 | 0.9342 | 20.0 | 1.3614 | -98.1 | 0. | 56.3 | 6.68 | 95 |
| PROPANOIC ACID | 74.08 | 0.9880 | 25.0 | 1.3843 | -20.7 | 0. | 140.8 | 3.44 | 96 |
| 1-BUTANOL | 74.12 | 0.8097 | 20.0 | 1.3993 | -88.6 | 0. | 117.7 | 17.51 | 97 |
| 1-BUTANOL | 74.12 | 0.8060 | 25.0 | 1.3973 | -88.6 | 0. | 117.7 | 17.51 | 98 |
| 2-BUTANOL | 74.12 | 0.8026 | 25.0 | 1.3950 | -114.7 | 0. | 99.6 | 16.56 | 99 |
| DIETHYL ETHER | 74.12 | 0.7138 | 20.0 | 1.3526 | -116.2 | 760. | 34.5 | 4.34 | 100 |
| ETHYL ETHER | 74.12 | 0.7076 | 25.0 | 1.3495 | -116.3 | 0. | 34.5 | 4.34 | 101 |
| 2-METHYL-1-PROPANOL | 74.12 | 0.7978 | 25.0 | 1.3939 | -108.0 | 0. | 107.7 | 17.93 | 102 |
| 2-METHYL-2-PROPANOL | 74.12 | 0.7808 | 25.0 | 1.3878 | 25.5 | 0. | 82.2 | 1.77 | 103 |
| METHYL PROPYL ETHER | 74.12 | 0.7380 | 20.0 | 1.3579 | 0.0 | 760. | 38.9 | 0.0 | 104 |
| TERT BUTYL ALCOHOL | 74.12 | 0.7887 | 20.0 | 1.3878 | 25.5 | 0. | 82.2 | 1.77 | 105 |
| 1,2-PROPANEDIAMINE | 74.13 | 0.8584 | 25.0 | 1.4492 | 0.0 | 760. | 120.5 | 0.0 | 106 |
| NITROETHANE | 75.07 | 1.0446 | 25.0 | 1.3897 | -89.5 | 0. | 114.1 | 28.06 | 107 |
| 1-AMINO-2-PROPANOL | 75.11 | 0.9730 | 18.0 | 1.4500 | -1.0 | 750. | 160.0 | 0.0 | 108 |
| 3-AMINO-2-PROPANOL | 75.11 | 0.9824 | 26.0 | 1.4570 | 11.0 | 756. | 187.0 | 0.0 | 109 |
| 2-METHOXYETHANOL | 76.10 | 0.9602 | 25.0 | 1.4002 | -85.1 | 0. | 124.6 | 16.93 | 110 |
| METHYLAL | 76.10 | 0.8665 | 15.0 | 1.3563 | -105.2 | 0. | 42.3 | 2.65 | 111 |
| 1,2-PROPANEDIOL | 76.10 | 1.0362 | 20.0 | 1.4329 | -60.0 | 0. | 187.6 | 32.00 | 112 |
| 1,3-PROPANEDIOL | 76.10 | 1.0538 | 20.0 | 1.4396 | -26.7 | 0. | 214.4 | 35.00 | 113 |
| CARBON DISULFIDE | 76.14 | 1.2700 | 15.0 | 1.6319 | -111.6 | 0. | 46.2 | 2.64 | 114 |
| 1-PROPANE THIOL | 76.17 | 0.8411 | 20.0 | 1.4380 | -113.3 | 760. | 67.5 | 0.0 | 115 |
| 2-PROPANE THIOL | 76.17 | 0.8143 | 20.0 | 1.4255 | -130.5 | 760. | 52.6 | 0.0 | 116 |
| 3-CHLOROPROPENE | 76.52 | 0.9442 | 15.0 | 1.4181 | -134.5 | 0. | 45.1 | 8.20 | 117 |
| CIS-PROPENYL CHLORIDE | 76.53 | 0.9347 | 20.0 | 1.4055 | -134.8 | 760. | 32.8 | 0.0 | 118 |
| TRANS-PROPENYL CHLORIDE | 76.53 | 0.9350 | 20.0 | 1.4054 | -99.0 | 760. | 37.4 | 0.0 | 119 |
| BENZENE | 78.12 | 0.8790 | 20.0 | 1.5011 | 5.5 | 0. | 80.1 | 2.28 | 120 |
| BENZENE | 78.12 | 0.8737 | 25.0 | 1.4979 | 5.5 | 0. | 80.1 | 2.28 | 121 |
| DIMETHYLSULFOXIDE | 78.13 | 1.0958 | 25.0 | 1.4773 | 18.5 | 0. | 189.0 | 46.68 | 122 |
| ETHANOL-1-THIOL-2 | 78.13 | 1.1143 | 0.0 | 1.4496 | 0.0 | 13. | 55.0 | 0.0 | 123 |
| ACETYL CHLORIDE | 78.50 | 1.1050 | 20.0 | 1.3898 | -112.0 | 0. | 51.5 | 15.00 | 124 |
| 1-CHLOROPROPANE | 78.54 | 0.8909 | 20.0 | 1.3879 | -122.8 | 0. | 46.6 | 7.70 | 125 |
| 2-CHLOROPROPANE | 78.54 | 0.8617 | 20.0 | 1.3777 | -117.2 | 0. | 35.7 | 9.02 | 126 |
| 2-CHLOROPROPANE | 78.54 | 0.8491 | 30.0 | 1.3711 | -117.2 | 0. | 35.7 | 9.82 | 127 |
| PYRIDINE | 79.10 | 0.9782 | 25.0 | 1.5075 | -41.6 | 0. | 115.3 | 12.40 | 128 |
| PYRIDAZINE | 80.09 | 1.1035 | 23.0 | 1.5231 | -8.0 | 0. | 208.0 | 0.0 | 129 |
| PYRIMIDINE | 80.09 | 0.0 | 0.0 | 0.0 | 22.0 | 0. | 123.7 | 0.0 | 130 |
| 2-CHLOROETHANOL | 80.52 | 1.2019 | 20.0 | 1.4438 | -67.5 | 0. | 128.6 | 25.80 | 131 |
| 1-METHYL PYRROLE | 81.11 | 0.9145 | 15.0 | 1.4899 | 0.0 | 748. | 114.5 | 0.0 | 132 |
| 1-METHYL IMIDAZOLE | 82.10 | 1.6325 | 21.0 | 1.4924 | -6.0 | 0. | 198.0 | 0.0 | 133 |
| CYCLOHEXENE | 82.15 | 0.8061 | 25.0 | 1.4438 | -103.5 | 0. | 83.0 | 2.22 | 134 |
| 1,5-HEXAADIENE | 82.15 | 0.6923 | 0.0 | 1.4044 | -141.0 | 0. | 60.0 | 0.0 | 135 |
| N-ME-ALANINE NITRILE | 83.11 | 0.8992 | 20.0 | 1.4312 | 0.0 | 22. | 82.0 | 0.0 | 136 |
| VALENONITRILE | 83.13 | 0.7950 | 25.0 | 1.3951 | -96.2 | 0. | 141.3 | 19.71 | 137 |
| CYCLOPENTANONE | 84.11 | 0.9509 | 0.0 | 1.9366 | -51.3 | 0. | 130.7 | 0.0 | 138 |
| THIOPHENE | 84.14 | 1.0649 | 20.0 | 1.5289 | -38.2 | 0. | 84.2 | 2.71 | 139 |
| CYCLOHEXANE | 84.16 | 0.7786 | 20.0 | 1.4262 | 6.6 | 0. | 80.7 | 2.02 | 140 |
| CYCLOHEXANE | 84.16 | 0.7739 | 25.0 | 1.4235 | 6.6 | 0. | 80.7 | 2.02 | 141 |
| 1-HEXENE | 84.16 | 0.6685 | 25.0 | 1.3850 | -139.8 | 0. | 63.5 | 2.05 | 142 |
| METHYL CYCLOPENTANE | 84.16 | 0.7489 | 20.0 | 1.4096 | -142.4 | 0. | 72.1 | 1.98 | 143 |
| DICHLOROMETHANE | 84.93 | 1.3148 | 25.0 | 1.4211 | -95.1 | 0. | 39.8 | 8.93 | 144 |
| ACETONE CYANOHYDMIN | 85.11 | 0.9320 | 19.0 | 1.3996 | -190.0 | 0. | 82.0 | 0.0 | 145 |
| 2-PYRROLIDINONE | 85.11 | 1.1070 | 25.0 | 1.4860 | 25.0 | 0. | 245.0 | 0.0 | 146 |
| PIPERIDINE | 85.15 | 0.8616 | 20.0 | 1.4525 | -10.5 | 0. | 106.4 | 5.80 | 147 |
| ALLYL FORMATE | 86.09 | 0.9498 | 18.0 | 1.3980 | 0.0 | 0. | 83.0 | 0.0 | 148 |
| CIS-2-BUTENOIC ACID | 86.09 | 1.0267 | 20.0 | 1.4483 | 15.5 | 760. | 169.3 | 0.0 | 149 |
| BUTYROLACTONE | 86.09 | 1.1254 | 25.0 | 1.4348 | -43.5 | 760. | 204.6 | 39.00 | 150 |
| METHACRYLIC ACID | 86.09 | 1.0153 | 20.0 | 1.4314 | 15.0 | 760. | 160.5 | 0.0 | 151 |
| METHYL ACRYLATE | 86.09 | 0.9547 | 18.0 | 1.4117 | -75.0 | 0. | 80.2 | 0.0 | 152 |
| VINYL ACETATE | 86.09 | 0.9312 | 20.0 | 1.3959 | -92.8 | 0. | 72.5 | 0.0 | 153 |
| ALLYL ETHYL ETHER | 86.13 | 0.7597 | 25.0 | 1.3861 | 64.0 | 0. | 0.0 | 0.0 | 154 |
| 2-PENTANONE | 86.13 | 0.8124 | 15.0 | 1.3895 | -77.8 | 0. | 102.0 | 0.0 | 155 |
| 3-PENTANONE | 86.13 | 0.8095 | 25.0 | 1.3900 | -39.0 | 0. | 102.0 | 17.00 | 156 |
| 1-PENTENE-3-OL | 86.13 | 0.8395 | 22.0 | 1.4183 | 0.0 | 0. | 115.0 | 0.0 | 157 |
| TETRAHYDOPYRAN | 86.13 | 0.8772 | 25.0 | 1.4195 | -45.0 | 0. | 88.0 | 5.61 | 158 |
| TRI-ME ACETALDEHYDE | 86.13 | 0.7927 | 17.0 | 1.3791 | 6.0 | 0. | 75.0 | 0.0 | 159 |
| VALEALDEHYDE | 86.13 | 0.8095 | 20.0 | 1.3944 | -91.5 | 0. | 102.5 | 10.00 | 160 |
| 2,2-DIMETHYL BUTANE | 86.17 | 0.6492 | 0.0 | 1.3687 | -99.9 | 0. | 49.7 | 0.0 | 161 |
| 2,3-DIMETHYL BUTANE | 86.17 | 0.6616 | 0.0 | 1.3749 | -128.5 | 0. | 57.9 | 0.0 | 162 |
| HEXANE | 86.17 | 0.6548 | 25.0 | 1.3723 | -95.3 | 0. | 68.7 | 1.89 | 163 |
| HEXANE | 86.17 | 0.6594 | 0.0 | 1.3749 | -95.3 | 0. | 68.7 | 1.89 | 164 |
| 2-METHYL PENTANE | 86.17 | 0.6532 | 0.0 | 1.3714 | -153.7 | 0. | 60.3 | 0.0 | 165 |
| 3-METHYL PENTANE | 86.17 | 0.6643 | 0.0 | 1.3765 | 0.0 | 0. | 63.3 | 0.0 | 166 |
| N,N-DIACETAMIDE | 87.12 | 0.9366 | 25.0 | 1.4356 | -20.0 | 0. | 166.1 | 37.78 | 167 |
| N-ME PROPIONAMIDE | 87.12 | 0.9305 | 25.0 | 1.4345 | -30.9 | 0. | 148.0 | 172.20 | 168 |
| MORPHOLINE | 87.12 | 1.0050 | 25.0 | 1.4573 | -3.1 | 0. | 128.9 | 7.42 | 169 |
| ETHYL ISUTHIOCYANATE | 87.14 | 0.9990 | 20.0 | 1.5130 | -5.9 | 760. | 131.5 | 0.0 | 170 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|---------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| 1-AMINOPENTANE | 87.17 | 0.7547 | 20.0 | 1.4118 | -55.0 | 760. | 104.4 | 0.0 | 171 |
| ETHYLENE CARBONATE | 88.06 | 1.3208 | 25.0 | 1.4250 | 36.4 | 0. | 238.0 | 89.60 | 172 |
| PYRROLINE | 88.06 | 1.2272 | 0.0 | 1.4138 | 13.6 | 0. | 115.0 | 0.0 | 173 |
| PYRUVIC ACID | 88.06 | 1.2272 | 20.0 | 1.4260 | 13.6 | 760. | 165.0 | 0.0 | 174 |
| ALDOL | 88.10 | 1.1030 | 20.0 | 1.4497 | 0.0 | 12. | 79.0 | 0.0 | 175 |
| CIS-2-BUTENE-14-DIOL | 88.11 | 1.0740 | 20.0 | 1.4793 | 11.0 | 0. | 235.0 | 0.0 | 176 |
| TRANS-2-BUTENE-14-DIOL | 88.11 | 1.0665 | 20.0 | 1.4779 | 27.3 | 0. | 132.0 | 0.0 | 177 |
| BUTYRIC ACID | 88.11 | 0.9532 | 25.0 | 1.3958 | -5.2 | 0. | 163.3 | 2.97 | 178 |
| 1,3-DIOXANE | 88.11 | 1.3042 | 20.0 | 1.4165 | -42.0 | 755. | 105.0 | 0.0 | 179 |
| P-DIOXANE | 88.11 | 1.0280 | 25.0 | 1.4203 | 11.8 | 0. | 101.3 | 2.21 | 180 |
| ETHYL ACETATE | 88.11 | 0.9006 | 20.0 | 1.3724 | -83.9 | 0. | 77.1 | 6.02 | 181 |
| ETHYL ACETATE | 88.11 | 0.8946 | 25.0 | 1.3698 | -83.9 | 0. | 77.1 | 6.02 | 182 |
| ISOBUTYRIC ACID | 88.11 | 0.9682 | 20.0 | 1.3930 | -46.1 | 0. | 154.7 | 2.73 | 183 |
| METHYLPROPIONATE | 88.11 | 0.9151 | 20.0 | 1.3779 | -87.5 | 0. | 78.7 | 5.50 | 184 |
| PROPYL FORMATE | 88.11 | 0.9111 | 15.0 | 1.3790 | -92.9 | 0. | 80.8 | 7.72 | 185 |
| VALEONITRILE | 88.13 | 0.8034 | 15.0 | 1.3991 | -96.2 | 0. | 141.3 | 19.71 | 186 |
| ETHYL-N-PROPYL ETHER | 88.15 | 0.7330 | 0.0 | 1.3695 | -79.0 | 0. | 63.6 | 0.0 | 187 |
| 2-METHYL-1-BUTANOL | 88.15 | 0.8152 | 25.0 | 1.4087 | -70.0 | 760. | 128.7 | 14.70 | 188 |
| 3-METHYL-1-BUTANOL | 88.15 | 0.8071 | 25.0 | 1.4052 | -117.2 | 60. | 130.5 | 14.70 | 189 |
| 2-METHYL-2-BUTANOL | 88.15 | 0.8050 | 25.0 | 1.4024 | -8.8 | 0. | 102.0 | 5.82 | 190 |
| 3-METHYL-2-BUTANOL | 88.15 | 0.8138 | 25.0 | 1.4075 | 0.0 | 0. | 111.5 | 0.0 | 191 |
| METHYL-N-BUTYL ETHER | 88.15 | 0.7443 | 0.0 | 1.3736 | -115.5 | 0. | 71.0 | 0.0 | 192 |
| 1-PENTANOL | 88.15 | 0.8115 | 25.0 | 1.4079 | -78.2 | 0. | 137.8 | 13.90 | 193 |
| 2-PENTANOL | 88.15 | 0.8054 | 25.0 | 1.4044 | 0.0 | 0. | 119.0 | 13.82 | 194 |
| 3-PENTANOL | 88.15 | 0.8160 | 25.0 | 1.4079 | 0.0 | 0. | 115.3 | 13.02 | 195 |
| TETRAHYDROTHIOPHENE | 88.17 | 0.9938 | 25.0 | 1.5257 | -96.2 | 0. | 120.9 | 0.0 | 196 |
| 1-NITROPROPANE | 89.10 | 1.0961 | 25.0 | 1.3996 | -104.0 | 0. | 131.2 | 23.24 | 197 |
| 2-NITROPROPANE | 89.10 | 0.9829 | 25.0 | 1.3924 | -91.3 | 0. | 120.3 | 25.52 | 198 |
| 2-AMINO-1-BUTANOL | 89.14 | 0.9162 | 20.0 | 1.4489 | -2.0 | 0. | 178.0 | 0.0 | 199 |
| 3-AMINO-2-BUTANOL | 89.14 | 0.9299 | 25.0 | 1.4502 | 19.0 | 745. | 159.5 | 0.0 | 200 |
| DIMETHYL ETHANOLAMINE | 89.14 | 0.8866 | 20.0 | 1.4300 | 0.0 | 760. | 134.0 | 0.0 | 201 |
| 2-ETHYLAMINOETHANOL | 89.14 | 0.9140 | 20.0 | 1.4440 | -9.0 | 760. | 169.5 | 0.0 | 202 |
| 3-CHLOROPROPIONITRILE | 89.53 | 1.1375 | 0.0 | 1.4380 | 0.0 | 0. | 58.0 | 0.0 | 203 |
| DIMETHYL CARBONATE | 90.08 | 1.0694 | 20.0 | 1.3687 | 3.0 | 0. | 90.5 | 0.0 | 204 |
| LACTIC ACID OL | 90.08 | 1.2060 | 25.0 | 1.4392 | 18.0 | 12. | 119.0 | 0.0 | 205 |
| METHOXYACETIC ACID | 90.08 | 1.1768 | 20.0 | 1.4168 | 0.0 | 760. | 213.0 | 0.0 | 206 |
| METHYL GLYCOLATE | 90.08 | 1.1677 | 18.0 | 0.0 | 0.0 | 760. | 151.1 | 0.0 | 207 |
| 1,2-BUTANEDIOL | 90.12 | 1.0059 | 20.0 | 1.4375 | 0.0 | 0. | 193.0 | 0.0 | 208 |
| 1,3-BUTANEDIOL | 90.12 | 1.0053 | 20.0 | 1.4410 | 77.0 | 0. | 207.5 | 0.0 | 209 |
| 1,4-BUTANEDIOL | 90.12 | 1.0171 | 20.0 | 1.4460 | 20.1 | 0. | 235.0 | 0.0 | 210 |
| 2,3-BUTANEDIOL | 90.12 | 0.9872 | 20.0 | 1.4306 | 34.0 | 760. | 181.0 | 0.0 | 211 |
| 1,2-DIMETHOXYETHANE | 90.12 | 0.8629 | 20.0 | 1.3796 | -58.0 | 760. | 83.5 | 0.0 | 212 |
| 2-ETHOXYETHANOL | 90.12 | 0.9252 | 25.0 | 1.4057 | -90.0 | 0. | 135.6 | 29.60 | 213 |
| 1-METHOXYPROPANOL-2 | 90.12 | 0.9620 | 20.0 | 1.4070 | 0.0 | 0. | 118.3 | 0.0 | 214 |
| 1-METHOXYPROPANOL-2 | 90.12 | 0.9620 | 20.0 | 1.4070 | 0.0 | 0. | 118.3 | 0.0 | 215 |
| 1-BUTANETHIOL | 90.19 | 0.8416 | 20.0 | 1.4429 | -115.7 | 0. | 98.4 | 5.07 | 216 |
| ETHYL SULFIDE | 90.19 | 0.8312 | 25.0 | 1.4402 | -103.9 | 0. | 92.1 | 5.72 | 217 |
| CIS-1-CL-1-BUTENE | 90.55 | 0.9153 | 15.0 | 1.4194 | 0.0 | 760. | 63.5 | 0.0 | 218 |
| TRANS-1-CL-1-BUTENE | 90.55 | 0.9205 | 15.0 | 1.4225 | 0.0 | 760. | 68.0 | 0.0 | 219 |
| 2-CHLORO-1-BUTENE | 90.55 | 0.9107 | 15.0 | 1.4115 | 0.0 | 760. | 58.7 | 0.0 | 220 |
| 3-CHLORO-1-BUTENE | 90.55 | 0.8978 | 20.0 | 1.4149 | 0.0 | 766. | 64.5 | 0.0 | 221 |
| 4-CHLORO-1-BUTENE | 90.55 | 0.9211 | 20.0 | 1.4233 | 0.0 | 773. | 75.0 | 0.0 | 222 |
| CIS-1-CL-2-BUTENE | 90.55 | 0.9426 | 20.0 | 1.4390 | 0.0 | 758. | 84.1 | 0.0 | 223 |
| TRANS-1-CL-2-BUTENE | 90.55 | 0.9295 | 20.0 | 1.4350 | 0.0 | 752. | 84.8 | 0.0 | 224 |
| CIS-2-CL-2-BUTENE | 90.55 | 0.9239 | 20.0 | 1.4240 | -117.3 | 760. | 70.6 | 0.0 | 225 |
| TRANS-2-CL-2-BUTENE | 90.55 | 0.9138 | 20.0 | 1.4190 | -105.6 | 760. | 628.0 | 0.0 | 226 |
| 1-CL-2-ME-PROPENE-1 | 90.55 | 0.9250 | 16.0 | 1.4221 | 0.0 | 775. | 68.0 | 0.0 | 227 |
| 3-CL-2-ME-PROPENE-1 | 90.55 | 0.9250 | 20.0 | 1.4270 | 0.0 | 0. | 72.0 | 0.0 | 228 |
| 2-NITROETHANOL-1 | 91.07 | 1.2700 | 15.0 | 1.4438 | -80.0 | 765. | 194.0 | 0.0 | 229 |
| 1,2,3-PROPANETRIOL | 92.10 | 1.2613 | 20.0 | 1.4746 | 18.2 | 0. | 290.0 | 42.50 | 230 |
| TOLUENE | 92.14 | 0.8669 | 20.0 | 1.4969 | -94.9 | 0. | 110.6 | 2.38 | 231 |
| TOLUENE | 92.14 | 0.8623 | 25.0 | 1.4941 | -94.9 | 0. | 110.6 | 2.38 | 232 |
| CHLOROACETONE | 92.53 | 1.1500 | 20.0 | 0.0 | -44.5 | 0. | 119.0 | 0.0 | 233 |
| EPICHLOROHYDRIN | 92.53 | 1.1807 | 20.0 | 1.4380 | -57.2 | 0. | 116.1 | 22.60 | 234 |
| TERT-BUTYL CHLORIDE | 92.57 | 0.8420 | 20.0 | 1.3857 | -25.4 | 760. | 52.0 | 0.0 | 235 |
| 1-CHLOROBUTANE | 92.57 | 0.8862 | 20.0 | 1.4021 | -123.1 | 0. | 78.4 | 7.39 | 236 |
| 2-CHLOROBUTANE | 92.57 | 0.8732 | 20.0 | 1.3971 | -140.5 | 0. | 68.3 | 7.09 | 237 |
| 1-CL-2-METHYLPROPANE | 92.57 | 0.8773 | 20.0 | 1.3980 | -130.3 | 0. | 68.8 | 6.49 | 238 |
| 2-CL-2-METHYLPROPANE | 92.57 | 0.8420 | 20.0 | 1.3857 | -25.4 | 0. | 50.7 | 9.96 | 239 |
| ANILINE | 93.13 | 1.0217 | 20.0 | 1.5863 | -6.0 | 0. | 184.4 | 6.89 | 240 |
| 2-METHYLPYRIDINE | 93.13 | 0.9497 | 15.0 | 1.5029 | 0.0 | 0. | 128.8 | 9.80 | 241 |
| 3-METHYLPYRIDINE | 93.13 | 0.9613 | 15.0 | 1.5043 | 0.0 | 0. | 143.5 | 9.80 | 242 |
| GLUTARONITRILE | 94.12 | 0.9911 | 15.0 | 1.4295 | -29.0 | 0. | 286.0 | 0.0 | 243 |
| PHENOL | 94.12 | 1.0576 | 41.0 | 1.5228 | 40.9 | 0. | 181.8 | 9.78 | 244 |
| 1,2-DIHYDROTOLUENE | 94.16 | 0.8354 | 0.0 | 1.4763 | 0.0 | 0. | 110.0 | 0.0 | 245 |
| 1-CHLORO-2-PROPANOL | 94.54 | 1.1100 | 20.0 | 1.4392 | 0.0 | 762. | 126.5 | 0.0 | 246 |
| 3-CHLORO-1-PROPANOL | 94.54 | 1.1309 | 0.0 | 1.4450 | 0.0 | 0. | 161.5 | 0.0 | 247 |
| PYRROLE-2-CARBOXYALDEHYDE | 95.10 | 0.0 | 16.0 | 1.5939 | 40.5 | 0. | 218.0 | 0.0 | 248 |
| 2,5-DIME-PYRROLE | 95.14 | 0.9353 | 20.0 | 1.5025 | 0.0 | 765. | 171.0 | 0.0 | 249 |
| 1-ETHYL-PYRROLE | 95.15 | 0.9009 | 20.0 | 1.4841 | 0.0 | 0. | 164.0 | 0.0 | 250 |
| 1,4-PYRONE | 96.08 | 1.1900 | 0.0 | 1.5238 | 32.5 | 742. | 216.0 | 0.0 | 251 |
| 2-FURALDEHYDE | 96.09 | 1.1598 | 20.0 | 1.5261 | -36.5 | 0. | 161.8 | 38.00 | 252 |
| FLUOROBENZENE | 96.10 | 1.0309 | 15.0 | 1.4684 | -42.2 | 0. | 84.7 | 0.0 | 253 |
| 2,5-DIMETHYL FURAN | 96.14 | 0.8883 | 20.0 | 1.4363 | -62.8 | 760. | 93.5 | 0.0 | 254 |
| 2,4-HEPTADIENE | 96.17 | 0.7384 | 0.0 | 1.4578 | 0.0 | 0. | 108.0 | 0.0 | 255 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|--------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| 1-HEPTYNE | 96.17 | 0.7338 | 20.0 | 1.4084 | -81.0 | 760. | 100.0 | 0.0 | 256 |
| 1,1-DICHLOROETHYLENE | 96.94 | 1.2132 | 20.0 | 1.4247 | -122.6 | 0. | 31.6 | 4.60 | 257 |
| CIS-1,2-DICLETHYLENE | 96.94 | 1.2837 | 20.0 | 1.4490 | -86.0 | 0. | 60.6 | 9.20 | 258 |
| TRANS-1,2-DICLETHYLENE | 96.94 | 1.2547 | 20.0 | 1.4462 | -49.8 | 0. | 47.7 | 2.14 | 259 |
| CAPRONITRILE | 97.16 | 0.8052 | 20.0 | 1.4069 | -80.3 | 0. | 163.6 | 17.26 | 260 |
| 4-MEVALENONITRILE | 97.16 | 0.7993 | 25.0 | 1.4040 | -51.1 | 0. | 154.0 | 15.50 | 261 |
| FURFURYL ALCOHOL | 98.10 | 1.1238 | 30.0 | 1.4801 | -29.0 | 0. | 170.0 | 0.0 | 262 |
| 2-METHOXY FURAN | 98.10 | 1.0646 | 25.0 | 1.4468 | 0.0 | 0. | 110.5 | 0.0 | 263 |
| PROPARGYL ACETATE | 98.10 | 0.9982 | 20.0 | 1.4187 | 0.0 | 0. | 121.5 | 0.0 | 264 |
| PROPARGYL ACETATE | 98.10 | 0.9992 | 20.0 | 1.4187 | 0.0 | 0. | 121.5 | 0.0 | 265 |
| 3,4-DIMETHYL FURAZAN | 98.11 | 1.0528 | 14.0 | 1.4237 | -7.0 | 744. | 156.0 | 0.0 | 266 |
| ALLYL ACETONE | 98.14 | 0.8470 | 0.0 | 1.4917 | 0.0 | 0. | 128.0 | 0.0 | 267 |
| ALLYL ETHER | 98.15 | 0.8006 | 25.0 | 1.4141 | 0.0 | 0. | 0.0 | 0.0 | 268 |
| CYCLOHEXANONE | 98.15 | 0.9510 | 25.0 | 1.4520 | -32.1 | 0. | 155.6 | 18.30 | 269 |
| MESIYL OXIDE | 98.15 | 0.8653 | 20.0 | 1.4440 | -52.9 | 760. | 129.8 | 0.0 | 270 |
| 2-METHYLIMIOPHENE | 98.17 | 1.0193 | 20.0 | 1.5203 | -63.4 | 760. | 112.6 | 0.0 | 271 |
| 3-METHYLIMIOPHENE | 98.17 | 1.0218 | 20.0 | 1.5204 | -69.0 | 760. | 115.4 | 0.0 | 272 |
| METHYL CYCLOHEXANE | 98.18 | 0.7694 | 0.0 | 1.4231 | -126.6 | 0. | 98.2 | 0.0 | 273 |
| 1-HEPTENE | 98.19 | 0.6970 | 20.0 | 1.3998 | -118.9 | 760. | 93.6 | 2.07 | 274 |
| 1,1-DICHLOROETHANE | 98.96 | 1.1680 | 25.0 | 1.4138 | -97.0 | 0. | 57.3 | 10.10 | 275 |
| 1,2-DICHLOROETHANE | 98.96 | 1.2458 | 25.0 | 1.4421 | -35.7 | 0. | 83.5 | 10.36 | 276 |
| METHYLCYANOACETATE | 99.09 | 1.1225 | 25.0 | 1.4166 | -13.1 | 0. | 205.1 | 29.30 | 277 |
| 1-ME-2-PYRROLIDINONE | 99.13 | 1.0279 | 25.0 | 1.4680 | -24.4 | 760. | 202.0 | 32.00 | 278 |
| 1-ME-2-PYRROLIDONE | 99.13 | 1.0279 | 25.0 | 1.4680 | -24.4 | 10. | 79.0 | 32.00 | 279 |
| ALLYLSIOMIUCYANATE | 99.16 | 1.0126 | 20.0 | 1.5306 | -80.0 | 760. | 152.0 | 17.20 | 280 |
| N-METHYL PIPERIDINE | 99.17 | 0.8159 | 0.0 | 1.4355 | 0.0 | 0. | 107.0 | 0.0 | 281 |
| CYCLOHEXYLAMINE | 99.18 | 0.8671 | 20.0 | 1.4592 | -17.7 | 0. | 134.8 | 4.73 | 282 |
| 2,4-DIIME-PYRROLIDINE | 99.18 | 0.8297 | 20.0 | 1.4325 | 0.0 | 753. | 116.0 | 0.0 | 283 |
| ALLYL ACETATE | 100.12 | 0.9280 | 20.0 | 1.4040 | 0.0 | 0. | 104.0 | 0.0 | 284 |
| ETHYL ACRYLATE | 100.12 | 0.9234 | 20.0 | 1.4068 | -71.2 | 0. | 99.5 | 0.0 | 285 |
| METHYLMETHACRYLATE | 100.12 | 0.9433 | 20.0 | 1.4146 | -48.2 | 0. | 100.3 | 2.90 | 286 |
| 2,3 PENTANEDIONE | 100.12 | 0.9565 | 19.0 | 1.4014 | 0.0 | 0. | 108.0 | 0.0 | 287 |
| 2,4 PENTANEDIONE | 100.12 | 0.9721 | 25.0 | 1.4541 | -23.0 | 734. | 139.0 | 0.0 | 288 |
| GAMMA-VALEROLACTONE | 100.12 | 1.0520 | 25.0 | 1.4320 | -37.0 | 0. | 206.0 | 0.0 | 289 |
| CYCLOHUT-CARBOXYLIC ACID | 100.13 | 1.0599 | 20.0 | 1.4400 | -2.0 | 754. | 190.0 | 0.0 | 290 |
| BUTYLVINYL ETHER | 100.16 | 0.7727 | 25.0 | 1.3997 | -92.0 | 0. | 93.8 | 0.0 | 291 |
| CYCLOHEXANOL | 100.16 | 0.9684 | 25.0 | 1.4648 | 25.1 | 0. | 161.1 | 15.00 | 292 |
| 2-HEXANONE | 100.16 | 0.8116 | 0.0 | 1.4015 | -57.0 | 0. | 126.0 | 0.0 | 293 |
| METHYL-T-BUTYL KETONE | 100.16 | 0.8016 | 0.0 | 1.3952 | -52.5 | 0. | 106.0 | 0.0 | 294 |
| 3-ME-2-PENTANONE | 100.16 | 0.8181 | 14.0 | 1.4002 | 0.0 | 0. | 118.0 | 0.0 | 295 |
| 4-METHYL-2-PENTANONE | 100.16 | 0.8008 | 20.0 | 1.3957 | -84.0 | 0. | 116.5 | 13.11 | 296 |
| HEPTANE | 100.19 | 0.6836 | 20.0 | 1.3876 | -90.6 | 0. | 98.4 | 0.0 | 297 |
| HEPTANE | 100.19 | 0.6795 | 25.0 | 1.3851 | -90.6 | 0. | 98.4 | 0.0 | 298 |
| 2-METHYL HEXANE | 100.19 | 0.6744 | 25.0 | 1.3868 | -118.3 | 0. | 90.1 | 0.0 | 299 |
| 3-METHYL HEXANE | 100.19 | 0.6829 | 25.0 | 1.3886 | -119.4 | 0. | 91.9 | 0.0 | 300 |
| 2,3-DIMETHYL PENTANE | 100.21 | 0.6909 | 25.0 | 1.3920 | 0.0 | 0. | 89.8 | 0.0 | 301 |
| 2,4-DIMETHYL PENTANE | 100.21 | 0.6683 | 25.0 | 1.3814 | -119.2 | 0. | 80.5 | 0.0 | 302 |
| 3,3-DIMETHYL PENTANE | 100.21 | 0.6933 | 0.0 | 1.3909 | -135.0 | 0. | 86.1 | 0.0 | 303 |
| 2,2,3-TRIMETHYLBUTANE | 100.21 | 0.6901 | 20.0 | 1.3894 | -25.0 | 0. | 80.9 | 0.0 | 304 |
| N-METHYLMORPHOLINE | 101.15 | 0.9051 | 20.0 | 1.4332 | 0.0 | 750. | 115.0 | 0.0 | 305 |
| DIISOPROPYLAMINE | 101.19 | 0.7153 | 20.0 | 1.3924 | -96.3 | 0. | 83.9 | 0.0 | 306 |
| DIPROPYLAMINE | 101.19 | 0.7375 | 20.0 | 1.4043 | -63.0 | 0. | 109.2 | 3.07 | 307 |
| TRIETHYLAMINE | 101.19 | 0.7230 | 25.0 | 1.3980 | -114.7 | 0. | 89.5 | 2.42 | 308 |
| ACETIC ANHYDRIDE | 102.09 | 1.0871 | 15.0 | 1.3930 | -71.1 | 0. | 140.0 | 20.70 | 309 |
| 4-METHYL DIOXOLANE | 102.09 | 1.2069 | 20.0 | 1.4189 | -46.8 | 760. | 242.0 | 0.0 | 310 |
| BUTYL FORMATE | 102.13 | 0.8917 | 20.0 | 1.3890 | -90.0 | 0. | 106.6 | 2.43 | 311 |
| ETHYL PROPIONATE | 102.13 | 0.8957 | 15.0 | 1.3864 | -73.9 | 0. | 99.1 | 5.65 | 312 |
| ETHYL PROPIONATE | 102.13 | 0.8899 | 20.0 | 1.3839 | -73.9 | 0. | 99.1 | 5.65 | 313 |
| ISOBUTYL FORMATE | 102.13 | 0.8853 | 20.0 | 1.3855 | -94.5 | 0. | 98.4 | 6.41 | 314 |
| ISOPROPYL ACETATE | 102.13 | 0.8717 | 20.0 | 1.3773 | -73.4 | 0. | 88.2 | 0.0 | 315 |
| ISOVALERIC ACID | 102.13 | 0.9308 | 15.0 | 1.4064 | -29.3 | 0. | 176.5 | 2.64 | 316 |
| METHYL-N-BUTYRATE | 102.13 | 0.8984 | 20.0 | 1.3870 | -95.0 | 0. | 102.6 | 5.60 | 317 |
| 4-ME-1,3-DIOXANE | 102.13 | 0.9953 | 20.0 | 1.4168 | 0.0 | 0. | 114.0 | 0.0 | 318 |
| PROPYL ACETATE | 102.13 | 0.8938 | 15.0 | 1.3866 | -92.5 | 0. | 101.5 | 6.00 | 319 |
| TETRA H FURFURYL ALC | 102.13 | 1.0420 | 25.0 | 1.4599 | 0.0 | 0. | 178.0 | 13.61 | 320 |
| VALERIC ACID | 102.13 | 0.9345 | 35.0 | 1.4060 | 33.7 | 0. | 185.5 | 2.66 | 321 |
| BUTYL ETHYL ETHER | 102.18 | 0.7448 | 25.0 | 1.3793 | -103.0 | 0. | 92.2 | 0.0 | 322 |
| 2-ETHYL-1-BUTANOL | 102.18 | 0.8295 | 25.0 | 1.4205 | -114.4 | 0. | 146.5 | 6.09 | 323 |
| 1-HEXANOL | 102.18 | 0.8159 | 25.0 | 1.4161 | -44.6 | 0. | 157.0 | 13.30 | 324 |
| ISOPROPYL ETHER | 102.18 | 0.7182 | 25.0 | 1.3655 | -85.5 | 0. | 68.3 | 3.84 | 325 |
| 2-METHYL-2-PENTANOL | 102.18 | 0.8350 | 16.0 | 1.4125 | 108.0 | 0. | 121.5 | 0.0 | 326 |
| 3-METHYL-2-PENTANOL | 102.18 | 0.8235 | 25.0 | 1.4179 | 0.0 | 0. | 134.3 | 0.0 | 327 |
| 4-METHYL-2-PENTANOL | 102.18 | 0.8075 | 20.0 | 1.4100 | -90.0 | 760. | 133.5 | 0.0 | 328 |
| 3-METHYL-3-PENTANOL | 102.18 | 0.8237 | 20.0 | 1.4180 | -38.0 | 0. | 121.0 | 0.0 | 329 |
| PROPYL ETHER | 102.18 | 0.7419 | 25.0 | 1.3780 | -123.2 | 0. | 89.6 | 3.39 | 330 |
| BENZONITRILE | 103.12 | 1.0006 | 25.0 | 1.5259 | -12.8 | 0. | 191.1 | 25.20 | 331 |
| METHYL OXETHANE | 103.12 | 1.0350 | 15.0 | 1.4200 | 0.0 | 760. | 170.0 | 0.0 | 332 |
| 1-NITROBUTANE | 103.12 | 0.9880 | 0.0 | 1.4103 | 0.0 | 0. | 153.0 | 0.0 | 333 |
| DIETHYLENETRIAMINE | 103.17 | 0.9586 | 20.0 | 1.4810 | -39.0 | 760. | 207.0 | 0.0 | 334 |
| METHYL LACTATE | 104.12 | 1.0857 | 26.0 | 1.4131 | -66.0 | 760. | 144.8 | 0.0 | 335 |
| STYRENE | 104.14 | 0.9012 | 25.0 | 1.5440 | -30.6 | 0. | 145.2 | 2.43 | 336 |
| DIETHOXYMETHANE | 104.15 | 0.8319 | 20.0 | 1.3748 | -665.0 | 0. | 88.0 | 0.0 | 337 |
| N-PROPYL NITRATE | 105.09 | 1.0580 | 0.0 | 1.3976 | 0.0 | 0. | 110.5 | 0.0 | 338 |
| DIETHANOLAMINE | 105.14 | 1.0899 | 30.0 | 1.4747 | 28.0 | 0. | 268.4 | 2.81 | 339 |
| BENZALDEHYDE | 106.12 | 1.0447 | 20.0 | 1.5455 | -26.0 | 0. | 178.9 | 17.80 | 340 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|--------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| DIETHYLENE GLYCOL | 106.12 | 1.1164 | 20.0 | 1.4475 | -10.5 | 0. | 244.8 | 31.69 | 341 |
| METHOXYMETHOXYETHANOL | 106.12 | 1.0385 | 25.0 | 1.4100 | -70.0 | 0. | 167.5 | 0.0 | 342 |
| ETHYL BENZENE | 106.17 | 0.8626 | 25.0 | 1.4932 | -94.9 | 0. | 136.2 | 2.40 | 343 |
| O-XYLENE | 106.17 | 0.8759 | 25.0 | 1.5029 | -25.2 | 0. | 144.4 | 2.57 | 344 |
| M-XYLENE | 106.17 | 0.8599 | 25.0 | 1.4946 | -47.8 | 0. | 139.1 | 2.37 | 345 |
| P-XYLENE | 106.17 | 0.8611 | 20.0 | 1.4958 | 13.3 | 0. | 138.3 | 2.27 | 346 |
| P-XYLENE | 106.17 | 0.8567 | 25.0 | 1.4933 | 13.3 | 0. | 139.3 | 2.27 | 347 |
| BENZYLAMINE | 107.15 | 0.9813 | 20.0 | 1.5402 | 10.0 | 770. | 185.0 | 0.0 | 348 |
| 2,4-DIMETHYL PYRIDINE | 107.15 | 0.9271 | 25.0 | 1.4984 | 0.0 | 0. | 159.2 | 0.0 | 349 |
| 2,5-DIME PYRIDINE | 107.15 | 0.9261 | 25.0 | 1.4982 | -15.0 | 0. | 156.8 | 0.0 | 350 |
| 2,6-DIME PYRIDINE | 107.15 | 0.9200 | 25.0 | 1.4953 | -5.0 | 0. | 143.0 | 0.0 | 351 |
| 3,5-DIME PYRIDINE | 107.15 | 0.9385 | 25.0 | 1.5032 | 0.0 | 0. | 171.6 | 0.0 | 352 |
| 3,4-DIME PYRIDINE | 107.15 | 0.9537 | 25.0 | 1.5099 | -12.0 | 759. | 178.8 | 0.0 | 353 |
| METHYL ANILINE | 107.15 | 0.9891 | 0.0 | 1.5702 | -57.0 | 0. | 196.3 | 5.97 | 354 |
| O-TOLUIDINE | 107.16 | 0.9984 | 20.0 | 1.5725 | -16.1 | 0. | 200.4 | 6.34 | 355 |
| M-TOLUIDINE | 107.16 | 0.9930 | 15.0 | 1.5704 | -30.4 | 0. | 203.4 | 5.95 | 356 |
| P-TOLUIDINE | 107.16 | 0.9659 | 45.0 | 1.5540 | 43.8 | 0. | 200.6 | 4.98 | 357 |
| ADIPONITRILE | 108.14 | 0.9510 | 19.0 | 1.4597 | 2.0 | 0. | 180.0 | 0.0 | 358 |
| ANISOLE | 108.14 | 0.9893 | 25.0 | 1.5143 | -37.5 | 0. | 153.8 | 4.33 | 359 |
| BENZYL ALCOHOL | 108.14 | 1.0454 | 20.0 | 1.5403 | -15.3 | 0. | 205.4 | 13.10 | 360 |
| BENZYL ALCOHOL | 108.14 | 1.0413 | 25.0 | 1.5384 | -15.3 | 0. | 205.4 | 13.10 | 361 |
| O-CRESOL | 108.14 | 1.1350 | 25.0 | 1.5442 | 30.9 | 0. | 191.0 | 11.50 | 362 |
| M-CRESOL | 108.14 | 1.0302 | 25.0 | 1.5396 | 12.2 | 0. | 202.2 | 11.80 | 363 |
| P-CRESOL | 108.14 | 1.0178 | 41.0 | 1.5311 | 34.7 | 0. | 201.9 | 9.91 | 364 |
| 1,3-PROPANEDITHIOL | 108.23 | 1.0783 | 20.0 | 1.5403 | -79.0 | 0. | 172.9 | 0.0 | 365 |
| ETHYL CHLOROFORMATE | 108.53 | 1.3577 | 20.0 | 1.3955 | -80.6 | 760. | 95.0 | 0.0 | 366 |
| METHYL CHLOROACETATE | 108.53 | 1.2337 | 20.0 | 1.4218 | -32.1 | 760. | 129.8 | 0.0 | 367 |
| BROMETHANE | 108.97 | 1.4708 | 15.0 | 1.4276 | -118.6 | 0. | 38.4 | 9.39 | 368 |
| O-FLUOROTOLUENE | 110.13 | 1.0027 | 15.0 | 1.4716 | -62.0 | 0. | 114.4 | 4.22 | 369 |
| M-FLUOROTOLUENE | 110.13 | 0.9974 | 20.0 | 1.4691 | -87.7 | 760. | 116.5 | 0.0 | 370 |
| P-FLUOROTOLUENE | 110.13 | 0.9975 | 20.0 | 1.4688 | -56.8 | 760. | 116.6 | 5.86 | 371 |
| BENZENETHIOL | 110.18 | 1.0727 | 25.0 | 1.5872 | -14.9 | 0. | 169.1 | 4.38 | 372 |
| THIO-PHENOL | 110.18 | 1.0728 | 25.0 | 1.5879 | 70.5 | 0. | 169.5 | 0.0 | 373 |
| 2,3-DICHLOROPROPENE | 110.98 | 1.2040 | 25.0 | 1.4600 | 0.0 | 0. | 94.0 | 0.0 | 374 |
| ACETAZINE | 112.17 | 0.8422 | 20.0 | 1.4535 | -125.0 | 0. | 133.0 | 0.0 | 375 |
| Z-METHYLCYCLOHEXANONE | 112.17 | 0.9240 | 20.0 | 1.4493 | 0.0 | 757. | 165.0 | 0.0 | 376 |
| THIOAENE | 112.19 | 0.9956 | 0.0 | 1.5130 | 0.0 | 0. | 137.8 | 0.0 | 377 |
| P-DIMETHYLCYCLOHEXANE | 112.21 | 0.7827 | 0.0 | 1.4253 | -87.0 | 0. | 124.6 | 0.0 | 378 |
| ETHYL CYCLOHEXANE | 112.21 | 0.7839 | 25.0 | 1.4330 | -111.3 | 0. | 131.8 | 0.0 | 379 |
| OCTENE-1 | 112.21 | 0.7149 | 20.0 | 1.4087 | -101.7 | 0. | 121.3 | 0.0 | 380 |
| DI-ISO-BUTYLENE | 112.22 | 0.7122 | 25.0 | 1.4090 | 0.0 | 0. | 101.0 | 0.0 | 381 |
| CHLOROENZENE | 112.56 | 1.1117 | 15.0 | 1.5275 | -45.6 | 0. | 131.7 | 5.62 | 382 |
| 1,2-DICHLOROPROPANE | 112.99 | 1.1560 | 20.0 | 1.4394 | -100.4 | 760. | 96.4 | 0.0 | 383 |
| 1,3-DICHLOROPROPANE | 112.99 | 1.1878 | 20.0 | 1.4487 | -99.5 | 760. | 120.4 | 0.0 | 384 |
| 2,2-DICHLOROPROPANE | 112.99 | 1.1120 | 20.0 | 1.4148 | -33.8 | 760. | 69.3 | 0.0 | 385 |
| 1,1-DICHLOROPROPANE | 112.99 | 1.1321 | 20.0 | 1.4289 | 0.0 | 760. | 88.1 | 0.0 | 386 |
| ETHYL CYANOACETATE | 113.12 | 1.0614 | 20.0 | 1.4155 | -22.5 | 0. | 206.0 | 26.70 | 387 |
| CHLOROACETYL CHLORIDE | 113.94 | 1.4202 | 20.0 | 1.4541 | 0.0 | 760. | 107.0 | 0.0 | 388 |
| TRIFLUOROACETIC ACID | 114.02 | 1.4890 | 20.0 | 1.2850 | -15.3 | 0. | 71.8 | 8.55 | 389 |
| ALLYL PROPIONATE | 114.14 | 0.9037 | 25.0 | 1.4110 | 0.0 | 0. | 124.0 | 0.0 | 390 |
| 2,5-HEXANEDIONE | 114.14 | 0.7370 | 0.0 | 1.4232 | -5.5 | 754. | 194.0 | 0.0 | 391 |
| 2,4-DIME-3-PENTANONE | 114.18 | 0.8062 | 20.0 | 1.4001 | 0.0 | 0. | 124.0 | 0.0 | 392 |
| 2-HEPTANONE | 114.18 | 0.8111 | 20.0 | 1.4116 | -35.0 | 0. | 151.0 | 0.0 | 393 |
| 3-HEPTANONE | 114.18 | 0.8183 | 20.0 | 0.0 | 39.0 | 0. | 50.0 | 0.0 | 394 |
| 4-HEPTANONE | 114.18 | 0.8174 | 20.0 | 1.4073 | -33.0 | 0. | 144.0 | 0.0 | 395 |
| CYCLOHEXYLMETHYL ETHER | 114.19 | 0.8790 | 20.0 | 1.4355 | -74.4 | 760. | 133.0 | 0.0 | 396 |
| 1-METHYLCYCLOHEXANOL | 114.19 | 0.9251 | 24.6 | 1.4587 | 26.0 | 0. | 157.0 | 0.0 | 397 |
| 2-METHYLCYCLOHEXANOL | 114.19 | 0.9254 | 20.0 | 1.4610 | 0.0 | 0. | 167.6 | 13.30 | 398 |
| CIS-2-ME CYCLOHEXANOL | 114.19 | 0.9360 | 20.0 | 1.4640 | 7.0 | 0. | 165.0 | 0.0 | 399 |
| TRANS-2-ME CYCLOHEXANOL | 114.19 | 0.9247 | 20.0 | 1.4616 | -4.0 | 0. | 166.5 | 0.0 | 400 |
| 3-METHYLCYCLOHEXANOL | 114.19 | 0.9168 | 20.0 | 1.4576 | 0.0 | 0. | 172.0 | 12.30 | 401 |
| CIS-3-ME CYCLOHEXANOL | 114.19 | 0.9155 | 20.0 | 1.4572 | -5.5 | 0. | 168.0 | 16.47 | 402 |
| TRANS-3-ME CYCLOHEXANOL | 114.19 | 0.9214 | 20.0 | 1.4580 | -0.5 | 0. | 84.0 | 8.05 | 403 |
| 4-METHYLCYCLOHEXANOL | 114.19 | 0.9122 | 20.0 | 1.4565 | 0.0 | 763. | 172.0 | 13.30 | 404 |
| 5-METHYL-3-HEXANONE | 114.19 | 0.8150 | 17.0 | 1.3970 | 0.0 | 735. | 134.0 | 0.0 | 405 |
| ISO OCTANE | 114.22 | 0.6918 | 0.0 | 1.3915 | -107.4 | 0. | 89.2 | 0.0 | 406 |
| OCTANE | 114.22 | 0.7025 | 20.0 | 1.3974 | -56.8 | 0. | 125.6 | 1.95 | 407 |
| OCTANE | 114.22 | 0.6985 | 25.0 | 1.3951 | -56.8 | 0. | 125.6 | 1.95 | 408 |
| 2,2,4-TRIME PENTANE | 114.22 | 0.7078 | 0.0 | 1.3914 | -107.4 | 0. | 98.2 | 1.94 | 409 |
| 2,2,3-TRIME PENTANE | 114.22 | 0.7121 | 25.0 | 1.4006 | -112.3 | 0. | 109.9 | 1.96 | 410 |
| ACETONYLUREA | 116.12 | 0.8018 | 4.0 | 0.0 | -41.0 | 0. | 82.0 | 0.0 | 411 |
| METHYLACETOACETATE | 116.12 | 1.0747 | 20.0 | 1.4186 | -80.0 | 0. | 171.7 | 0.0 | 412 |
| 1-UREIDO-2-PROPANONE | 116.12 | 0.8018 | 4.0 | 0.0 | -41.0 | 0. | 82.0 | 0.0 | 413 |
| BETA-ACETOPROPIONIC ACID | 116.13 | 1.1335 | 20.0 | 1.4396 | 37.2 | 0. | 245.8 | 0.0 | 414 |
| INDENE | 116.15 | 0.9915 | 0.0 | 1.5642 | -2.0 | 0. | 182.2 | 0.0 | 415 |
| 4-ME-2-PENTANONE-4-OL | 116.15 | 0.9385 | 0.0 | 1.4235 | -44.0 | 0. | 166.0 | 0.0 | 416 |
| AMYL FORMATE | 116.16 | 0.8926 | 15.0 | 1.3992 | -73.5 | 0. | 132.1 | 0.0 | 417 |
| BUTYL ACETATE | 116.16 | 0.8713 | 30.0 | 1.3827 | -73.5 | 0. | 126.1 | 5.01 | 418 |
| SEC BUTYL ACETATE | 116.16 | 0.8720 | 20.0 | 1.3894 | 0.0 | 0. | 112.3 | 0.0 | 419 |
| CAPROIC ACID | 116.16 | 0.9230 | 25.0 | 1.4148 | -3.9 | 0. | 205.7 | 2.63 | 420 |
| DIACETONE ALCOHOL | 116.16 | 0.9342 | 25.0 | 1.4213 | -44.0 | 12. | 168.1 | 18.20 | 421 |
| ETHYL BUTYRATE | 116.16 | 0.8791 | 20.0 | 1.3928 | -98.0 | 0. | 121.6 | 5.10 | 422 |
| ETHYL ISOBUTYRATE | 116.16 | 0.8693 | 20.0 | 1.3903 | -88.2 | 0. | 111.0 | 0.0 | 423 |
| ISOAMYL FORMATE | 116.16 | 0.8820 | 20.0 | 1.3476 | 0.0 | 0. | 124.2 | 0.0 | 424 |
| ISOBUTYL ACETATE | 116.16 | 0.8695 | 25.0 | 1.3880 | -98.8 | 0. | 118.0 | 5.29 | 425 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|---------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| N-PROPYL PROPIONATE | 116.16 | 0.8330 | 0.0 | 1.6015 | -76.0 | 0. | 122.5 | 0.0 | 426 |
| 1122TETRAME UREA | 116.16 | 0.9654 | 25.0 | 1.4493 | -1.2 | 0. | 175.2 | 23.06 | 427 |
| 2-HEPTANOL | 116.21 | 0.8171 | 20.0 | 1.4210 | 0.0 | 0. | 159.7 | 9.21 | 428 |
| PHENYLACETONITRILE | 117.14 | 1.0155 | 0.0 | 1.5233 | -23.8 | 0. | 233.5 | 0.0 | 429 |
| TOLUIC NITRILE | 117.15 | 1.0125 | 25.0 | 1.5209 | -23.8 | 0. | 233.5 | 18.70 | 430 |
| 1-AMINO-2-ME-2-PEYANOL | 117.19 | 0.9081 | 20.0 | 1.4510 | 0.0 | 15. | 83.0 | 0.0 | 431 |
| 2-BUTYLAMINO ETHANOL | 117.19 | 0.8907 | 20.0 | 1.4437 | -3.5 | 760. | 199.5 | 0.0 | 432 |
| DIMETHYL OXALATE | 118.09 | 1.1716 | 60.0 | 1.3790 | 5.4 | 760. | 164.5 | 0.0 | 433 |
| GLYCOL DIFORMATE | 118.09 | 1.1930 | 1.0 | 1.3580 | -10.0 | 0. | 174.0 | 0.0 | 434 |
| ACETAL | 118.12 | 0.8213 | 25.0 | 1.3682 | 0.0 | 0. | 103.6 | 3.80 | 435 |
| DIETHYL CARBONATE | 118.13 | 0.9693 | 25.0 | 1.3829 | -43.0 | 0. | 126.8 | 2.82 | 436 |
| ETHYL LACTATE | 118.13 | 1.0328 | 20.0 | 1.4124 | -26.0 | 0. | 154.5 | 13.10 | 437 |
| ETHYL LACTATE | 118.13 | 1.0272 | 25.0 | 1.4127 | -26.0 | 36. | 69.5 | 13.10 | 438 |
| 2-MEYOXYETHYLACETATE | 118.13 | 1.0049 | 20.0 | 1.4022 | -65.1 | 0. | 144.5 | 8.25 | 439 |
| DIETHOXYETHANE | 118.17 | 0.8341 | 0.0 | 1.3819 | 0.0 | 0. | 102.2 | 0.0 | 440 |
| ALPHA-METHYL STYRENE | 118.17 | 0.9140 | 0.0 | 0.0 | -20.0 | 765. | 165.0 | 0.0 | 441 |
| 2-BUTOXYETHANOL | 118.18 | 0.9008 | 20.0 | 1.4198 | 0.0 | 760. | 170.2 | 9.30 | 442 |
| 2-METHYL-2,4-PENTANEDIOL | 118.18 | 0.9254 | 17.0 | 1.4250 | -40.0 | 760. | 197.0 | 0.0 | 443 |
| CHLOROCYCLOHEXANE | 118.61 | 1.0000 | 20.0 | 1.4626 | -43.9 | 0. | 143.0 | 0.0 | 444 |
| PHENYL CARBONIMIDE | 119.12 | 1.0960 | 0.0 | 1.5350 | 0.0 | 0. | 165.0 | 0.0 | 445 |
| TRIAZOBENZENE | 119.13 | 1.0880 | 20.0 | 1.5589 | -27.0 | 11. | 70.0 | 0.0 | 446 |
| CHLOROFORM | 119.38 | 1.4799 | 25.0 | 1.4429 | -63.5 | 0. | 61.1 | 4.81 | 447 |
| ACETOPHENONE | 120.15 | 1.0281 | 20.0 | 1.5342 | 19.6 | 0. | 202.0 | 17.39 | 448 |
| GLYCEROL DIMETHYL ETHER | 120.15 | 1.0095 | 0.0 | 1.4192 | 0.0 | 0. | 169.0 | 0.0 | 449 |
| 2-(2-MEOTO)ETHANOL 328 | 120.15 | 1.0167 | 25.0 | 1.4245 | -70.0 | 0. | 194.1 | 0.0 | 450 |
| PHENYL ETHYLENE OXIDE | 120.15 | 1.0469 | 25.0 | 1.5350 | -35.6 | 0. | 191.5 | 0.0 | 451 |
| STYRENE OXIDE | 120.15 | 1.0469 | 25.0 | 1.5350 | -35.6 | 0. | 191.5 | 0.0 | 452 |
| SULFOLANE | 120.17 | 1.2614 | 30.0 | 1.4820 | 28.5 | 0. | 287.3 | 43.30 | 453 |
| CUMENE | 120.19 | 0.8618 | 20.0 | 1.4915 | -96.0 | 0. | 152.4 | 2.38 | 454 |
| 0-ETHYLTOLUENE | 120.19 | 0.8870 | 0.0 | 1.5042 | -17.0 | 0. | 164.9 | 0.0 | 455 |
| ISOPROPYLBENZENE | 120.19 | 0.8575 | 25.0 | 1.4889 | -96.0 | 0. | 152.4 | 2.38 | 456 |
| 1-PHENYL PROPANE | 120.19 | 0.8620 | 0.0 | 1.4920 | -99.5 | 0. | 159.2 | 0.0 | 457 |
| 1,2,3-TRIME BENZENE | 120.19 | 0.8944 | 0.0 | 1.5139 | -25.5 | 0. | 176.0 | 0.0 | 458 |
| 1,2,4-TRIME BENZENE | 120.19 | 0.8890 | 0.0 | 1.5030 | -60.5 | 0. | 169.3 | 0.0 | 459 |
| 1,2,5-TRIME BENZENE | 120.19 | 0.8642 | 0.0 | 1.4998 | -52.7 | 0. | 164.7 | 0.0 | 460 |
| PROPYLBENZENE | 120.20 | 0.8620 | 0.0 | 1.4900 | -99.5 | 0. | 159.2 | 0.0 | 461 |
| 1,3,5-TRIMETHYLBENZENE | 120.20 | 0.8642 | 20.0 | 1.4998 | -52.7 | 0. | 164.7 | 2.27 | 462 |
| 1-CHLOROHXANE | 120.62 | 0.8784 | 0.0 | 1.4240 | -83.0 | 0. | 132.0 | 0.0 | 463 |
| 2-CL-HEXANE | 120.62 | 0.8694 | 21.0 | 1.4142 | 0.0 | 0. | 0.0 | 0.0 | 464 |
| 3-CL-HEXANE | 120.62 | 0.8700 | 20.0 | 1.4163 | 0.0 | 0. | 0.0 | 0.0 | 465 |
| 1-BROMO-1-PROPENE | 120.99 | 1.4133 | 20.0 | 1.4519 | -116.6 | 0. | 59.5 | 0.0 | 466 |
| 0-ETHYL ANILINE | 121.18 | 0.9830 | 22.0 | 1.5584 | -5.0 | 0. | 209.3 | 0.0 | 467 |
| 0-METHYL TOLUIDINE | 121.18 | 0.9769 | 20.0 | 1.5649 | 0.0 | 0. | 206.0 | 0.0 | 468 |
| 2,4,6-TRIMETHYL PYRIDINE | 121.18 | 0.9166 | 22.0 | 1.4959 | 0.0 | 754. | 172.0 | 0.0 | 469 |
| SALICYLALDEHYDE | 122.13 | 1.1525 | 25.0 | 1.5702 | -7.0 | 0. | 196.7 | 13.90 | 470 |
| 0-METHYLANISOLE | 122.16 | 0.9850 | 15.0 | 1.5199 | 0.0 | 0. | 170.3 | 0.0 | 471 |
| PHENETOLL | 122.17 | 0.9605 | 25.0 | 1.5049 | -29.5 | 0. | 170.6 | 4.22 | 472 |
| DIETHANOL SULFIDE | 122.19 | 1.1793 | 25.0 | 1.5146 | -10.0 | 0. | 282.0 | 0.0 | 473 |
| 2-CHLOROETHYLACETATE | 122.55 | 1.1783 | 6.0 | 1.4215 | -20.0 | 0. | 145.0 | 0.0 | 474 |
| ETHYL CHLOROACETATE | 122.55 | 1.1144 | 20.0 | 1.4215 | -26.0 | 740. | 144.0 | 0.0 | 475 |
| 1-CHLORO-3-PENTANOL | 122.60 | 1.0327 | 25.0 | 1.4660 | 0.0 | 0. | 173.0 | 0.0 | 476 |
| ACETYL BROMIDE | 122.96 | 1.6630 | 0.0 | 1.4538 | -96.5 | 0. | 76.7 | 0.0 | 477 |
| 1-BROMOPROPANE | 123.00 | 1.3452 | 25.0 | 1.4317 | -109.8 | 0. | 71.0 | 8.09 | 478 |
| 2-BROMOPROPANE | 123.00 | 1.3060 | 25.0 | 1.4221 | -89.0 | 0. | 59.4 | 9.46 | 479 |
| NITROBENZENE | 123.11 | 1.2082 | 15.0 | 1.5546 | 5.7 | 0. | 210.8 | 34.82 | 480 |
| DIETHYL ZINC | 123.50 | 1.1820 | 18.0 | 1.4954 | -28.0 | 0. | 118.0 | 0.0 | 481 |
| M-THIOCRSOL | 124.21 | 1.0526 | 12.0 | 1.5752 | -20.0 | 0. | 195.4 | 0.0 | 482 |
| BETA-CEETHYLCELLSOLVE | 124.57 | 0.0 | 19.0 | 1.4505 | 0.0 | 760. | 182.0 | 0.0 | 483 |
| 3-CL-2-CLME-PROPENE | 125.00 | 1.1782 | 20.0 | 1.4754 | -14.0 | 0. | 138.3 | 0.0 | 484 |
| CAPRYLONITRILE | 125.21 | 0.8097 | 25.0 | 1.4182 | -45.6 | 0. | 205.2 | 13.90 | 485 |
| DIMETHYL SULFATE | 126.13 | 1.3283 | 20.0 | 1.3874 | -31.8 | 760. | 188.5 | 0.0 | 486 |
| 2,5-DIME-CYCLOHEXANONE | 126.19 | 0.9025 | 20.0 | 1.4446 | 0.0 | 0. | 178.0 | 0.0 | 487 |
| 2-NONENE (TRANS) | 126.23 | 0.7540 | 0.0 | 1.4191 | 0.0 | 0. | 148.5 | 0.0 | 488 |
| 1-NONENE | 126.24 | 0.7253 | 25.0 | 1.4133 | -81.4 | 0. | 146.9 | 0.0 | 489 |
| BENZYL CHLORIDE | 126.58 | 1.1000 | 0.0 | 1.5391 | -39.0 | 0. | 179.4 | 23.00 | 490 |
| M-CHLOROTOLUENE | 126.58 | 1.0722 | 0.0 | 1.5214 | -47.8 | 0. | 162.0 | 5.55 | 491 |
| P-CHLOROTOLUENE | 126.58 | 1.0697 | 0.0 | 1.5199 | 7.5 | 0. | 162.0 | 6.08 | 492 |
| 1,2-DICL ISOBUTANE | 127.01 | 1.0930 | 20.0 | 1.4370 | -130.0 | 0. | 108.0 | 0.0 | 493 |
| 1,1-DICHLOROBUTANE | 127.02 | 1.0863 | 0.0 | 1.4355 | 0.0 | 763. | 114.5 | 0.0 | 494 |
| 1,2-DICHLOROBUTANE | 127.02 | 1.1116 | 25.0 | 1.4474 | 0.0 | 0. | 124.0 | 0.0 | 495 |
| 1,4-DICHLOROBUTANE | 127.02 | 1.7598 | 12.0 | 1.4566 | -38.7 | 0. | 162.0 | 0.0 | 496 |
| 2,3-DICHLOROBUTANE | 127.03 | 1.1134 | 20.0 | 1.4420 | -80.0 | 760. | 116.0 | 0.0 | 497 |
| 1,1-DICH-2-ME PROPANE | 127.03 | 1.0111 | 20.0 | 1.4330 | 0.0 | 760. | 105.5 | 0.0 | 498 |
| 1,2-DICH-2-ME PROPANE | 127.03 | 1.0930 | 20.0 | 1.4370 | -130.0 | 760. | 108.0 | 0.0 | 499 |
| 1,3-DICH-2-ME PROPANE | 127.03 | 1.1325 | 25.0 | 1.4488 | 0.0 | 760. | 134.6 | 0.0 | 500 |
| 1-ACETYLPIPERIDINE | 127.18 | 1.0112 | 9.0 | 0.0 | 108.0 | 0. | 226.5 | 0.0 | 501 |
| 0-CHLOROANILINE | 127.57 | 1.2125 | 20.0 | 1.5881 | -1.9 | 0. | 208.8 | 13.40 | 502 |
| 3-ME-HEPTANONE-2 | 128.21 | 0.8318 | 20.0 | 1.4172 | 0.0 | 0. | 167.0 | 0.0 | 503 |
| 2-ETHYLCYCLOHEXANOL (CIS) | 128.22 | 0.9274 | 21.0 | 1.4655 | 0.0 | 12. | 74.0 | 0.0 | 504 |
| OCTANONE-2 | 128.22 | 0.8185 | 0.0 | 1.4161 | -20.9 | 0. | 173.0 | 0.0 | 505 |
| OCTANONE-3 | 128.22 | 0.8220 | 20.0 | 1.4156 | 0.0 | 738. | 169.0 | 0.0 | 506 |
| ISO-NONANE | 128.25 | 0.7134 | 0.0 | 1.4032 | -80.5 | 0. | 142.8 | 0.0 | 507 |
| 4-METHYL OCTANE | 128.25 | 0.7199 | 0.0 | 1.4061 | -119.1 | 0. | 142.4 | 0.0 | 508 |
| NONANE | 128.25 | 0.7138 | 25.0 | 1.4054 | -53.5 | 0. | 150.8 | 1.97 | 509 |
| 2,2,5-TRIME HEXANE | 128.25 | 0.7032 | 25.0 | 1.3997 | -105.8 | 0. | 124.1 | 0.0 | 510 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|----------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| DICHLOROACETIC ACID | 128.94 | 1.5634 | 20.0 | 1.4658 | 10.8 | 0. | 192.5 | 8.20 | 511 |
| 1,3-DICL-2-PROPANOL | 128.99 | 1.3506 | 17.0 | 1.4837 | 0.0 | 760. | 176.0 | 0.0 | 512 |
| N-ACETYL MORPHOLINE | 129.16 | 1.1165 | 20.0 | 1.4383 | 14.0 | 50. | 152.0 | 0.0 | 513 |
| CINNAMONITRILE | 129.16 | 1.0283 | 20.0 | 1.6043 | 22.0 | 0. | 263.8 | 0.0 | 514 |
| QUINOLINE | 129.16 | 1.0977 | 25.0 | 1.6293 | -14.9 | 760. | 237.1 | 9.00 | 515 |
| DIBUTYLAMINE | 129.25 | 0.7619 | 20.0 | 1.4177 | -62.0 | 0. | 159.6 | 2.98 | 516 |
| ETHYLACETOACETATE | 130.15 | 1.0222 | 20.0 | 1.4192 | -40.0 | 0. | 180.8 | 15.70 | 517 |
| PROPIONIC ANHYDRIDE | 130.15 | 1.0110 | 20.0 | 1.4045 | -43.0 | 0. | 169.0 | 18.30 | 518 |
| N-BUTYL PROPIONATE | 130.18 | 0.8818 | 0.0 | 1.3982 | -89.5 | 0. | 145.5 | 0.0 | 519 |
| HEPTANOIC ACID | 130.18 | 0.9185 | 0.0 | 1.4216 | -10.0 | 0. | 223.0 | 0.0 | 520 |
| ISOBUTYLPROPIONATE | 130.18 | 0.8876 | 20.0 | 1.3975 | -71.4 | 0. | 136.8 | 0.0 | 521 |
| 4(2-AMINOETH)MORPHOLINE | 130.19 | 0.9915 | 20.0 | 1.4715 | 25.6 | 50. | 116.0 | 0.0 | 522 |
| AMYL ACETATE | 130.19 | 0.8753 | 20.0 | 1.4028 | -100.0 | 0. | 149.2 | 4.75 | 523 |
| ETHYL ISOVALERATE | 130.19 | 0.8652 | 20.0 | 1.3962 | -99.3 | 0. | 134.7 | 4.71 | 524 |
| 2-OCETANOL | 130.22 | 0.8193 | 0.0 | 1.4203 | -38.5 | 0. | 180.0 | 0.0 | 525 |
| 2,2,4-TRI ME PENTANOL-4 | 130.22 | 0.8270 | 0.0 | 1.4293 | -16.7 | 0. | 194.5 | 0.0 | 526 |
| BUTYL ETHER | 130.23 | 0.7641 | 25.0 | 1.3968 | -95.2 | 0. | 142.2 | 0.0 | 527 |
| 2-ET-1-HEXANOL | 130.23 | 0.8291 | 25.0 | 1.4292 | -76.0 | 0. | 184.4 | 4.41 | 528 |
| 2-ME-HEPTANOL-2 | 130.23 | 0.8142 | 20.0 | 1.4279 | 0.0 | 0. | 156.0 | 0.0 | 529 |
| 3-ME-HEPTANOL-3 | 130.23 | 0.8282 | 20.0 | 1.4238 | -84.0 | 0. | 163.0 | 0.0 | 530 |
| 1-OCIANOL | 130.23 | 0.8221 | 25.0 | 1.4275 | -15.0 | 0. | 195.2 | 10.34 | 531 |
| P-FLUORO CHLORO BENZENE | 130.55 | 1.2260 | 0.0 | 1.4990 | -28.3 | 757. | 130.0 | 0.0 | 532 |
| TRIMETHYL BORATE | 130.92 | 0.9200 | 23.0 | 1.3568 | -34.0 | 0. | 69.0 | 0.0 | 533 |
| ISOAMYL ACETATE | 130.98 | 0.8664 | 25.0 | 1.3984 | 78.5 | 0. | 42.0 | 4.63 | 534 |
| 4(8-HYDROXYET)MORPHOLINE | 131.17 | 1.0710 | 20.0 | 1.4780 | 0.0 | 757. | 227.0 | 0.0 | 535 |
| 1-NITROHEXANE | 131.17 | 0.0 | 0.0 | 1.4229 | 0.0 | 0. | 0.0 | 0.0 | 536 |
| TRICHLOROETHYLENE | 131.39 | 1.4762 | 15.0 | 1.4800 | -86.4 | 0. | 87.2 | 3.42 | 537 |
| DIMETHYLMALONATE | 132.11 | 1.1544 | 0.0 | 1.4140 | -80.0 | 0. | 183.0 | 0.0 | 538 |
| CELLULOSE ACETATE | 132.16 | 0.9730 | 20.0 | 1.4050 | -61.7 | 0. | 156.3 | 7.57 | 539 |
| CINNAMALDEHYDE | 132.16 | 1.0497 | 20.0 | 1.6195 | -75.0 | 760. | 253.0 | 16.90 | 540 |
| 1234TET H NAPHTHALENE | 132.21 | 0.9702 | 20.0 | 1.5414 | -35.8 | 0. | 207.6 | 2.77 | 541 |
| 1234TET H NAPHTHALENE | 132.21 | 0.9662 | 25.0 | 1.5492 | -35.8 | 0. | 207.6 | 2.77 | 542 |
| 1-FLUORO OCTANE | 132.22 | 0.8103 | 0.0 | 1.3935 | 0.0 | 0. | 142.5 | 0.0 | 543 |
| ETHYLDIETHANOLAMINE | 133.19 | 1.0135 | 20.0 | 1.4663 | -50.0 | 760. | 247.0 | 0.0 | 544 |
| 1,1,1-TRICHLOROETHANE | 133.41 | 1.3376 | 20.0 | 1.4379 | -30.4 | 0. | 74.0 | 7.53 | 545 |
| 1,1,2-TRICL ETHANE | 133.41 | 1.4405 | 20.0 | 1.4706 | -37.4 | 0. | 113.0 | 0.0 | 546 |
| 3-BR PROPIONITRILE | 133.98 | 1.6152 | 20.0 | 1.1470 | 0.0 | 25. | 92.0 | 0.0 | 547 |
| ALLYL PHENYL ETHER | 134.18 | 0.9788 | 25.0 | 1.5200 | 0.0 | 18. | 85.0 | 0.0 | 548 |
| CARBITOL | 134.18 | 0.9881 | 0.0 | 1.4273 | 0.0 | 0. | 201.0 | 0.0 | 549 |
| CINNAMYL ALCOHOL | 134.18 | 1.0440 | 20.0 | 1.5819 | 33.0 | 0. | 257.5 | 0.0 | 550 |
| 2-(2-ETOETO)ETHANOL | 134.18 | 0.9814 | 25.0 | 1.4254 | 0.0 | 0. | 202.0 | 0.0 | 551 |
| BIS(2-ME)ET) ETHER | 134.18 | 0.9440 | 25.0 | 1.4043 | 0.0 | 0. | 159.4 | 0.0 | 552 |
| 1-PHENYL-2-PROPANONE | 134.18 | 1.0157 | 20.0 | 1.5168 | 27.0 | 0. | 216.5 | 0.0 | 553 |
| PROPIOPHOLONE | 134.18 | 1.0105 | 20.0 | 1.5269 | 18.6 | 0. | 214.0 | 0.0 | 554 |
| O-DIETHYLBENZENE | 134.21 | 0.8800 | 0.0 | 1.5035 | -20.0 | 0. | 183.0 | 0.0 | 555 |
| 1,3-DIETHYLBENZENE | 134.21 | 0.8639 | 20.0 | 1.4955 | -20.0 | 0. | 181.0 | 0.0 | 556 |
| 1,4-DIETHYLBENZENE | 134.21 | 0.8620 | 20.0 | 1.4967 | -35.0 | 0. | 182.0 | 0.0 | 557 |
| P-ISOPROPYL TOLUENE | 134.21 | 0.8569 | 0.0 | 1.4904 | 0.0 | 0. | 177.0 | 0.0 | 558 |
| 1234 TETRA-ME-BENZENE | 134.21 | 0.9010 | 0.0 | 1.5187 | -64.0 | 0. | 203.5 | 0.0 | 559 |
| 1235 TETRA-ME-BENZENE | 134.21 | 0.8906 | 0.0 | 1.5134 | -24.0 | 0. | 196.0 | 0.0 | 560 |
| BUTYL BENZENE | 134.22 | 0.8561 | 25.0 | 1.4874 | -87.9 | 0. | 183.3 | 2.36 | 561 |
| SEC-BUTYL BENZENE | 134.22 | 0.8580 | 25.0 | 1.4878 | -75.5 | 0. | 173.3 | 2.36 | 562 |
| P-CYME | 134.22 | 0.8533 | 25.0 | 1.4885 | -67.9 | 0. | 177.1 | 2.25 | 563 |
| TERT-BUTYL BENZENE | 134.22 | 0.8624 | 25.0 | 1.4902 | -57.9 | 0. | 169.1 | 2.37 | 564 |
| 4-CHLOROCYCLOHEXANOL | 134.61 | 1.1435 | 17.0 | 1.4930 | 0.0 | 14. | 106.0 | 0.0 | 565 |
| 1-CHLOROHEPTANE | 134.65 | 0.8810 | 0.0 | 1.4248 | -69.0 | 0. | 158.0 | 0.0 | 566 |
| 2-CL-HEPTANE | 134.65 | 0.8725 | 15.0 | 1.4221 | 0.0 | 19. | 46.0 | 0.0 | 567 |
| 3-CL-HEPTANE | 134.65 | 0.8960 | 20.0 | 1.4237 | 0.0 | 751. | 144.0 | 0.0 | 568 |
| 4-CL-HEPTANE | 134.65 | 0.8710 | 20.0 | 1.4237 | 0.0 | 758. | 144.0 | 0.0 | 569 |
| 4-BROMO-1-BUTENE | 135.01 | 1.3230 | 20.0 | 1.4622 | 0.0 | 758. | 98.5 | 0.0 | 570 |
| BENZEDRINE | 135.20 | 0.9400 | 15.0 | 1.5463 | 0.0 | 0. | 203.5 | 0.0 | 571 |
| PHENYL ALACETATE | 136.14 | 1.0730 | 25.0 | 1.5051 | 0.0 | 765. | 195.8 | 18.40 | 572 |
| BENZYL FURMATE | 136.15 | 1.0817 | 25.0 | 1.5121 | 0.0 | 20. | 93.0 | 0.0 | 573 |
| METHYL BENZOATE | 136.15 | 1.0790 | 30.0 | 1.5123 | -12.1 | 0. | 199.5 | 6.59 | 574 |
| N-PROPYL PHENYL ETHER | 136.19 | 0.9530 | 15.0 | 1.5011 | 0.0 | 0. | 189.5 | 0.0 | 575 |
| BENZYL ETHYL ETHER | 136.20 | 0.9446 | 25.0 | 1.4934 | 0.0 | 0. | 185.0 | 3.90 | 576 |
| 3-PHENYL-1-PROPANOL | 136.20 | 1.0080 | 20.0 | 1.5357 | -18.0 | 750. | 236.5 | 0.0 | 577 |
| ALPHA PINENE | 136.24 | 0.8539 | 25.0 | 1.4632 | -64.0 | 0. | 154.9 | 2.26 | 578 |
| BETA PINENE | 136.24 | 0.8667 | 25.0 | 1.4768 | -61.5 | 0. | 166.0 | 2.50 | 579 |
| ETHYL CHLOROGLYOXYLATE | 136.54 | 1.2226 | 20.0 | 0.0 | 0.0 | 760. | 135.0 | 0.0 | 580 |
| 6-CL-HEXANOL-1 | 136.62 | 0.0 | 0.0 | 1.4531 | 0.0 | 12. | 107.0 | 0.0 | 581 |
| BROMOBUTANE | 137.03 | 1.2764 | 20.0 | 1.4389 | -112.4 | 0. | 101.3 | 0.0 | 582 |
| 2-BROMO-2-ME PROPANE | 137.03 | 1.2220 | 20.0 | 1.4283 | -20.0 | 0. | 73.3 | 0.0 | 583 |
| 1-BROMO-2-ME PROPANE | 137.03 | 1.3356 | 25.0 | 1.4348 | 0.0 | 0. | 91.0 | 0.0 | 584 |
| DIETHYL SELENIDE | 137.06 | 1.2300 | 20.0 | 1.4768 | 0.0 | 0. | 108.0 | 0.0 | 585 |
| ANILINOETHANOL | 137.18 | 1.1129 | 25.0 | 1.5749 | 0.0 | 0. | 286.0 | 0.0 | 586 |
| METHOXY BENZYL ALCOHOL | 138.16 | 1.0430 | 25.0 | 1.5490 | 0.0 | 0. | 249.0 | 0.0 | 587 |
| 2-PHENOXYETHANOL | 138.17 | 1.1020 | 22.0 | 1.5340 | 14.0 | 0. | 237.0 | 0.0 | 588 |
| VERATROLE | 138.17 | 1.0819 | 25.0 | 1.5323 | 22.5 | 0. | 206.3 | 4.09 | 589 |
| DIETHYL SULFITE | 138.19 | 1.0829 | 20.0 | 1.4144 | 0.0 | 768. | 157.0 | 0.0 | 590 |
| ISOPHOROHE | 138.21 | 0.9229 | 20.0 | 1.4759 | -8.1 | 754. | 214.0 | 0.0 | 591 |
| DECAHYDRONAPHTHALENE | 138.24 | 0.8789 | 25.0 | 1.4758 | -125.0 | 0. | 191.7 | 0.0 | 592 |
| CIS-DECAHYDRONAPHTHALENE | 138.24 | 0.8967 | 0.0 | 1.4811 | -43.3 | 0. | 195.7 | 0.0 | 593 |
| TRANS-DECAHYDRONAPHTHALENE | 138.24 | 0.8700 | 0.0 | 1.4696 | -32.5 | 0. | 187.3 | 0.0 | 594 |
| BROMOACETIC ACID | 138.95 | 1.9335 | 50.0 | 1.4804 | 5.0 | 760. | 208.0 | 0.0 | 595 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|---------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| 1-PHENYL-2-PROPANOL | 139.20 | 0.9727 | 19.0 | 1.5314 | 36.0 | 0. | 217.0 | 0.0 | 596 |
| PELARGONIC NITRILE | 139.23 | 0.7860 | 16.0 | 1.4235 | -34.2 | 0. | 224.0 | 0.0 | 597 |
| DECAHYDROUJINOLINE | 139.24 | 0.9426 | 20.0 | 1.4926 | -40.0 | 20. | 90.0 | 0.0 | 598 |
| TRIMETHYLPHOSPHATE | 140.08 | 1.2144 | 20.0 | 1.3967 | -46.0 | 760. | 197.2 | 0.0 | 599 |
| 2-ACETYL CYCLOHEXANONE | 140.18 | 1.0782 | 20.0 | 1.5138 | 0.0 | 18. | 112.0 | 0.0 | 600 |
| 2-ISOPROPYL CYCLOHEXANONE | 140.23 | 0.9270 | 20.0 | 1.4538 | 0.0 | 76. | 199.0 | 0.0 | 601 |
| BUTYL CYCLOHEXANE | 140.27 | 0.8178 | 20.0 | 1.4400 | -78.6 | 0. | 179.9 | 0.0 | 602 |
| 1-DECENE | 140.27 | 0.7369 | 25.0 | 1.4191 | -66.3 | 0. | 170.6 | 0.0 | 603 |
| 1,5-DICHLOROPENTANE | 141.04 | 1.1006 | 20.0 | 1.4564 | -72.8 | 760. | 180.0 | 0.0 | 604 |
| IODOMETHANE | 141.94 | 2.2649 | 25.0 | 1.5270 | -66.5 | 0. | 42.4 | 7.00 | 605 |
| 1-ACETYL CYCLOHEXANOL | 142.20 | 1.0257 | 20.0 | 1.4726 | 0.0 | 50. | 125.0 | 0.0 | 606 |
| 1-METHYL NAPHTHALENE | 142.20 | 1.0202 | 20.0 | 1.6170 | -22.0 | 760. | 244.6 | 0.0 | 607 |
| METHYL HEPTYL KETONE | 142.23 | 0.8185 | 0.0 | 1.4161 | -20.9 | 0. | 173.0 | 0.0 | 608 |
| 4-NONANONE | 142.24 | 0.8370 | 20.0 | 1.4210 | 0.0 | 0. | 187.5 | 0.0 | 609 |
| 5-NONANONE | 142.24 | 0.8270 | 20.0 | 1.3980 | -4.8 | 0. | 188.4 | 0.0 | 610 |
| 3,3,5-TRIME CYCLOHEXANOL | 142.24 | 0.9006 | 16.0 | 1.4550 | 37.3 | 750. | 202.0 | 0.0 | 611 |
| DECANE | 142.27 | 0.7262 | 25.0 | 1.4119 | -29.7 | 0. | 174.1 | 1.99 | 612 |
| METHYL-DICHLORO ACETATE | 142.97 | 1.3774 | 20.0 | 1.4429 | -51.9 | 760. | 142.8 | 0.0 | 613 |
| BIS(2-CL ETHYL)ETHER | 143.01 | 1.2192 | 20.0 | 1.4575 | -46.8 | 0. | 178.8 | 21.20 | 614 |
| 1,3-DICL-2-ME-2-PROPANOL | 143.02 | 1.2758 | 20.0 | 1.4744 | 0.0 | 0. | 174.5 | 0.0 | 615 |
| 2-METHYL QUINOLINE | 143.18 | 1.0585 | 0.0 | 1.6126 | -1.0 | 0. | 246.5 | 0.0 | 616 |
| TRI-N-PROPYL AMINE | 143.27 | 0.7530 | 25.0 | 1.4176 | -93.5 | 0. | 156.0 | 0.0 | 617 |
| 1-BR-2-CL-ETHANE | 143.43 | 1.7392 | 20.0 | 1.4917 | -16.7 | 0. | 107.0 | 0.0 | 618 |
| DIMETHYL MALEATE | 144.13 | 1.1513 | 20.0 | 1.4422 | -17.5 | 0. | 200.4 | 0.0 | 619 |
| TETRAHYDROFURFURYL ACET | 144.17 | 1.0672 | 25.0 | 1.4352 | 0.0 | 14. | 85.0 | 0.0 | 620 |
| 4(3-AMINOPROP)MORPHOLINE | 144.21 | 0.9872 | 20.0 | 1.4749 | -15.0 | 50. | 134.0 | 0.0 | 621 |
| AMYLPROPIONATE | 144.21 | 0.8760 | 0.0 | 1.4096 | -73.1 | 760. | 168.7 | 0.0 | 622 |
| BUTYLBUTYRATE (N) | 144.21 | 0.8717 | 20.0 | 1.4045 | -91.5 | 760. | 166.6 | 0.0 | 623 |
| ISOBUTYL-N-BUTYRATE | 144.21 | 0.8364 | 18.0 | 1.4030 | 0.0 | 0. | 157.0 | 0.0 | 624 |
| N-PROPYL VALERATE | 144.21 | 0.8888 | 0.0 | 1.4057 | 0.0 | 0. | 167.5 | 0.0 | 625 |
| CAPRYLIC ACID | 144.22 | 0.9106 | 20.0 | 1.4280 | 16.5 | 0. | 239.9 | 2.45 | 626 |
| 2-ETHYLBUTYL ACETATE | 144.22 | 0.8790 | 20.0 | 1.4109 | -100.0 | 760. | 162.5 | 0.0 | 627 |
| HEXYL ACETATE | 144.22 | 0.8779 | 15.0 | 1.4092 | -80.9 | 760. | 171.5 | 0.0 | 628 |
| ISOBUTYLISOBUTYRATE | 144.22 | 0.8742 | 20.0 | 1.3999 | -80.7 | 0. | 147.5 | 0.0 | 629 |
| ISOBUTYLISOBUTYRATE | 144.22 | 0.8489 | 25.0 | 1.3981 | -80.7 | 0. | 175.6 | 0.0 | 630 |
| NONYL ALCOHOL | 144.25 | 0.8273 | 0.0 | 1.4333 | -5.0 | 0. | 212.0 | 0.0 | 631 |
| 2,6-DIMETHYL-4-HEPTANOL | 144.26 | 0.8090 | 21.0 | 1.4242 | 0.0 | 760. | 176.5 | 0.0 | 632 |
| SILICONANE | 144.34 | 0.7682 | 0.0 | 1.4243 | 0.0 | 0. | 154.7 | 0.0 | 633 |
| 4-PHENYLBUTRONITRILE | 145.21 | 0.9762 | 0.0 | 1.5150 | 0.0 | 0. | 139.0 | 0.0 | 634 |
| 3,3,3-TRICHLOROPROPENE | 145.43 | 1.3690 | 20.0 | 1.4827 | 30.0 | 0. | 104.5 | 0.0 | 635 |
| DIETHYL OXALATE | 146.14 | 1.0669 | 30.0 | 1.4060 | -40.6 | 0. | 185.4 | 1.80 | 636 |
| ETHYLENE DIACETATE | 146.14 | 1.1043 | 20.0 | 1.4159 | -41.5 | 0. | 190.9 | 10.00 | 637 |
| BUTYL LACTATE DL | 146.19 | 0.9803 | 22.0 | 1.4217 | -43.0 | 13. | 83.0 | 0.0 | 638 |
| 2-ETHYL-1,3-HEXANEDIOL | 146.23 | 0.9325 | 22.0 | 1.4497 | -40.0 | 760. | 244.0 | 0.0 | 639 |
| HEXYL CELLOSOLVE | 146.23 | 0.8894 | 20.0 | 1.4291 | -45.1 | 760. | 208.0 | 0.0 | 640 |
| TRIETHYLENETETRAMINE | 146.24 | 0.9820 | 20.0 | 1.4971 | 12.0 | 760. | 266.5 | 0.0 | 641 |
| O-DICHLOROBENZENE | 147.01 | 1.3059 | 20.0 | 1.5515 | -17.0 | 0. | 180.5 | 9.93 | 642 |
| M-DICHLOROBENZENE | 147.01 | 1.2884 | 20.0 | 1.5459 | -24.8 | 0. | 173.0 | 5.04 | 643 |
| P-DICHLOROBENZENE | 147.01 | 1.2416 | 60.0 | 1.5285 | 53.1 | 0. | 174.1 | 2.41 | 644 |
| KAJROLIN | 147.21 | 1.0220 | 0.0 | 1.5082 | 0.0 | 758. | 0.0 | 0.0 | 645 |
| 1-PHENYL-PYRROLIDINE | 147.22 | 1.0260 | 25.0 | 1.5803 | 0.0 | 9. | 113.0 | 0.0 | 646 |
| TRICHLOROACETALDEHYDE | 147.40 | 1.5120 | 0.0 | 1.4557 | -57.5 | 0. | 98.0 | 0.0 | 647 |
| 1,1,1-TRICHLOROPROPANE | 147.43 | 1.2870 | 23.0 | 0.0 | 0.0 | 760. | 107.5 | 0.0 | 648 |
| 1,1,2-TRICHLOROPROPANE | 147.43 | 1.3720 | 25.0 | 0.0 | 0.0 | 760. | 140.0 | 0.0 | 649 |
| 1,1,3-TRICHLOROPROPANE | 147.43 | 1.3557 | 20.0 | 1.4718 | -59.0 | 760. | 145.6 | 0.0 | 650 |
| 1,2,2-TRICHLOROPROPANE | 147.43 | 1.3180 | 25.0 | 1.4609 | 0.0 | 762. | 124.0 | 0.0 | 651 |
| 1,2,3-TRICHLOROPROPANE | 147.44 | 1.3940 | 0.0 | 1.4858 | -14.7 | 0. | 156.0 | 0.0 | 652 |
| BUTYRPHENONE | 148.20 | 0.9880 | 0.0 | 1.5320 | 11.0 | 727. | 231.0 | 0.0 | 653 |
| 1 PHENYLPENTANE | 148.24 | 0.8662 | 0.0 | 1.4943 | -78.3 | 0. | 205.3 | 0.0 | 654 |
| 1-CHLORO OCTANE | 148.67 | 0.8748 | 0.0 | 1.4306 | 0.0 | 765. | 181.0 | 0.0 | 655 |
| 1-CL-2,5-DIME HEXANE | 148.68 | 0.8476 | 18.0 | 1.4232 | 0.0 | 14. | 44.0 | 0.0 | 656 |
| 2-BR-3-ME-1-BUTENE | 149.04 | 1.2328 | 20.0 | 1.4504 | 0.0 | 757. | 105.0 | 0.0 | 657 |
| 1-BR-3-ME-2-BUTENE | 149.04 | 1.2819 | 20.0 | 1.4930 | 0.0 | 40. | 50.5 | 0.0 | 658 |
| 2-BR-3-ME-2-BUTENE | 149.04 | 1.2773 | 20.0 | 1.4738 | 0.0 | 766. | 119.5 | 0.0 | 659 |
| TRITHANOLAMINE | 149.19 | 1.1196 | 25.0 | 1.4835 | 21.6 | 0. | 335.4 | 29.36 | 660 |
| N-BUTYLANILINE | 149.24 | 0.9323 | 20.0 | 1.5341 | -14.4 | 760. | 241.6 | 0.0 | 661 |
| 2,2,2-TRICHLOROETHANOL | 149.42 | 1.5521 | 25.0 | 1.4890 | 17.8 | 737. | 151.0 | 0.0 | 662 |
| BENZYL ACETATE | 150.18 | 1.0550 | 20.0 | 1.5232 | -51.5 | 0. | 215.5 | 5.10 | 663 |
| ETHYL BENZOATE | 150.18 | 1.0511 | 15.0 | 1.5075 | -34.7 | 0. | 212.4 | 6.02 | 664 |
| TRIETHYLENE GLYCOL | 150.18 | 1.1274 | 15.0 | 1.4578 | -4.3 | 0. | 288.0 | 23.69 | 665 |
| N-BUTYL PHENYL ETHER | 150.21 | 0.9351 | 0.0 | 1.4969 | -19.0 | 0. | 210.0 | 0.0 | 666 |
| 2-ME-1-PHENYLPROPANOL-1 | 150.22 | 0.9869 | 14.0 | 1.5193 | 0.0 | 0. | 223.0 | 0.0 | 667 |
| 2-ME-1-PHENYLPROPANOL-2 | 150.22 | 0.9774 | 19.0 | 1.5201 | 24.0 | 0. | 215.0 | 0.0 | 668 |
| 4-CHLOROBUTYL ACETATE | 150.61 | 1.0759 | 0.0 | 1.4340 | -0.0 | 0. | 83.0 | 0.0 | 669 |
| 1-BROMO-3-ME BUTANE | 151.05 | 1.2609 | 20.0 | 1.4420 | -112.0 | 0. | 120.0 | 0.0 | 670 |
| 1-BROMOPENTANE | 151.05 | 1.2177 | 0.0 | 1.4413 | -95.0 | 0. | 129.7 | 0.0 | 671 |
| ET-2-PYRIDINECARBOXYLATE | 151.16 | 1.1194 | 20.0 | 1.5104 | 1.0 | 0. | 243.0 | 0.0 | 672 |
| METHYL SALICYLATE | 152.15 | 1.1831 | 20.0 | 1.5365 | -6.6 | 0. | 233.3 | 9.41 | 673 |
| 2-BENZYL OXYETHANOL | 152.20 | 1.0640 | 20.0 | 1.5233 | -75.0 | 760. | 256.0 | 0.0 | 674 |
| CINNAMYL CHLORIDE | 152.63 | 0.0 | 0.0 | 0.0 | -19.0 | 0. | 214.0 | 0.0 | 675 |
| BROMOMETHYLACETATE | 152.99 | 1.6560 | 12.0 | 0.0 | 0.0 | 750. | 130.0 | 0.0 | 676 |
| O-NITROANISOLE | 153.14 | 1.2527 | 20.0 | 1.5619 | 10.5 | 0. | 265.0 | 0.0 | 677 |
| CARBON TETRACHLORIDE | 153.82 | 1.6037 | 15.0 | 1.4631 | -23.0 | 0. | 76.7 | 2.24 | 678 |
| CARBON TETRACHLORIDE | 153.82 | 1.5844 | 25.0 | 1.4574 | -23.0 | 0. | 76.7 | 2.24 | 679 |
| DIETHYL SULFATE | 154.19 | 1.1774 | 20.0 | 1.4004 | -24.5 | 0. | 208.0 | 0.0 | 680 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|--------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| 1,0-CINEOLE | 154.25 | 0.9192 | 25.0 | 1.4555 | 1.3 | 0. | 176.0 | 4.57 | 681 |
| 2-NBUTYLCYCLOHEXANONE | 154.28 | 0.9350 | 20.0 | 1.4545 | 0.0 | 2. | 7.0 | 0.0 | 682 |
| 1-UNDECENE | 154.29 | 0.7506 | 0.0 | 1.4261 | -50.0 | 0. | 193.0 | 0.0 | 683 |
| SUCCINYL CHLORIDE | 154.98 | 1.3748 | 20.0 | 1.4683 | 20.0 | 760. | 193.3 | 0.0 | 684 |
| 1,6-DICL-HEXANE | 155.08 | 1.0677 | 20.0 | 1.4572 | 0.0 | 0. | 202.4 | 0.0 | 685 |
| IOODOETHANE | 155.97 | 1.9357 | 20.0 | 1.5133 | -111.1 | 0. | 72.3 | 7.82 | 686 |
| 3-CYCLOHEXPROPANOIC ACID | 156.22 | 0.9966 | 20.0 | 1.4658 | 16.0 | 750. | 193.0 | 0.0 | 687 |
| 1-ETHYL NAPHTHALENE | 156.23 | 1.0082 | 20.0 | 1.6062 | -13.9 | 760. | 258.7 | 0.0 | 688 |
| 2-ETHYL NAPHTHALENE | 156.23 | 0.9922 | 20.0 | 1.5999 | -7.4 | 760. | 257.9 | 0.0 | 689 |
| DECANONE-2 | 156.26 | 0.8230 | 22.0 | 1.4621 | 14.0 | 767. | 210.5 | 0.0 | 690 |
| 2-BUTYLCYCLOHEXANOL | 156.27 | 0.9020 | 20.0 | 1.4661 | 0.0 | 3. | 75.0 | 0.0 | 691 |
| 3-ISOPRO-2-HEPTANONE | 156.27 | 0.8195 | 20.0 | 1.4750 | 0.0 | 0. | 78.0 | 0.0 | 692 |
| UNDECANE | 156.30 | 0.7401 | 0.0 | 1.4172 | -25.0 | 0. | 195.5 | 2.01 | 693 |
| BETA-CHLOROPHENETOLE | 156.61 | 1.1443 | 25.0 | 1.5328 | 0.0 | 0. | 0.0 | 0.0 | 694 |
| P-CHLOROPHENETOLE | 156.61 | 1.1231 | 20.0 | 1.5227 | 21.0 | 0. | 213.0 | 0.0 | 695 |
| 2-CLETHYLCHLOROACETATE | 157.00 | 1.3600 | 25.0 | 1.4619 | 0.0 | 760. | 202.0 | 0.0 | 696 |
| 2,3-DICHLORODIOXANE | 157.00 | 1.4680 | 20.0 | 1.4928 | 30.0 | 10. | 81.0 | 0.0 | 697 |
| ETHYLOICHLOROACETATE | 157.00 | 1.2821 | 20.0 | 1.4386 | 0.0 | 0. | 157.0 | 10.00 | 698 |
| BROMOBENZENE | 157.02 | 1.4882 | 25.0 | 1.5571 | -30.8 | 0. | 155.9 | 5.40 | 699 |
| DIPENTYLAMINE | 157.30 | 0.7771 | 20.0 | 1.4272 | -70.0 | 760. | 202.5 | 0.0 | 700 |
| ALLYLIDENE DIACETATE | 158.15 | 1.0749 | 20.0 | 1.4193 | -37.6 | 0. | 180.0 | 0.0 | 701 |
| TETRAHYDROFURFURYL PROP | 158.19 | 1.0321 | 25.0 | 1.4380 | 0.0 | 18. | 101.0 | 0.0 | 702 |
| BUTYRIC ANHYDRIDE | 158.20 | 0.9668 | 20.0 | 1.4127 | -66.7 | 0. | 199.5 | 12.90 | 703 |
| HEXYL PROPIONATE | 158.23 | 0.8698 | 20.0 | 0.0 | 57.5 | 0. | 190.0 | 0.0 | 704 |
| ISOAMYL ETHER | 158.27 | 0.7777 | 20.0 | 1.4085 | 0.0 | 0. | 173.4 | 0.0 | 705 |
| AMYL ETHER | 158.28 | 0.7790 | 25.0 | 1.4098 | -69.4 | 0. | 186.9 | 0.0 | 706 |
| DIETHYL MALONATE | 160.17 | 1.0549 | 20.0 | 1.4136 | -48.9 | 0. | 199.3 | 7.87 | 707 |
| CYCLOHEXYLBENZENE | 160.26 | 0.9387 | 25.0 | 1.5239 | 7.0 | 0. | 240.1 | 0.0 | 708 |
| 1-CHLOROPENTANE | 160.60 | 0.8818 | 20.0 | 1.4120 | -99.0 | 0. | 107.7 | 6.60 | 709 |
| BENZAL CHLORIDE | 161.03 | 1.2557 | 14.0 | 1.5502 | -16.4 | 0. | 205.2 | 0.0 | 710 |
| N-BUTYLDIETHANOLAMINE | 161.25 | 0.9692 | 20.0 | 1.4625 | -70.0 | 741. | 274.0 | 0.0 | 711 |
| 1,2,3-TRICHLORO BUTANE | 161.46 | 1.3164 | 20.0 | 1.4790 | 0.0 | 725. | 166.5 | 0.0 | 712 |
| 2-ME-1,2,3-TRICL PROPANE | 161.47 | 1.3012 | 25.0 | 1.4765 | 0.0 | 0. | 162.0 | 0.0 | 713 |
| ISOSAFROLE | 162.18 | 1.1140 | 25.0 | 1.5740 | 0.0 | 0. | 0.0 | 0.0 | 714 |
| SAFRULE | 162.18 | 1.0950 | 25.0 | 1.5383 | 11.2 | 0. | 233.5 | 0.0 | 715 |
| DIETHYLENGLYCDIET ETHER | 162.22 | 1.9063 | 0.0 | 1.4115 | 0.0 | 0. | 189.0 | 0.0 | 716 |
| BUTYLCARBITOL | 162.23 | 0.9553 | 20.0 | 1.4321 | -68.1 | 760. | 231.0 | 0.0 | 717 |
| 1,2,4-TRIETHYL BENZENE | 162.27 | 0.8738 | 0.0 | 1.5024 | 0.0 | 0. | 218.0 | 0.0 | 718 |
| 1,3,5-TRIETHYL BENZENE | 162.27 | 0.8621 | 0.0 | 1.4958 | -66.5 | 755. | 216.0 | 0.0 | 719 |
| 1-PHENYLBENZENE | 162.28 | 0.8540 | 0.0 | 1.4860 | -62.0 | 760. | 226.0 | 0.0 | 720 |
| 2-CHLORONAPHTHALENE | 162.61 | 1.1377 | 71.0 | 1.6079 | 54.0 | 0. | 256.0 | 0.0 | 721 |
| 1-CHLORONAPHTHALENE | 162.62 | 1.1938 | 20.0 | 1.6332 | -2.3 | 0. | 259.3 | 5.04 | 722 |
| TRICHLOROACETIC ACID | 163.39 | 1.6218 | 64.0 | 1.4603 | 5.8 | 760. | 197.6 | 0.0 | 723 |
| 2-CHLOROQUINOLINE | 163.60 | 1.2464 | 25.0 | 1.6259 | 37.5 | 751. | 275.0 | 0.0 | 724 |
| DICHLOROBROMOMETHANE | 163.85 | 1.9800 | 20.0 | 1.4964 | 0.0 | 742. | 89.5 | 0.0 | 725 |
| 4-PHENYL-1,3-DIOXANE | 164.19 | 1.1038 | 20.0 | 1.5306 | 0.0 | 0. | 245.0 | 0.0 | 726 |
| EUGENOL | 164.20 | 1.0664 | 20.0 | 1.5410 | 9.2 | 760. | 255.0 | 0.0 | 727 |
| PROPYL BENZOATE | 164.21 | 1.0232 | 20.0 | 1.5003 | -51.6 | 0. | 231.2 | 0.0 | 728 |
| BENZYL BUTYL ETHER | 164.25 | 0.9407 | 20.0 | 1.4970 | 15.0 | 744. | 220.5 | 0.0 | 729 |
| NITROTRICHLORO METHANE | 164.38 | 1.6566 | 20.0 | 1.4622 | -64.5 | 760. | 111.8 | 0.0 | 730 |
| 1-BROMOHEXANE | 165.08 | 1.1763 | 20.0 | 1.4478 | -85.0 | 0. | 154.0 | 0.0 | 731 |
| 2-BR-HEXANE | 165.08 | 1.1658 | 20.0 | 1.4432 | 0.0 | 0. | 144.0 | 0.0 | 732 |
| 3-BR-HEXANE | 165.08 | 1.1799 | 20.0 | 1.4486 | 0.0 | 744. | 144.0 | 0.0 | 733 |
| TETRACHLOROETHYLENE | 165.43 | 1.6311 | 15.0 | 1.5076 | -22.3 | 0. | 121.2 | 2.30 | 734 |
| BICYCLOHEXYL | 166.31 | 0.8862 | 20.0 | 1.4800 | 3.6 | 0. | 239.0 | 0.0 | 735 |
| 2-BROMOETHYLACETATE | 167.02 | 1.5140 | 20.0 | 1.4547 | -13.8 | 0. | 162.5 | 0.0 | 736 |
| 1122-TET CL ETHANE | 167.35 | 1.5786 | 30.0 | 1.4868 | -43.8 | 0. | 146.2 | 8.20 | 737 |
| 1112 TET CL ETHANE | 167.86 | 1.5532 | 0.0 | 1.4821 | -68.1 | 0. | 129.5 | 0.0 | 738 |
| 3-IOUOPROPENE | 167.99 | 1.8454 | 22.0 | 1.5540 | -99.3 | 0. | 102.5 | 0.0 | 739 |
| O-PHENYL TOLUENE | 168.23 | 1.0100 | 0.0 | 1.6824 | 45.0 | 0. | 262.5 | 0.0 | 740 |
| 2-BENZYL PYRIDINE | 169.23 | 1.0670 | 20.0 | 1.5785 | 12.0 | 742. | 276.0 | 0.0 | 741 |
| 1-IOUOPROPANE | 170.00 | 1.7394 | 25.0 | 1.5028 | -101.3 | 0. | 102.4 | 7.00 | 742 |
| 2-IOUOPROPANE | 170.00 | 1.6946 | 25.0 | 1.4961 | -90.0 | 0. | 89.5 | 8.19 | 743 |
| 1-ACETONAPHTHANE | 170.21 | 1.1336 | 20.0 | 1.6280 | 12.0 | 0. | 297.0 | 0.0 | 744 |
| DIPHENYL ETHER | 170.21 | 1.0661 | 30.0 | 1.5763 | 26.9 | 0. | 258.3 | 3.69 | 745 |
| DODECANE | 170.34 | 0.7487 | 20.0 | 1.4216 | -9.6 | 0. | 216.3 | 2.01 | 746 |
| BENZYL CHLOROFORMATE | 170.60 | 1.1950 | 25.0 | 1.5160 | 0.0 | 0. | 0.0 | 0.0 | 747 |
| M-BROMOTOLUENE | 171.04 | 1.4019 | 20.0 | 1.5510 | -39.8 | 0. | 183.7 | 5.36 | 748 |
| P-BROMOTOLUENE | 171.04 | 1.3898 | 20.0 | 1.5490 | 28.5 | 0. | 184.5 | 5.49 | 749 |
| B,8-DICL-DIISOPROP ETHER | 171.07 | 1.1030 | 20.0 | 1.4505 | 0.0 | 0. | 187.0 | 0.0 | 750 |
| DIETHYL MALEATE | 172.18 | 1.0687 | 20.0 | 1.4400 | -8.8 | 0. | 225.3 | 8.58 | 751 |
| 1-ETHOXY NAPHTHALENE | 172.23 | 1.0600 | 20.0 | 1.5953 | 5.5 | 0. | 280.5 | 0.0 | 752 |
| HEPTYL PROPIONATE | 172.26 | 0.8679 | 20.0 | 0.0 | -50.9 | 0. | 289.0 | 0.0 | 753 |
| 2-ETHYLHEXYL ACETATE | 172.27 | 0.8718 | 20.0 | 1.4204 | -93.0 | 0. | 198.6 | 0.0 | 754 |
| UNDECYL ALCOHOL | 172.30 | 0.8298 | 0.0 | 1.4392 | 19.0 | 760. | 243.0 | 0.0 | 755 |
| 2-UNDECANOL | 172.31 | 0.8270 | 20.0 | 1.4369 | 12.0 | 760. | 225.4 | 0.0 | 756 |
| O-BROMOPHENOL | 173.02 | 1.4924 | 20.0 | 1.5892 | 5.6 | 0. | 194.5 | 0.0 | 757 |
| METHYLENE BROMIDE | 173.85 | 2.4970 | 20.0 | 1.5420 | -52.6 | 760. | 97.0 | 7.50 | 758 |
| DIETHYL SUCCINATE | 174.19 | 1.0406 | 20.0 | 1.4201 | -22.0 | 0. | 217.7 | 0.0 | 759 |
| N-DIPROPYL OXALATE | 174.19 | 1.0169 | 0.0 | 1.4168 | -46.3 | 0. | 214.5 | 0.0 | 760 |
| DIMETHYL ADIPATE | 174.20 | 1.0600 | 20.0 | 1.4283 | 10.3 | 13. | 115.0 | 0.0 | 761 |
| DIBUTOXYETHANE | 174.28 | 0.8370 | 0.0 | 1.4131 | -69.0 | 0. | 203.0 | 0.0 | 762 |
| P-FLURO BROMOBENZENE | 175.01 | 1.4946 | 0.0 | 1.5604 | -17.0 | 764. | 152.0 | 0.0 | 763 |
| N-OCTYL NITRATE | 175.22 | 0.9750 | 0.0 | 0.0 | 0.0 | 20. | 111.0 | 0.0 | 764 |
| 2-(2-ETOETO)ETACETATE | 176.21 | 1.0096 | 20.0 | 1.4213 | -25.0 | 0. | 217.4 | 0.0 | 765 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|--------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| ETHYL CINNAMATE | 176.21 | 1.0494 | 20.0 | 1.5598 | 6.7 | 0. | 272.7 | 0.0 | 766 |
| 1-CHLORODECANE | 176.73 | 0.8683 | 0.0 | 1.4373 | 0.0 | 0. | 222.5 | 0.0 | 767 |
| ISOAMYLISOVALERATE | 177.26 | 0.8583 | 18.7 | 1.4130 | 0.0 | 0. | 194.0 | 3.62 | 768 |
| METHYL TRICL ACETATE | 177.43 | 1.4890 | 19.2 | 1.5250 | -17.5 | 765. | 152.5 | 0.0 | 769 |
| BENZYL BUTYRATE | 178.23 | 1.0140 | 19.0 | 1.4920 | 9.0 | 0. | 109.0 | 0.0 | 770 |
| TETRAMETHYL TIN | 178.83 | 1.3140 | 0.0 | 1.4386 | -54.8 | 0. | 78.0 | 0.0 | 771 |
| 1-BROMOHEPTANE | 179.11 | 1.1384 | 20.0 | 1.4505 | -58.0 | 0. | 179.0 | 0.0 | 772 |
| HEXA-ME PHOSPHORAMIDE | 179.20 | 1.0270 | 20.0 | 1.4588 | 7.2 | 0. | 233.0 | 30.00 | 773 |
| (ISO)PROPYL SALICYLATE | 180.20 | 1.0729 | 15.0 | 1.5065 | 0.0 | 0. | 241.0 | 0.0 | 774 |
| 1,4-(BIS CL ME)CYC HEX | 181.11 | 1.1180 | 25.0 | 1.4908 | 15.0 | 0. | 121.0 | 0.0 | 775 |
| 1,2,4-TRICL BENZENE | 181.45 | 1.4542 | 20.0 | 1.5717 | 17.0 | 760. | 213.5 | 0.0 | 776 |
| 1112TETRACLPROPANE | 181.89 | 1.4695 | 22.0 | 1.4855 | -64.0 | 0. | 152.5 | 0.0 | 777 |
| 1,1-DIPHENYLETHANE | 182.27 | 0.9875 | 20.0 | 1.5761 | -215.0 | 0. | 286.0 | 0.0 | 778 |
| 1,2-DIPHENYLETHANE | 182.27 | 0.9950 | 20.0 | 1.5338 | 52.2 | 0. | 285.0 | 0.0 | 779 |
| TERT-BUTYL IODIDE | 184.02 | 1.5445 | 20.0 | 1.4918 | -38.2 | 0. | 108.0 | 0.0 | 780 |
| 1-IODOBUTANE | 184.03 | 1.6123 | 0.0 | 1.5000 | -103.1 | 0. | 130.0 | 0.0 | 781 |
| N-TRIOECANE | 184.37 | 0.7559 | 0.0 | 1.4233 | -5.5 | 0. | 243.0 | 0.0 | 782 |
| BENZYL CHLOROACETATE | 184.63 | 1.2223 | 4.0 | 1.5426 | 10.0 | 0. | 133.3 | 0.0 | 783 |
| TRI-N-BUTYLAMINE | 185.36 | 0.7771 | 20.0 | 1.4297 | -70.0 | 760. | 213.0 | 0.0 | 784 |
| TRIBUTYL AMINE (ISO) | 185.36 | 0.7640 | 20.5 | 1.4252 | -21.8 | 0. | 191.5 | 0.0 | 785 |
| CIS-1,2-DIBR ETHYLENE | 185.80 | 2.2464 | 20.0 | 1.5428 | -53.0 | 760. | 112.5 | 0.0 | 786 |
| TRANS-1,2-DIBR ETHYLENE | 185.80 | 2.2308 | 20.0 | 1.5505 | -6.5 | 760. | 108.0 | 0.0 | 787 |
| 2-BROMO-4-ME ANILINE | 186.06 | 1.4745 | 25.0 | 1.6012 | 15.0 | 0. | 0.0 | 0.0 | 788 |
| HEXAFLUOROBENZENE | 186.06 | 1.6182 | 20.0 | 1.3781 | 5.1 | 0. | 80.3 | 0.0 | 789 |
| OCTYL PROPIONATE | 186.29 | 0.8663 | 0.0 | 0.0 | 0.0 | 0. | 0.0 | 0.0 | 790 |
| DIMETHYL ETHER | 186.34 | 0.7936 | 20.0 | 1.4204 | -43.0 | 768. | 223.0 | 0.0 | 791 |
| BIS(2-CL ET) CARBONATE | 187.02 | 1.3444 | 25.0 | 1.4595 | 10.0 | 0. | 117.0 | 0.0 | 792 |
| 112TRIFL-122TRICL ETHANE | 187.38 | 1.5635 | 25.0 | 1.3557 | -36.4 | 0. | 47.7 | 0.0 | 793 |
| 1,1-DIBROMOETHANE | 187.87 | 2.0554 | 0.0 | 1.5122 | -63.0 | 0. | 110.0 | 0.0 | 794 |
| 1,2-DIBROMOETHANE | 187.87 | 2.1687 | 25.0 | 1.5360 | 9.8 | 0. | 131.4 | 4.78 | 795 |
| 1245 TETRAETHYL BENZENE | 190.32 | 0.8788 | 0.0 | 1.5054 | 10.0 | 0. | 250.0 | 0.0 | 796 |
| ETHYLTRICL ACETATE | 191.44 | 1.3826 | 20.0 | 1.4507 | 0.0 | 0. | 167.5 | 7.80 | 797 |
| ETHYL BENZOYL ACETATE | 192.21 | 1.1220 | 20.0 | 1.5312 | 0.0 | 14. | 165.0 | 0.0 | 798 |
| 3-BROMOMETHYL HEPTANE | 193.13 | 1.1227 | 25.0 | 1.4548 | 0.0 | 0. | 57.0 | 6.00 | 799 |
| 1-BROMO OCTANE | 193.13 | 1.1180 | 0.0 | 1.4527 | -55.0 | 0. | 202.3 | 0.0 | 800 |
| METHYL BENZOPHENONE | 193.24 | 1.1464 | 0.0 | 1.6738 | -18.0 | 0. | 325.0 | 0.0 | 801 |
| DIMETHYL PHTHALATE | 194.18 | 1.1905 | 20.7 | 1.5150 | 0.0 | 0. | 283.0 | 0.0 | 802 |
| METHYL PHTHALATE | 194.18 | 1.1890 | 25.0 | 1.5150 | 0.0 | 734. | 283.0 | 0.0 | 803 |
| TETRAETHYLENE GLYCOL | 194.22 | 1.1285 | 0.0 | 1.4594 | -6.2 | 0. | 328.0 | 0.0 | 804 |
| PHENYL CHLOROFORM | 196.48 | 1.3800 | 0.0 | 1.5011 | -4.8 | 0. | 220.7 | 0.0 | 805 |
| TETRA-NITROMETHANE | 196.04 | 1.6372 | 0.0 | 1.4398 | 13.0 | 0. | 126.0 | 0.0 | 806 |
| 1-TETRADECENE | 196.38 | 0.7852 | 0.0 | 1.4932 | -12.0 | 0. | 246.0 | 0.0 | 807 |
| DIBENZYLAMINE | 197.28 | 1.0256 | 22.0 | 1.5143 | -26.0 | 250. | 270.0 | 3.60 | 808 |
| 1-IODOPENTANE | 198.06 | 1.5170 | 0.0 | 1.4955 | 73.1 | 0. | 155.0 | 0.0 | 809 |
| BENZYL ETHER | 198.27 | 1.0428 | 20.0 | 1.5406 | 36.0 | 0. | 288.3 | 0.0 | 810 |
| TRICHLORUBROMOMETHANE | 198.30 | 2.0120 | 0.0 | 1.5061 | -21.0 | 0. | 104.0 | 0.0 | 811 |
| N-TETRADECANE | 198.40 | 0.7627 | 0.0 | 1.4290 | 6.0 | 0. | 253.5 | 0.0 | 812 |
| PHENYL-N-PROPYL BROMIDE | 199.09 | 1.3098 | 19.0 | 1.5517 | 0.0 | 0. | 121.5 | 0.0 | 813 |
| (3-BROMOPROPYL)BENZENE | 199.10 | 1.3098 | 19.0 | 1.5517 | 0.0 | 0. | 121.5 | 0.0 | 814 |
| BIS(4-CL BUTYL) ETHER | 199.12 | 1.0796 | 25.0 | 1.4800 | 0.0 | 10. | 130.0 | 0.0 | 815 |
| 2,3-DIBROMOPROPENE | 199.88 | 2.0346 | 25.0 | 1.5416 | 0.0 | 760. | 141.0 | 0.0 | 816 |
| TRIBUTYL CARBINOL | 200.35 | 0.8408 | 0.0 | 1.4445 | 20.0 | 0. | 230.0 | 0.0 | 817 |
| 0-BROMOPHENETOLE | 201.07 | 1.4105 | 25.0 | 1.5532 | 0.0 | 22. | 124.0 | 0.0 | 818 |
| P-BROMOPHENETOLE | 201.07 | 1.4031 | 25.0 | 1.5498 | 11.0 | 0. | 233.0 | 0.0 | 819 |
| 1,1-DIBROMOPROPANE | 201.91 | 0.0 | 0.0 | 1.5100 | 0.0 | 74. | 135.4 | 0.0 | 820 |
| 1,2-DIBROMOPROPANE | 201.91 | 1.9366 | 0.0 | 1.5206 | -55.5 | 0. | 141.4 | 0.0 | 821 |
| 1,3-DIBROMOPROPANE | 201.91 | 1.9893 | 0.0 | 1.5230 | -34.2 | 0. | 0.0 | 0.0 | 822 |
| ACETYLDIMETHYLMALONATE | 202.20 | 1.0830 | 26.0 | 1.4374 | 0.0 | 0. | 120.0 | 0.0 | 823 |
| DIBUTYL OXALATE | 202.25 | 0.9873 | 20.0 | 1.4234 | -30.5 | 773. | 242.0 | 0.0 | 824 |
| DIETHYLAIPATE | 202.25 | 1.0076 | 20.0 | 1.4272 | -19.8 | 760. | 245.0 | 0.0 | 825 |
| PENTACHLOROETHANE | 202.30 | 1.6881 | 15.0 | 1.5054 | -29.0 | 0. | 162.0 | 3.73 | 826 |
| 1122TETCLDIF ETHANE | 203.83 | 1.6252 | 35.0 | 1.4083 | 26.0 | 0. | 92.8 | 2.52 | 827 |
| IODOBENZENE | 204.01 | 1.8230 | 25.0 | 1.6197 | -31.4 | 0. | 189.0 | 0.0 | 828 |
| N,N-DIBUTYLANILINE | 205.34 | 0.9037 | 20.0 | 1.5186 | -32.2 | 760. | 274.8 | 0.0 | 829 |
| 1-BROMONAPHTHALENE | 207.08 | 1.4834 | 20.0 | 1.6580 | 6.2 | 0. | 281.1 | 4.83 | 830 |
| 1-BROMONONANE | 207.16 | 1.0851 | 25.0 | 1.4520 | 0.0 | 5. | 84.0 | 0.0 | 831 |
| 2-BROMO-NONANE | 207.16 | 1.0810 | 0.0 | 1.4519 | 0.0 | 767. | 208.5 | 0.0 | 832 |
| 1,10-DICHLORODECANE | 211.18 | 0.9936 | 0.0 | 1.4600 | 0.0 | 0. | 148.0 | 0.0 | 833 |
| BENZYL BENZOATE | 212.25 | 1.1121 | 25.0 | 1.5681 | 19.4 | 0. | 323.5 | 4.90 | 834 |
| N-PENTADECANE | 212.41 | 0.7689 | 0.0 | 1.4315 | 10.0 | 0. | 270.5 | 0.0 | 835 |
| 3-BRPPROPYL PHENYL ETHER | 215.10 | 1.3650 | 16.0 | 0.0 | 11.0 | 18. | 127.0 | 0.0 | 836 |
| 2-NITRO-DIPHENYL ETHER | 215.21 | 1.2539 | 22.0 | 1.5750 | -20.0 | 8. | 184.0 | 0.0 | 837 |
| 1,2-DIBROMOBUTANE | 215.94 | 1.7950 | 0.0 | 1.5500 | 0.0 | 0. | 166.3 | 0.0 | 838 |
| 1,4-DIBROMOBUTANE | 215.94 | 1.8080 | 0.0 | 1.5175 | -26.0 | 0. | 197.5 | 0.0 | 839 |
| 2,3-DIBROMOBUTANE | 215.94 | 1.7830 | 0.0 | 1.5133 | -70.3 | 0. | 161.0 | 0.0 | 840 |
| 1,2-DIBR-2-ME PROPANE | 215.94 | 1.7590 | 20.0 | 1.5090 | 10.5 | 760. | 150.0 | 0.0 | 841 |
| METHYLENE IODIDE | 217.87 | 3.3254 | 0.0 | 1.7559 | 6.0 | 0. | 181.0 | 0.0 | 842 |
| 2,3-DIBR-1-PROPANOL | 217.90 | 2.0739 | 20.0 | 1.5466 | 0.0 | 17. | 118.0 | 0.0 | 843 |
| 0-IODOTOLUENE | 218.05 | 1.7130 | 0.0 | 1.6090 | 0.0 | 0. | 211.5 | 0.0 | 844 |
| GLYCEROL TRIACETATE | 218.21 | 1.1562 | 20.0 | 1.5064 | 3.2 | 0. | 259.0 | 0.0 | 845 |
| PENTAETHYL BENZENE | 218.37 | 0.8985 | 19.0 | 1.5127 | -20.0 | 0. | 277.0 | 0.0 | 846 |
| ISOBUTYL TRICL ACETATE | 219.50 | 1.2550 | 25.0 | 1.4456 | 0.0 | 0. | 188.0 | 0.0 | 847 |
| TETRAETGLYCOL DIME ETHER | 222.29 | 1.0132 | 20.0 | 1.4336 | -21.4 | 760. | 275.8 | 0.0 | 848 |
| 1-HEXADECENE | 224.42 | 0.7825 | 0.0 | 1.4441 | 4.0 | 0. | 155.0 | 0.0 | 849 |
| 2-CL ETHYL TRICL ACETATE | 225.89 | 1.5357 | 20.0 | 1.4813 | 0.0 | 766. | 217.0 | 0.0 | 850 |

Note: Missing data is indicated by 0, 0., or 0.0.

(continued)

| Name | Mol. Wt. | Density | Temp. | Refract. Index | Melting Point | Pressure | Boiling Point | Dielec. Constant | List No. |
|------------------------------|----------|---------|-------|----------------|---------------|----------|---------------|------------------|----------|
| TRICHLOROACETYL BROMIDE | 226.29 | 0.1900 | 15.0 | 0.0 | 0.0 | 760. | 143.0 | 0.0 | 851 |
| TRI-N-PENTYLAMINE | 227.44 | 0.7907 | 20.0 | 1.4367 | -70.0 | 0. | 242.5 | 0.0 | 852 |
| DIBUTYL MALEATE | 228.29 | 0.9950 | 20.0 | 1.4454 | -80.0 | 0. | 280.0 | 0.0 | 853 |
| 1,5-DIBROMOPENTANE | 229.96 | 1.7060 | 18.0 | 1.5091 | -39.5 | 0. | 222.2 | 0.0 | 854 |
| TRIBUTYL OXALATE | 230.16 | 0.8580 | 20.0 | 1.4092 | -70.0 | 0. | 233.5 | 0.0 | 855 |
| DIISOPROPYL ADIPATE | 230.31 | 0.9659 | 20.0 | 1.4247 | -1.1 | 6. | 120.0 | 0.0 | 856 |
| DIPROPYL ADIPATE | 230.31 | 0.9790 | 20.0 | 1.4314 | -15.7 | 11. | 151.0 | 0.0 | 857 |
| DIPHENYL SELENIDE | 233.17 | 1.3510 | 20.0 | 1.6500 | 2.5 | 760. | 301.5 | 0.0 | 858 |
| TETRAETHYL TIN | 234.94 | 1.1870 | 23.0 | 1.4724 | -112.0 | 0. | 181.0 | 0.0 | 859 |
| O-DIBROMOBENZENE | 235.92 | 1.9557 | 0.0 | 1.6081 | 6.7 | 0. | 221.0 | 0.0 | 860 |
| M-DIBROMOBENZENE | 235.92 | 1.9523 | 0.0 | 1.6083 | -7.0 | 0. | 220.0 | 0.0 | 861 |
| 1-IOUO OBTANE | 240.14 | 1.3297 | 0.0 | 1.4890 | -45.7 | 0. | 255.5 | 0.0 | 862 |
| 1,2-DIBROMOHEXANE | 243.99 | 1.5872 | 15.0 | 1.5012 | 0.0 | 16. | 287.0 | 0.0 | 863 |
| DIETHYL AZELATE | 244.33 | 0.9729 | 20.0 | 1.4351 | -18.5 | 0. | 291.5 | 0.0 | 864 |
| TRICHLORIODOMETHANE | 245.30 | 2.3650 | 0.0 | 1.5854 | -19.0 | 0. | 147.0 | 0.0 | 865 |
| 4-BR-DIPHENYL ETHER | 249.11 | 1.4225 | 19.0 | 1.6088 | 18.0 | 0. | 325.0 | 0.0 | 866 |
| BENZAL BROMIDE | 249.95 | 1.5100 | 0.0 | 1.6147 | 0.0 | 0. | 140.0 | 0.0 | 867 |
| TRIBROMOACETALDEHYDE | 250.76 | 2.6650 | 25.0 | 1.5939 | 0.0 | 760. | 174.0 | 0.0 | 868 |
| BROMOFORM | 252.76 | 2.8889 | 20.0 | 1.5976 | 8.1 | 0. | 149.6 | 4.39 | 869 |
| 1-IOUO NAPHTHALENE | 254.07 | 1.7399 | 20.0 | 1.7026 | 4.2 | 0. | 302.0 | 0.0 | 870 |
| DIBUTYL ADIPATE | 258.35 | 0.9652 | 0.0 | 1.4369 | -37.0 | 14. | 183.0 | 0.0 | 871 |
| DIBUTYL ADIPATE | 258.36 | 0.9652 | 20.0 | 1.4369 | -37.0 | 4. | 145.0 | 0.0 | 872 |
| DIETHYL SEBACATE | 258.36 | 0.9646 | 20.0 | 1.4359 | 5.0 | 773. | 306.0 | 0.0 | 873 |
| DI ISOBUTYL ADIPATE | 258.36 | 0.9530 | 20.0 | 1.4315 | -17.0 | 760. | 282.0 | 5.19 | 874 |
| 1,2-DIBROMOETHANE | 259.83 | 2.1630 | 25.0 | 1.3670 | -110.5 | 0. | 47.3 | 2.34 | 875 |
| HEXACHLOROACETONE | 264.77 | 1.7440 | 12.0 | 0.0 | -30.0 | 0. | 203.9 | 0.0 | 876 |
| TRIBROMOETHYLENE | 264.78 | 2.7080 | 20.5 | 1.6345 | 0.0 | 0. | 163.5 | 0.0 | 877 |
| 1,1,2,3,4,4-HEXACHLOROBUTANE | 264.82 | 1.6460 | 20.0 | 1.5258 | 0.0 | 10. | 111.0 | 0.0 | 878 |
| TRI-N-BUTYL PHOSPHATE | 266.32 | 0.9760 | 25.0 | 1.4226 | -79.0 | 0. | 289.0 | 7.96 | 879 |
| 1,1,2-TRIBROMOETHANE | 266.79 | 2.5789 | 0.0 | 1.5933 | -35.5 | 0. | 188.5 | 0.0 | 880 |
| TETRAMETHYL LEAD | 267.33 | 1.9950 | 20.0 | 1.5120 | -27.5 | 0. | 110.0 | 0.0 | 881 |
| DIIODOMETHANE | 267.83 | 3.3078 | 25.0 | 1.7380 | 6.1 | 0. | 182.0 | 5.32 | 882 |
| DIBUTYL PHTHALATE | 278.35 | 1.0405 | 20.0 | 1.4926 | -35.0 | 0. | 340.0 | 6.44 | 883 |
| 1,1,2-TRIBROMO PROPANE | 280.80 | 2.3548 | 20.0 | 1.5790 | 0.0 | 760. | 200.5 | 0.0 | 884 |
| 1,2,2-TRIBROMO PROPANE | 280.80 | 2.2985 | 20.0 | 1.5670 | 0.0 | 760. | 190.5 | 0.0 | 885 |
| 1,2,3-TRIBROMO PROPANE | 280.80 | 2.4209 | 20.0 | 1.5862 | 16.9 | 760. | 222.2 | 0.0 | 886 |
| 1,1-DIIODOETHANE | 281.86 | 2.8400 | 0.0 | 1.6730 | 2.8 | 0. | 179.5 | 0.0 | 887 |
| OLEIC ACID | 282.47 | 0.8870 | 25.0 | 1.4582 | 13.4 | 0. | 360.0 | 2.44 | 888 |
| 1-BROMO-2-IODOBENZENE | 282.92 | 2.2571 | 25.0 | 1.6618 | 8.0 | 0. | 257.0 | 0.0 | 889 |
| 1-BROMO-3-IODOBENZENE | 282.92 | 2.2220 | 25.0 | 1.6604 | -9.0 | 754. | 252.0 | 0.0 | 890 |
| 1-CHLOROCTADECANE | 288.95 | 0.8586 | 25.0 | 1.4525 | 19.0 | 2. | 154.0 | 0.0 | 891 |
| 1-BROMOPENTADECANE | 291.32 | 0.9999 | 25.0 | 1.4592 | 18.6 | 80. | 172.0 | 0.0 | 892 |
| 1,2,3-TRIBROMO PROPANE | 294.65 | 2.1750 | 0.0 | 1.5652 | 0.0 | 0. | 223.5 | 0.0 | 893 |
| 1,2,4-TRIBROMO BUTANE | 294.83 | 2.1700 | 20.0 | 1.5608 | -18.0 | 760. | 215.0 | 0.0 | 894 |
| 2,2,3-TRIBROMO BUTANE | 294.83 | 2.1724 | 20.0 | 1.5602 | -1.9 | 760. | 206.0 | 0.0 | 895 |
| 1,2,3-TRIBROMOBUTANE | 294.84 | 2.1938 | 0.0 | 1.5680 | -19.0 | 21. | 113.5 | 0.0 | 896 |
| METHYL OLEATE | 296.50 | 0.8702 | 25.0 | 1.4502 | 19.9 | 0. | 217.0 | 3.21 | 897 |
| TRI-CL-ACETIC ANHYDRIDE | 308.76 | 1.6908 | 20.0 | 0.0 | 0.0 | 760. | 169.0 | 0.0 | 898 |
| DI-N-BUTYL SEBACATE | 314.47 | 0.9366 | 20.0 | 1.4397 | 1.0 | 0. | 345.0 | 4.54 | 899 |
| DIBUTYL SEBACATE | 314.47 | 0.9324 | 25.0 | 1.4415 | -11.0 | 0. | 345.0 | 4.54 | 900 |
| TETRAETHYL LEAD | 323.45 | 1.6590 | 11.0 | 1.5915 | -136.8 | 19. | 91.0 | 0.0 | 901 |
| N-BUTYL OLEATE | 338.56 | 0.8657 | 25.0 | 1.4480 | -10.0 | 0. | 227.5 | 4.00 | 902 |
| BUTYL STEARATE | 340.60 | 0.8540 | 25.0 | 1.4422 | 26.3 | 0. | 222.5 | 3.11 | 903 |
| 1,1,2,2-TETABROMOETHANE | 345.67 | 2.9529 | 25.0 | 1.6323 | 0.0 | 0. | 243.5 | 7.00 | 904 |
| 1,1,1,2-TETABROMOETHANE | 345.70 | 2.8748 | 0.0 | 1.6277 | 0.0 | 0. | 103.5 | 0.0 | 905 |
| BIS(2-ETHOXY ET)SEBACATE | 346.46 | 0.9953 | 25.0 | 1.4440 | -10.0 | 0. | 0.0 | 0.0 | 906 |
| TRI(2-TOLYL)PHOSPHATE | 368.36 | 1.1830 | 25.0 | 1.5575 | 11.0 | 20. | 264.0 | 0.0 | 907 |
| DI(2-ETHYL)ADIPATE | 370.58 | 0.9220 | 25.0 | 1.4474 | -67.8 | 5. | 214.0 | 0.0 | 908 |
| BIS(2-ETHYL)PHTHALATE | 390.57 | 0.9843 | 20.0 | 1.4859 | -50.0 | 0. | 231.0 | 5.30 | 909 |
| DIETHYLHEXYL AZELATE | 412.66 | 0.9150 | 25.0 | 1.4460 | -78.0 | 5. | 237.0 | 0.0 | 910 |
| BIS(2-ETHYLHEXYL)SEBACATE | 426.66 | 0.9120 | 25.0 | 1.4510 | -48.0 | 5. | 256.0 | 4.03 | 911 |











Note: Missing data is indicated by 0, 0., or 0.0.

Comparison of Solvent Properties (11)

| Poorly Hydrogen-Bonded | | | | | | | | | | |
|-----------------------------------------------------------|------------------------|------------------------------|-----------------------------------------|-----------------|------------------------------------|------------------------------|--------------------------|----------------------------|-------------------|--------------------------|
| | benzene | carbon tetra- chloride | n-hexane | chloro- form | perchloro- ethylene | Freon ^a TF | Freon ^b MF | trichloro- ethylene | methyl formate | methylene chloride |
| Boiling Point, °C | 80 | 77 | 68 | 61 | 121 | 48 | 24 | 87 | 31.8 | 39 |
| °F | 176 | 171 | 154 | 142 | 250 | 117.6 | 74.8 | 189 | 89.2 | 102 |
| Freezing Point, °C | 5.4 | -23 | -96 | -64 | -24 | -35 | -111 | -73 | -100 | -96 |
| °F | 41 | -9 | -141 | -83 | -11 | -31 | -168 | -99 | -148 | -142 |
| Density, g/mL (mg/m ³) | 0.88 | 1.59 | 0.66 | 1.49 | 1.62 | 1.58 | 1.49 | 1.46 | 0.97 | 1.33 |
| lb/gal | 7.34 | 13.26 | 5.51 | 12.43 | 13.55 | 13.16 | 12.42 | 12.22 | 8.13 | 11.07 |
| Vapor Density (air = 1) | 2.8 | 5.3 | 2.97 | 4.1 | 5.8 | — | — | 4.54 | 2.1 | 2.93 |
| Rate of Evaporation (Butyl acetate = 1) | 6.30 | 12.80 | 10.00 | 11.60 | 2.80 | 9.87 | 13.07 | 6.20 | ~36 | 27.50 |
| Viscosity, 20°C (68°F), cP (mPa·s) | 0.65 | 0.99 | 0.29 | 0.57 | 0.88 | 0.70 | 0.41 (30°C) | 0.58 | 0.35 | 0.44 |
| Surface Tension in Air, 20°C (68°F), dyn/cm (mN/m) | 28.9 | 26.8 | 18.4 | 27.2 | 32.3 | 19.0 | 18.7 | 32.0 (25°C) | 25.0 | 28.2 |
| Specific Heat, Liquid, 20°C (68°F), cal/g·C (Btu/lb·F) | 0.42 | 0.21 | 0.54 | 0.23 | 0.21 | 0.22 | 0.21 | 0.23 | 0.516 | 0.28 |
| kJ/kg·K | 1.75 | 0.88 | 2.26 | 0.96 | 0.87 | 0.93 | 0.87 | 0.96 | 2.16 | 1.17 |
| Heat of Vaporization (bp) | | | | | | | | | | |
| cal/g | 94 | 46 | 80 | 59 | 50 | 35.09 | 43.52 | 57 | 112.4 | 78 |
| Btu/lb | 170 | 84 | 145 | 106 | 90 | 63.12 | 78.31 | 103 | 202.3 | 141 |
| kJ/kg | 395 | 195 | 337 | 247 | 209 | 146.8 | 182.1 | 240 | 470.0 | 327 |
| Solubility Parameter, δ | 9.2 | 8.6 | 7.3 | 9.3 | 9.3 | 7.2 | 7.8 | 9.3 | 9.7 | 9.7 |
| Hydrogen Bonding Index, γ | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.5 | 2.5 | 2.5 | 2.7 | 2.7 |
| Flash Point, TCC, °C | -11 | NF | -22 | NF | NF | NF | NF | NF | -19 | NF |
| °F | 12 | | -7 | | | | | | -2 | |
| Flammable Limits, vol% | | | | | | | | | | |
| Lower | 1.4 | NF | 1.2 | NF | NF | NF | NF | NF | 5 | NF |
| Upper | 8 | | 6.9 | | | | | | 23 | |
| Threshold Limit Value,* ppm | 10 | 5 skin | 50 | 10 | 25 | 1000 | 1000 ceil. | 50 | 100 | 50 |
| Formula | C_6H_6 | CCl_4 | $\text{CH}_3(\text{CH}_2)_4\text{CH}_3$ | CHCl_3 | $\text{Cl}_2\text{C}=\text{CCl}_2$ | $\text{CCl}_2\text{FCClF}_2$ | CCl_2F_2 | $\text{CHCl}:\text{CCl}_2$ | HCOOCH_3 | CH_2Cl_2 |







(continued)

Moderately Hydrogen-Bonded

| | toluene | mixed xylenes | dimethyl sulfoxide | MEK | MIBK | ethyl acetate | THF | n-butyl acetate | acetone | 1,4-dioxane |
|----------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Boiling Point, °C °F | 111 231 | 135 275 | 189 372 | 79 175 | 117 243 | 77 171 | 66 151 | 125 257 | 56 133 | 101 214 |
| Freezing Point, °C °F | -95 -139 | — — | 18 65 | -87 -124 | -85 -121 | -84 -119 | -108.5 -163 | -76 -105 | -94 -137 | 10 50 |
| Density, g/mL (mg/m ³) lb/gal | 0.87 7.25 | 0.87 7.24 | 1.10 9.18 | 0.80 6.71 | 0.80 6.68 | 0.90 7.51 | 0.89 7.41 | 0.88 7.34 | 0.79 6.58 | 1.04 8.60 |
| Vapor Density (air = 1) | 3.1 | 1.1 | — | 2.5 | 3.5 | 3.04 | 2.49 | 4.0 | 2.0 | 3.0 |
| Rate of Evaporation (Butyl acetate = 1) | 2.4 | 0.7 | 9.2 | 5.72 | 1.65 | 6.15 | 8.0 | 1.00 | 11.60 | 3.11 |
| Viscosity, 20°C (68°F), cP (mPa·s) | 0.59 | 0.69 | 1.98 (25°C) | 0.42 | 0.59 | 0.44 | 0.48 | 0.74 | 0.35 | 1.31 |
| Surface Tension in Air, 20°C (68°F), dyn/cm (mN/m) | 28.4 | 28.9 | 43.5 | 24.6 | 22.7 | 23.9 | 26.4 (25°C) | 27.6 (27°C) | 23.7 | 33.4 |
| Specific Heat, Liquid, 20°C (68°F), cal/g·C (Btu/lb·F) kJ/kg·K | 0.39 1.63 | 0.40 1.67 | 0.47 1.97 (29°C) | 0.55 2.30 | 0.50 2.09 | 0.46 1.92 | 0.469 1.97 | 0.51 2.13 | 0.51 2.13 | 0.41 1.72 |
| Heat of Vaporization (bp) cal/g Btu/lb kJ/kg | 87 156 362 | 82 147 342 | 144 260 604 | 106 191 444 | 87 157 365 | 88 158 367 | 95 171 398 | 74 133 309 | 124 224 521 | 98 177 412 |
| Solubility Parameter, δ | 8.9 | 8.8 | 13.0 | 9.3 | 8.4 | 9.1 | 9.1 | 8.5 | 10 | 9.9 |
| Hydrogen Bonding Index, γ | 3.8 | 3.8 | 5.0 | 5.0 | 5.0 | 5.2 | 5.3 | 5.4 | 5.7 | 5.7 |
| Flash Point, TCC, °C °F | 4 40 | 27 80 | 95 (TOC) 203 | -7 20 | 23 73 | -4 24 | -14 6 | 27 81 | -18 0 | 12 54 |
| Flammable Limits, vol% Lower Upper | 1.2 7.1 | 1.1 7.0 | 2.6 28.5 | 1.8 10 | 1.4 7.5 | 2.2 11 | 2 11.8 | 1.4 7.6 | 3 13 | 2 22.2 |
| Threshold Limit Value, * ppm skin | 50 skin | 100 | — | 200 | 50 | 400 | 200 | 150 | 750 (500 proposed) | 25 skin |
| Formula |  |  |  |  |  |  |  |  |  |  |

(continued)

Strongly Hydrogen-Bonded

| | cyclo- hexanone | DMF | DMAC | EGME | ethyl ether | methanol | ethanol 95% | isopropyl alcohol | n-butyl alcohol | formamide |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------------|----------------|---------------------------------------------------------------------------------------|-----------------------------------------|---------------------------------------------------------------------------------------|
| Boiling Point, °C | 157 | 153 | 166.1 | 124 | 34 | 65 | 75.0 | 82 | 118 | 210 |
| °F | 315 | 307 | 331 | 255 | 94 | 148 | 167 | 180 | 244 | 410 |
| Freezing Point, °C | -31.2 | -61 | -20 | -85 | -123 | -98 | -128.0 | -89 | -89.8 | 3 |
| °F | -24 | -78 | -4 | -121 | -189 | -144 | -198.4 | -128 | -130 | 36 |
| Density, g/mL (mg/m ³) lb/gal | 0.94 7.88 | 0.90 7.50 | 0.945 7.88 | 0.96 8.04 | 0.71 5.92 | 0.79 6.63 | 0.812 6.74 | 0.78 6.55 | 0.81 6.76 | 1.13 9.46 |
| Vapor Density (air = 1) | 3.4 | 2.51 | 3.0 | 2.62 | 2.55 | 1.11 | 1.59 | 2.07 | 2.55 | — |
| Rate of Evaporation (Butyl acetate = 1) | 0.23 | 0.17 | <1 | 0.47 | 33.00 | 6.10 | 1.7 | 2.30 | 0.45 | <1 |
| Viscosity, 20°C (68°F), cP (mPa·s) | 2.2 | 0.80 | 0.92 (25°C) | 1.72 | 0.23 | 0.59 | 1.2 | 2.4 | 2.7 | 3.76 |
| Surface Tension in Air, 20°C (68°F), dyn/cm (mN/m) | 34.5 | 35.2 (25°C) | 32.4 (30°C) | 35.0 (25°C) | 17.0 | 22.6 | 22.8 | 21.7 | 24.6 | 58.4 |
| Specific Heat, Liquid, 20°C (68°F), cal/g·C (Btu/lb·F) | 0.49 | 0.49 | 0.48 | 0.53 | 0.55 | 0.60 | 0.62 | 0.60 | 0.56 | 0.551 |
| kJ/kg·K | 2.05 | 2.05 | 2.01 | 2.22 | 2.30 | 2.51 | 2.59 | 2.51 | 2.34 | 2.31 |
| Heat of Vaporization (bp) cal/g | 109 | 138 | 119 | 135 | 84 | 263 | — | 160 | 141 | 400 |
| Btu/lb | 197 (29°C) | 248 | 214 | 243 | 151 | 473 | — | 287 | 254 | 720 |
| kJ/kg | 458 | 576 | 498 | 565 | 351 | 1100 | — | 668 | 591 | 1674 |
| Solubility Parameter, δ | 9.9 | 12.1 | 10.8 | 10.8 | 7.4 | 14.5 | 13.6 | 11.5 | 11.4 | 19.2 |
| Hydrogen Bonding Index, γ | 6.4 | 6.4 | 6.6 | 6.9 | 6.9 | 8.9 | 8.9 | 8.9 | 8.9 | >16.2 |
| Flash Point, TCC, °C | 44 | 58 | 63 | 46 | -45 | 11 | 14 | 12 | 29 | 155 (TOC) |
| °F | 111 | 136 | 145 | 115 | -49 | 52 | 57 | 53 | 84 | 310 |
| Flammable Limits, vol% | | | | | | | | | | |
| Lower | 1.1 | 2.2 (100°C) | 1.8 (100°C) | 2.5 | 1.9 | 6.7 | 3.3 | 2.3 | 1.4 | 1.5 |
| Upper | 8.1 | 15.2 | 8.6 (20°C) | 14 | 48 | 36 | 19.0 | 12.7 | 11 | 12 |
| Threshold Limit Value, * ppm | 25 skin | 10 skin | 10 skin | 5 skin | 400 | 200 skin | 1000 | 400 | 50 ceil. skin (25 ceil. proposed) | 10 skin |
| Formula |  |  |  |  | $C_2H_5OC_2H_5$ | CH_3OH | C_2H_5OH |  | $CH_3(CH_2)_3OH$ |  |

Fats and Oils Composition (26)

| | | FATS AND OILS COMPOSITION | | | | | | | |
|-----------------------|-------------------------------------------------------------|---------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | | VEGETABLE BASED | | | | | | | |
| FATTY ACID COMPONENT | | CANOLA | CASTOR | COCO BUTTER | COCONUT | CORN | COTTON SEED | CRAMBE | LINSEED |
| C4 | BUTANOIC (Butyric) | | | | | | | | |
| C6 | HEXANOIC (Caproic) | | | | | | | | |
| C8 | OCTANOIC (Caprylic) | | | | 7.6 | | | | |
| C10 | DECANOIC (Capric) | | | | 7.3 | | | | |
| C10:1 | DECENOIC | | | | | | | | |
| TOTAL C10 | | | | | 7.3 | | | | |
| C12 | LAURIC (Dodecanoic) | | | | 48.2 | | 0.1 | | |
| C12:1 | cis-9-DODECENOIC | | | | | | | | |
| TOTAL C12 | | | | | 48.2 | | 0.1 | | |
| C14 | MYRISTIC (Tetradecanoic) | | | 0.5 | 16.6 | | 0.7 | | |
| C 14:1 | cis-9-TETRADECENOIC | | | | | | | | |
| TOTAL C14 | | | | 0.5 | 16.6 | | 0.7 | | |
| C15 | PENTADECANOIC | | | | | | | | |
| TOTAL C15 | | | | | | | | | |
| C16 | PALMITIC (Hexadecanoic) | 3.2 | 1.2 | 25.0 | 8.0 | 11.5 | 21.6 | 2.0 | 5.5 |
| C16:1 | cis-9-HEXADECENOIC | | 0.2 | | 1.0 | | 0.6 | 0.4 | |
| TOTAL C16 | | 3.2 | 1.4 | 25.0 | 9.0 | 11.5 | 22.2 | 2.4 | 5.5 |
| C17 | HEPTADECANOIC | | | | | | 0.1 | | |
| C17:1 | HEPTADECENOIC | | | | | | 0.1 | | |
| TOTAL C17 | | | | | | | 0.2 | | |
| C18 | STEARIC (Octadecanoic) | 0.9 | 1.0 | 34.5 | 3.8 | 2.2 | 2.6 | 0.4 | 3.5 |
| C18:1 | OLEIC (cis-9-Octadecenoic) | 66.8 | 3.0 | 36.5 | 5.0 | 26.6 | 18.6 | 16.9 | 19.1 |
| C18:2 | LINOLEIC (cis-9, cis-12-Octadecadienoic) | 19.0 | 3.5 | 3.0 | 2.5 | 58.7 | 54.4 | 8.6 | 15.3 |
| C18:3 | LINOLENIC (cis-9, cis-12, cis-15-Octadecatrienoic) | 9.1 | 0.2 | 0.5 | | 0.8 | 0.7 | 6.4 | 56.6 |
| C18:4 | cis-6, cis-9, cis-12, cis-15-OCTADECATETRAENOIC | | | | | | | | |
| C18:1 (OH) | RICINOLEIC (12-Hydroxy-cis-9-Octadecenoic) | | 89.2 | | | | | | |
| C18 (OH) ₂ | DIHYDROXYSTEARIC | | 1.4 | | | | | | |
| TOTAL C18 | | 95.8 | 98.3 | 74.5 | 11.3 | 88.3 | 76.3 | 32.3 | 94.5 |
| C19 | NONADECANOIC | | | | | | | | |
| TOTAL C19 | | | | | | | | | |
| C20 | EICOSANOIC (Arachidic) | | 0.3 | | | 0.2 | 0.3 | 0.5 | |
| C20:1 | cis-9 or cis-11-EICOSENOIC | | | | | | | 3.2 | |
| C20:2 | EICOSADIENOIC | | | | | | | | |
| C20:3 | EICOSATRIENOIC | | | | | | | | |
| C20:4 | ARACHIDONIC (cis-5, cis-8, cis-11, cis-14-Eicosatetraenoic) | | | | | | | | |
| C20:5 | EICOSAPENTAENOIC | | | | | | | | |
| TOTAL C20 | | | 0.3 | | | 0.2 | 0.3 | 3.7 | |
| C22 | DOCOSANOIC (Behenic) | | | | | | 0.2 | 2.0 | |
| C22:1 | cis-13-DOCOSENOIC (Erucic) | 1.0 | | | | | | 57.2 | |
| C22:2 | DOCOSADIENOIC | | | | | | | 0.8 | |
| C22:5 | 4, 8, 12, 15, 19-DOCOSAPENTAENOIC | | | | | | | | |
| C22:6 | DOCOSAHEXAENOIC | | | | | | | | |
| TOTAL C22 | | 1.0 | | | | | 0.2 | 60.0 | |
| C24 | TETRACOSANOIC (Lignoceric) | | | | | | | | |
| C24:1 | TETRACOSENOIC | | | | | | | | |
| TOTAL C24 | | | | | | | | | |
| Others | | | | | | | | 1.6 | |
| TOTAL | | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 |

Note: Typical % composition determined by chromatography. Some values obtained from literature.

Chemical Values

| | | | | | | | | |
|----------------------------|---------|------------|---------|---------|------------|---------|-----|---------|
| IODINE VALUE | 94-126 | 81-91 | 81-91 | 7-12 | 118-128 | 98-118 | 91 | 155-205 |
| SAP VALUE OF OIL | 186-198 | 176-187 | 177-187 | 250-264 | 187-193 | 189-198 | 169 | 188-196 |
| MELTING POINT, °C | | -20 to -10 | | 23-26 | -12 to -10 | -2 to 2 | | -20 |
| TITER, (OF SPLIT ACIDS) °C | 0-2 | 1-3 | 1-3.5 | 20-24 | 14-20 | 30-37 | | 19-21 |

Note: Some values obtained from literature.

(continued)

| FATS AND OILS COMPOSITION | | | | | | | |
|-------------------------------------------------------------------|-----------------|--------------|--------------|--------------|--------------|--------------|--------------|
| FATTY ACID COMPONENT | VEGETABLE BASED | | | | | | |
| | OLIVE | PALM KERNEL | PALM KERNEL | | PALM OIL | PALM OIL | |
| | | | OLEIN | STEARINE | | OLEIN | STEARINE |
| C4 BUTANOIC (Butyric) | | | | | | | |
| C6 HEXANOIC (Caproic) | | | 0.2 | 0.1 | | | |
| C8 OCTANOIC (Caprylic) | | 1.4 | 4.3 | 2.4 | | | |
| C10 DECAHOIC (Capric) | | 2.9 | 3.7 | 3.2 | | | |
| C10:1 DECEHOIC | | | | | | | |
| TOTAL C10 | | 2.9 | 3.7 | 3.2 | | | |
| C12 LAURIC (Dodecanoic) | | 50.9 | 42.6 | 55.2 | 0.3 | 0.2 | 0.7 |
| C12:1 cis-9-DODECEHOIC | | | | | | | |
| TOTAL C12 | | 50.9 | 42.6 | 55.2 | 0.3 | 0.2 | 0.7 |
| C14 MYRISTIC (Tetradecanoic) | | 18.4 | 12.4 | 19.9 | 1.1 | 1.0 | 1.5 |
| C 14:1 cis-9-TETRADECEHOIC | | | | | | | |
| TOTAL C14 | | 18.4 | 12.4 | 19.9 | 1.1 | 1.0 | 1.5 |
| C15 PENTADECANOIC | | | | | | | |
| TOTAL C15 | | | | | | | |
| C16 PALMITIC (Hexadecanoic) | 9.0 | 8.7 | 8.4 | 8.1 | 42.9 | 39.8 | 55.7 |
| C16:1 cis-9-HEXADECENOIC | 0.6 | | | | 0.2 | 0.2 | |
| TOTAL C16 | 9.6 | 8.7 | 8.4 | 8.1 | 43.1 | 40.0 | 55.7 |
| C17 HEPTADECANOIC | | | | | 0.1 | | |
| C17:1 HEPTADECENOIC | | | | | | | |
| TOTAL C17 | | | | | 0.1 | | |
| C18 STEARIC (Octadecanoic) | 2.7 | 1.9 | 2.5 | 3.3 | 4.6 | 4.4 | 4.8 |
| C18:1 OLEIC (cis-9-Octadecenoic) | 80.3 | 14.6 | 22.3 | 6.9 | 39.3 | 42.5 | 29.5 |
| C18:2 LINOLEIC (cis-9, cis-12-Octadecadienoic) | 6.3 | 1.2 | 3.4 | 0.8 | 10.7 | 11.2 | 7.2 |
| C18:3 LINOLENIC (cis-9, cis-12, cis-15-Octadecatrienoic) | 0.7 | | | | 0.4 | 0.2 | 0.1 |
| C18:4 cis-6, cis-9, cis-12, cis-15-OCTADECATETRAENOIC | | | | | | | |
| C18:1 (OH) RICINOLEIC (12-Hydroxy-cis-9-Octadecenoic) | | | | | | | |
| C18 (OH) ₂ DIHYDROXYSTEARIC | | | | | | | |
| TOTAL C18 | 90.0 | 17.7 | 28.2 | 11.0 | 55.0 | 58.3 | 41.6 |
| C19 NONADECANOIC | | | | | | | |
| TOTAL C19 | | | | | | | |
| C20 EICOSANOIC (Arachidic) | 0.4 | | 0.1 | 0.1 | 0.3 | 0.4 | 0.4 |
| C20:1 cis-9 or cis-11-EICOSEHOIC | | | 0.1 | | | | |
| C20:2 EICOSADIENOIC | | | | | | | |
| C20:3 EICOSATRIENOIC | | | | | | | |
| C20:4 ARACHIDONIC (cis-5, cis-8, cis-11, cis-14-Eicosatetraenoic) | | | | | | | |
| C20:5 EICOSAPENTAENOIC | | | | | | | |
| TOTAL C20 | 0.4 | | 0.2 | 0.1 | 0.3 | 0.4 | 0.4 |
| C22 DOCOSANOIC (Behenic) | | | | | 0.1 | 0.1 | 0.1 |
| C22:1 cis-13-DOCOSEHOIC (Erucic) | | | | | | | |
| C22:2 DOCOSADIENOIC | | | | | | | |
| C22:5 4, 8, 12, 15, 19-DOCOSAPENTAENOIC | | | | | | | |
| C22:6 DOCOSAHEXAENOIC | | | | | | | |
| TOTAL C22 | | | | | 0.1 | 0.1 | 0.1 |
| C24 TETRACOSANOIC (Lignoceric) | | | | | | | |
| C24:1 TETRACOSEHOIC | | | | | | | |
| TOTAL C24 | | | | | | | |
| Others | | | | | | | |
| TOTAL | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 |

Note: Typical % composition determined by chromatography. Some values

Chemical Values

| | | | | | | | |
|----------------------------|---------|---------|-------|-----|---------|--------|--------|
| IODINE VALUE | 80-88 | 14-19 | 25-31 | 6-9 | 50-55 | 56 Min | 48 Max |
| SAP VALUE OF OIL | 188-196 | 245-255 | | | 196-202 | | |
| MELTING POINT, °C | | 24-26 | | | 27-50 | | 24-26 |
| TITER, (OF SPLIT ACIDS) °C | 17-26 | 20-28 | | 32 | 40-47 | | 20-26 |

Note: Some values obtained from literature.

(continued)

FATS AND OILS COMPOSITION

VEGETABLE BASED

| FATTY ACID COMPONENT | PEANUT | RAPE SEED | SAFFLOWER | SOYBEAN | SUNFLOWER | TALL OIL |
|-------------------------------------------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| C4 BUTANOIC (Butyric) | | | | | | |
| C6 HEXANOIC (Caproic) | | | | | | |
| C8 OCTANOIC (Caprylic) | | | | | | |
| C10 DECANOIC (Capric) | | | | | | |
| C10:1 DECENOIC | | | | | | |
| TOTAL C10 | | | | | | |
| C12 LAURIC (Dodecanoic) | | | | | | |
| C12:1 cis-9-DODECENOIC | | | | | | |
| TOTAL C12 | | | | | | |
| C14 MYRISTIC (Tetradecanoic) | 0.1 | 0.1 | | 0.1 | | |
| C 14:1 cis-9-TETRADECENOIC | | | | | | |
| TOTAL C14 | 0.1 | 0.1 | | 0.1 | | |
| C15 PENTADECANOIC | | | | | | |
| TOTAL C15 | | | | | | |
| C16 PALMITIC (Hexadecanoic) | 11.1 | 4.0 | 6.5 | 10.5 | 7.0 | 0.2 |
| C16:1 cis-9-HEXADECENOIC | 0.2 | 0.1 | | | | |
| TOTAL C16 | 11.3 | 4.1 | 6.5 | 10.5 | 7.0 | 0.2 |
| C17 HEPTADECANOIC | 0.1 | | | | | |
| C17:1 HEPTADECENOIC | 0.1 | | | | | |
| TOTAL C17 | 0.2 | | | | | |
| C18 STEARIC (Octadecanoic) | 2.4 | 1.3 | 2.5 | 3.2 | 3.3 | 2.2 |
| C18:1 OLEIC (cis-9-Octadecenoic) | 46.7 | 17.6 | 12.5 | 22.3 | 21.0 | 58.6 |
| C18:2 LINOLEIC (cis-9, cis-12-Octadecadienoic) | 32.0 | 12.7 | 77.5 | 54.5 | 68.0 | 36.0 |
| C18:3 LINOLENIC (cis-9, cis-12, cis-15-Octadecatrienoic) | | 5.3 | | 8.3 | 0.7 | |
| C18:4 cis-6, cis-9, cis-12, cis-15-OCTADECATETRAENOIC | | | | | | |
| C18:1 (OH) RICINOLEIC (12-Hydroxy-cis-9-Octadecenoic) | | | | | | |
| C18 (OH) ₂ DIHYDROXYSTEARIC | | | | | | |
| TOTAL C18 | 81.1 | 36.9 | 92.5 | 88.3 | 93.0 | 96.8 |
| C19 NONADECANOIC | | | | | | |
| TOTAL C19 | | | | | | |
| C20 EICOSANOIC (Arachidic) | 1.3 | 0.9 | 0.5 | 0.2 | | 0.7 |
| C20:1 cis-9 or cis-11-EICOSENOIC | 1.6 | 10.6 | 0.5 | 0.9 | | 0.7 |
| C20:2 EICOSADIENOIC | | | | | | |
| C20:3 EICOSATRIENOIC | | | | | | |
| C20:4 ARACHIDONIC (cis-5, cis-8, cis-11, cis-14-Eicosatetraenoic) | | | | | | |
| C20:5 EICOSAPENTAENOIC | | | | | | |
| TOTAL C20 | 2.9 | 11.5 | 1.0 | 1.1 | | 1.4 |
| C22 DOCOSANOIC (Behenic) | 2.9 | 0.7 | | | | |
| C22:1 cis-13-DOCOSENOIC (Erucic) | | 45.8 | | | | |
| C22:2 DOCOSADIENOIC | | 0.1 | | | | |
| C22:5 4, 8, 12, 15, 19-DOCOSAPENTAENOIC | | | | | | |
| C22:6 DOCOSAHEXAENOIC | | | | | | |
| TOTAL C22 | 2.9 | 46.6 | | | | |
| C24 TETRACOSANOIC (Lignoceric) | 1.5 | 0.2 | | | | |
| C24:1 TETRACOSENOIC | | 0.6 | | | | |
| TOTAL C24 | 1.5 | 0.8 | | | | |
| Others | | | | | | 1.8 |
| TOTAL | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 | 100.0 |

Note: Typical % composition determined by chromatography. Some values

Chemical Values

| | | | | | | |
|----------------------------|---------|----------|----------|----------|----------|---------|
| IODINE VALUE | 84-100 | 100-110 | 140-150 | 120-141 | 125-136 | 122-142 |
| SAP VALUE OF OIL | 188-195 | 183-188 | 188-194 | 189-195 | 188-194 | 197-200 |
| MELTING POINT, °C | -2 | -7 to 10 | 18 to 16 | 23 to 20 | 18 to 16 | |
| TITER, (OF SPLIT ACIDS) °C | 26-32 | 23-26 | 16-18 | 20-21 | 16-20 | 4-15 |

Note: Some values obtained from literature.

(continued)

| FATTY ACID COMPONENT | ANIMAL BASED | | | |
|-------------------------------------------------------------------|--------------|--------------|--------------|---------------|
| | BUTTER | LARD | TALLOW | YELLOW GREASE |
| C4 BUTANOIC (Butyric) | 2.3 | | | |
| C6 HEXANOIC (Caproic) | 1.6 | | | |
| C8 OCTANOIC (Caprylic) | 1.5 | | | |
| C10 DECANOIC (Capric) | 2.2 | | | |
| C10:1 DECENOIC | 0.4 | | | |
| TOTAL C10 | 2.6 | | | |
| C12 LAURIC (Dodecanoic) | 2.5 | 0.3 | | |
| C12:1 cis-9-DODECENOIC | 0.2 | | | |
| TOTAL C12 | 2.7 | 0.3 | | |
| C14 MYRISTIC (Tetradecanoic) | 8.2 | 1.7 | 3.0 | 2.6 |
| C 14:1 cis-9-TETRADECENOIC | 2.6 | 0.2 | 0.4 | 0.3 |
| TOTAL C14 | 10.8 | 1.9 | 3.4 | 2.9 |
| C15 PENTADECANOIC | | 0.1 | | |
| TOTAL C15 | | 0.1 | | |
| C16 PALMITIC (Hexadecanoic) | 25.8 | 26.2 | 26.3 | 26.3 |
| C16:1 cis-9-HEXADECENOIC | 4.6 | 4.0 | 2.6 | 3.2 |
| TOTAL C16 | 30.4 | 30.2 | 28.9 | 29.5 |
| C17 HEPTADECANOIC | | 0.5 | 0.4 | 0.3 |
| C17:1 HEPTADECENOIC | | 0.3 | 0.4 | |
| TOTAL C17 | | 0.8 | 0.8 | 0.3 |
| C18 STEARIC (Octadecanoic) | 9.1 | 13.5 | 22.4 | 18.4 |
| C18:1 OLEIC (cis-9-Octadecenoic) | 32.1 | 42.9 | 43.1 | 45.3 |
| C18:2 LINOLEIC (cis-9, cis-12-Octadecadienoic) | 4.9 | 9.0 | 1.4 | 3.6 |
| C18:3 LINOLENIC (cis-9, cis-12, cis-15-Octadecatrienoic) | 2.0 | 0.3 | | |
| C18:4 cis-6, cis-9, cis-12, cis-15-OCTADECATETRAENOIC | | | | |
| C18:1 (OH) RICINOLEIC (12-Hydroxy-cis-9-Octadecenoic) | | | | |
| C18 (OH) ₂ DIHYDROXYSTEARIC | | | | |
| TOTAL C18 | 48.1 | 65.7 | 68.9 | 67.3 |
| C19 NONADECANOIC | | | | |
| TOTAL C19 | | | | |
| C20 EICOSANOIC (Arachidic) | | 0.2 | | |
| C20:1 cis-9 or cis-11-EICOSENOIC | | 0.8 | | |
| C20:2 EICOSADIENOIC | | | | |
| C20:3 EICOSATRIENOIC | | | | |
| C20:4 ARACHIDONIC (cis-5, cis-8, cis-11, cis-14-Eicosatetraenoic) | | | | |
| C20:5 EICOSAPENTAENOIC | | | | |
| TOTAL C20 | | 1.0 | | |
| C22 DOCOSANOIC (Behenic) | | | | |
| C22:1 cis-13-DOCOSENOIC (Erucic) | | | | |
| C22:2 DOCOSADIENOIC | | | | |
| C22:5 4, 8, 12, 15, 19-DOCOSAPENTAENOIC | | | | |
| C22:6 DOCOSAHEXAENOIC | | | | |
| TOTAL C22 | | | | |
| C24 TETRACOSANOIC (Lignoceric) | | | | |
| C24:1 TETRACOSENOIC | | | | |
| TOTAL C24 | | | | |
| Others | | | | |
| TOTAL | 100.0 | 100.0 | 100.0 | 100.0 |

Note: Typical % composition determined by chromatography. Some values

Chemical Values

| | | | | |
|----------------------------|---------|---------|---------|---------|
| IODINE VALUE | 25-42 | 53-57 | 48-52 | 50-65 |
| SAP VALUE OF OIL | 233-240 | 190-202 | 192-202 | 190-202 |
| MELTING POINT, °C | 28-35 | 33-46 | 40-47 | |
| TITER, (OF SPLIT ACIDS) °C | 33-38 | 32-43 | 40-47 | 39-43 |

Note: Some values obtained from literature.

(continued)

| FATTY ACID COMPONENT | MARINE BASED | | | |
|-------------------------------------------------------------------|--------------|--------------|--------------|-----------------------|
| | HERRING | MENHADEN | SARDINE | |
| C4 BUTANOIC (Butyric) | | | | C4 |
| C6 HEXANOIC (Caproic) | | | | C6 |
| C8 OCTANOIC (Caprylic) | | | | C8 |
| C10 DECANOIC (Capric) | | | | C10 |
| C10:1 DECENOIC | | | | C10:1 |
| TOTAL C10 | | | | TOTAL C10 |
| C12 LAURIC (Dodecanoic) | | | | C12 |
| C12:1 cis-9-DODECENOIC | | | | C12:1 |
| TOTAL C12 | | | | TOTAL C12 |
| C14 MYRISTIC (Tetradecanoic) | 7.6 | 7.3 | 6.0 | C14 |
| C 14:1 cis-9-TETRADECENOIC | | | | C14:1 |
| TOTAL C14 | 7.6 | 7.3 | 6.0 | TOTAL C14 |
| C15 PENTADECANOIC | 0.4 | 0.4 | | C15 |
| TOTAL C15 | 0.4 | 0.4 | | TOTAL C15 |
| C16 PALMITIC (Hexadecanoic) | 18.3 | 23.6 | 10.0 | C16 |
| C16:1 cis-9-HEXADECENOIC | 8.3 | 9.9 | 13.0 | C16:1 |
| TOTAL C16 | 26.6 | 33.5 | 23.0 | TOTAL C16 |
| C17 HEPTADECANOIC | 0.5 | 0.9 | | C17 |
| C17:1 HEPTADECENOIC | | | | C17:1 |
| TOTAL C17 | 0.5 | 0.9 | | TOTAL C17 |
| C18 STEARIC (Octadecanoic) | 2.2 | 2.6 | 2.0 | C18 |
| C18:1 OLEIC (cis-9-Octadecenoic) | 16.9 | 17.0 | 24.0 | C18:1 |
| C18:2 LINOLEIC (cis-9, cis-12-Octadecadienoic) | 1.6 | 1.2 | | C18:2 |
| C18:3 LINOLENIC (cis-9, cis-12, cis-15-Octadecatrienoic) | 0.6 | | | C18:3 |
| C18:4 cis-6, cis-9, cis-12, cis-15-OCTADECATETRAENOIC | | 4.1 | | C18:4 |
| C18:1 (OH) RICINOLEIC (12-Hydroxy-cis-9-Octadecenoic) | | | | C18:1 (OH) |
| C18 (OH) ₂ DIHYDROXYSTEARIC | | | | C18 (OH) ₂ |
| TOTAL C18 | 21.3 | 24.9 | 26.0 | TOTAL C18 |
| C19 NONADECANOIC | | 1.2 | | C19 |
| TOTAL C19 | | 1.2 | | TOTAL C19 |
| C20 EICOSANOIC (Arachidic) | | | | C20 |
| C20:1 cis-9 or cis-11-EICOSENOIC | 9.4 | | | C20:1 |
| C20:2 EICOSADIENOIC | | 0.3 | | C20:2 |
| C20:3 EICOSATRIENOIC | | 0.2 | | C20:3 |
| C20:4 ARACHIDONIC (cis-5, cis-8, cis-11, cis-14-Eicosatetraenoic) | 0.4 | 3.4 | 26.0 | C20:4 |
| C20:5 EICOSAPENTAENOIC | 8.6 | 12.0 | | C20:5 |
| TOTAL C20 | 18.4 | 15.9 | 26.0 | TOTAL C20 |
| C22 DOCOSANOIC (Behenic) | | | | C22 |
| C22:1 cis-13-DOCOSENOIC (Erucic) | 11.6 | | | C22:1 |
| C22:2 DOCOSADIENOIC | | 1.7 | | C22:2 |
| C22:5 4, 8, 12, 15, 19-DOCOSAPENTAENOIC | 1.3 | 9.1 | 19.0 | C22:5 |
| C22:6 DOCOSAHEXAENOIC | 7.6 | | | C22:6 |
| TOTAL C22 | 20.5 | 10.8 | 19.0 | TOTAL C22 |
| C24 TETRACOSANOIC (Lignoceric) | | | | C24 |
| C24:1 TETRACOSENOIC | 0.4 | 0.8 | | C24:1 |
| TOTAL C24 | 0.4 | 0.8 | | TOTAL C24 |
| Others | 4.3 | 4.3 | | Others |
| TOTAL | 100.0 | 100.0 | 100.0 | |

Note: Typical % composition determined by chromatography. Some values

Chemical Values

| | | | |
|----------------------------|---------|---------|---------|
| IODINE VALUE | 123-142 | 140-188 | 170-193 |
| SAP VALUE OF OIL | 180-192 | 189-193 | 189-193 |
| MELTING POINT, °C | | | |
| TITER, (OF SPLIT ACIDS) °C | 23-27 | 27-28 | 31-33 |

Note: Some values obtained from literature.

No warranties, express or implied, including patent warranties or warranties of merchantability or fitness for use, are made by Witco Corporation with respect to products described or information set forth herein. Nothing contained herein shall constitute a permission or recommendation to practice any invention covered by a patent without a license from the owner of the patent.

(continued)

Color Conversion Chart (26)

| COLOR CONVERSION CHART | | | | | | | |
|------------------------|-----------------------------------------|---------------------------|---------------------------------------|--------------|----------|------------------|-------|
| INDEX | PHOTOMETRIC INDEX (A.O.C.S.) 440/550 NM | LOVIBOND 5 1/4" CELL Y.R. | TRANSMISSION % THRU 2.5 CM 440/550 NM | GARDNER 1963 | A.P.H.A. | A.S.T.M. D-15000 | INDEX |
| | 0/0 | | 100/100 | | 0 | | |
| A | 4/0— | | 90/100— | | 50— | | A |
| | 7/0— | | 85/100— | | 100— | | |
| B | 11/0.3— | 3/0.3 | | —1 | 200— | | B |
| | 14/0.5— | 4/0.5 | 72/99— | | 300— | 1 | |
| C | | | 65/98— | 2 | 400— | | C |
| D | 22/1— | 7/1 | | | | | D |
| | 25/1.5— | | 59/97— | | | | |
| E | 28/2— | 8/1.5 | 51/95— | | 450— | | E |
| F | 32/3— | 10/2 | | 3 | 500— | | F |
| | 44/5— | 14/3 | 39/90— | 4 | 1— | | G |
| G | | 16/4 | | | | | |
| | | 18/5 | 28/85— | 5 | —1 1/2 | | H |
| H | 62/10— | 5/1 | 21/75— | 6 | 3— | | |
| I | 75/15— | | | | —2 | | I |
| | 88/20— | 7/2 | 12/60— | 7 | 5— | | |
| J | 108/30— | 10/3 | 8/50— | 8 | 7— | 2 1/2 | J |
| | | | | 9 | 9— | 3 | |
| K | | 16/5 | | 10 | | 3 1/2 | K |
| | 150/50— | | 2/30— | 11 | 13— | 4 | |
| L | | 20/10 | | 12 | 15— | | L |
| | 200/100— | —/20 | | 13 | | 4 1/2 | |
| M | | | 1/15— | | 19— | 5 | M |
| | | —/30 | | 14 | | 6 | |
| | —/200— | | | 15 | 31— | 7 | |
| | | | 0/0 | 16 | 35— | | |

| INDEX | PHOTOMETRIC INDEX (A.O.C.S.) 440/550 NM | LOVIBOND 1 CELL Y.R. | TRANSMISSION % THRU 2.5 CM 440/550 NM | GARDNER 1963 | F.A.C. | A.S.T.M. D-15000 | INDEX |
|-------|-----------------------------------------|----------------------|---------------------------------------|--------------|--------|------------------|-------|
|-------|-----------------------------------------|----------------------|---------------------------------------|--------------|--------|------------------|-------|

1. Comparisons of color scales of different systems are very difficult and inaccurate. Thus, this conversion chart should be used only for fatty acids and only to obtain approximate values.

2. Absorbency readings were taken on Coleman 6A Spectrophotometer using 25mm Cuvette.

Viscosity Conversions (41)

| VISCOSITY CONVERSIONS (For Newtonian Fluids, @ 25°C, D = 1) | | | | | | |
|----------------------------------------------------------------|-------------|---------|---------|---------|---------------|---------------|
| Centipoises | Ford Cup #4 | Zahn #2 | Zahn #3 | Zahn #4 | Gardner Holdt | Krebs Stormer |
| 1.0 | | | | | A-5 | |
| 10.0 | | 16 | | | A-4 | |
| 15.0 | | 17 | | | A-3 | |
| 22.0 | 14 | 19 | | | A-2 | |
| 32.0 | 15 | 20 | | | A-1 | |
| 50.0 | 19 | 22 | | | A | |
| 65.0 | 22 | 27 | | | B | |
| 85.0 | 27 | 34 | | | C | |
| 100.0 | 30 | 41 | 12 | | D | |
| 125.0 | 36 | 49 | 14 | 11 | E | |
| 140.0 | 40 | 58 | 16 | 13 | F | |
| 165.0 | 46 | 66 | 18 | 14 | G | |
| 200.0 | 50 | 82 | 23 | 17 | H | 52 |
| 225.0 | 55 | | 25 | 18 | I | 54 |
| 250.0 | 68 | | 27 | 20 | J | 56 |
| 275.0 | 74 | | 32 | 22 | K | 59 |
| 300.0 | 81 | | 34 | 24 | L | 61 |
| 320.0 | 86 | | 36 | 25 | M | 62 |
| 340.0 | 91 | | 39 | 26 | N | 63 |
| 370.0 | 99 | | 41 | 28 | O | 64 |
| 400.0 | 107 | | 46 | 30 | P | 65 |
| 435.0 | 116 | | 50 | 33 | Q | 66 |
| 470.0 | 125 | | 52 | 34 | R | 67 |
| 500.0 | 133 | | 57 | 37 | S | 68 |
| 550.0 | 146 | | 63 | 40 | T | 69 |
| 630.0 | 167 | | 68 | 44 | U | 71 |
| 885.0 | 199 | | | 64 | V | 78 |
| 1,070.0 | 270 | | | | W | 85 |
| 1,290.0 | | | | | X | 95 |
| 1,760.0 | | | | | Y | 100 |
| 2,270.0 | | | | | Z | 105 |
| 2,700.0 | | | | | Z-1 | 114 |
| 3,620.0 | | | | | Z-2 | 129 |
| 4,630.0 | | | | | Z-3 | 136 |
| 6,340.0 | | | | | Z-4 | |
| 9,850.0 | | | | | Z-5 | |
| 14,800.0 | | | | | Z-6 | |

Density of Water at Various Temperatures (23)

| Density of Water at Various Temperatures | |
|------------------------------------------|---------------|
| Temperature, °C | Density, g/ml |
| -20 | 0.99349 |
| -10 | 0.998137 |
| 0 | 0.999868 |
| 1 | 0.999927 |
| 2 | 0.999968 |
| 3 | 0.999992 |
| 4 | 1.000000 |
| 5 | 0.999992 |
| 6 | 0.999968 |
| 7 | 0.999930 |
| 8 | 0.999877 |
| 9 | 0.999809 |
| 10 | 0.999728 |
| 15 | 0.999129 |
| 20 | 0.998234 |
| 25 | 0.997075 |
| 30 | 0.995678 |
| 35 | 0.994063 |
| 40 | 0.992247 |
| 50 | 0.988066 |
| 60 | 0.983226 |
| 70 | 0.977793 |
| 80 | 0.971819 |
| 90 | 0.965340 |
| 95 | 0.961920 |
| 100 | 0.958384 |

References

- (1) Mellan, I., *Industrial Solvents*, Reinhold Publishing Corp., New York, NY (1939)
- (2) Mellan, I., *Industrial Solvents*, 2nd Ed., Reinhold Publishing Corp., New York, NY (1950)
- (3) Mellan, I., *Handbook of Solvents*, Vol. I, "Pure Hydrocarbons," Reinhold Publishing Corp., New York, NY (1957)
- (4) Phillips Chemical Co., 14 Phillips Bldg., Bartlesville, OK 74004, (800-858-4327)
- (5) Arizona Chemical Co., 1001 E. Business Highway 98, Panama City, FL 32401, (800-526-5294)
- (6) Fina Oil and Chemical Co., 8350 N. Central Expressway, Dallas, TX 75206, (800-344-FINA)
- (7) Mellan, I. *Source Book of Industrial Solvents*, Vol. II, "Halogenated Hydrocarbons," Reinhold Pub. Corp., New York, NY (1957)
- (8) Exxon Chemical Co., P.O. Box 3272, Houston, TX 77253, (800-526-0749/800-231-6633)
- (9) Elf Atochem Inc., 266 Harristown Rd., P.O. Box 607, Glen Rock, NJ 07452, (201-652-8575/800-932-0420)
- (10) Eastman Chemical Co., P.O. Box 431, Kingsport, TN 37662, (800-EASTMAN)
- (11) DuPont Co., Wilmington, DE 19898, (800-441-9408)
- (12) Sun Refining and Marketing Co., Ten Penn Center, 1801 Market St., Philadelphia, PA 19103, (215-977-3513/800-825-3535)
- (13) Unocal Corp., 1701 Golf Rd., Rolling Meadows, IL 60008, (800-967-7601/800-964-7676)
- (14) Shell Chemical Co., 3200 Southwest Freeway, Suite 1230, Houston, TX 77027, (713-241-8101)
- (15) CPS Chemical Co., Inc., P.O. Box 162, Old Bridge, NJ 08857, (908-607-2700)
- (16) Castrol Industries, 1000 W. 31st St., Downers Grove, IL 60515
- (17) Allied-Signal, Inc., Engineered Solvent, P.O. Box 1139R, Morristown, NJ 07962, (201-455-2120/800-922-0964)
- (18) Penreco, 138 Petrolia St., Karns City, PA 16041, (412-756-0110/800-245-3952)
- (19) Union Carbide Corp., 39 Old Ridgebury Rd., Danbury, CT 06817, (800-SOLVENT)
- (20) Amoco Chemicals, 801 Warrenville Rd., Lisle, IL 60532, (800-621-4567)
- (21) Grant Chemical Division, Ferro Corp., P.O. Box 263, Baton Rouge, LA 70821, (504-654-6801)
- (22) PPG Industries, Inc. One PPG Place, Pittsburgh, PA 15272, (412-434-3131/800-CHEM-PPG)
- (23) Dow Chemical Co., Midland, MI 48674, (800-447-4369)
- (24) Rhone-Poulenc Basic Chemicals Corp., One Corporate Dr., Box 881, Shelton, CT 06484, (203-925-3300)
- (25) Halocarbon Products Corp., 887 Kinderkamack Rd., River Edge, NJ 07661, (201-262-8899)
- (26) Humko Chemical Division, Witco Corp., P.O. Box 125, Memphis, TN 38101-0125, (901-320-5800)
- (27) Occidental Chemical Corp., Occidental Tower, 5005 LBJ Freeway, Dallas, TX 75244, (972-404-3700/800-733-9960)
- (28) Hercules, Inc., Hercules Plaza, Wilmington, DE 19894, (800-235-0543/800-400-6579)
- (29) Holson, R.W., et al, *Journal of the American Chemical Society*, 63:2094 (1941)
- (30) Quantum Chemical Corp., USI Division, 11500 Northlake Dr., Cincinnati, OH 45249, (708-285-0024/800-331-0229)
- (31) Mellan, I., *Source Book of Industrial Solvents*, Vol. III, "Monohydric Alcohols," Reinhold Publishing Corp., New York, NY (1959)
- (32) Mellan, I., *Polyhydric Alcohols*, Spartan Books, Washington, DC (1962)
- (33) Kirk, R.E., and Othmer, D.F., *Encyclopedia of Chemical Technology*, Interscience Encyclopedia, Inc., New York, NY
- (34) Angus Chemical Co., 1500 E. Lake Cook Rd., Buffalo Grove, IL 60089, (847-215-8600)
- (35) Haas, H.B. and Riley, E.F., *Chemical Review*, 32, No. 373 (1943)
- (36) Gaylord Chemical Corp., P.O. Box 1209, Slidell, LA 70459, (504-649-5464)
- (37) Dynaloy, Inc., 7 Great Meadow La., Hanover, NJ 07936, (201-887-9270)
- (38) ICI Americas Inc., Wilmington, DE 19897, (302-575-4270)
- (39) Procter & Gamble, Industrial Chemical Div., P.O. Box 599, Cincinnati, OH 45201, (513-983-5607/800-543-1580)
- (40) Vista Chemical Co., 900 Threadneedle, P.O. Box 19029, Houston, TX 77224, (713-588-3000/800-231-8212)
- (41) Eastman Kodak Co., 343 State St., Rochester, NY 14650, (800-225-5352)
- (42) Hoechst Celanese Corp., 1601 West LBJ Freeway, Dallas, TX 75234, (214-277-4000)
- (43) SCM Gliidco Organics Corp., P.O. Box 389, Jacksonville, FL 32201, (904-768-5800/800-231-6728)
- (44) Rember, R.F., *Acetone: Its Production and Uses*, National Wood Chemicals Association, Washington, DC
- (45) Sonneborn Division, Witco Corp., 520 Madison Ave., New York, NY 10022-4236, (212-605-3911/800-634-4010)
- (46) QO Chemicals, Inc., P.O. Box 2500, West Lafayette, IN 47906, (317-497-6100/800-621-9521)
- (47) BASF Corp., 3000 Continental Dr. N., Mt. Olive, NJ 07828, (800-443-6460)
- (48) Huntsman Corp. (formerly Texaco), P.O. Box 27707, Houston, TX 77227, (713-235-6000)
- (49) ISP (GAF), International Specialty Products (GAF), 1361 Alps Rd., Wayne, NJ 07470, (201-628-3000)
- (50) Mellan, I., *Ketones*, Chemical Publishing Co., New York, NY (1968)
- (51) Mapstone, G.E., *Chemical Processing*, April 1967
- (52) Total Petroleum, Inc., East Superior St., Alma, MI 48802, (517-463-1161)
- (53) Vulcan Chemicals, P.O. Box 530390, Birmingham, AL 35253, (205-877-3000/800-633-8280)
- (54) 3M Adhesive Systems, 3M Center, St. Paul, MN 55144, (612-733-1110)
- (55) *American Ink Maker*, New York, NY
- (56) J.T. Baker Chemical Co., 222 Red School La., Phillipsburg, NJ 08865, (201-859-2151)
- (57) *Chemical Processing*, p.94b, September, 1954

- (58) Henkel Corp., 5325 S. 9th Ave., LaGrange, IL 60525-3602, (312-579-6150/800-237-4037)
- (59) Akzo Chemicals Inc., 300 S. Riverside Plaza, Chicago, IL 60606, (312-906-7500/800-257-8292)
- (60) Crowley Chemical Co., Inc. 261 Madison Ave., New York, NY 10016, (212-682-1200)
- (61) Baxter Healthcare Corp., Burdick & Jackson Div., 1953 S. Harvey St., Muskegon, MI 49442, (616-726-3171/800-368-0050)
- (62) Alpha Metals, Inc., 600 Route 440, Jersey City, NJ 07304, (201-434-6778)
- (63) Henkel Corp., Emery Group, 5051 Estercreek Dr., Cincinnati, OH 45232, (513-482-3000)
- (64) Mobil Oil Corp., 3225 Gallows Rd., Fairfax, VA 22037, (800-662-4525)
- (65) Kendall/ Amalie Division, Witco Corp., 77 N. Kendall Ave., Bradford, PA 16701, (814-368-6111)
- (66) Olin Chemicals, 120 Long Ridge Rd., Stamford, CT 06904, (203-356-3000/800-243-9171)
- (67) Chemcentral Corp., P.O. Box 730, Chicago (Bedford Park), IL 60499, (800-331-6174)
- (68) Stepan Co., 22 W. Frontage Rd., Northfield, IL 60093, (708-446-7500/800-745-7837)
- (69) Ashland Chemical Co., ICS Division, P.O. Box 2219, Columbus, OH 43216, (614-790-3333)
- (70) ARCO Chemical Co., 3801 W. Chester Pike, Newtown Square, PA 19073, (800-345-0252)
- (71) Cardolite Corp., 500 Doremus Ave., Newark, NJ 07105, (201-344-5015/800-322-7365)
- (72) "Solvay's Chlorobenzenes," *Chemical Engineering*, April 1954
- (73) Liggett, L.M., *Anal. Chem.*, 26:748 (1954)
- (74) Velsicol Chemical Corp., 10400 W. Higgins Rd., Suite 600, Rosemont, IL 60018, (708-298-9000)
- (75) Monsanto Chemical Co., 800 N. Lindbergh Blvd., St. Louis, MO 63167, (314-694-1000/800-325-4330)
- (76) FMC Corp., 1735 Market St., Philadelphia, PA 19103, (800-468-3853)
- (77) Witco Corp., One American La., Greenwich, CT 06831, (800-494-8287)
- (78) Reilly Industries, Inc., 1510 Market Square Center, 151 N. Delaware St., Indianapolis, IN 46204, (317-247-8141)

Trade Name Index

- AB (Angus Chemical) - 214, 215
ACINTENE (Arizona Chemical) - 58-60
ACINTOL (Arizona Chemical) - 670
AEPD (Angus Chemical) - 215
ALFOL (Vista Chemical) - 322-324
ALQUAT (Henkel Corp.) - 699
ALPHA (Alpha Metals) - 149
AMINE CS-1135 (Angus Chemical) - 718
AMINE CS-1246 (Angus Chemical) - 718
AMP (Angus Chemical) - 214, 765
AMPD (Angus Chemical) - 214, 215
ANGUS (Angus Chemical) - 211-214
ANHYDROL (Union Carbide) - 284, 285, 328
ARCOSOLV (Arco Chemical) - 496, 497, 514-516,
521, 523, 524, 530-534, 536, 537, 540, 544,
545, 827-831, 836, 837, 839
ARMEEN (Akzo Chemicals) - 711, 712, 715
AROMATIC (Exxon) - 73
ASHLAND (Ashland Chemical) - 498, 741
BIOGRADE (Halocarbon Products Corp.) - 671
BLO (ISP) - 791
BUTYL DIOXITOL (Shell Chemical) - 84, 85
C-11 KETONE (Eastman) - 650
CARBITOL (Union Carbide) - 96-98, 476, 513, 523,
525, 576-580, 598, 839, 843-848
CARBOWAX (Union Carbide) - 109, 582-598
CARDOLITE (Cardolite Corp.) - 480
CELLOSOLVE (Union Carbide) - 96-98, 358, 476,
513-516, 521, 576-580, 827-829, 839, 843-
849
CHLOROTHENE (Dow Chemical) - 548
CHLOROWAX (Occidental Chemical) - 108-110
CHP (ISP) - 805
COMSOL - 218-221
CYCLO-SOL (Shell Chemical) - 88, 89
DALPAD (Dow Chemical) - 500-502, 536, 550, 559,
572
DIPENTENE (Hercules) - 55
DMAMP-80 (Angus Chemical) - 214, 765
DOWANOL (Dow Chemical) - 405, 423, 501, 502,
516, 519, 523, 528, 530, 533, 536, 548, 550,
554-565, 568, 572, 573, 830, 831, 839
DREWPOL (Stepan) - 853
DUOMEEN (Akzo Chemicals) - 711, 713
DYNASOLVE (Dynaloy) - 65-67
EASTMAN (Eastman) - 69-71, 457, 503, 650, 827-
830, 839
EKTASOLVE (Eastman) - 216, 503, 516, 523, 524,
634, 636
EMERSOL (Henkel Corp.) - 673-675
EMERY (Henkel Corp.) - 443, 672-675, 850
EMPOL (Henkel) - 697
ETHODUOMEEN (Akzo) - 714
ETHOMEEN (Akzo) - 711, 713-715
EXXSOL (Exxon) - 73
FILMEX (Quantum Chemical) - 281, 328
FINA (Fina Oil and Chemical) - 131
GLYME (Ferro) - 574
HALSO (Occidental Chemical) - 115
HEP (ISP) - 805
HERCO (Hercules) - 349
HERCULES (Hercules) - 56, 57, 457
HEXSOLV (Chemcentral Corp.) - 63
HI-SOL (Ashland Chemical) - 62
HYSTRENE (Witco Corp.) - 676-680
INDUSTRENE (Witco Corp.) - 676, 677, 679, 680
INKSOLV (Union Carbide) - 284, 285
ISOPAR (Exxon Chemical) - 73
JEFFSOL (Huntsman Corp.) - 861-866
KEMAMINE (Humko Corp.) - 699, 735
KEMSTRENE (Witco Corp.) - 444
KENSOL (Kendall/Amalie) - 75-77
KESSCO (Stepan Co.) - 852, 853
KP-140 (FMC Corp.) - 882
KWIK DRI (Ashland Chemical) - 62
LACOLENE (Ashland Chemical) - 62
LACTOL (Unocal Corp.) - 99
LPA (Vista Chemical) - 101
3M (3M Adhesive Systems) - 93
MONOGLYME (Ferro) - 515
M-PYROL (ISP) - 782-804
MR (Vista Chemical) - 101
NAPHTHOL SPIRITS (Unocal Corp.) - 99
NB (Angus Chemical) - 212
NE (Nitroethane) (Angus Chemical) - 211
NEOBEE (Stepan Co.) - 853
NEO-FAT (Akzo Chemicals) - 681, 682
NEP (ISP) - 805
NEPD (Angus Chemical) - 212
NEUSTRENE (Witco Corp.) - 444
NIPAR (Angus Chemical) - 216, 217, 219
NM (Nitromethane) (Angus Chemical) - 213
NMP (Angus Chemical) - 213, 809
NMPD (Angus Chemical) - 213
NORPAR (Exxon Chemical) - 73
OXITOL (Shell Chemical) - 839
OXSOL (Occidental Chemical) - 169-194
PANASOL (Amoco Chemical) - 61
PEGASOL (Mobile Oil) - 79, 80
PENRECO (Penreco) - 81
PERCHLOR (PPG Industries) - 130
PLURACOL (BASF Corp.) - 581
PLURONIC (BASF Corp.) - 622
POLYGLYME (Ferro/Grant) - 505
POLY-SOLV (Olin Chemicals) - 512-514, 523,
525, 527, 530, 533, 536, 537
PROPASOL (Union Carbide) - 96, 830, 839, 843-
845, 849
PROPOMEEN (Akzo Chemicals) - 714
PUNCTILIOUS (Quantum Chemical) - 282
QO (QO Chemicals) - 340, 346
REOFOS (FMC Corp.) - 881
REOMOL (FMC Corp.) - 883
RETARDSOL (Unocal) - 100

SAF-T-SOL (Crowley Chemical) - 64
SANTICIZER (Monsanto Chemical) - 855, 867, 872,
875-882, 889
SCOTCH-GRIP (3M Adhesive Systems) - 93
SHELL SOL (Shell Chemical) - 88, 89
SOLVENOL (Hercules) - 55, 56
SOLVENT III (Vulcan Chemicals) - 137-141, 145
SPECIAL NAPHTHOLITE (Unocal) - 99
STAR (Procter & Gamble) - 443
SULFOLANE (Phillips Chemical) - 236
SUPEROL (Procter & Gamble) - 443
SURFADONE (ISP) - 807-809
SYNASOL (Union Carbide) - 284, 285
TECSOL (Eastman Chemical) - 72, 327, 328
TERPINEOL (Hercules) - 352, 353
TETRONIC (BASF Corp.) - 622
TEXANOL (Eastman Chemical) - 70, 71, 325, 835
TEXTILE SPIRITS (Unocal) - 99

THFA (QO Chemicals) - 346, 348
TOLU-SOL (Shell Chemical) - 88, 89
TOTAL (Total Petroleum) - 93
TRIAMEEN (Akzo Chemicals) - 711, 713
TRIS AMINO (Angus Chemical) - 213, 214
TRIS NITRO (Angus Chemical) - 212, 213
UCAR (Union Carbide) - 96, 97, 462, 549, 653,
654, 844, 845
UNION CARBIDE (Union Carbide) - 652, 843
UNOCAL (Unocal) - 99, 100
VARSOL (Exxon Chemical) - 73
VERTREL (DuPont) - 160-168
VISTA (Vista Chemical) - 101, 102
WECOBEE (Stepan Co.) - 853
WITCO (Witco Corp.) - 75-77, 444
YARMOR (Hercules) - 350, 351
ZOLDINE ZT-55 (Angus Chemical) - 718